
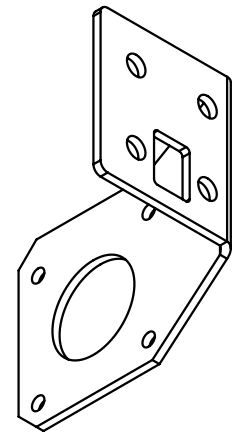
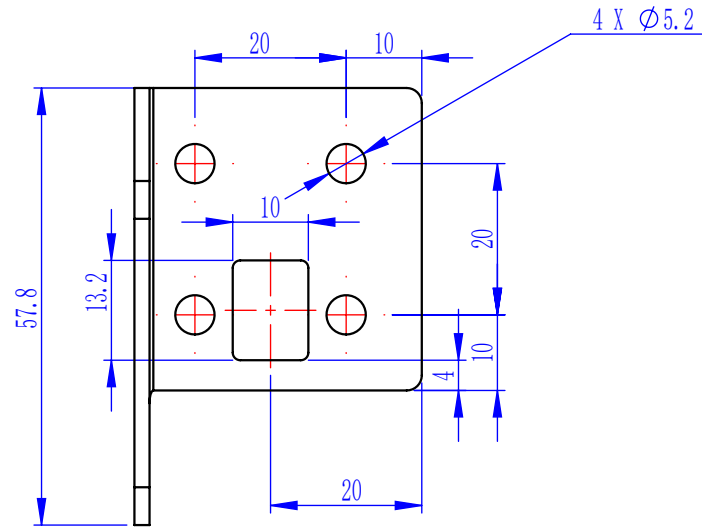


b

a

RMN 3.2/

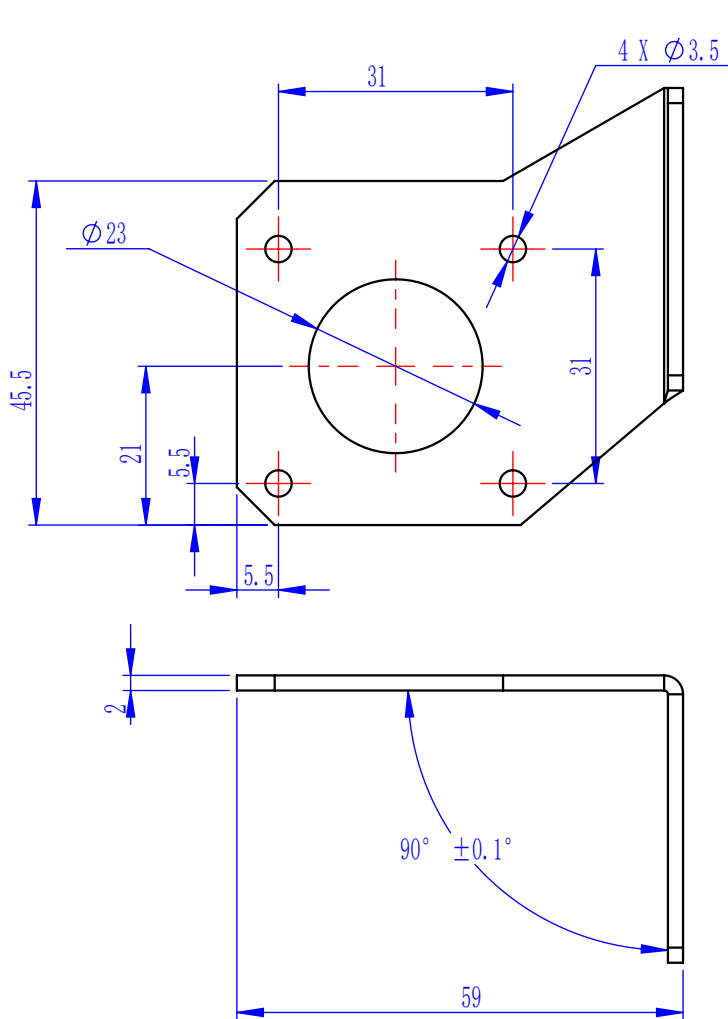

Notes:

1. Appearance: smooth and flat, remove burrs, sharp edges, nodeformation;
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um;
5. Meet ROHS standard
6. Surface finish: Black powder spraying

| REV. | DATE | REVISION ORIGINOR | SIGN | ISSUED |
|------|------|-------------------|------|--------|
| (A) | | | | |
| (B) | | | | |

| | | | | | | | |
|---|--|------|--|--|------------|---|--------------|
| APPROVALS | | DATE | <div>ELEGOO 深圳市智能派科技有限公司</div> <div>Shenzhen Elegoo Technology Co.,Ltd</div> | | | | |
| DRAWN | | | | | | | |
| CHECKED | | | PART NAME | | MATERIAL |  | |
| ISSUED | | | Fixing Plate_Y-axis Motor | | SPCC t=2.0 | | |
| <div>General Tolerance Reference</div> <div>GB/T 1804-m</div> | | | DRAWING NO. | | SIZE | SCALE | REV. |
| | | | | | A4 | 1:1 | B |
| | | | Neptune 2-BJ-005 | | UNIT: MM | | SHEET 1 OF 1 |