
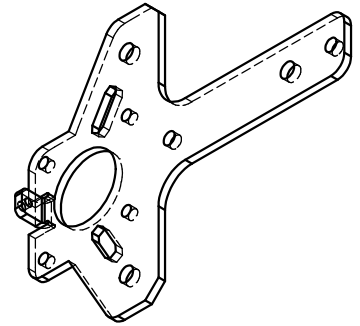
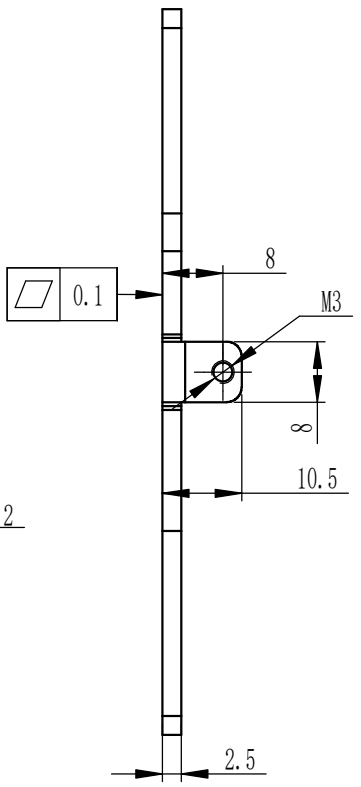


b


a

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
Ⓐ				
Ⓑ				

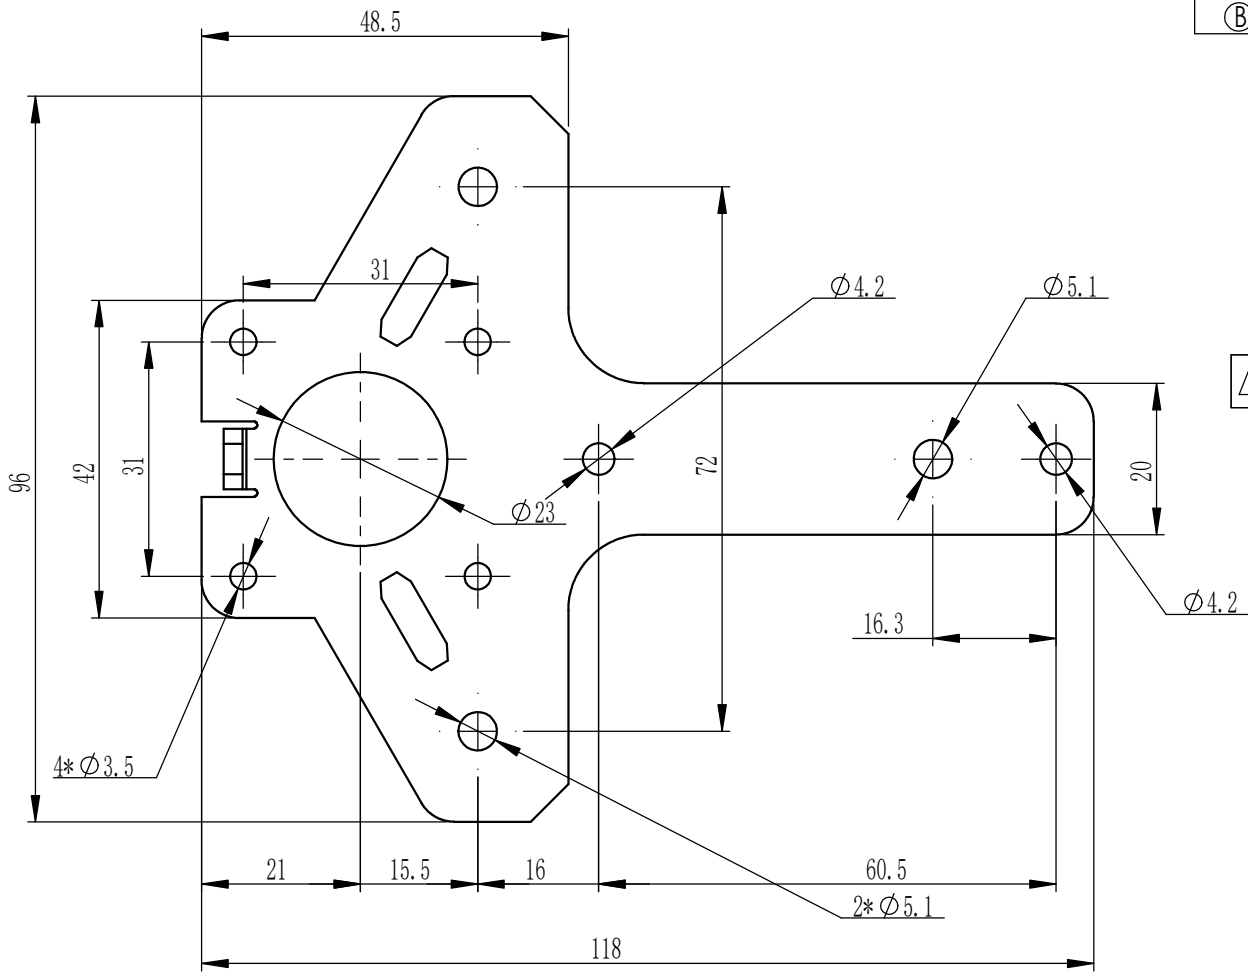

Technical requirements:

1. Appearance: smooth and flat, remove burrs, sharp edges, no deformation ;
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um;
5. Meet ROHS standard.

APPROVALS		DATE		<div><div>ELEGOO</div><div>深圳市智能派科技有限公司</div><div>Shenzhen Elegoo Technology Co.,Ltd</div></div>					
DRAWN		2022/12/16							
CHECKED				PART NAME		MATERIAL			
ISSUED				Fixing Plate_X-axis-stepper		SPCC			
General Tolerance Reference GB/T 1804-m				DRAWING NO. Neptune 3P-BJ-008		SIZE A4	SCALE 1:1	REV. A	
								UNIT: MM	