
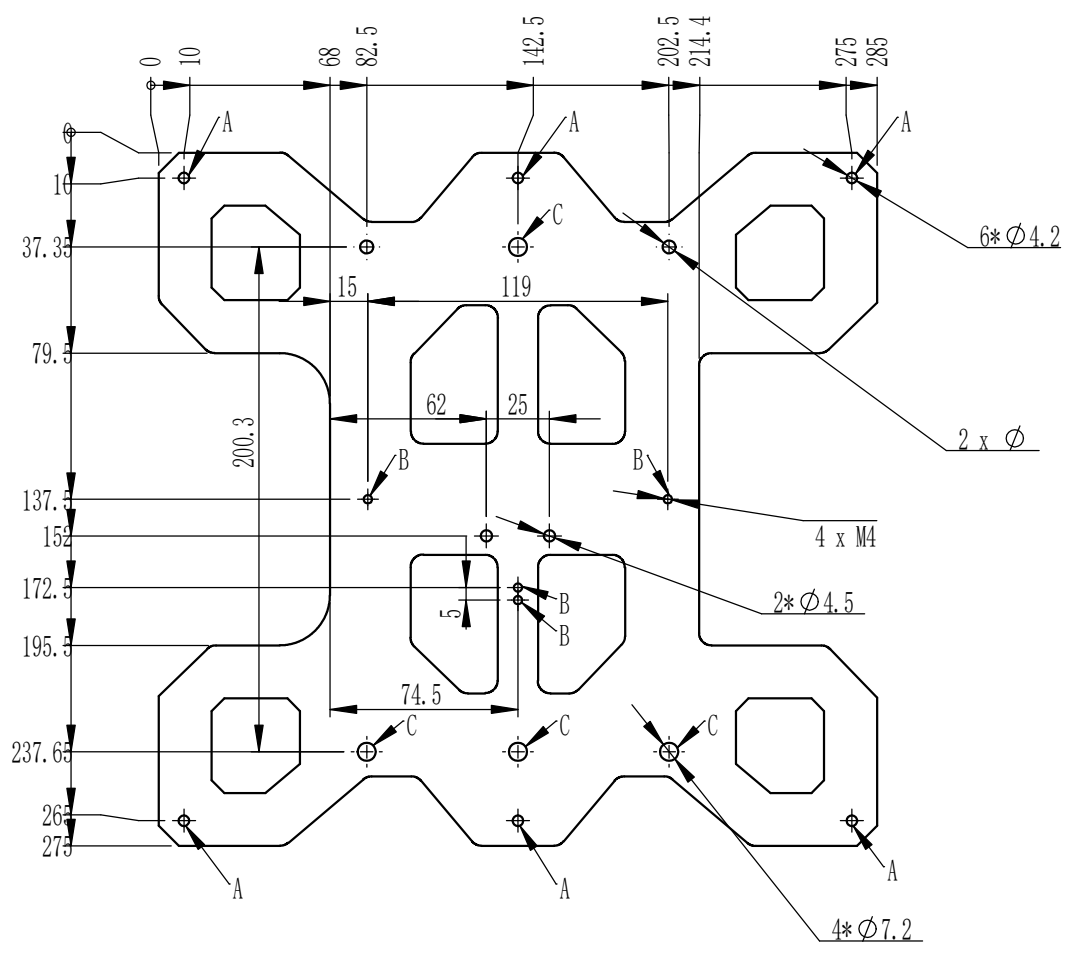


b

a



Technical requirements:
1. Appearance: smooth and flat, remove burrs, sharp edges, no deformation ;
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um;
5. Meet ROHS standard.

APPROVALS		DATE	ELEGOO 深圳市智能派科技有限公司 Shenzhen Elegoo Technology Co., Ltd			
DRAWN		2022/12/21				
CHECKED			PART NAME Bottom Slider Plate	MATERIAL AL5052 4.0	REV. A	
ISSUED						
General Tolerance Reference GB/T 1804-m			DRAWING NO. Neptune 3 plus-BJ-008	SIZE A4	SCALE 1:3	SHEET 1 OF 1
				UNIT: MM		