
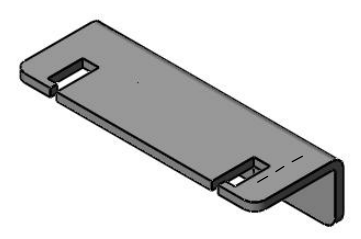
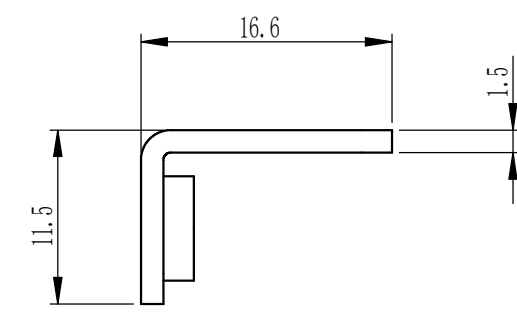


b


a

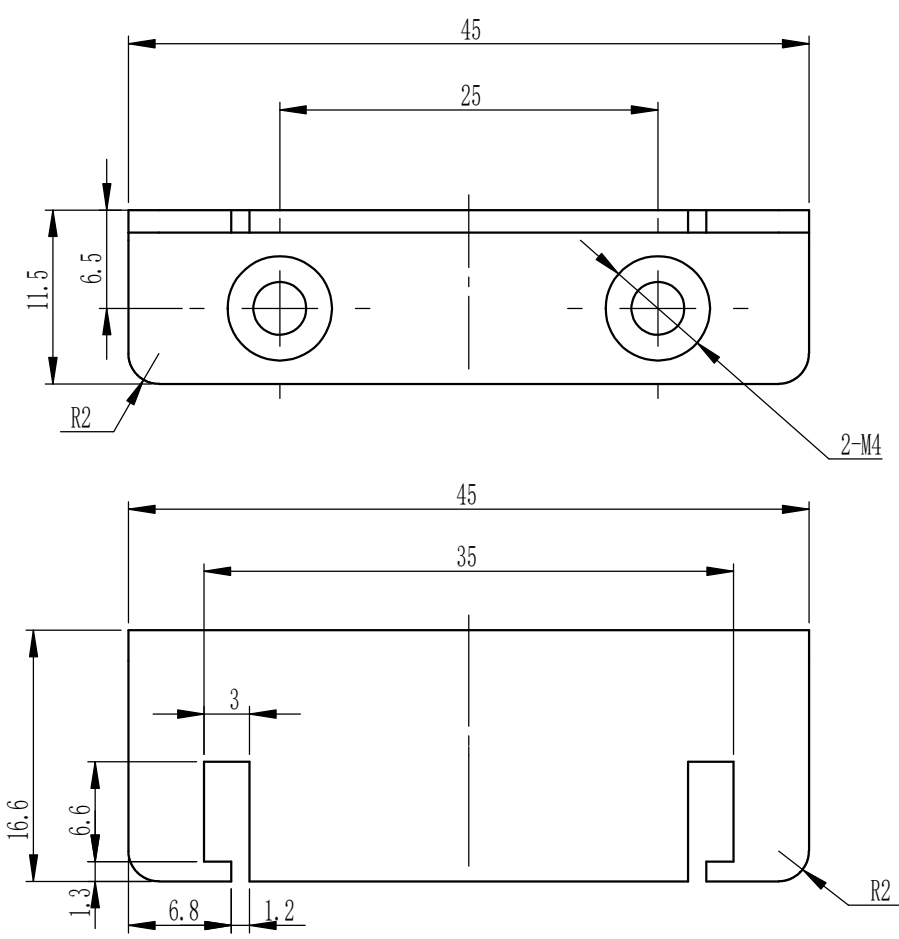

Technical requirements:

1. Appearance: smooth and flat, remove burrs, sharp edges, no deformation ;
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um;
5. Meet ROHS standard.

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
Ⓐ				
Ⓑ				

APPROVALS		DATE	ELEGOO 深圳市智能派科技有限公司					
DRAWN		2022/12/21	Shenzhen Elegoo Technology Co.,Ltd					
CHECKED			PART NAME Fixing Plate_Y-Belt		MATERIAL SPCC1.5			
ISSUED								
General Tolerance Reference GB/T 1804-m			DRAWING NO. Neptune 3 plus-BJ-007		SIZE A4	SCALE 2:1	REV. A	
					UNIT: MM		SHEET 1 OF 1	