
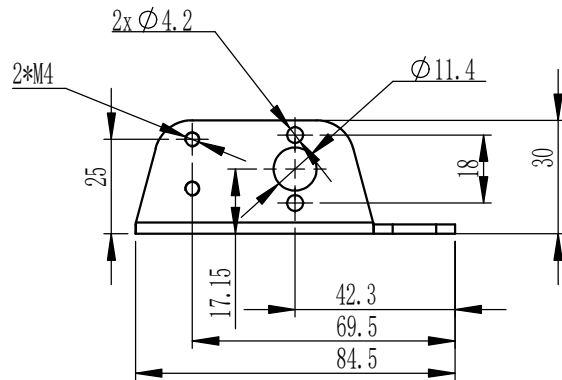


b



a

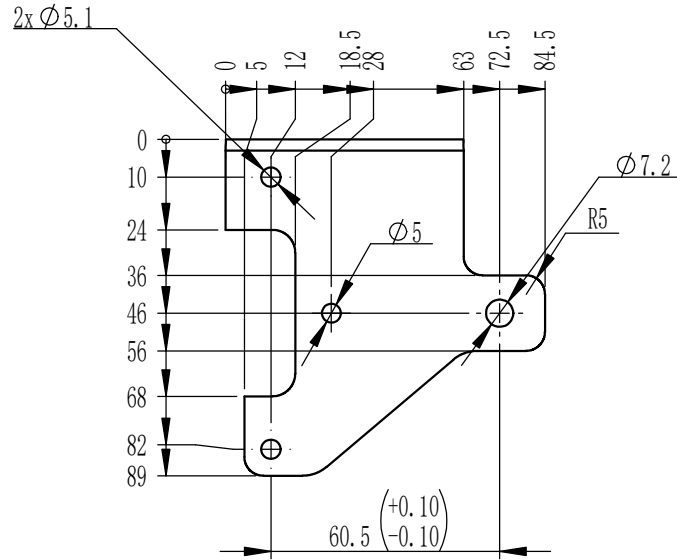

Technical requirements:

1. Appearance: smooth and flat, remove burrs, sharp edges, no deformation ;
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um;
5. Meet ROHS standard.

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
(A)				
(B)				

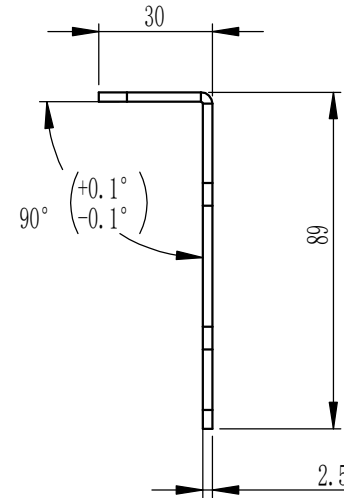

APPROVALS		DATE	ELEGOO 深圳市智能派科技有限公司		Shenzhen Elegoo Technology Co., Ltd	
DRAWN		2022/12/16	PART NAME		MATERIAL	
CHECKED			Fixing Plate_Z nut-Left		SPCC2.5	
ISSUED			DRAWING NO.		REV.	
General Tolerance Reference GB/T 1804-m		Neptune 3P-BJ-007		SIZE A4	SCALE 1:2	A
				UNIT: MM		SHEET 1 OF 1