
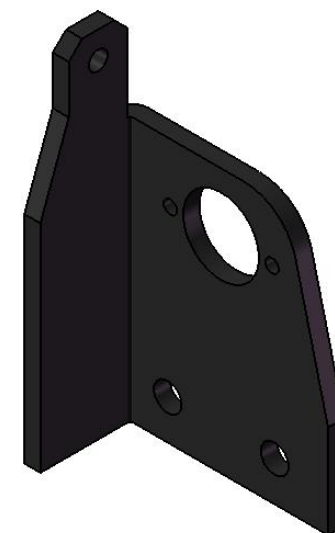
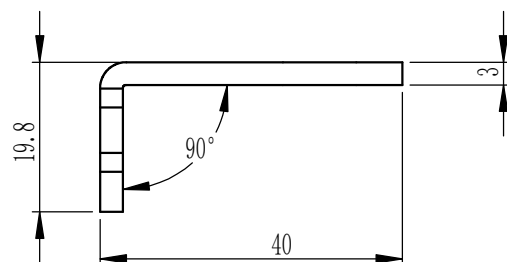
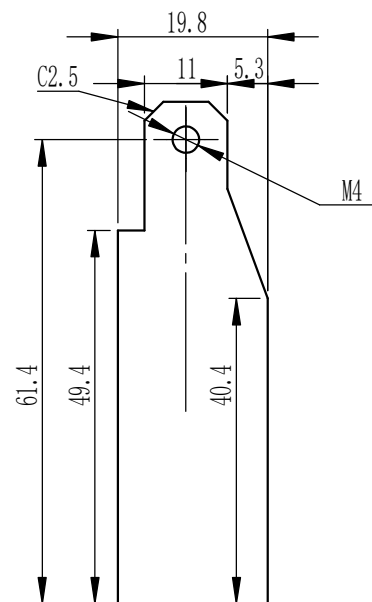



4

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
Ⓐ				
Ⓑ				

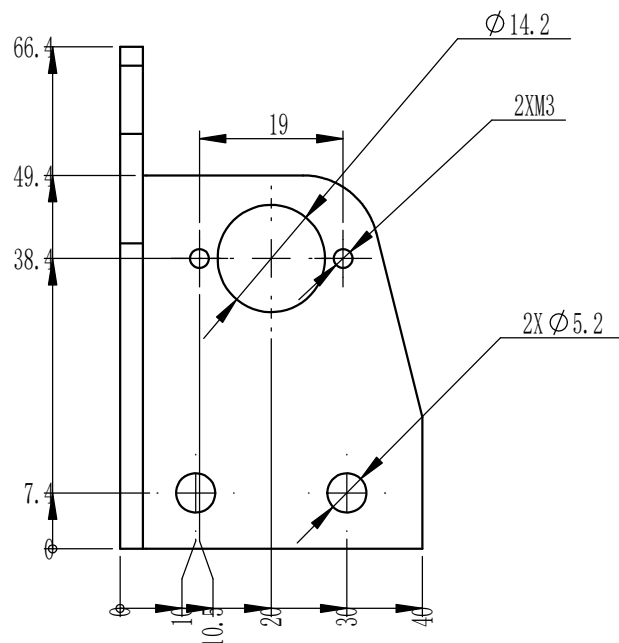

Technical requirements:

1. Appearance: smooth and flat, remove burrs, sharp edges, no deformation ;
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating  
The thickness is between 39~120um;
5. Meet ROHS standard.

APPROVALS		DATE		 <b>深圳市智能派科技有限公司</b> Shenzhen Elegoo Technology Co.,Ltd	
DRAWN		2022/12/21			
CHECKED					
ISSUED					
General Tolerance Reference  GB/T 1804-m		PART NAME		MATERIAL	
		Fixing Plate_Top Bearing_Right		AL 5052-3.0	
		DRAWING NO.		SCALE	
		Neptune 3Plus-BJ-004		SIZE A4	SCALE 1:1
				UNIT: MM	REV. A
					SHEET 1 OF 1