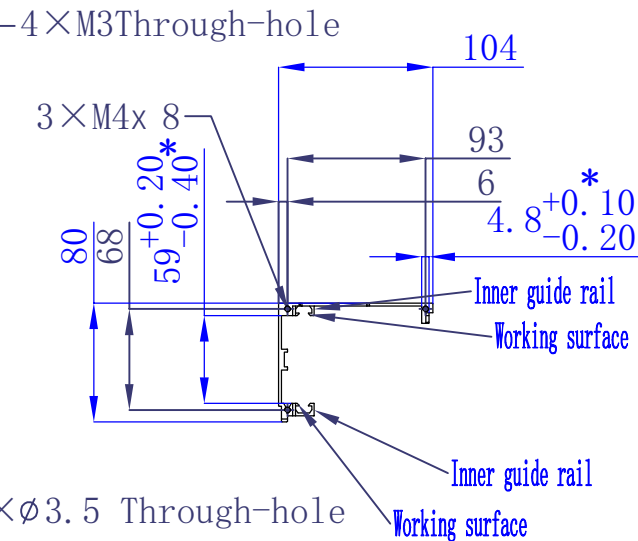
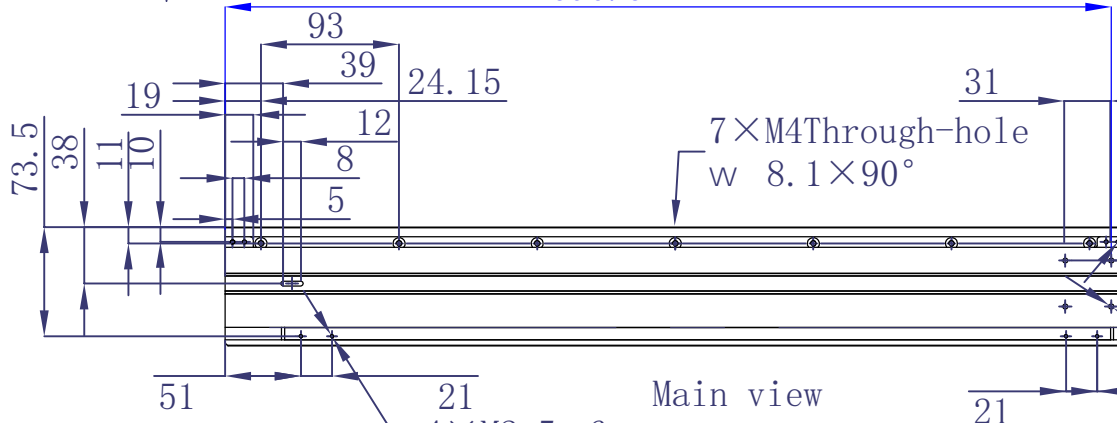
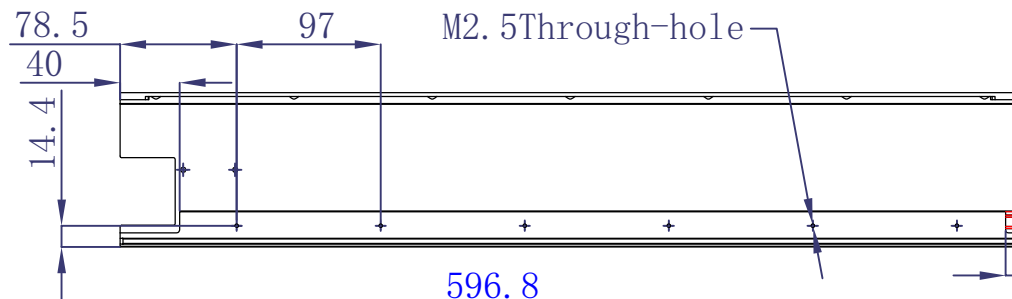


1

2

3

4

RMN  $\sqrt{3.2}$ 

Noice: The distance between the inner guide rail and the outer guide rail cannot differ by 0.2mm.

Notes:

1. Deburring, chamfering from acute angle to obtuse angle;
2. All unspecified chamfers-C0.2mm;
3. Dimensions with \* are key dimensions;
4. Refer to 3D drawing for dimensions;
5. Surface to prevent scratches, bumps, bruises, crushing, deformation and other defects.
6. Surface treatment: gray
7. Comply with the ROHS label

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
①				
②				

APPROVALS		DATE	ELEGOO 深圳市智能派科技有限公司 Shenzhen Elegoo Technology Co., Ltd		
DRAWN					
CHECKED					
ISSUED					
General Tolerance Reference GB/T 1804-n		PART NAME X axis support moving profile DRAWING NO. PHECDA-XC-006		MATERIAL AL6063 SIZE A4 SCALE 1:5 REV. C	
				UNIT: MM SHEET 1 OF 1	