

1




2

3

4

RMN 3.2

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
①				
②				

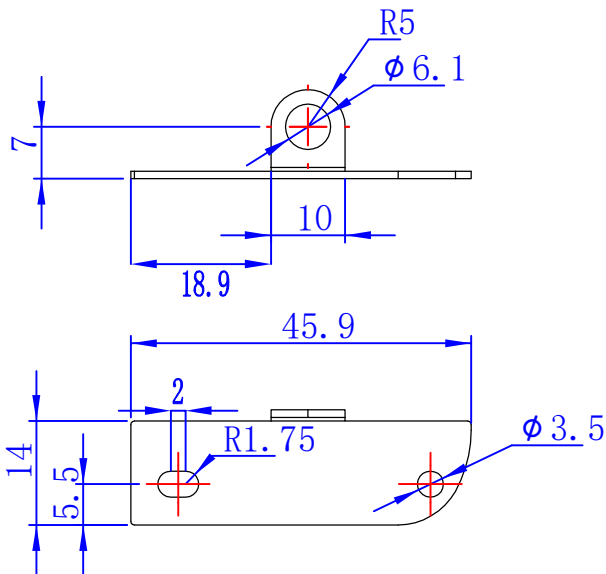

Notes:

1. Deburring, chamfering from acute angle to obtuse angle;
 2. All unspecified chamfers-C0.2mm;
 3. Dimensions with * are key dimensions;
 4. Refer to 3D drawing for dimensions;
 5. Surface to prevent scratches, bumps, bruises, crushing, deformation and other defects.
 6. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um
 7. Surface treatment: black powder spray
 8. Comply with the ROHS label
 9. Pay attention to protecting the threads when spraying powder.
- The threads should be reprocessed after surface powder spraying.

APPROVALS		DATE	ELEGOO 深圳市智能派科技有限公司 Shenzhen Elegoo Technology Co., Ltd			
DRAWN			PART NAME Exhaust pipe support		MATERIAL SPCC T=1.0	
CHECKED						
ISSUED						
General Tolerance Reference GB/T 1804-m			DRAWING NO. PHECDA-BJ-018		SIZE A4	SCALE 1:1
					UNIT: MM	REV. A
					SHEET 1 OF 1	