

1





2

3

4

RMN  $\sqrt{3.2}$ 

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
①				
②				

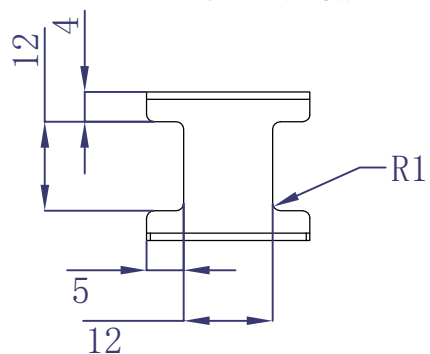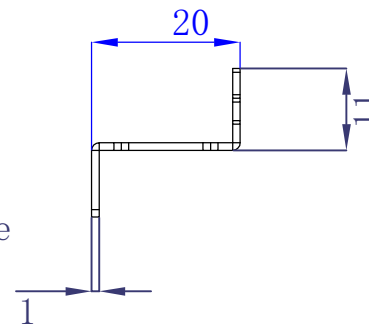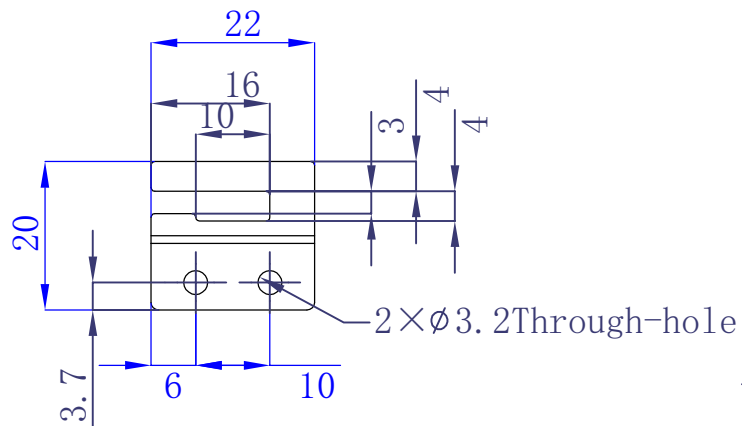

b

a

Notes:

1. Deburring, chamfering from acute angle to obtuse angle;
2. All unspecified chamfers-C0.2mm;
3. Dimensions with \* are key dimensions;
4. Refer to 3D drawing for dimensions;
5. Surface to prevent scratches, bumps, bruises, crushing, deformation and other defects.
6. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um
7. Surface treatment: black powder spray
8. Comply with the R0SH label
9. Pay attention to protecting the threads when spraying powder. The threads should be reprocessed after surface powder spraying.

APPROVALS	DATE	ELEGOO 深圳市智能派科技有限公司 Shenzhen Elegoo Technology Co., Ltd			
DRAWN		PART NAME Cable clamp		MATERIAL SPCC	
CHECKED					
ISSUED					
General Tolerance Reference GB/T 1804-n		DRAWING NO. PHECDA-BJ-009		SIZE A4	SCALE 1:1
				UNIT: MM	REV. C SHEET 1 OF 1