

Prototype 2.5 STM32 PCB

Power Supply

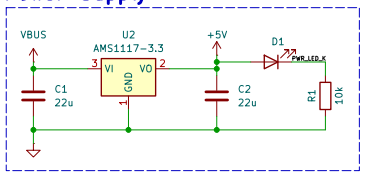


VBUS from USB connector (nom +5)
Min. 22uF inp./outp. caps

BUCHSE




AKKU MONITOR




Voltage devider
V_adc = V_akku x (10k/10k + 33k)

Microcontroller (and USB)

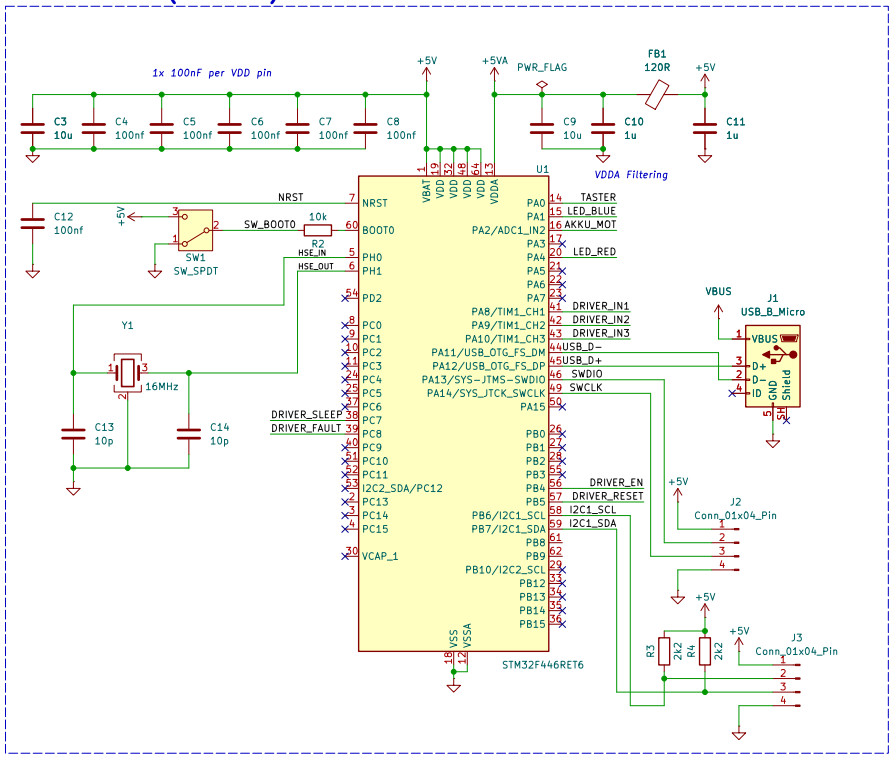


Pin-out using STM32CubeMX


AKKU + POWER SOURCE

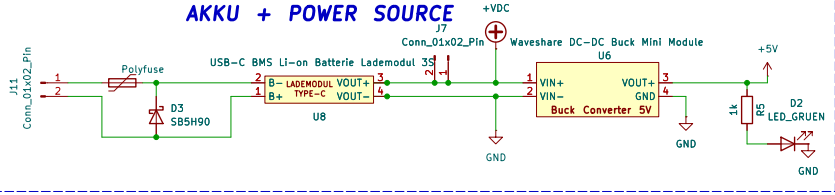


TASTER




LED




TREIBER



ADD-ONS



The addon port can be used for hacking the device and adding custom extensions, or while debugging. It exposes 3.3V power, the I2C bus and the RX/TX lines for serial output and communications. Test points provide solderable connections to more GPIO pins as well.



FH Aachen

Sheet: /
File: stm32_kicad.kicad_sch

Title: Prototype 2.5 STM32 PCB

Size: A3	Date: 2026-10-25	Rev: 2.5
KiCad E.D.A. 10.0.3		Id: 1/1