

Prototype 3.5 STM32 PCB


Power Supply

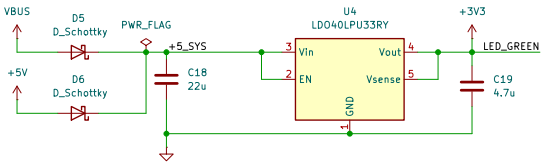

BUCHSE

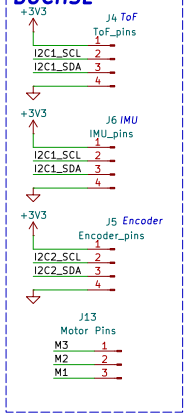


AKKU MONITOR




Voltage devider
V_adc = V_akku x (10k/10k + 39k)

Microcontroller (and USB)

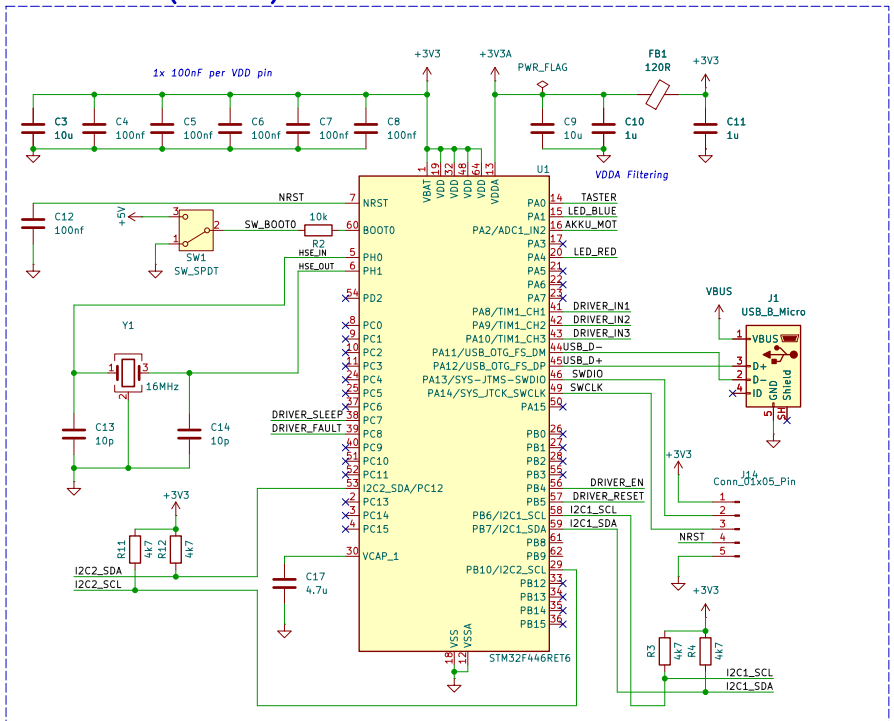


Pin-out using STM32CubeMX


TASTER




LED




TREIBER




ADD-ONS



The addon part can be used for hacking the device and adding custom extensions, or while debugging. It exposes 3.3V power, the I2C bus and the RX/TX lines for serial output and communications. Test points provide solderable connections to more GPIO pins as well.



AKKU + POWER SOURCE

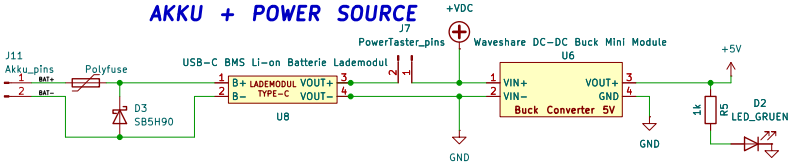

changed the power supply

FH Aachen

Sheet: /

File: stm32_kicad.kicad_sch

Title: Prototype 3.5 STM32 PCB

Size: A3	Date: 2026-10-25	**Rev: 5**
KiCad E.D.A. 10.0.3		Id: 1/1