

Prototype 4 STM32 PCB


Power Supply

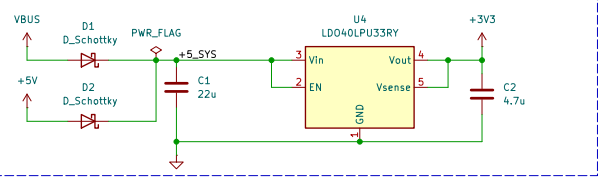

BUCHSE

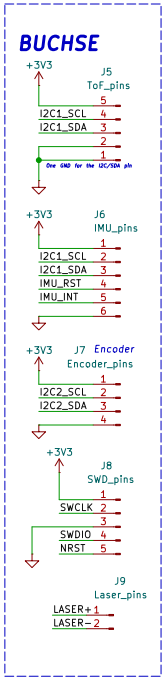


AKKU MONITOR




Voltage devider
V_adc = V_akku x (10k/10k + 39k)

LASER




using N−Channel MOSFET as the laser switch

TEST POINTS




Microcontroller (and USB)

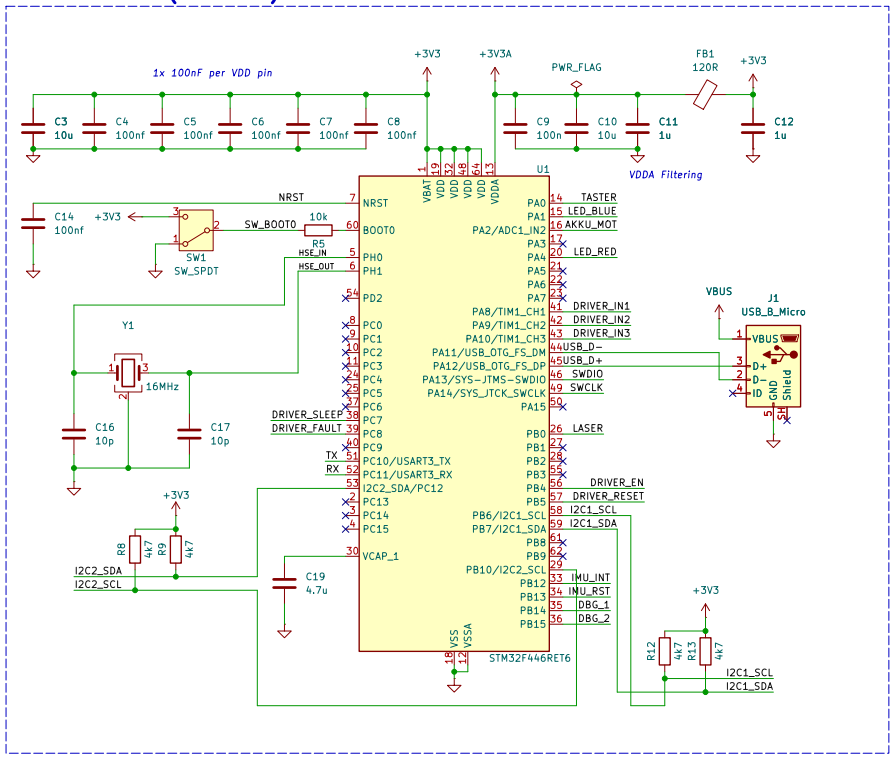


Pin−out using STM32CubeMX


TASTER



LED




TREIBER




M1,M2,M3 connects directly to the Motor


ADD−ONS



The addon port can be used for hacking the device and adding custom extensions, or while debugging. It exposes 3.3V power, the I2C bus and the RX/TX lines for serial output and communications. Test points provide solderable connections to more GPIO pins as well.



AKKU + POWER SOURCE

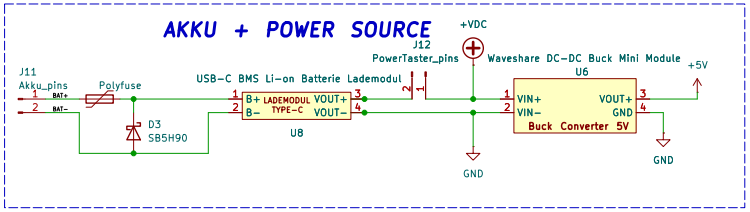

MOUNTING HOLES



adding Test points and mounting holes
adding Laser switch

FH Aachen

Sheet: /
File: stm32_kicad.kicad_sch

Title: Prototype 4 STM32 PCB

Size: A3	Date: 2026−10−25	**Rev: 6**
KiCad E.D.A. 10.0.3		Id: 1/1