

Concept Review

Differential Kinematics

Why use differential kinematics?

Complex robotic and mechatronic systems comprise of a variety of internal parameters representing the motion of the system as well as the forces acting on it. While position kinematics can be used to relate the internal configuration of the system to its external and high level position, and vice versa, it has limitations in modeling the system when its states are evolving. Differential kinematics relates the rate of change of internal states to the overall high level motion of the system. This allows you to directly command velocity profiles, or integrate to get position estimates with better accuracy when subject to sensor noise.

General definition

Consider a robotic system such as a mobile robot or manipulator, with n actuated or passive joints, represented by a series of joint parameters q_i for $i \in 1:n$. The joint parameters can be represented by a vector quantity \vec{q} as,

$$\vec{q} = \begin{bmatrix} q_1 \\ q_2 \\ \vdots \\ q_n \end{bmatrix} \quad (1)$$

The corresponding rates of change of the joint parameters can be represented by $\dot{\vec{q}}$,

$$\dot{\vec{q}} = \begin{bmatrix} \dot{q}_1 \\ \dot{q}_2 \\ \vdots \\ \dot{q}_n \end{bmatrix} \quad (2)$$

The high level pose of the system, comprising of it's position \vec{p} and orientation $\vec{\theta}$ with respect to some inertial reference frame can be represented by,

$$\vec{p} = \begin{bmatrix} p_x \\ p_y \\ p_z \end{bmatrix}, \quad \vec{\theta} = \begin{bmatrix} \phi \\ \theta \\ \psi \end{bmatrix} \quad (3)$$

Where the orientation is represented by the roll ϕ , pitch θ and yaw ψ angles. The corresponding rates can be expressed as,

$$\vec{v} = \begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix}, \quad \vec{\omega} = \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix} \quad (4)$$

Differential Kinematics

This is a relationship that yields the high-level system velocity as a function of the joint velocities $\dot{\vec{q}}$

$$\vec{v} = f_{dk}(\dot{\vec{q}}) \quad (5)$$

This relationship can be derived using a variety of methods. A standard approach involves differentiating the position kinematic equations with respect to each joint parameter. Alternatively, kinematic constraints around the motion of a system might directly yield the kinematic equations. The provided examples cover a few cases.

Inverting these equations typically depends on the format of the equations. A formulation that provides the joint rates of change based on the system velocities is,

$$\dot{\vec{q}} = f_{ik}(\vec{v}) \quad (6)$$

Example 1 – Robotic Manipulator & the DH framework

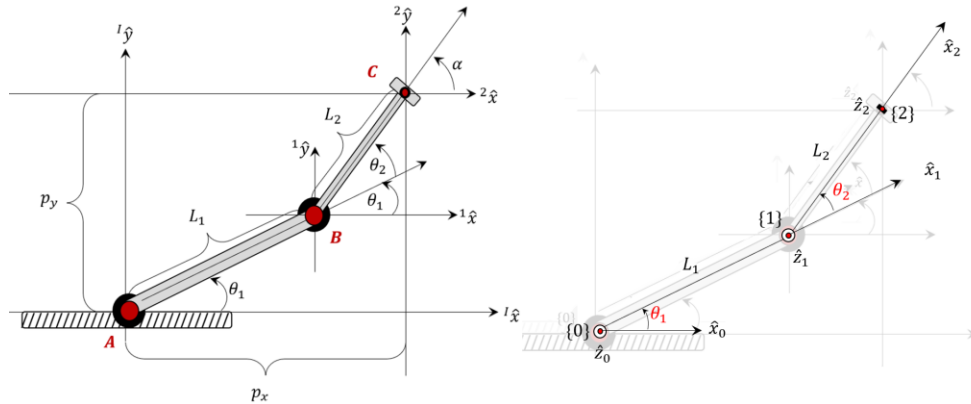


Figure 1 – DH schematic of a 2-dof manipulator

i	a_n	α_n	d_n	θ_n	$\theta_n(0)$
1	L_1	0	0	θ_1	0
2	L_2	0	0	θ_2	0

Table 1 – DH parameters for the schematic in Figure 1

Let's start with the forward kinematics equations derived for the manipulator in the Position Kinematics concept review,

$$\begin{bmatrix} p_x \\ p_y \end{bmatrix} = \begin{bmatrix} L_1 \cos(\theta_1) + L_2 \cos(\theta_1 + \theta_2) \\ L_1 \sin(\theta_1) + L_2 \sin(\theta_1 + \theta_2) \end{bmatrix} = \begin{bmatrix} f_1(\theta_1, \theta_2) \\ f_2(\theta_1, \theta_2) \end{bmatrix} \quad (7)$$

One can differentiate to yield,

$$\vec{v} = \frac{d}{dt} \begin{bmatrix} p_x \\ p_y \end{bmatrix} = \frac{d}{dt} \begin{bmatrix} f_1(\theta_1, \theta_2) \\ f_2(\theta_1, \theta_2) \end{bmatrix} = \begin{bmatrix} \frac{\partial f_1}{\partial \theta_1} & \frac{\partial f_1}{\partial \theta_2} \\ \frac{\partial f_2}{\partial \theta_1} & \frac{\partial f_2}{\partial \theta_2} \end{bmatrix} \begin{bmatrix} \dot{\theta}_1 \\ \dot{\theta}_2 \end{bmatrix} = J \dot{\vec{q}} \quad (8)$$

Where J is the Jacobian matrix. For the manipulator above, differentiation equations in 7 provide,

$$\vec{v} = \begin{bmatrix} -L_1 \sin \theta_1 - L_2 \sin(\theta_1 + \theta_2) & -L_2 \sin(\theta_1 + \theta_2) \\ L_1 \cos \theta_1 + L_2 \cos(\theta_1 + \theta_2) & L_2 \cos(\theta_1 + \theta_2) \end{bmatrix} \begin{bmatrix} \dot{\theta}_1 \\ \dot{\theta}_2 \end{bmatrix}$$

Inverting these equations is a matter of taking the inverse of the Jacobian matrix. Care must be taken to ensure that the Jacobian is not singular when doing so. Taking a determinant of the Jacobian and setting it to zero provides the singular condition, where the manipulator is either fully outstretched or folded onto itself via joint 2.

$$|J| = L_1 L_2 \sin \theta_2 = 0 \quad \gg \quad \theta_2 = 0, \pi$$

Example 2 – Differential Drive Robot

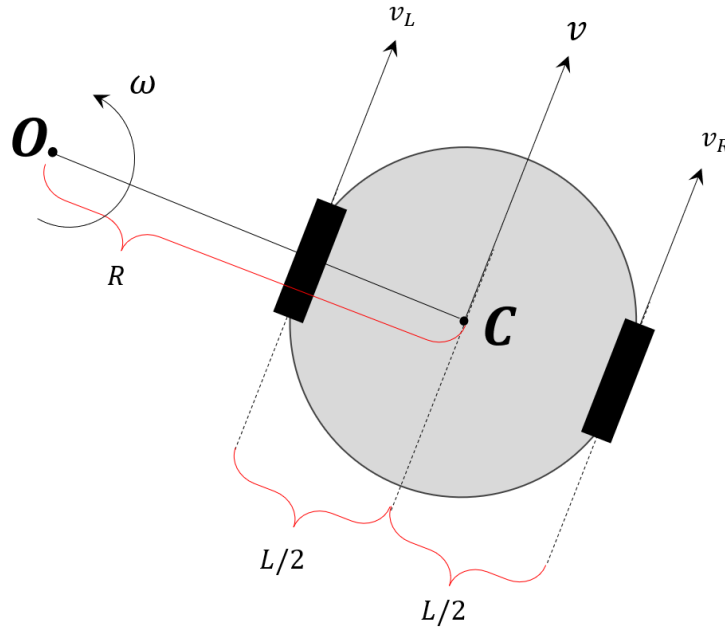


Figure 2 – A simple representation of a differential drive robot

Consider a differential drive robot turning around a point O , with the center of the robot at point C . As it turns around O , the left and right wheel speeds must vary to drive without slipping. However, their angular turning rate about the point O must be the same. That is,

$$\omega = \frac{v_L}{R - L/2} = \frac{v_R}{R + L/2} \quad (9)$$

In addition, forward velocity of the robot is equal to the average velocity of the left and right wheels,

$$v = \frac{v_L + v_R}{2} \quad (10)$$

From these two equations, one can get the combined differential kinematic equations of the robot,

$$\begin{bmatrix} v \\ \omega \end{bmatrix} = \begin{bmatrix} 1/2 & 1/2 \\ -2/L & 2/L \end{bmatrix} \begin{bmatrix} v_L \\ v_R \end{bmatrix} \quad (11)$$

The inverse of the matrix can also be calculated for all values as the determinant is never zero, yielding,

$$\begin{bmatrix} v_L \\ v_R \end{bmatrix} = \begin{bmatrix} 1 & -L/4 \\ 1 & L/4 \end{bmatrix} \begin{bmatrix} v \\ \omega \end{bmatrix} \quad (11)$$



© 2022 Quanser Inc., All rights reserved.

Quanser Inc.
119 Spy Court
Markham, Ontario
L3R 5H6
Canada

info@quanser.com
Phone: 19059403575
Fax: 19059403576
Printed in Markham, Ontario.

For more information on the solutions Quanser Inc. offers, please visit the web site at:
<http://www.quanser.com>

This document and the software described in it are provided subject to a license agreement. Neither the software nor this document may be used or copied except as specified under the terms of that license agreement. Quanser Inc. grants the following rights: a) The right to reproduce the work, to incorporate the work into one or more collections, and to reproduce the work as incorporated in the collections, b) to create and reproduce adaptations provided reasonable steps are taken to clearly identify the changes that were made to the original work, c) to distribute and publicly perform the work including as incorporated in collections, and d) to distribute and publicly perform adaptations. The above rights may be exercised in all media and formats whether now known or hereafter devised. These rights are granted subject to and limited by the following restrictions: a) You may not exercise any of the rights granted to You in above in any manner that is primarily intended for or directed toward commercial advantage or private monetary compensation, and b) You must keep intact all copyright notices for the Work and provide the name Quanser Inc. for attribution. These restrictions may not be waved without express prior written permission of Quanser Inc.