




SM-M045F Common Service Schematic

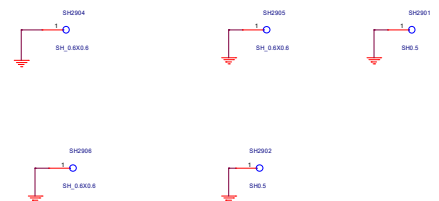



ALPS Sensor

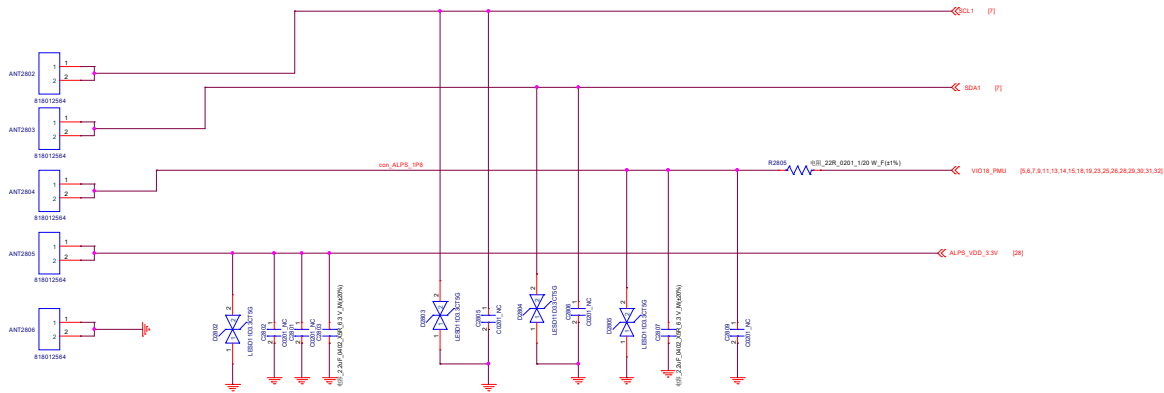


G SENSOR

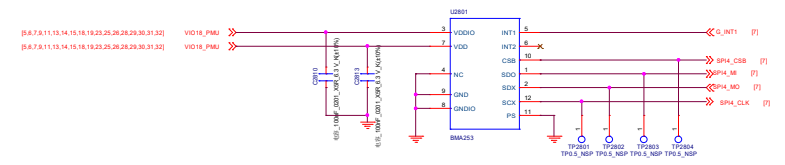


LDO for ALPS&FP

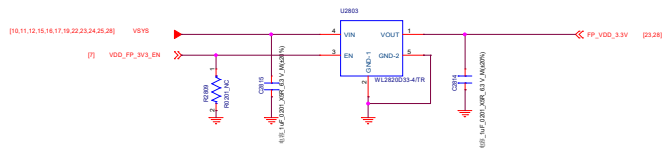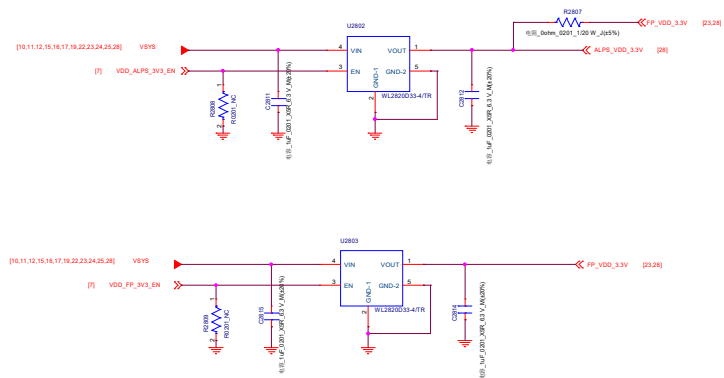


Rear Flash

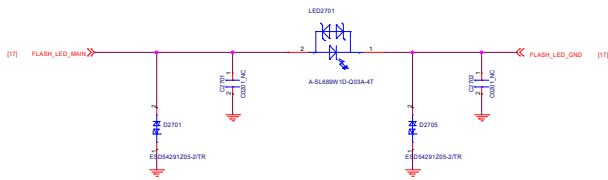


Side Key

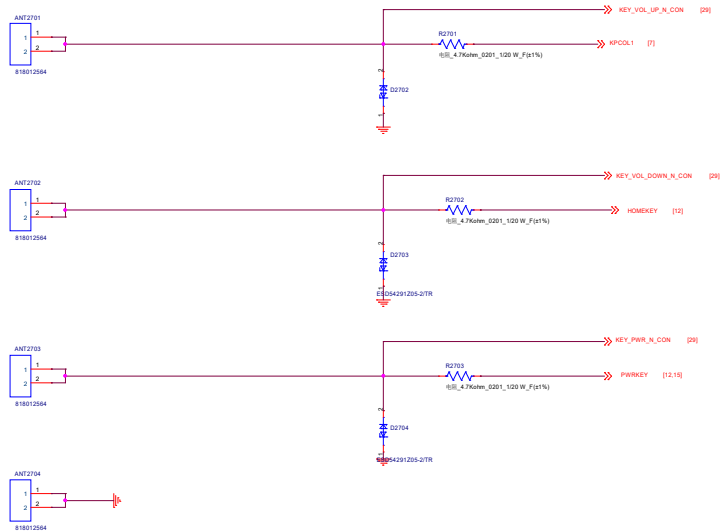


Link B2B

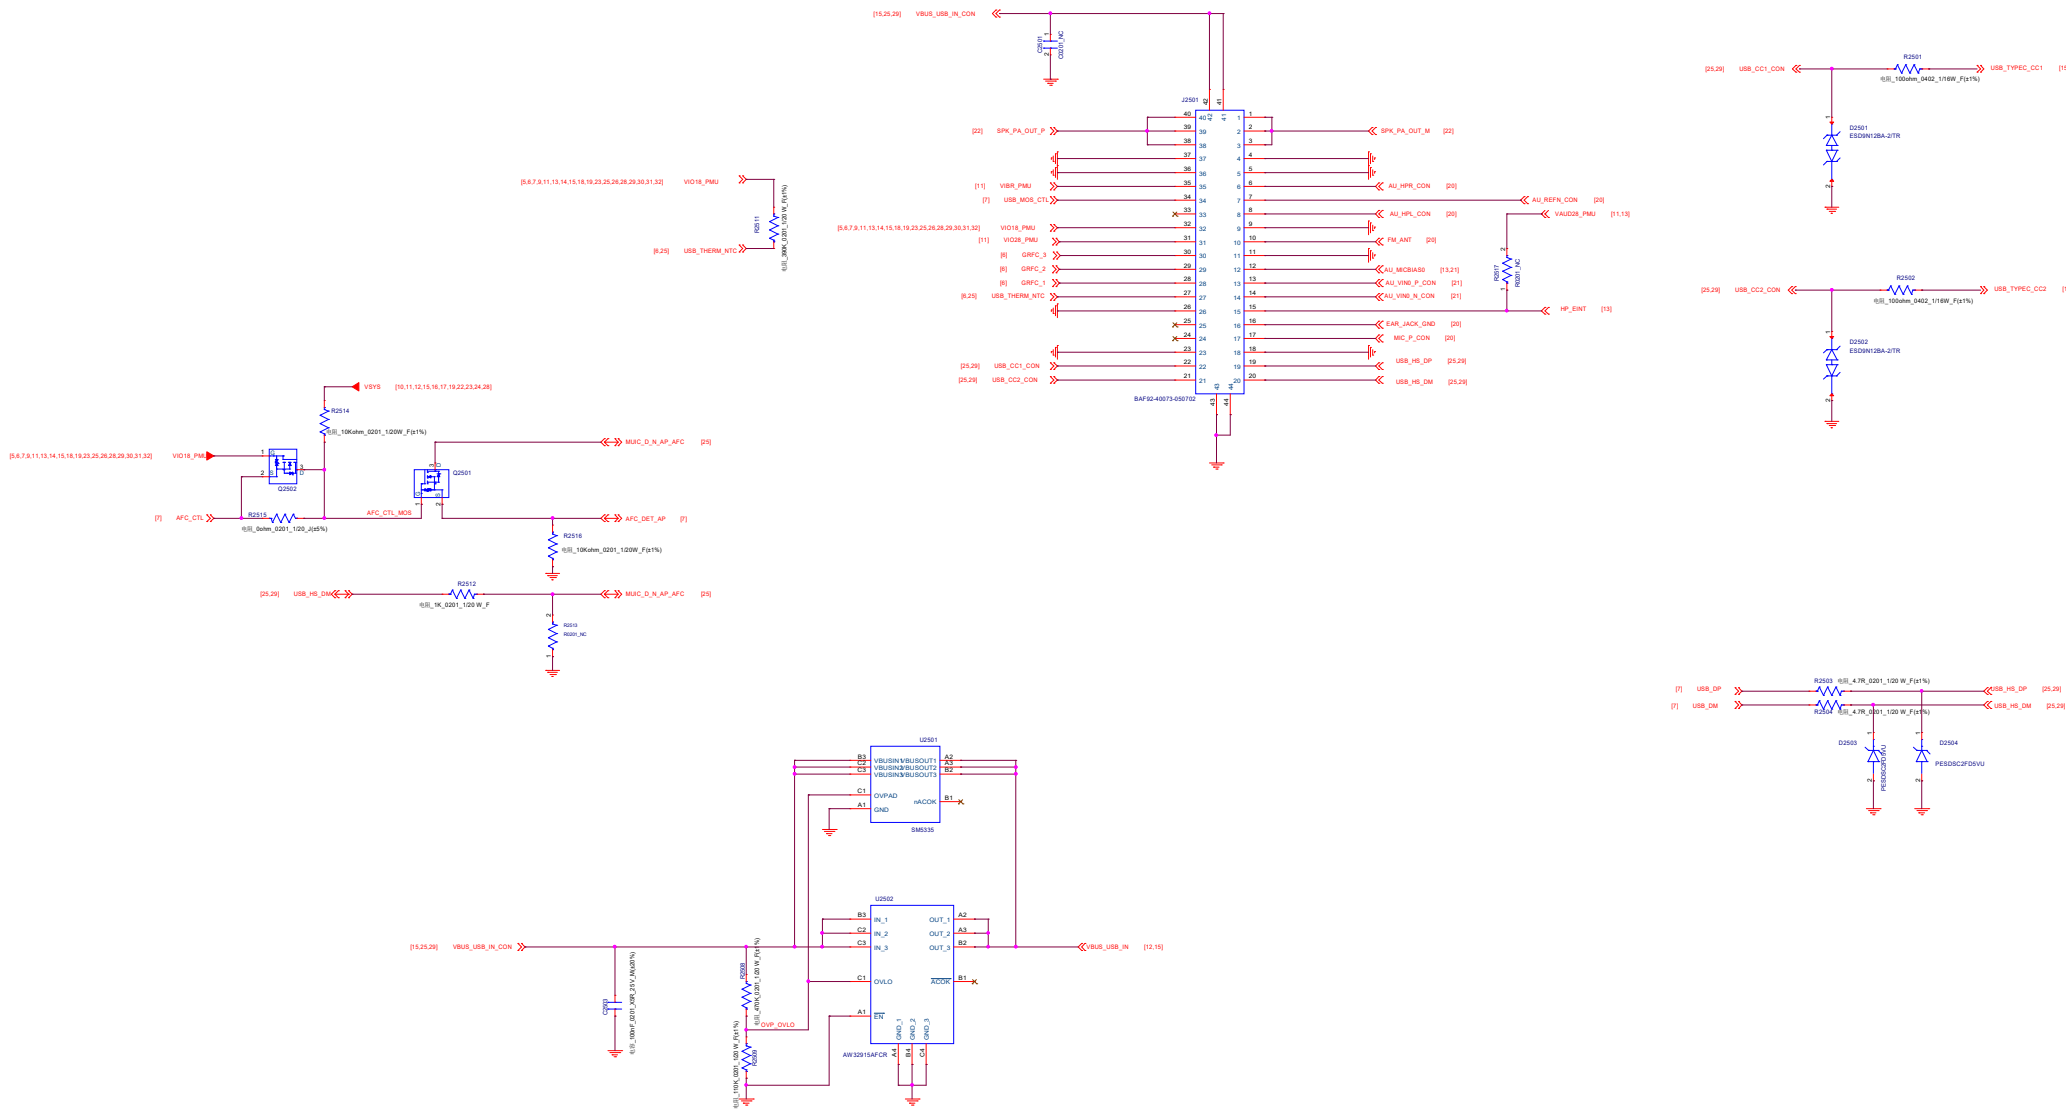


LCM/TP

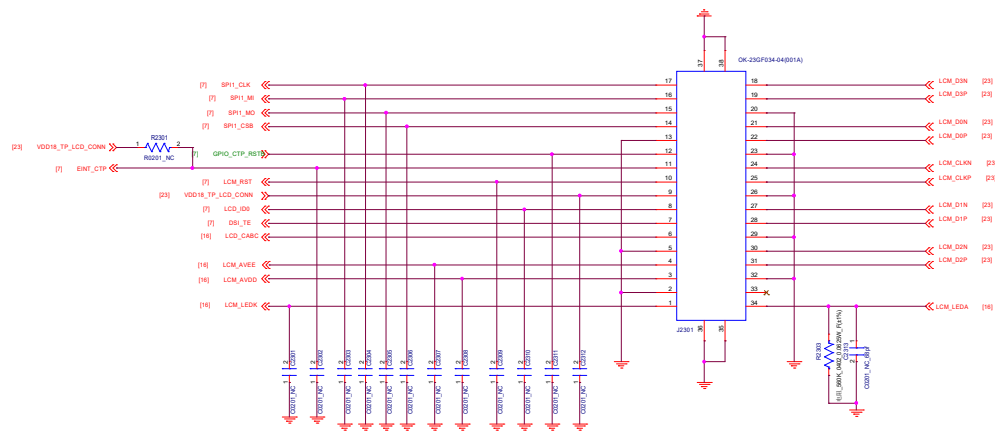


LCD MIPI Common Mode Filter

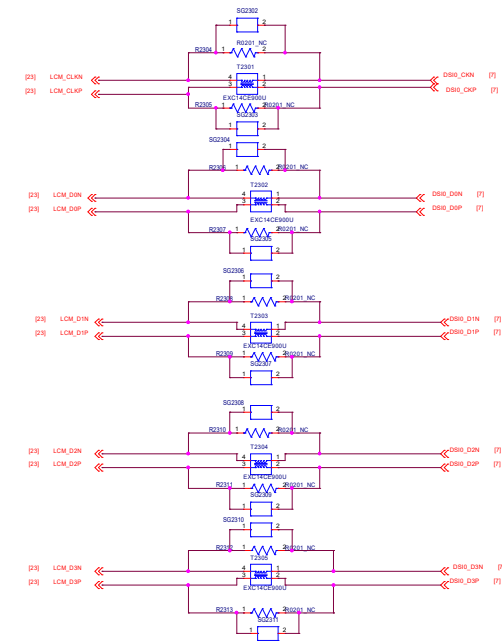



LDO For TP1.8V

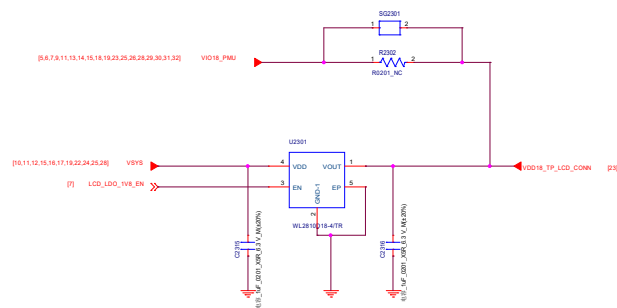


Finger Printer

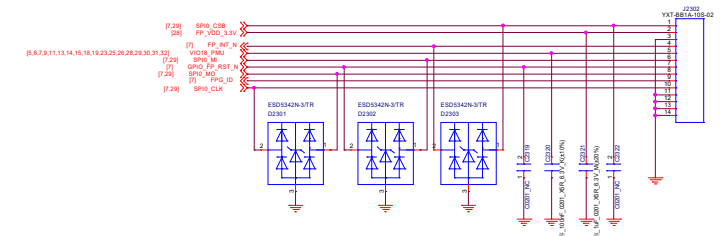


AUDIO K8 PA

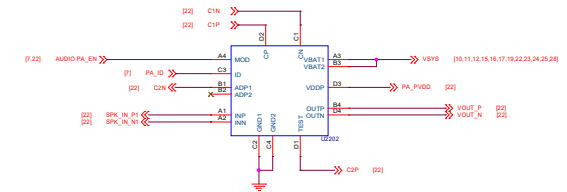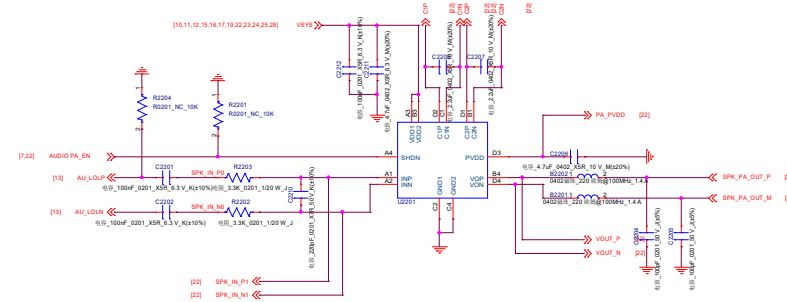


MAIN MIC KB

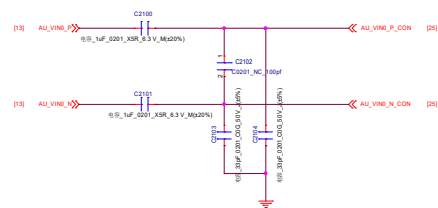



SUB MIC MB

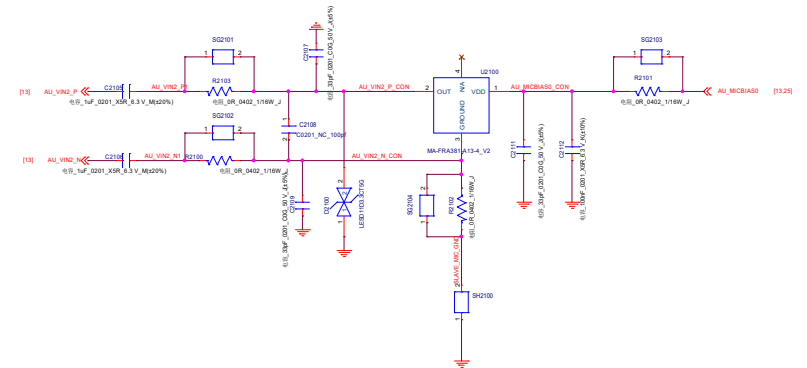


RECEIVER

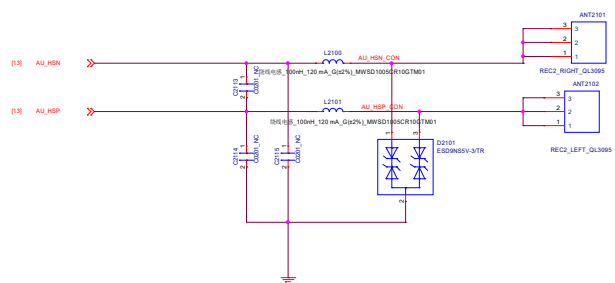


Earphone Audio

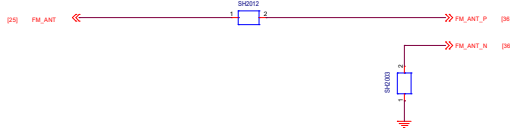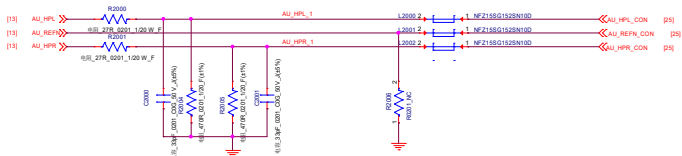


Earphone Microphone

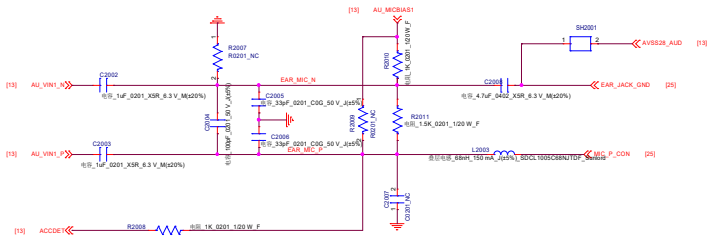


LDO for VA12 (For CPU)

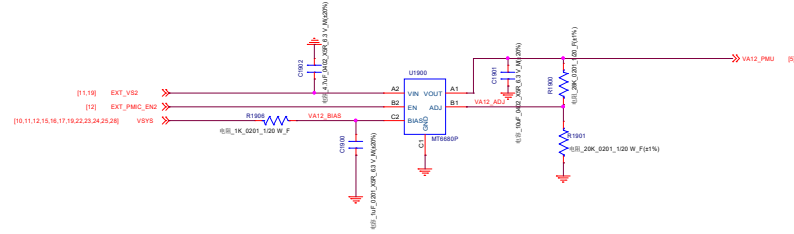


Ext. Bulk for VS2 (For PMU)

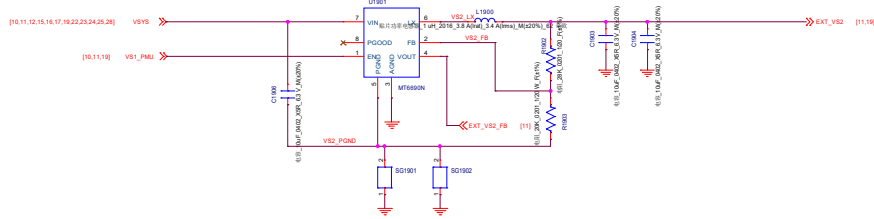


Ext. buck LP4X VDRAM

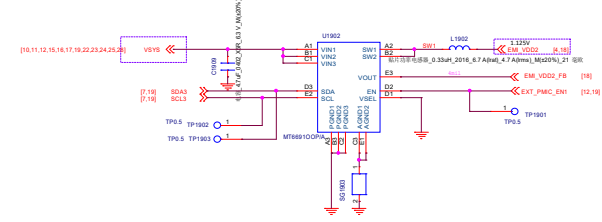


Ext. buck LP4X VDDQ

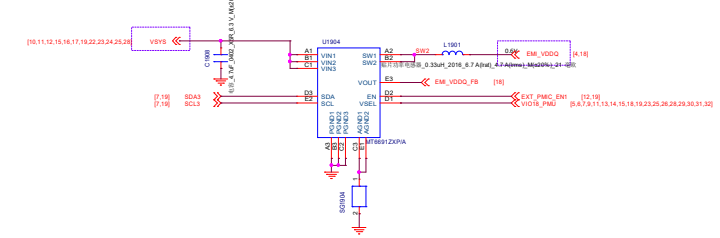


LPDDR4/LPDDR4X VDD1 1.8V LDO

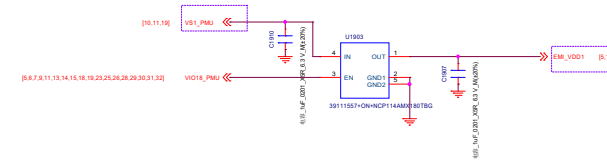



LCM Bias

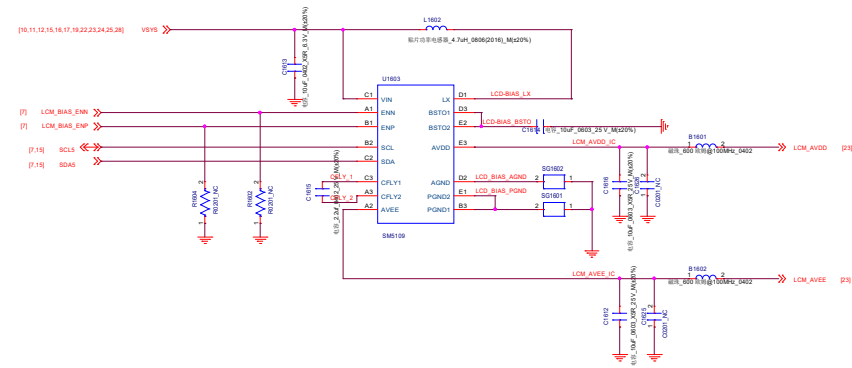


LCM Backlight Driver

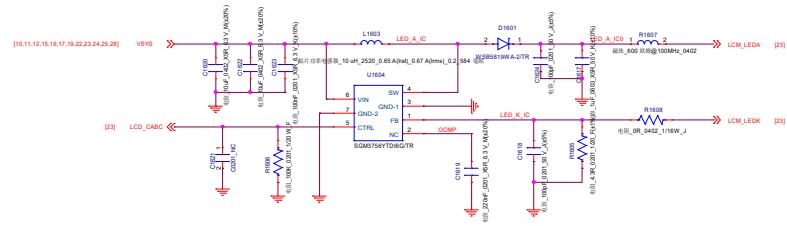


Charger IC

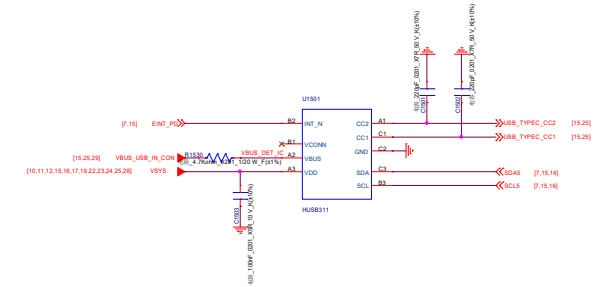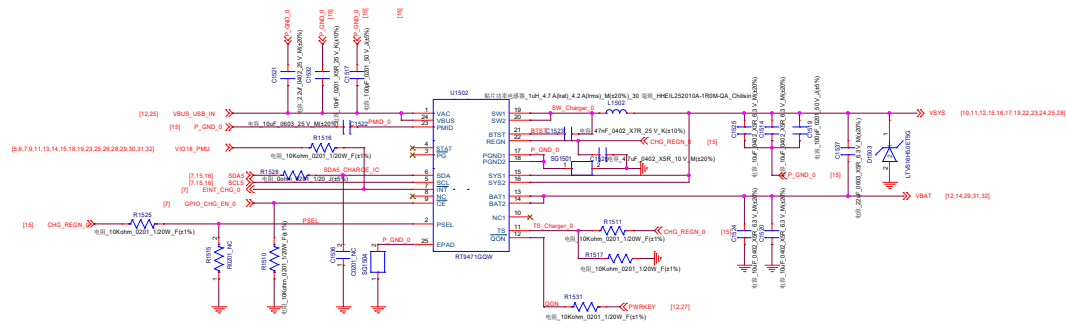



CC

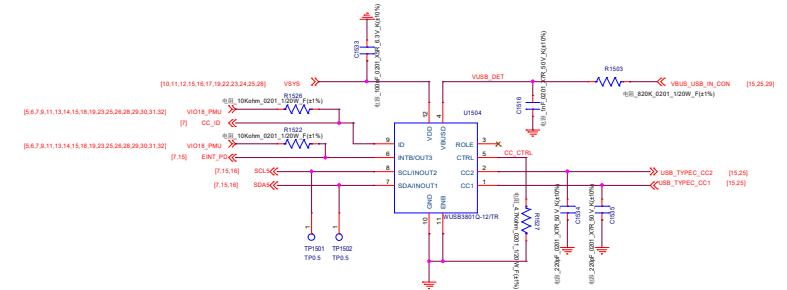



BATTERY CONNECTOR



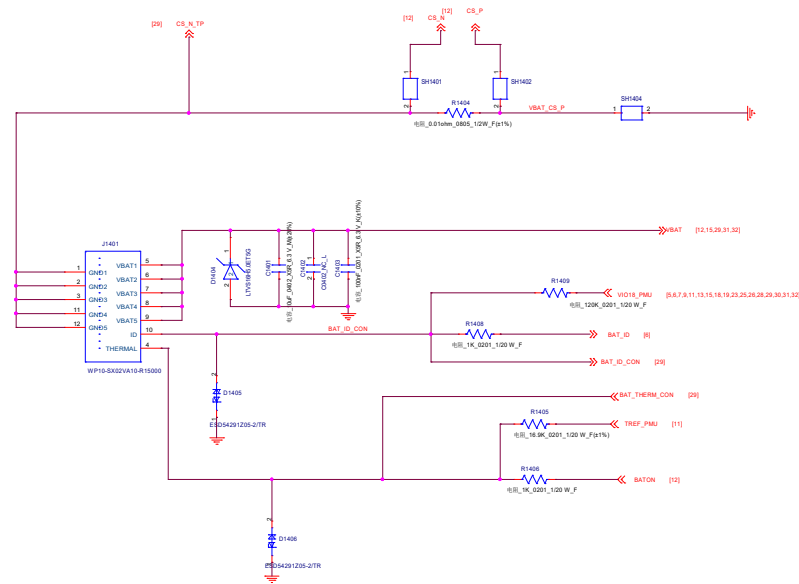



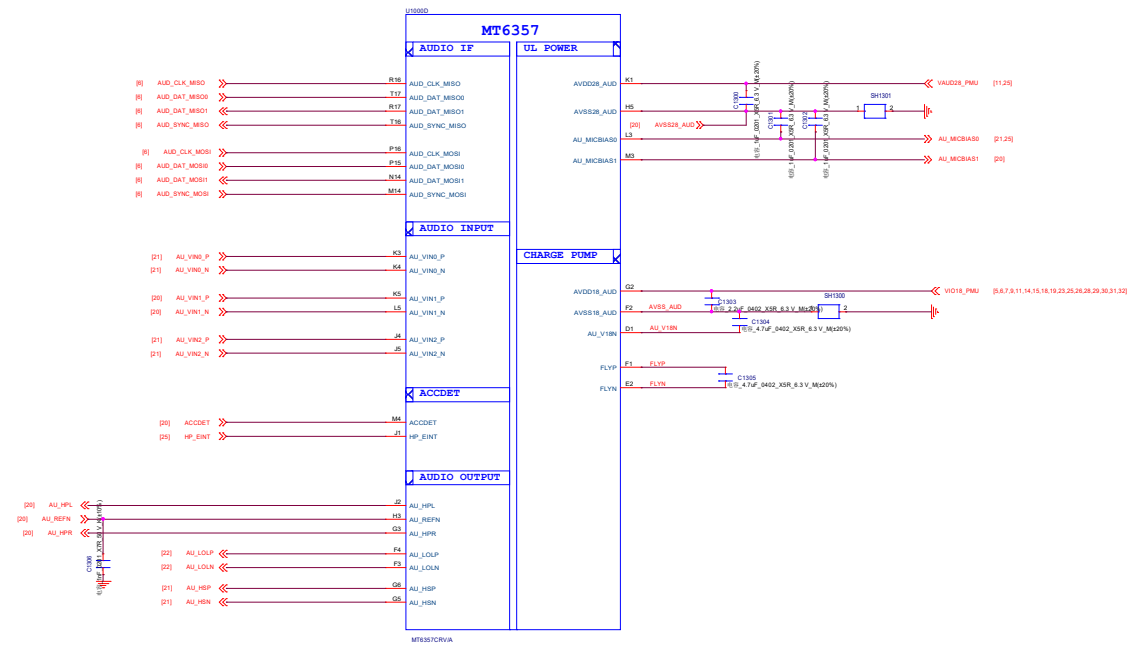


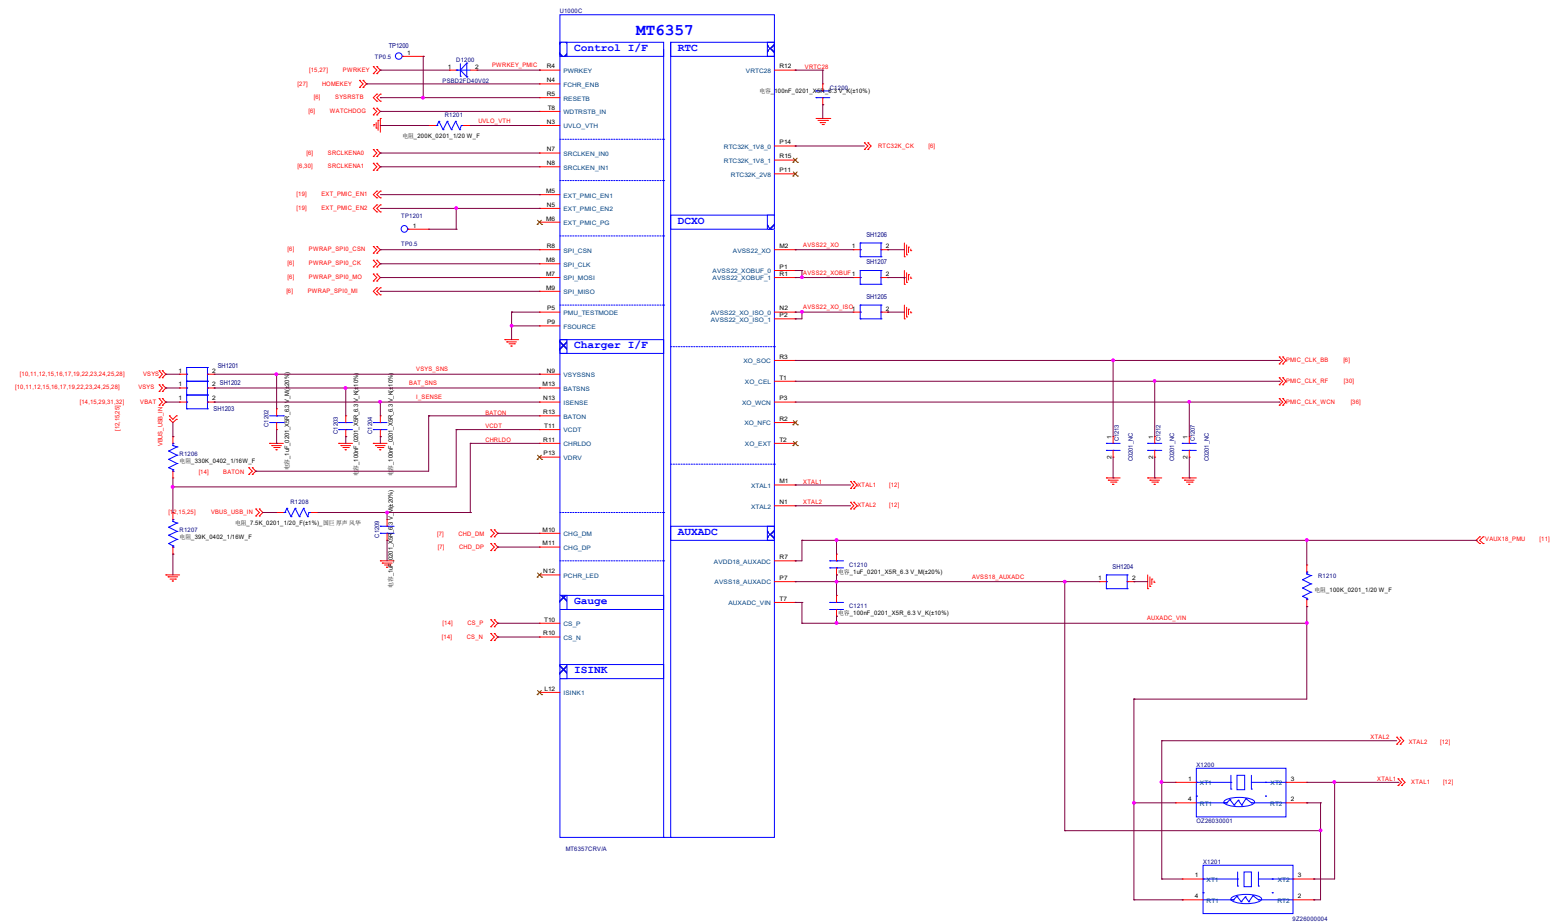


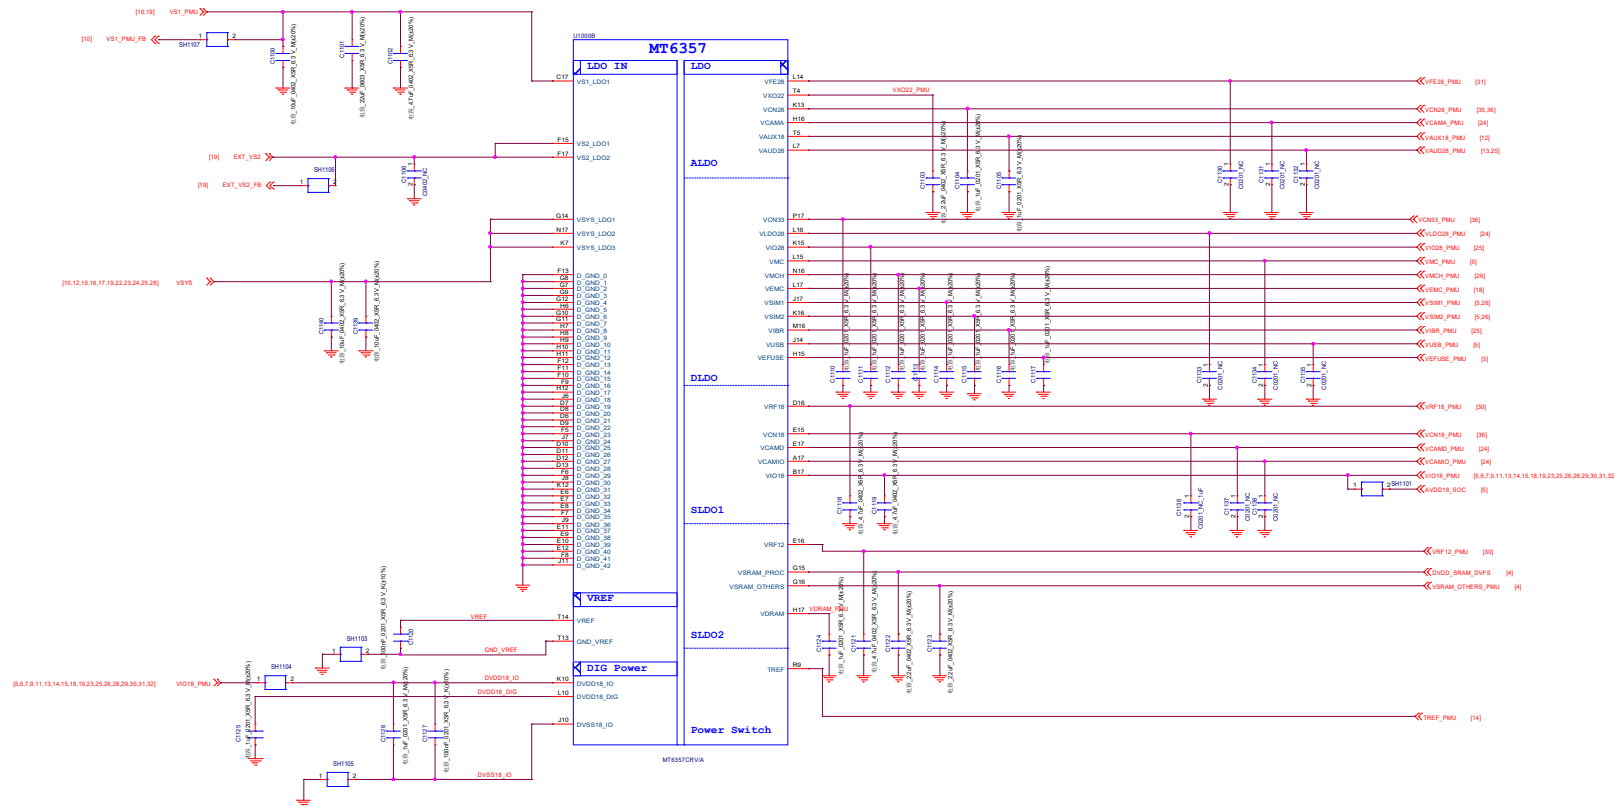


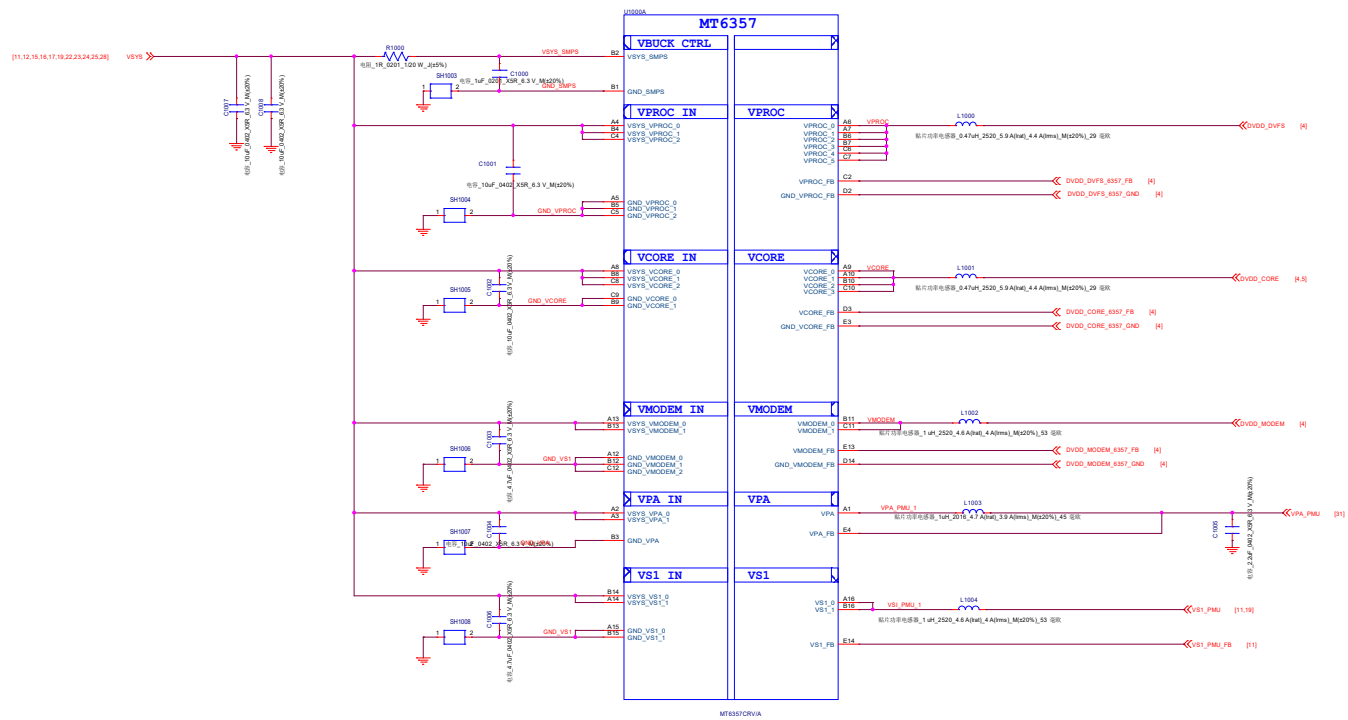

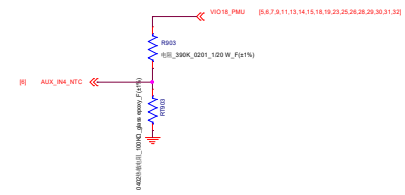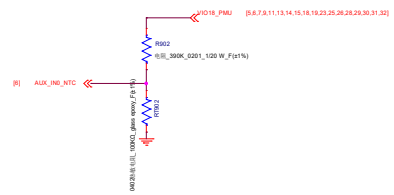

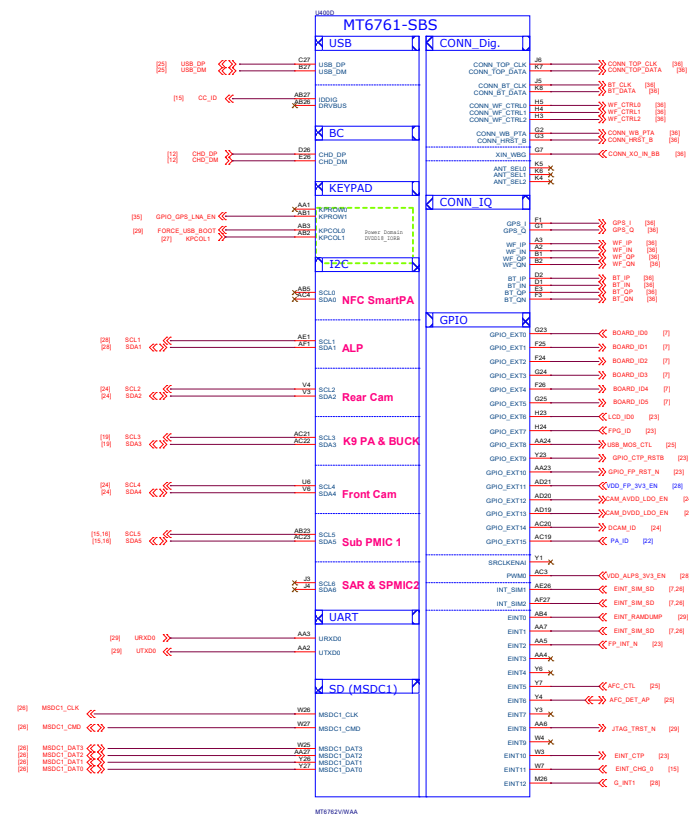

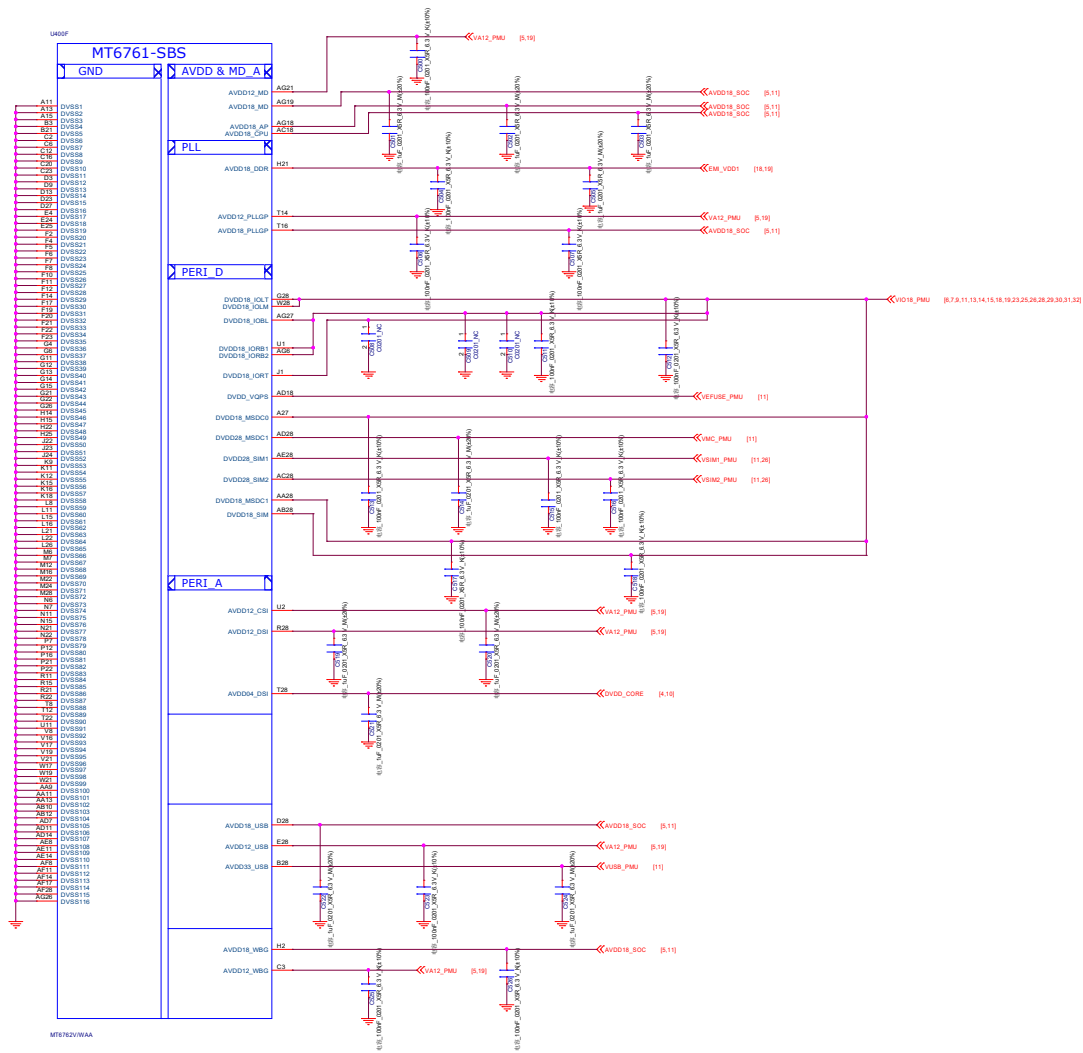

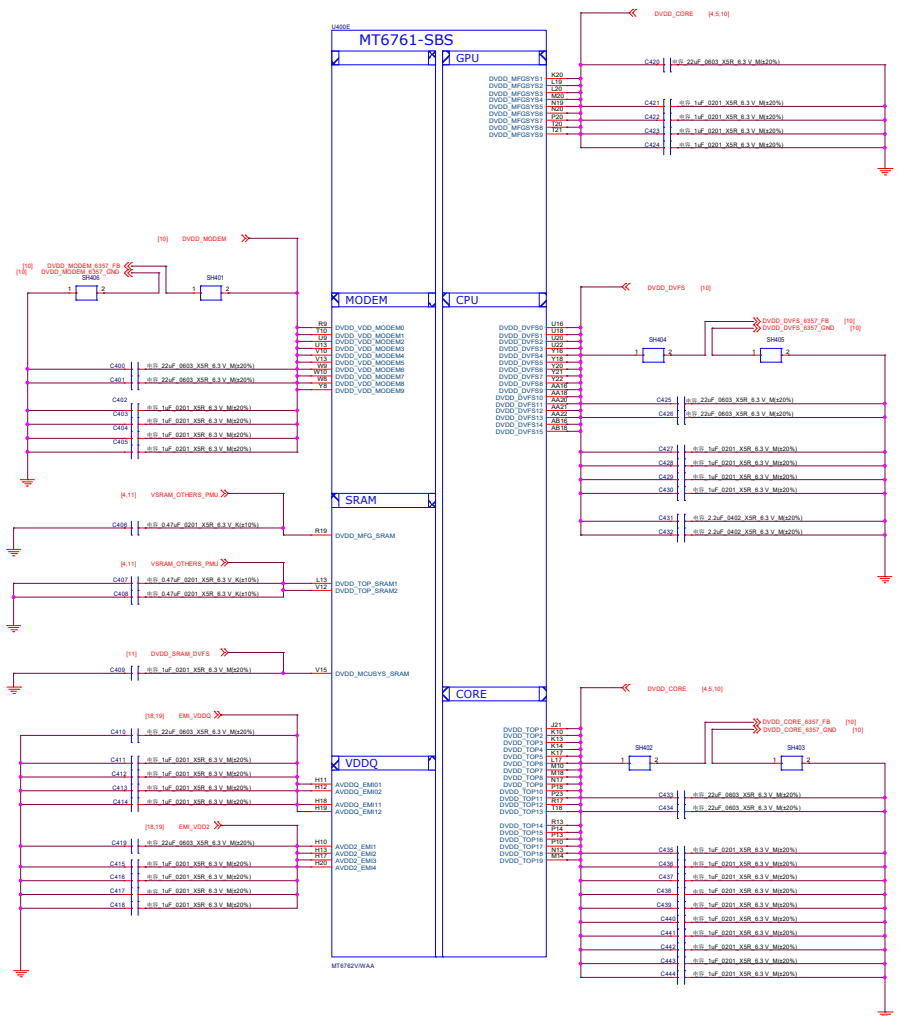


- 01.Block Diagram
- 02.I2C_ID_Overview
- 03.Index
- 04.BB_POWER_PDN
- 05.BB_POWER_IO
- 06.BB_1_GPIO
- 07.BB_2_GPIO
- 08.BB_3_EMI
- 09.BB_AUXADC
- 10.POWER_MT6357_Buck
- 11.POWER_MT6357_LDO
- 12.POWER_MT6357_IF
- 13.POWER_MT6357_Audio
- 14.POWER_BAT_CON
- 15.CHARGE_IC+CC
- 16.LCD BACKLIGHT+LCD BIAS
- 17.FLASHLED DRIVER
- 18.Memory_eMMC_LPDDR3
- 19.POWER_ThirdParty_Powers
- 20.Audio_EARJACK
- 21.Audio_MIC_Receiver
- 22.Audio_K8_PA
- 23.LCM_FPS
- 24.CAMERA
- 25.LINK
- 26.SIM_SD
- 27.SideKey_Flash_LED
- 28.Sensor
- 29.Test Point_JTAG
- 30.RF_MT6177_Pin_Out
- 31.RF_MT6177_RF_TX
- 32.RF_MT6177_RF_PRX
- 33.RF_MT6177_RF_DRX
- 34.RF_ANT
- 35.WCN_FEM
- 36.CONNECTIVITY_CONSYS_MT6631
- 37.SAR_Sensor


I2C Configuration Table


Function	I2C Slave Address (7-bit mode)
Page 15 : Charger IC	
Page 16 : LCM BIAS IC	
Page 21 : SMART PA	
Page 23 : Camera	
E-COMPASS	
ALS&PS SENSOR	
NFC	


EMMC+LPDDR4x


Flash LED for Camera




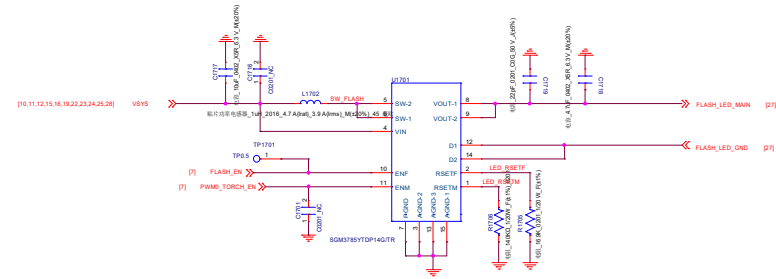



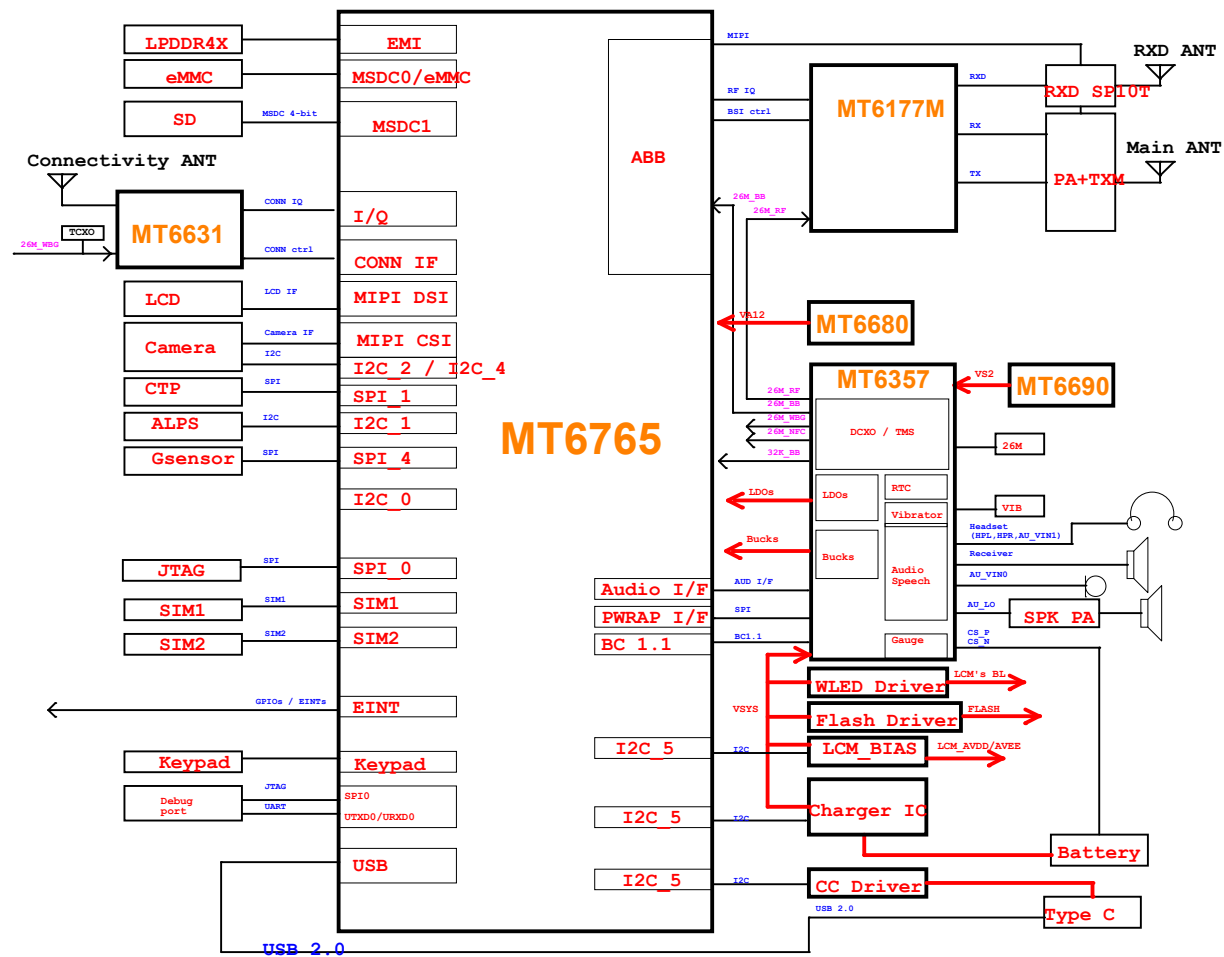


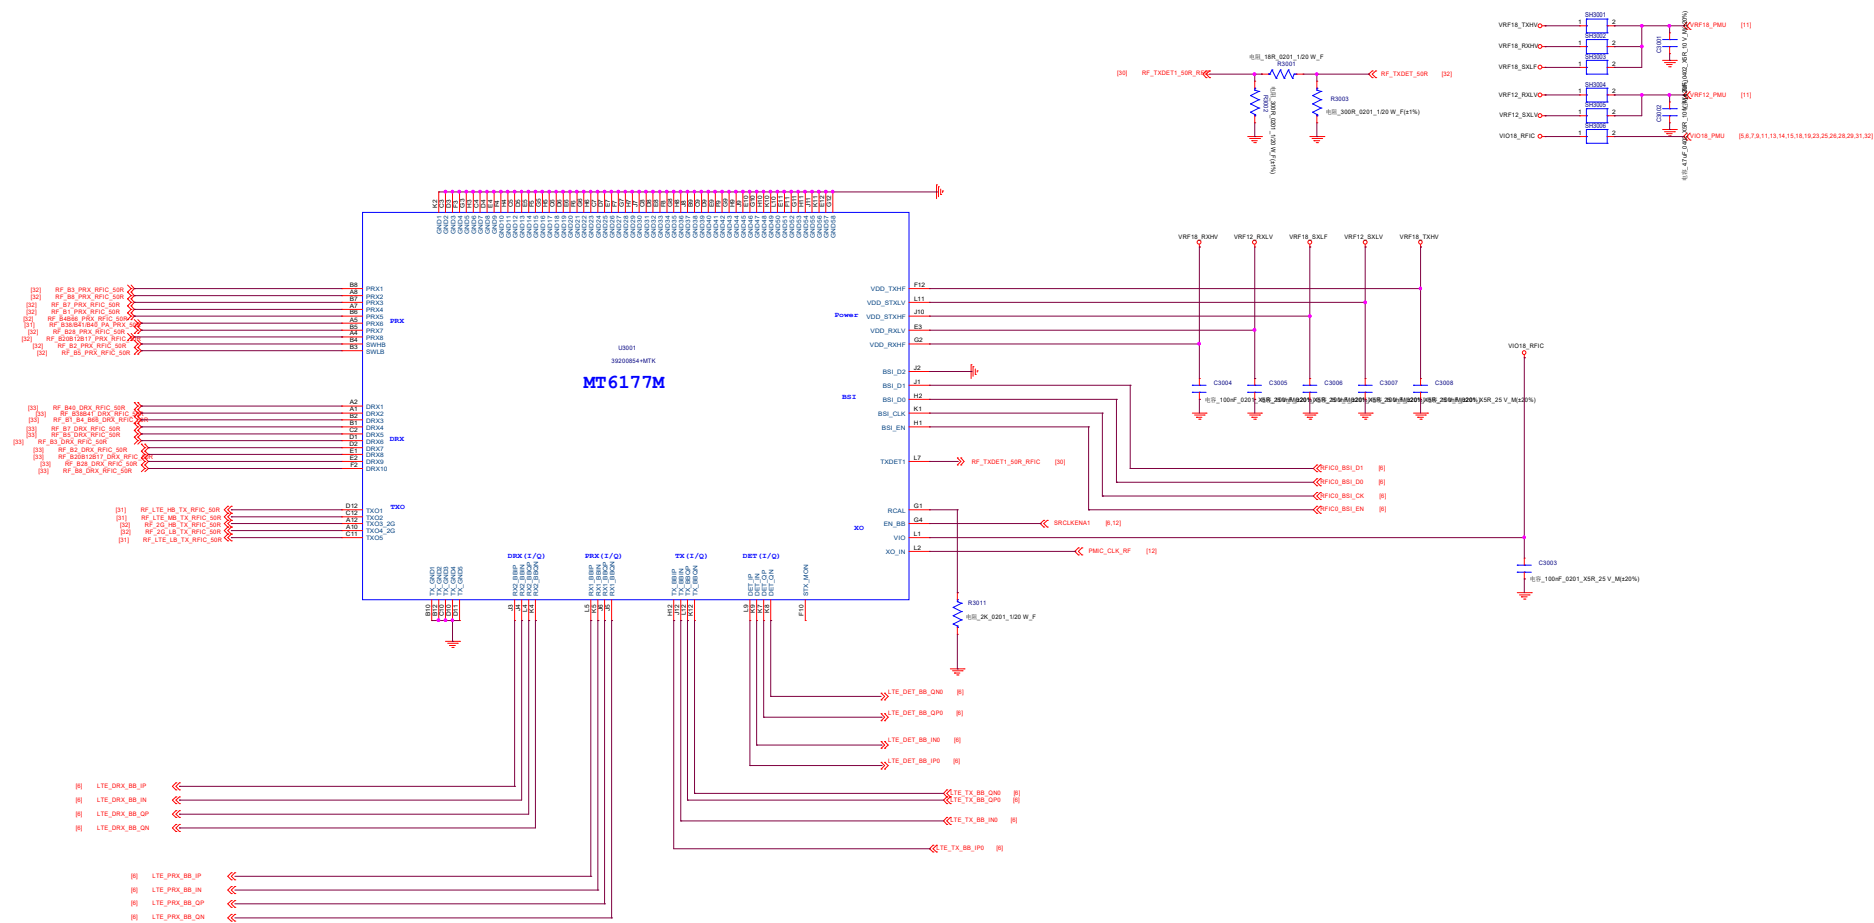


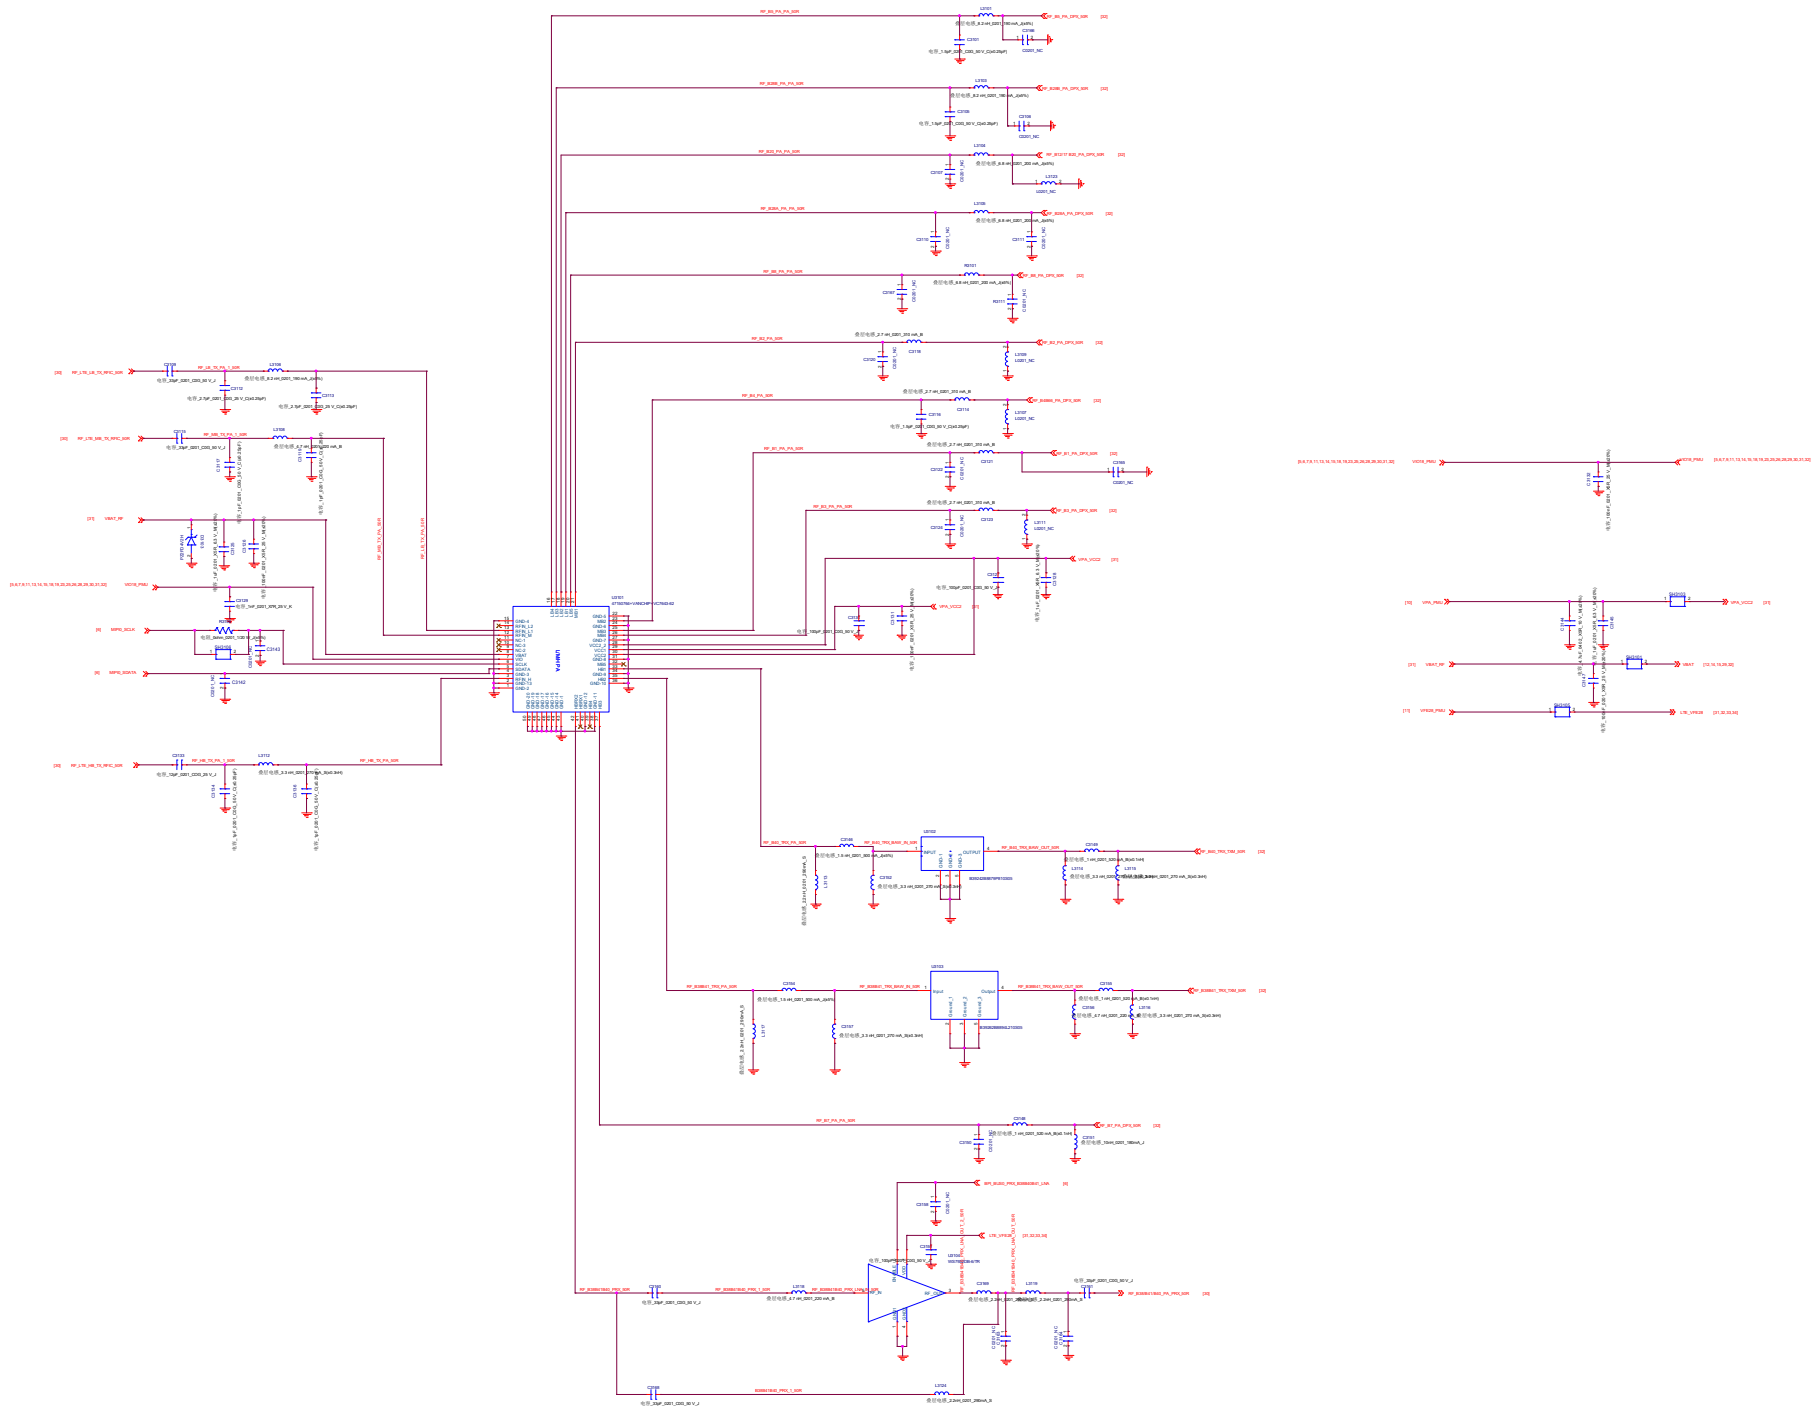


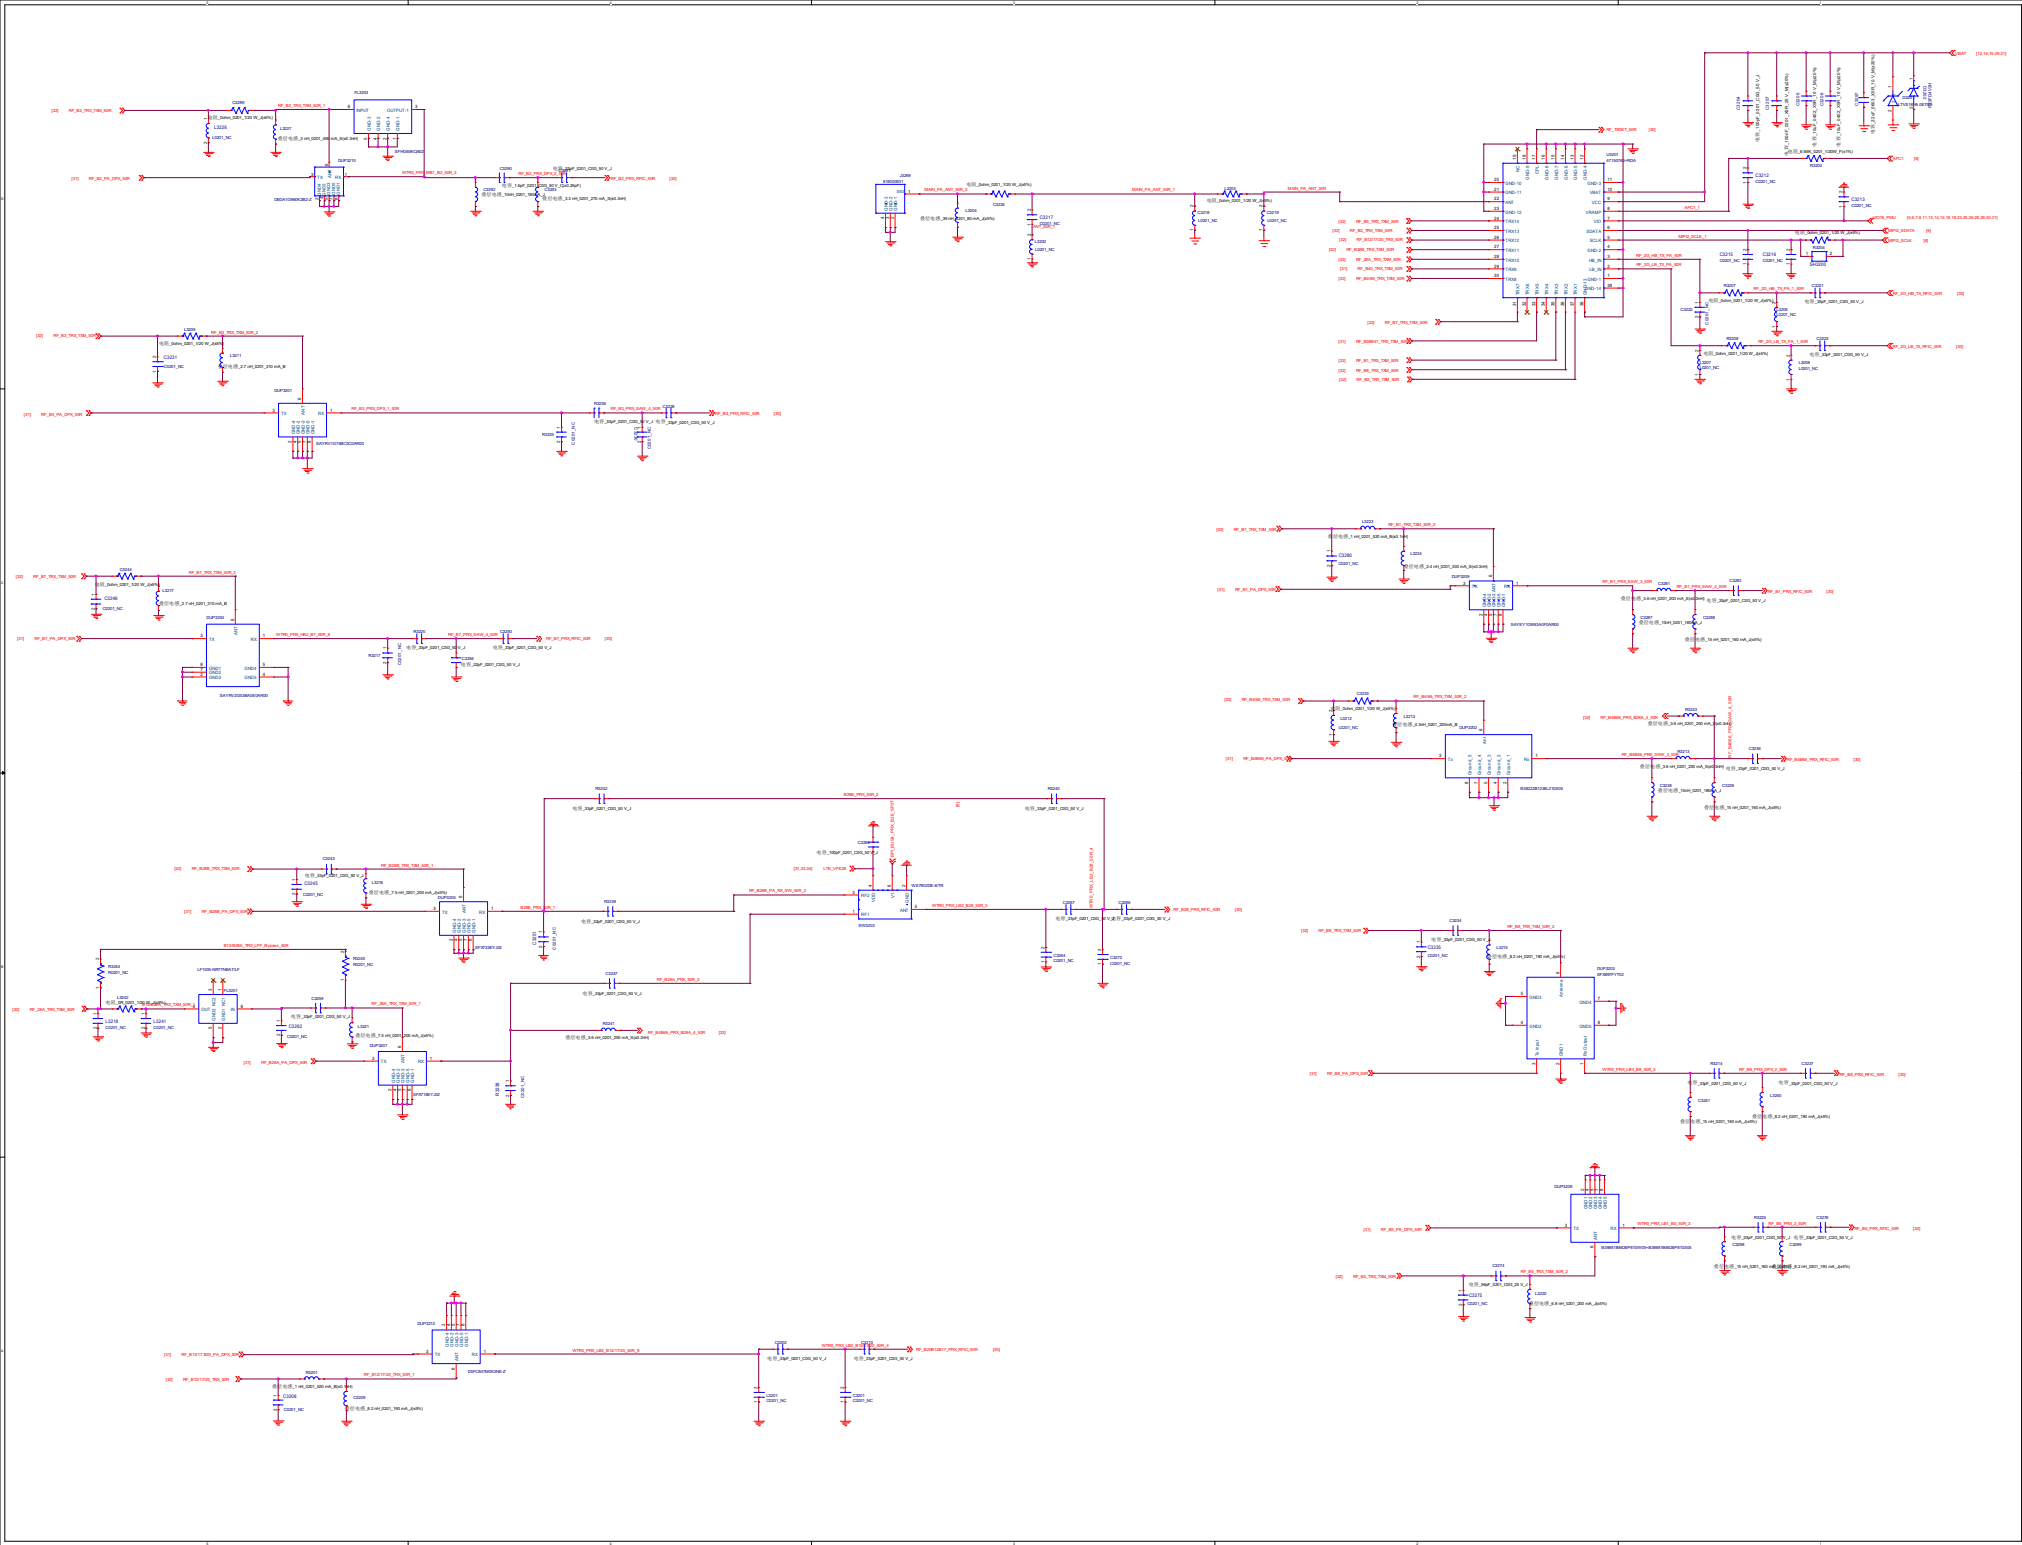

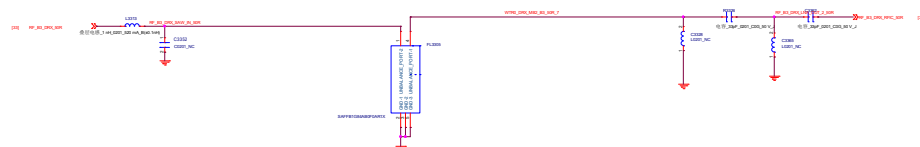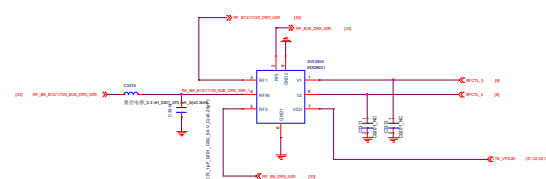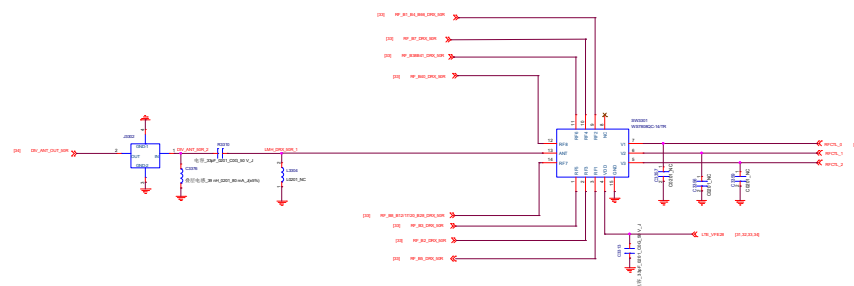


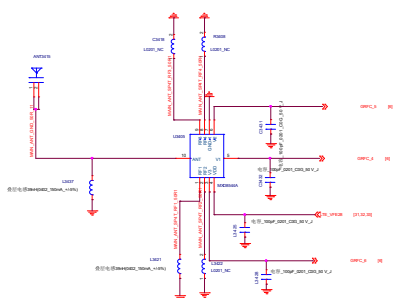

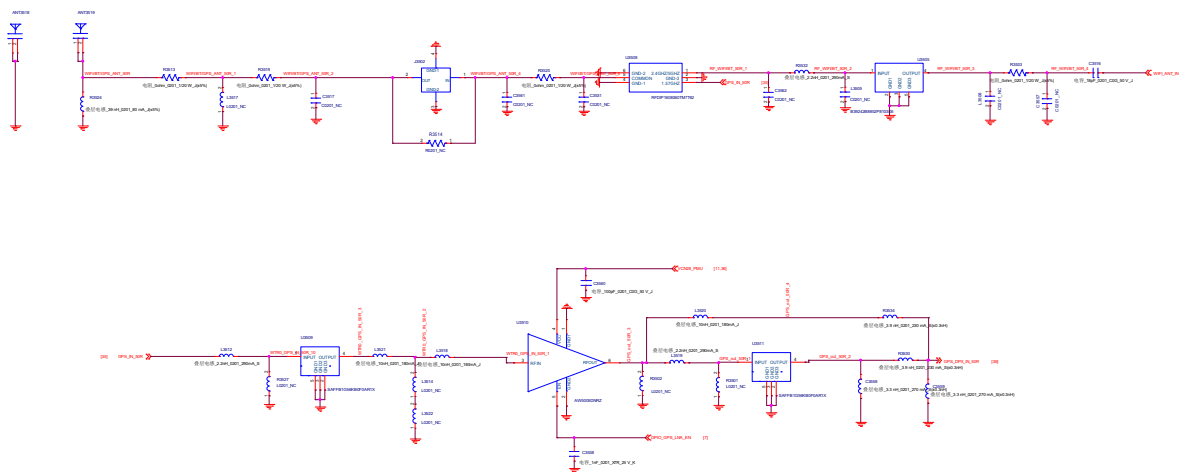


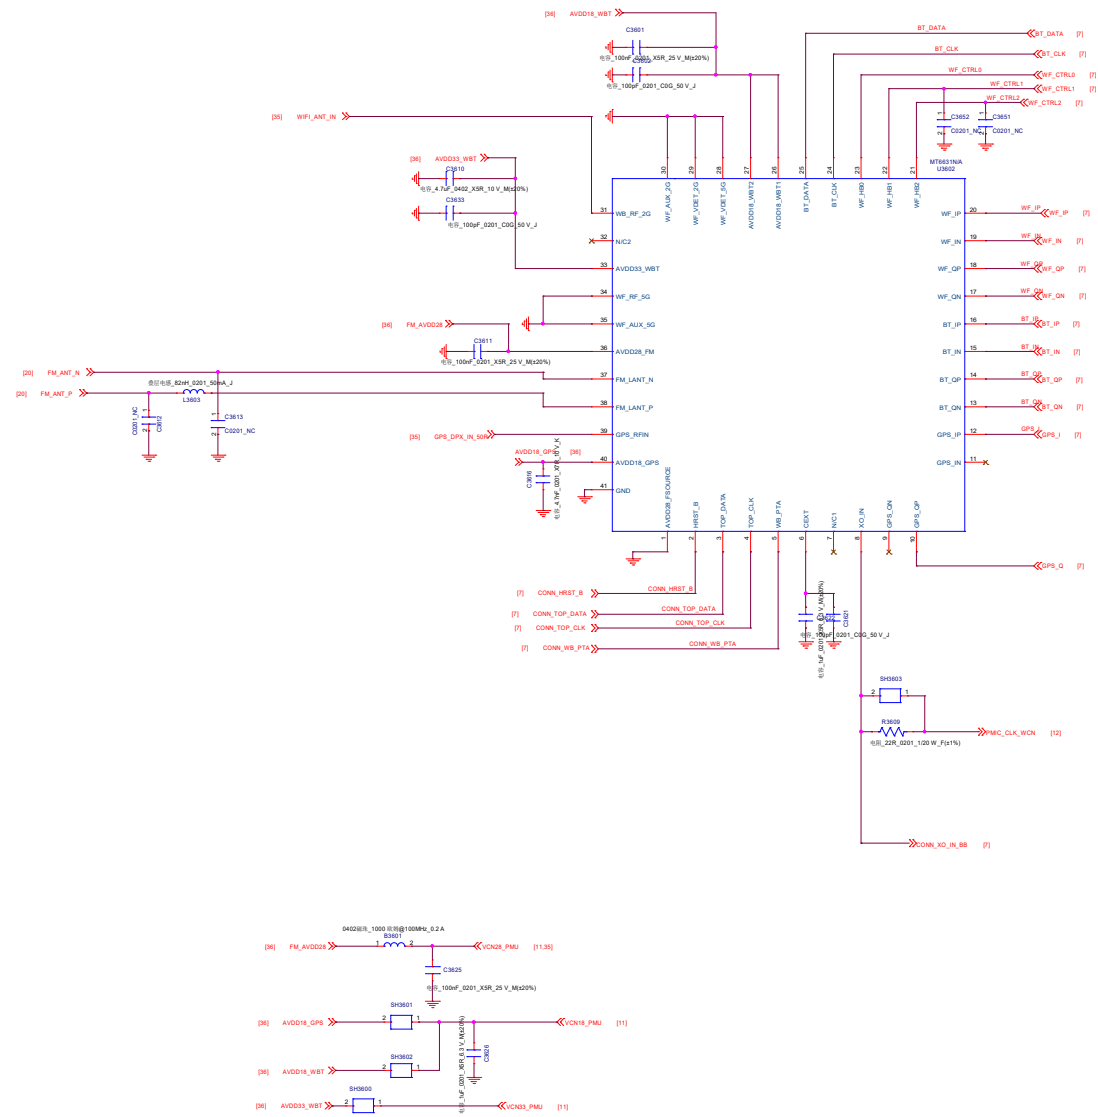


TYPEC CONNECTOR

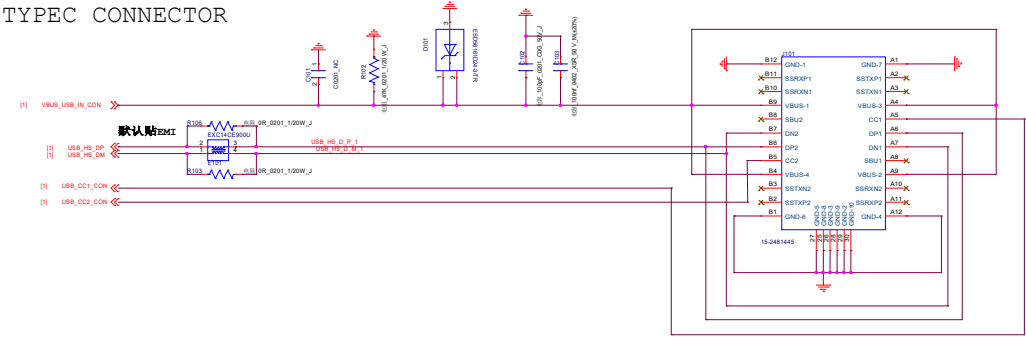

MAIN FPC BTB

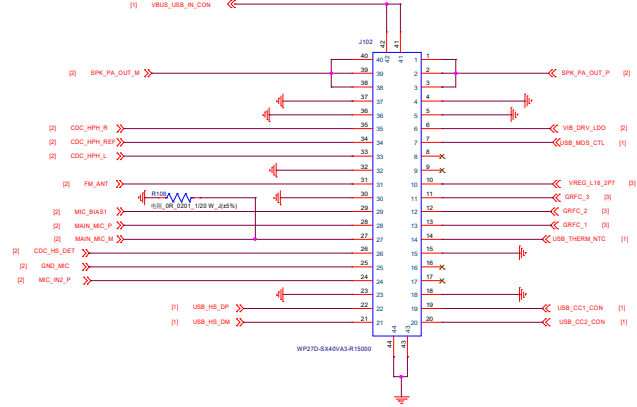

USB NTC






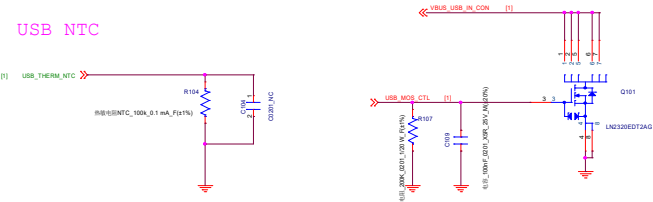


D


C

B


A

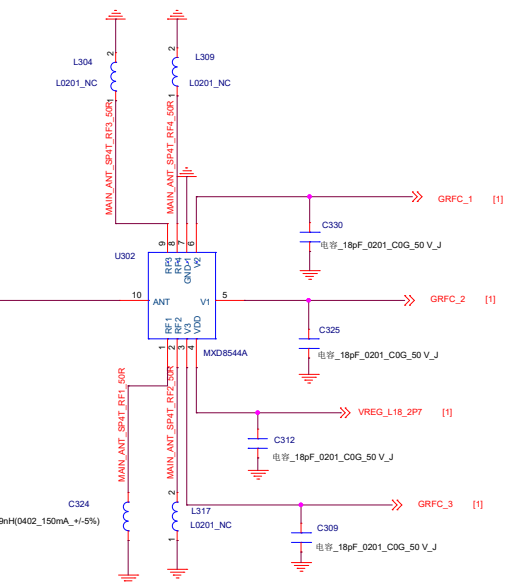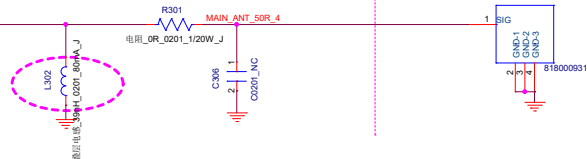


主MIC

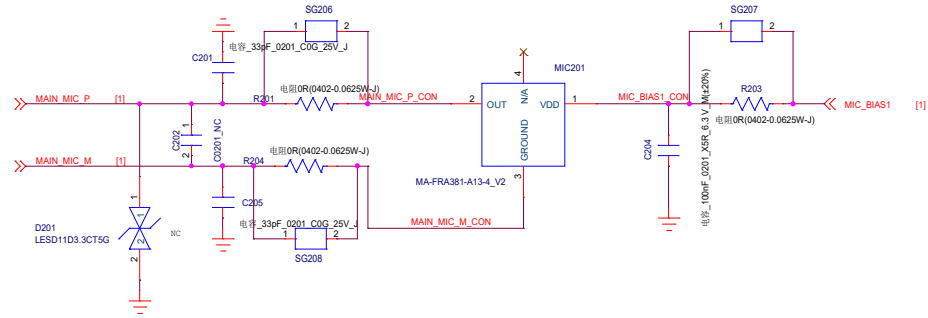


主MIC shielding




MOTOR

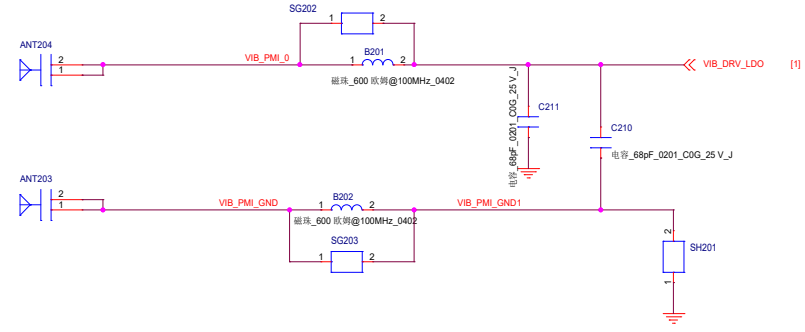

SPK

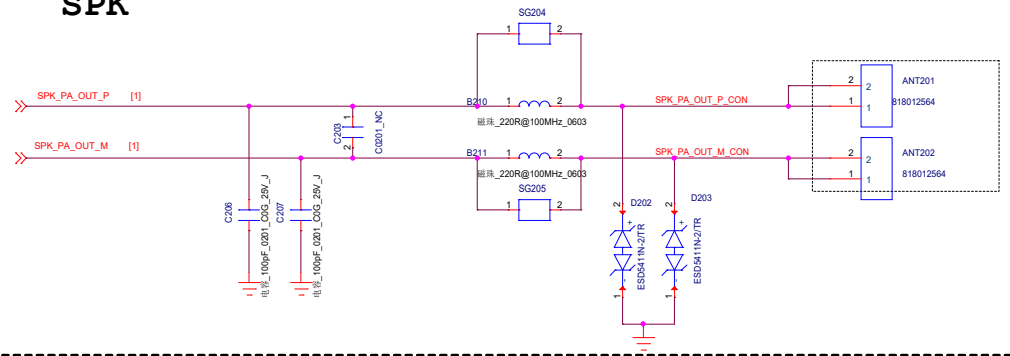

Headset

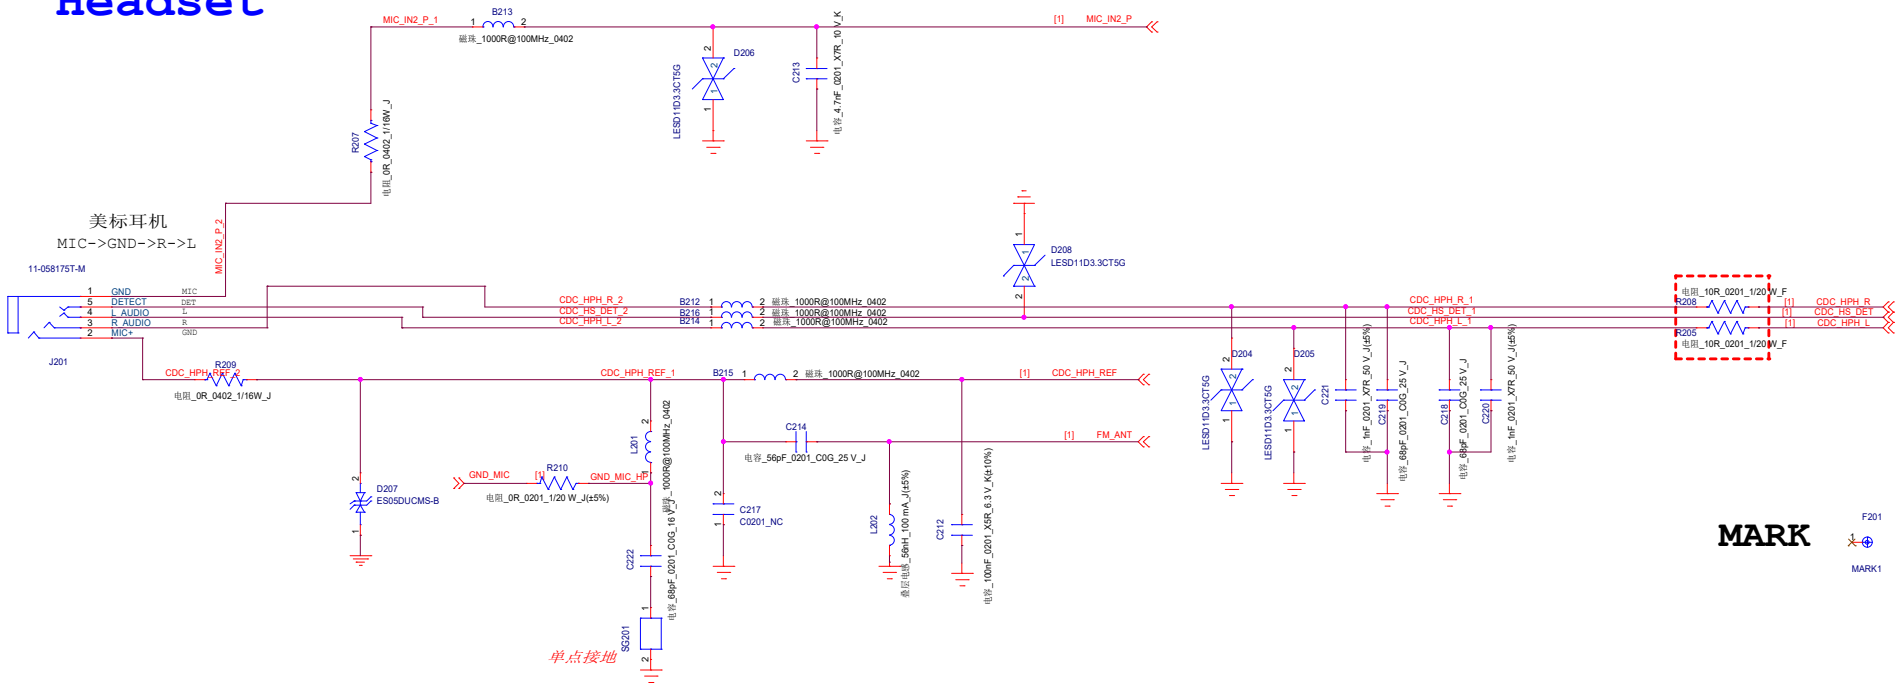

MARK



