


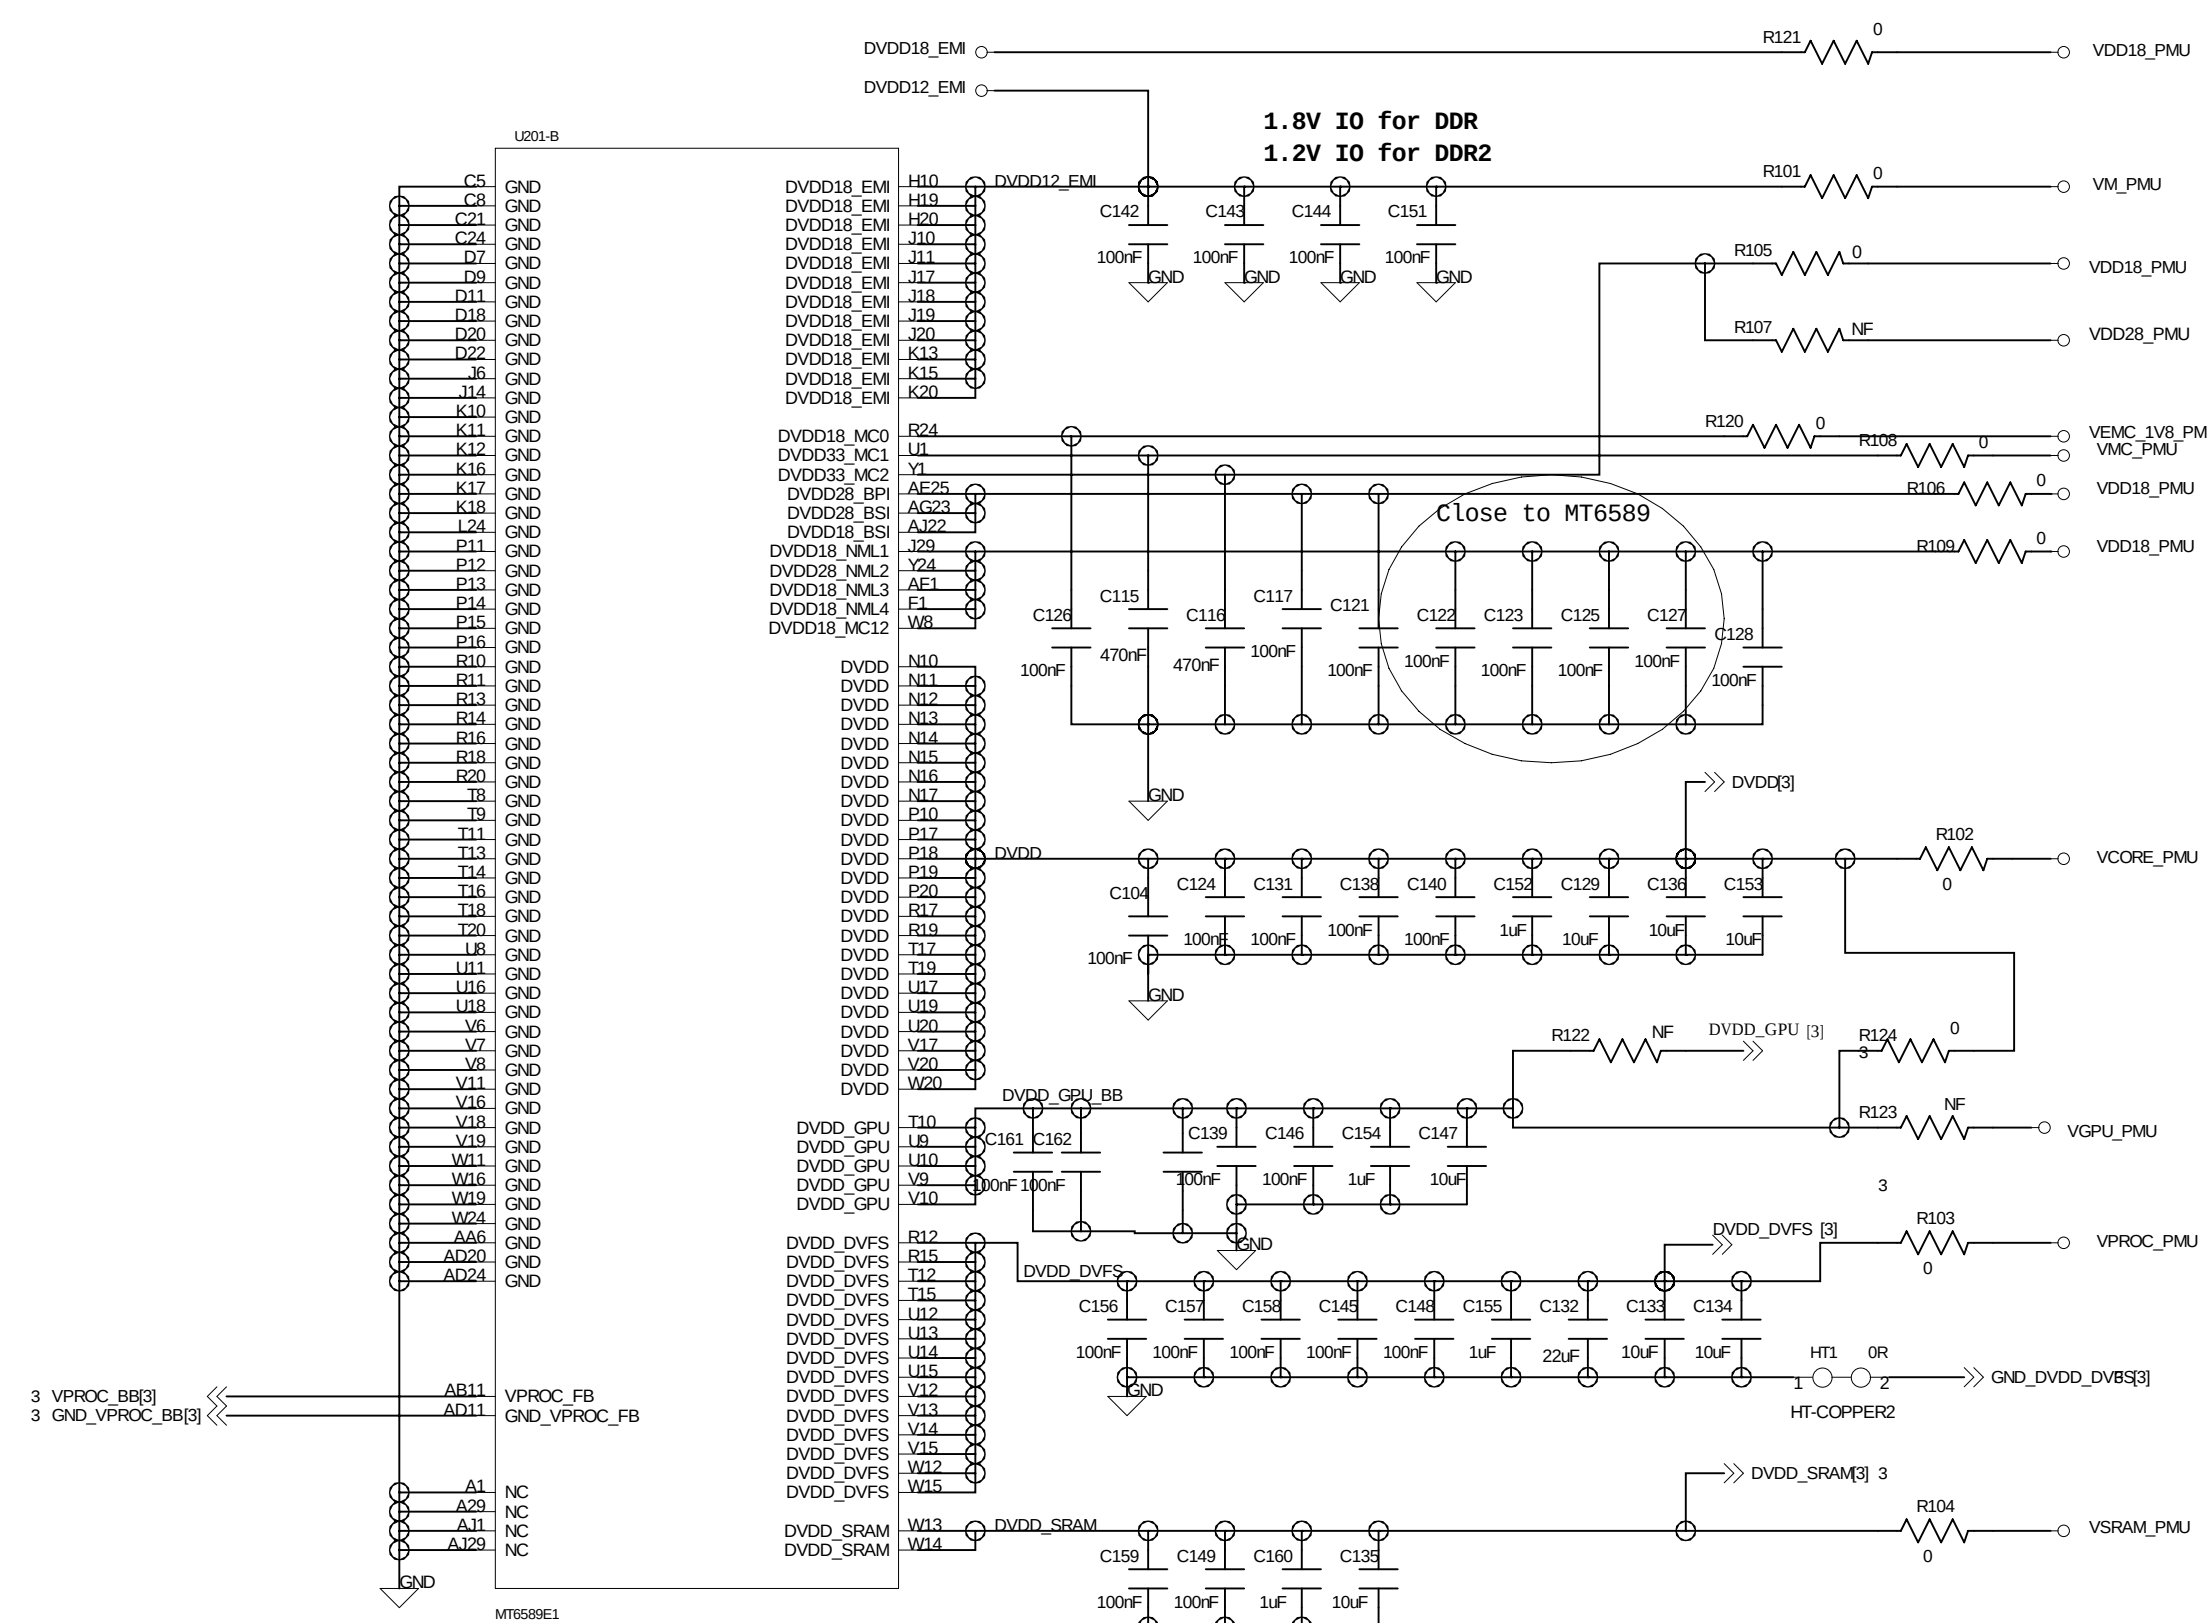


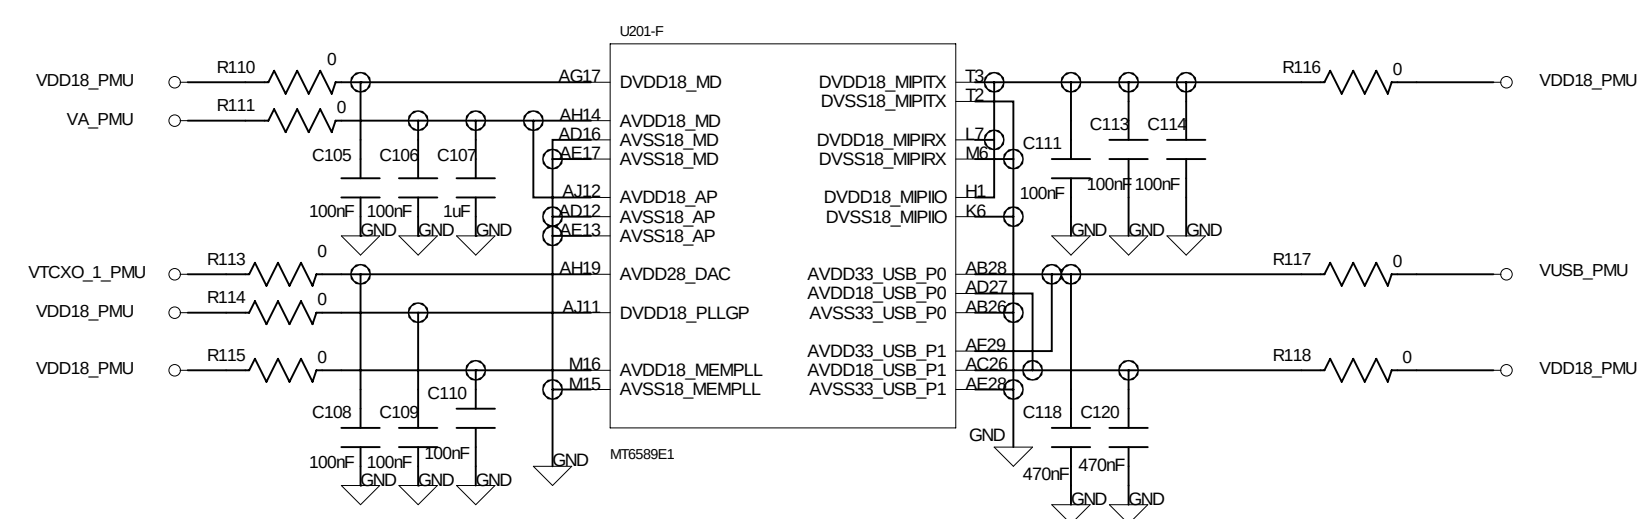


Receiver

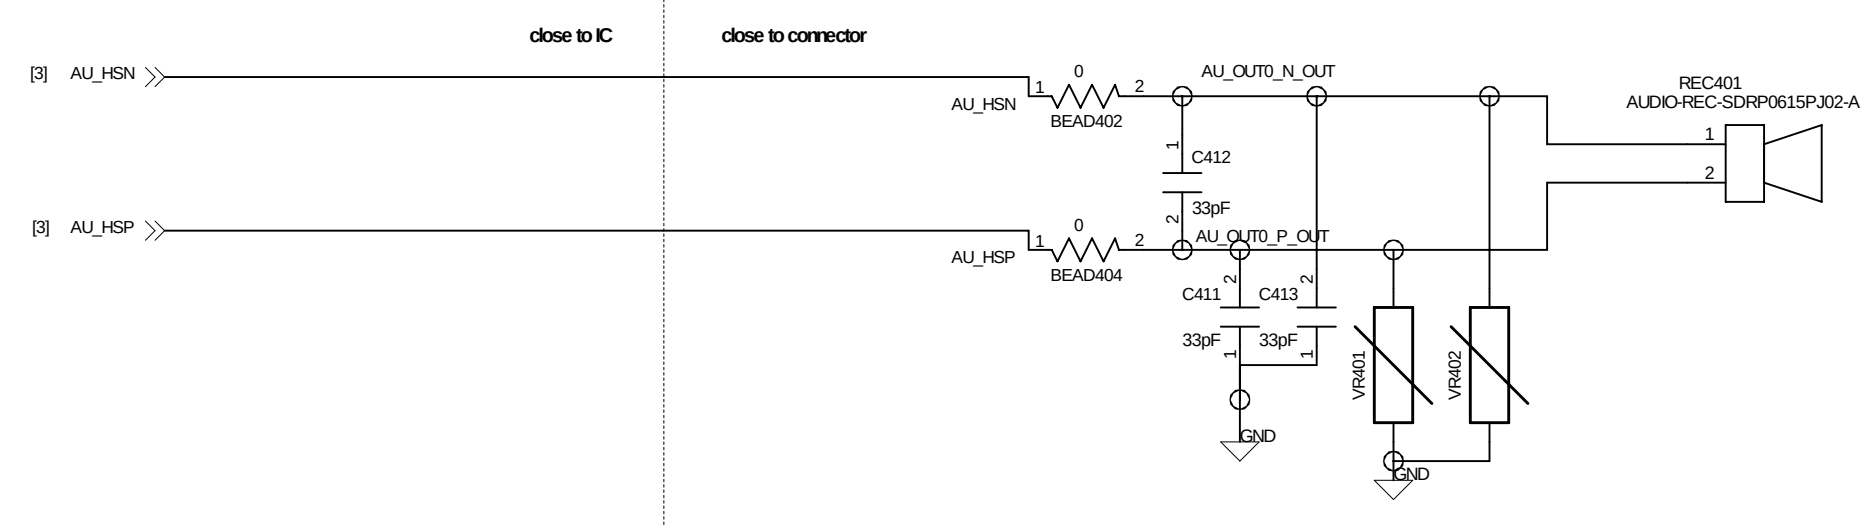

Earphone MICPHONE

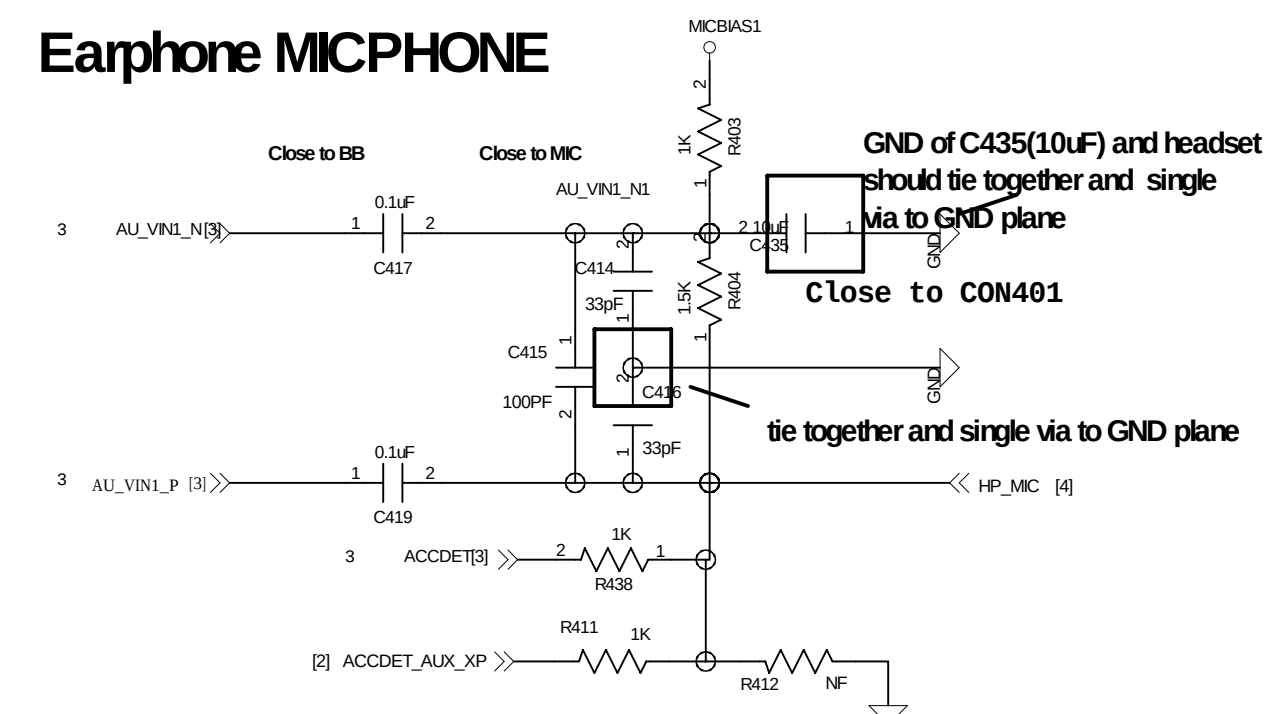


Handset Microphone 1

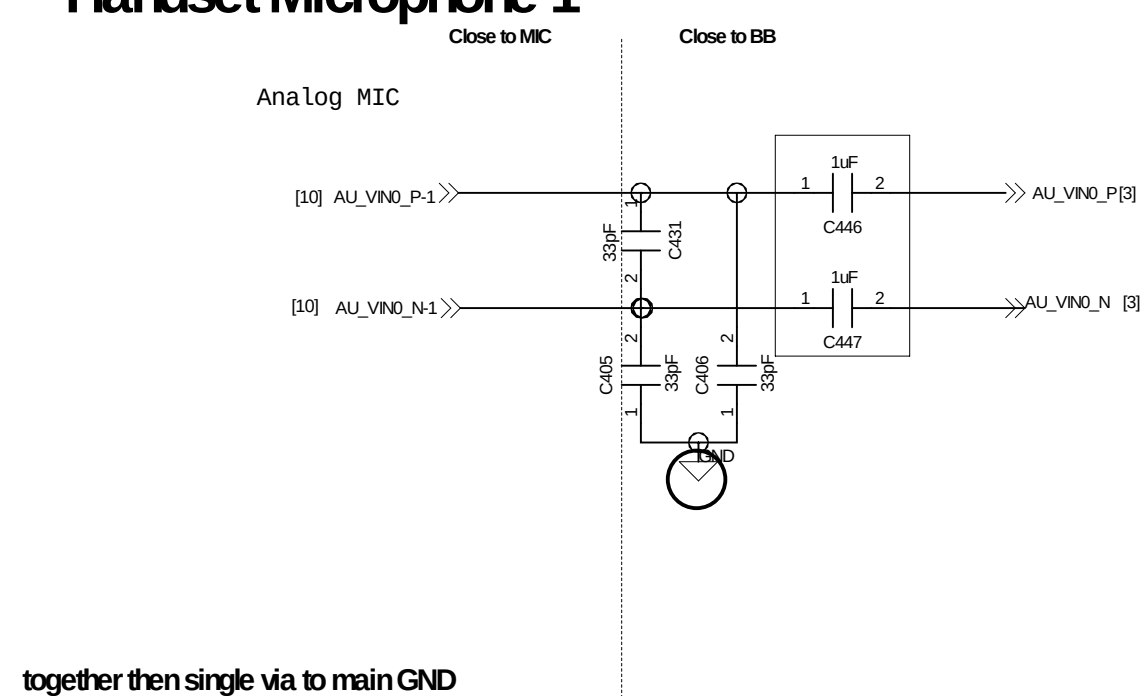


together then single via to main GND

AUDIO PA

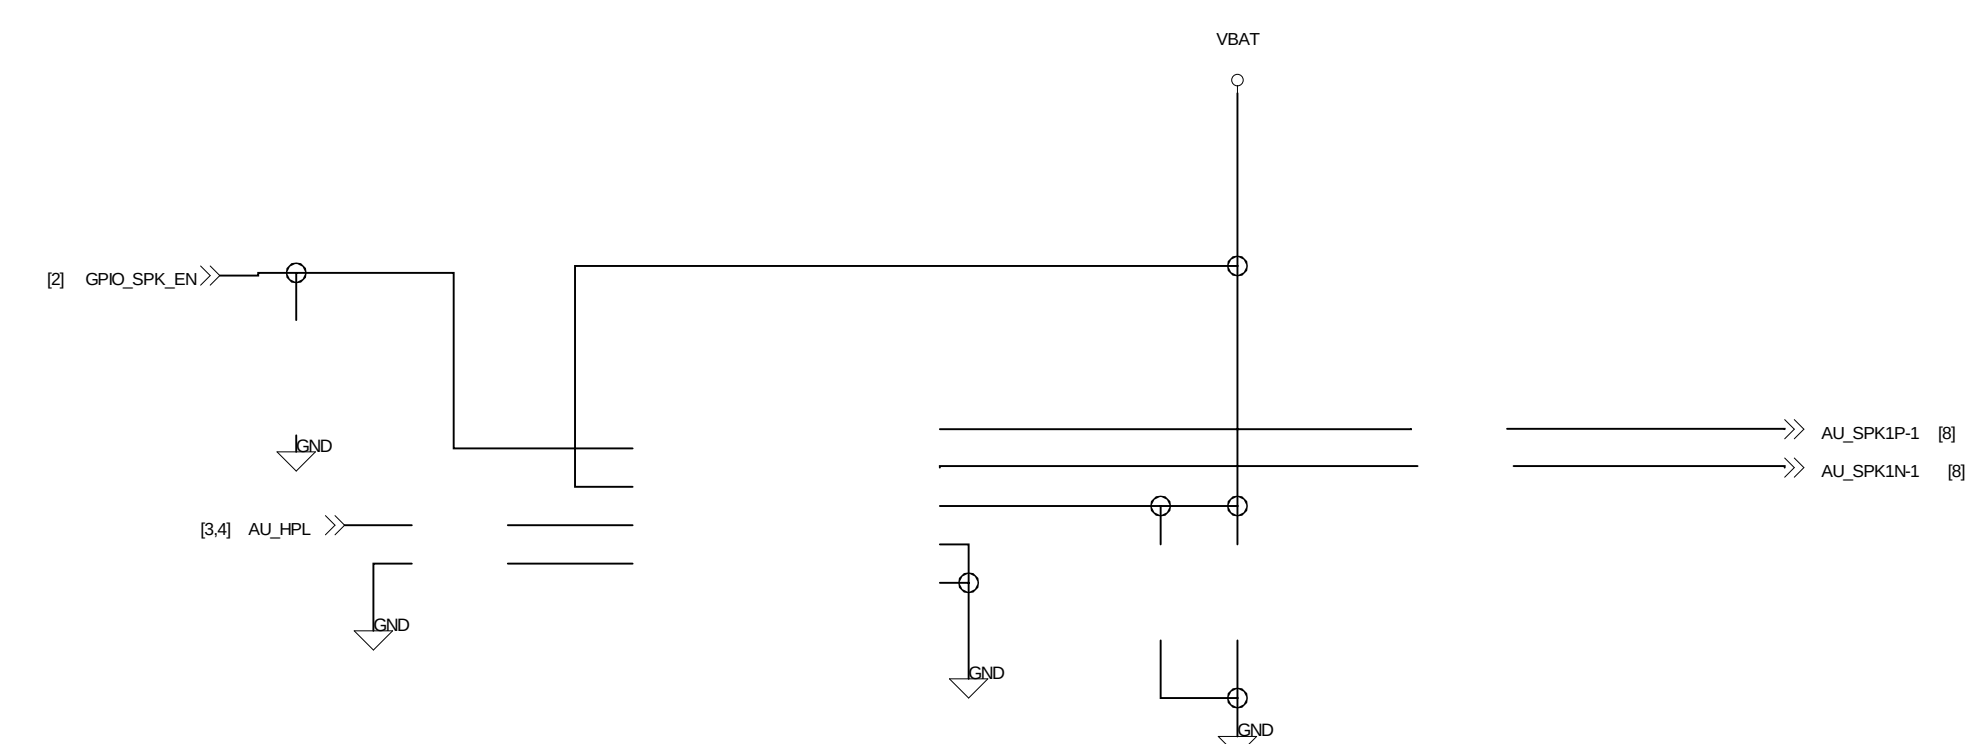


Handset Microphone 2-1

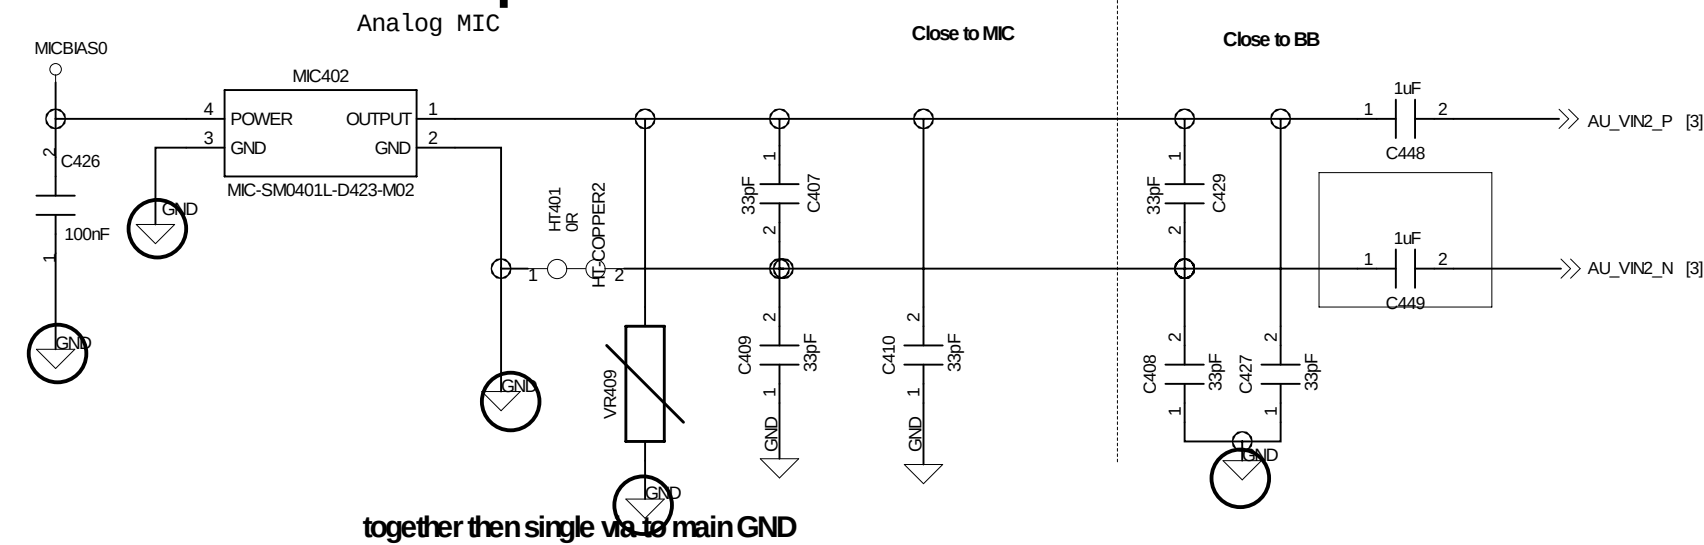

together then single via to main GND

Earphone Audio

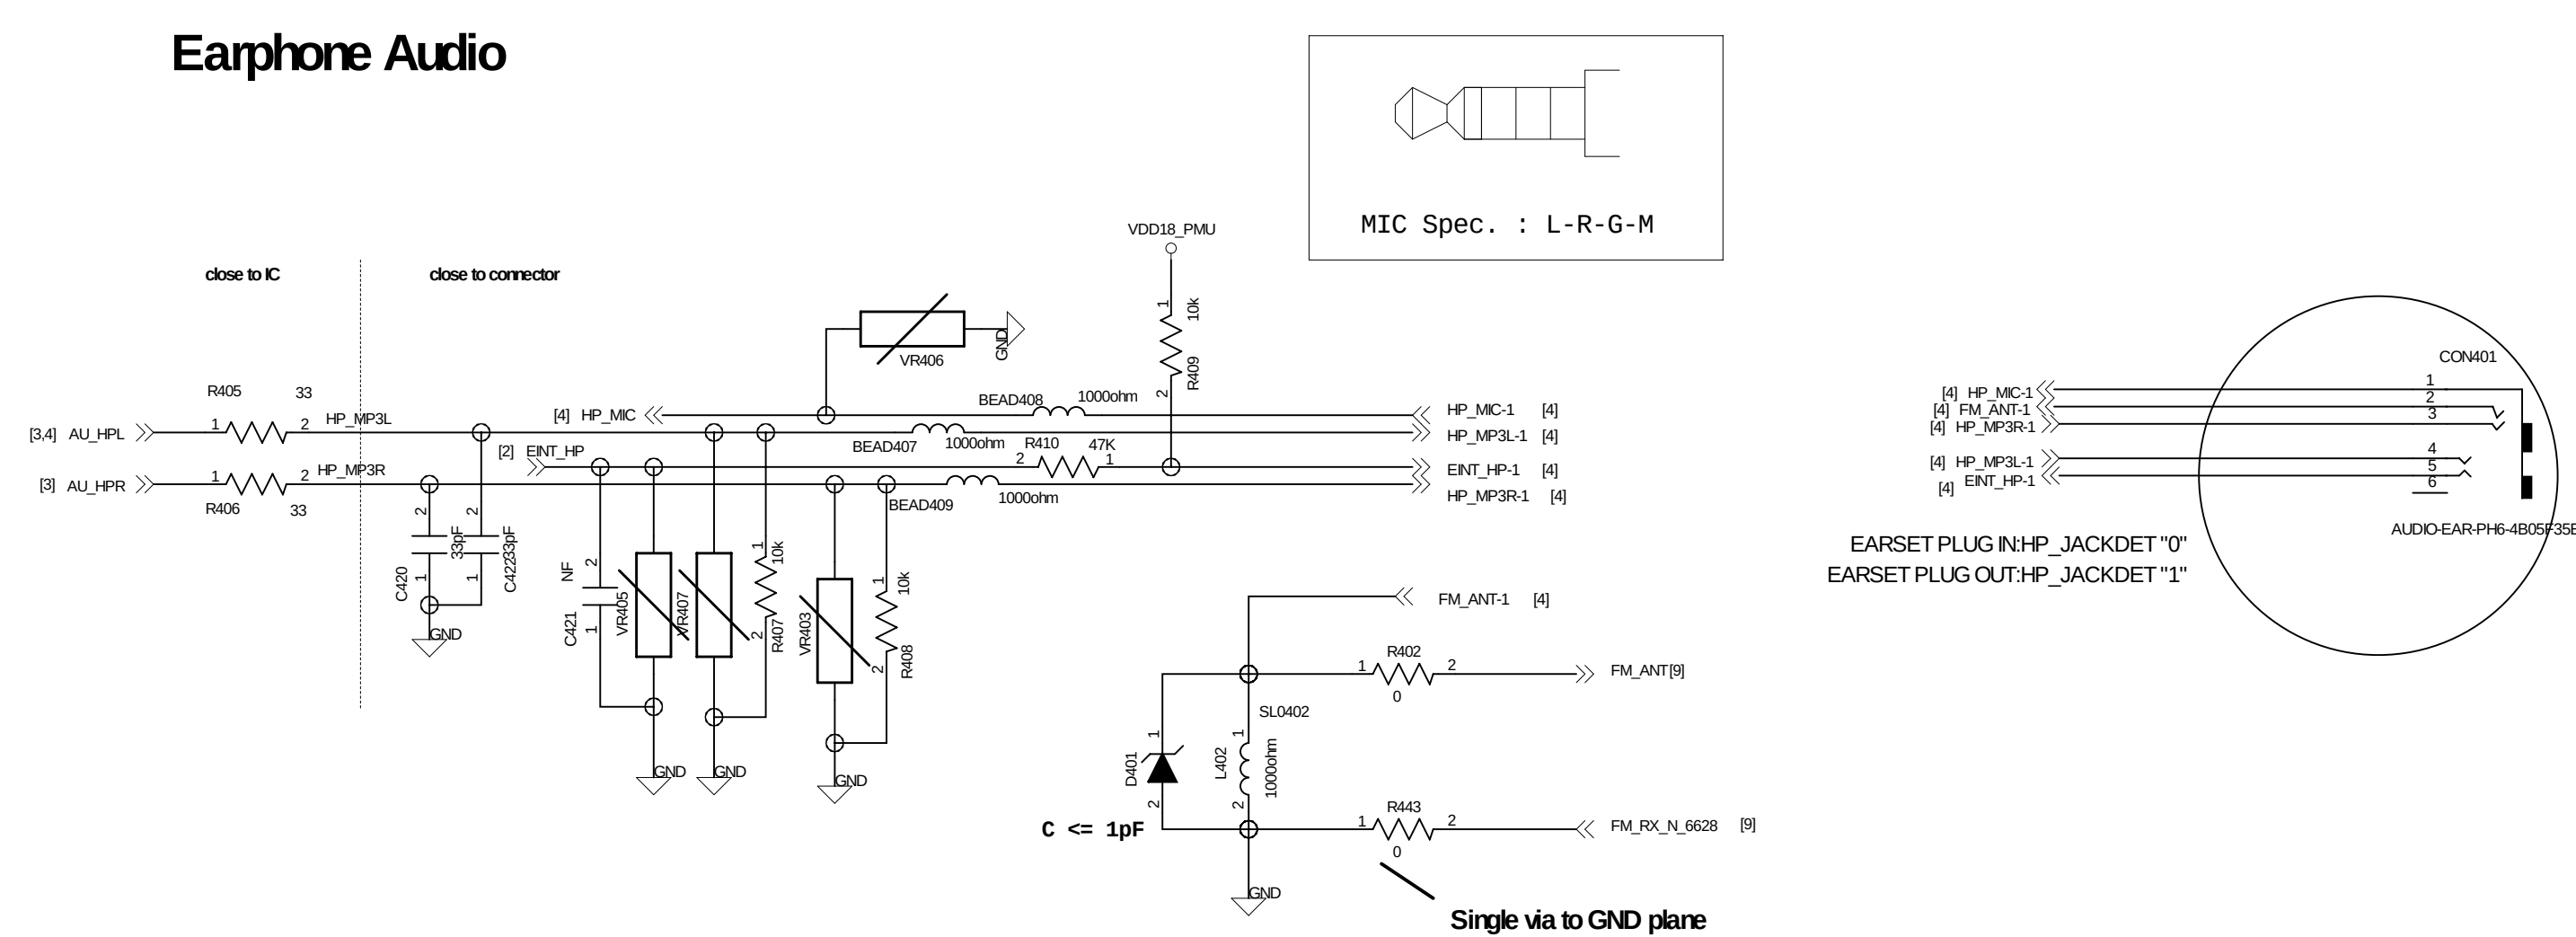

eMMC+LPDDR2


162 Ball, 0.5mm pitch

VDD1=1.8V

VDD2=1.20V







VDDCA=1.2V


VDDQ= 1.20V

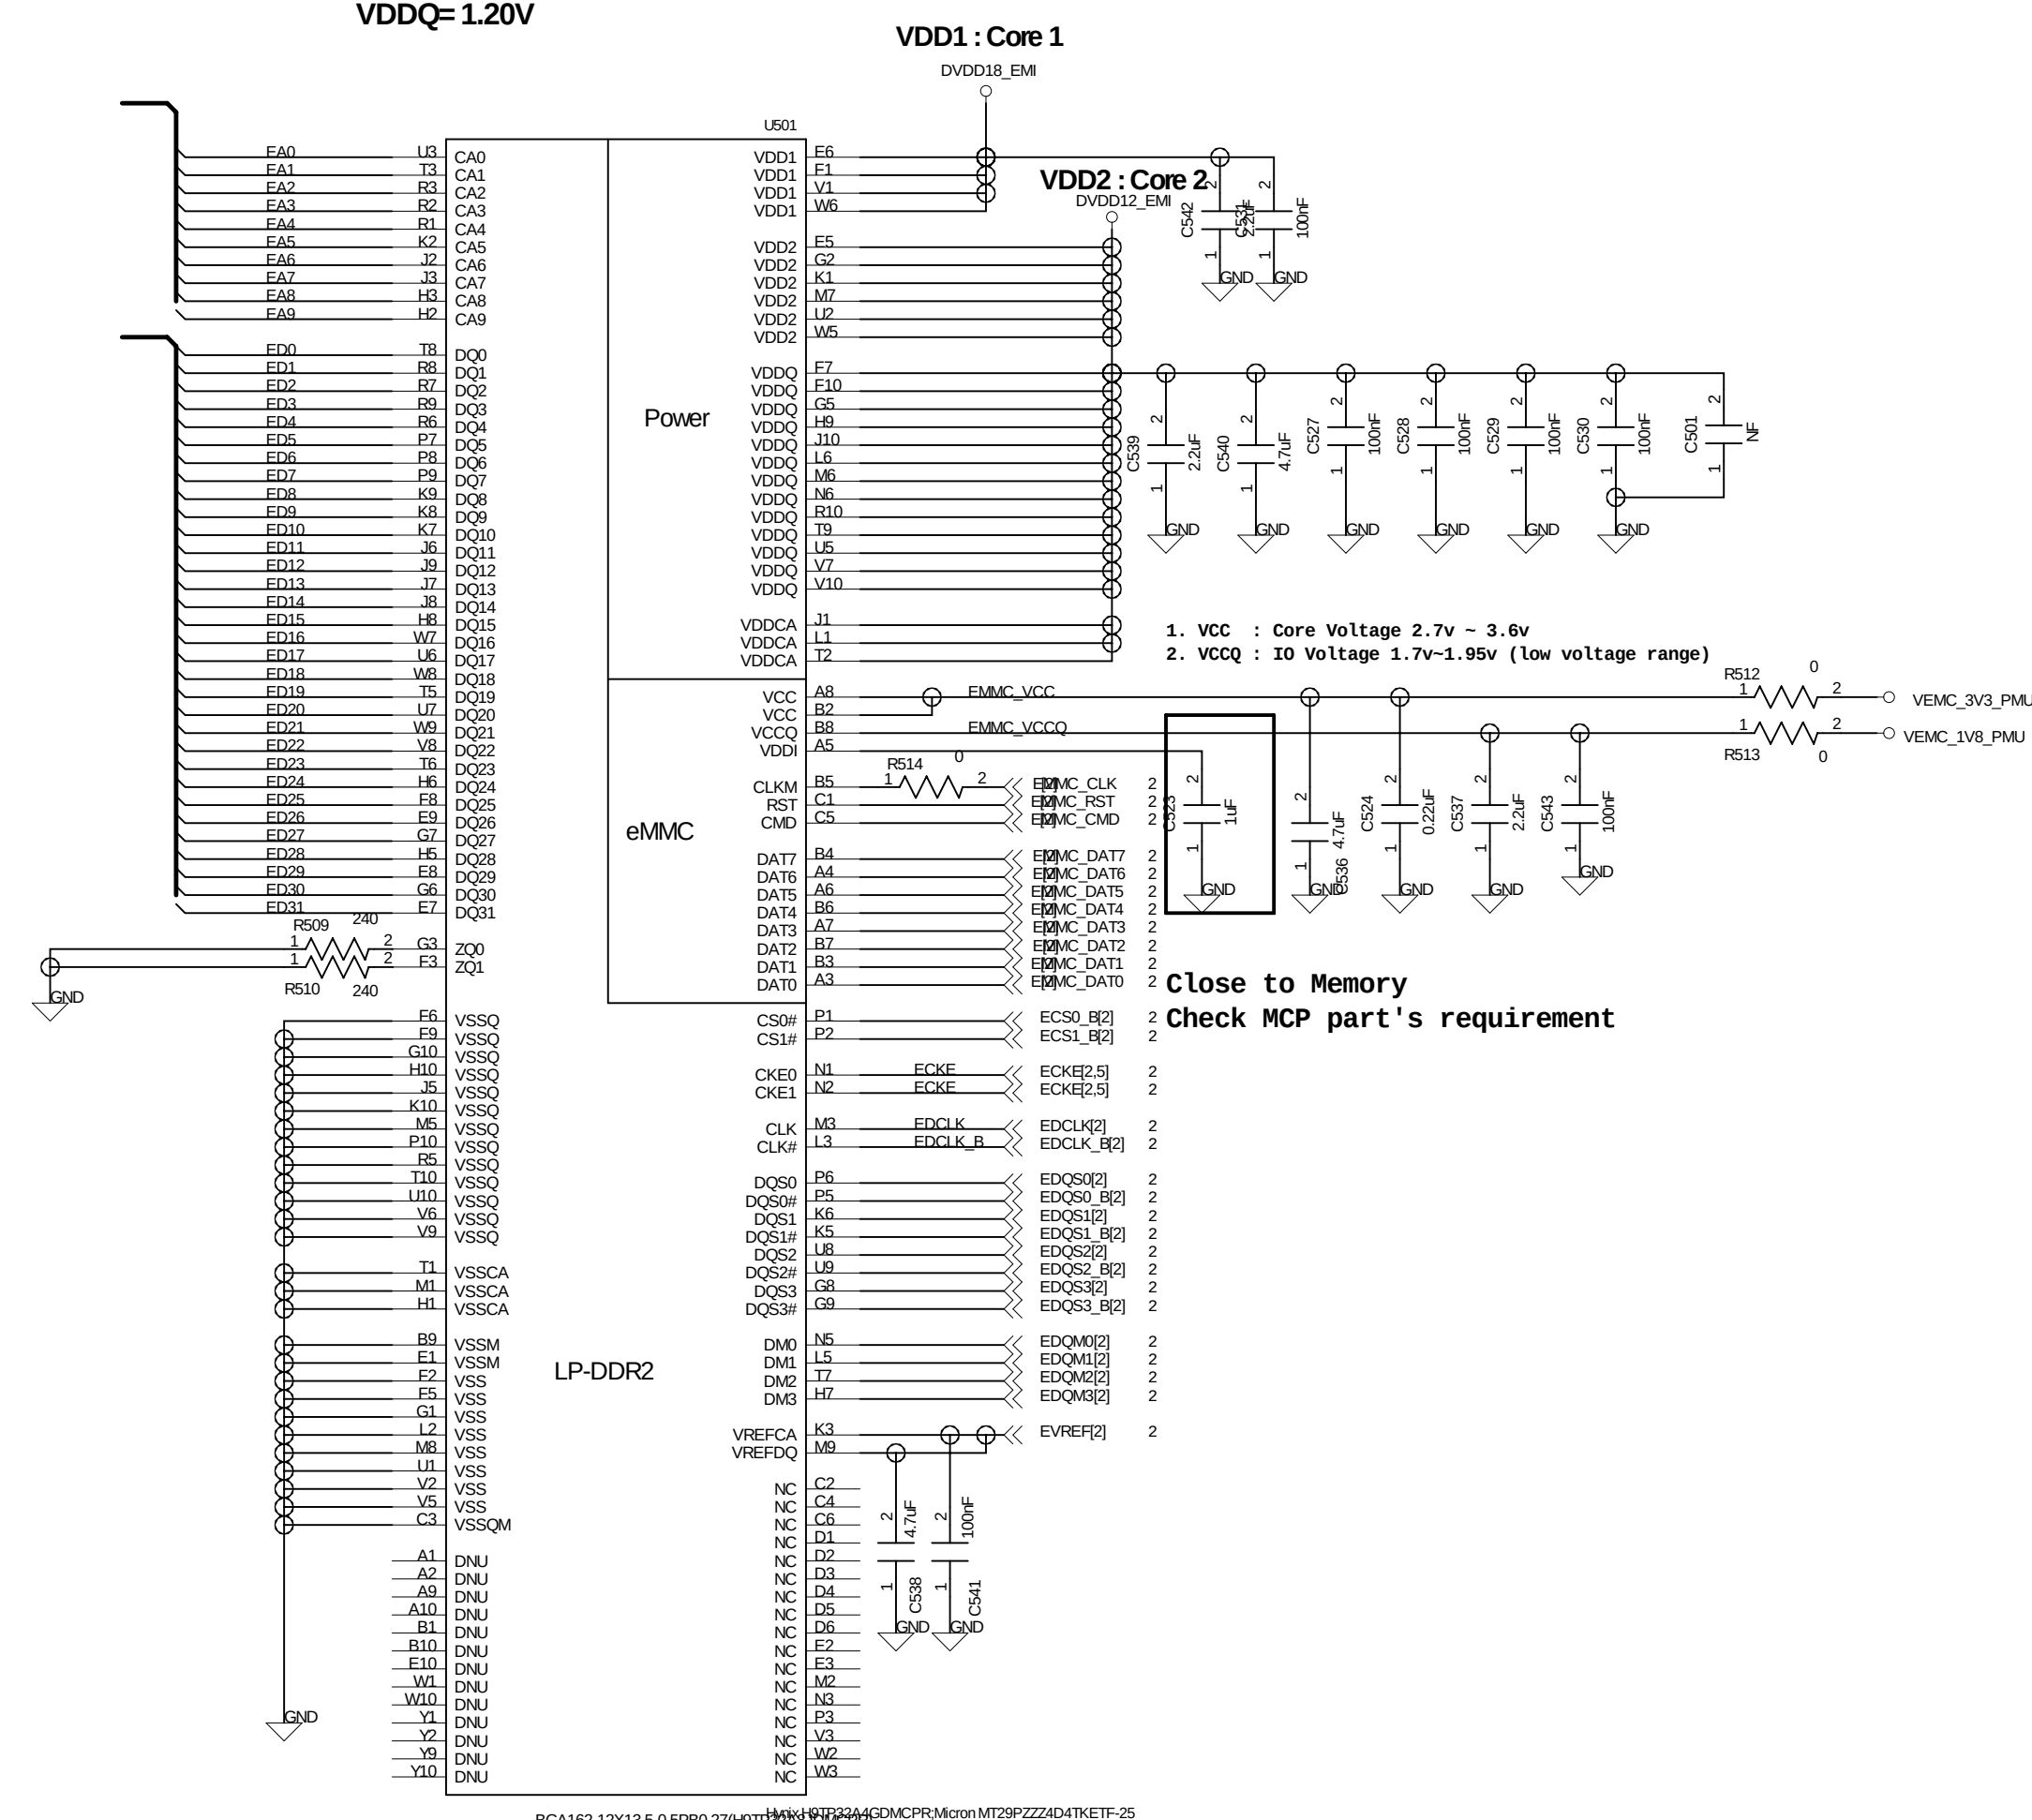


RG0162-12X13.5-0.5PR0.270-0.1TP.208111A-001

MT6589 ----- MT6168

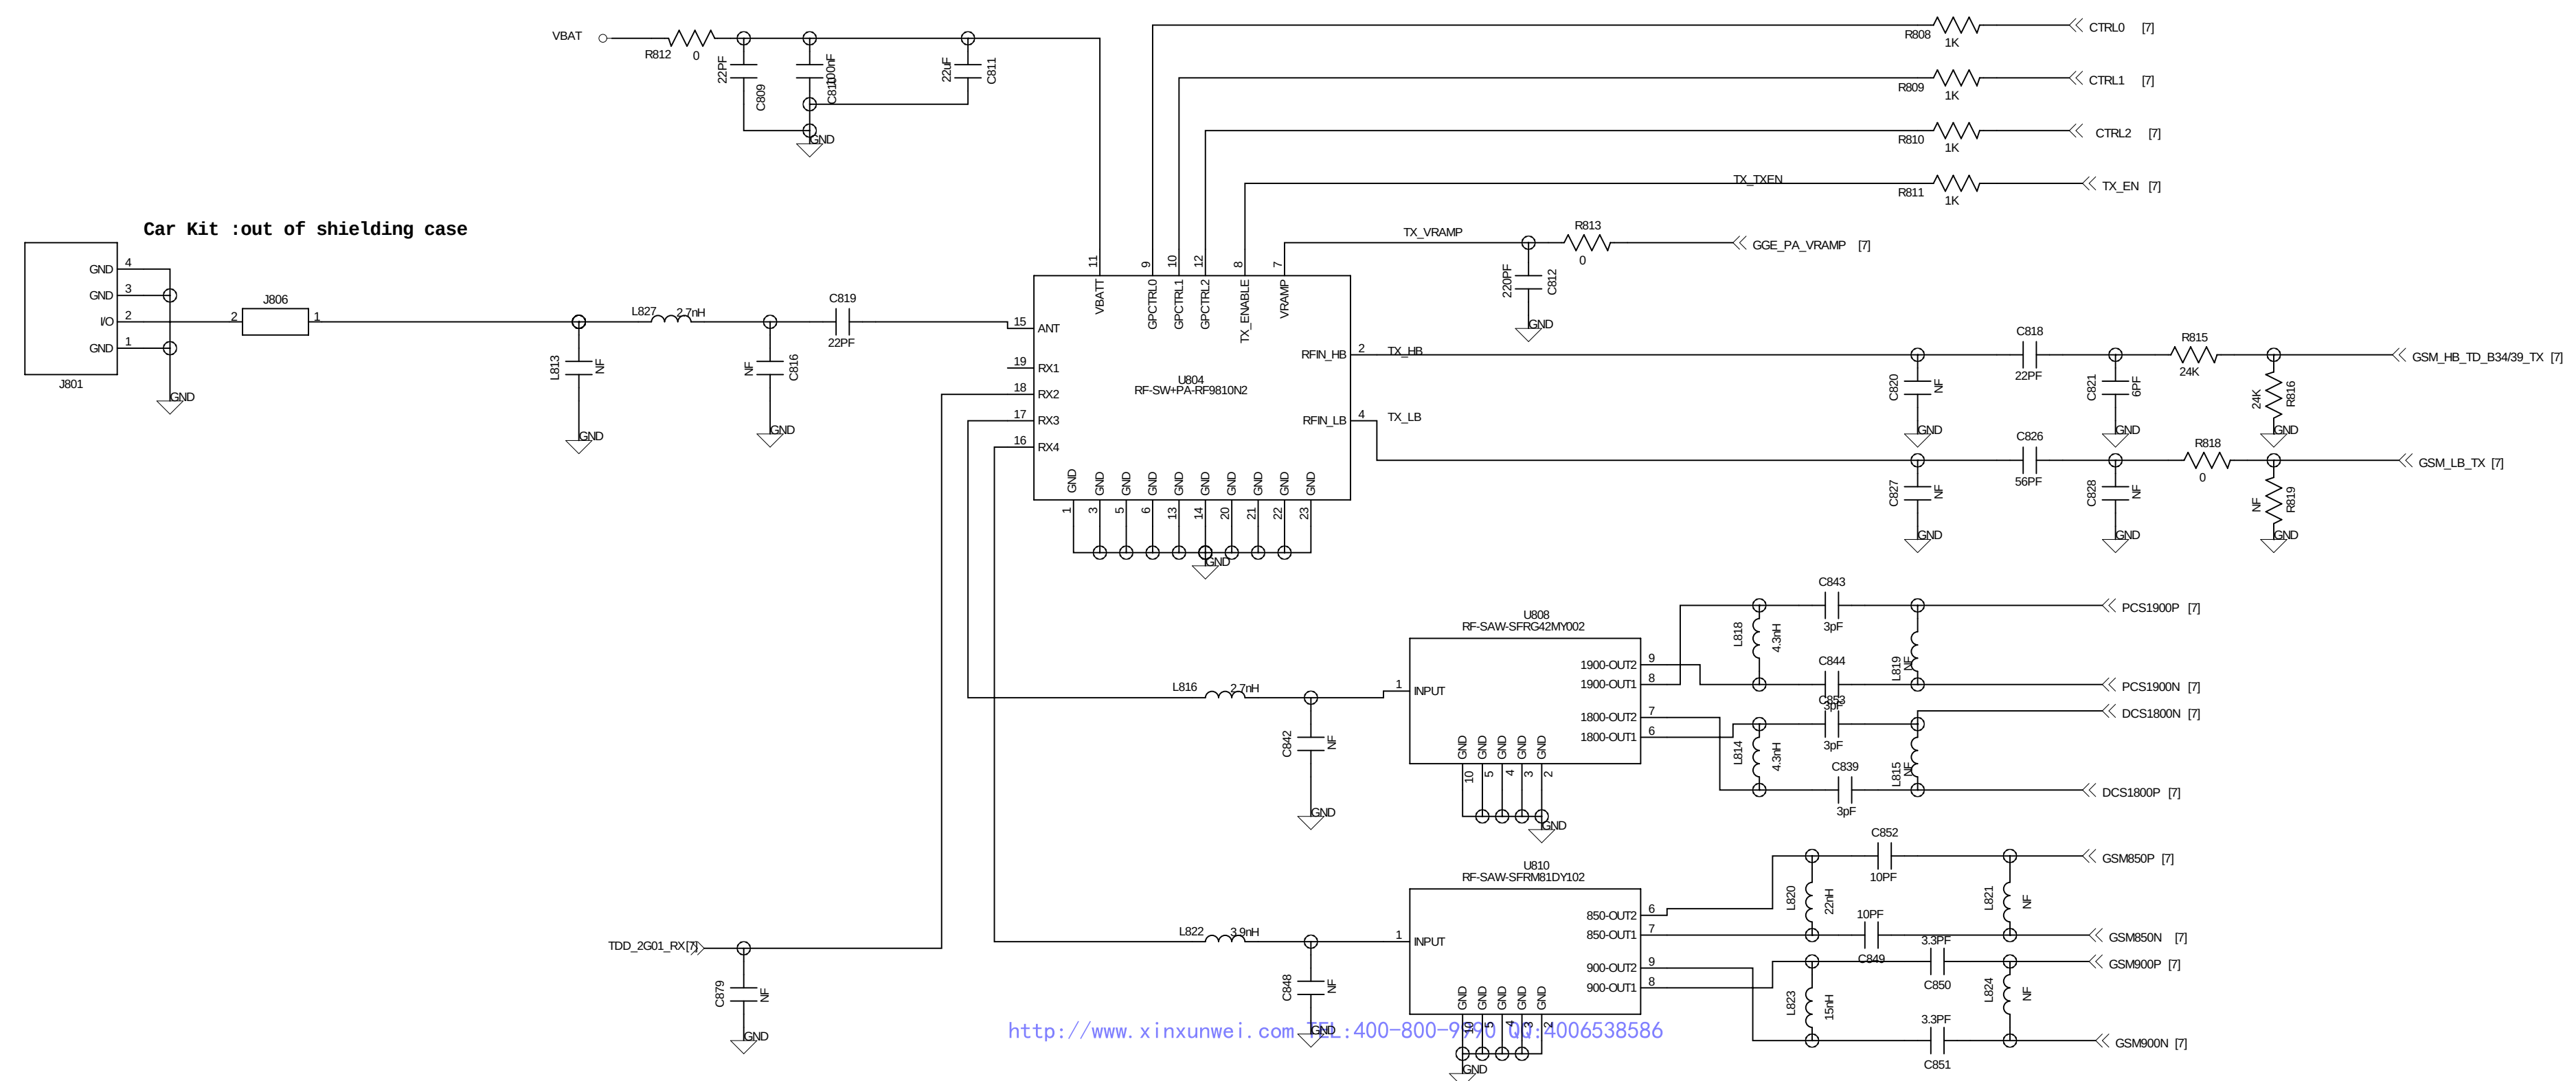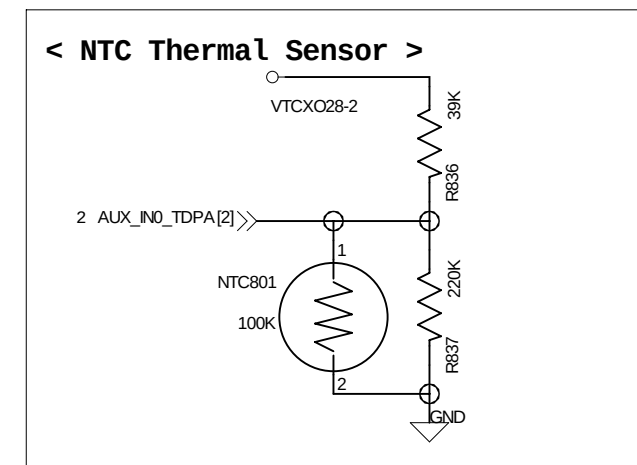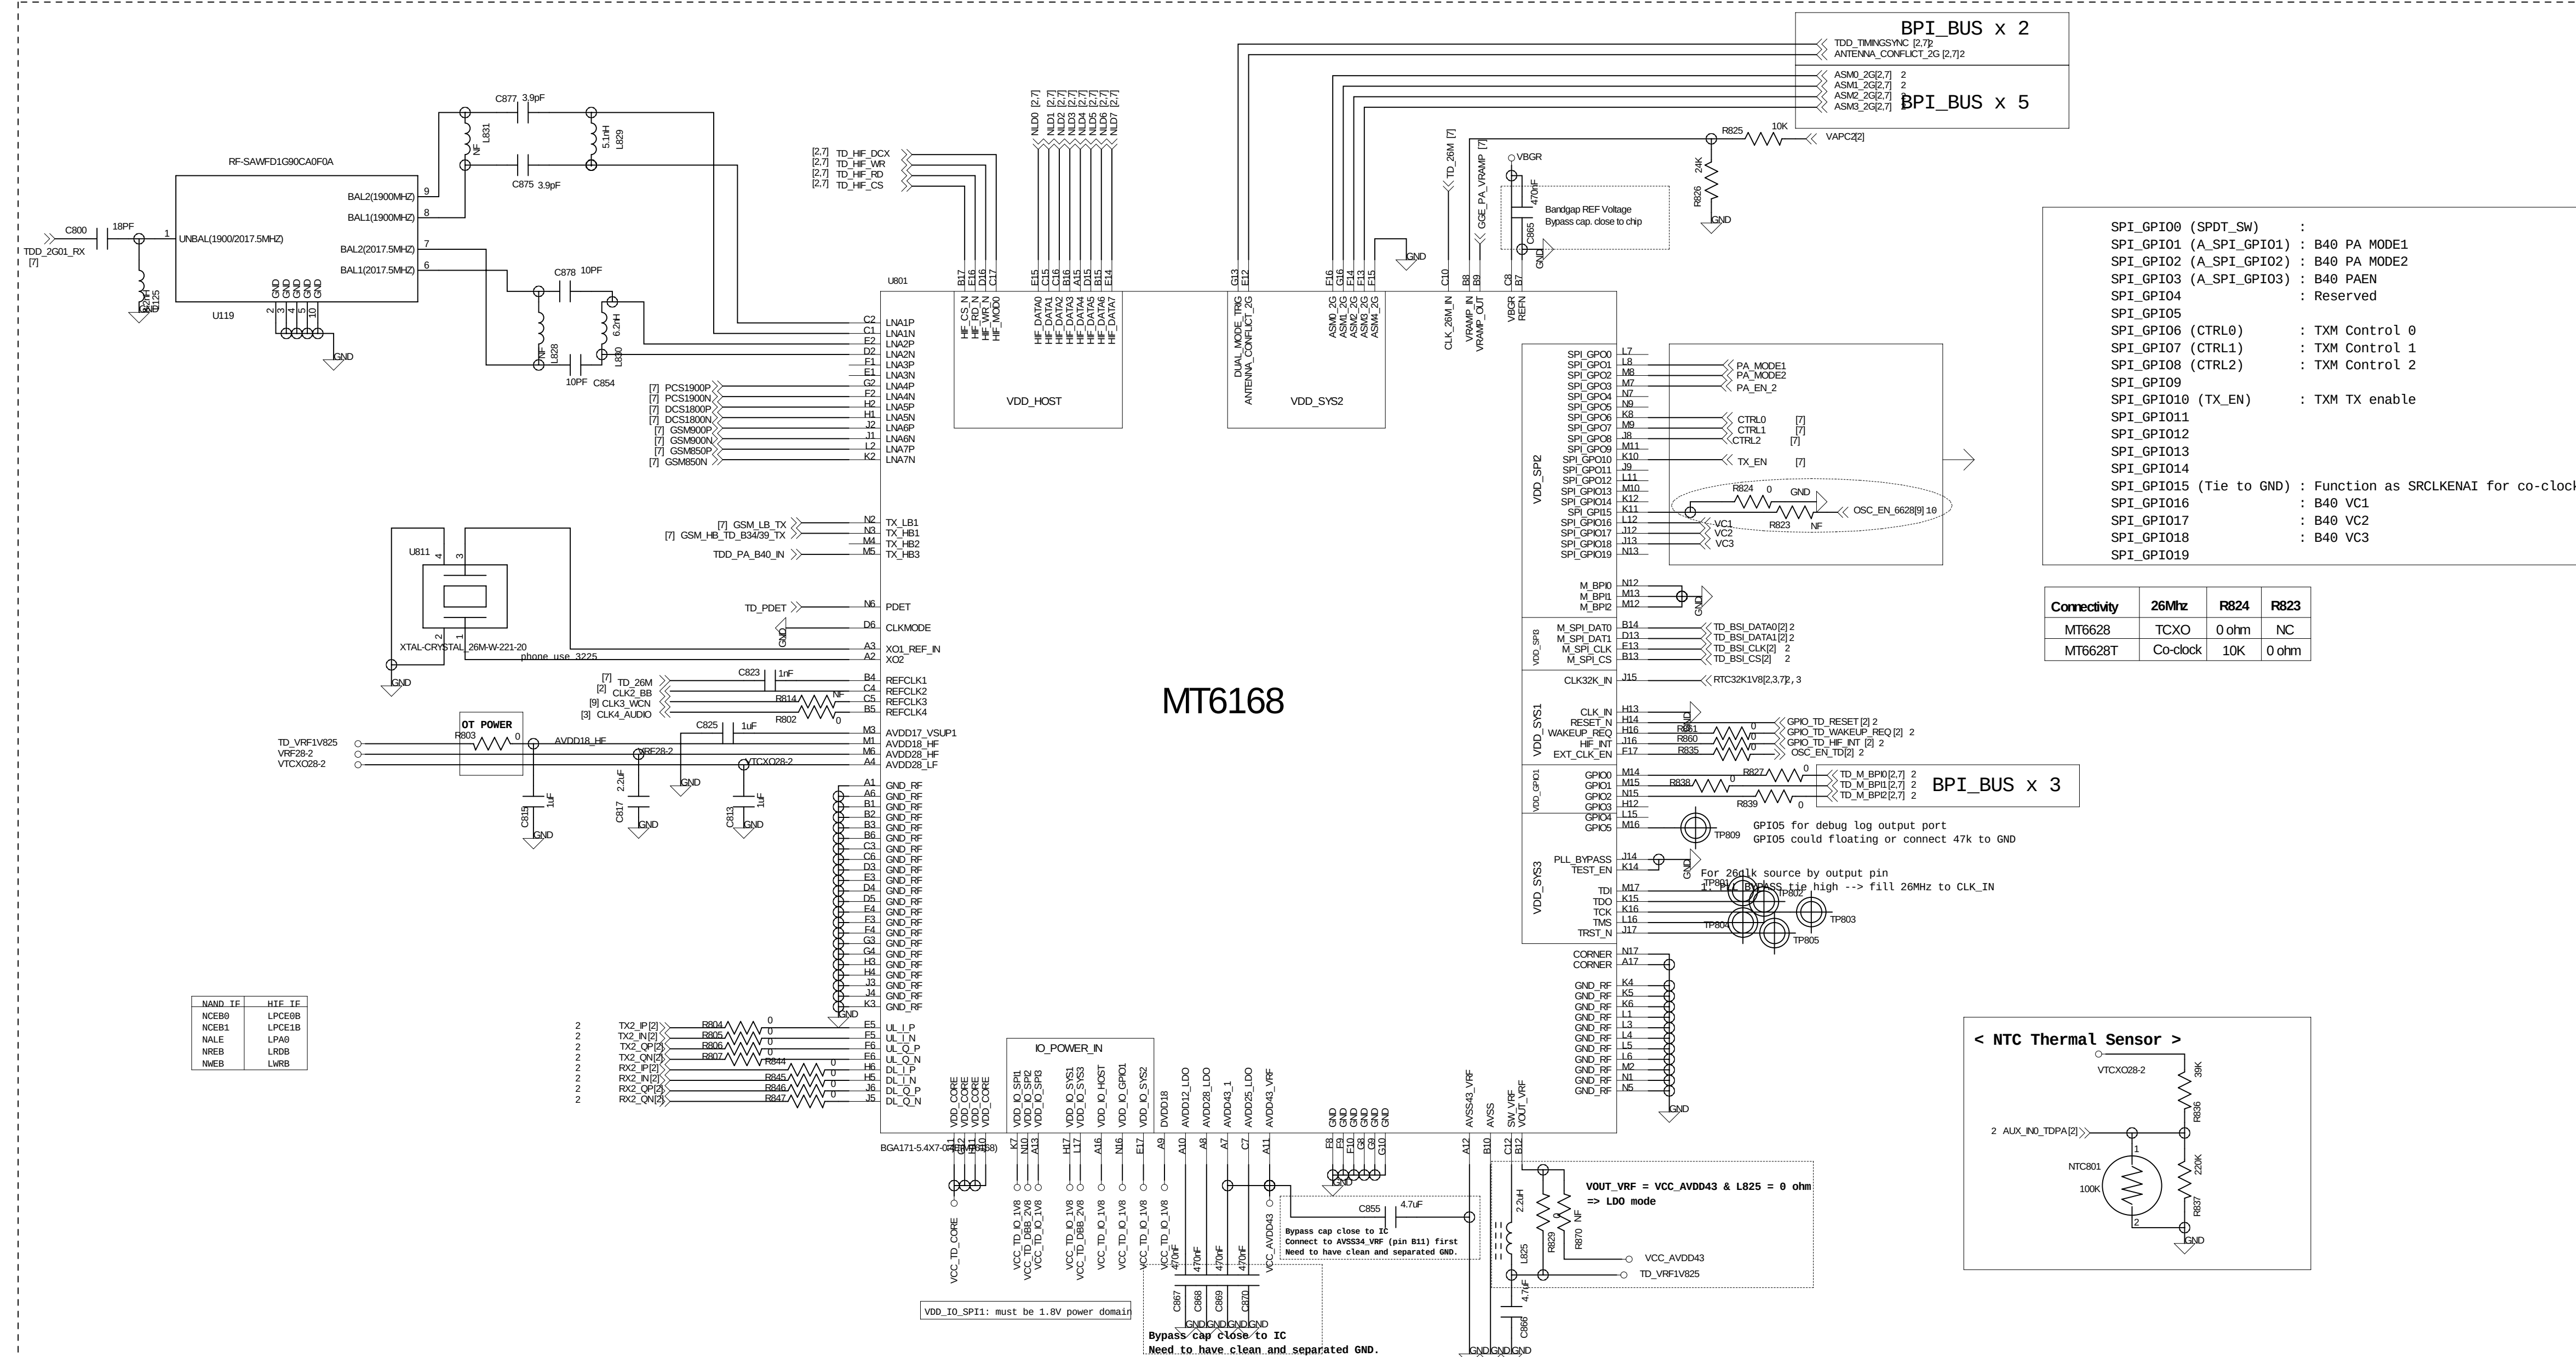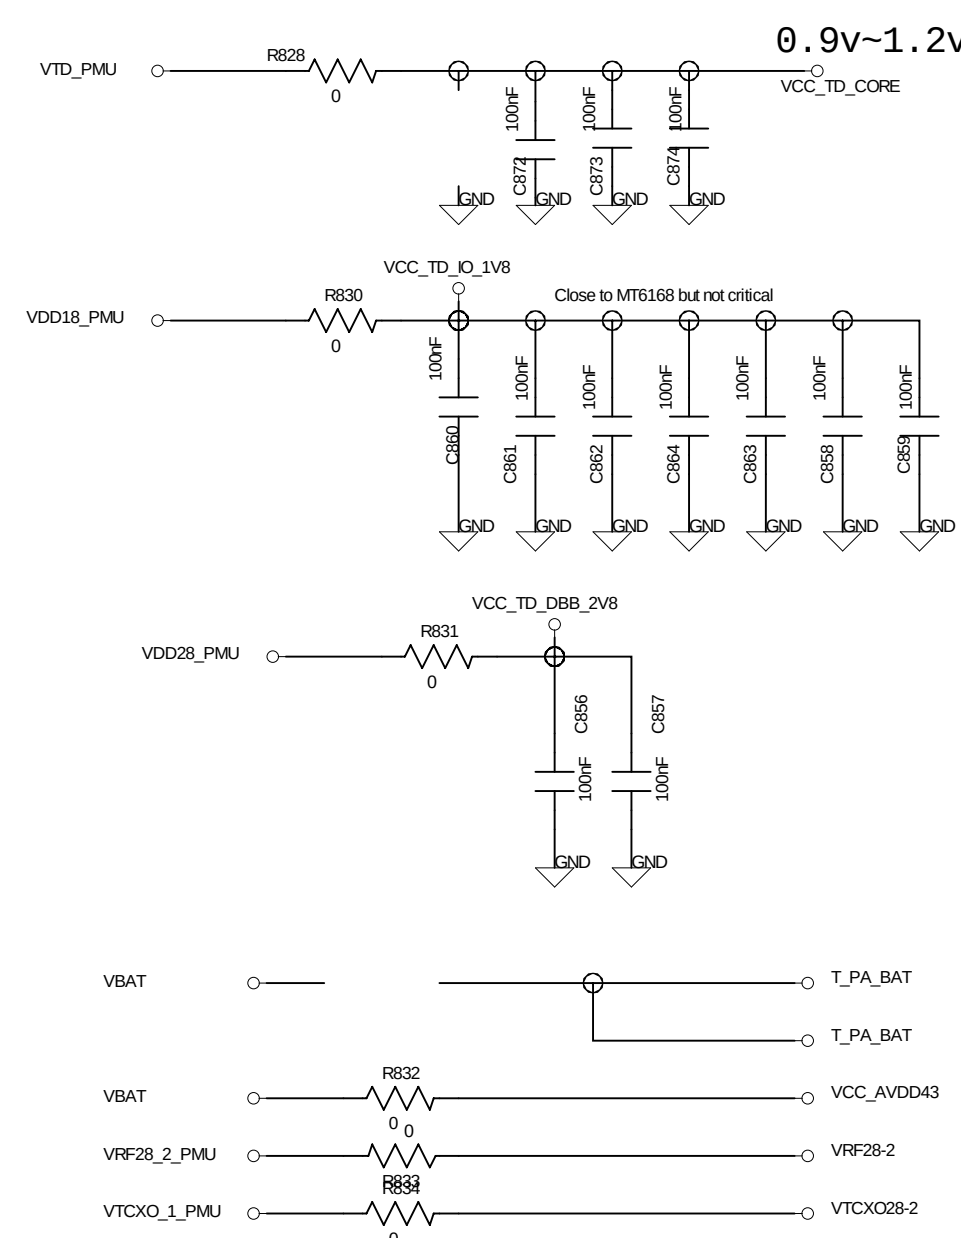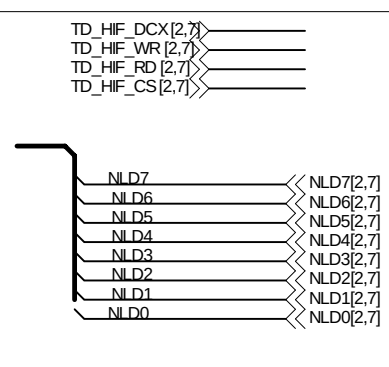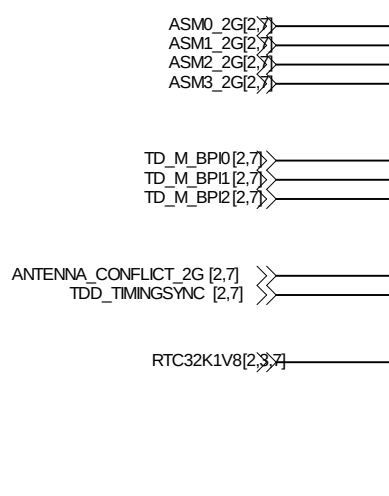

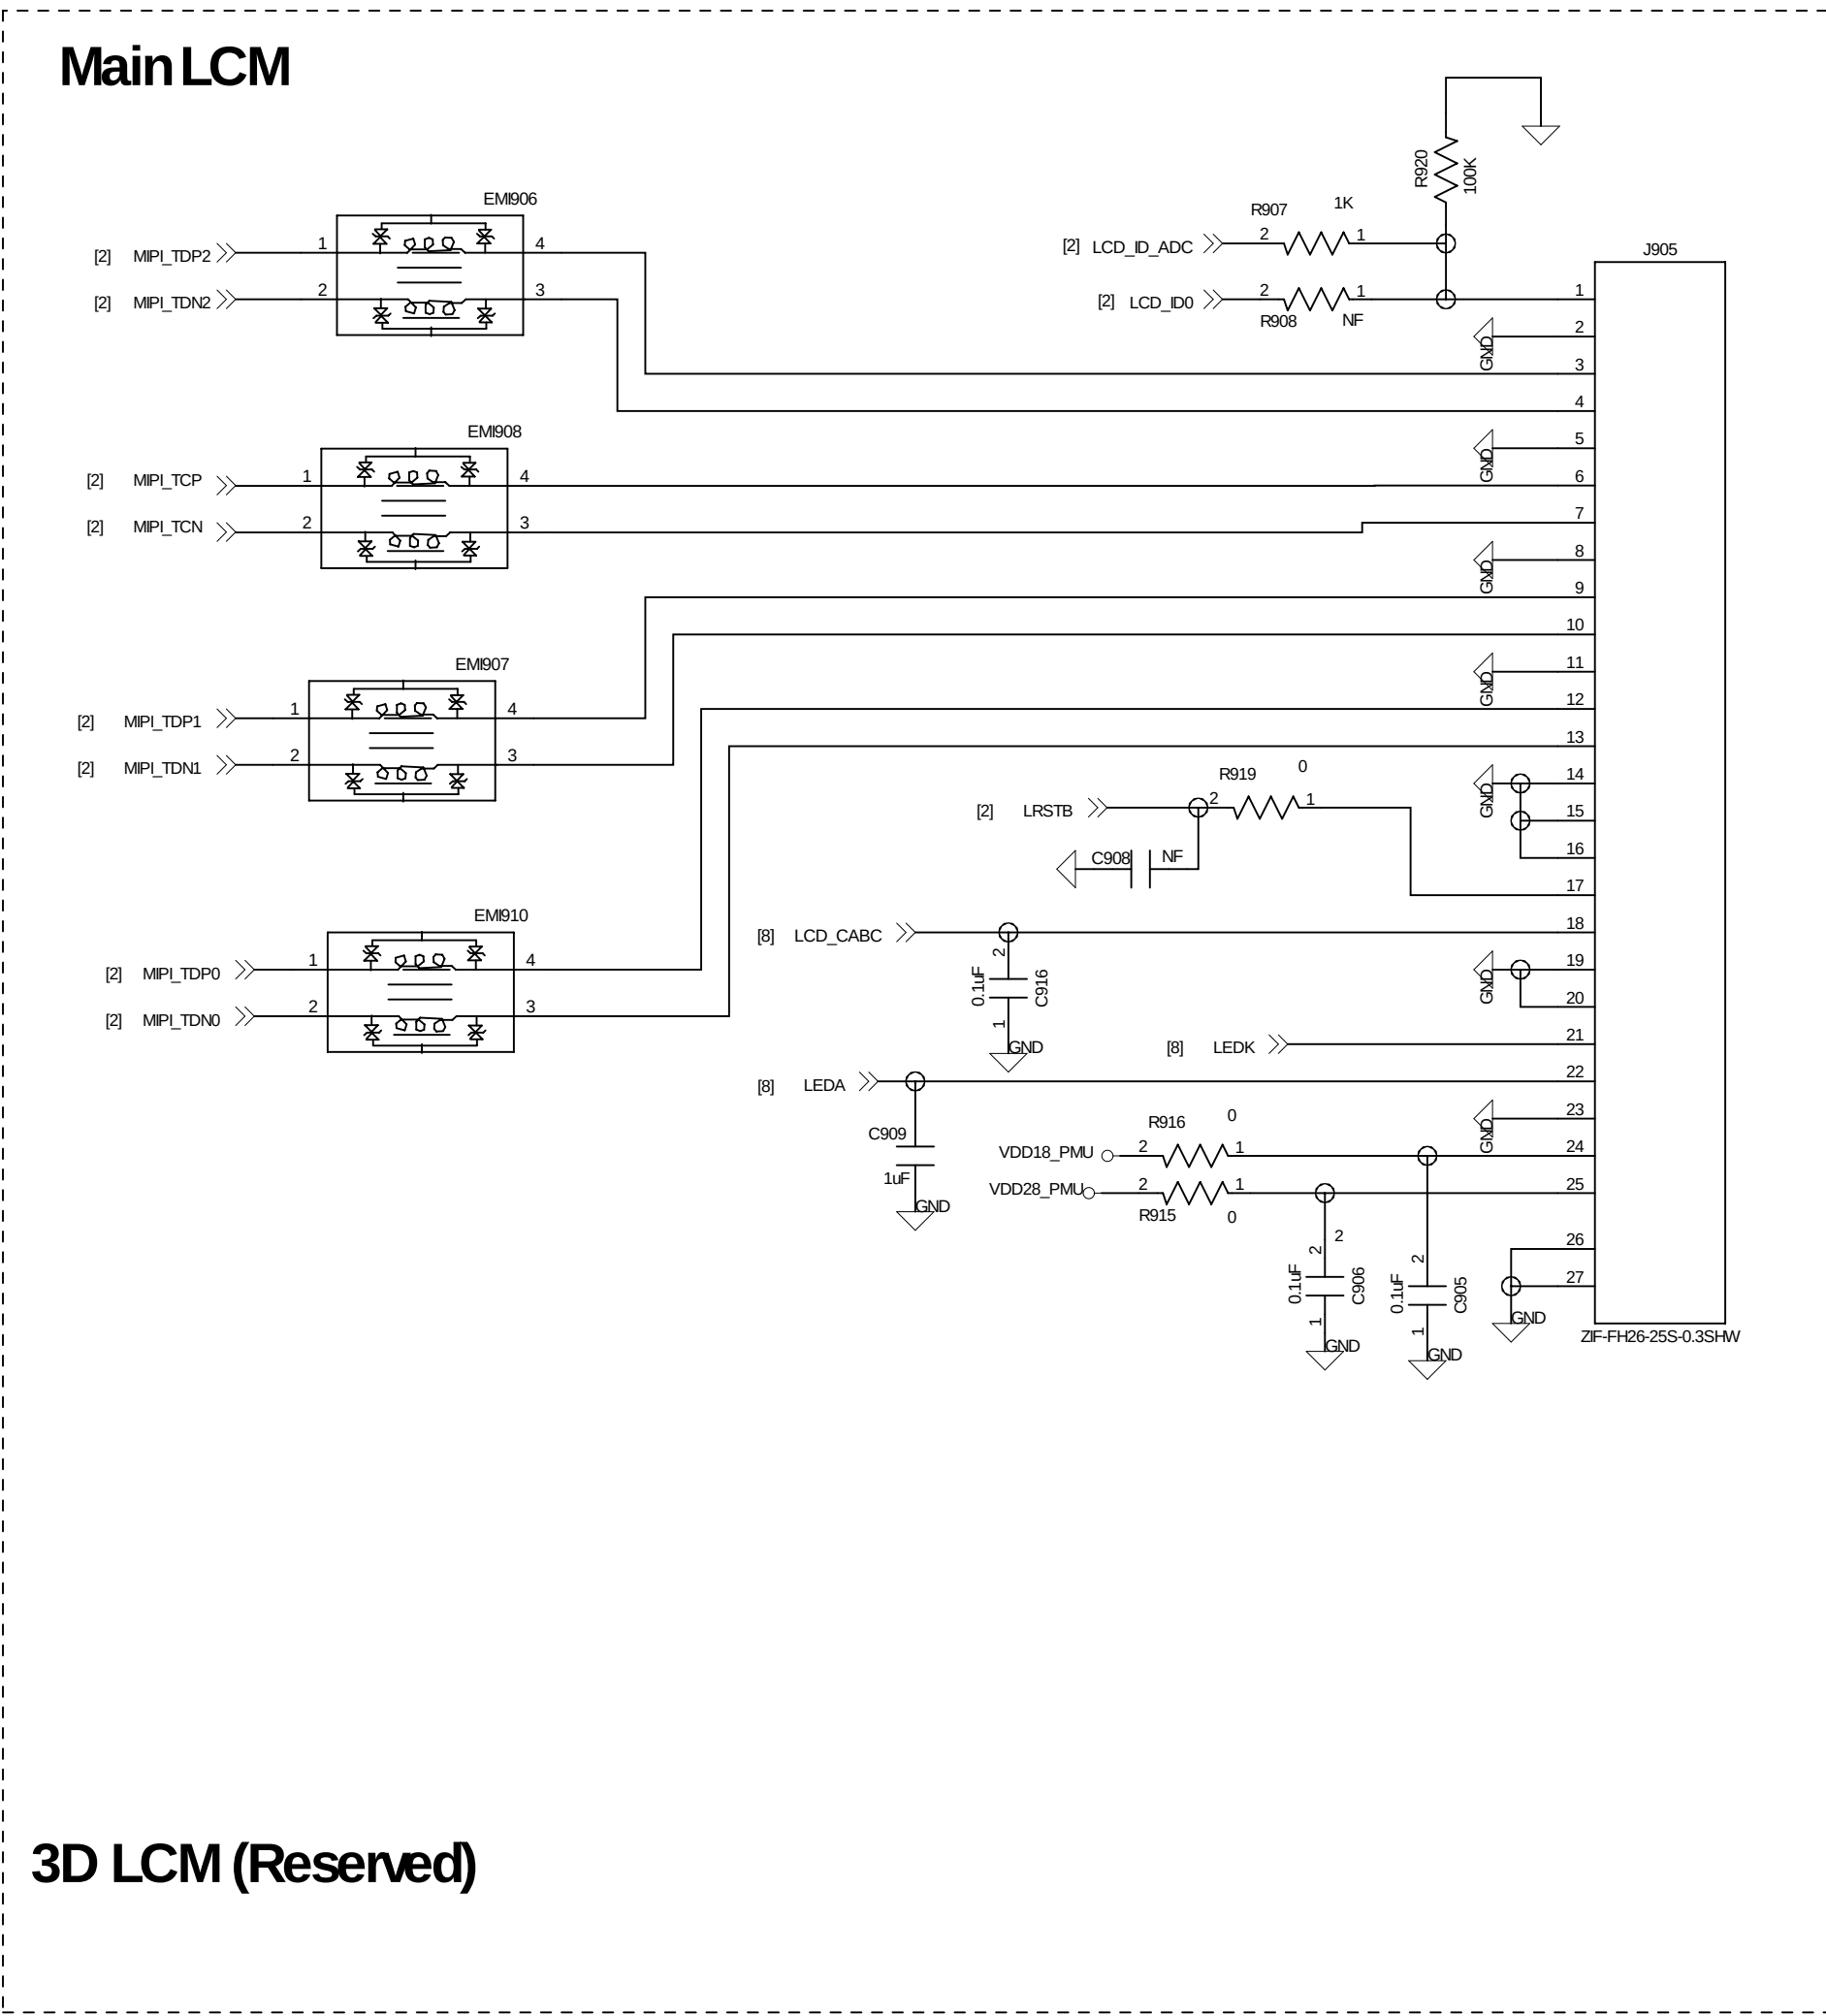

MT6628_PMU

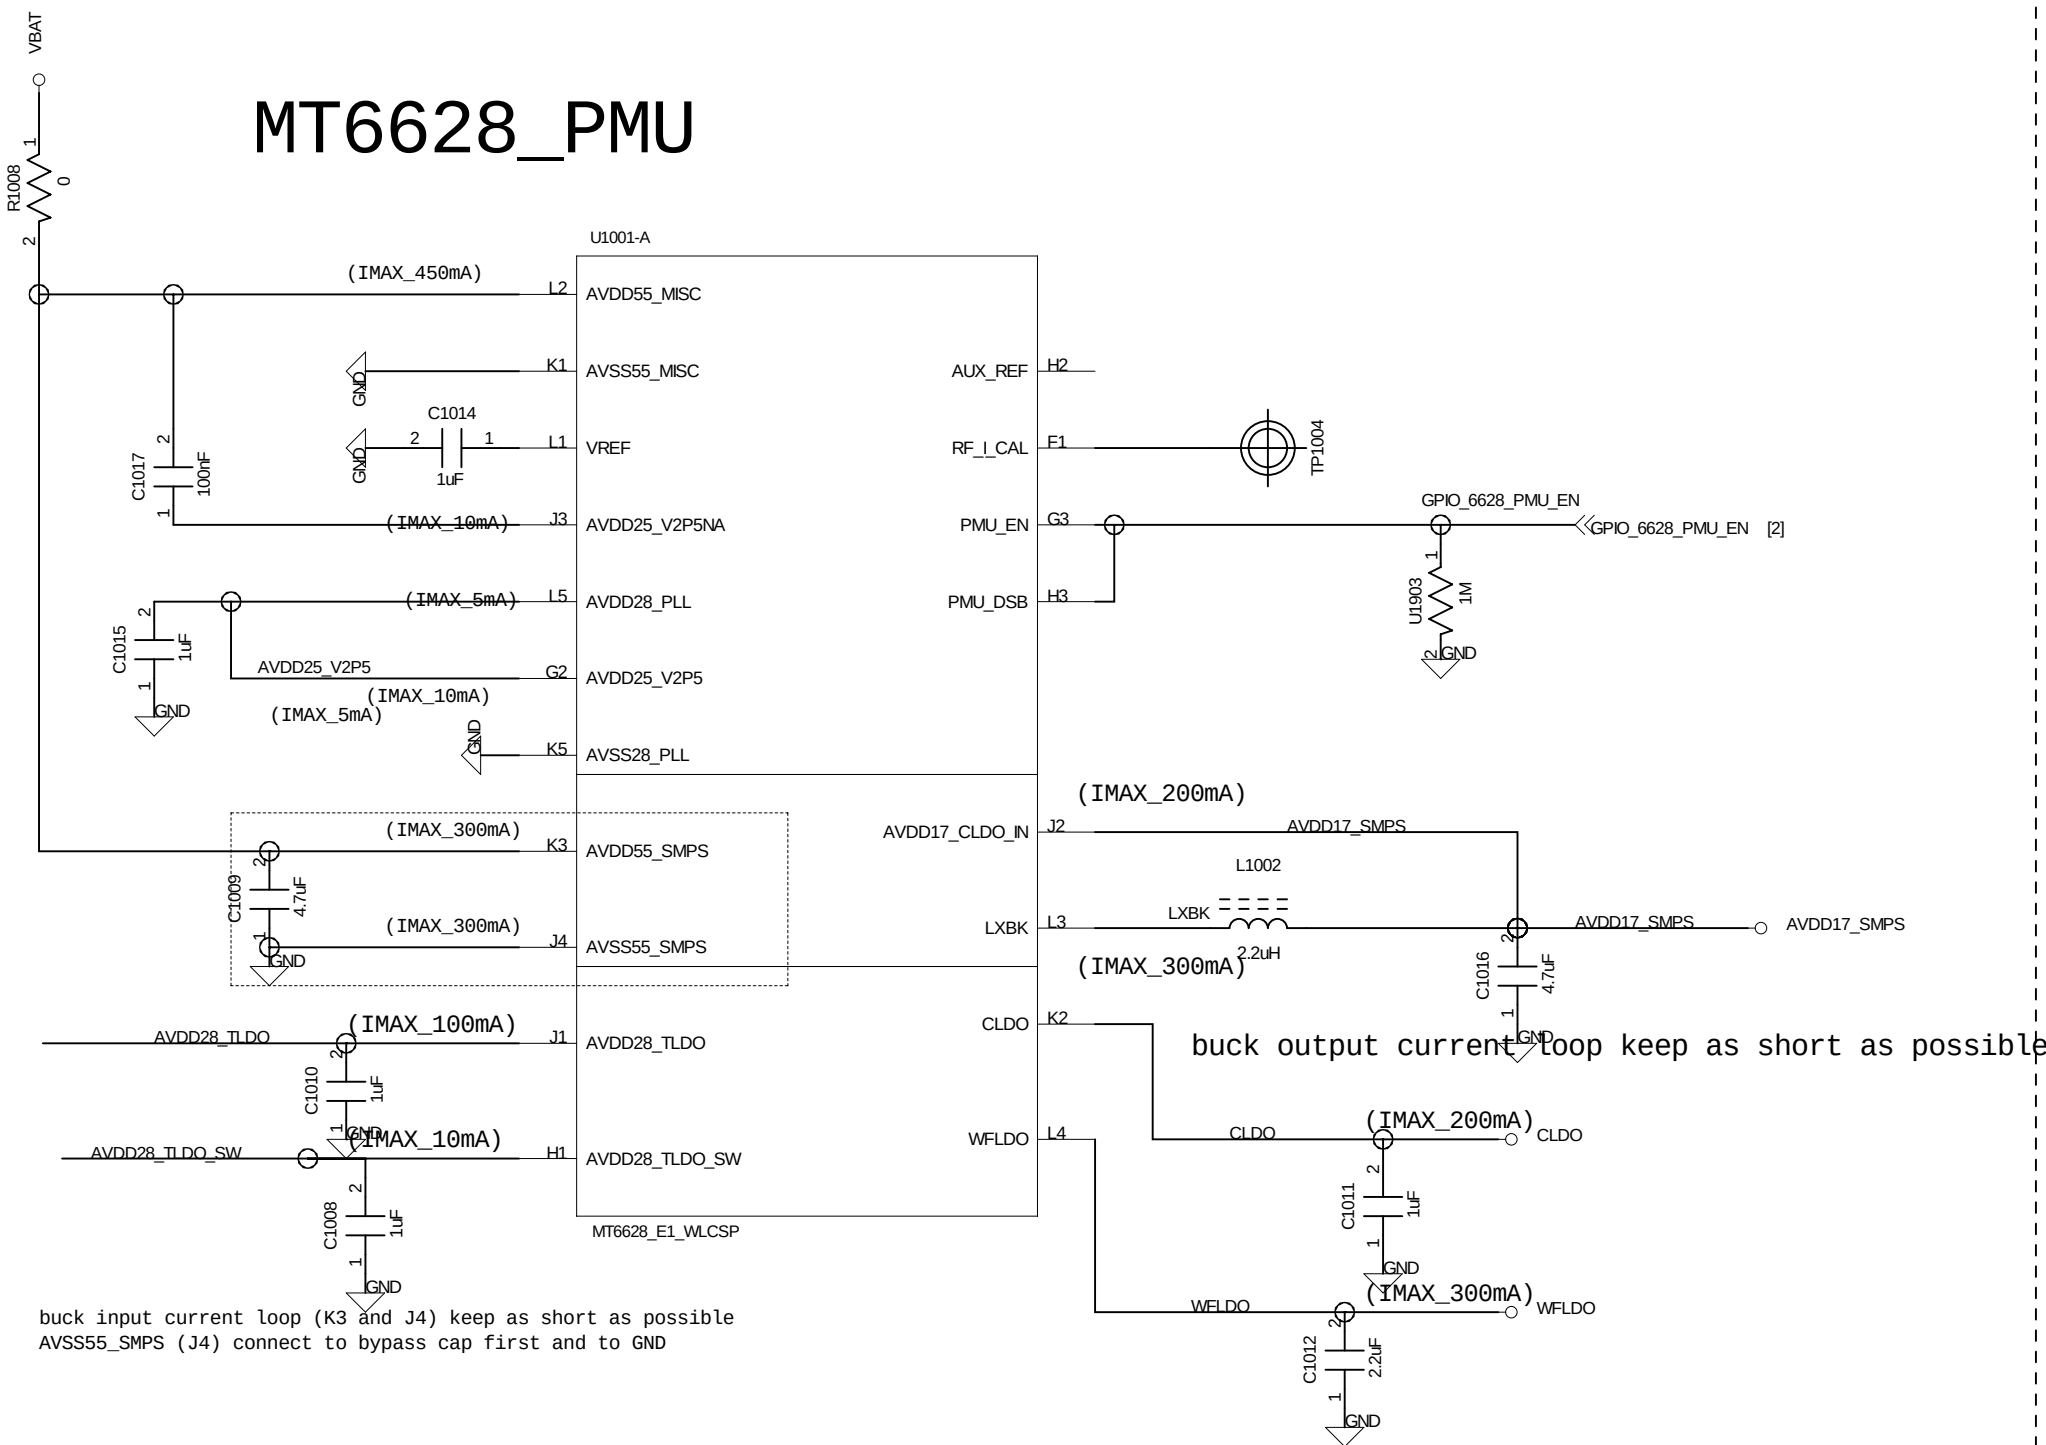

buck output current loop keep as short as possible

buck input current loop (K3 and J4) keep as short as possible

AVSS55_SMP5 (J4) connect to bypass cap first and to GND


MT6628_GPIO

WiFi_Host	0	SDIO	
ANTSEL-2	1	SPI	

Xtal/OCS	00	TCX0	
ANTSEL-1 (b'0)	01	Xtal	
	10	EXTCK	
	11	RESERVED	


BT/COM Host	0	UART	MT6628E2
UART_RTS	1	SDIO	MT6628E2

BT/COM Host	0	SDIO	MT6628E1
ANTSEL-0	1	UART	MT6628E1

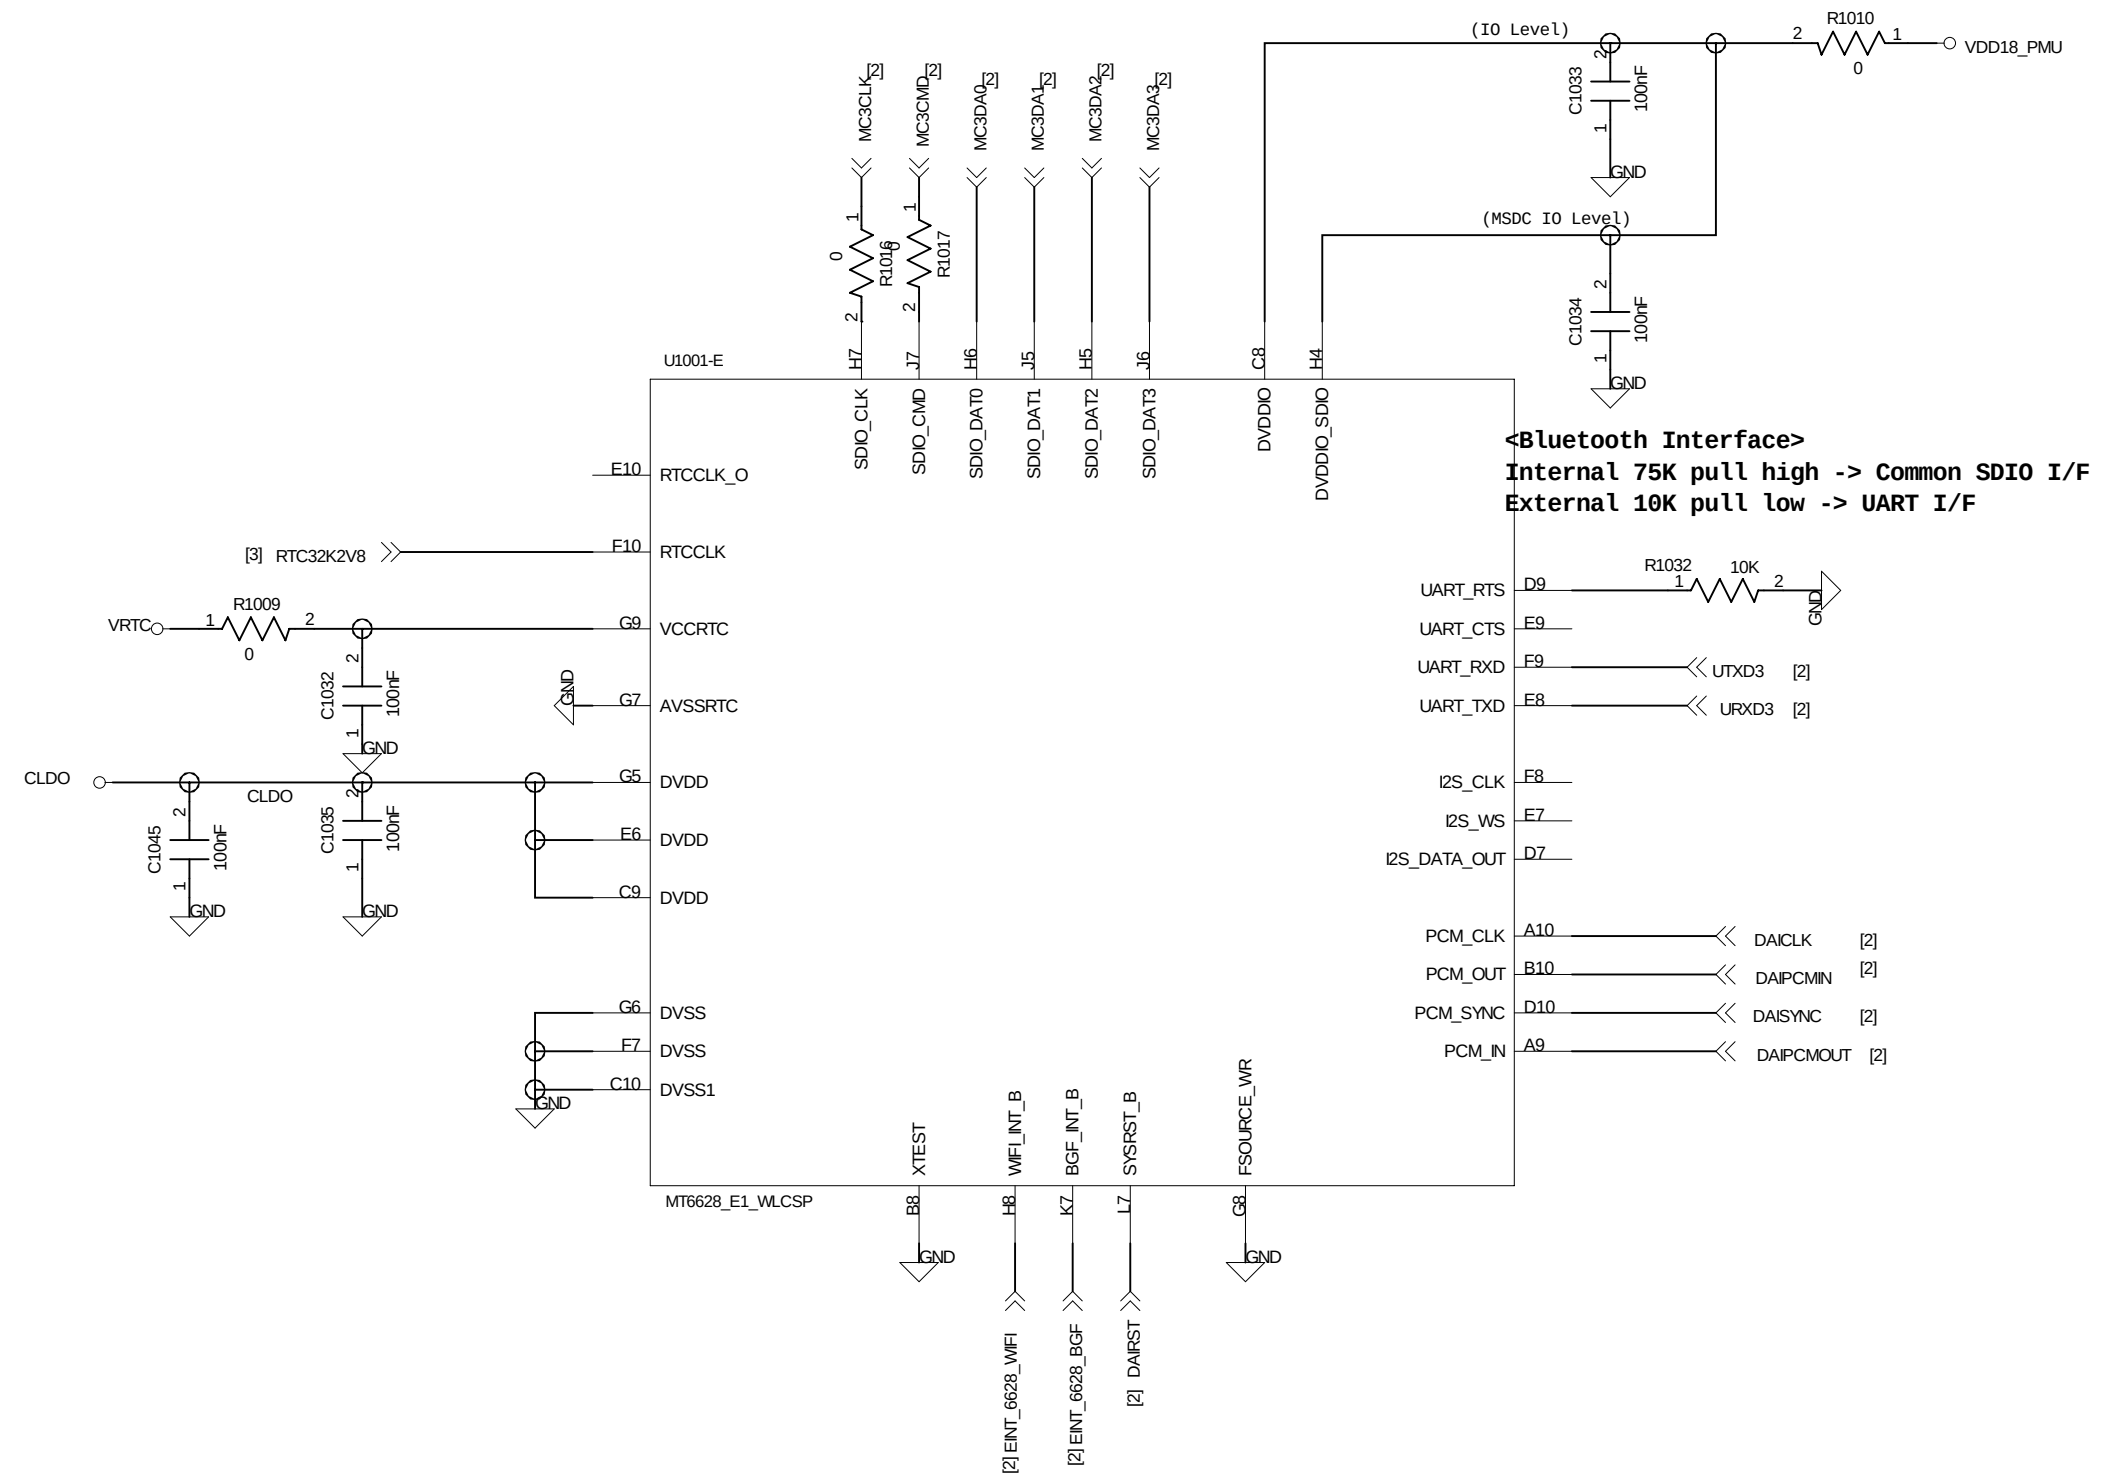





MT6628_BT/WiFi


WiFi/BT/GPS Single ANT Ref.

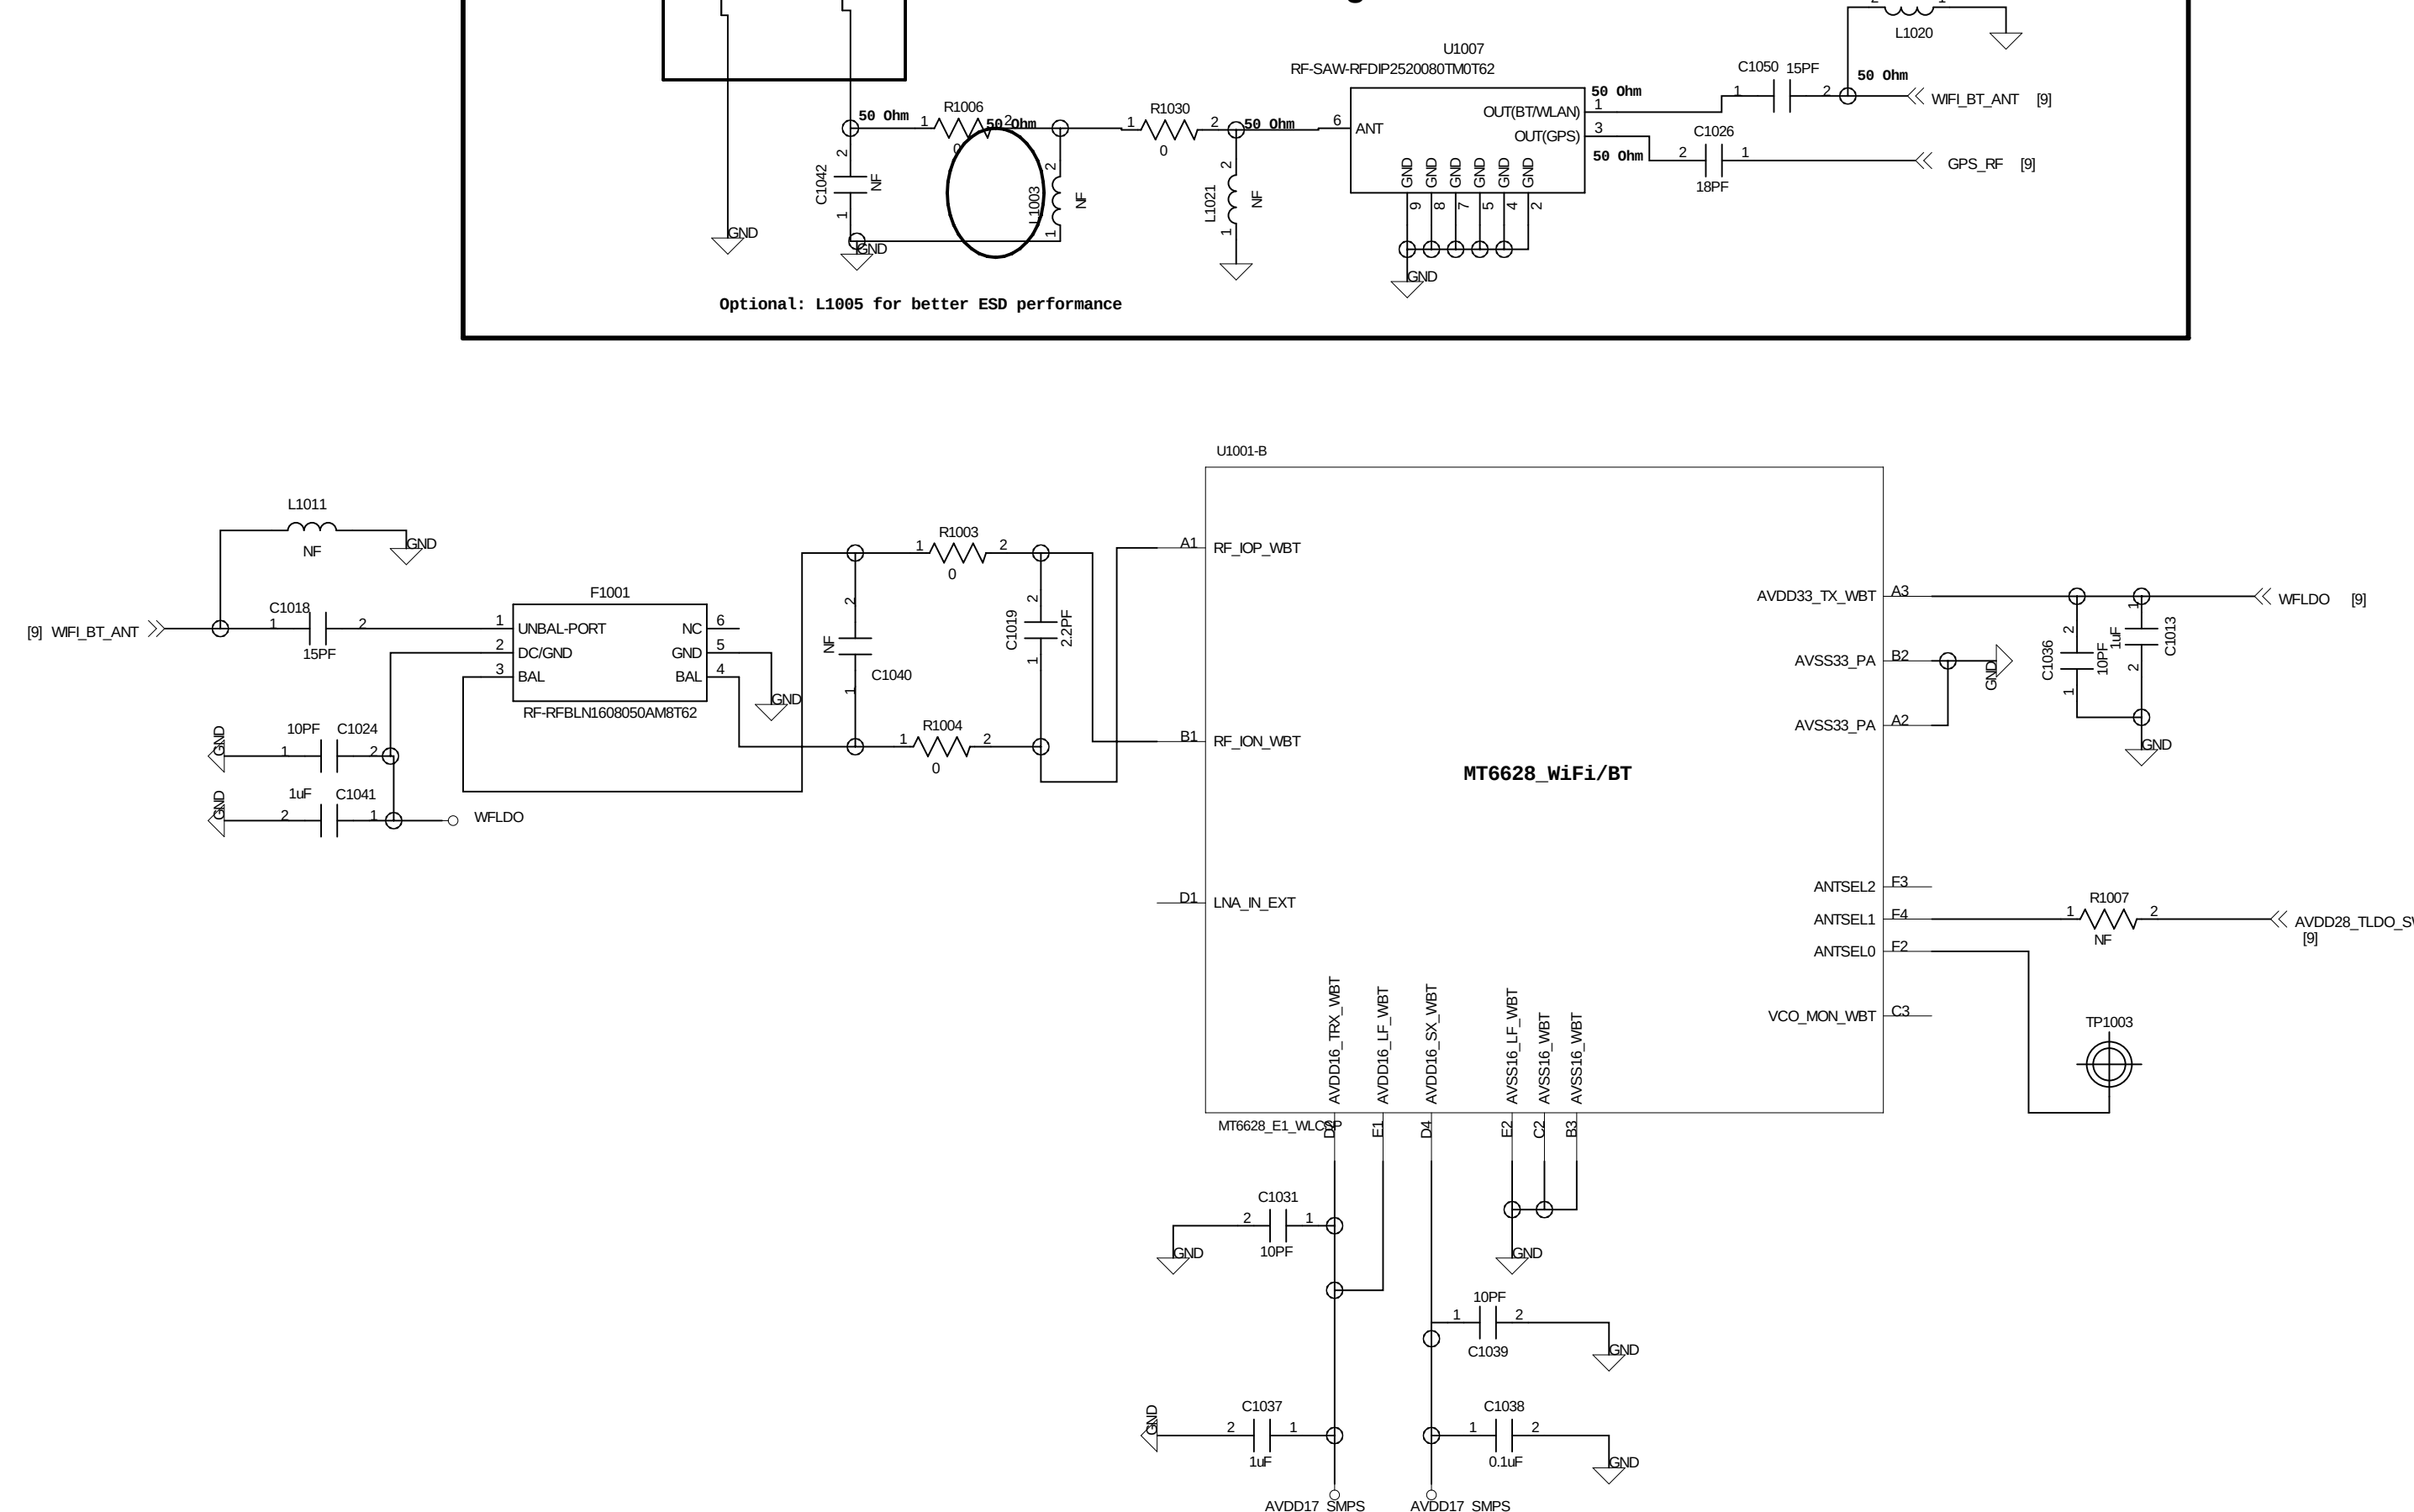



MT6628_GPS / FM

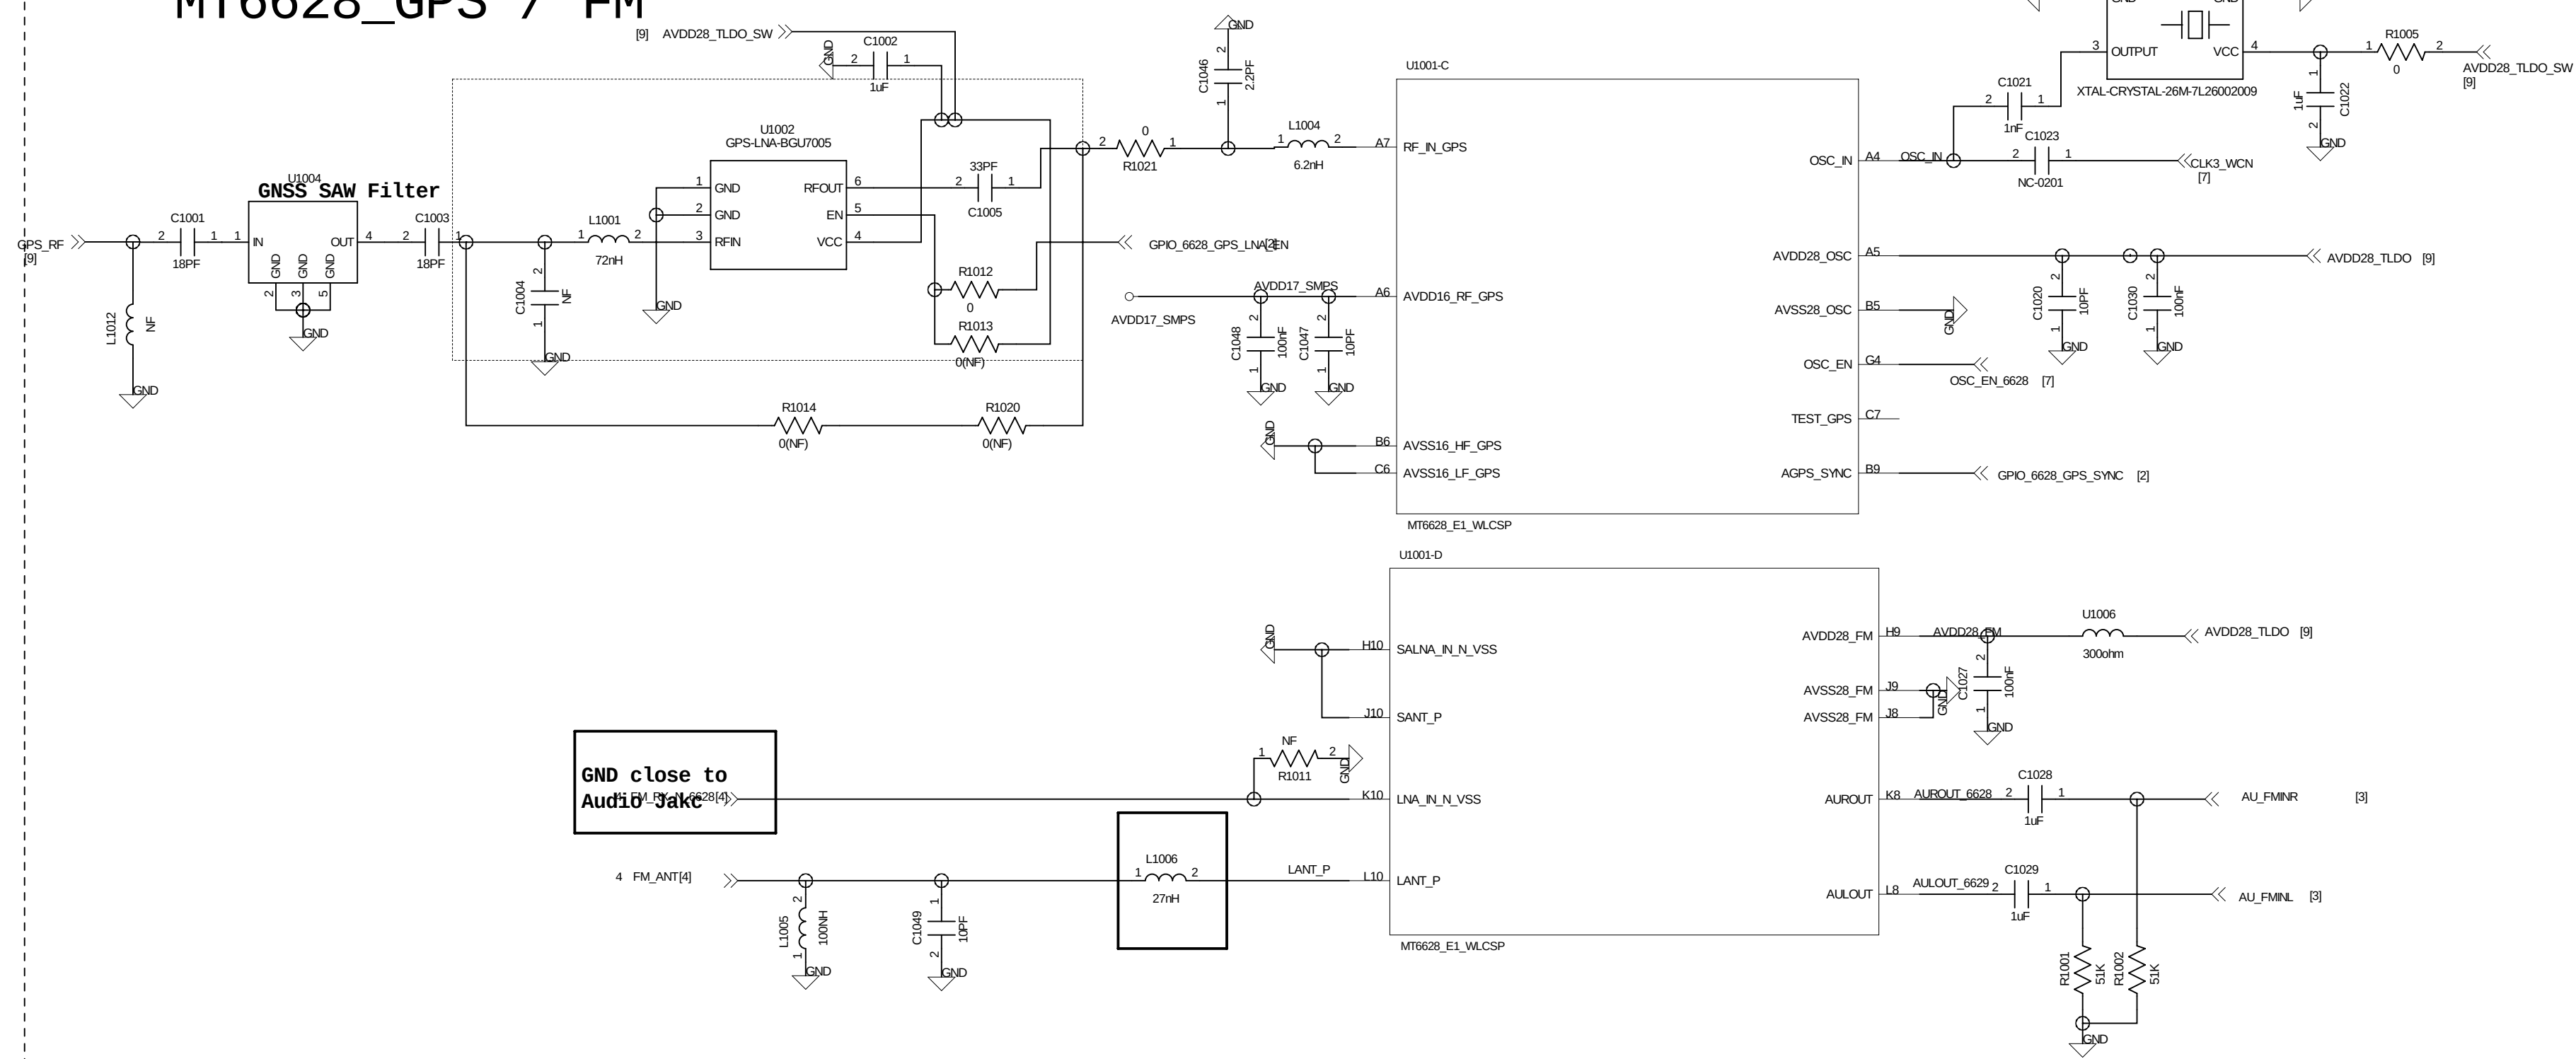

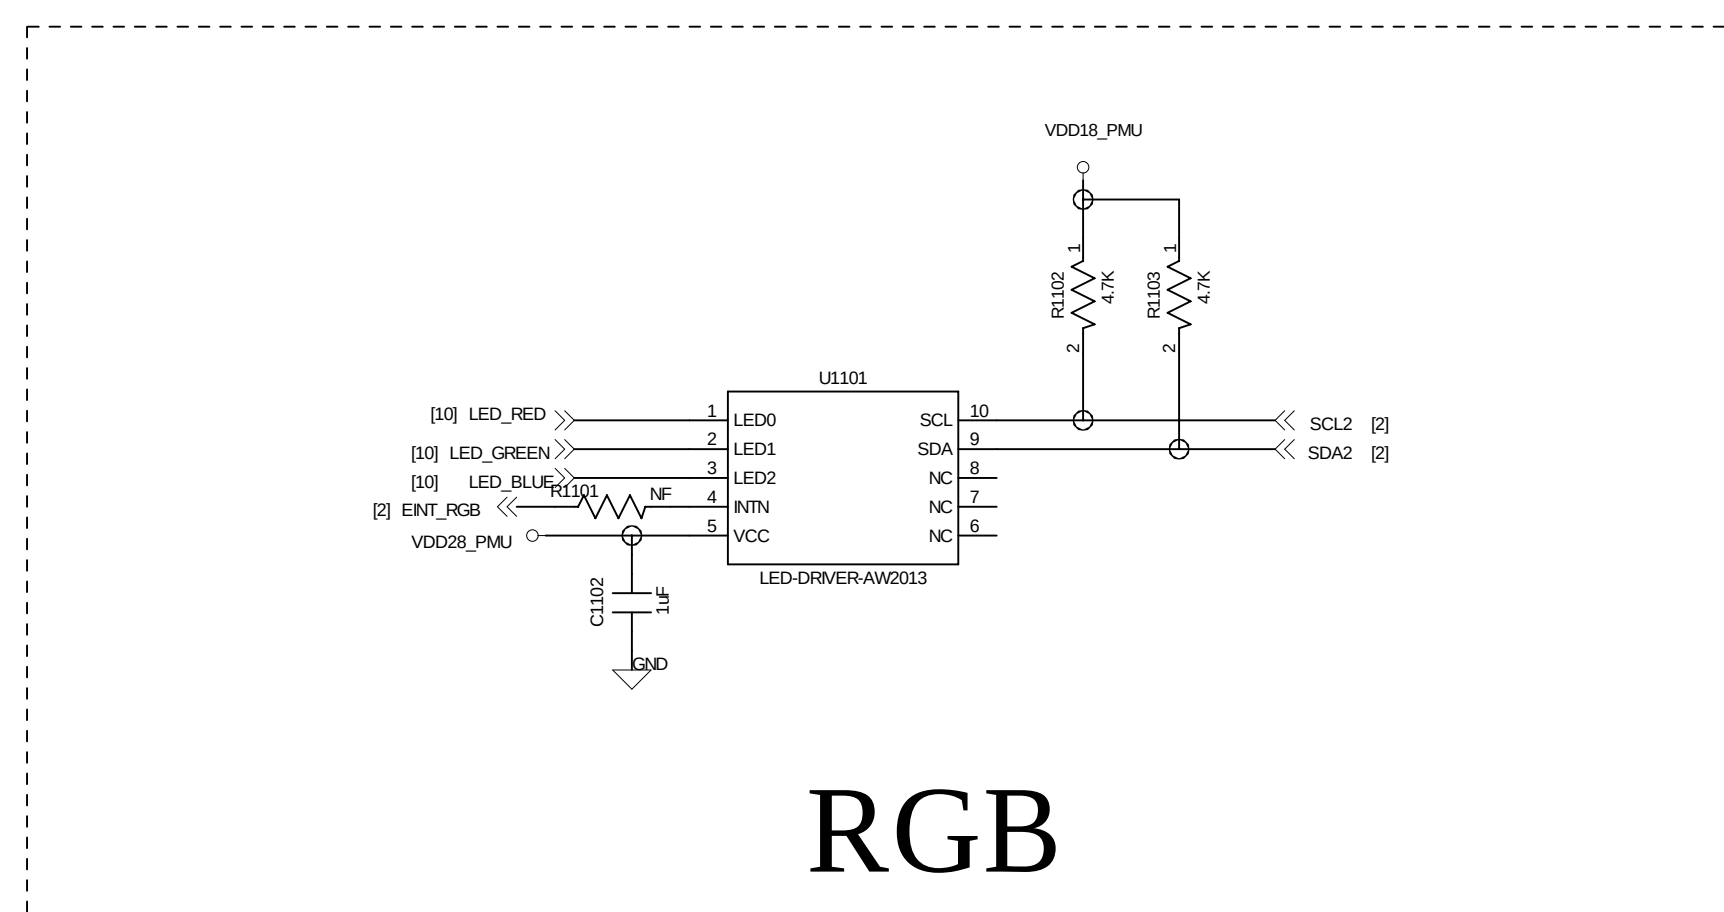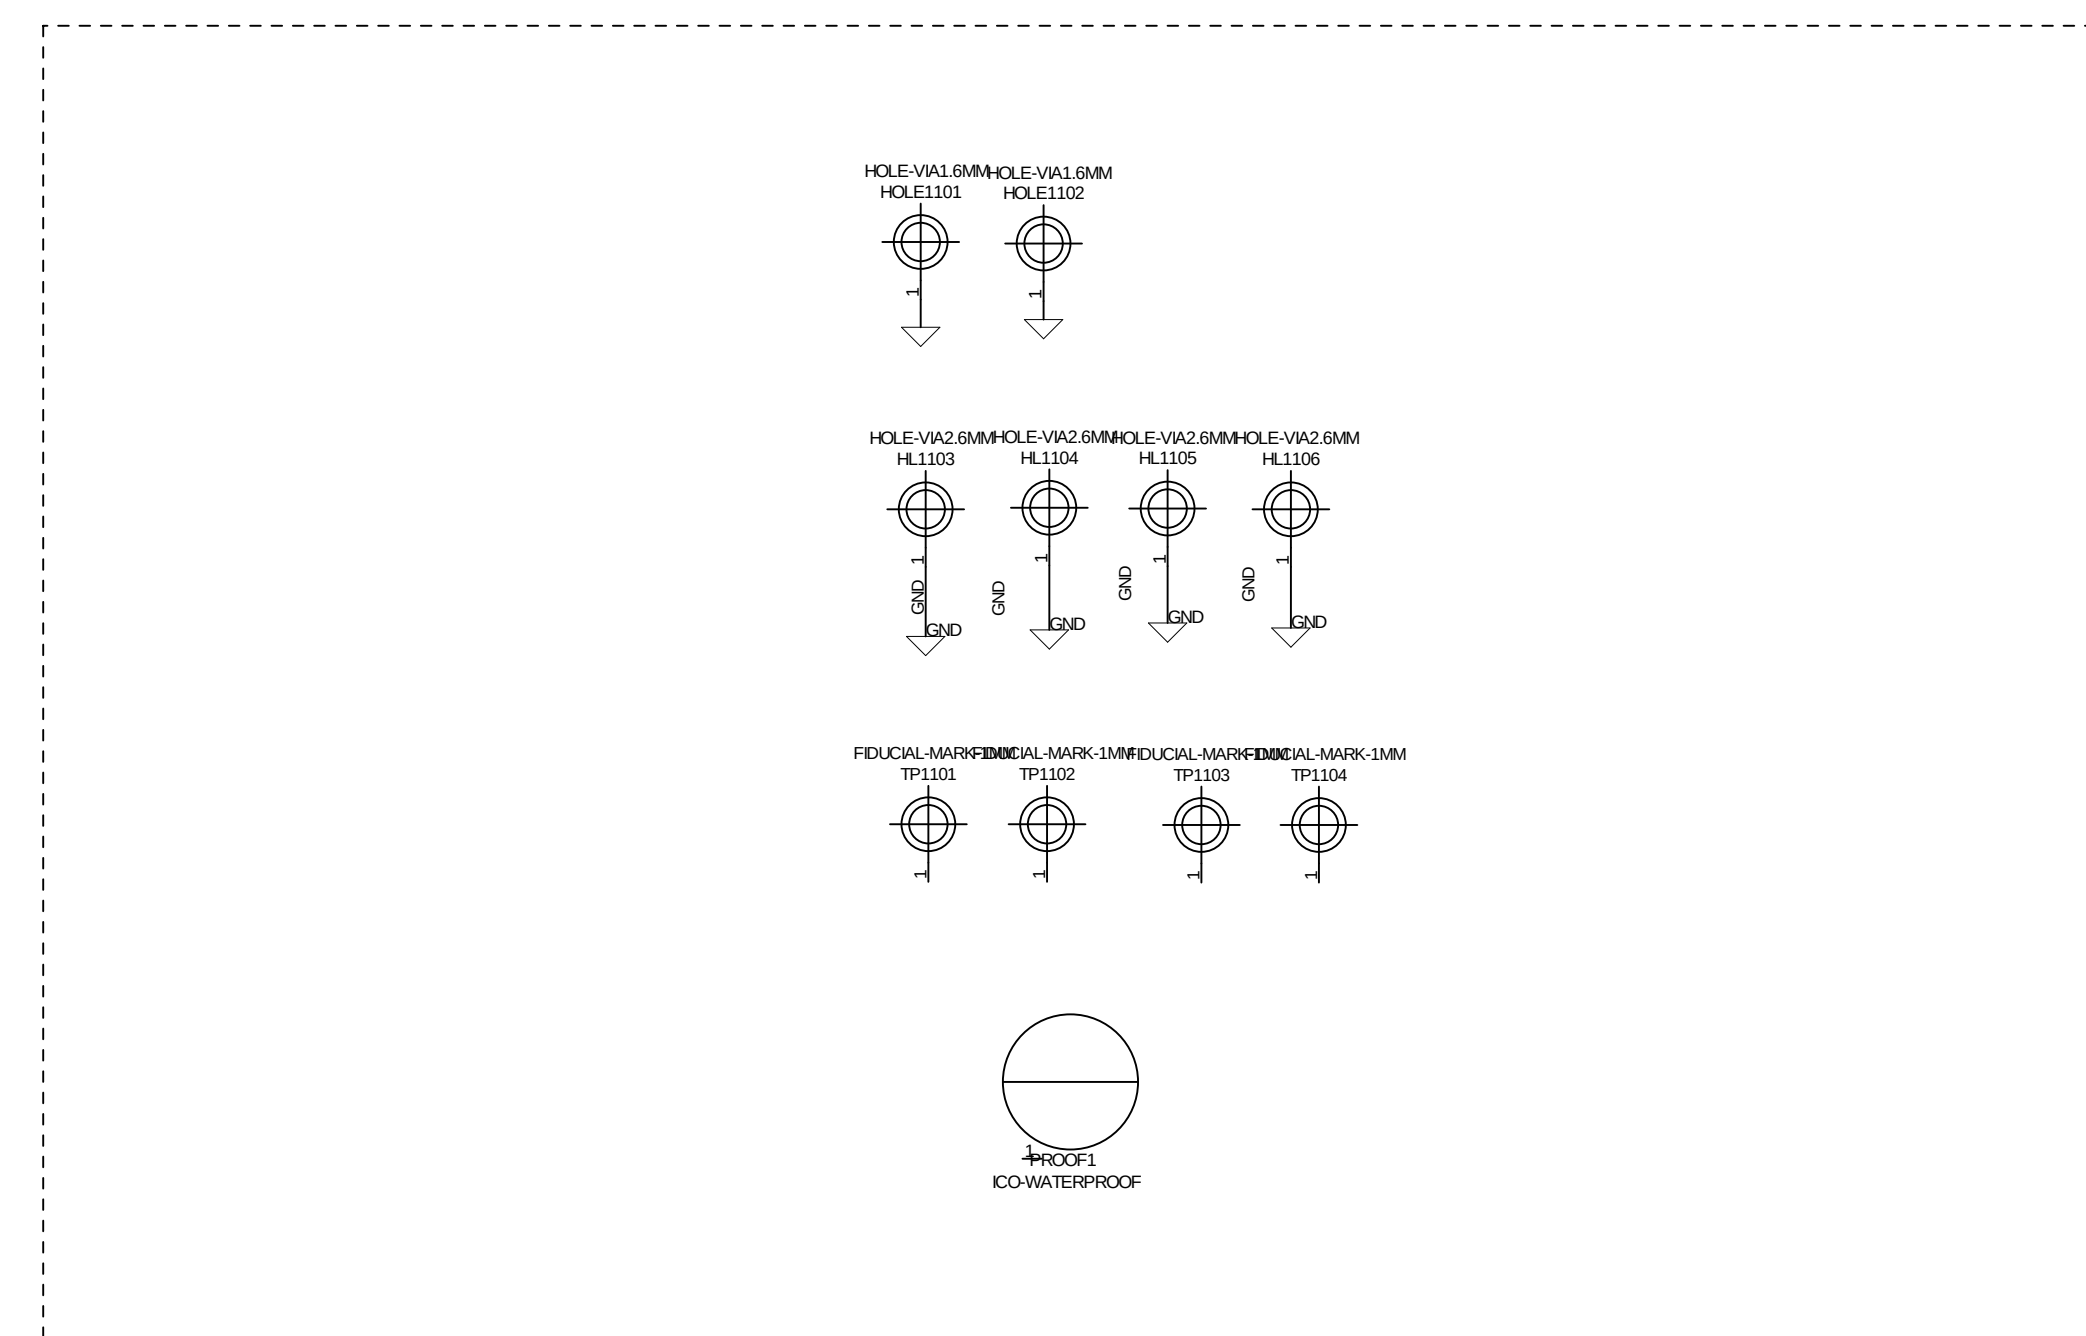
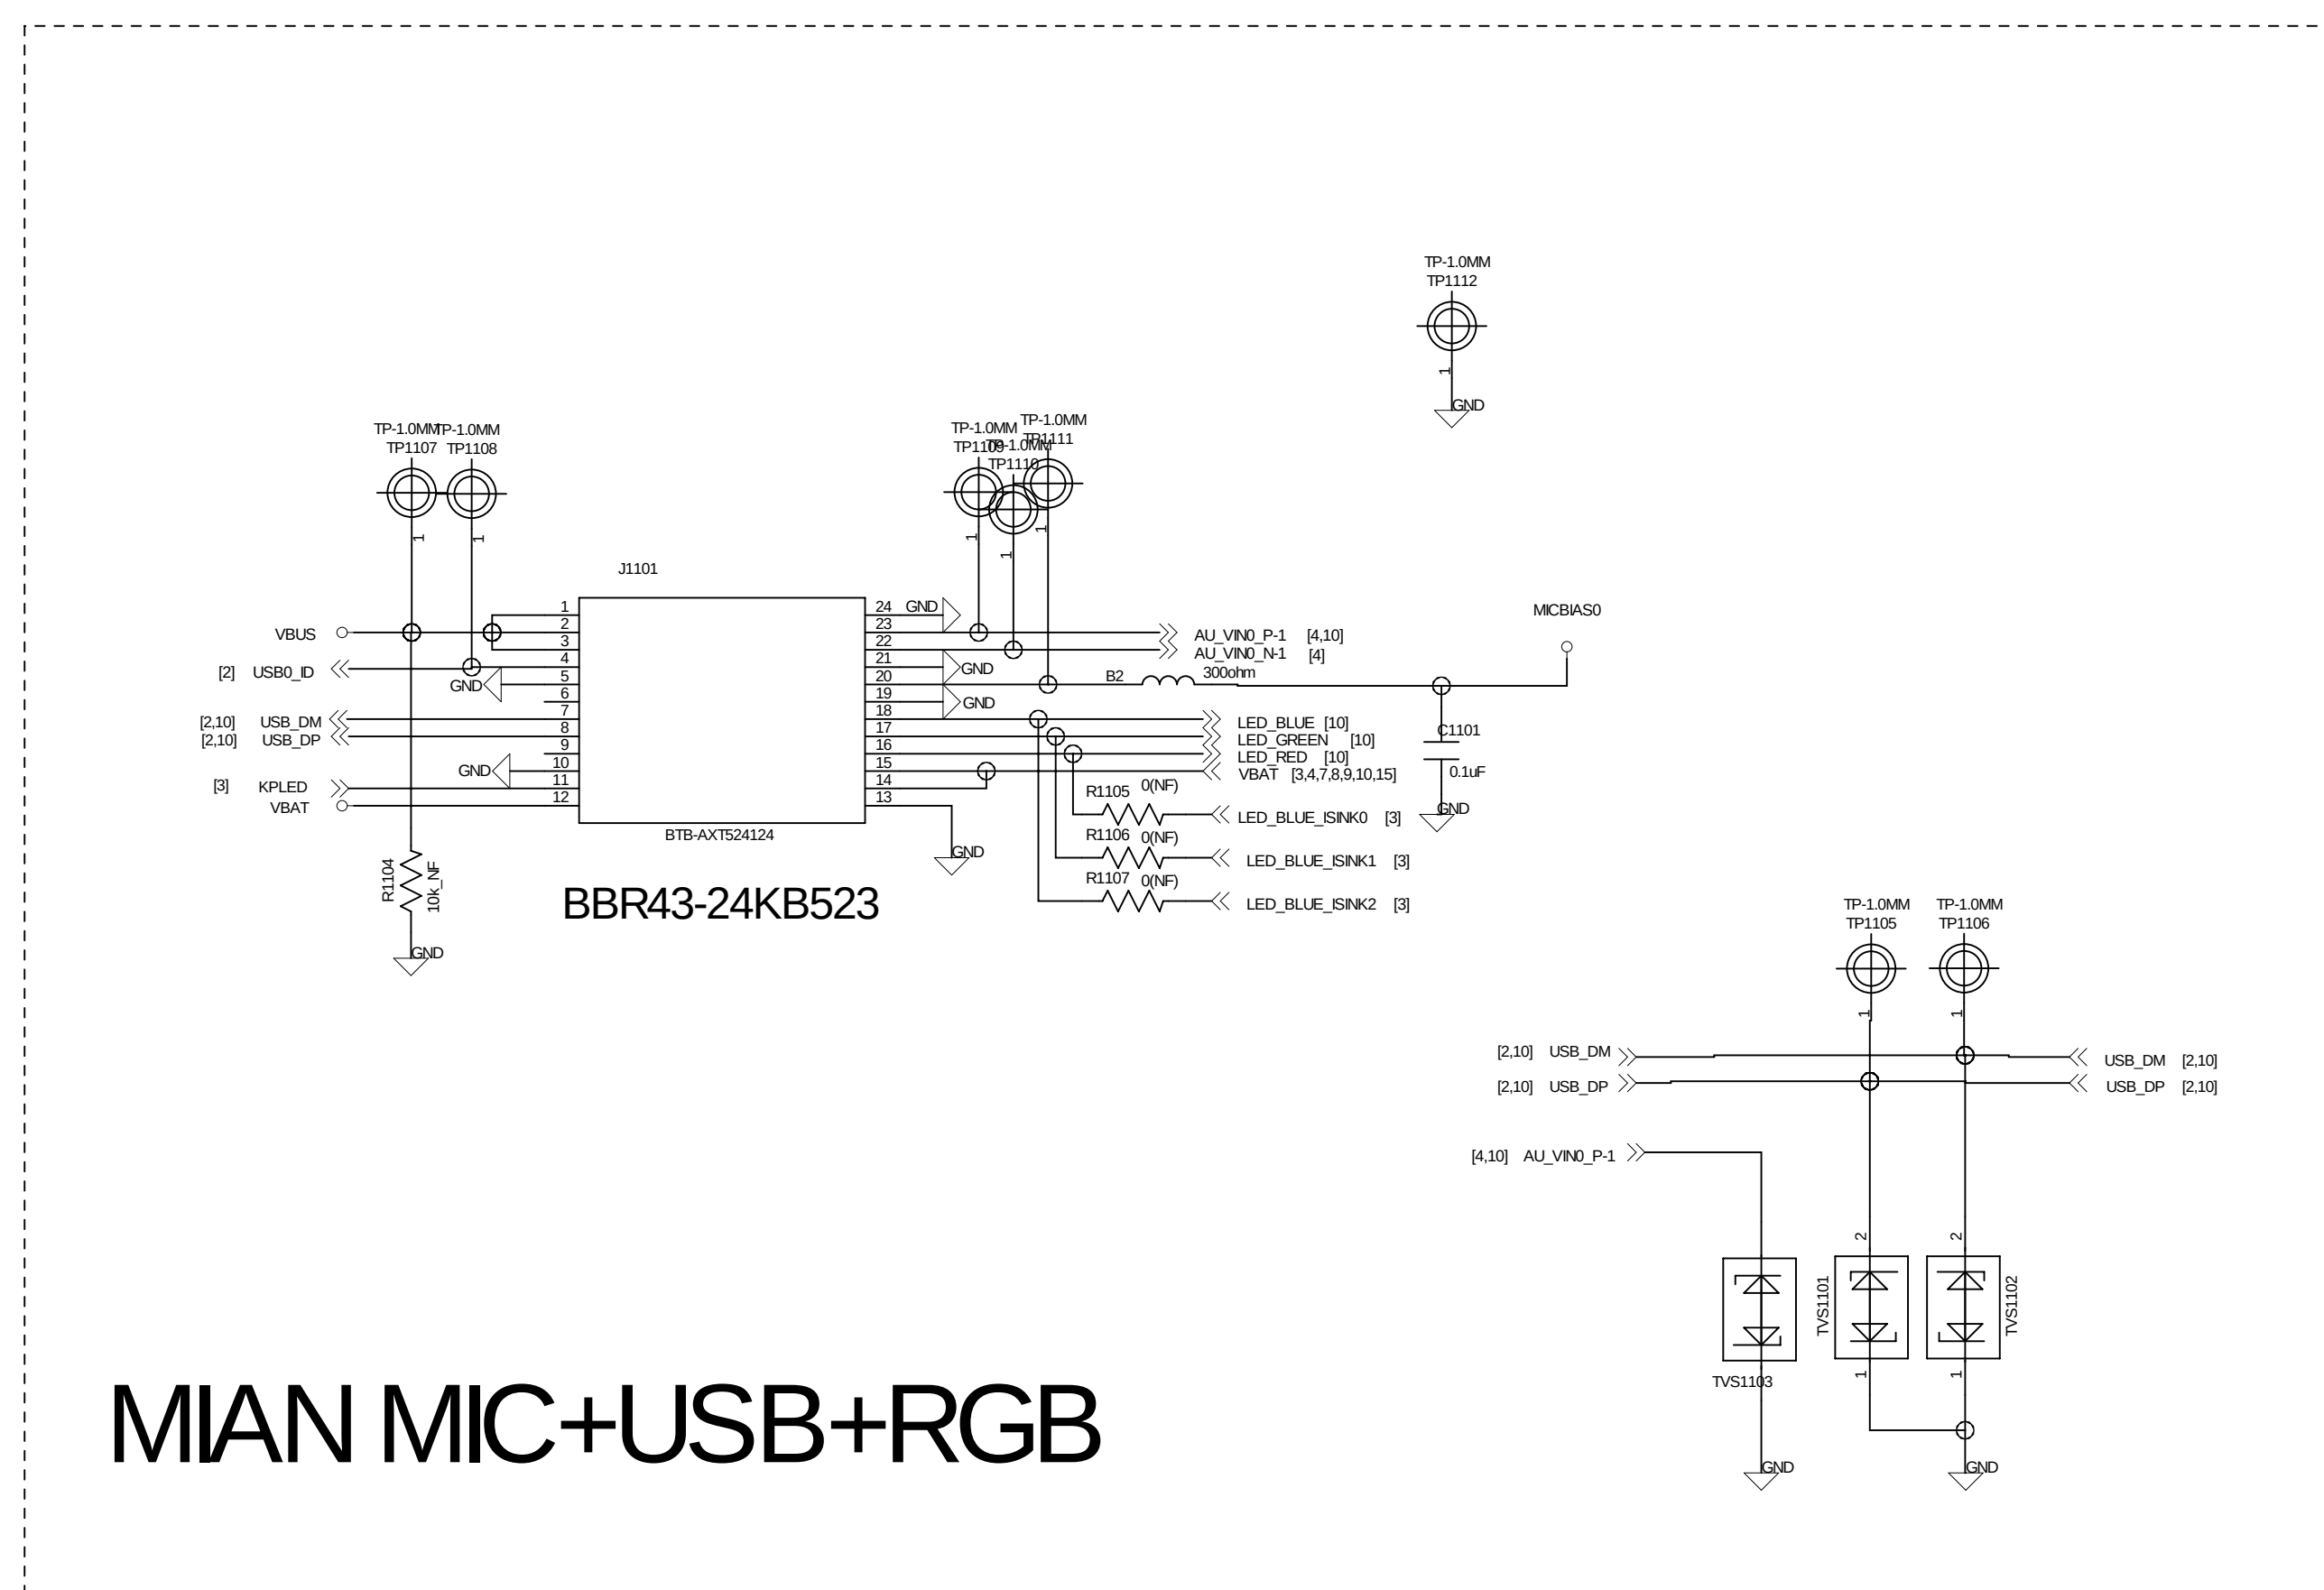


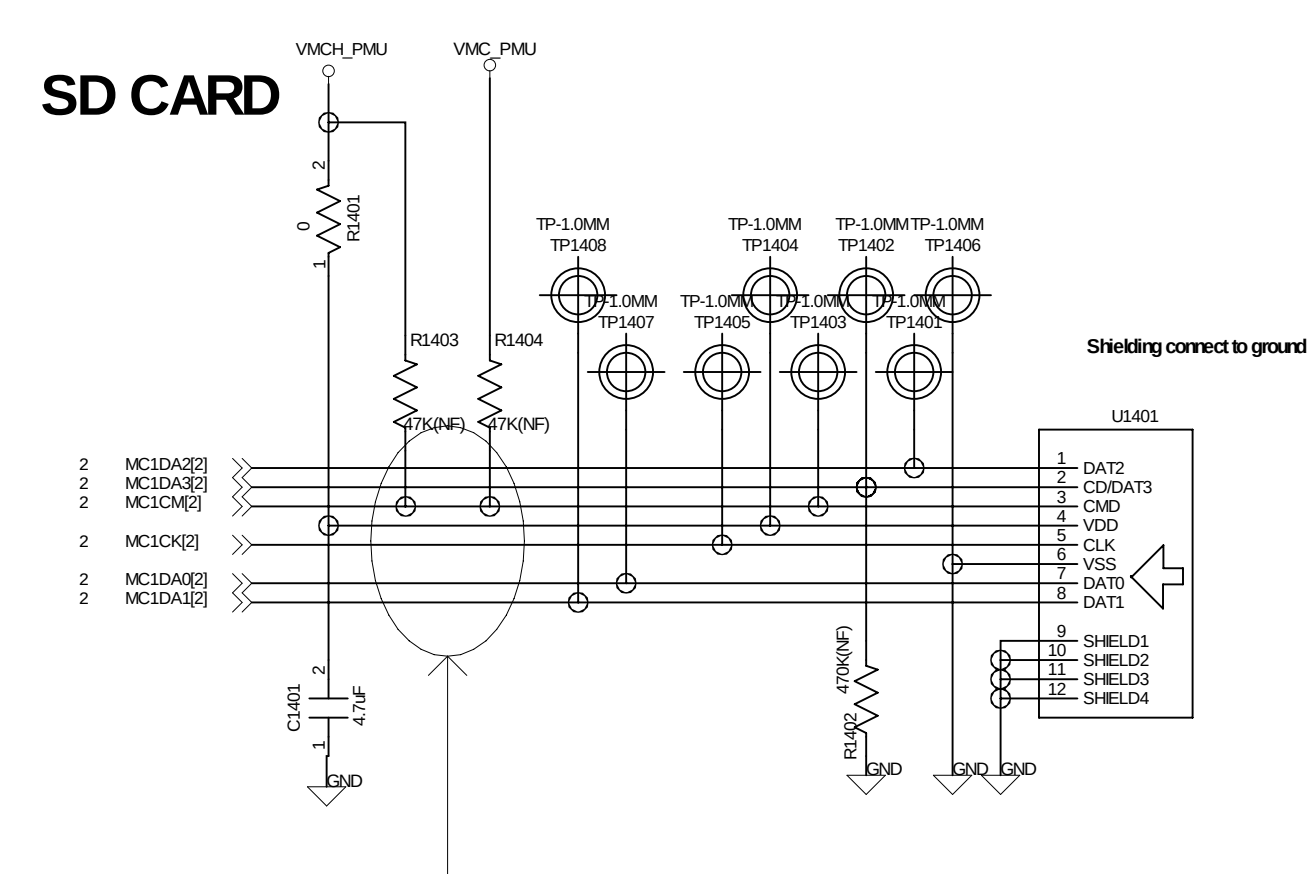

T-card ESD protection is optional depends on
T-card's type and position

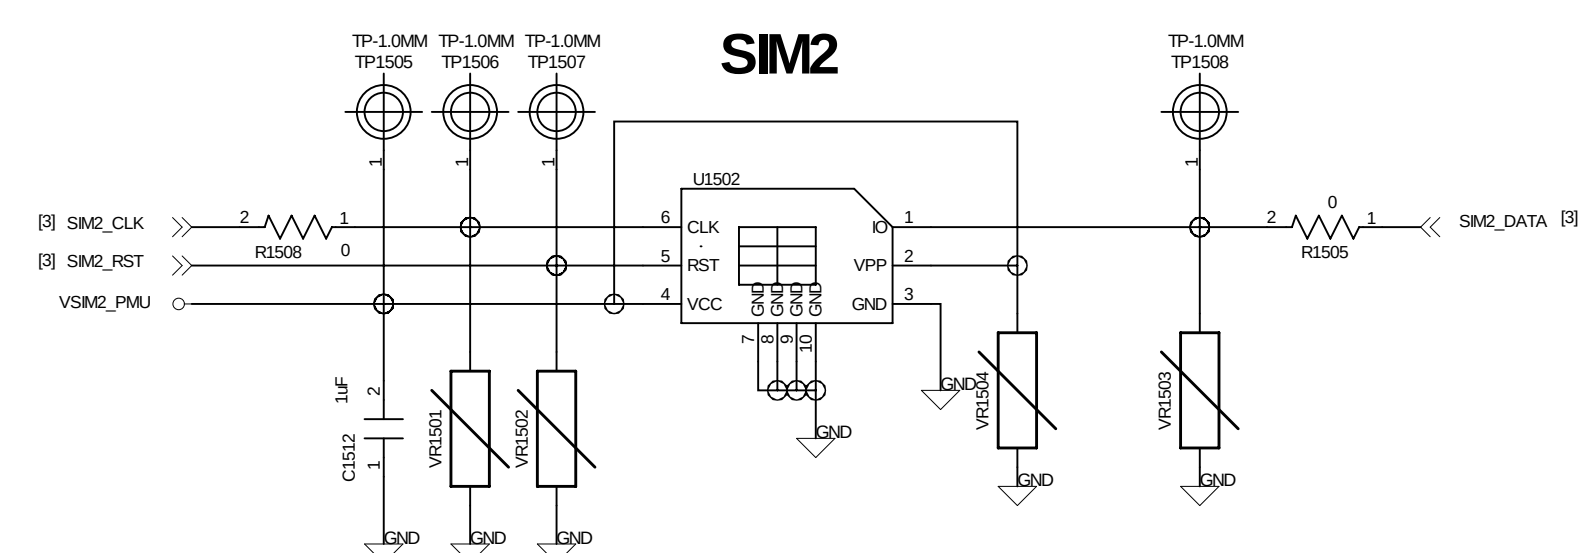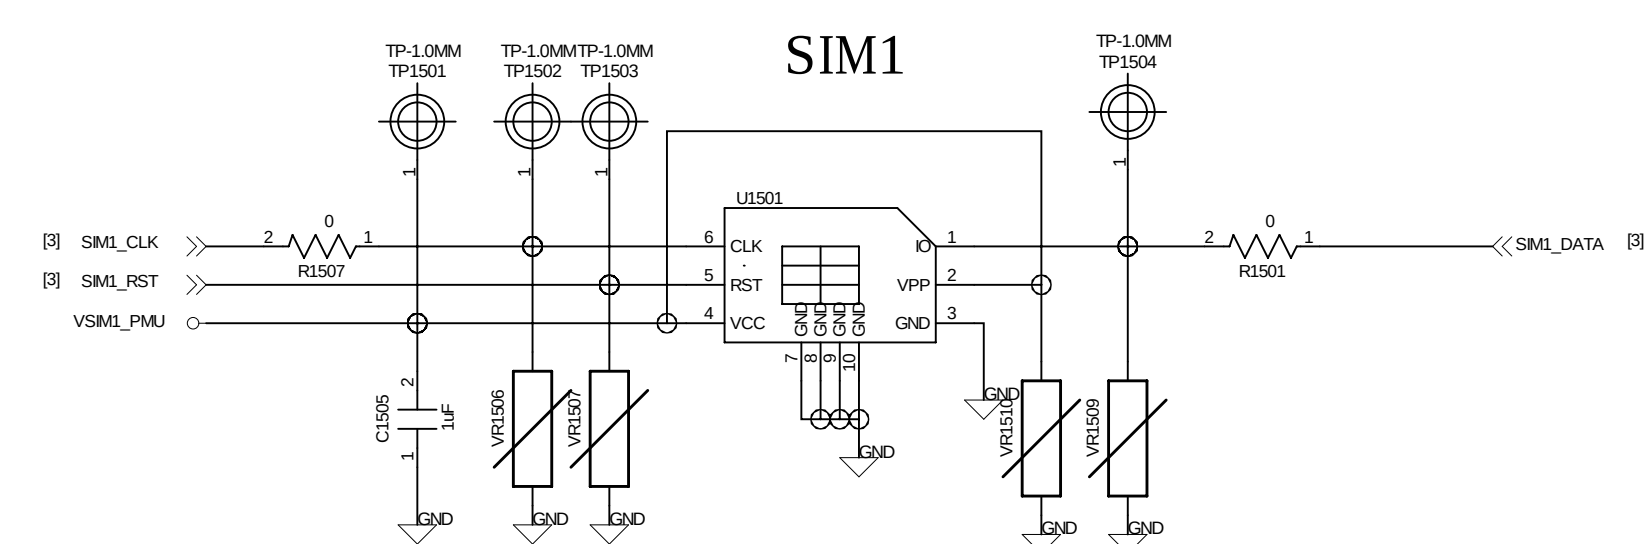


Gsensor

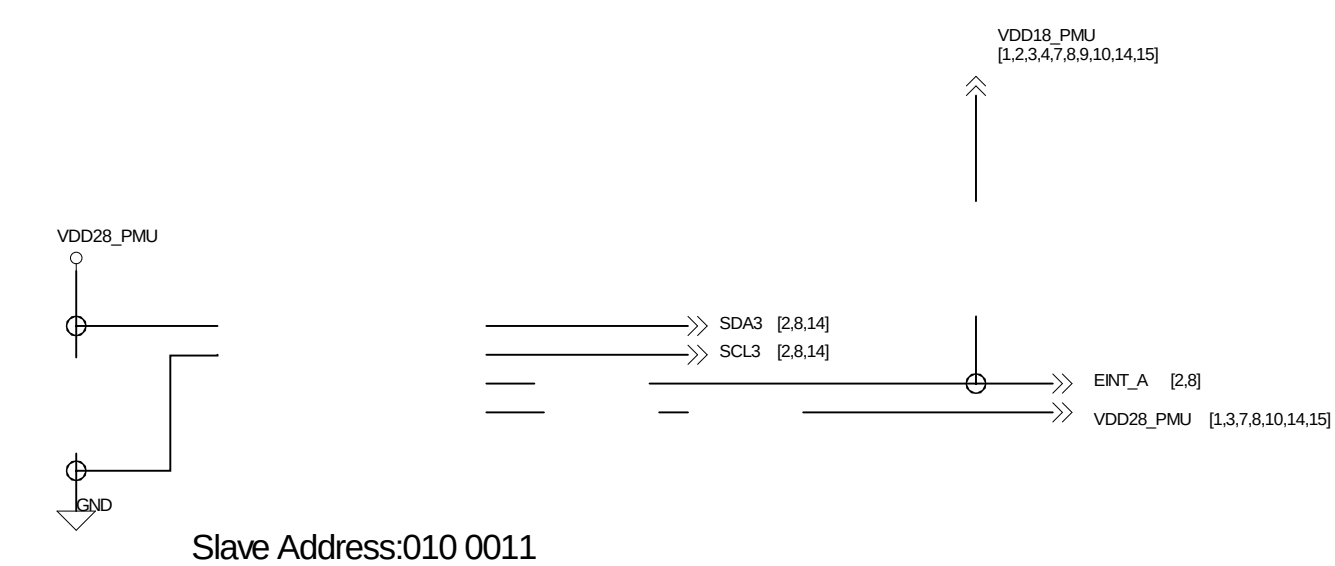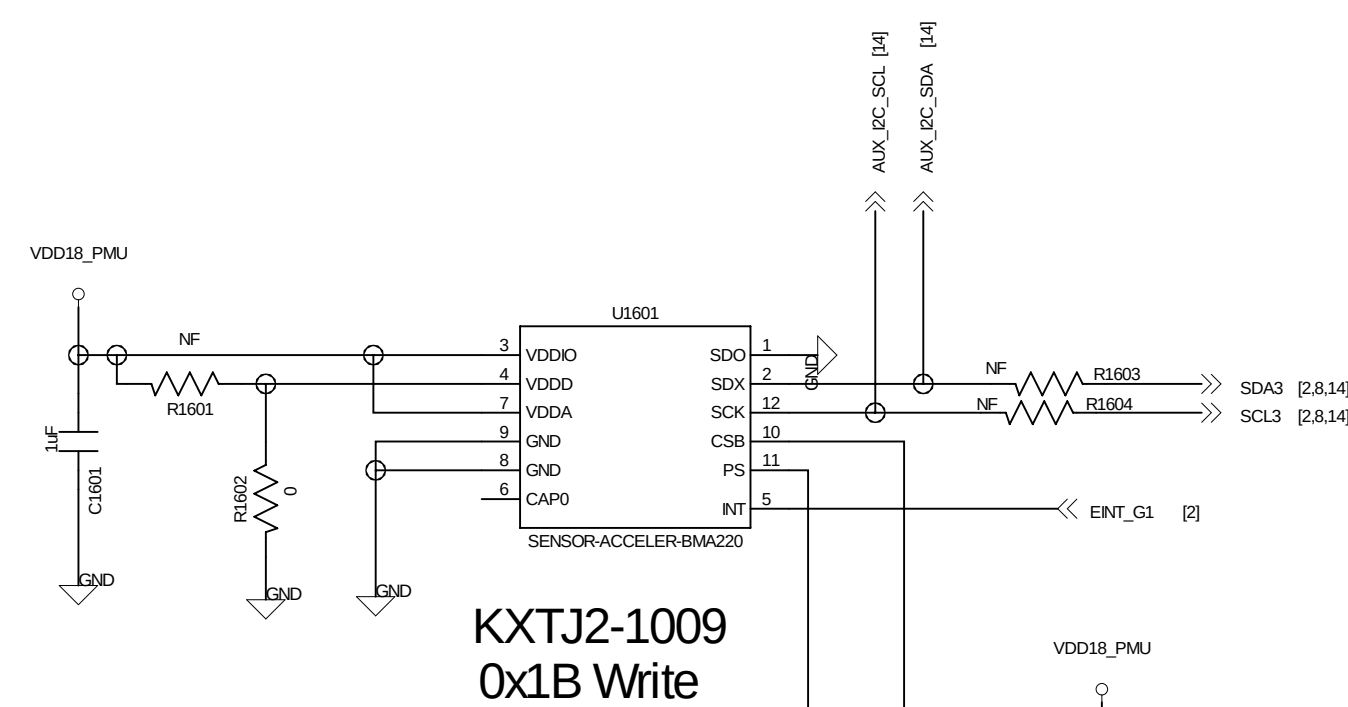


Ambient Light Sensor with Proximity Sensor


Gyroscope

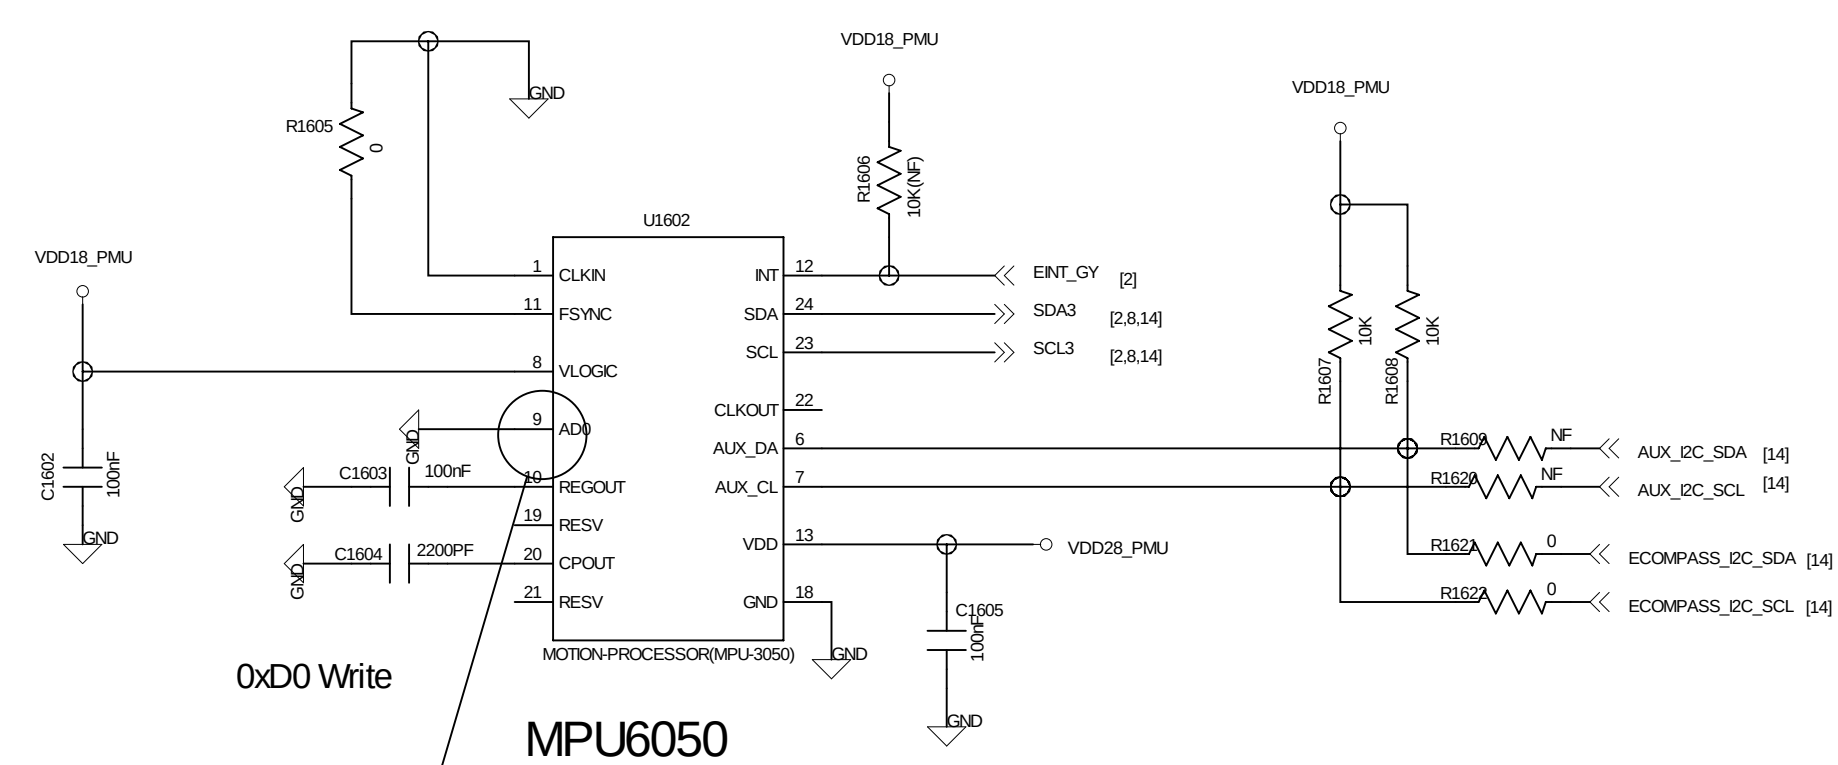

AD0=0 7b1101000 0x68
AD0=1 7b1101001 0x69

M-Sensor

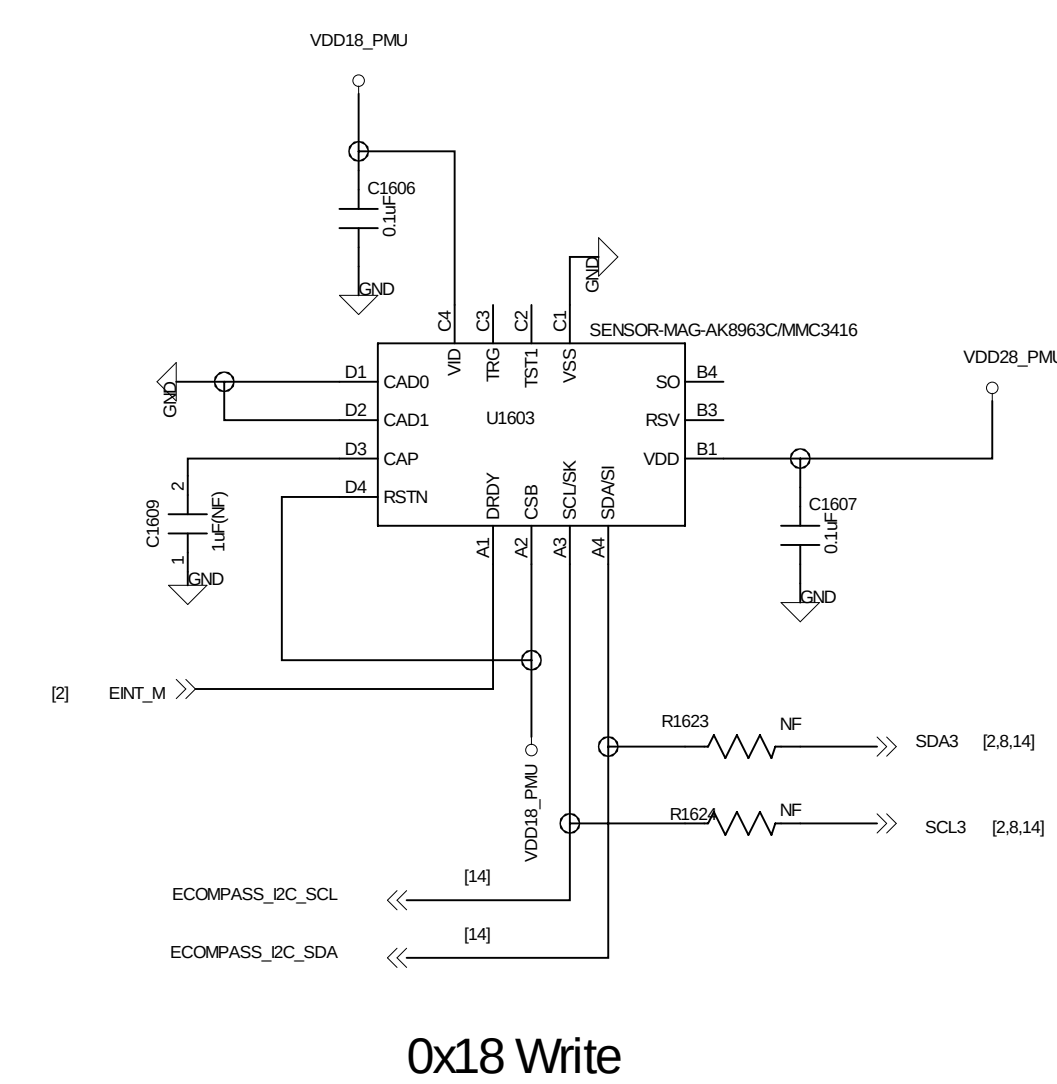

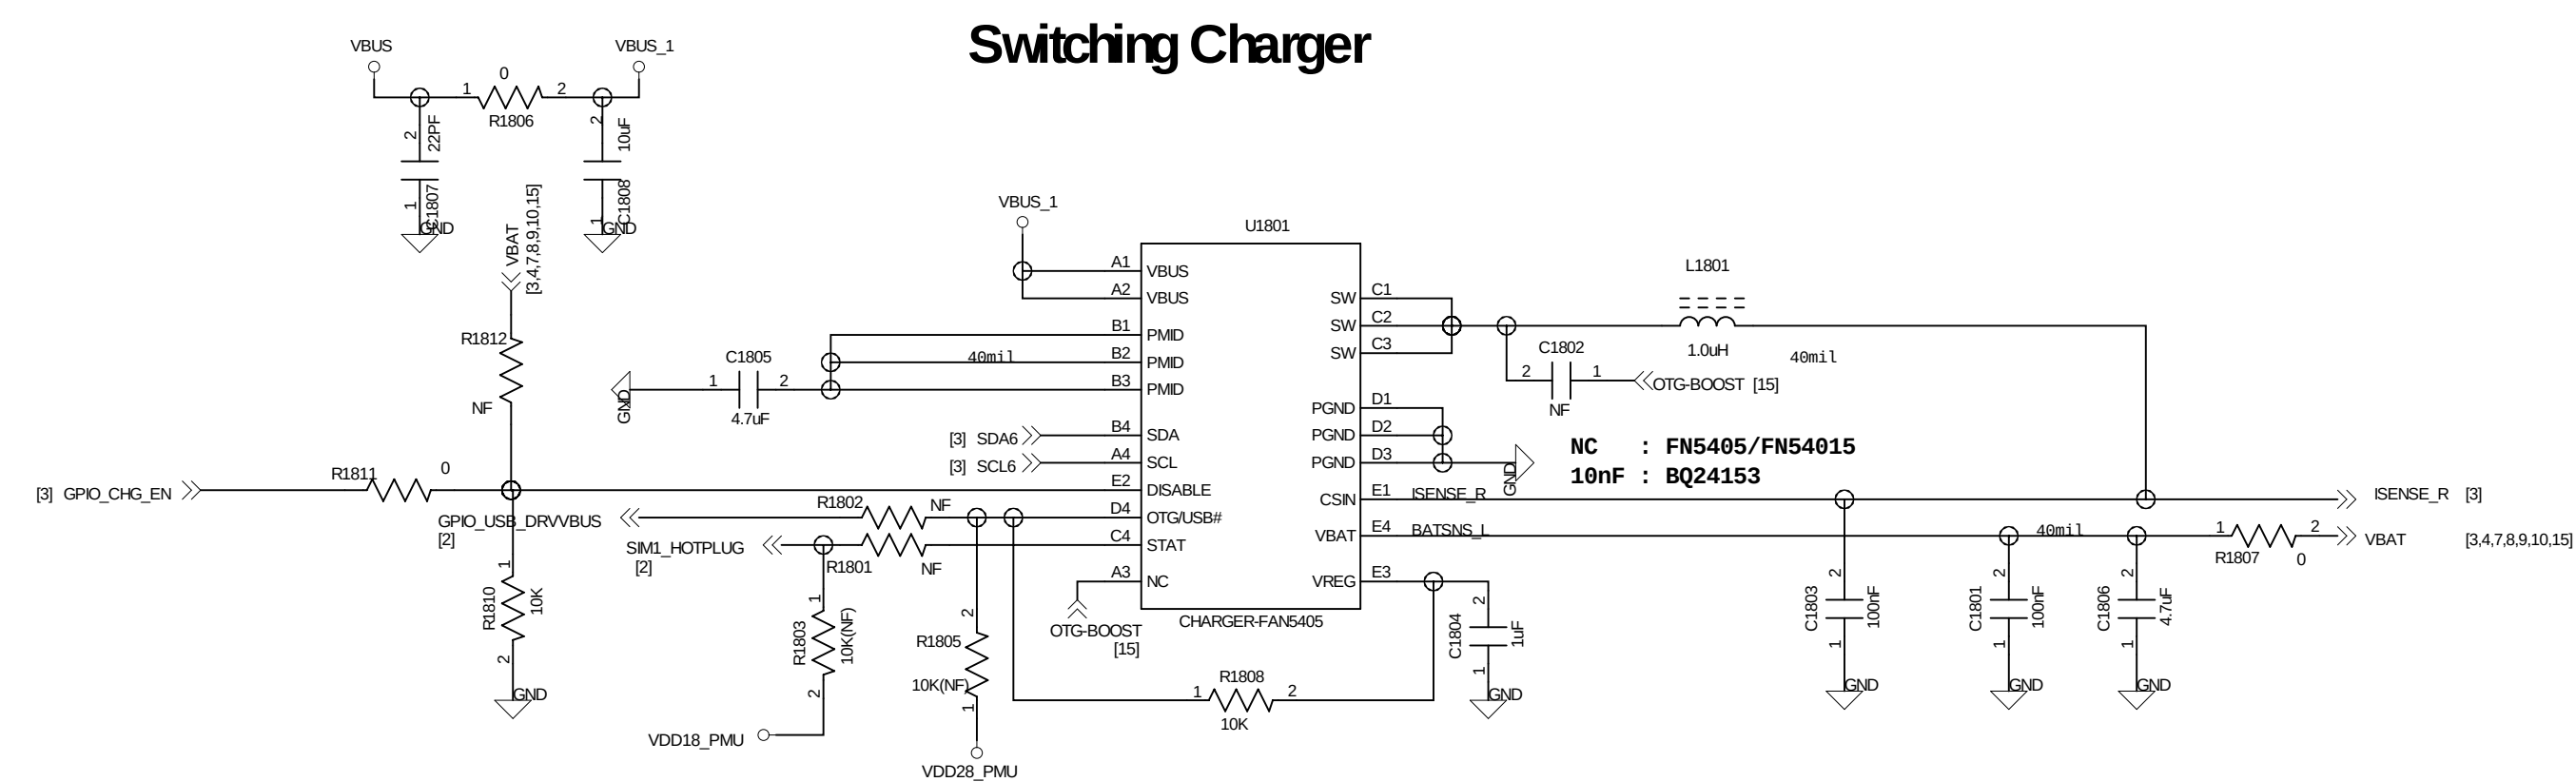

If switching charger is used:

- (1) R1801-R1805, C1801-C1806, L1801, U1801 are needed
- (2) U303, U304 change to NC
- (3) R328 change to 56m Ohm