










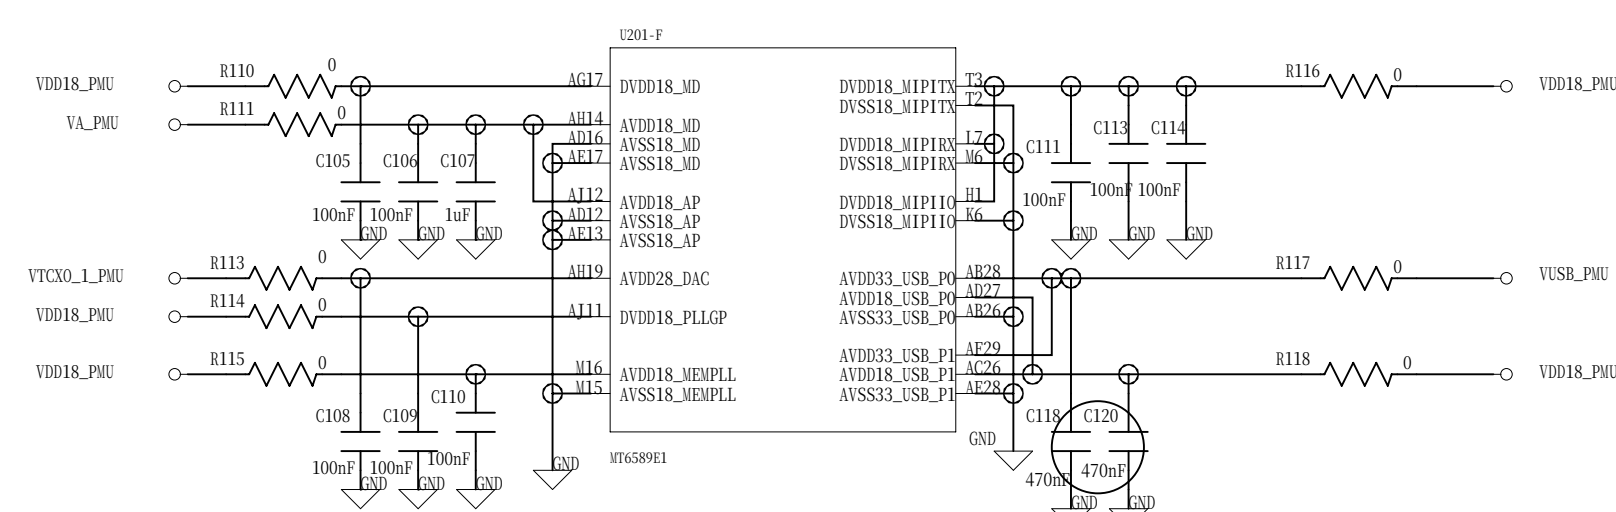


1.0ohm resistors can remove if no layout area.
2.C118,C120 update 1uF.

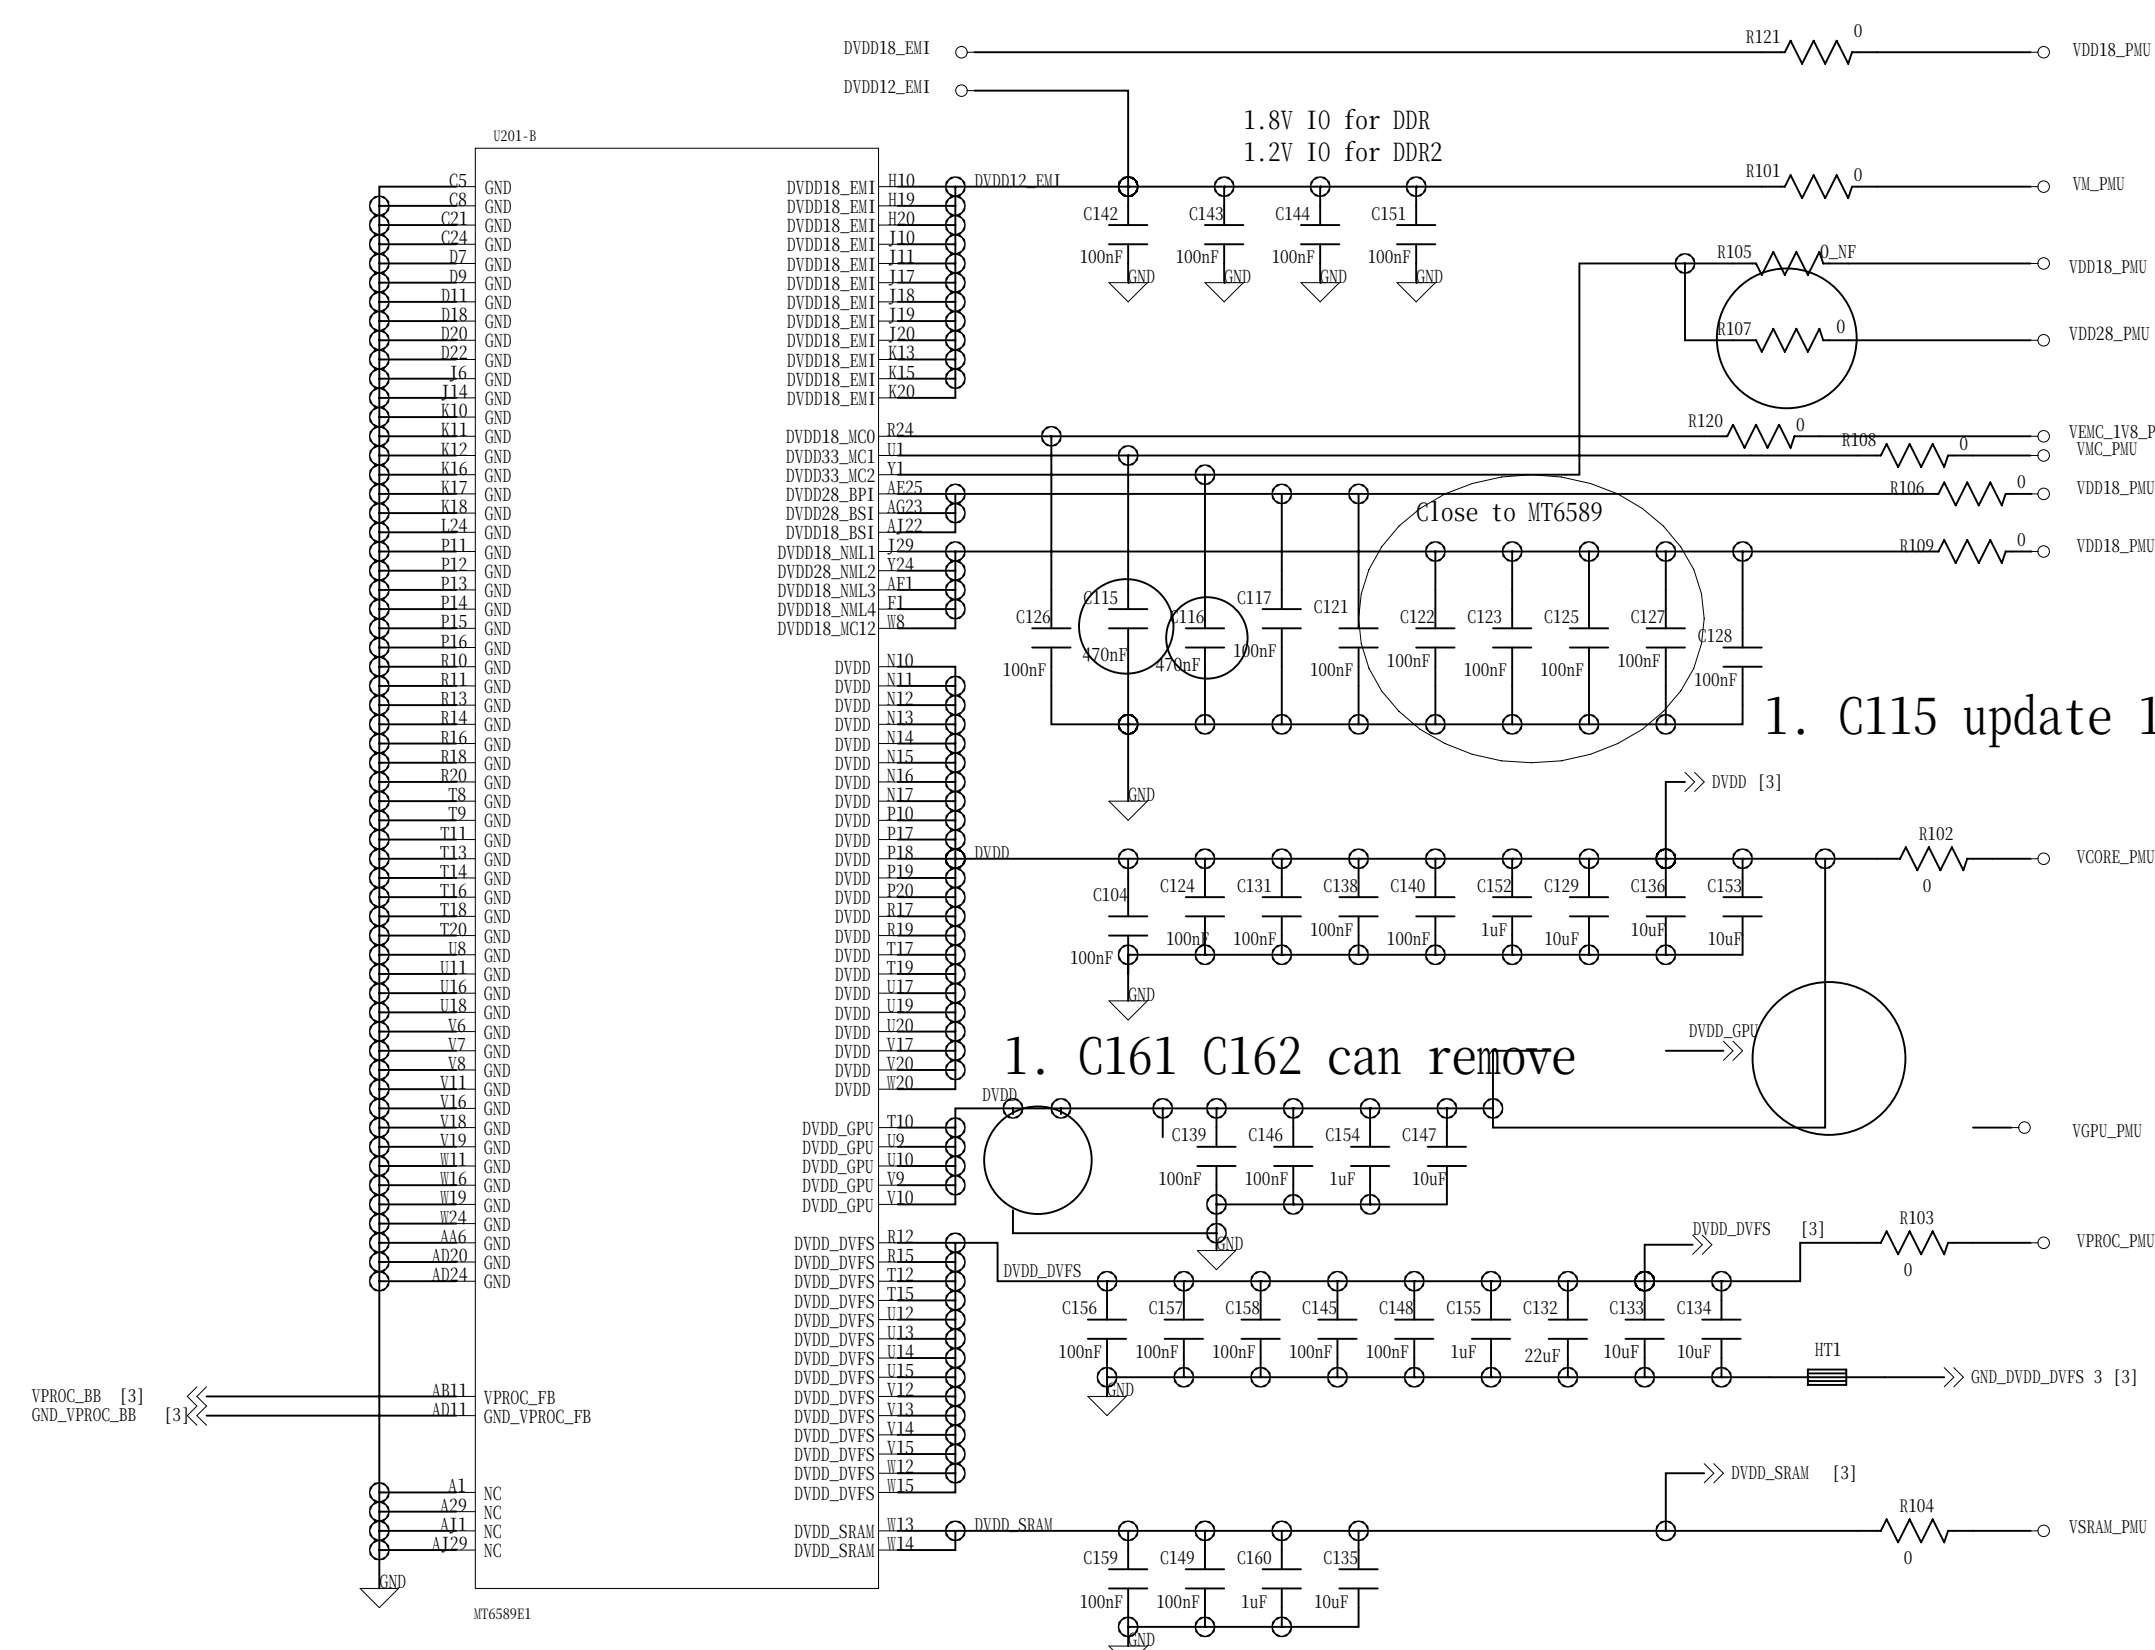


1. C115 update 1u;C116 update 0.1uf.

1. C161 C162 can remove

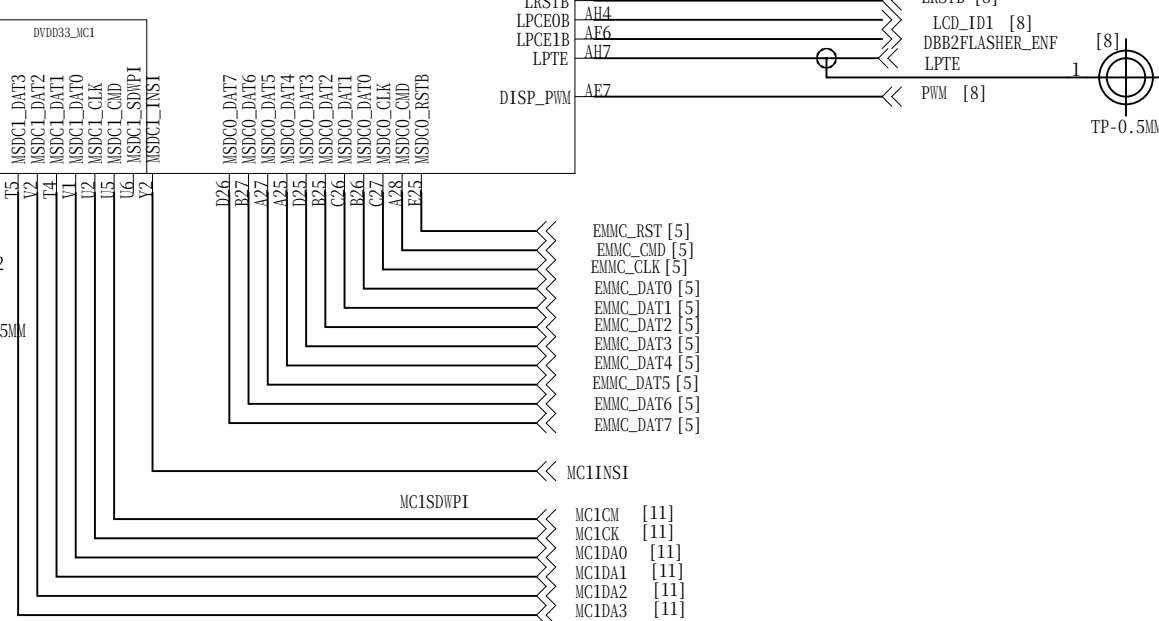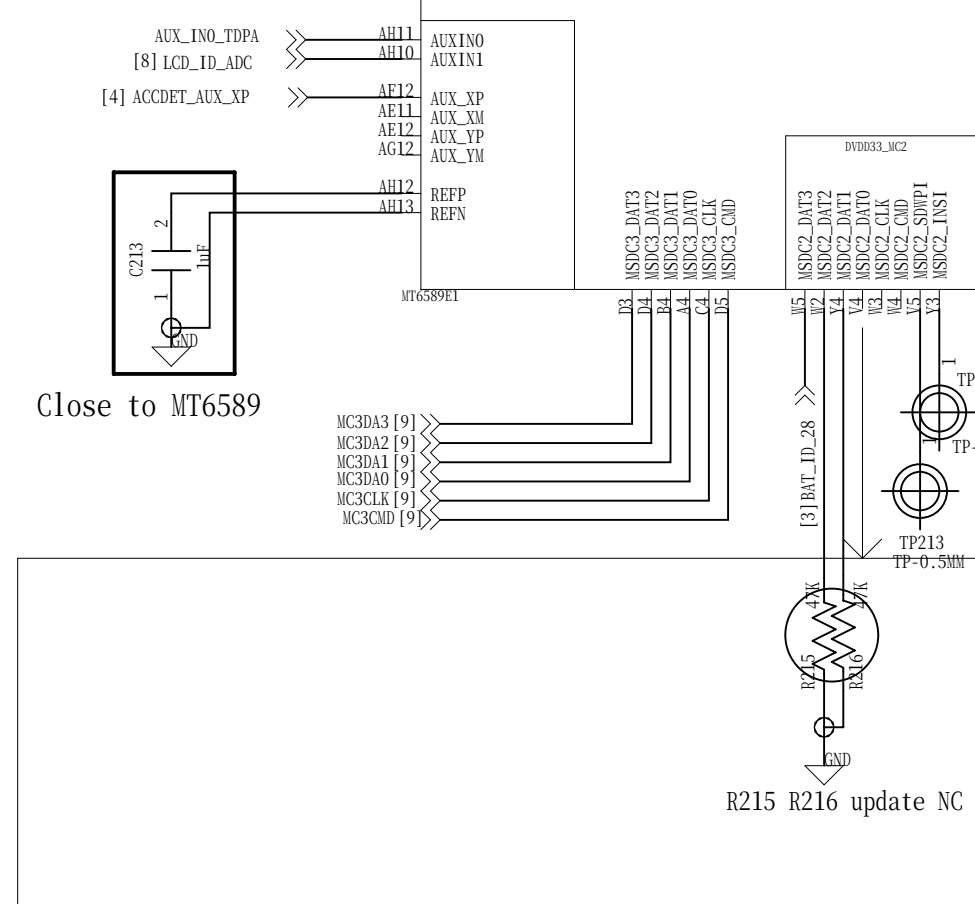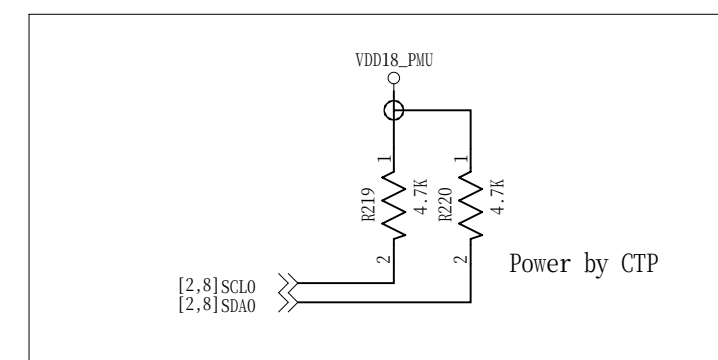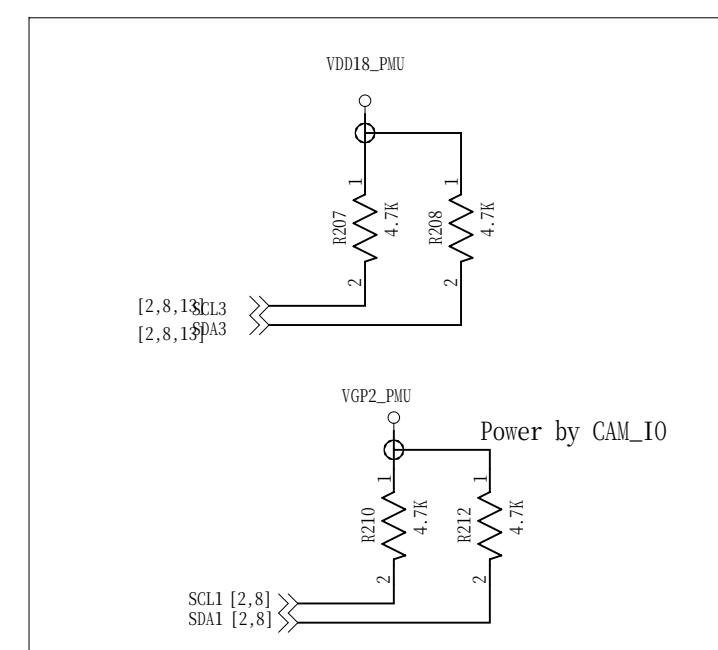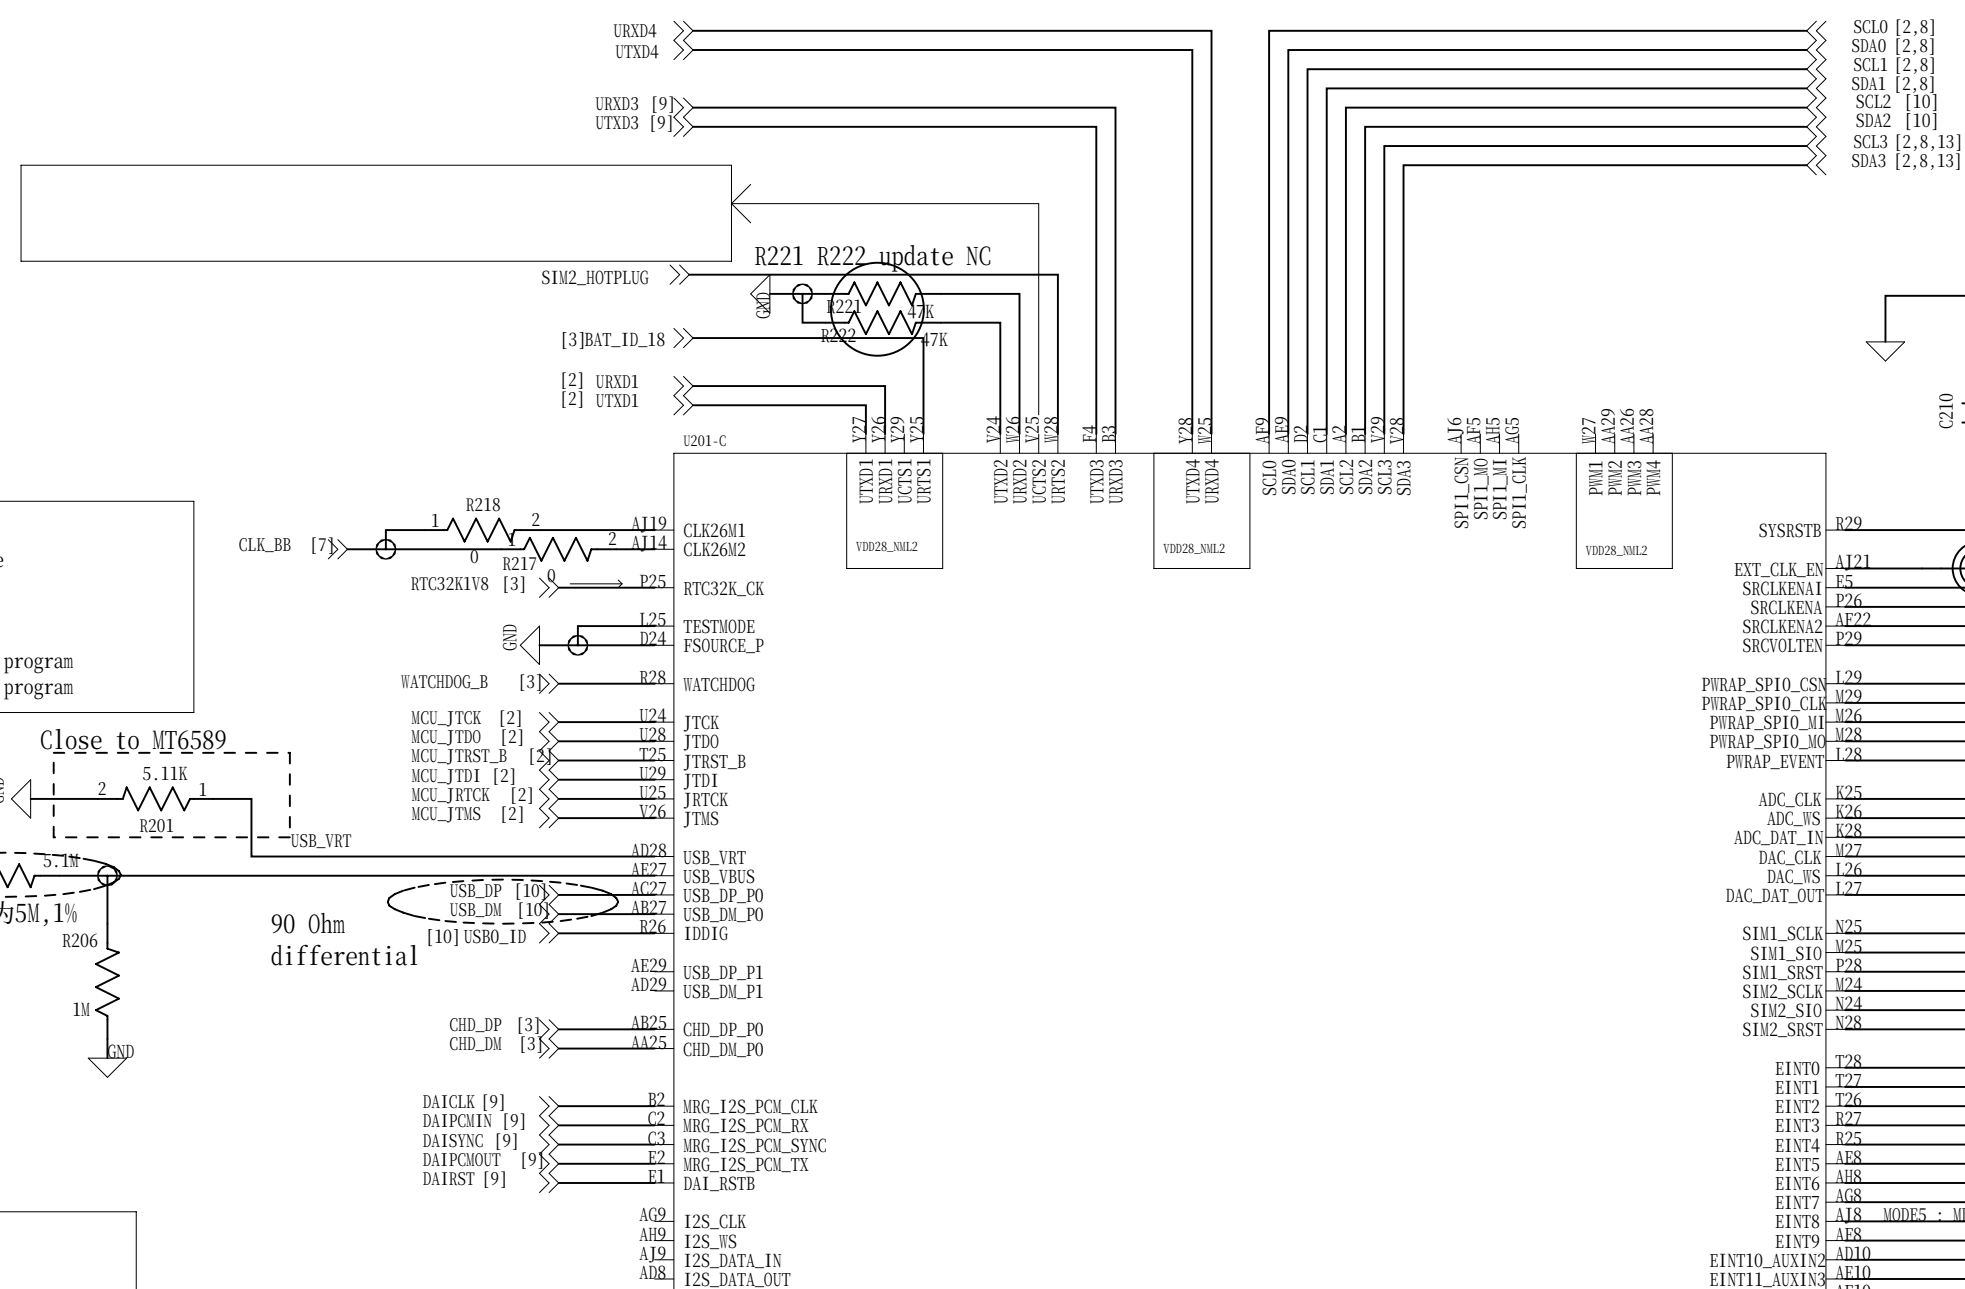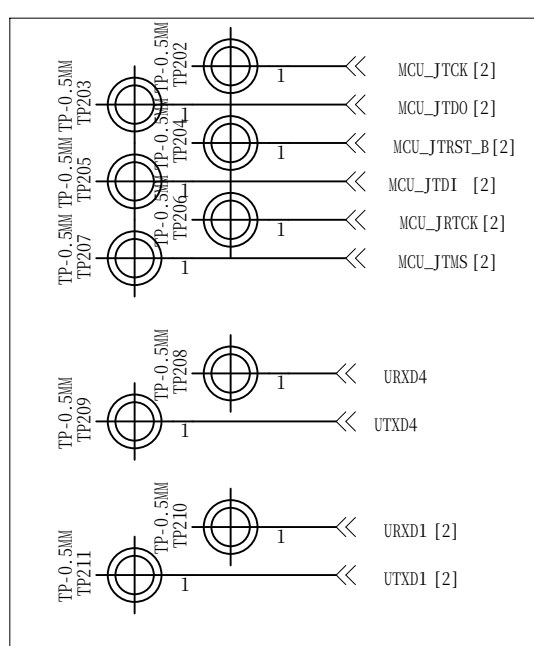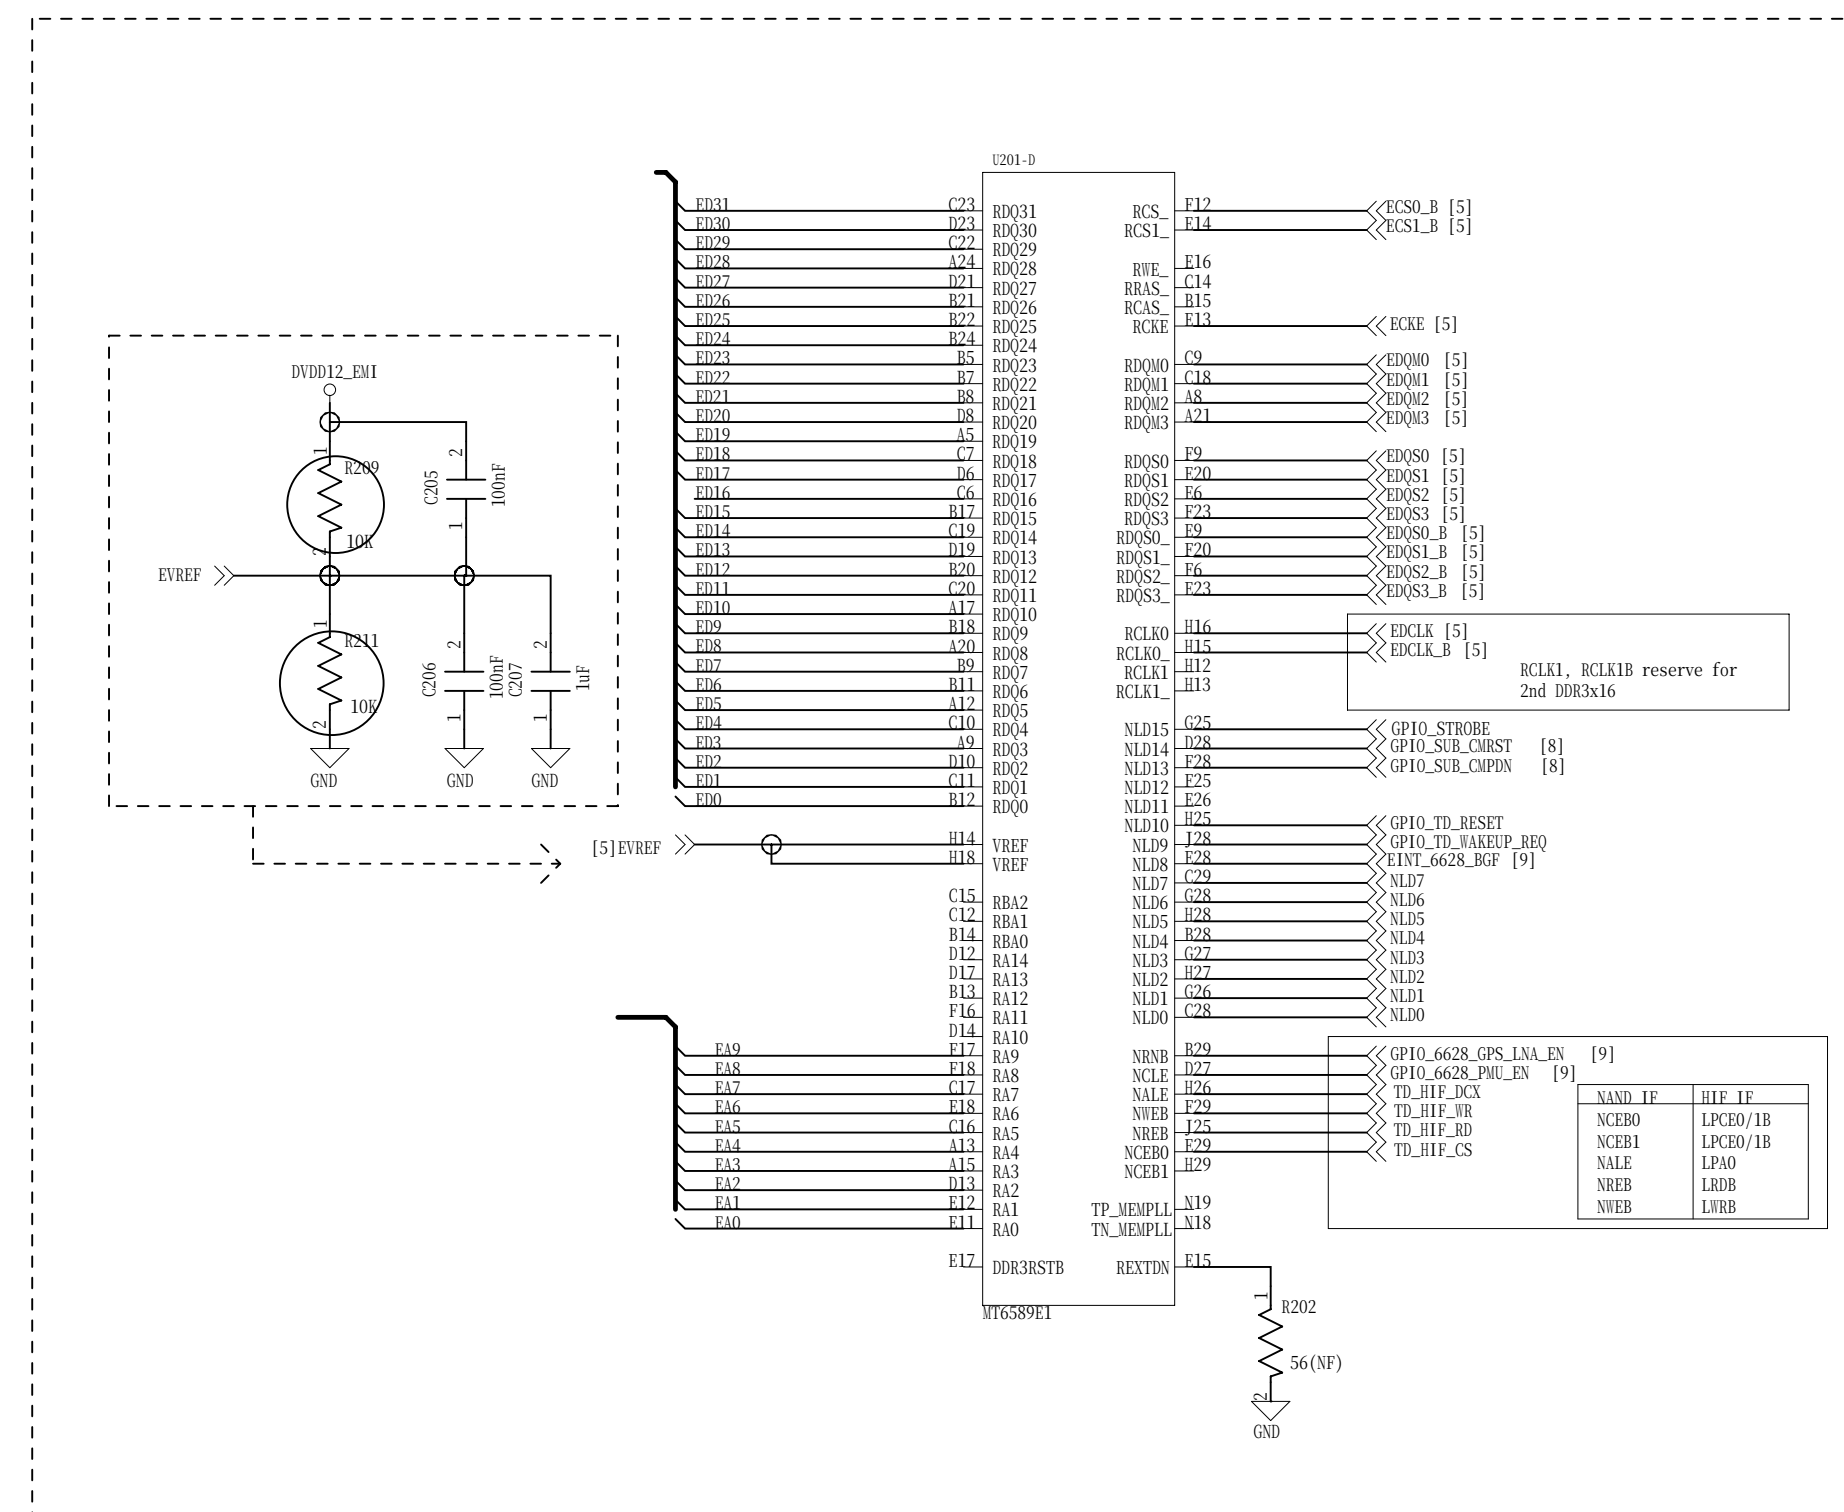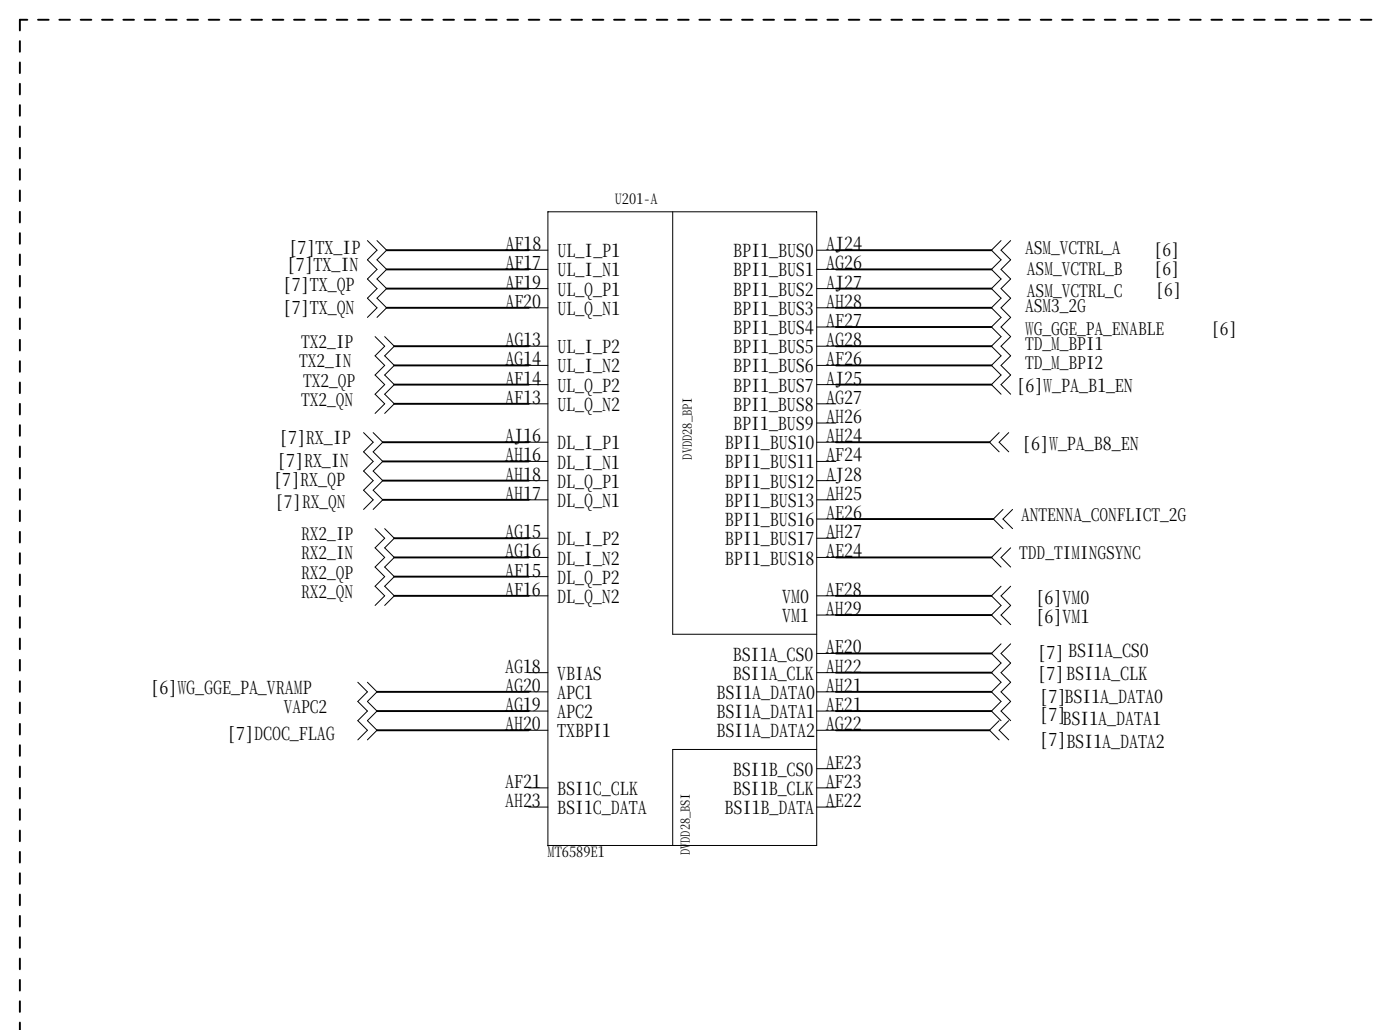


- EXT0 : Gyro Sensor
- EXT1 : AISV Sensor
- EXT2 : G Sensor
- EXT3 : PMIC
- EXT4 : G Sensor
- EXT5 : Capacitive Touch Controller
- EXT6 : M Sensor
- EXT7 : SWI_Hotplug
- EXT8 : MT6168
- EXT9 : Connectivity BGF
- EXT10 : Readset
- EXT11 : Reserved
- EXT16 : Reserved

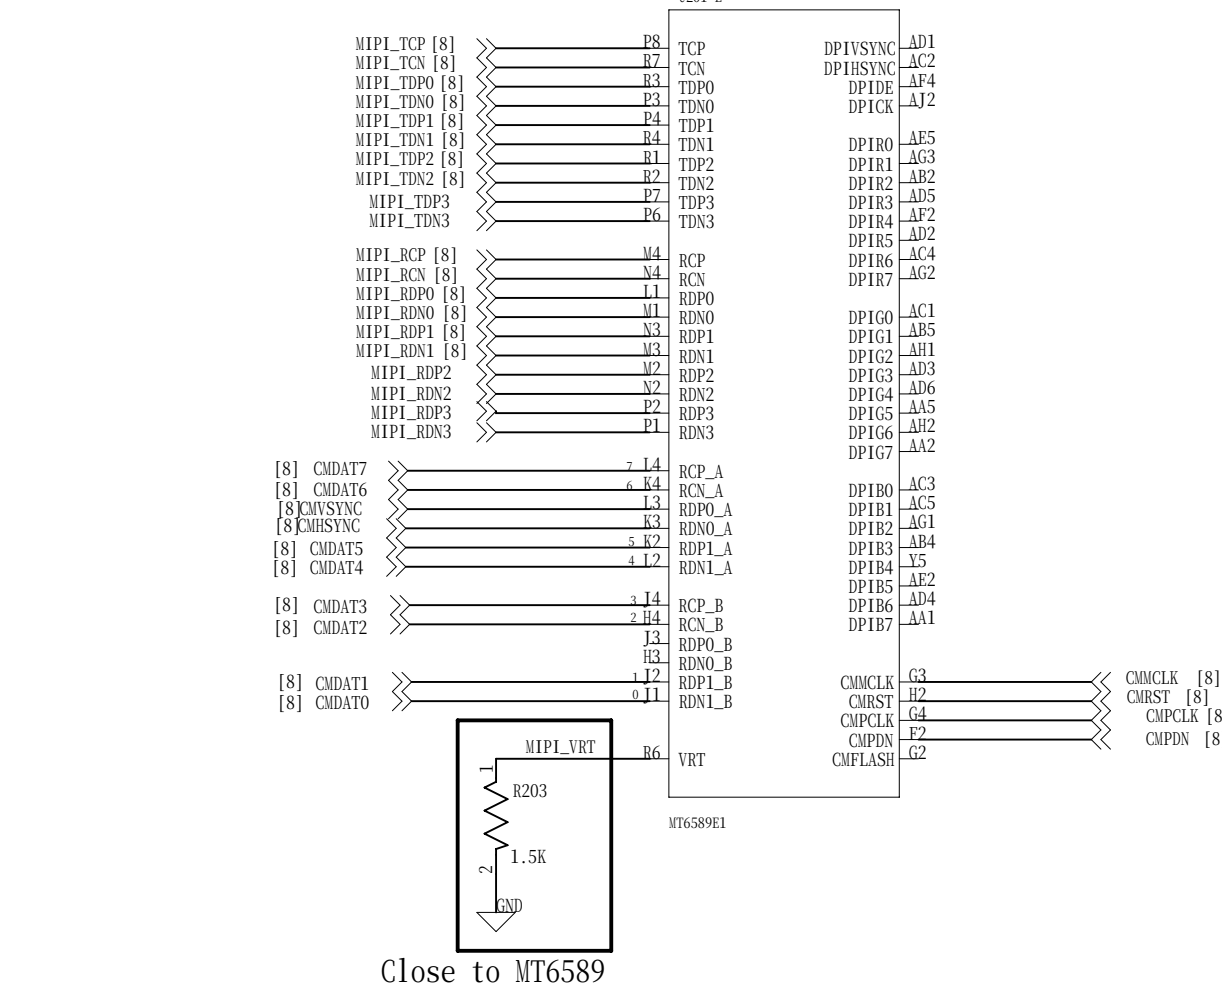


<Parallel Cam./MIPI CSI Mux Table>

MIPI CSI IF Port	Parallel Camera IF Port
R0N1_A	CHDA76
R0P1_A	CHDA77
R0N1_B	CHDA78
R0P1_B	CHDA79
R0N1_C	CHDA80
R0P1_C	CHDA81
R0N1_D	CHDA82
R0P1_D	CHDA83
R0N1_E	CHDA84
R0P1_E	CHDA85
R0N1_F	CHDA86
R0P1_F	CHDA87
R0N1_G	CHDA88
R0P1_G	CHDA89
R0N1_H	CHDA90
R0P1_H	CHDA91


Receiver

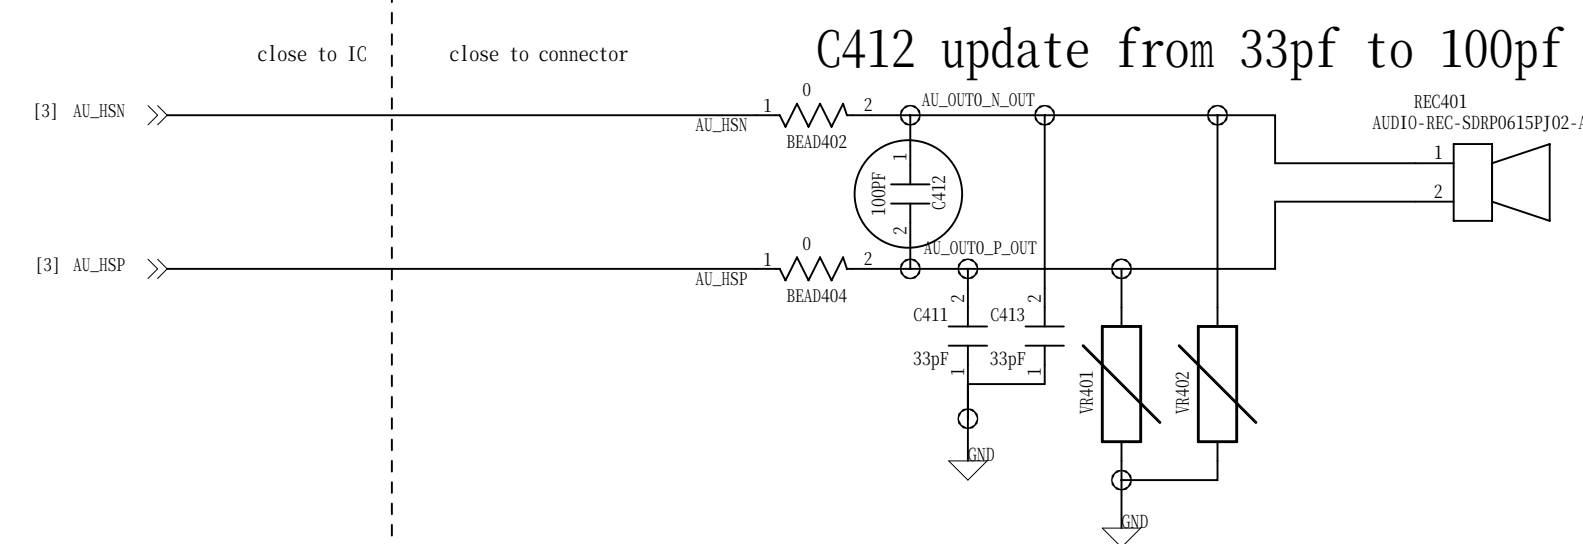

Earphone MICPHONE

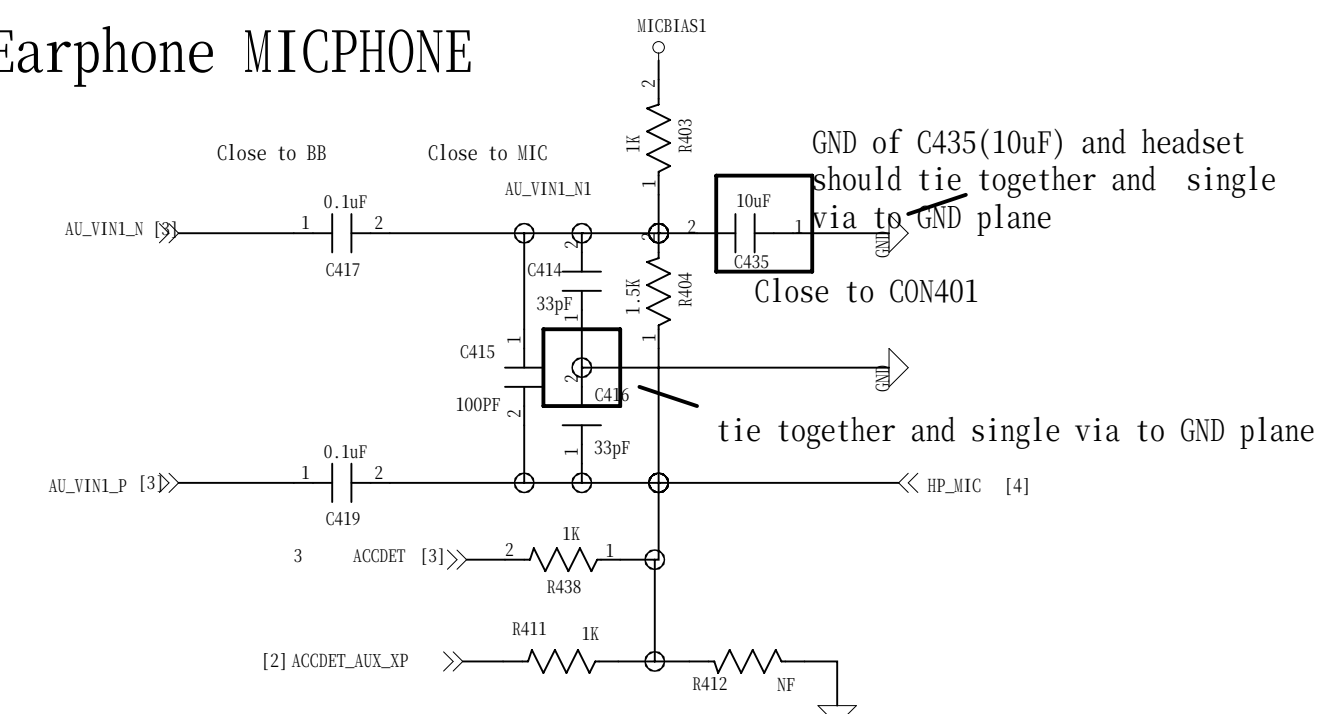


主MIC
Handset Microphone 1

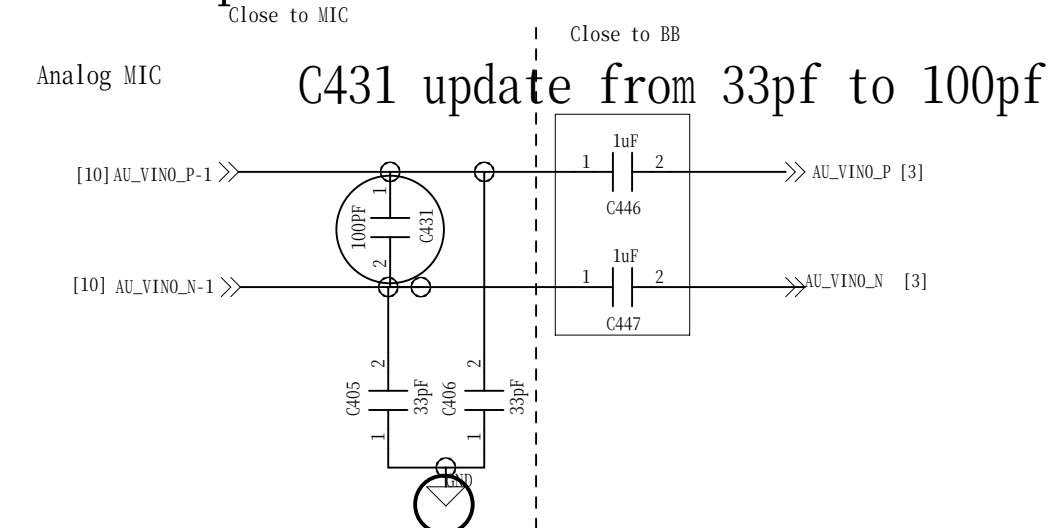


together then single via to main GND


AUDIO PA

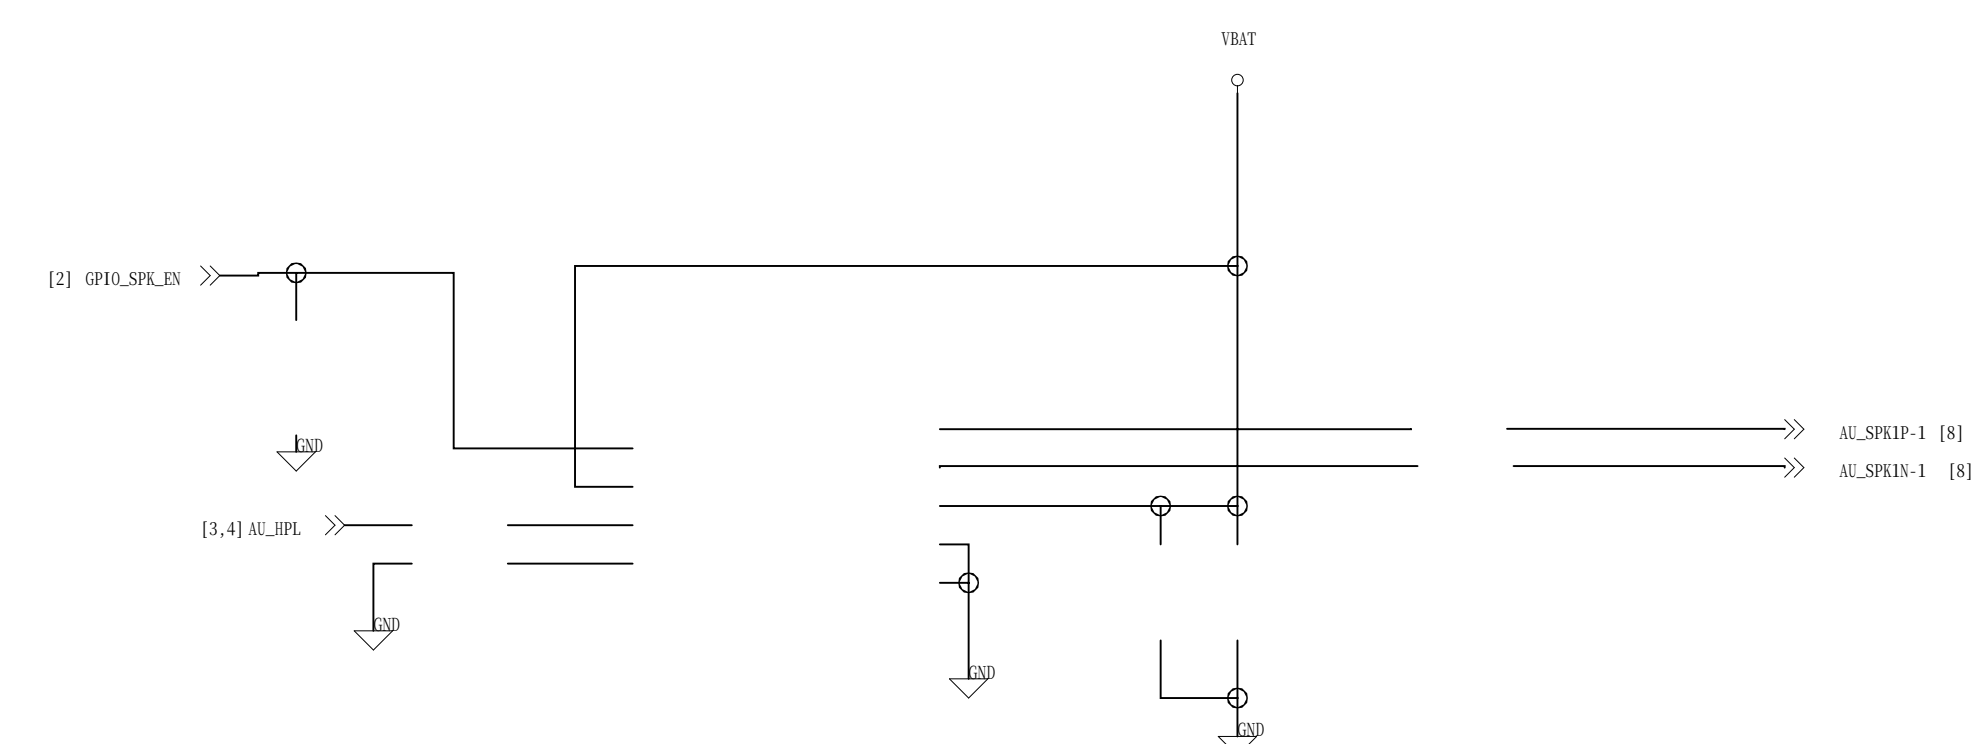

Earphone Audio

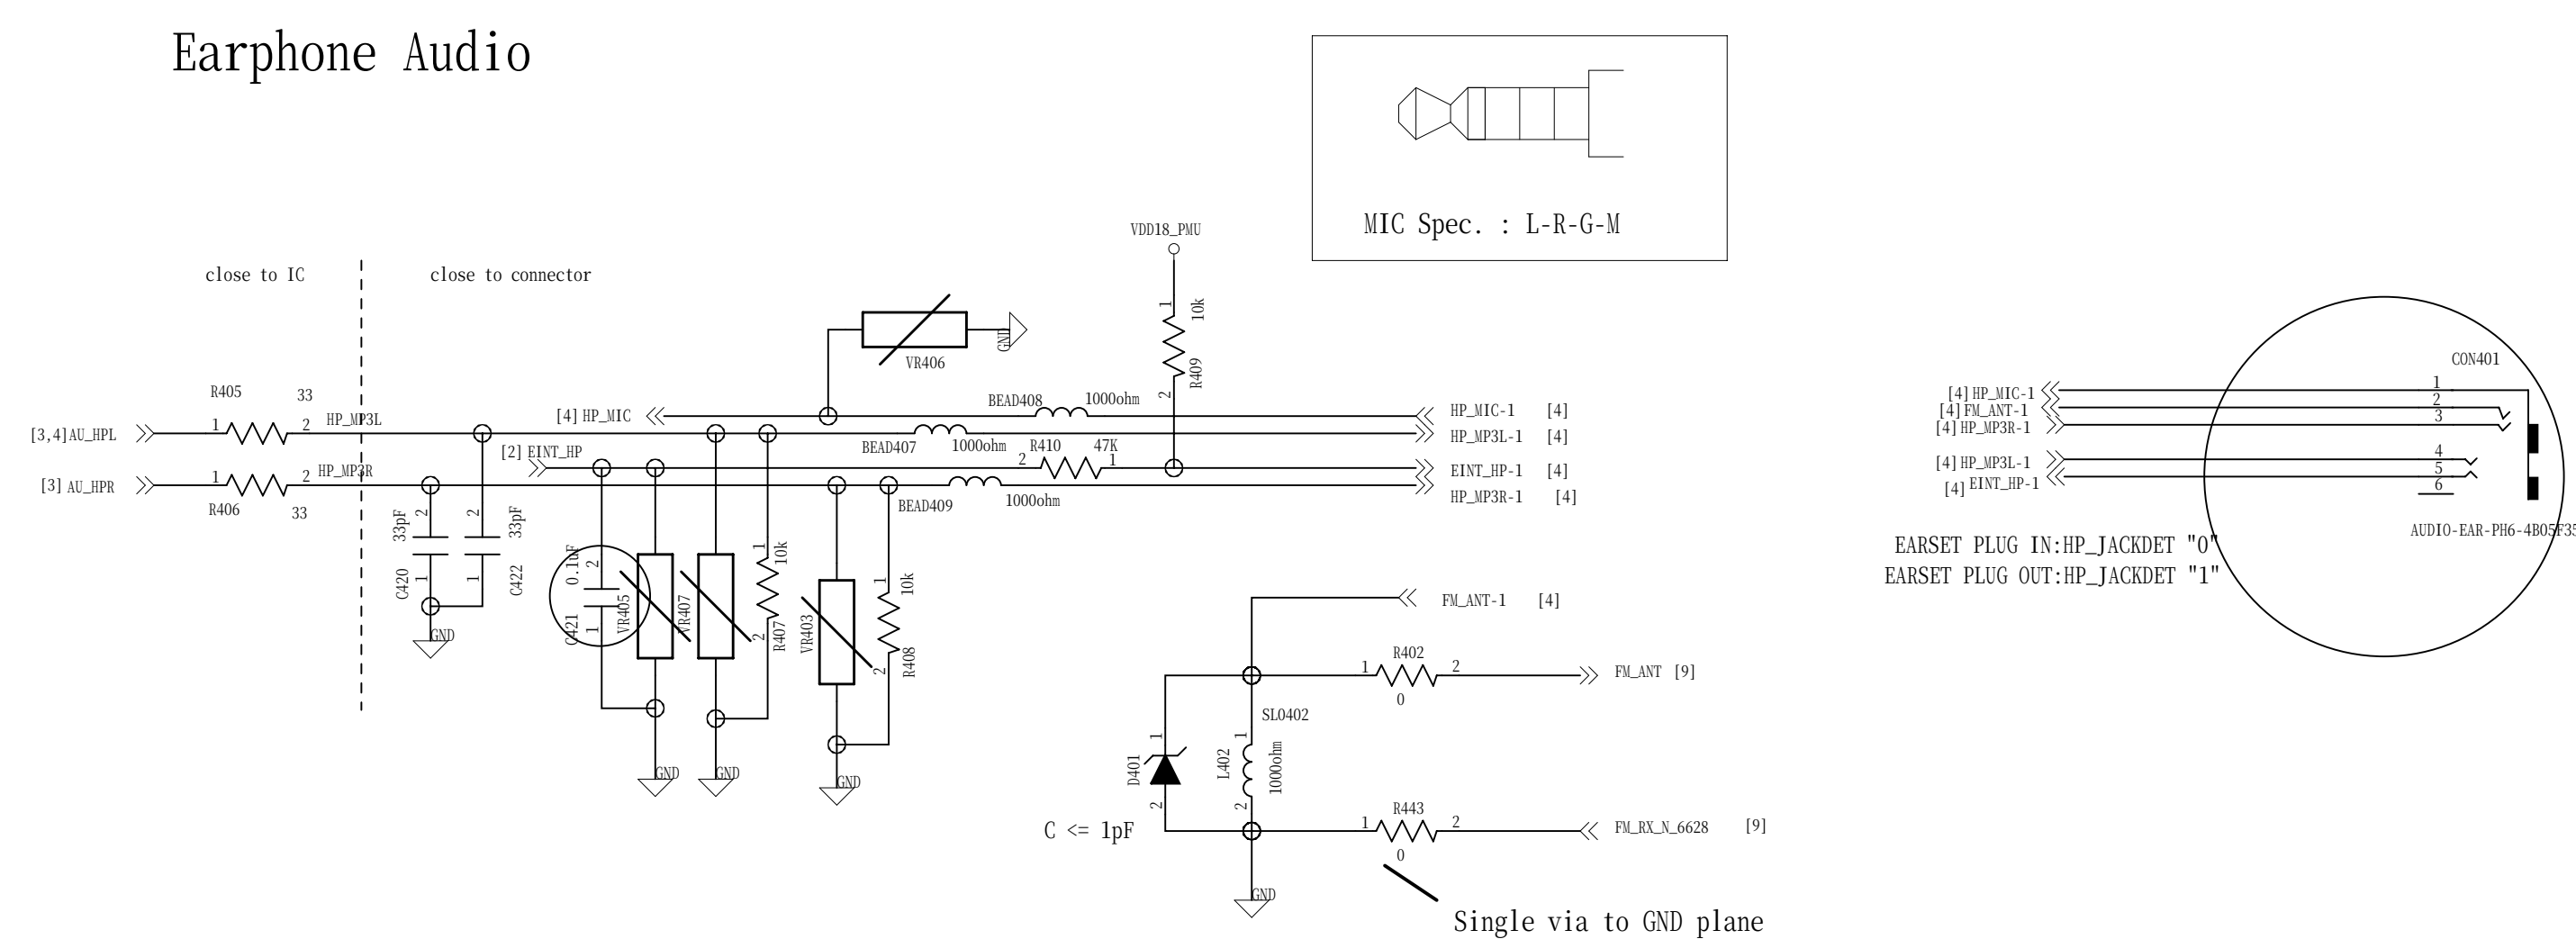

AUX MIC
Handset Microphone 2-1

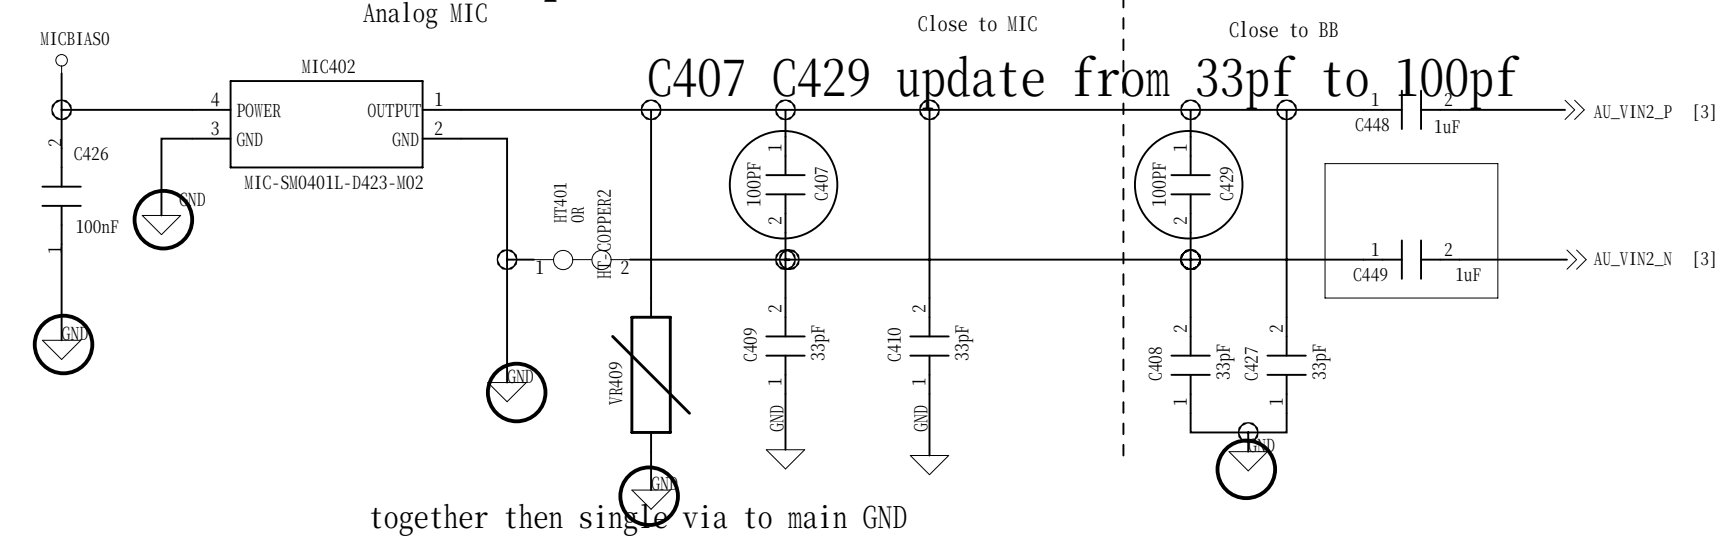

eMMC+LPDDR2


162 Ball, 0.5mm pitch


VDD1=1.8V

VDD2=1.20V


VDDCA=1.2V


VDDQ= 1.20V

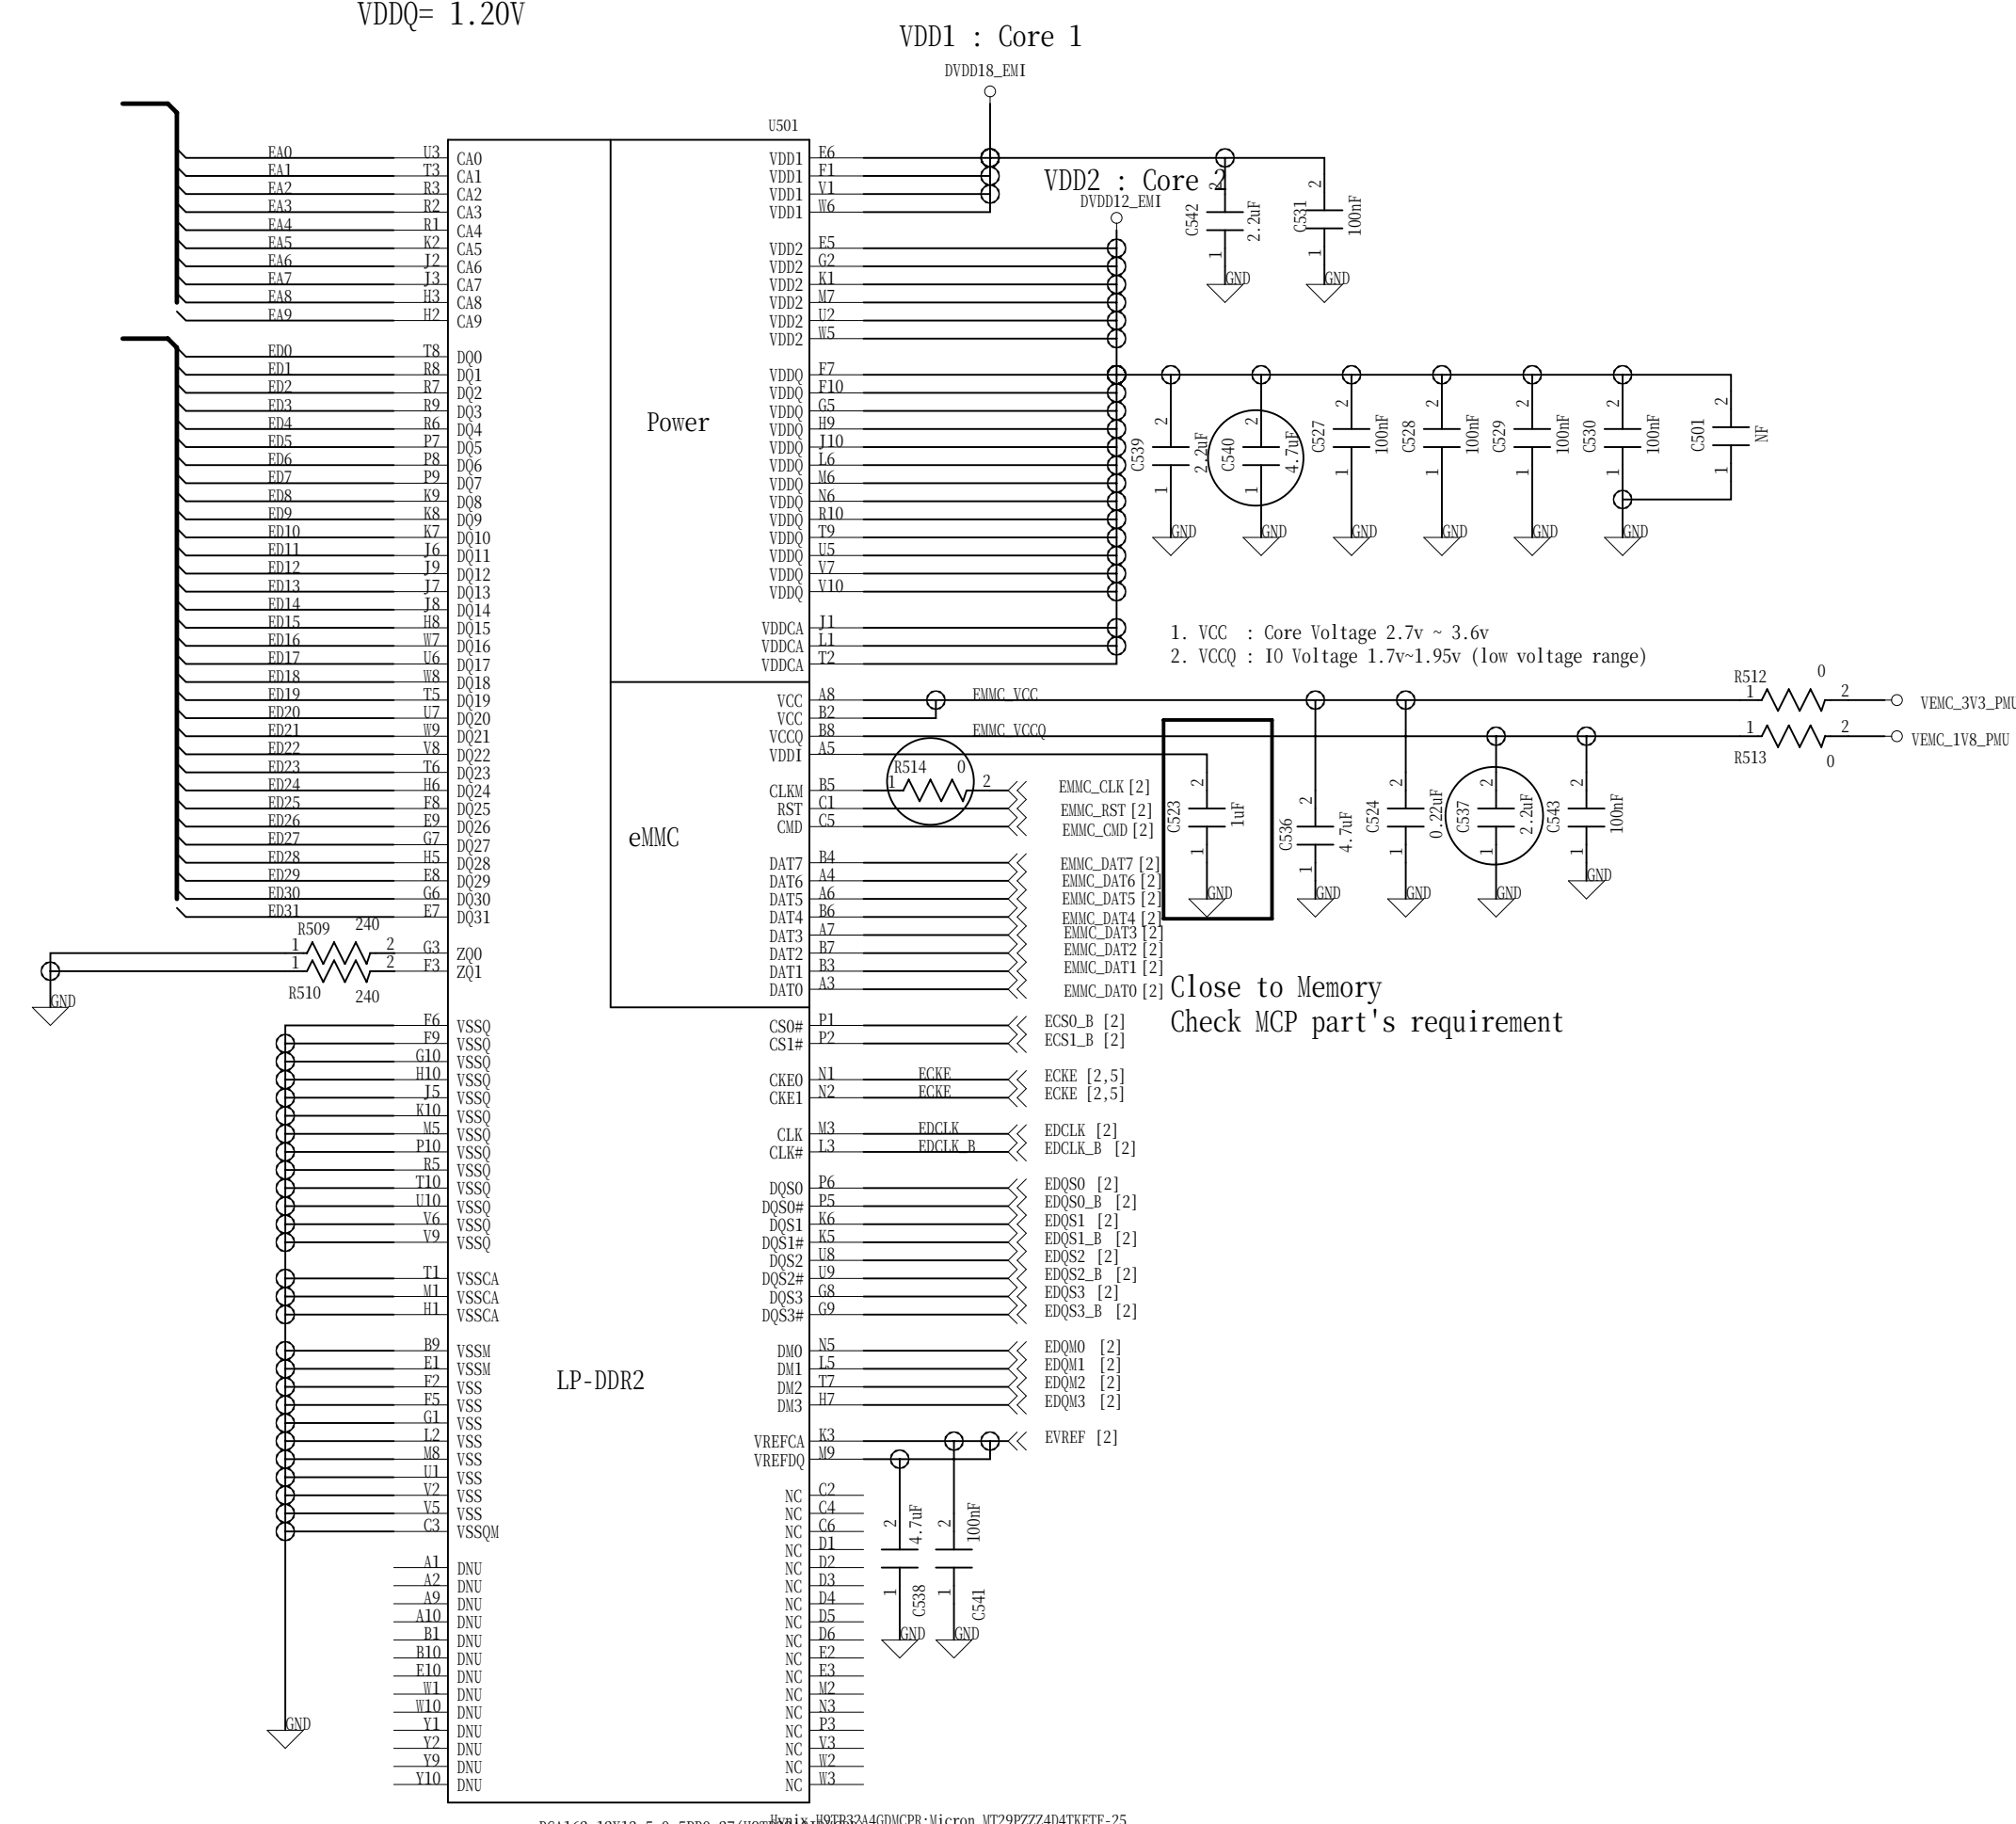

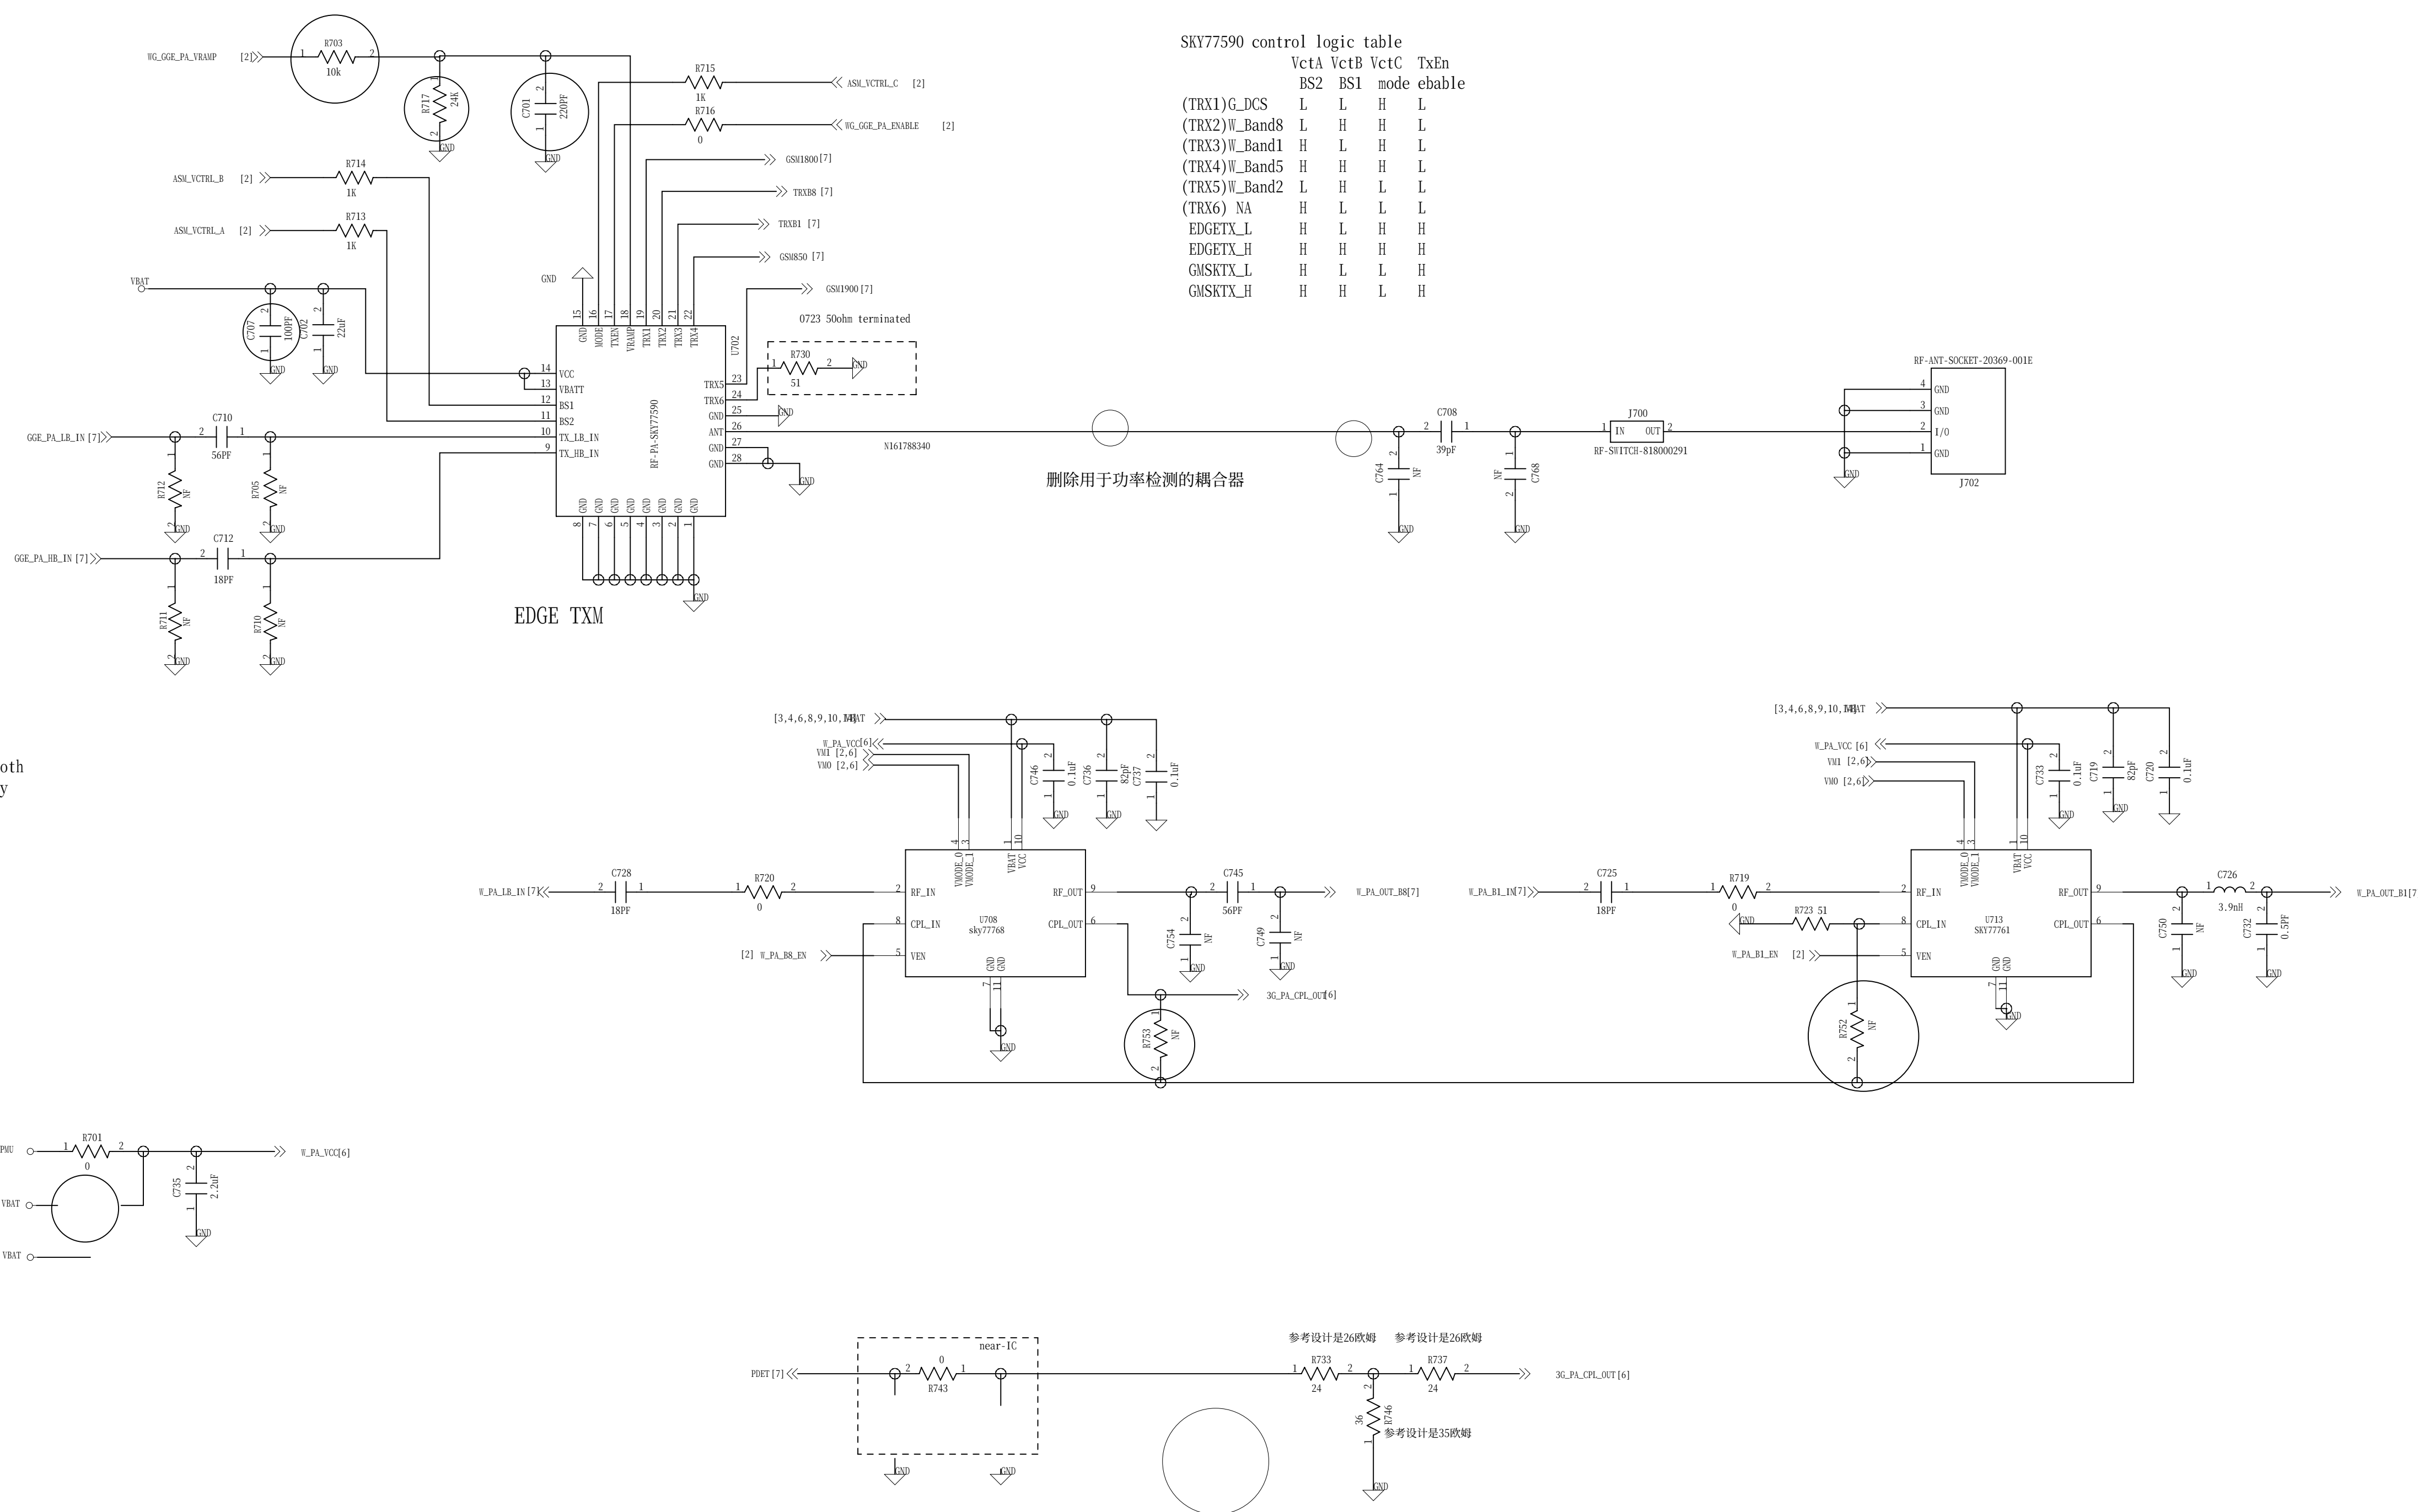


Non-final SCH, internal use only
don't release to customer!

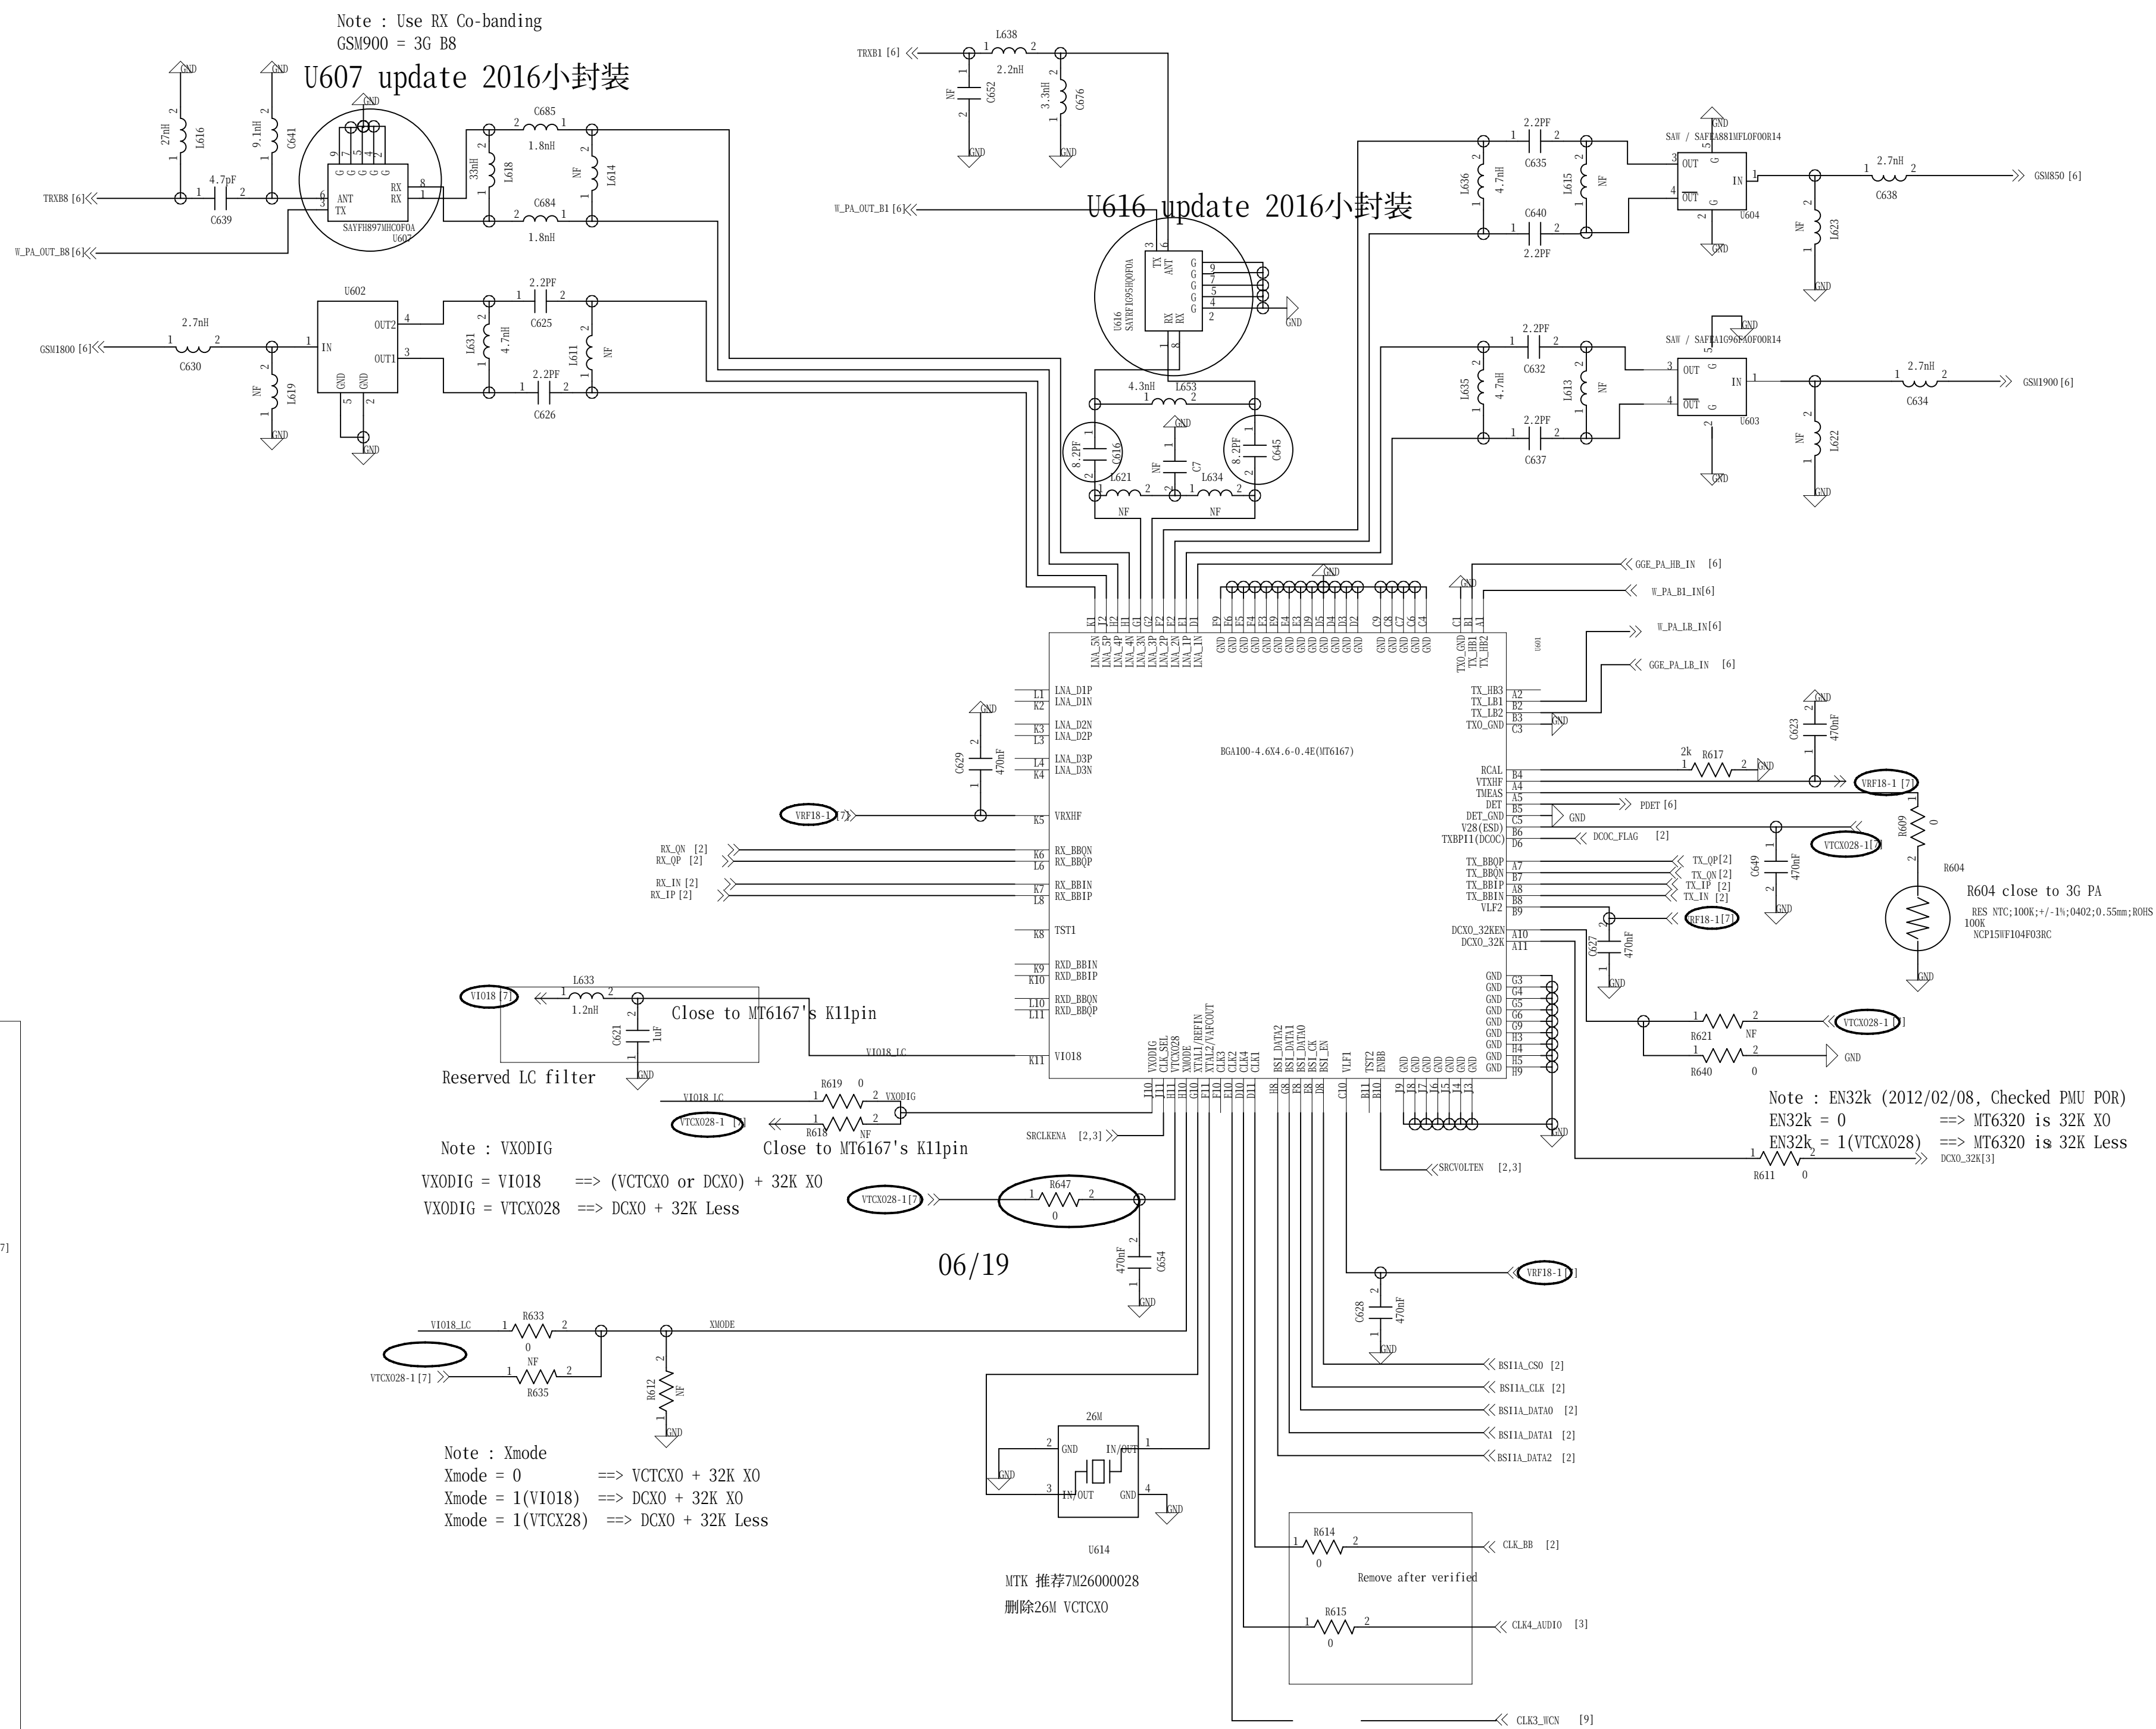

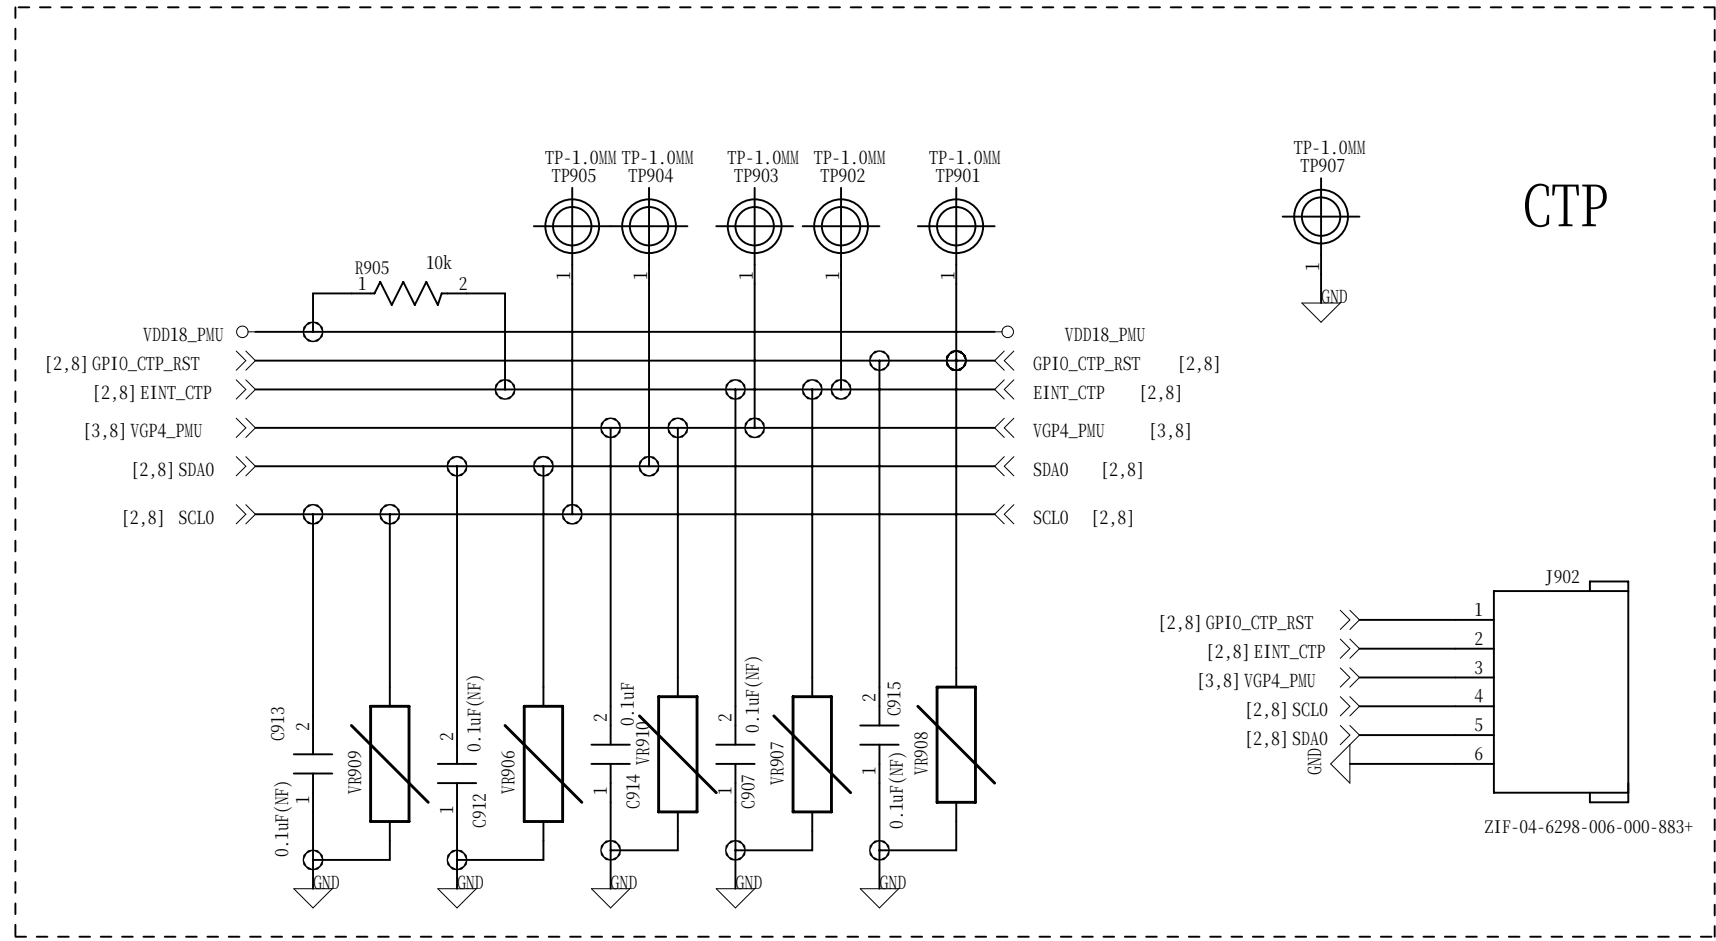


Power Key



DO NOT put pull-up resistor on PWRKEY

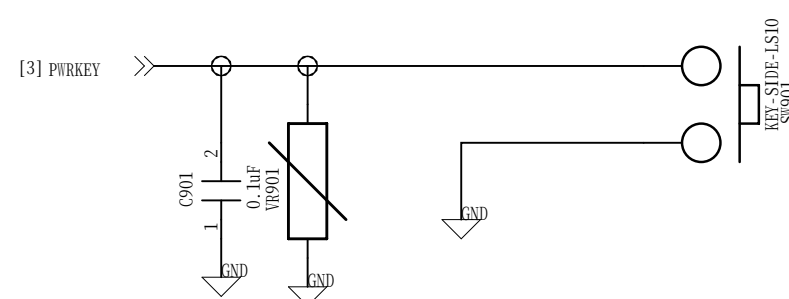

Volume Up

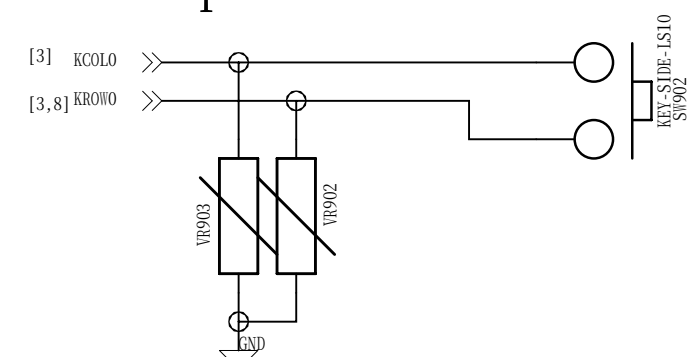


Volume Down

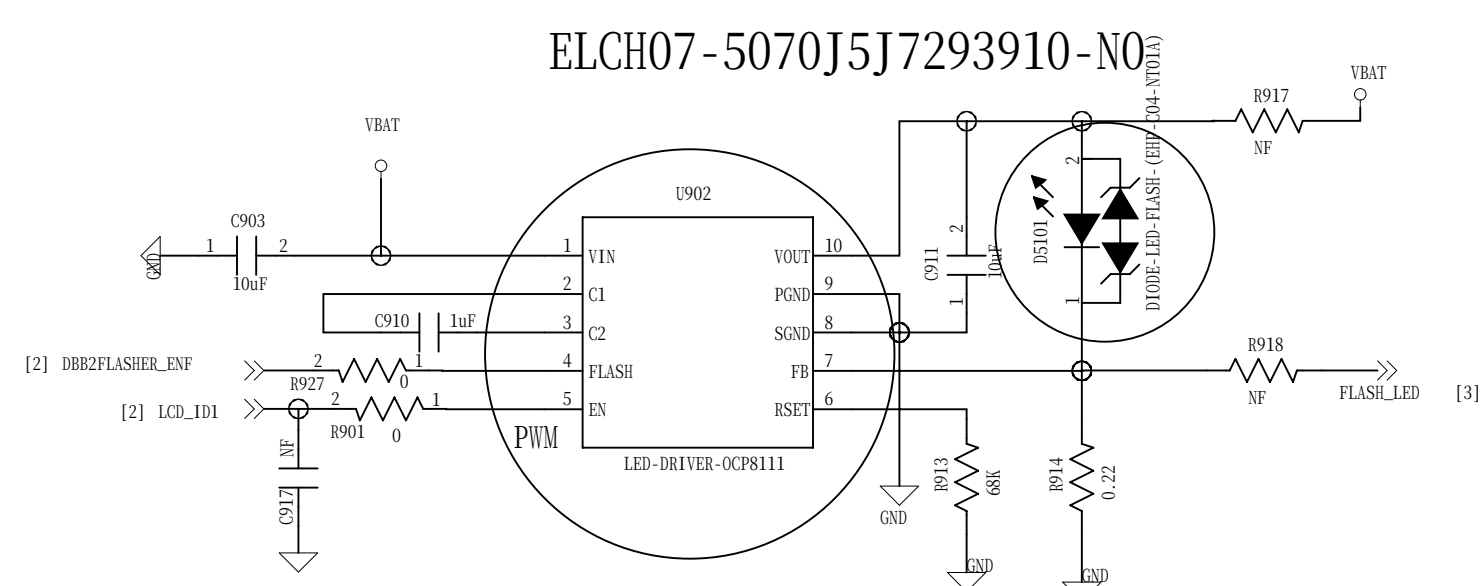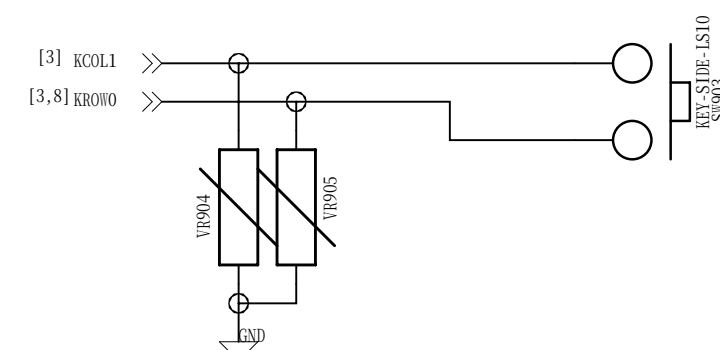

Torch 230mA FLASH 865mA
FLASH LED

Sub Camera



FRONT_camera+LP Sensor+SPK

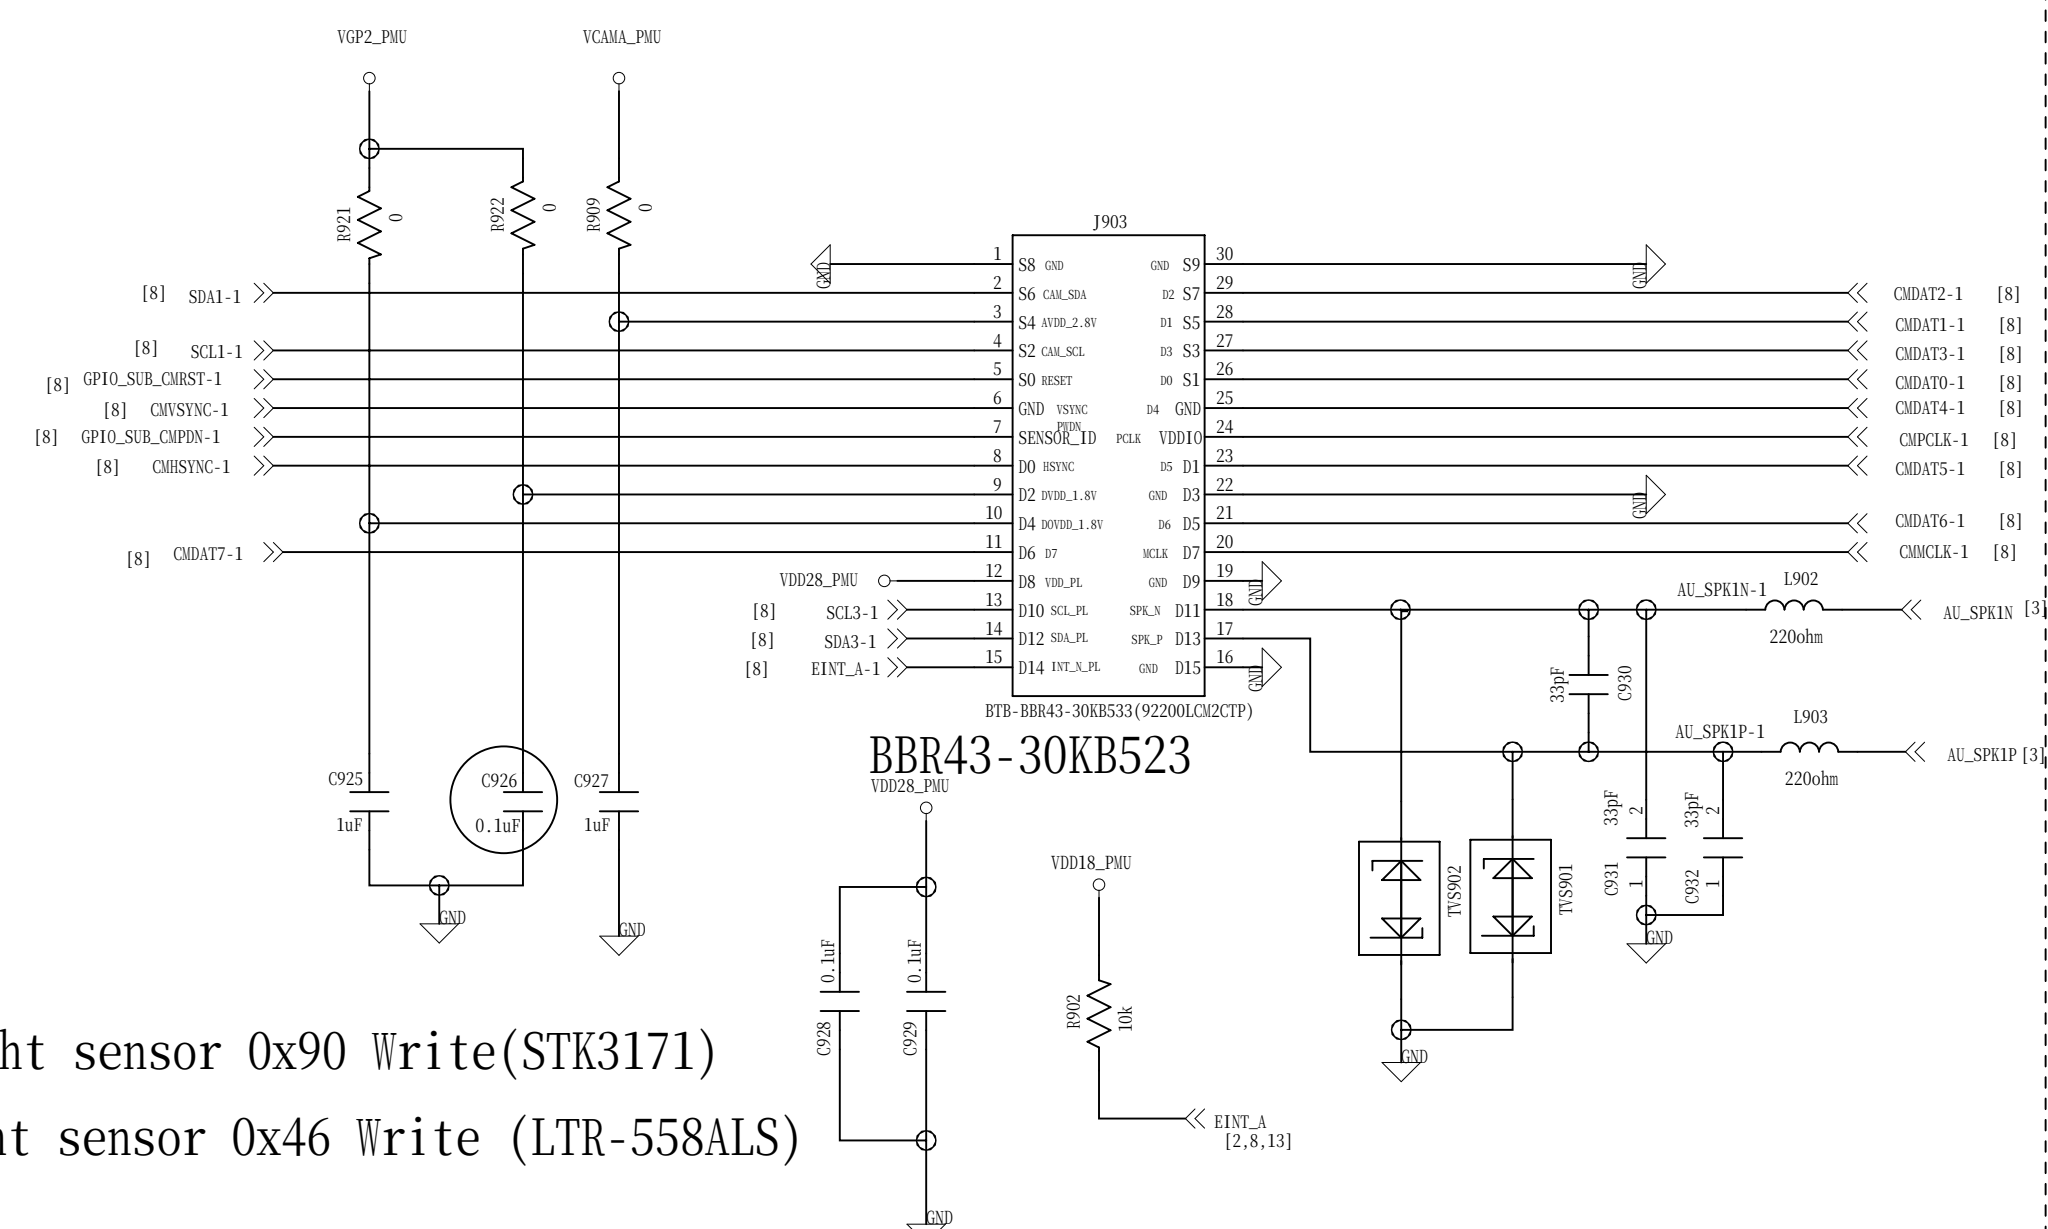

```
light sensor 0x90 Write(STK3171)
```


light sensor 0x46 Write (LTR-558ALS)

Main Camera / Sub Camera share power domain design
should double check the voltage level is compatible

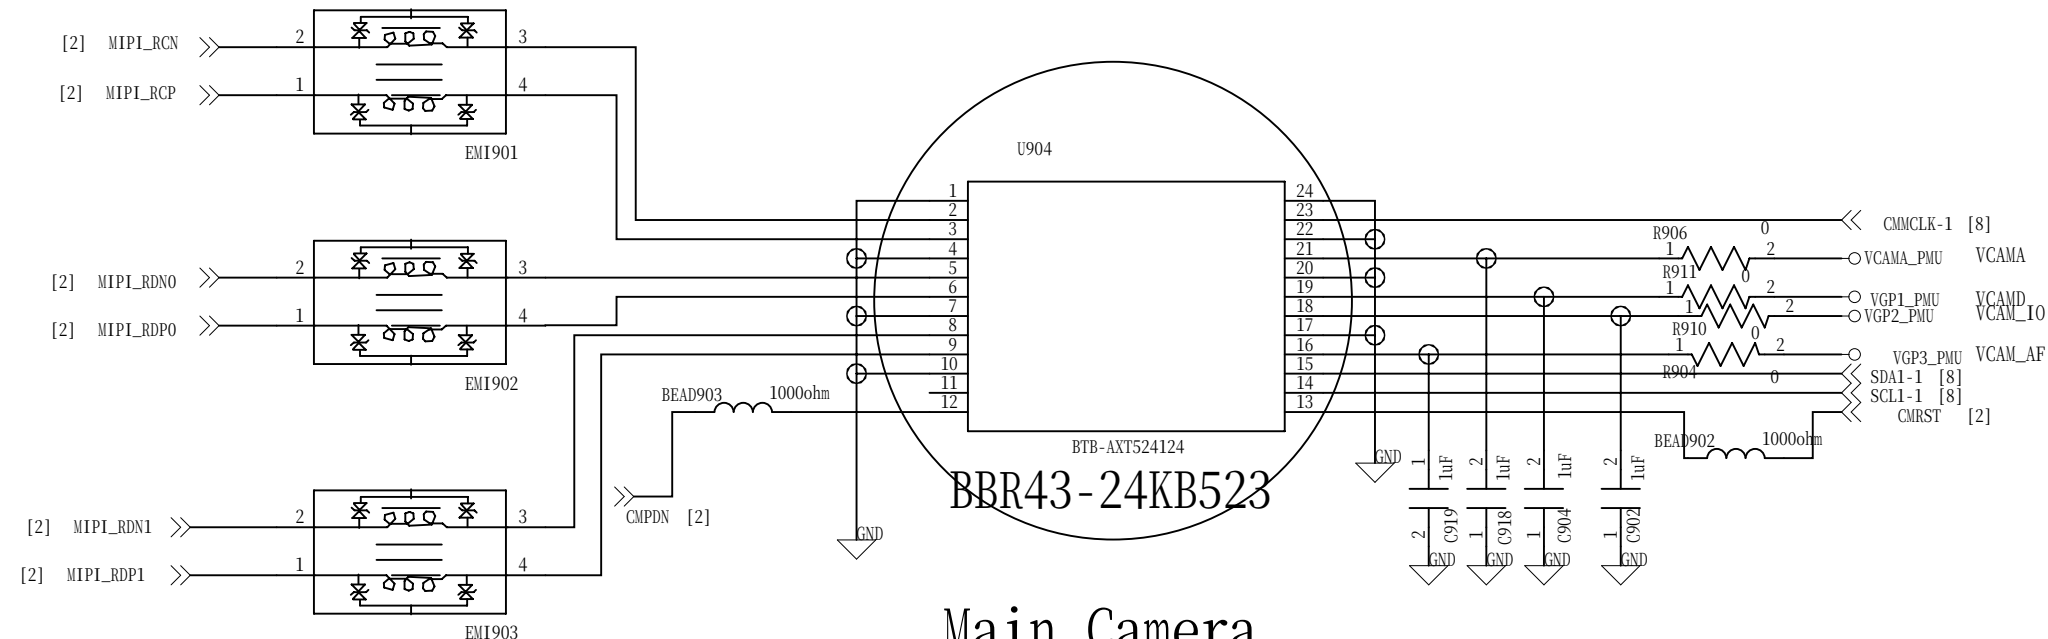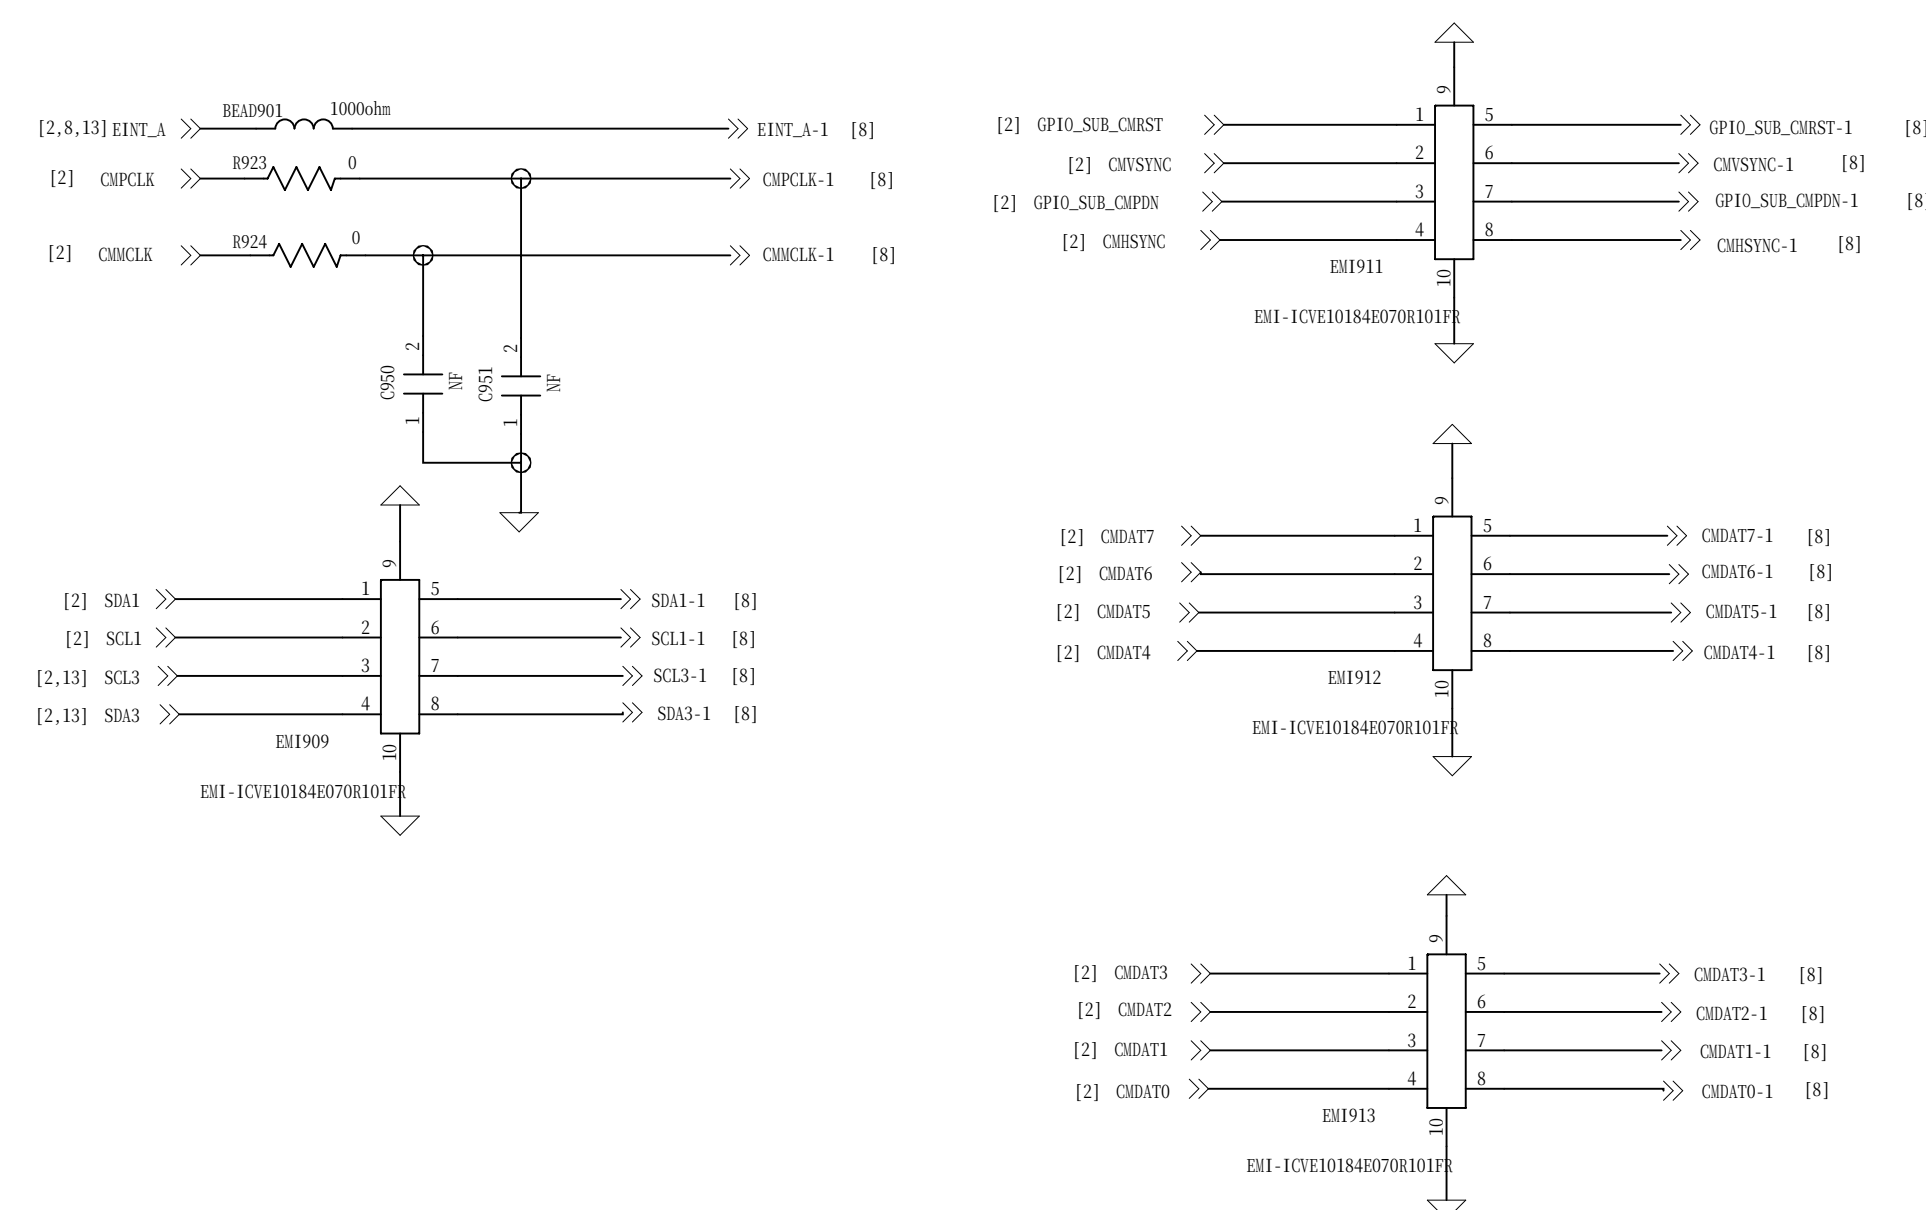


Main Camera

<http://www.xinxunwei.com> TEL:400-800-9990 QQ:4006538586



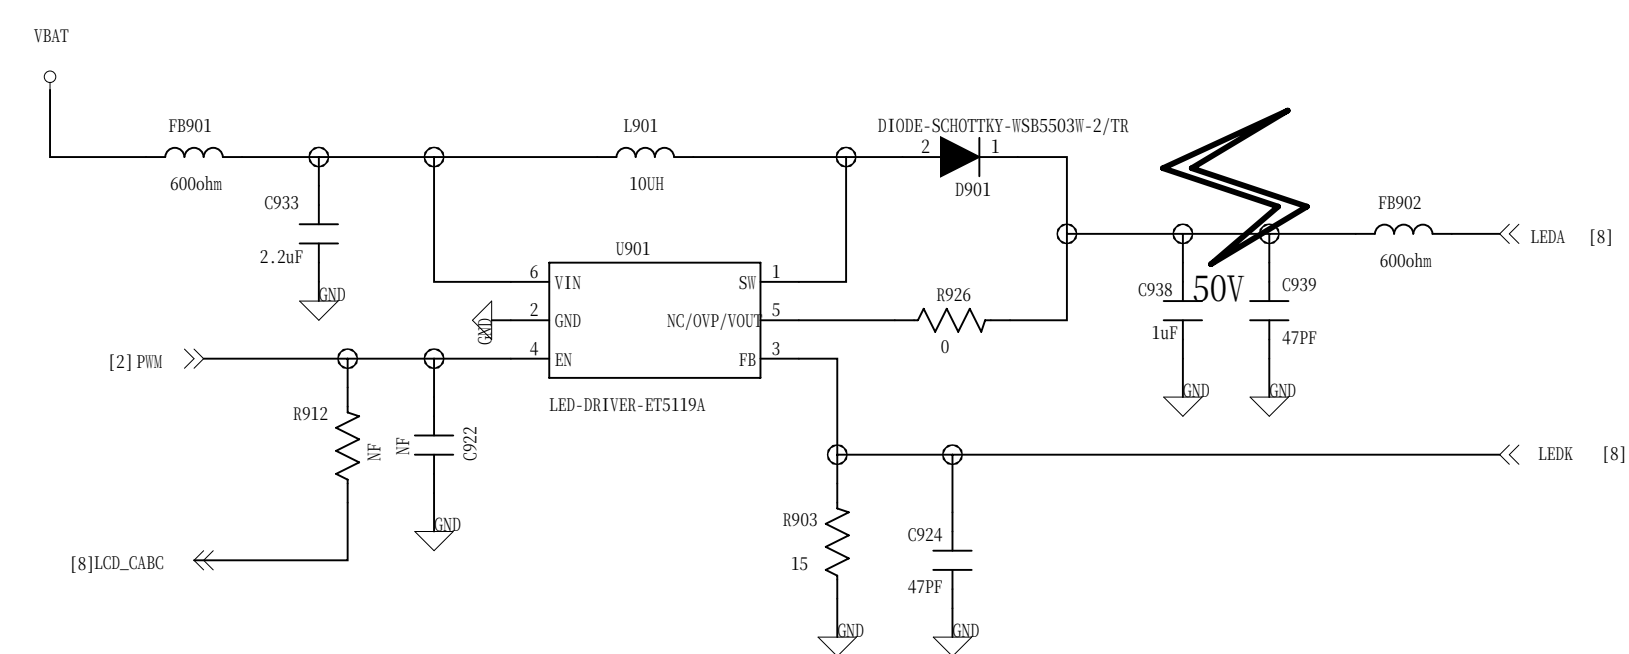


Backlight LED Driver

Main LCM

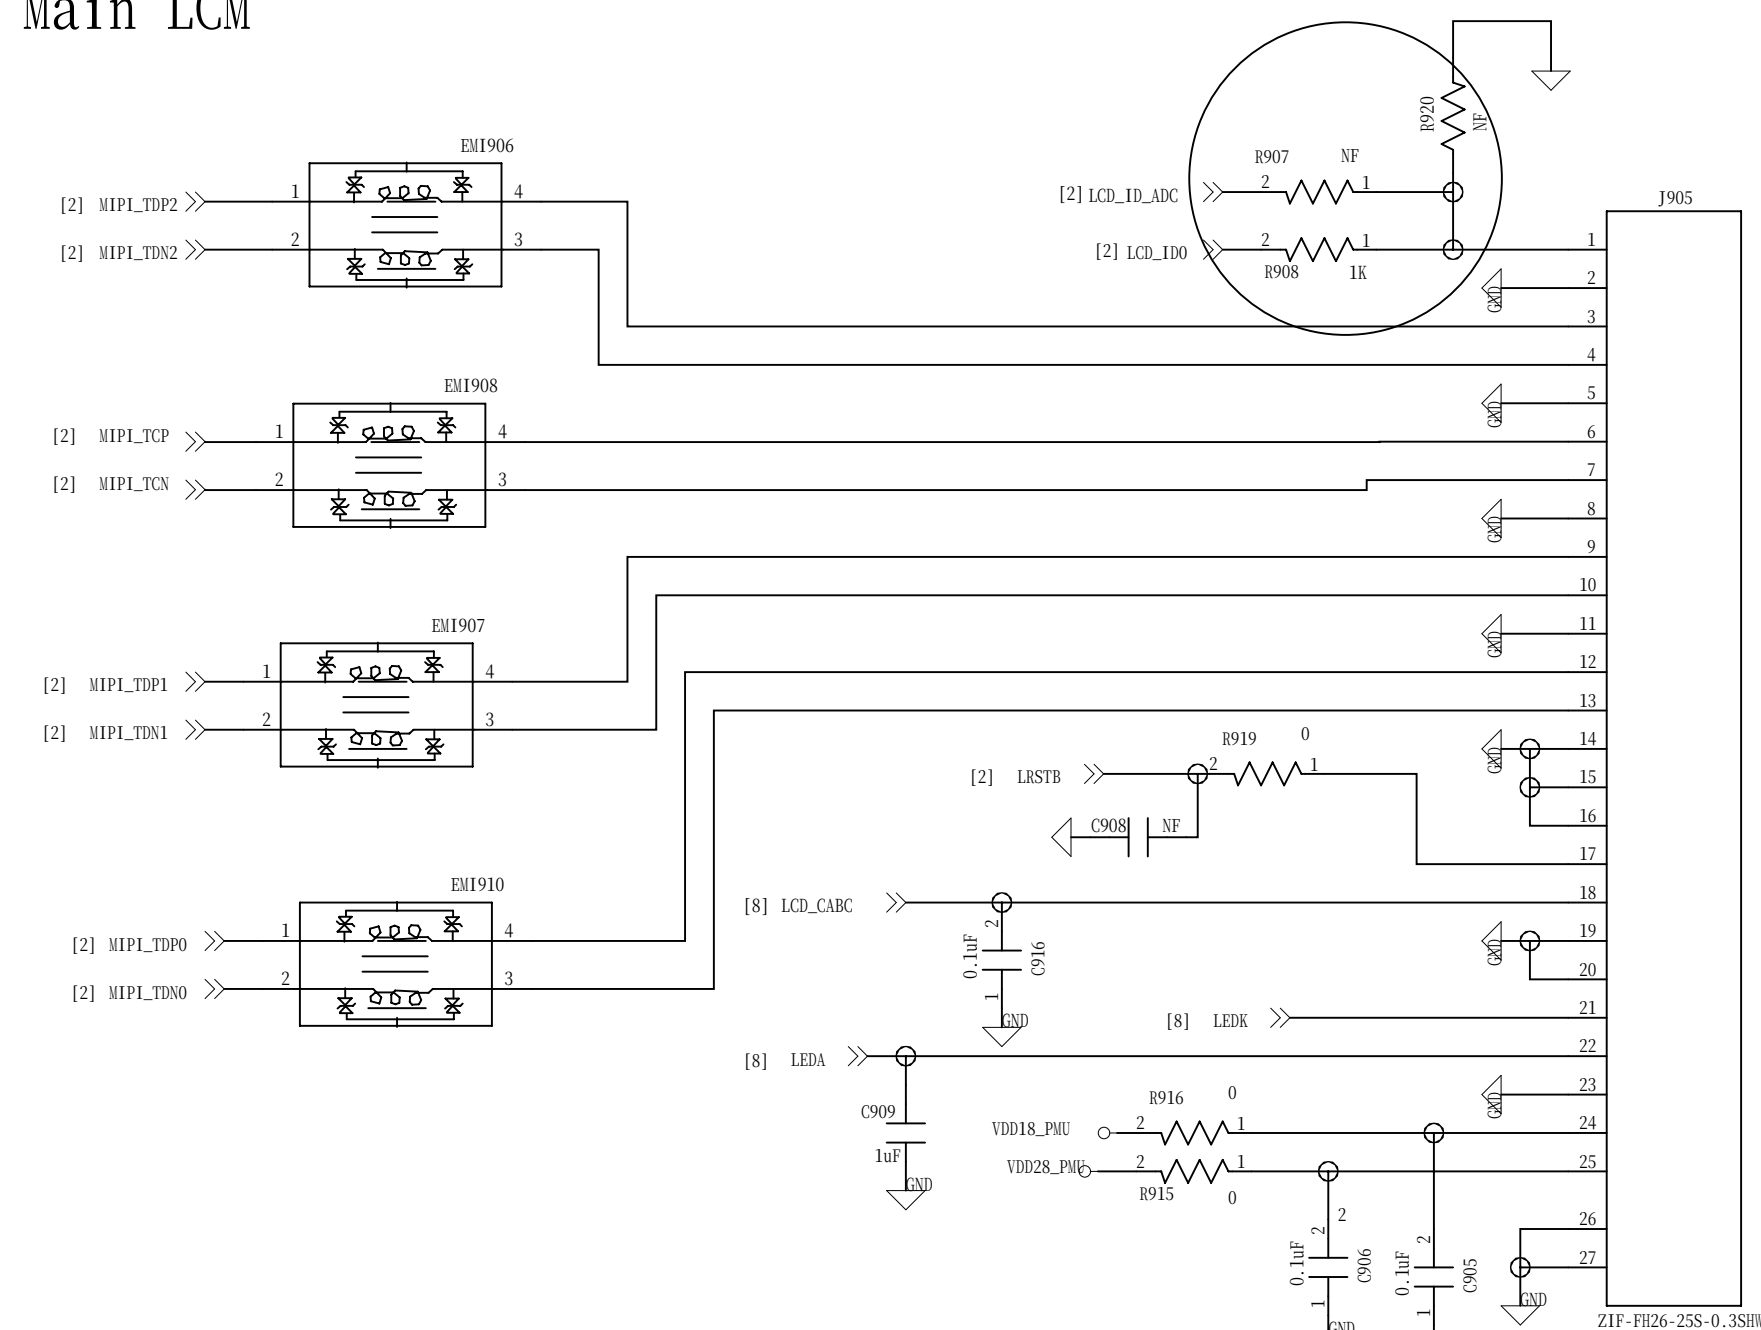

3D LCM (Reserved)

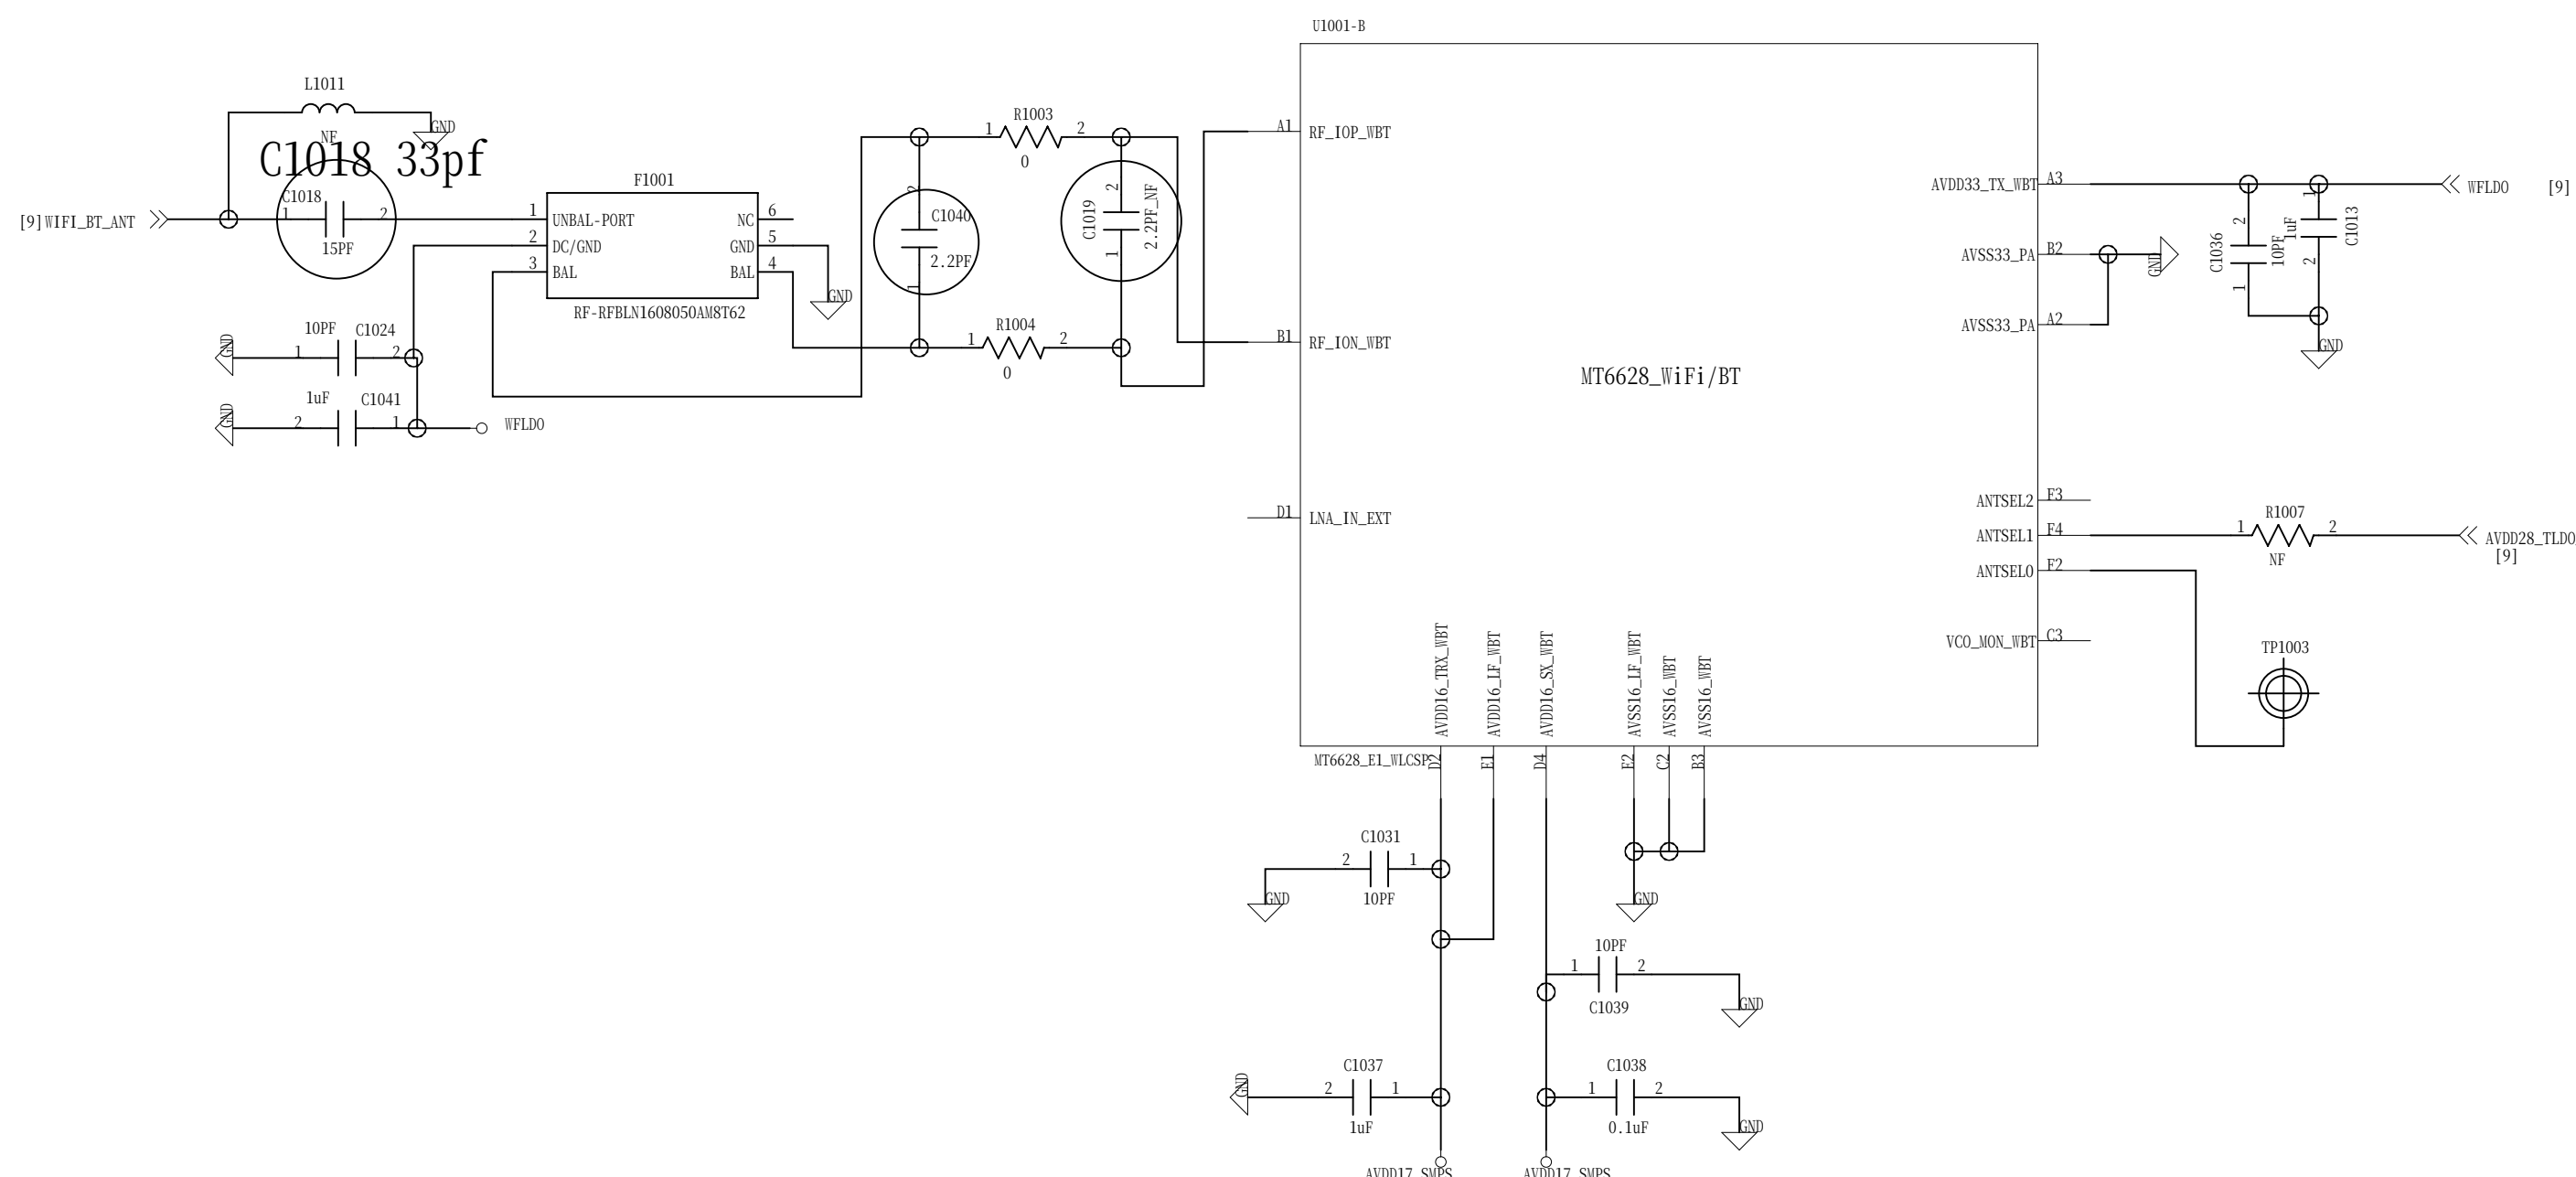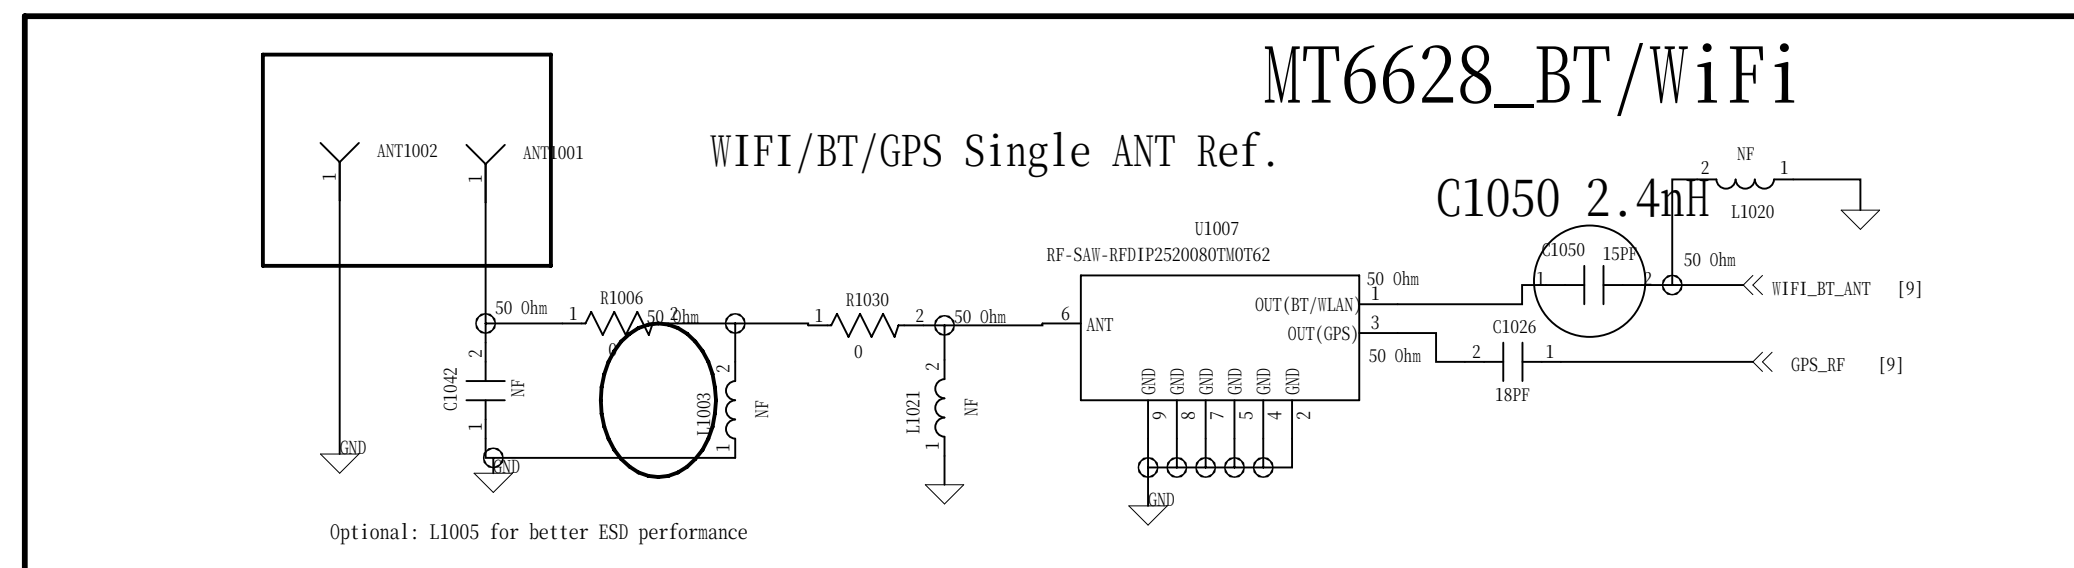
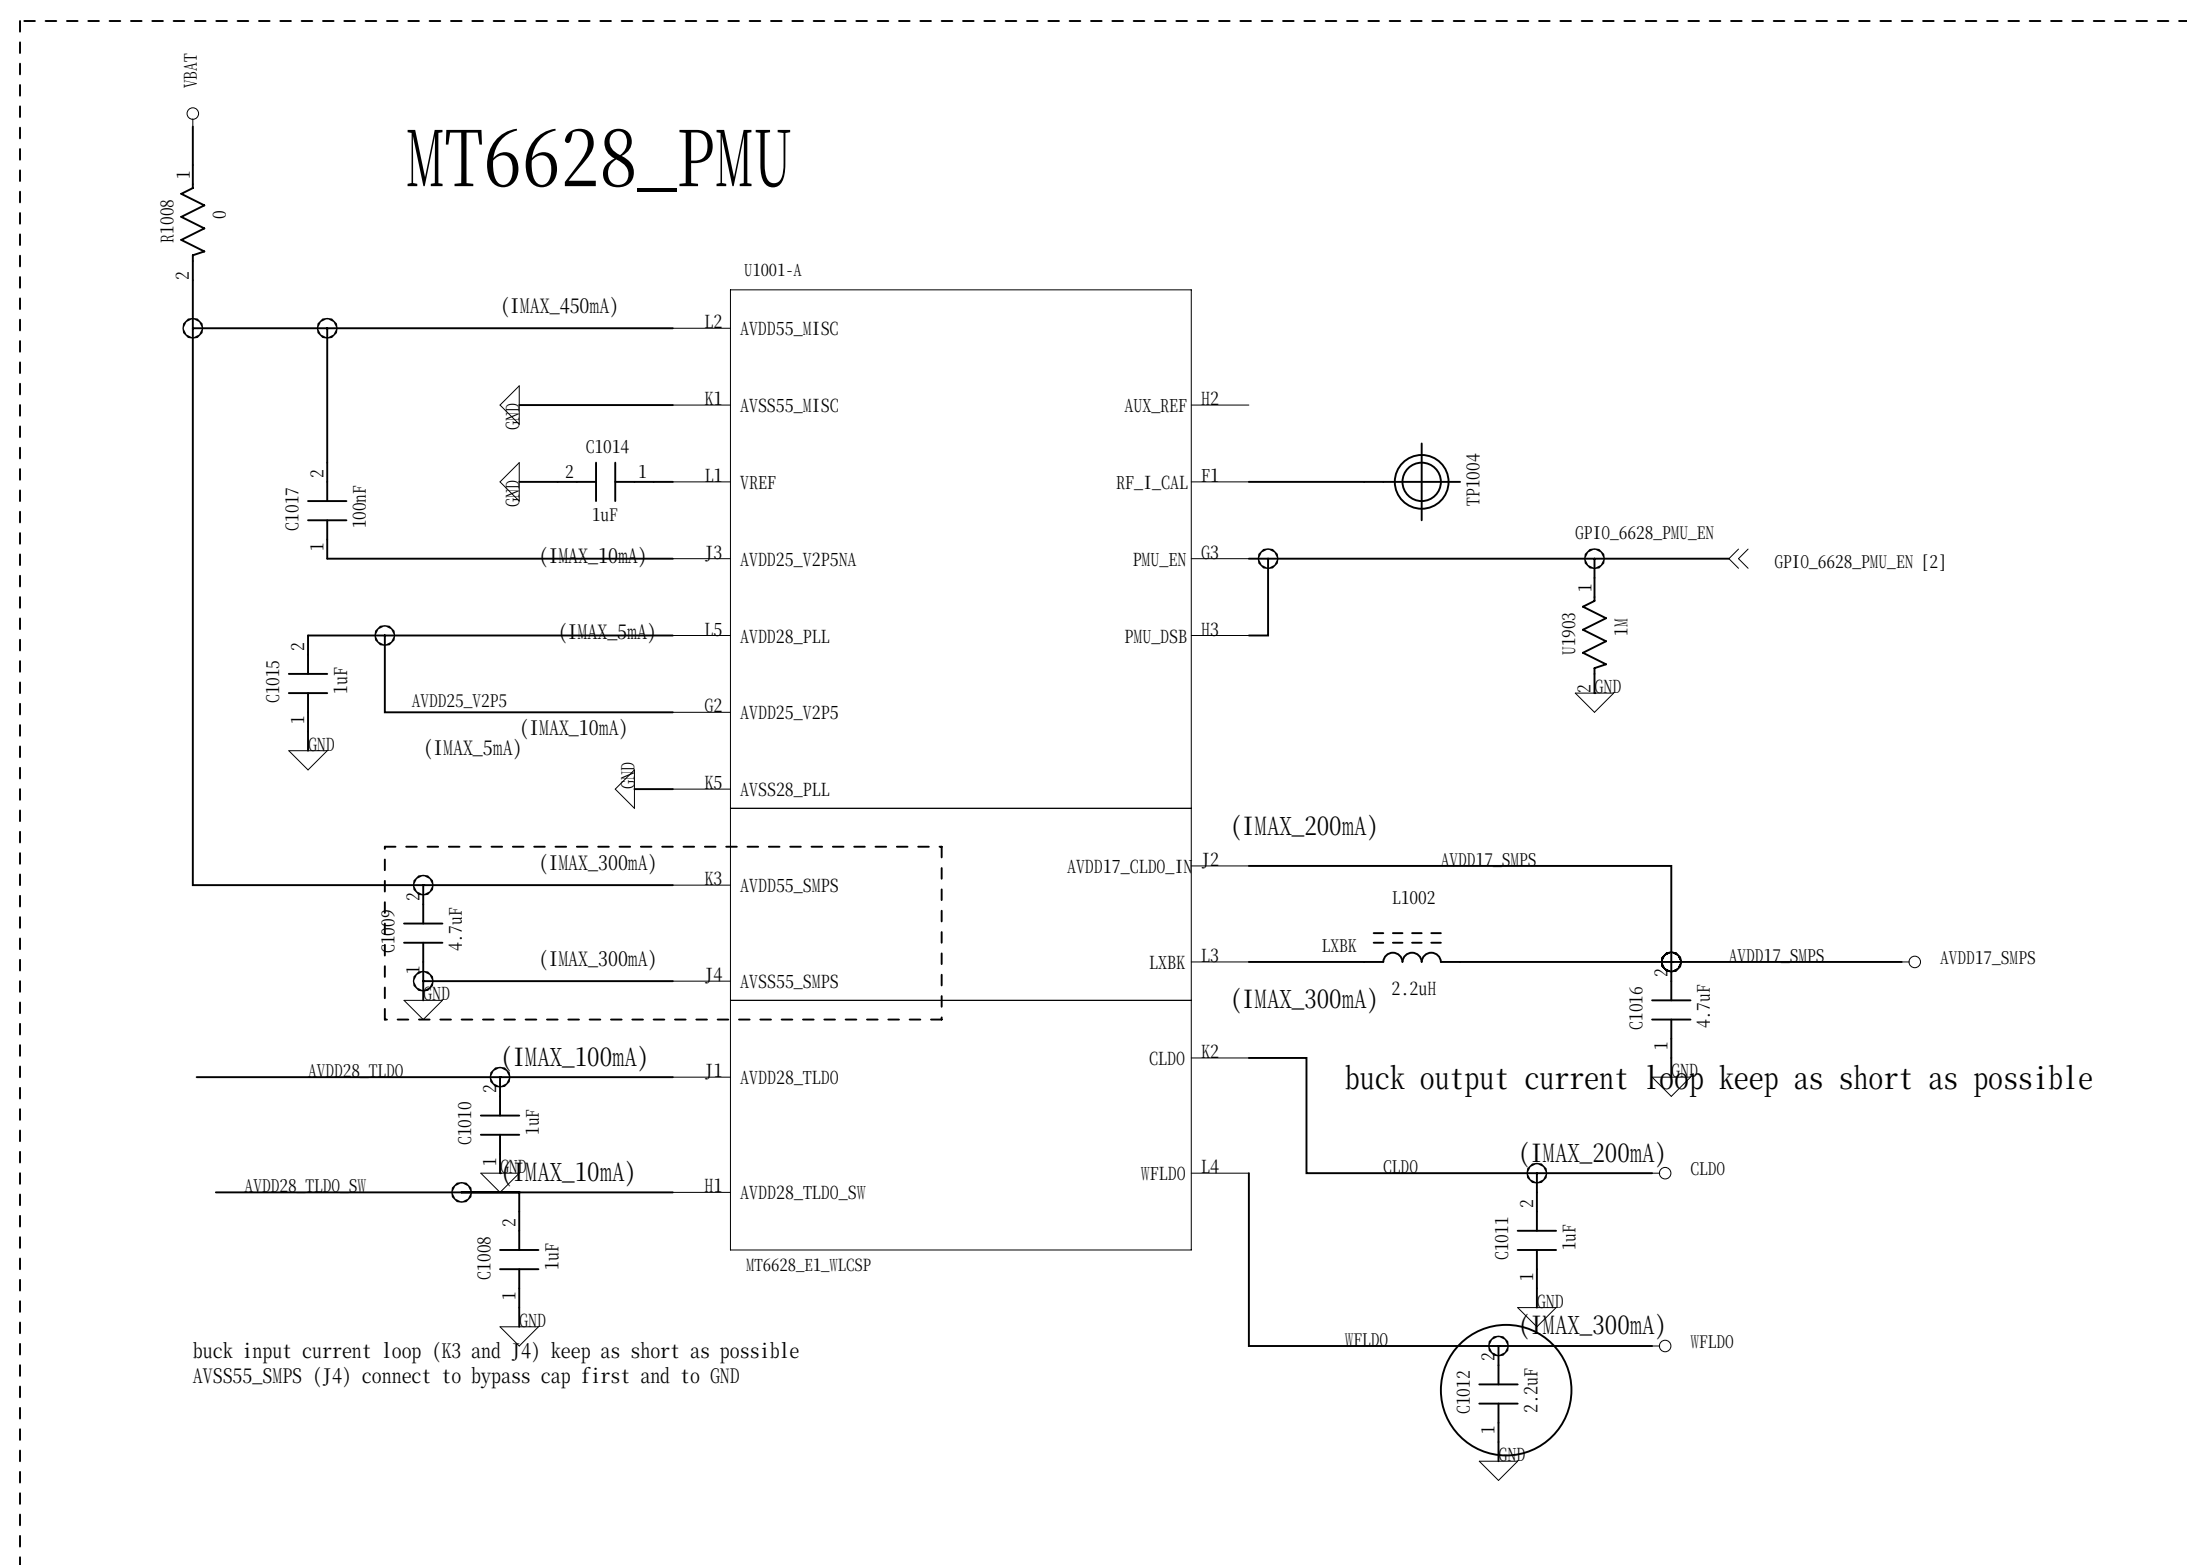





MT6628_GPI0			
WiFi_Host ANTSEL-2	0	SD10	
	1	SP1	


Xtal/OCs ANTSEL-1 (b`0)	00	TCXO	
	01	Xtal	
	10	EXTCK	
	11	RESERVED	

BT/COM Host UART_RTS	0	UART	MT6628E2
	1	SDIO	MT6628E2


BT/COM Host ANTSEL-0	0	SDIO	MT6628E1
	1	UART	MT6628E1

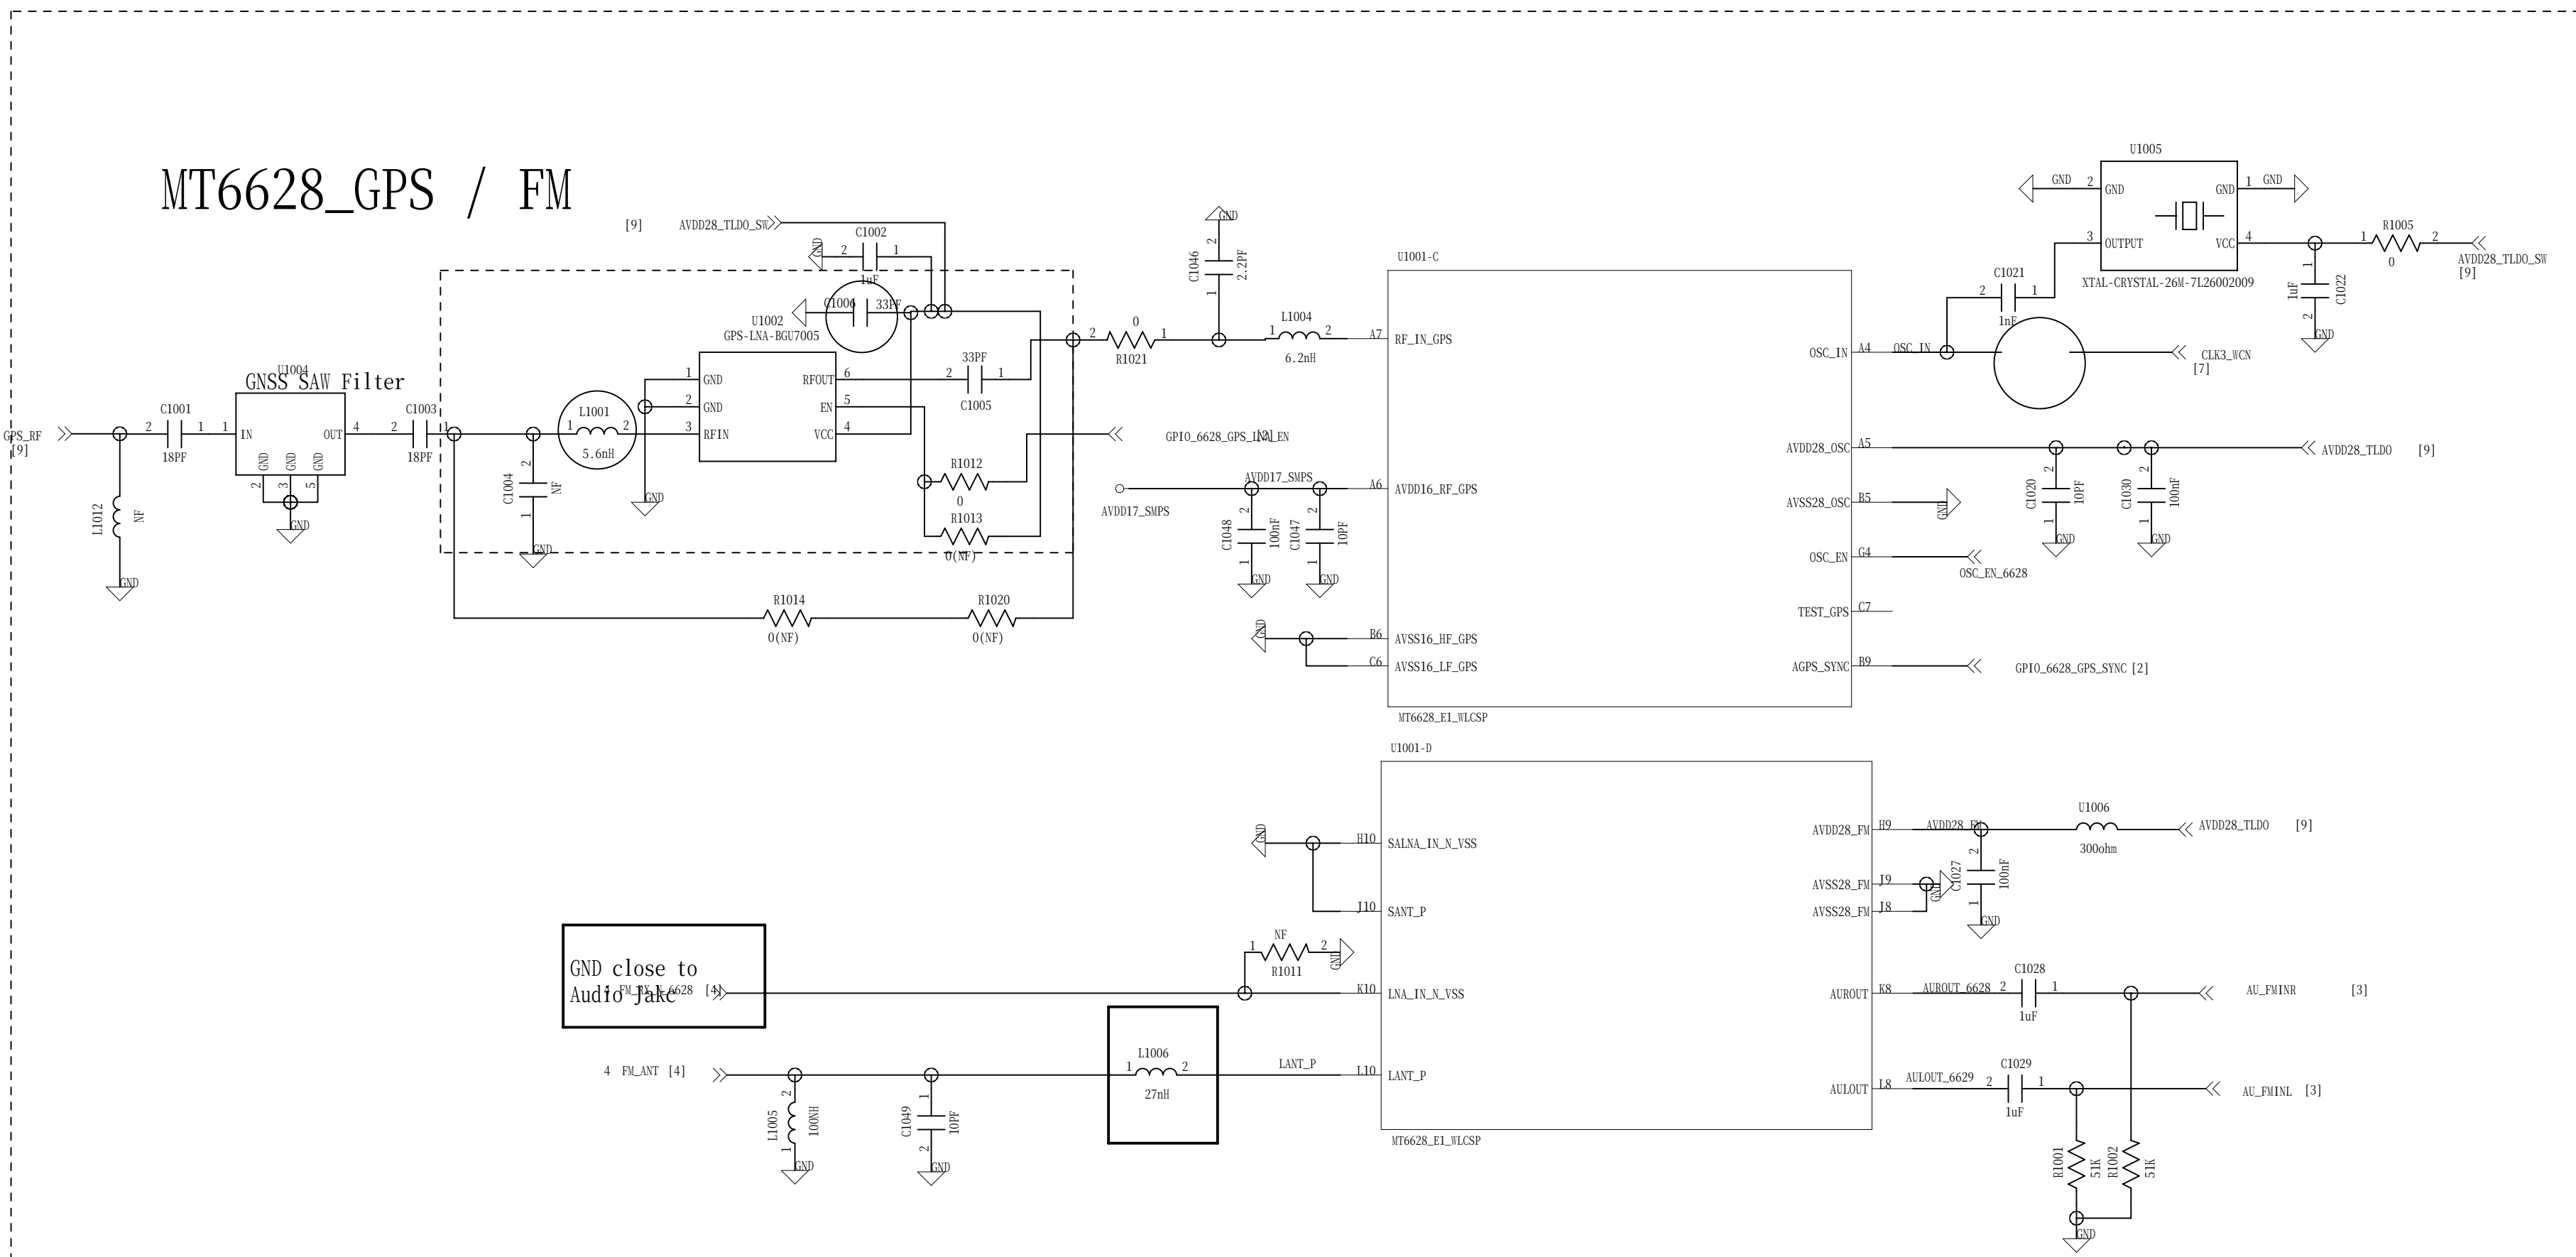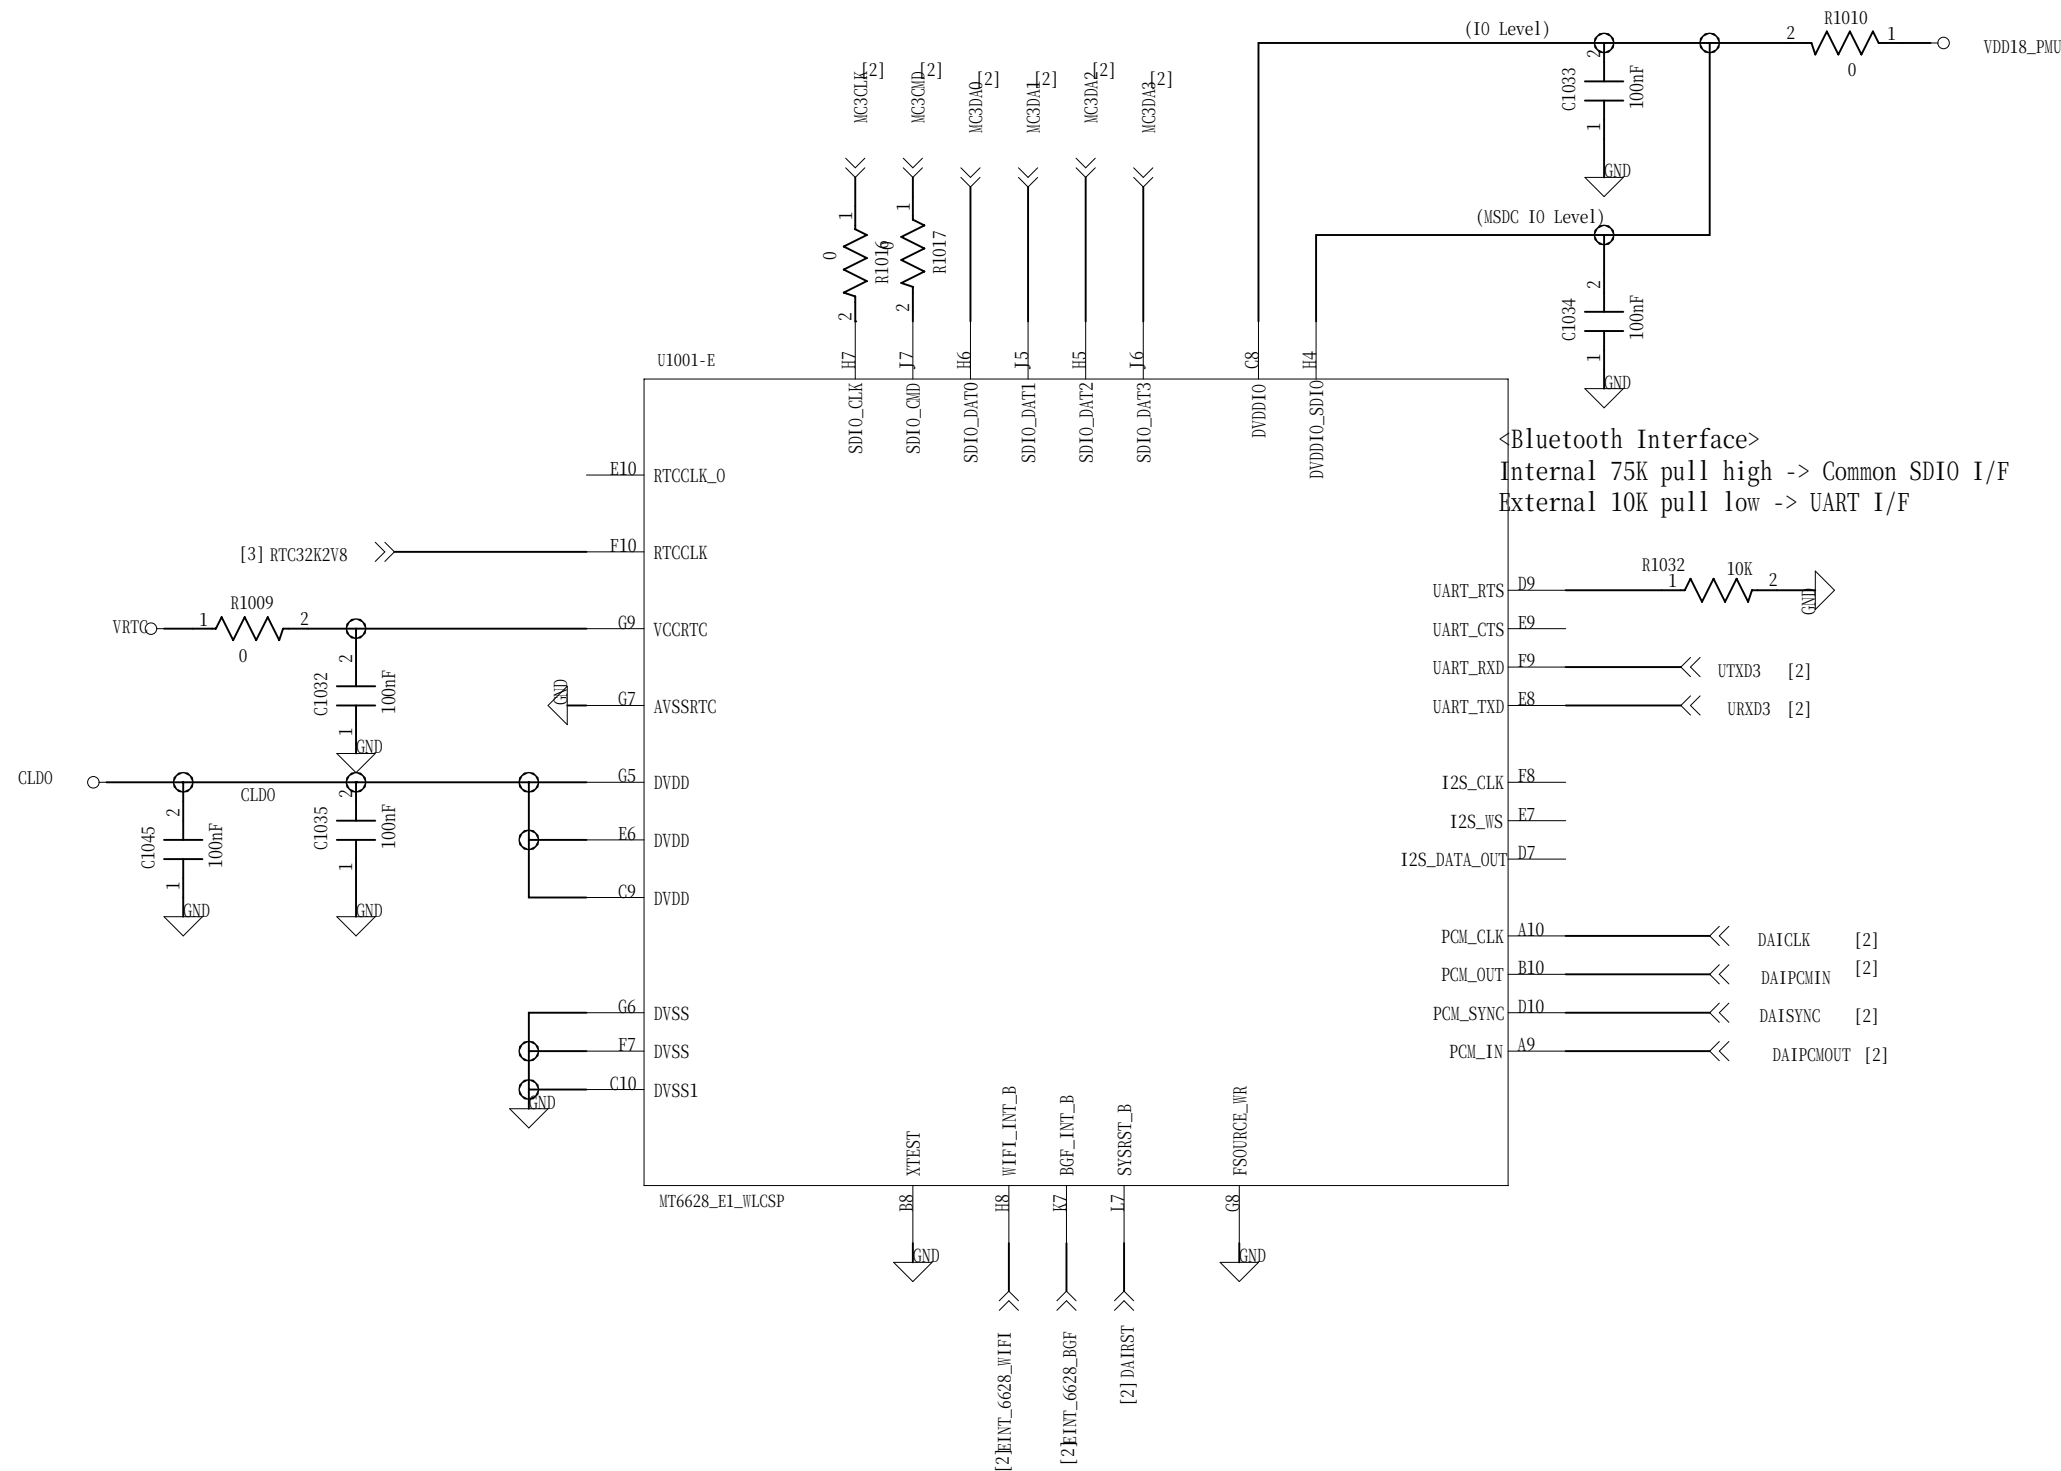

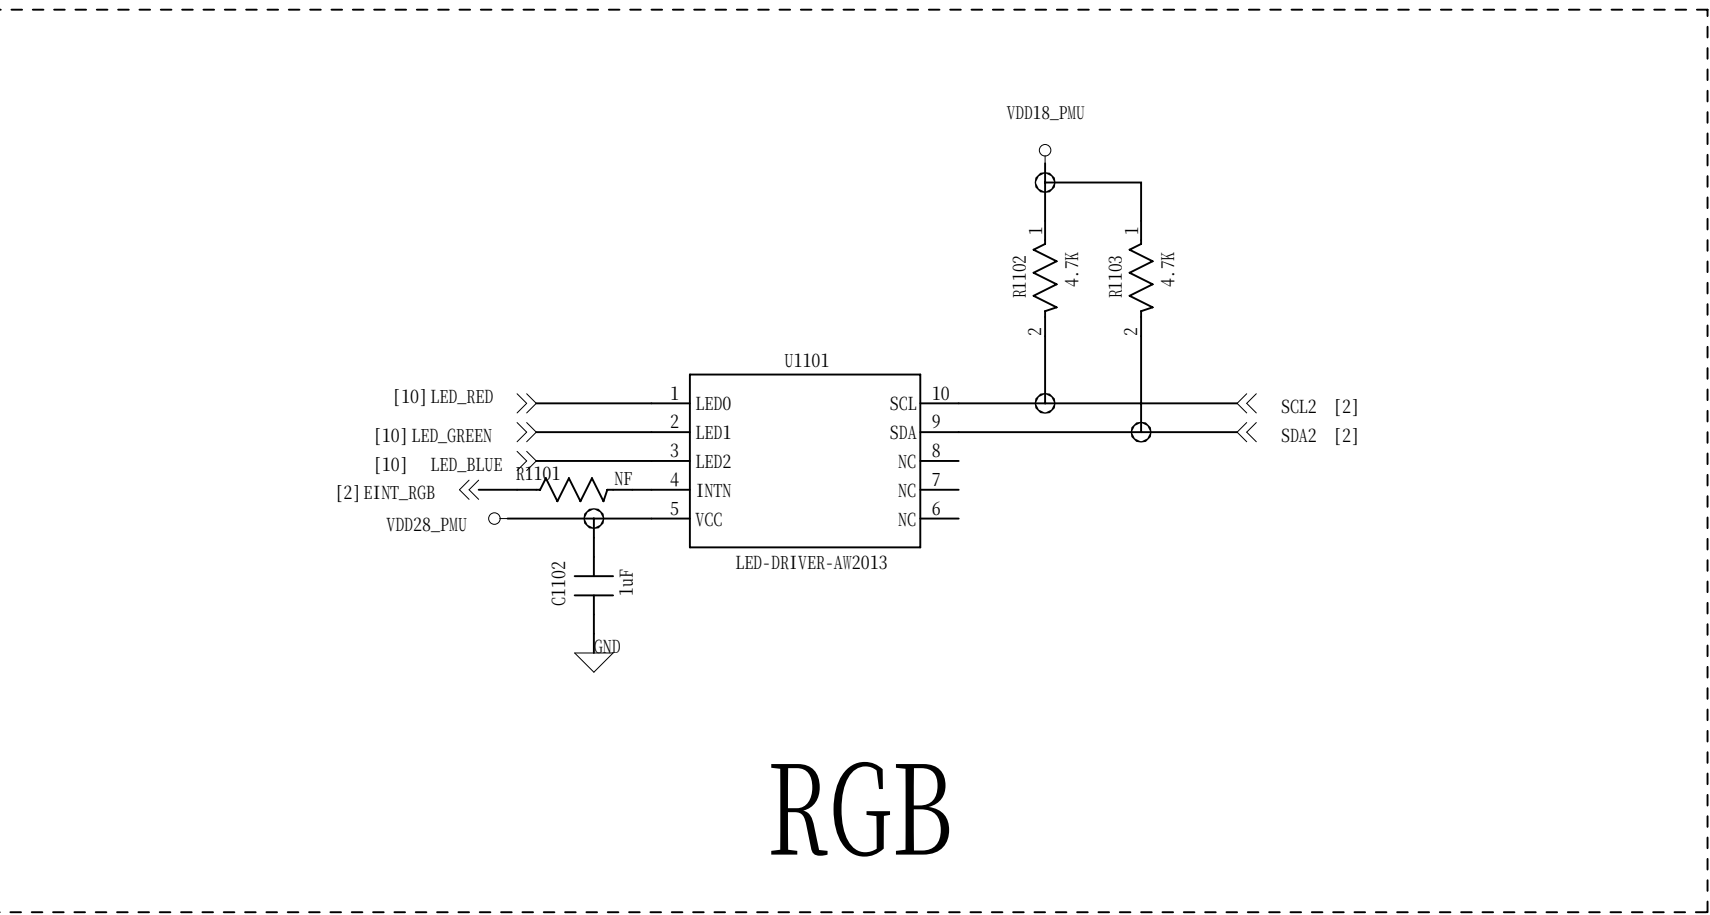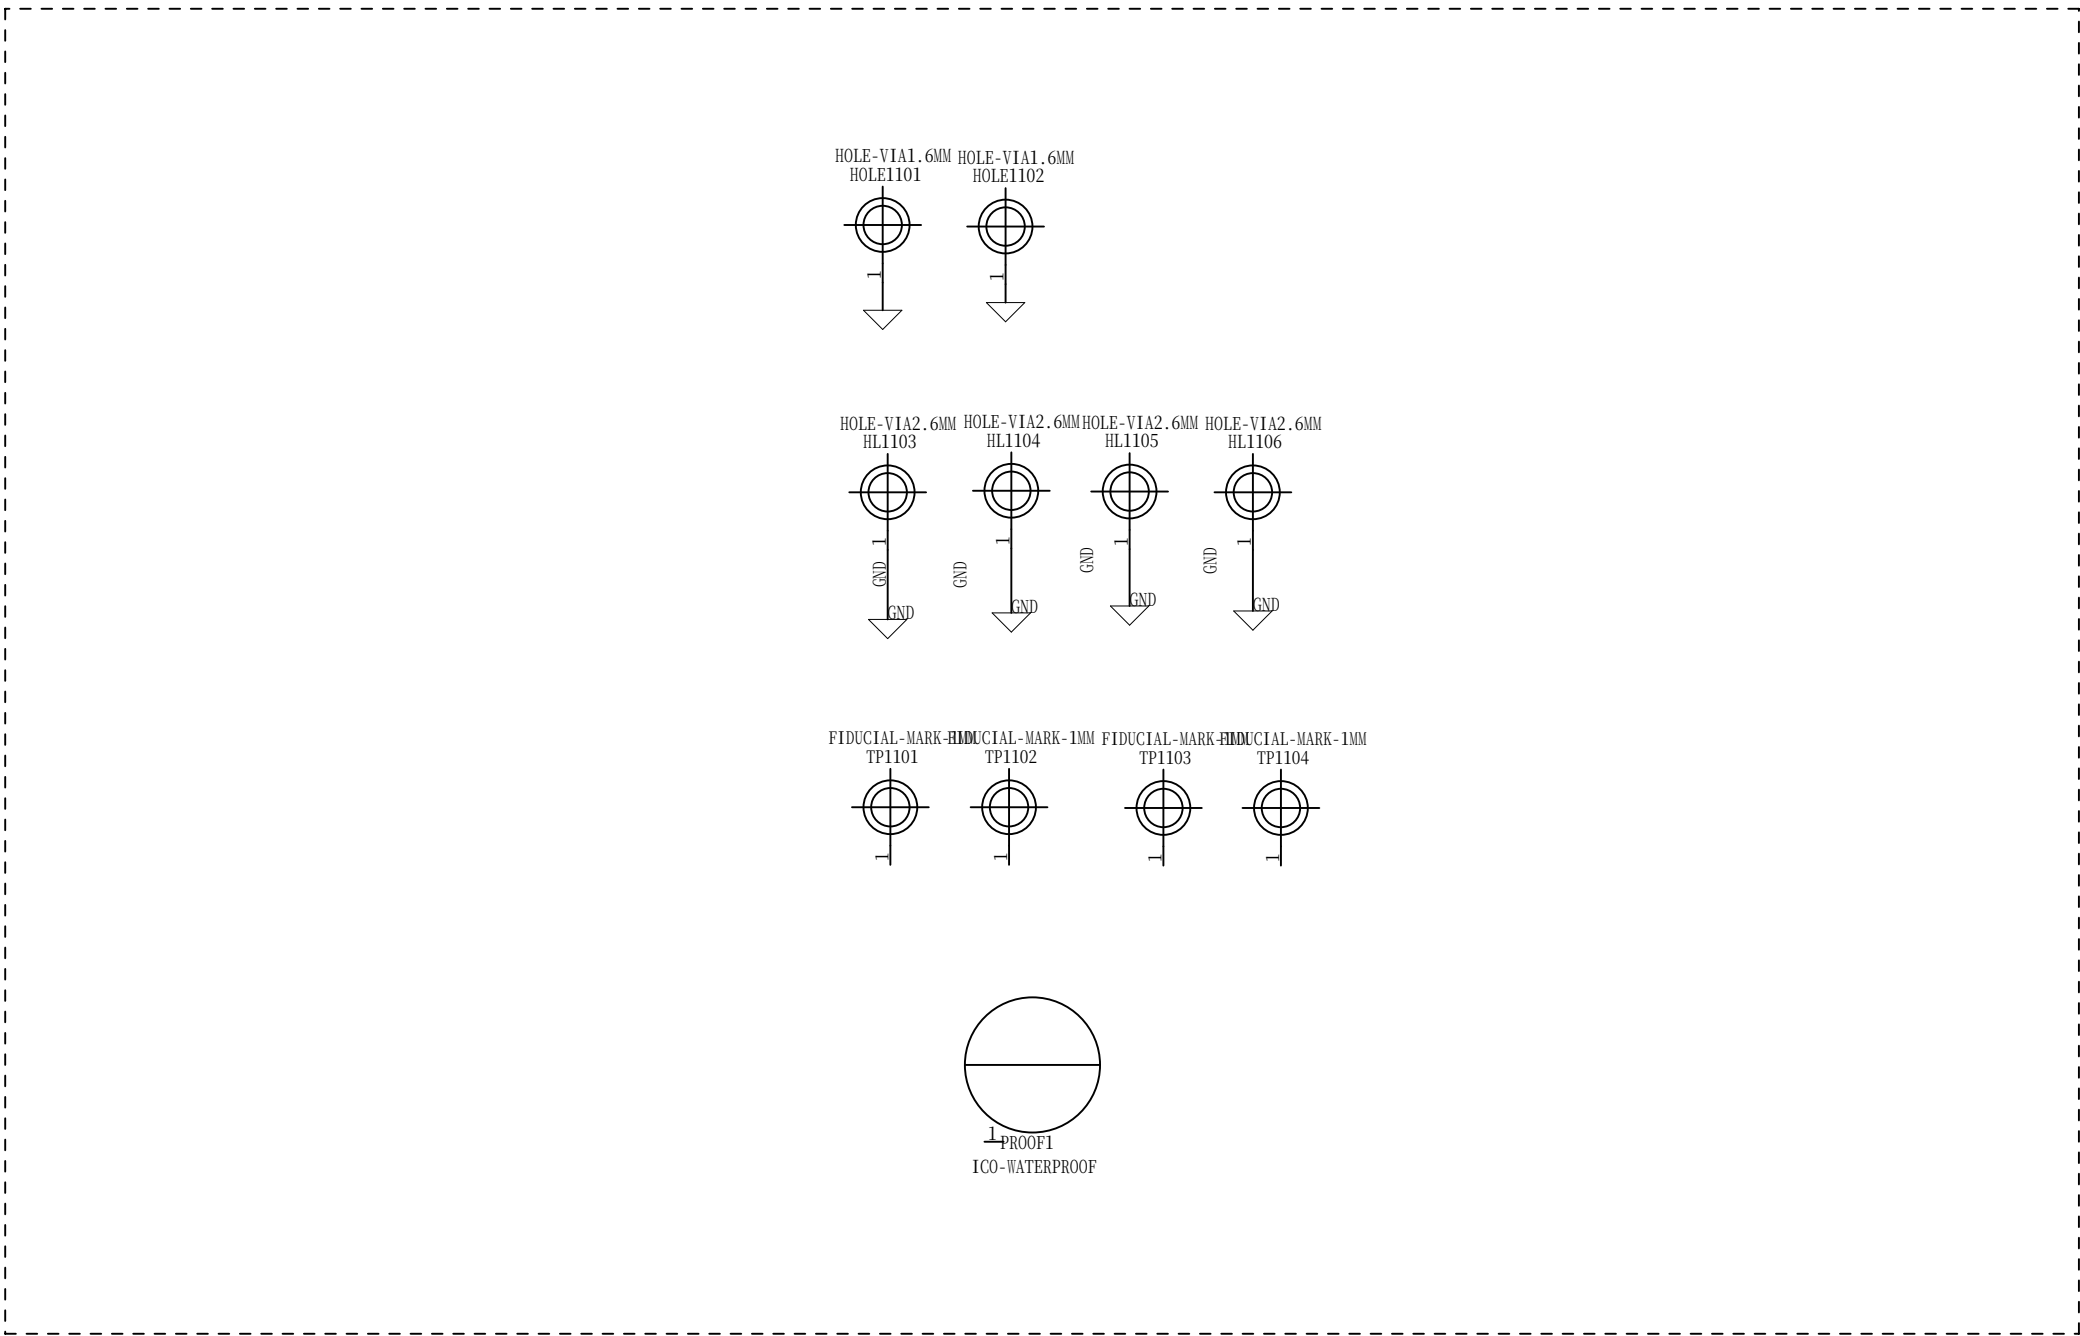
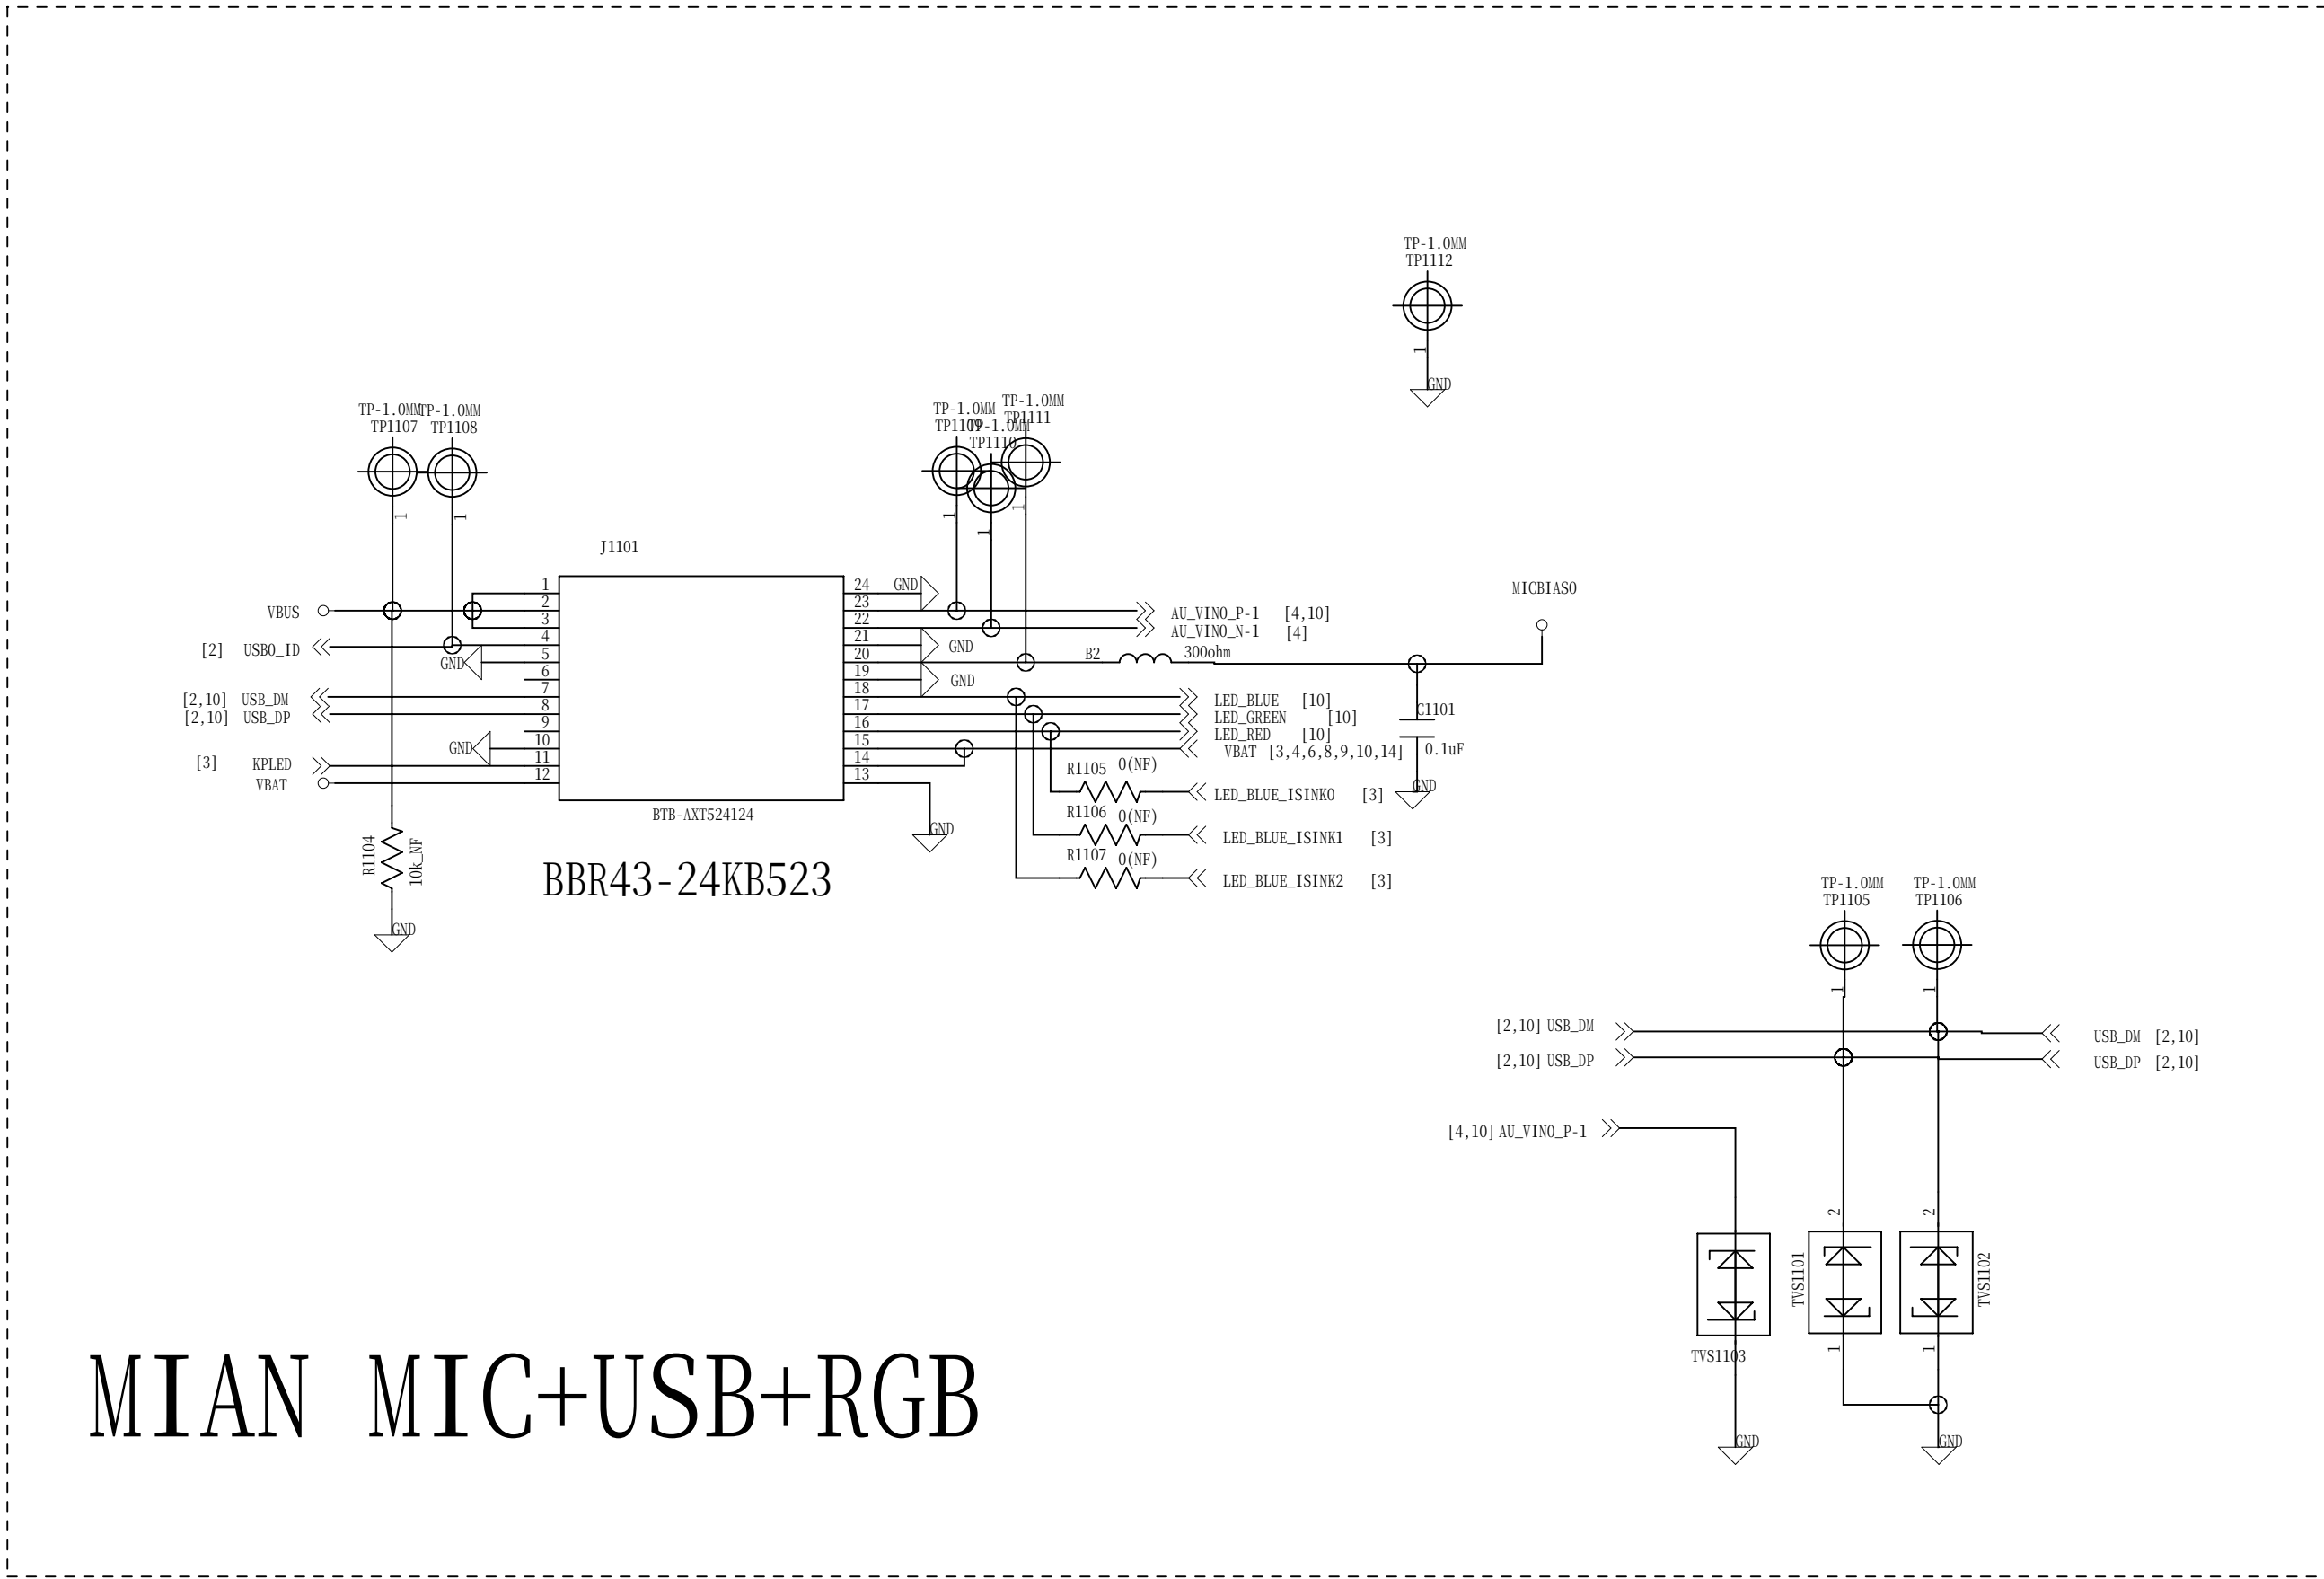


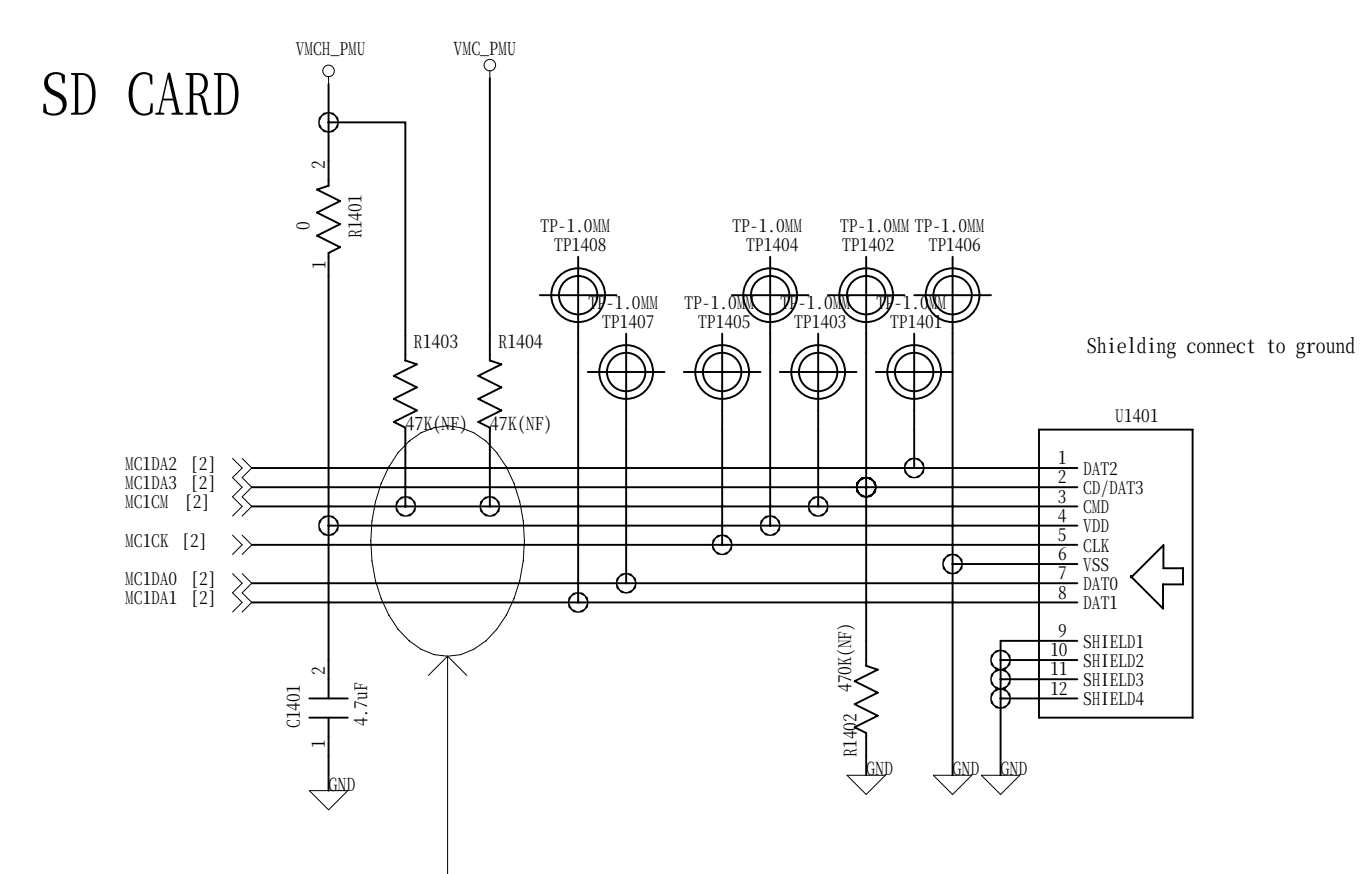

T-card ESD protection is optional depends on
T-card's type and position

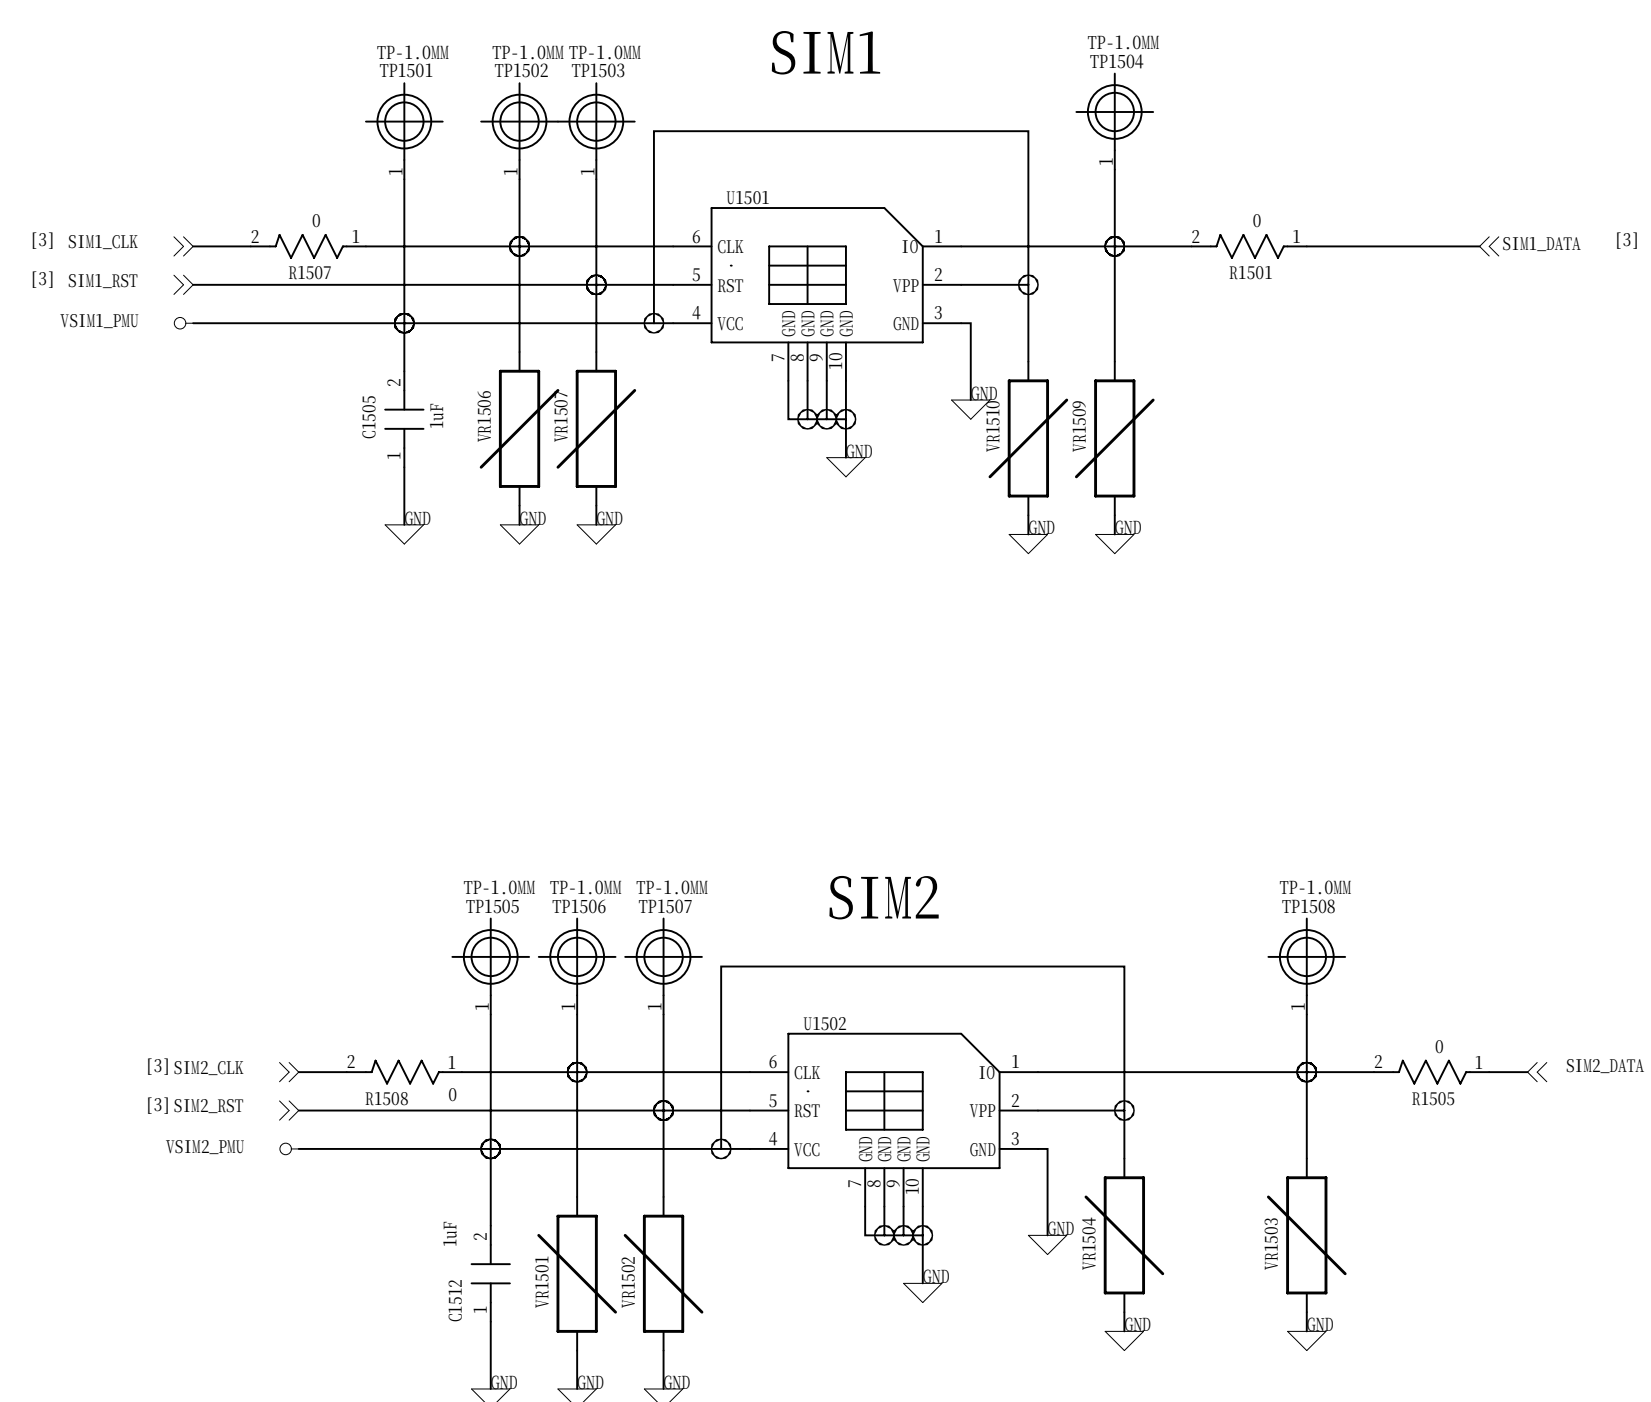


Gsensor

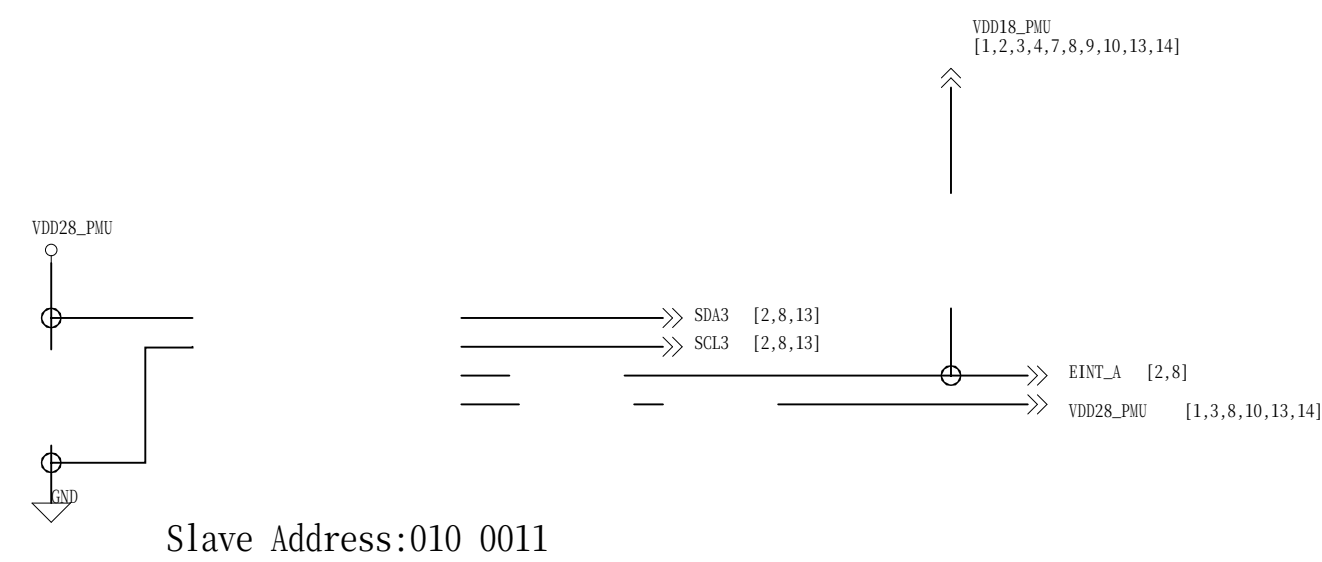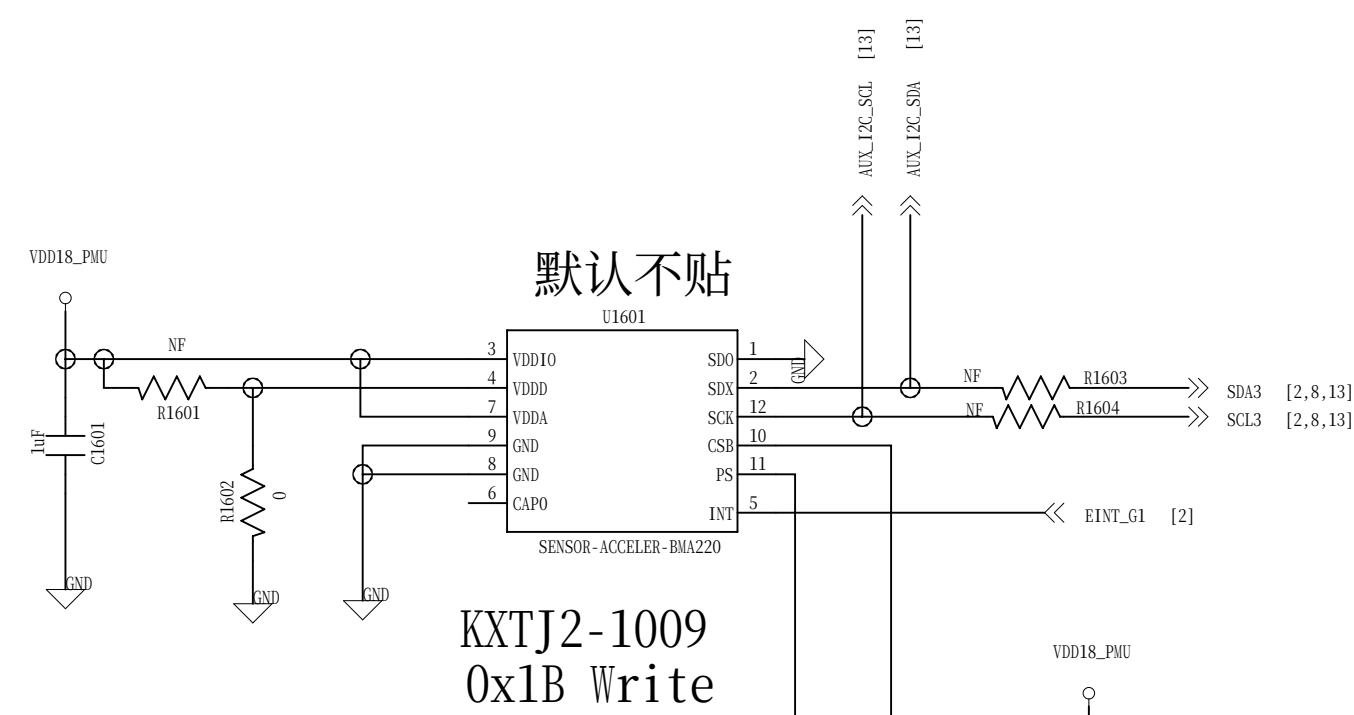


Ambient Light Sensor with Proximity Sensor

Gyroscope

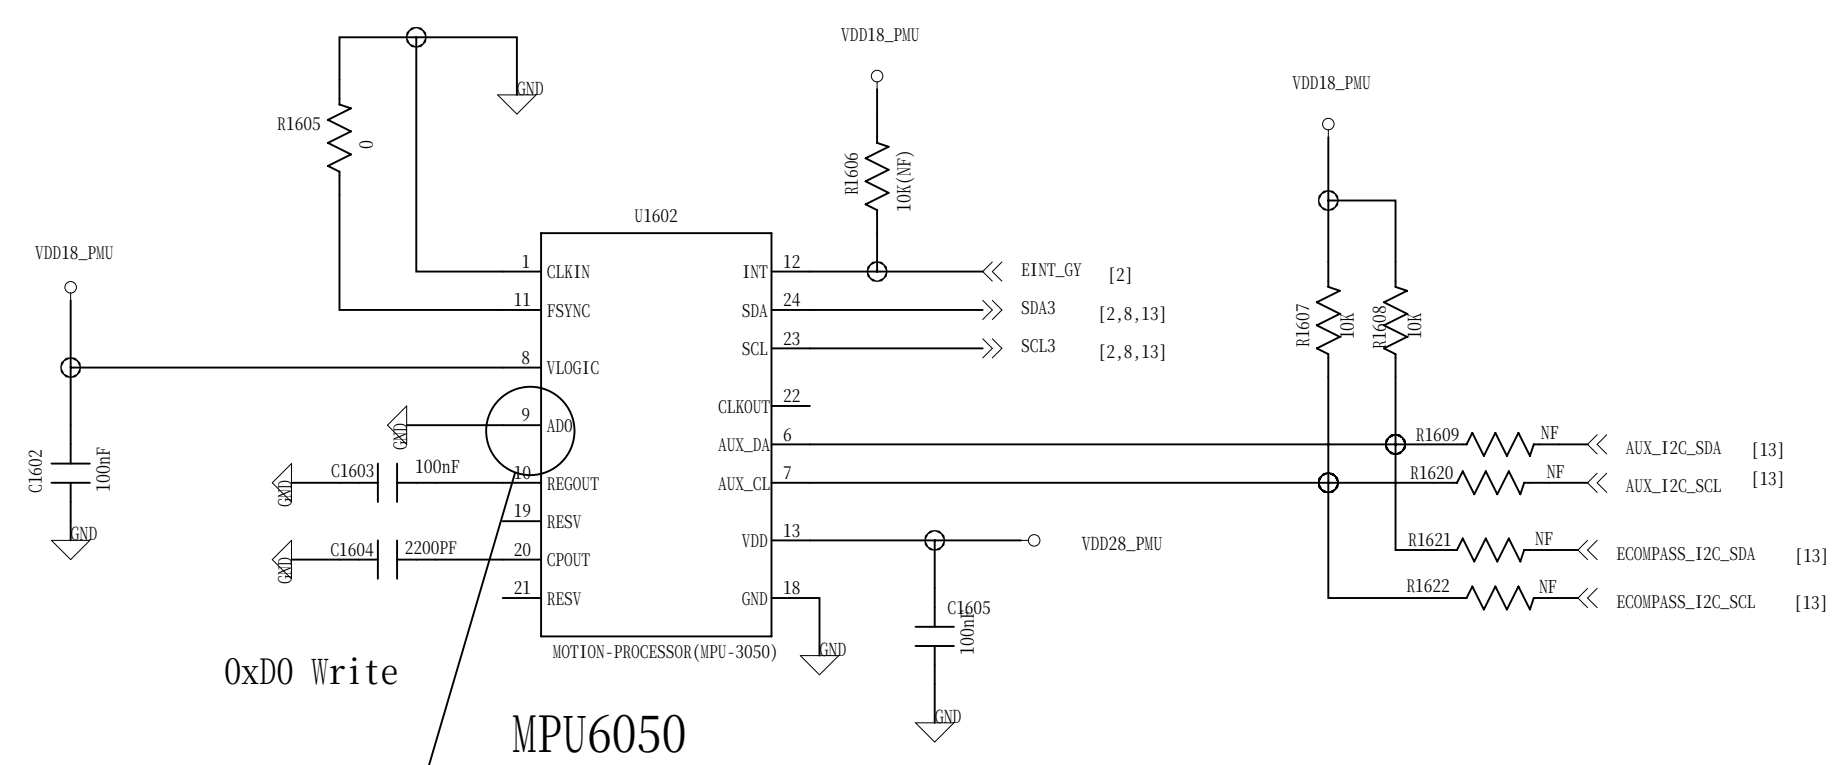


AD0=0 7b1101000 0x68
AD0=1 7b1101001 0x69

M-Sensor

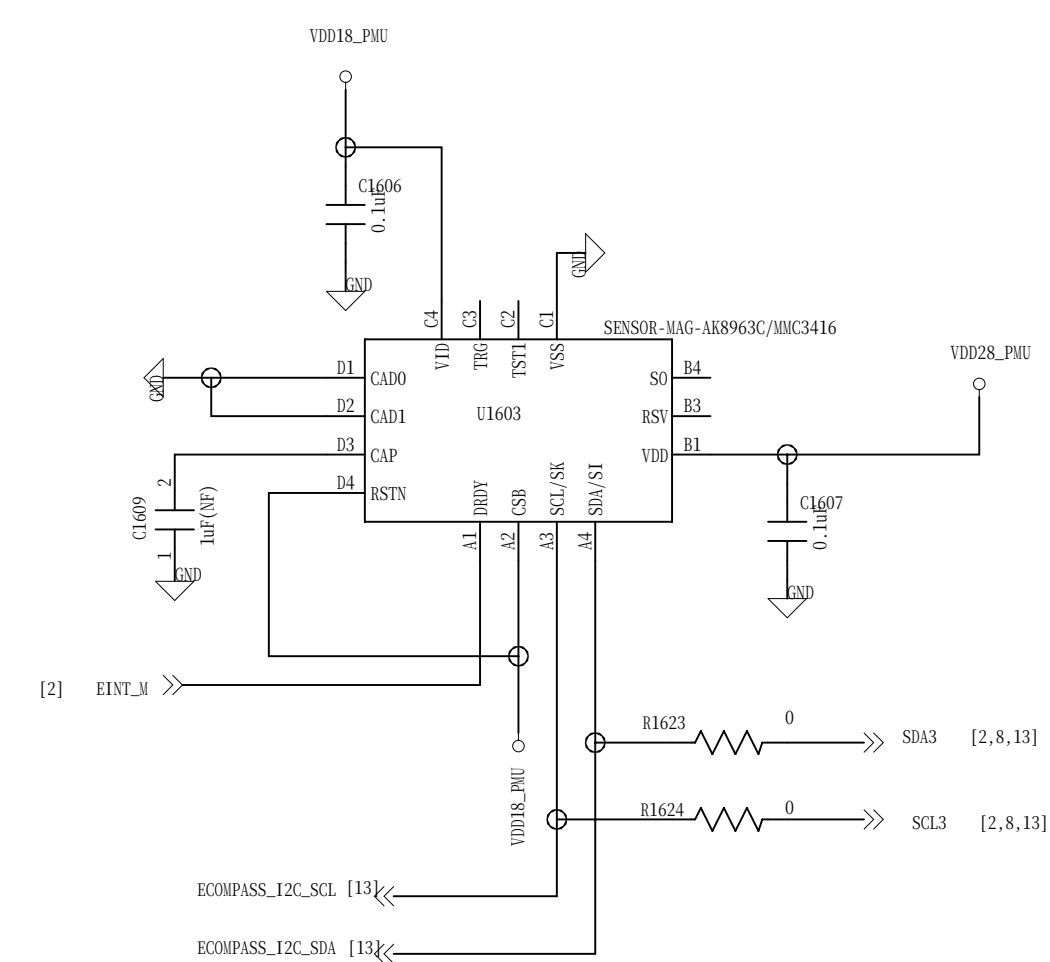

Switching Charger

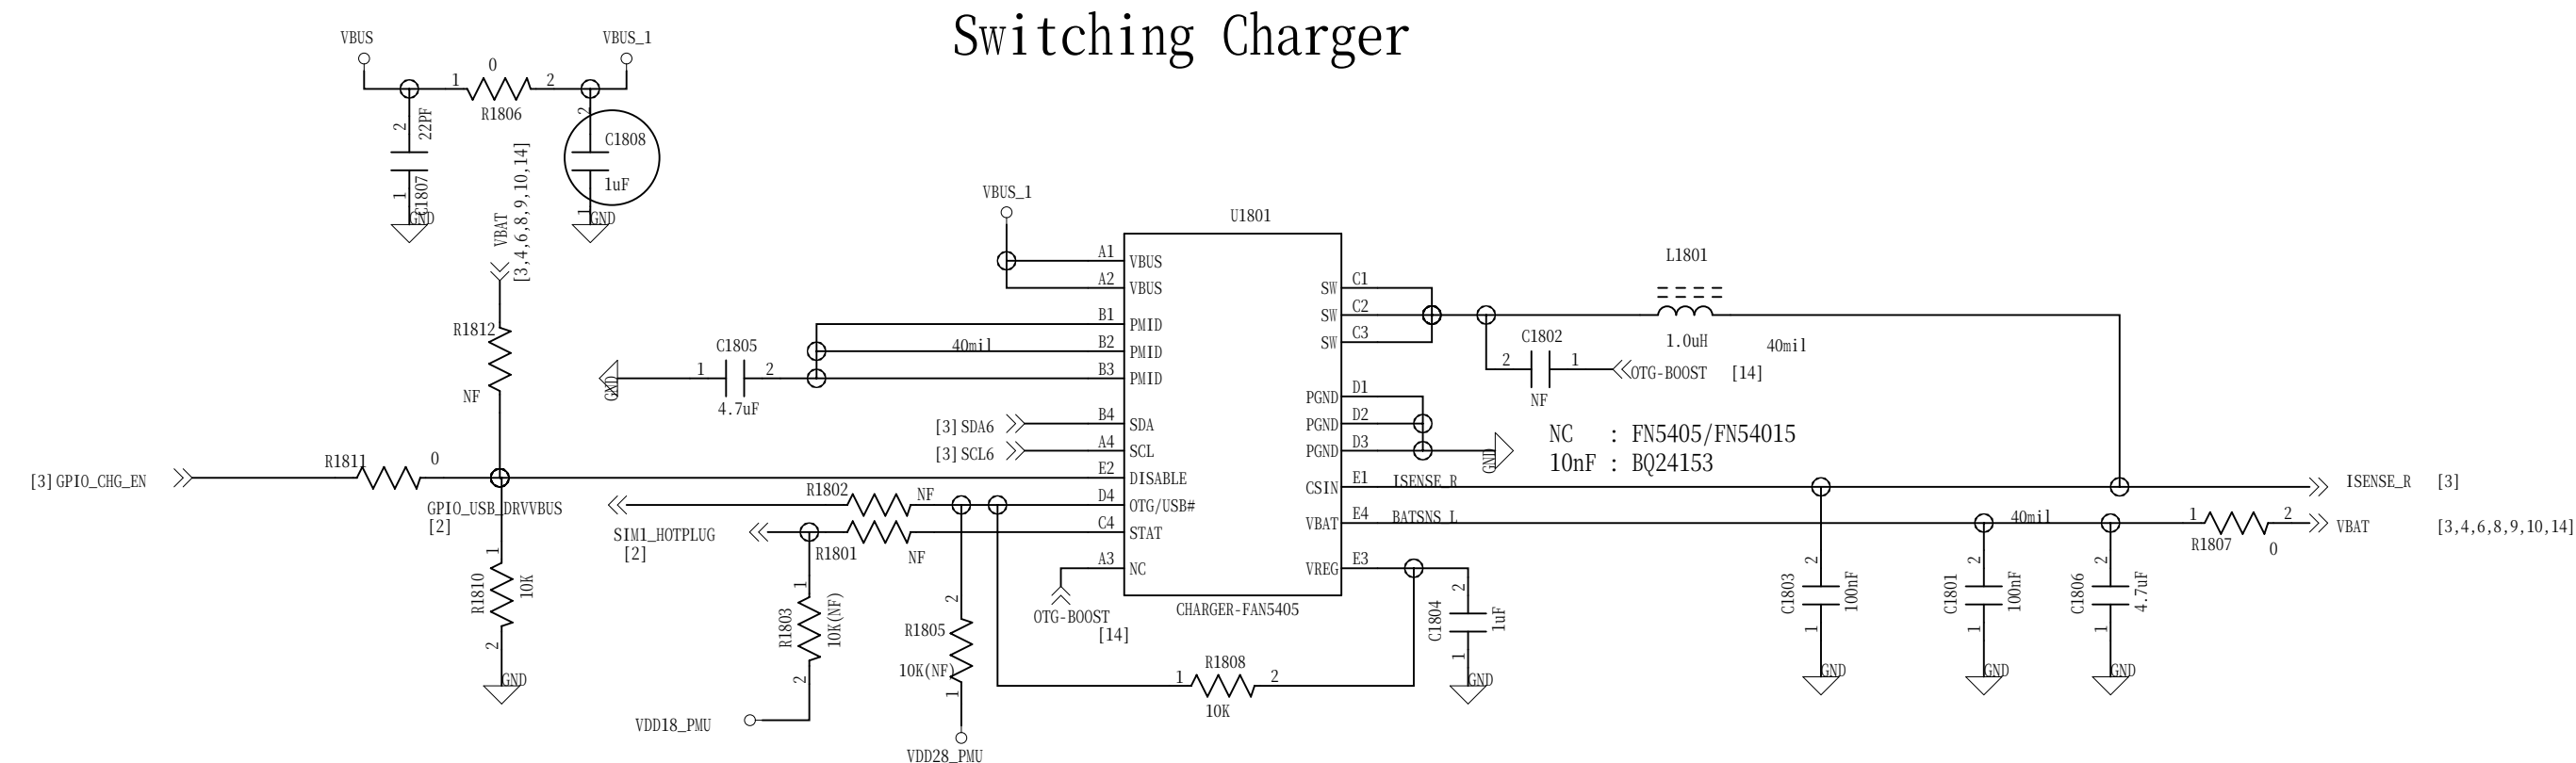

If switching charger is used:
 (1) R1801-R1805, C1801-C1806, L1801, U1801 are needed
 (2) U303, U304 change to NC
 (3) R328 change to 56 Ω 0hm