

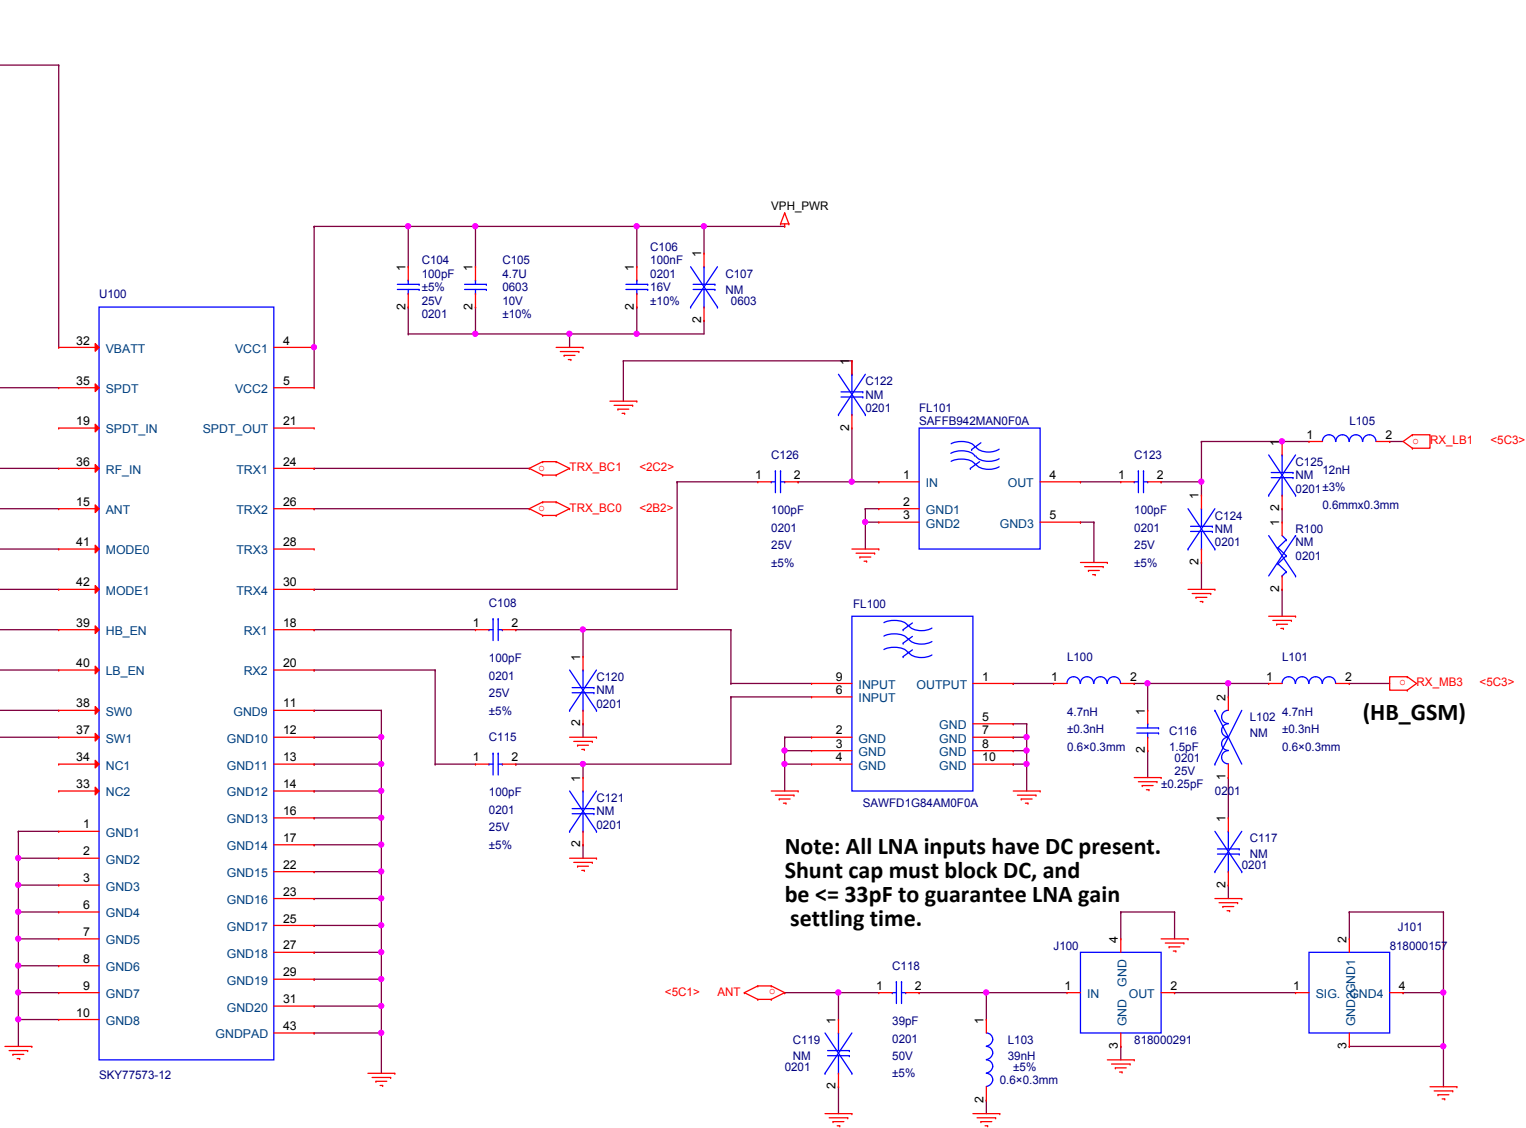



TXM BAND SELECT LOGIC

	TXM_CTL					PA_R	
	0	1	2	3	4	0	1
STANDBY	L	L	L	L	L	X	X
ISOLATION	L	L	L	L	H	X	X
LB_SPDT_10_HPM	L	L	H	L	H	L	L
LB_SPDT_10_MPM	L	L	H	L	H	L	H
LB_SPDT_10_LPM	L	L	H	L	H	H	L
LB_SPDT_10_ULPM	L	L	H	L	H	H	H
HB_SPDT_10_HPM	L	H	L	L	H	L	L
HB_SPDT_10_MPM	L	H	L	L	H	L	H
HB_SPDT_10_LPM	L	H	L	L	H	H	L
HB_SPDT_10_ULPM	L	H	L	L	H	H	H
TRX1_SPDT_0	H	L	L	L	H	X	X
TRX2_SPDT_0	H	L	L	H	H	X	X
TRX3_SPDT_0	H	L	H	L	H	X	X
TRX4_SPDT_0	H	L	H	H	H	X	X
RX1	H	H	H	H	L	X	X
RX2	H	H	H	H	H	X	X

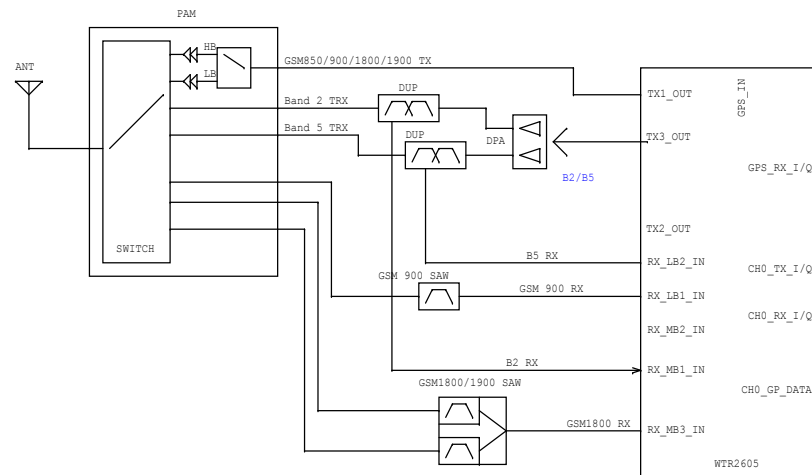

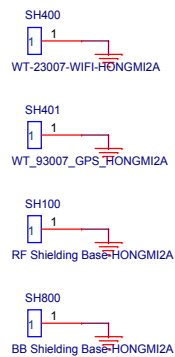


Title	
2013028	
Size	Document Number
A3	<Doc>
Date:	Monday, December 30, 2013

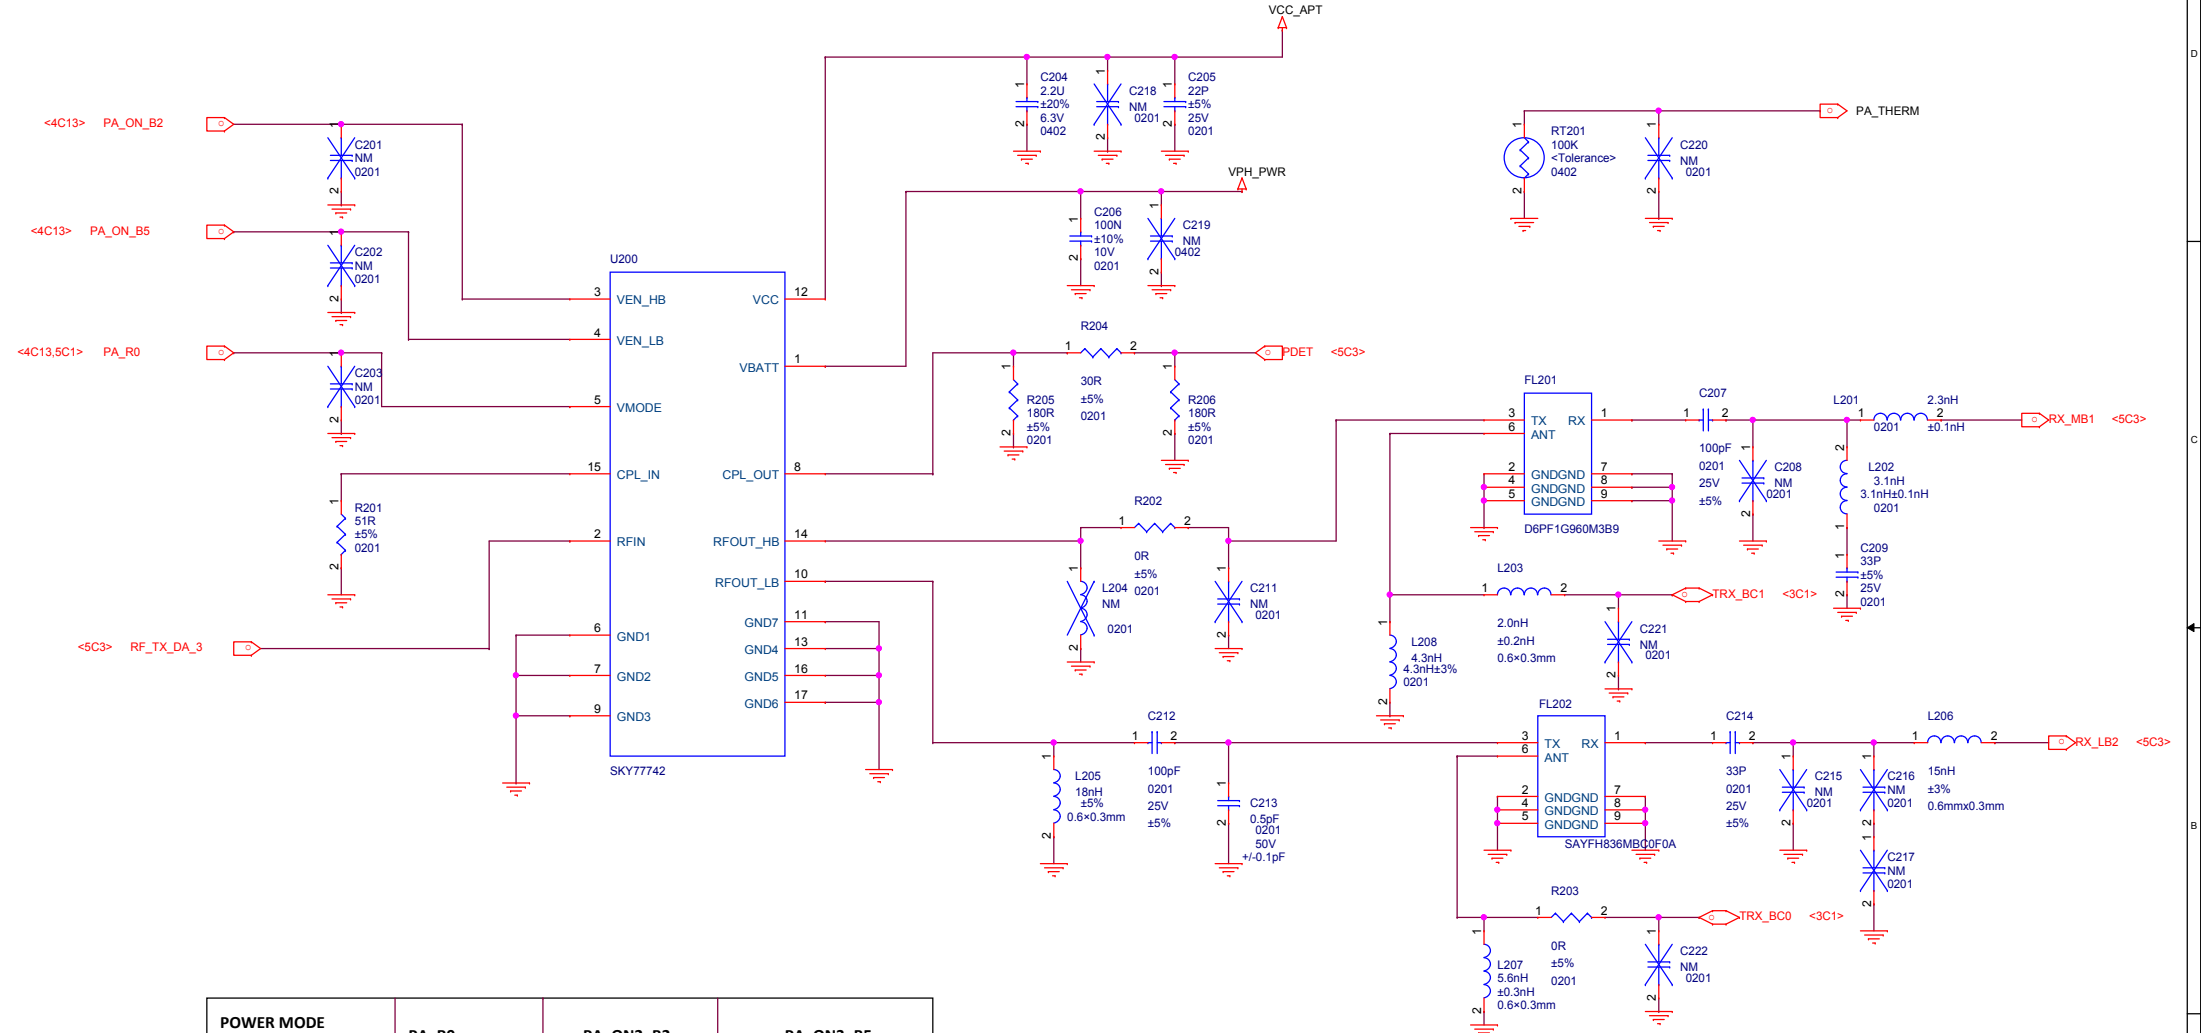



POWER MODE	PA_R0	PA_ON2_B2	PA_ON3_B5
B2 HIGH POWER	L	H	L
B2 LOW POWER	H	H	L
B5 HIGH POWER	L	L	H
B5 LOW POWER	H	L	H
SHUT DOWN	L	L	L


Note: All LNA inputs have DC present. Shunt cap must block DC, and be <= 33pF to guarantee LNA gain settling time.

Title	
2013028	
Size	Document Number
A3	<Doc>
Date: Monday, December 30, 2013	

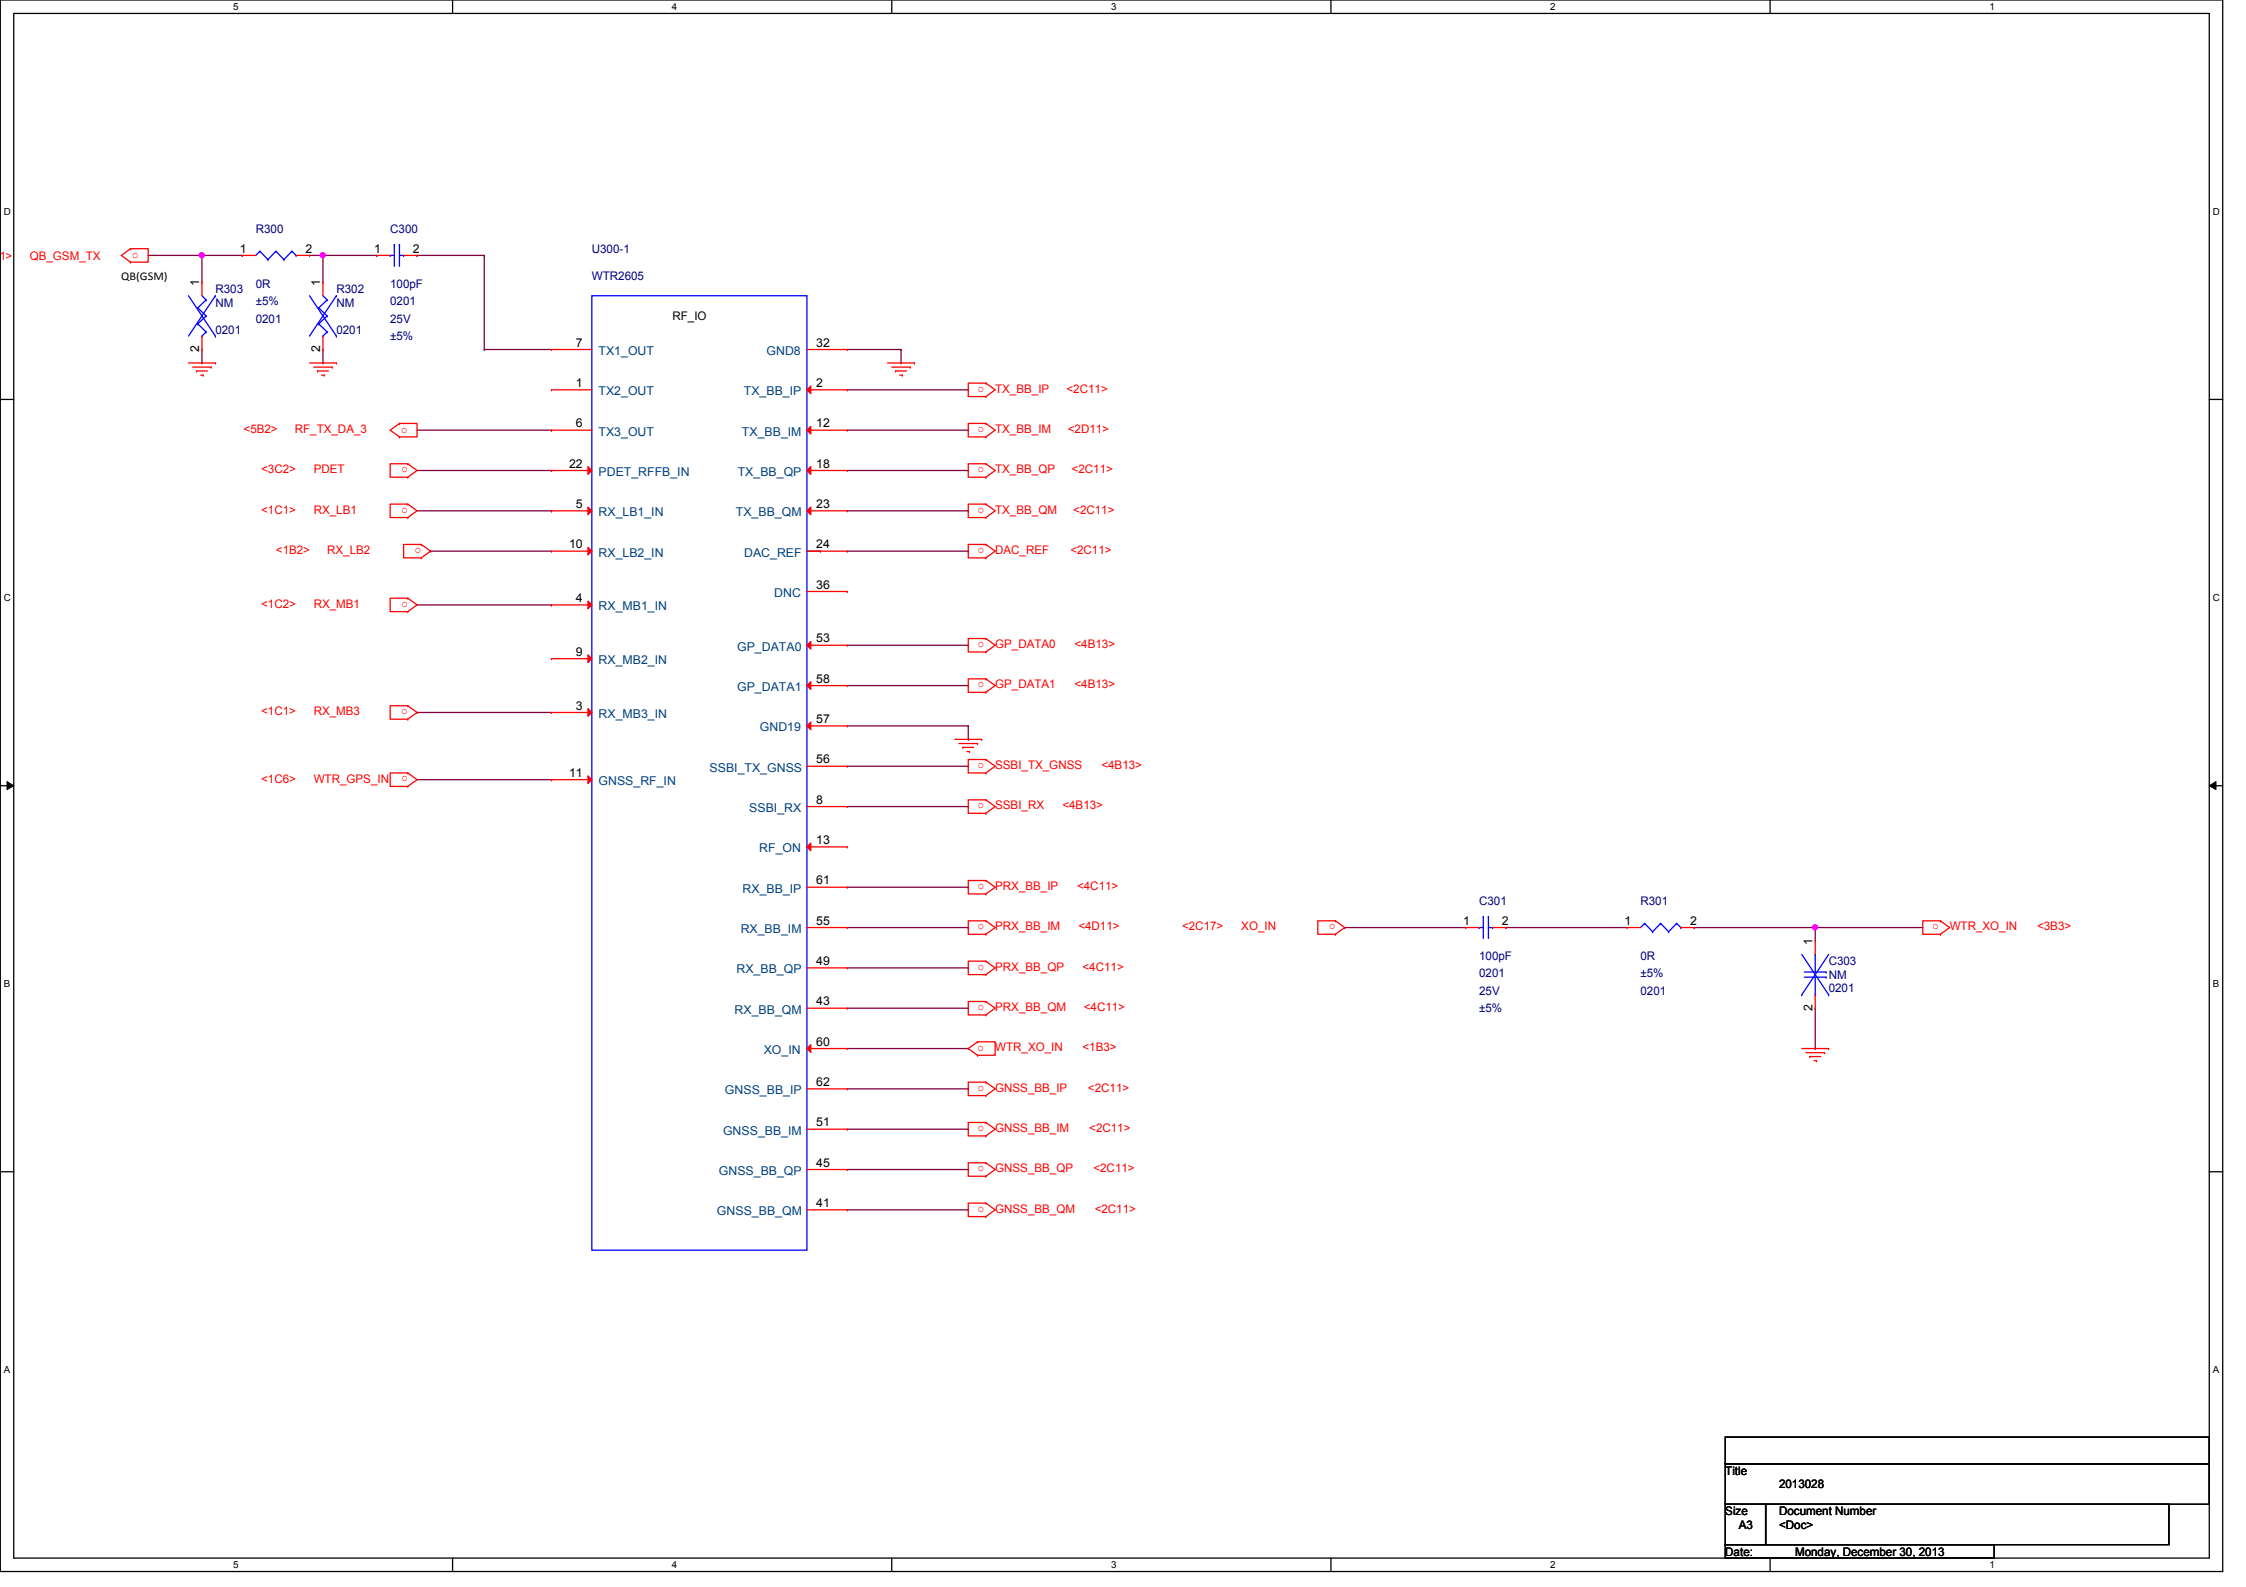


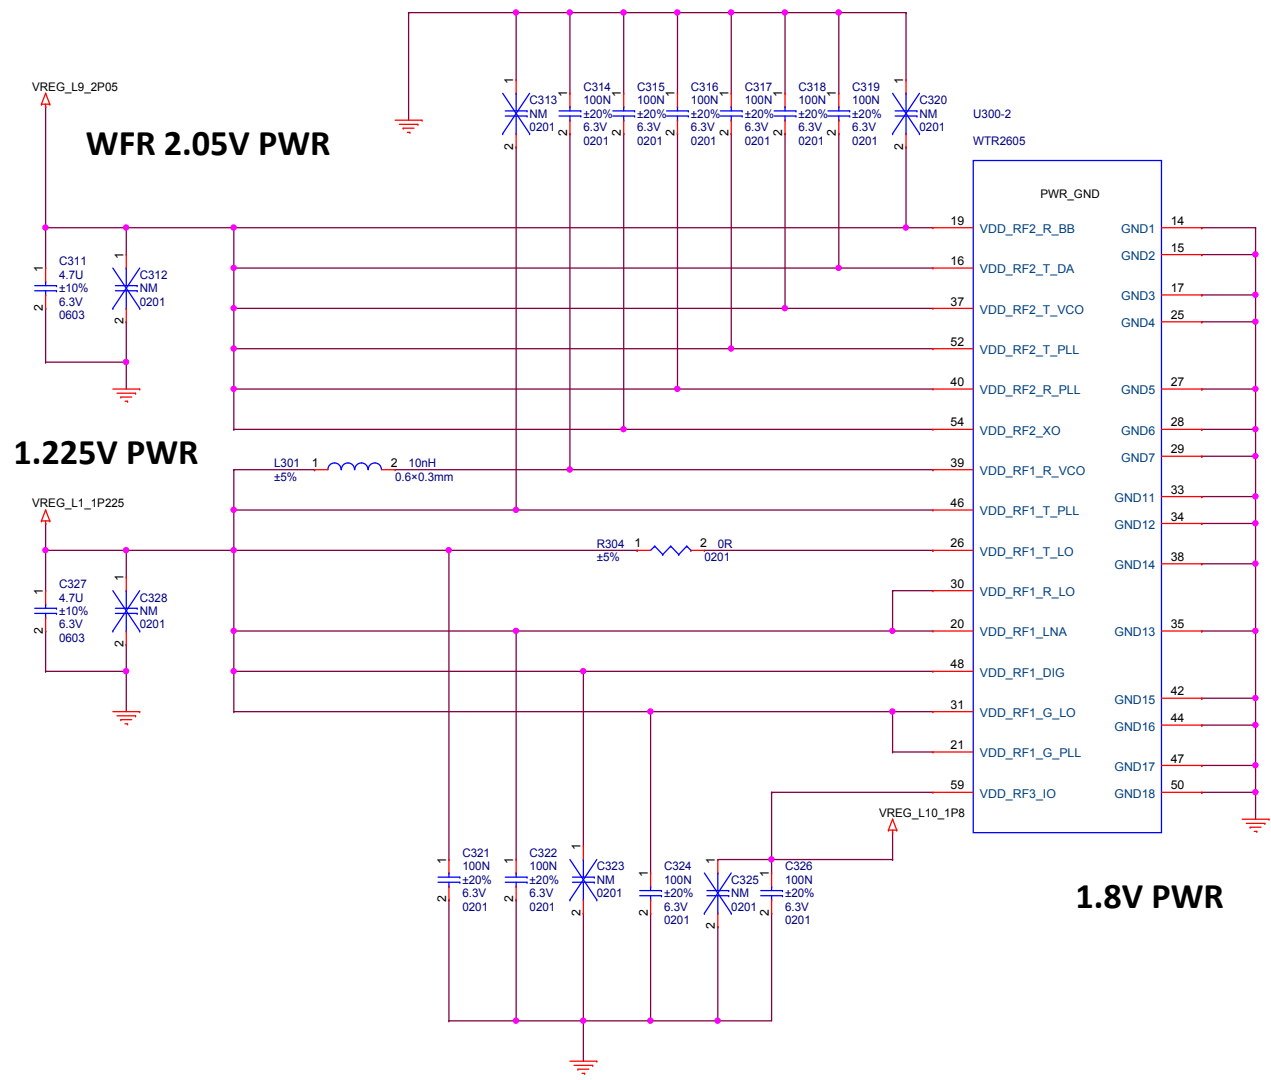





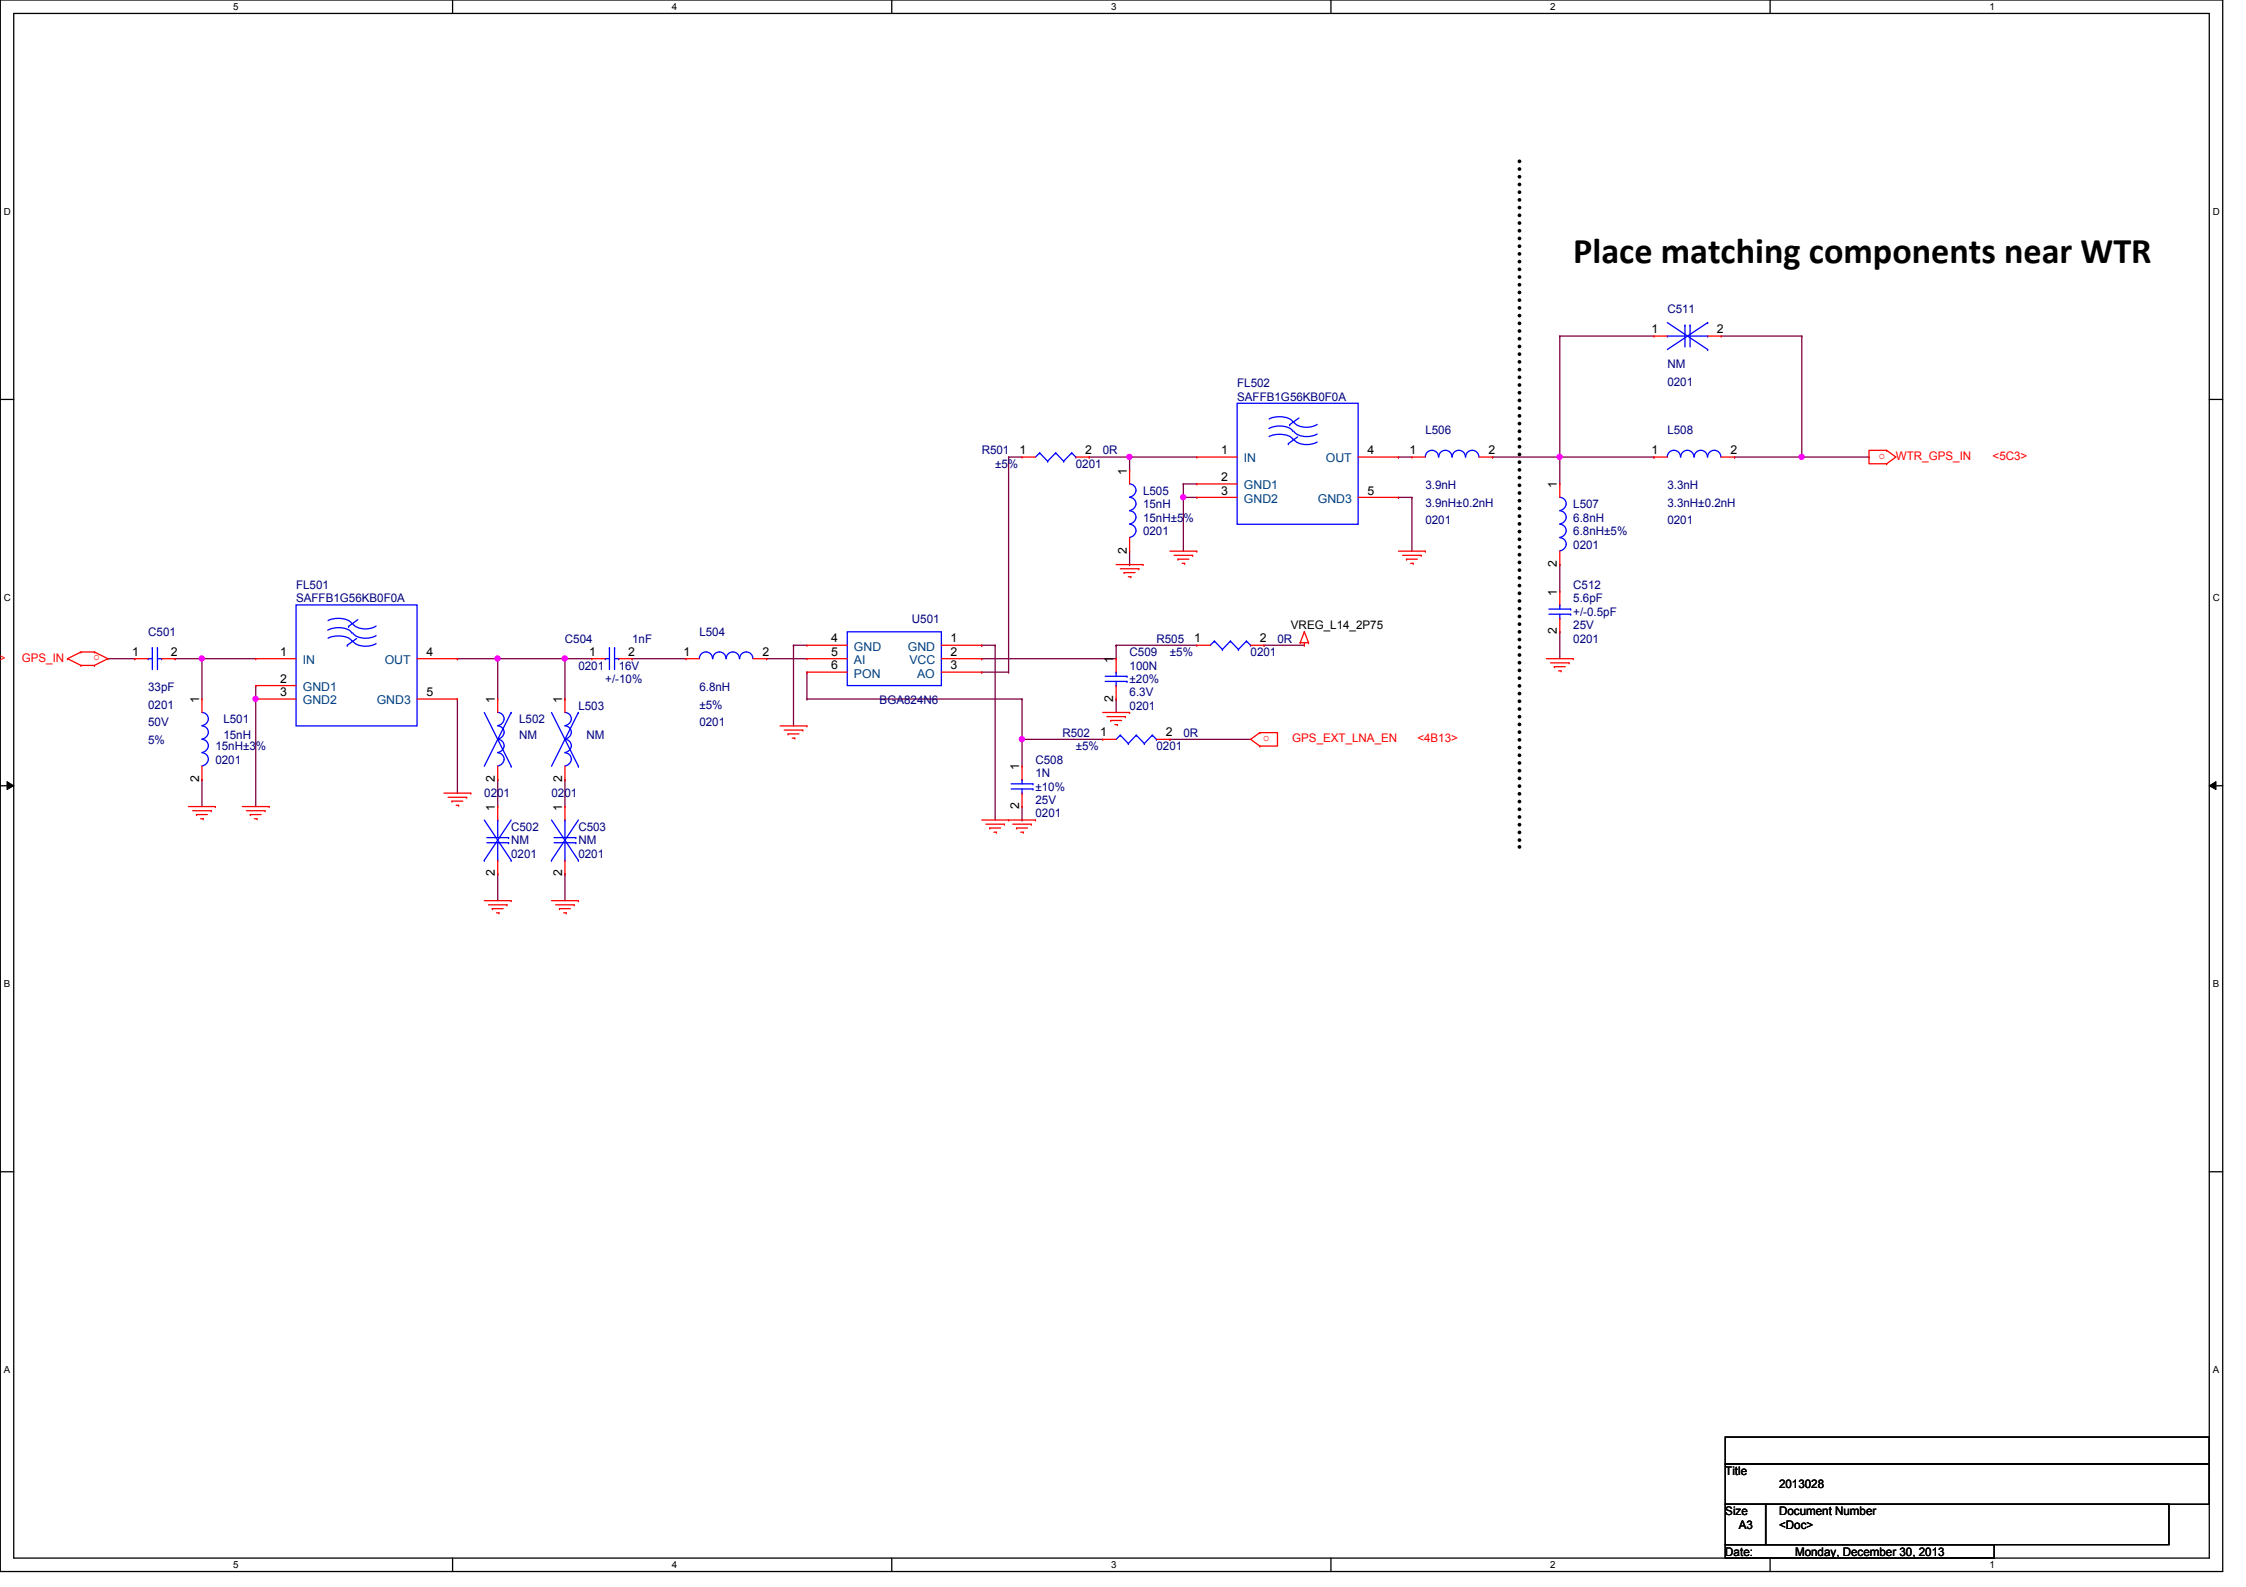



Place matching components near WTR

Title	
2013028	
Size	Document Number
A3	<Doc>
Date:	Monday, December 30, 2013

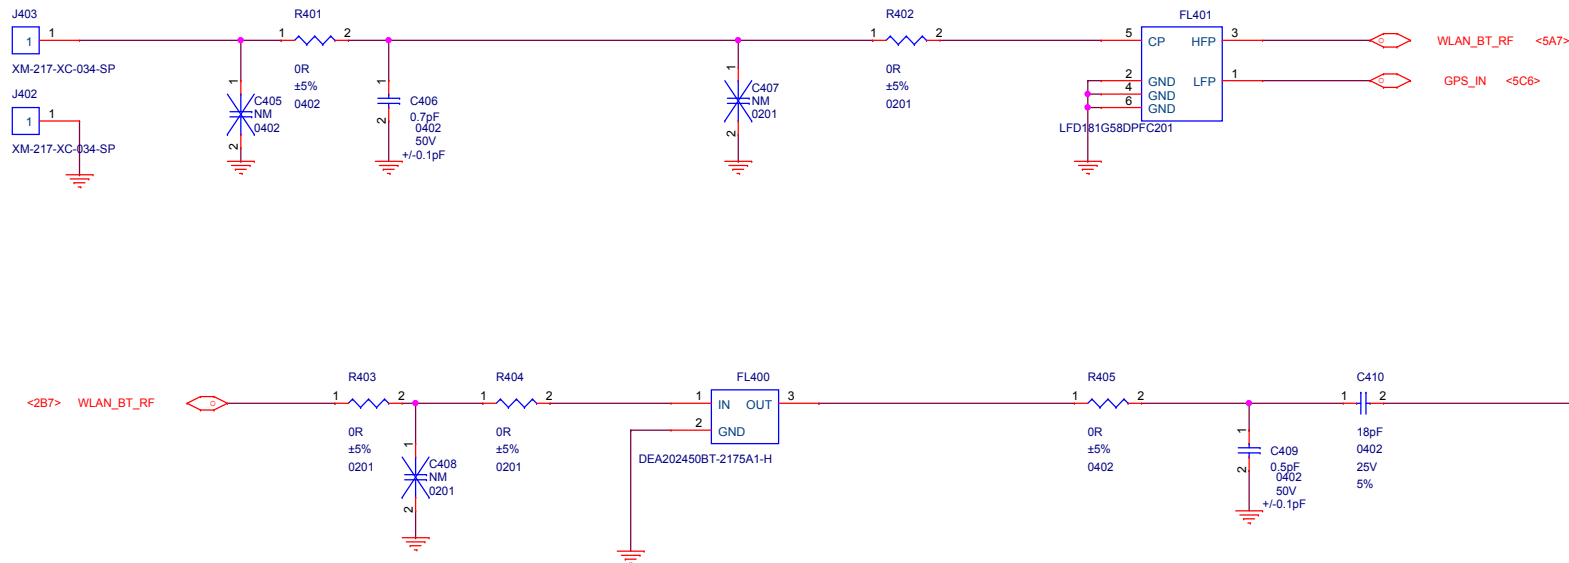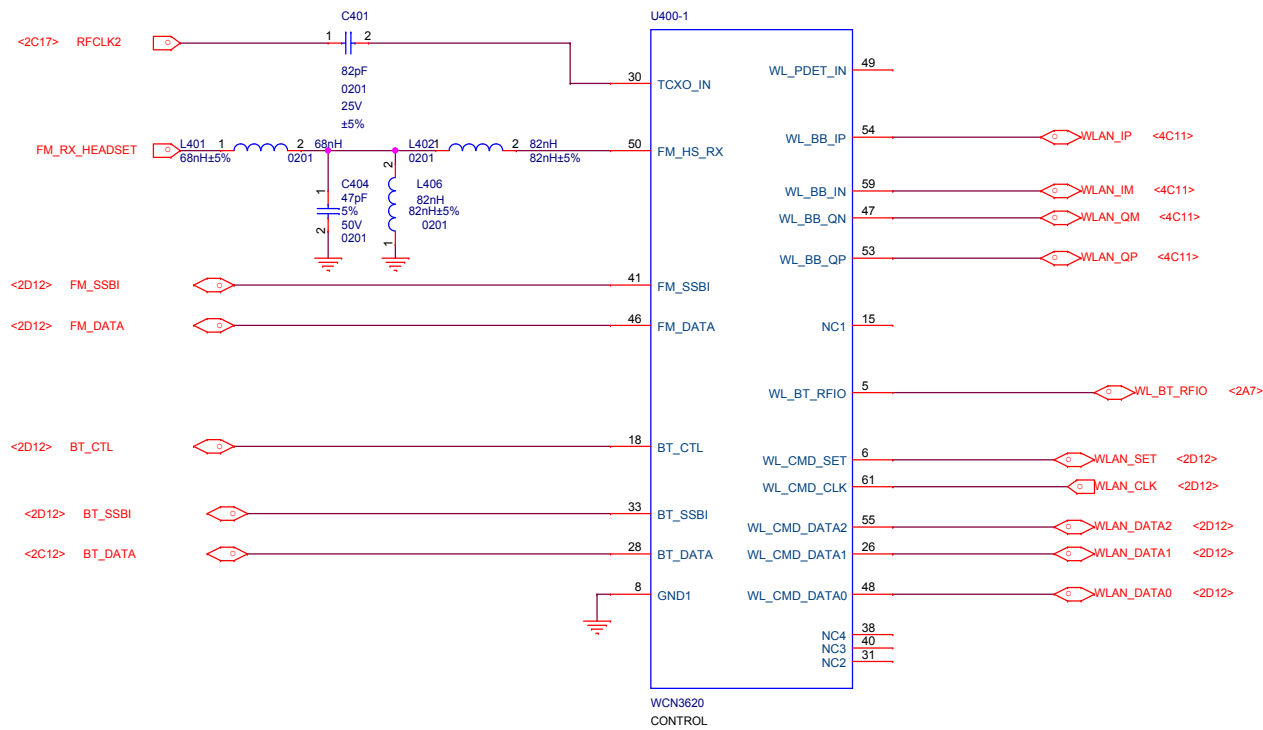


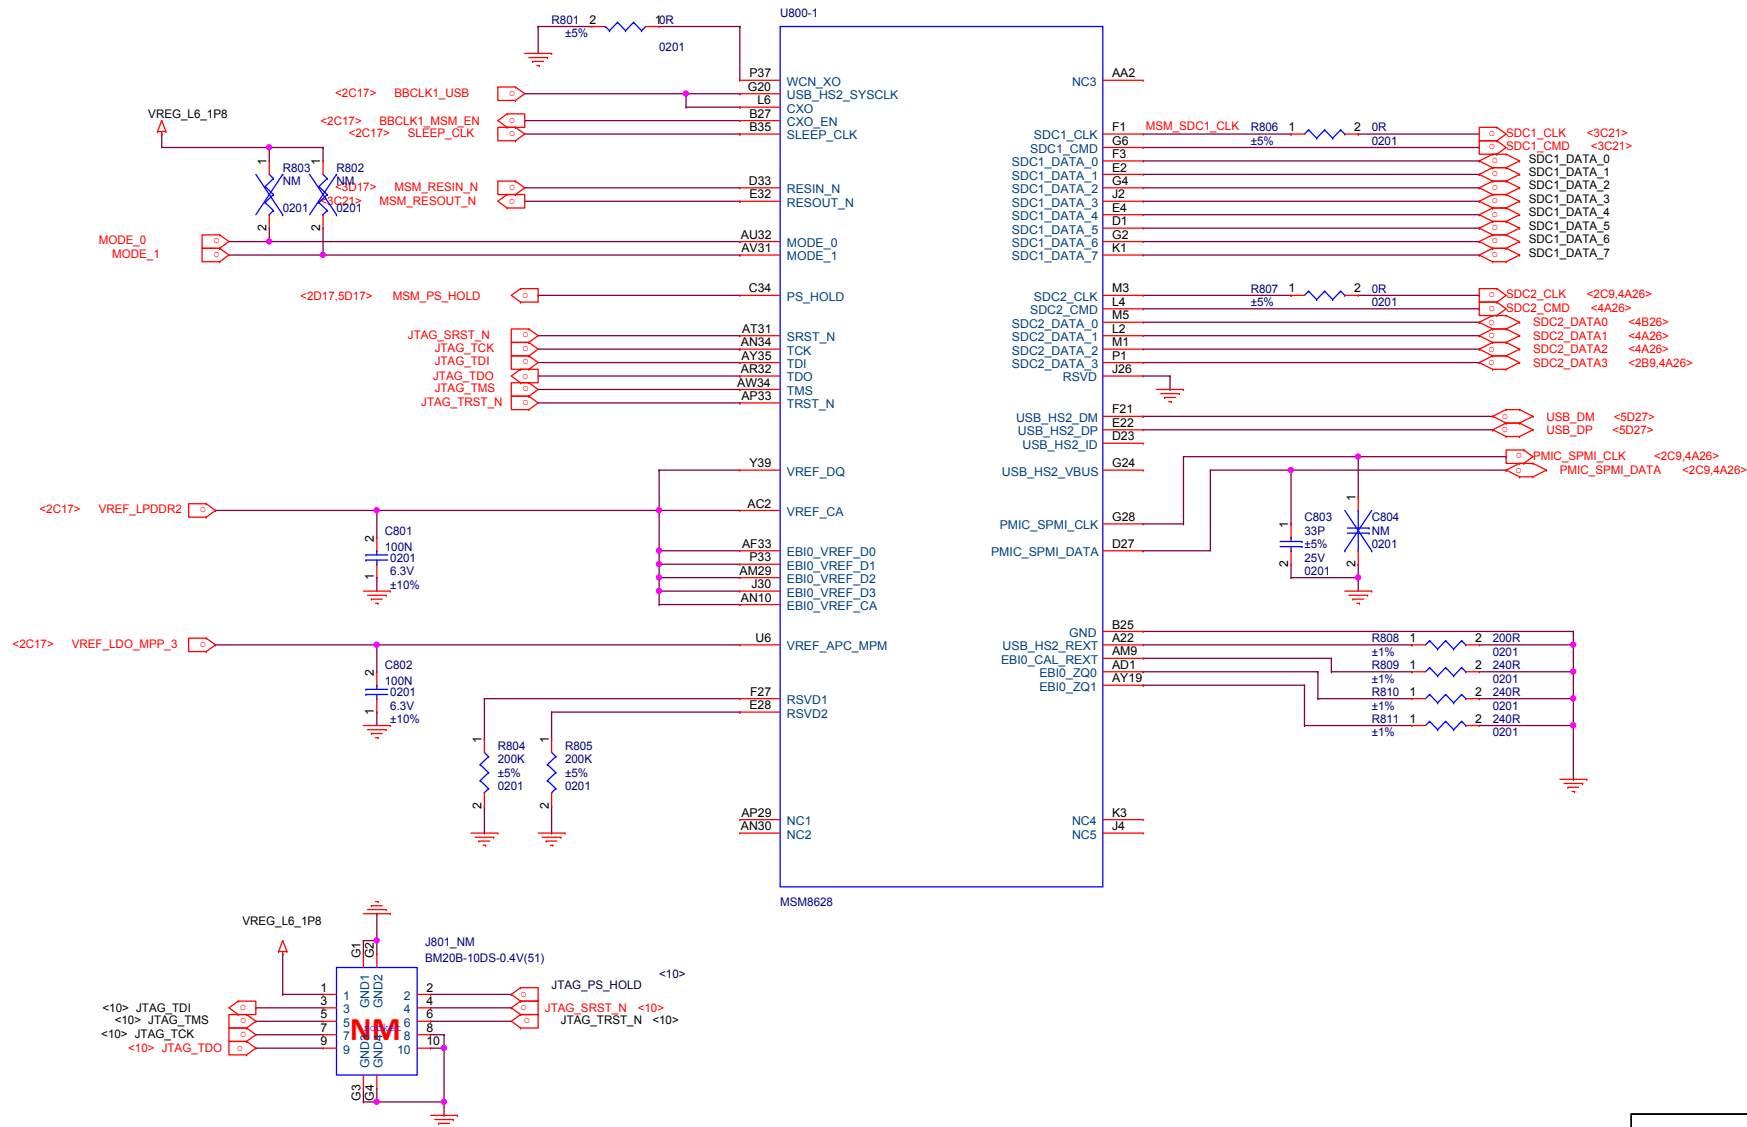


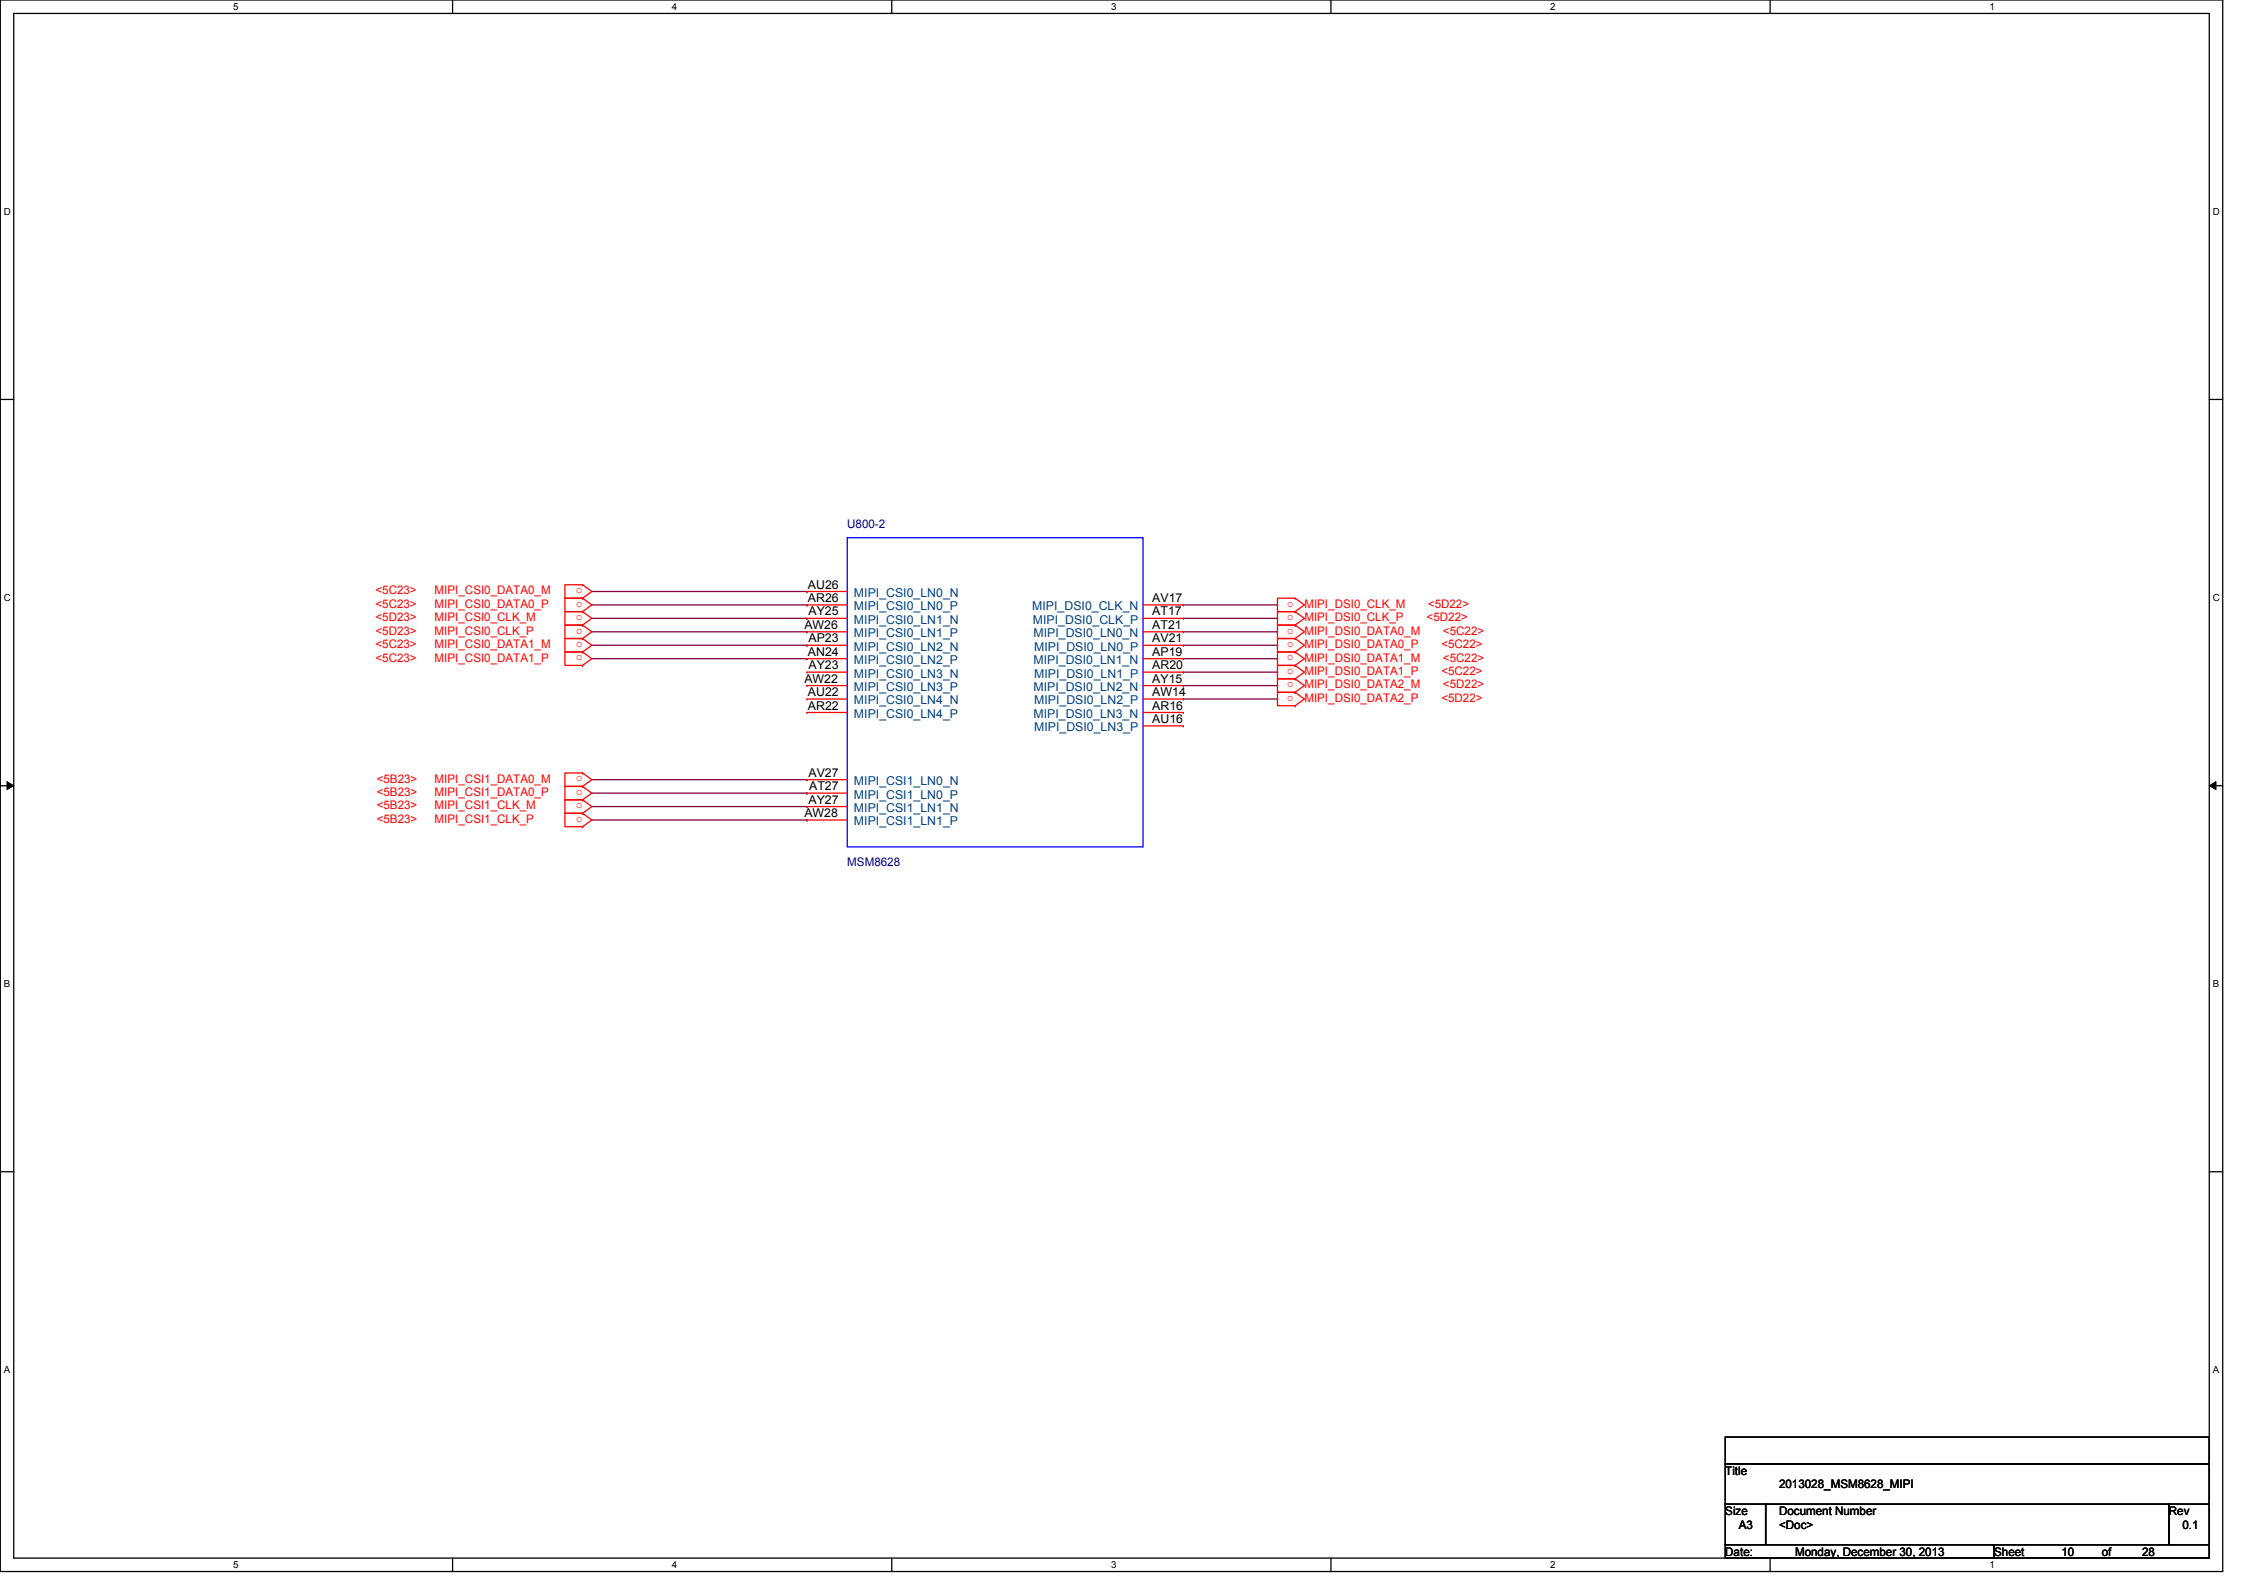

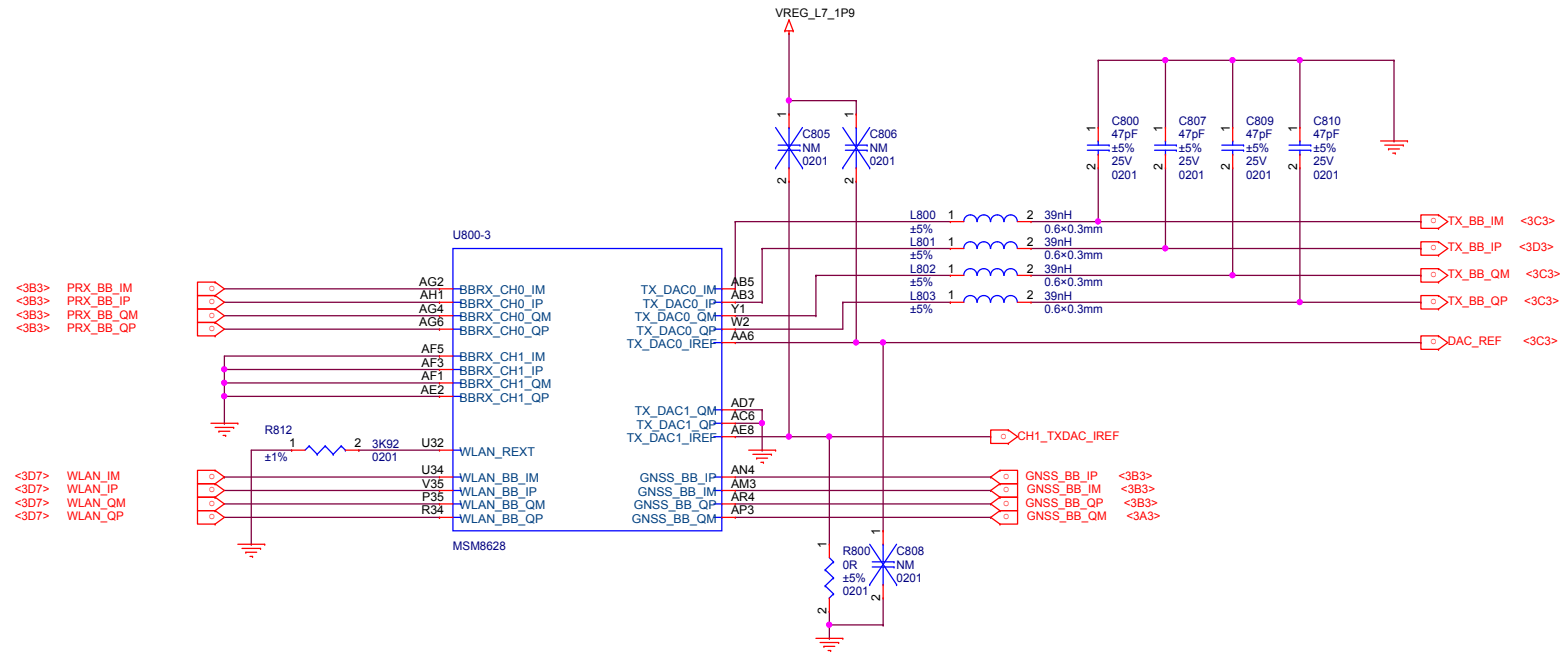


Title			
2013028_MSM8628_RF			
Size A3	Document Number <Doc>		Rev 0.1
Date:	Monday, December 30, 2013	Sheet 11 of 28	

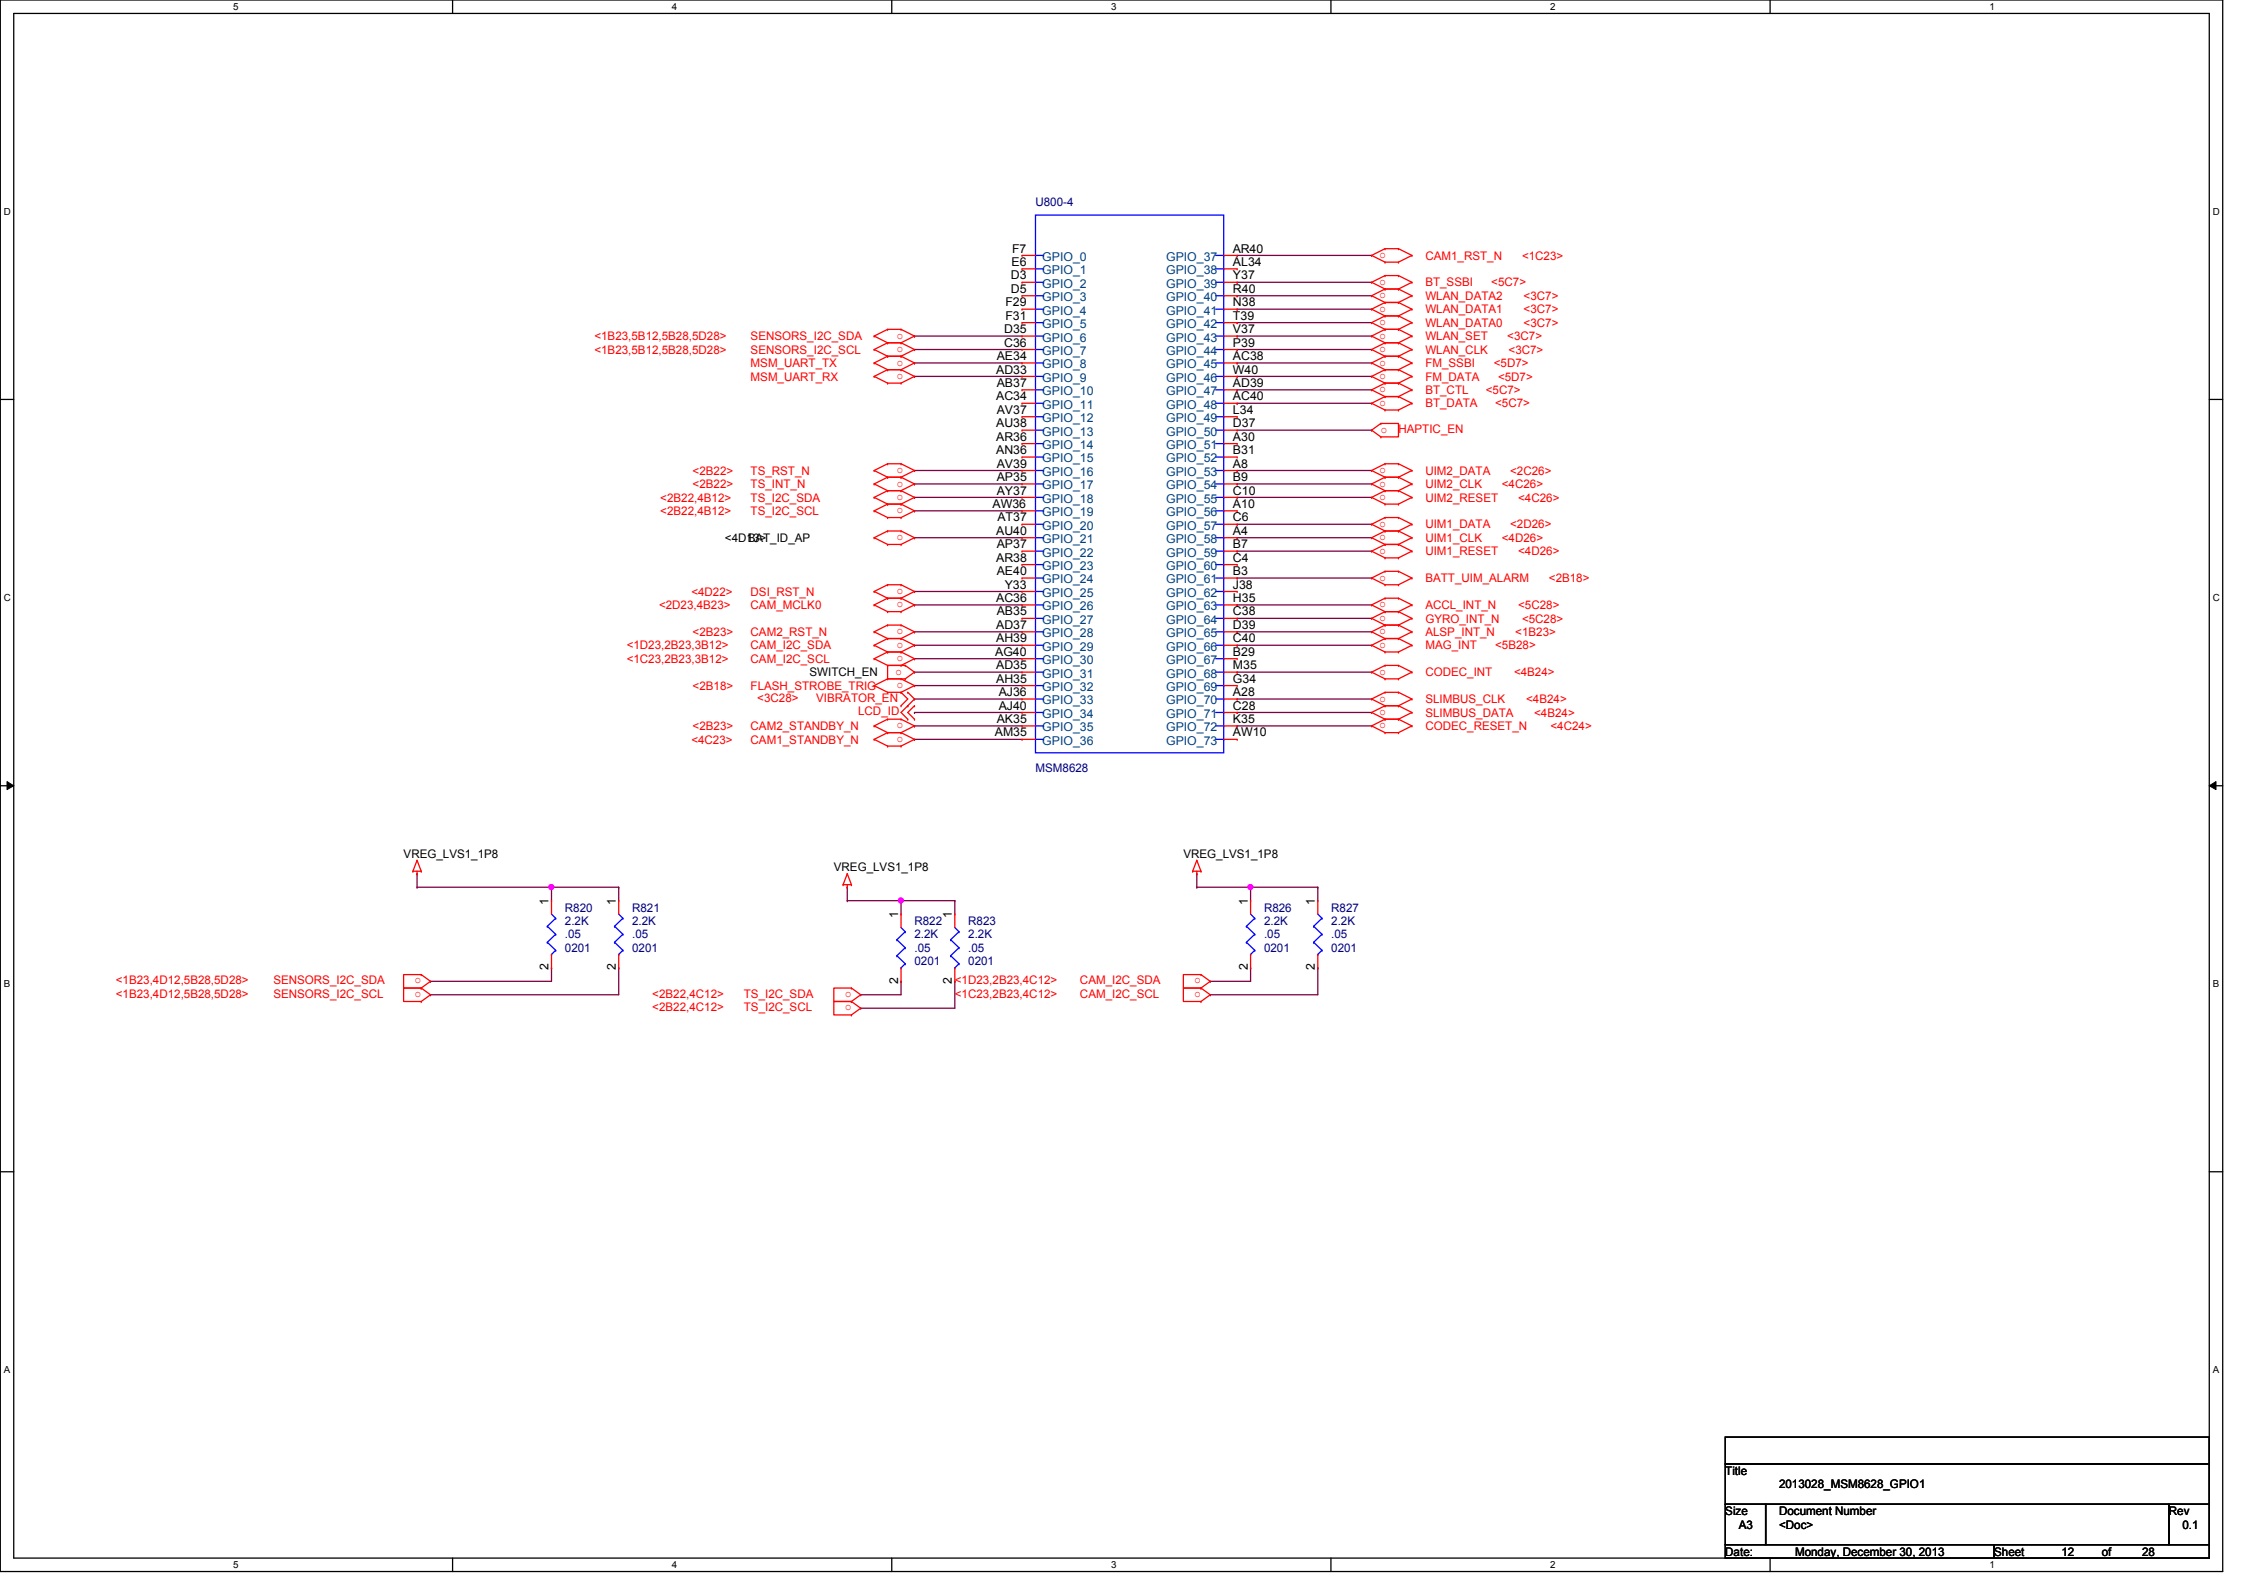


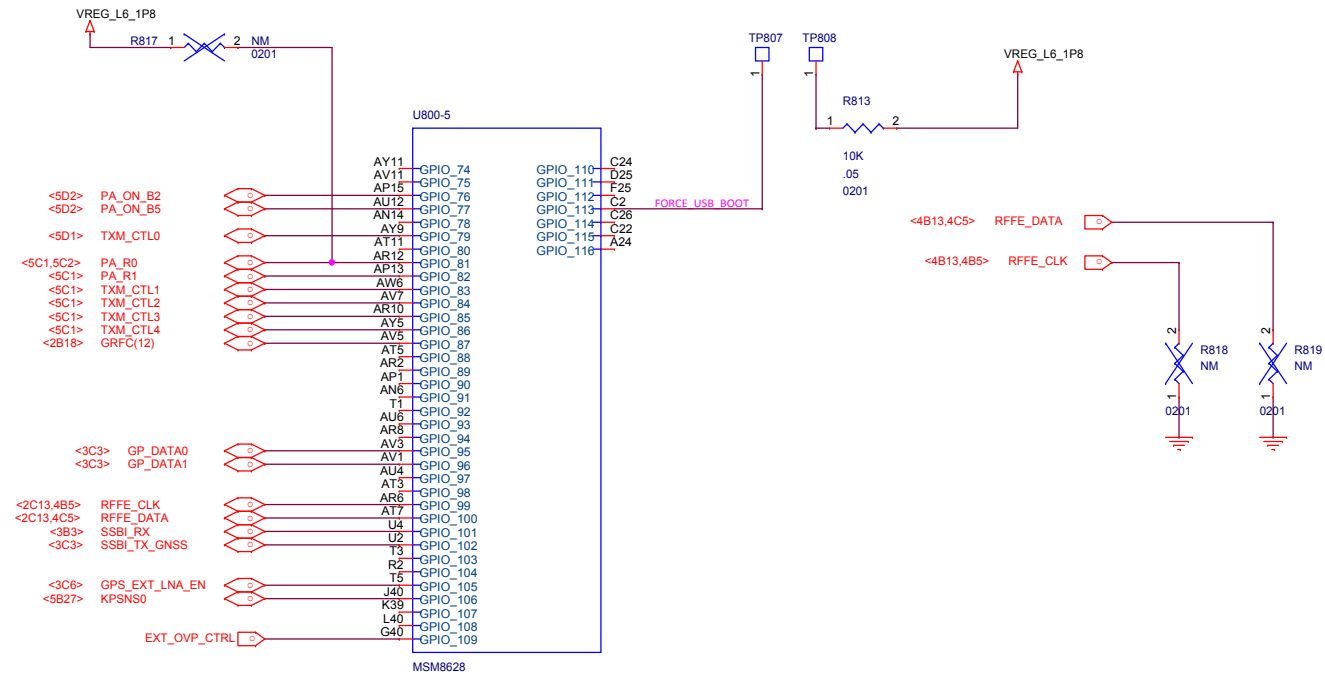

VREG_S1_1P15




U800-8

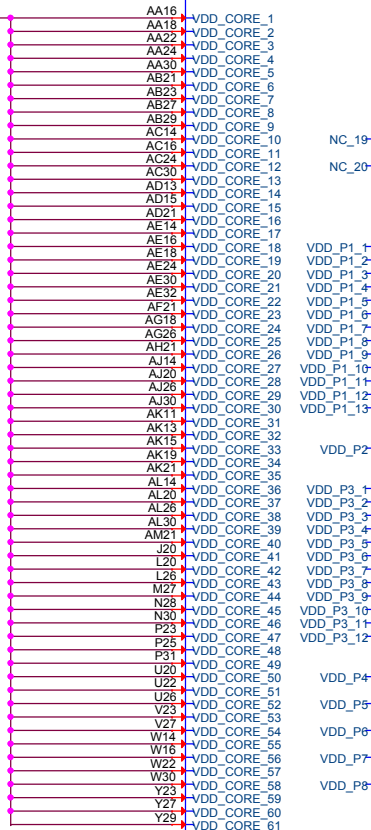


MSM8628

NC_19
NC_20



VDD_P2



VDD_P4

VDD_P5

VDD_P6

VDD_P7

VDD_P8

VDD_P9

VDD_P10

VDD_P11

VDD_P12

VDD_P13

VDD_P14

VDD_P15

VDD_P16

VDD_P17

VDD_P18

VDD_P19

VDD_P20

VDD_P21

VDD_P22

VDD_P23

VDD_P24

VDD_P25

VDD_P26

VDD_P27

VDD_P28

VDD_P29

VDD_P30

VDD_P31

VDD_P32

VDD_P33

VDD_P34

VDD_P35

VDD_P36

VDD_P37

VDD_P38

VDD_P39

VDD_P40

VDD_P41

VDD_P42

VDD_P43

VDD_P44

VDD_P45

VDD_P46

VDD_P47

VDD_P48

VDD_P49

VDD_P50

VDD_P51

VDD_P52

VDD_P53

VDD_P54

VDD_P55

VDD_P56

VDD_P57

VDD_P58

VDD_P59

VDD_P60

VDD_P61

VDD_P62

VDD_P63

VDD_P64

VDD_P65

VDD_P66

VDD_P67

VDD_P68

VDD_P69

VDD_P70

VDD_P71

VDD_P72

VDD_P73

VDD_P74

VDD_P75

VDD_P76

VDD_P77

VDD_P78

VDD_P79

VDD_P80

VDD_P81

VDD_P82

VDD_P83

VDD_P84

VDD_P85

VDD_P86

VDD_P87

VDD_P88

VDD_P89

VDD_P90

VDD_P91

VDD_P92

VDD_P93

VDD_P94

VDD_P95

VDD_P96

VDD_P97

VDD_P98

VDD_P99

VDD_P100

VDD_P101

VDD_P102

VDD_P103

VDD_P104

VDD_P105

VDD_P106

VDD_P107

VDD_P108

VDD_P109

VDD_P110

VDD_P111

VDD_P112

VDD_P113

VDD_P114

VDD_P115

VDD_P116

VDD_P117

VDD_P118

VDD_P119

VDD_P120

VDD_P121

VDD_P122

VDD_P123

VDD_P124

VDD_P125

VDD_P126

VDD_P127

VDD_P128

VDD_P129

VDD_P130

VDD_P131

VDD_P132

VDD_P133

VDD_P134

VDD_P135

VDD_P136

VDD_P137

VDD_P138

VDD_P139

VDD_P140

VDD_P141

VDD_P142

VDD_P143

VDD_P144

VDD_P145

VDD_P146

VDD_P147

VDD_P148

VDD_P149

VDD_P150

VDD_P151

VDD_P152

VDD_P153

VDD_P154

VDD_P155

VDD_P156

VDD_P157

VDD_P158

VDD_P159

VDD_P160

VDD_P161

VDD_P162

VDD_P163

VDD_P164

VDD_P165

VDD_P166

VDD_P167

VDD_P168

VDD_P169

VDD_P170

VDD_P171

VDD_P172

VDD_P173

VDD_P174

VDD_P175

VDD_P176

VDD_P177

VDD_P178

VDD_P179

VDD_P180

VDD_P181

VDD_P182

VDD_P183

VDD_P184

VDD_P185

VDD_P186

VDD_P187

VDD_P188

VDD_P189

VDD_P190

VDD_P191

VDD_P192

VDD_P193

VDD_P194

VDD_P195

VDD_P196

VDD_P197

VDD_P198

VDD_P199

VDD_P200

VDD_P201

VDD_P202

VDD_P203

VDD_P204

VDD_P205

VDD_P206

VDD_P207

VDD_P208

VDD_P209

VDD_P210

VDD_P211

VDD_P212

VDD_P213

VDD_P214

VDD_P215

VDD_P216

VDD_P217

VDD_P218

VDD_P219

VDD_P220

VDD_P221

VDD_P222

VDD_P223

VDD_P224

VDD_P225

VDD_P226

VDD_P227

VDD_P228

VDD_P229

VDD_P230

VDD_P231

VDD_P232

VDD_P233

VDD_P234

VDD_P235

VDD_P236

VDD_P237

VDD_P238

VDD_P239

VDD_P240

VDD_P241

VDD_P242

VDD_P243

VDD_P244

VDD_P245

VDD_P246

VDD_P247

VDD_P248

VDD_P249

VDD_P250

VDD_P251

VDD_P252

VDD_P253

VDD_P254

VDD_P255

VDD_P256

VDD_P257

VDD_P258

VDD_P259


VDD_P260


VDD_P261

VDD_P262



VDD_P263


VDD_P264


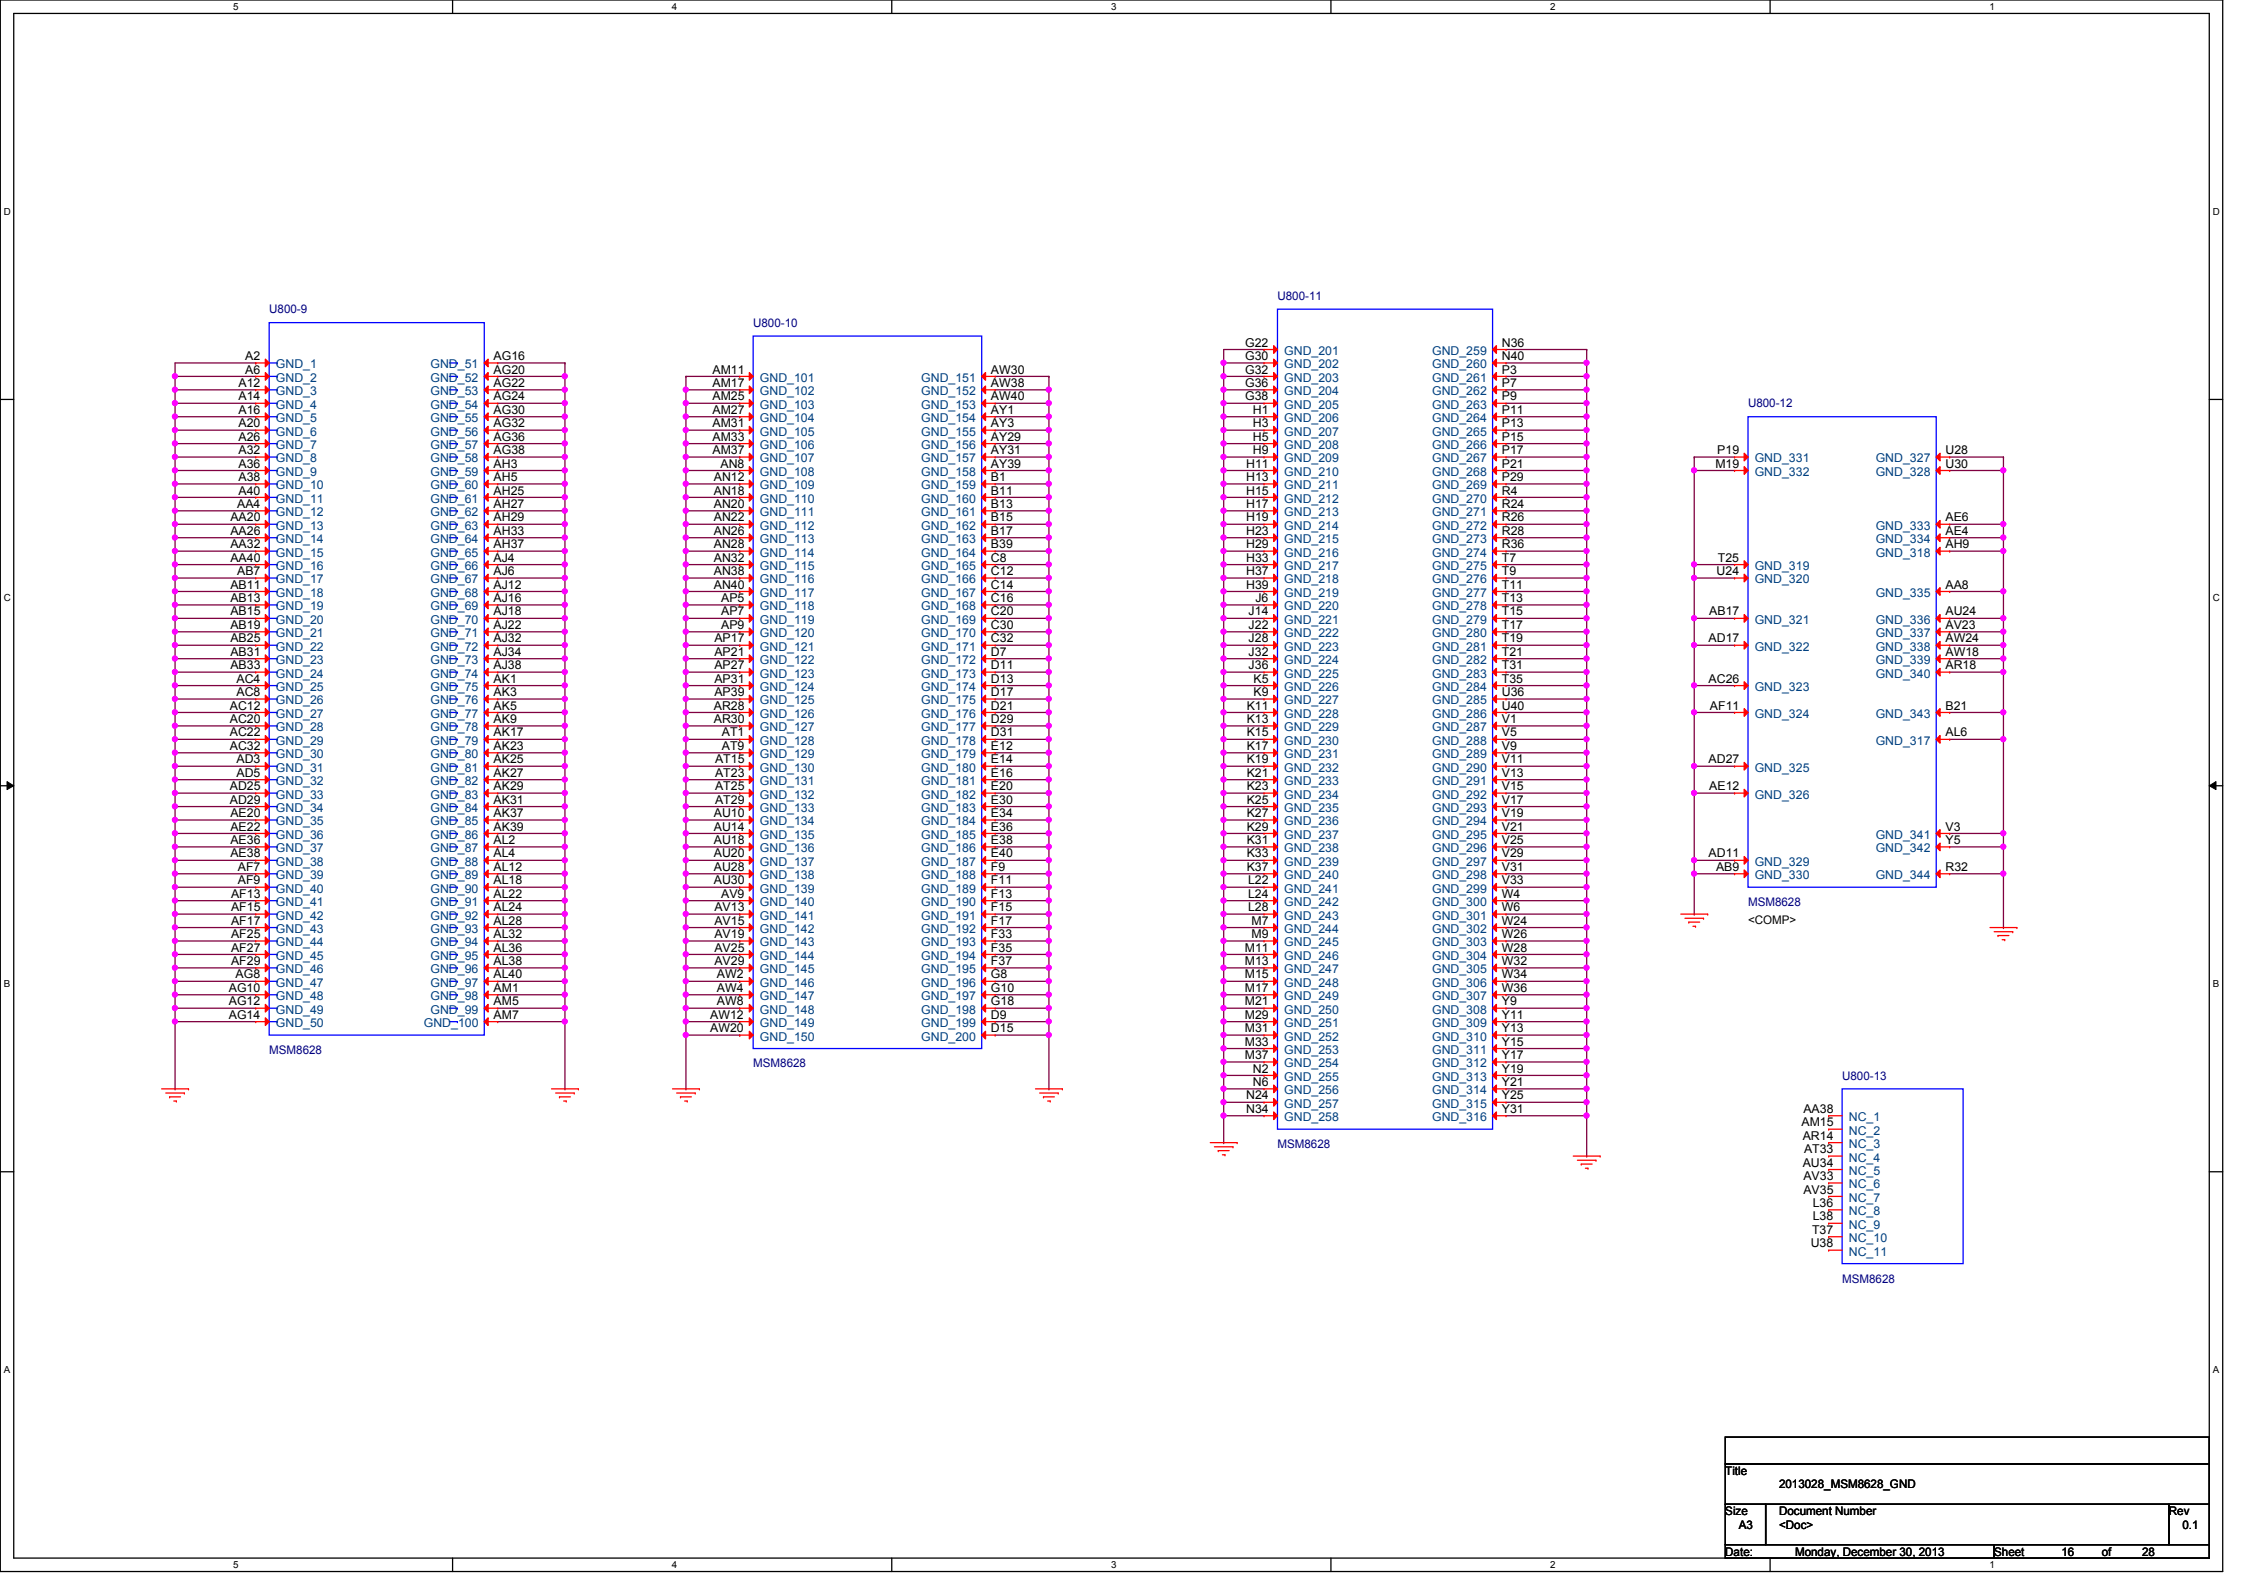


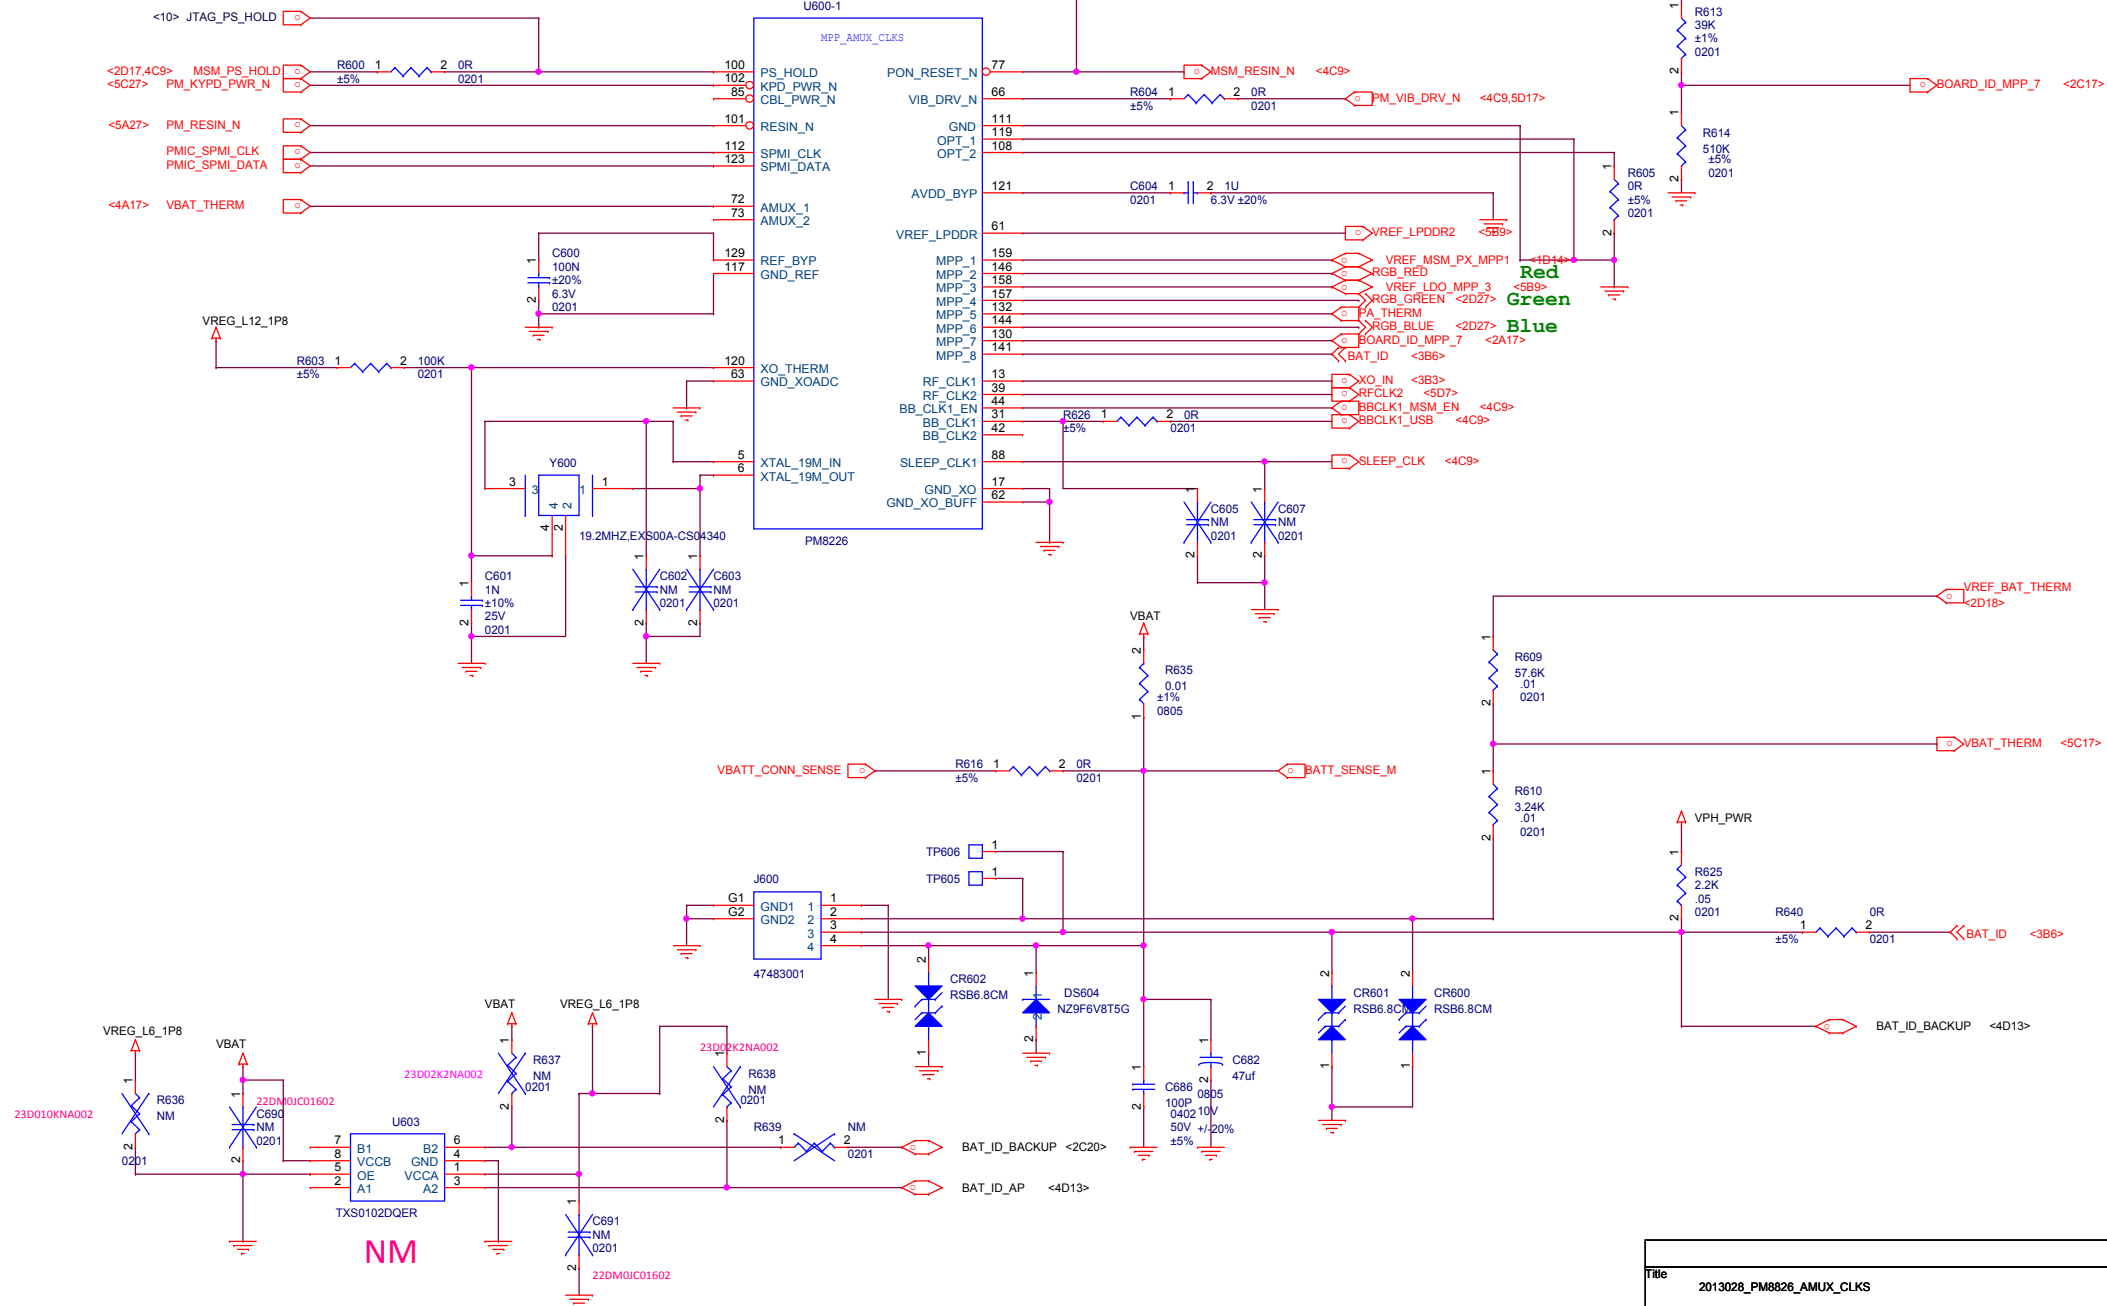


Title		
2013026_PM8826_AMUX_CLKS		
Size	Document Number	Rev
A3	<Doc>	0.1
Date:	Monday, December 30, 2013	Sheet 17 of 28

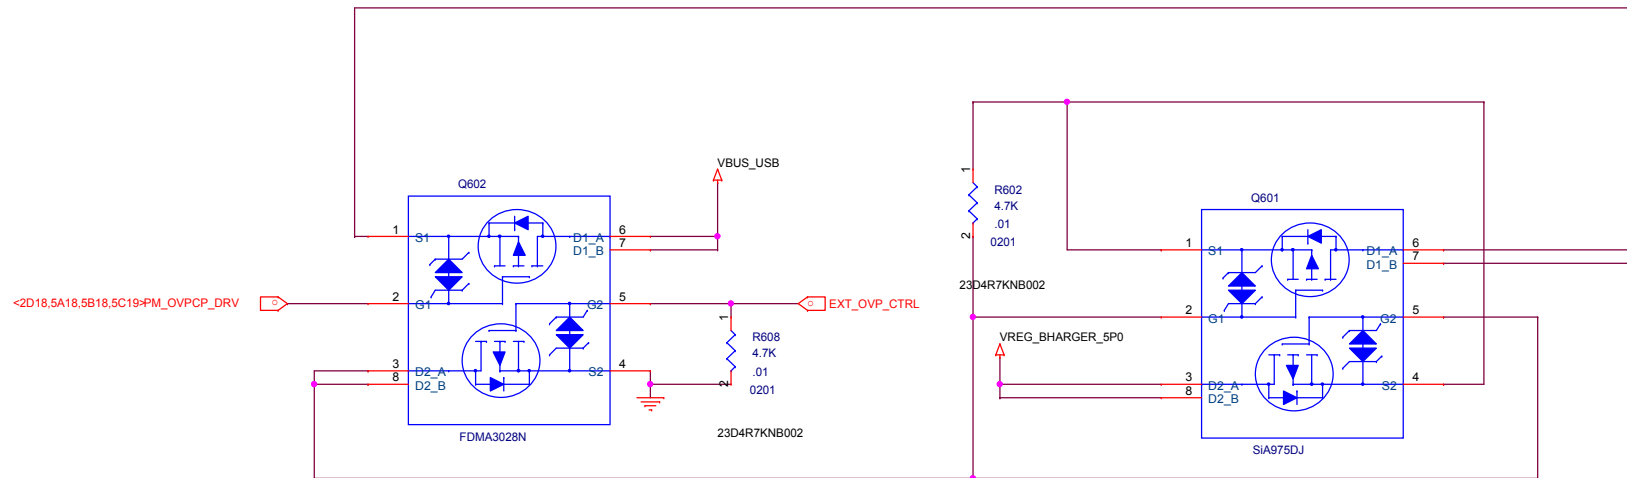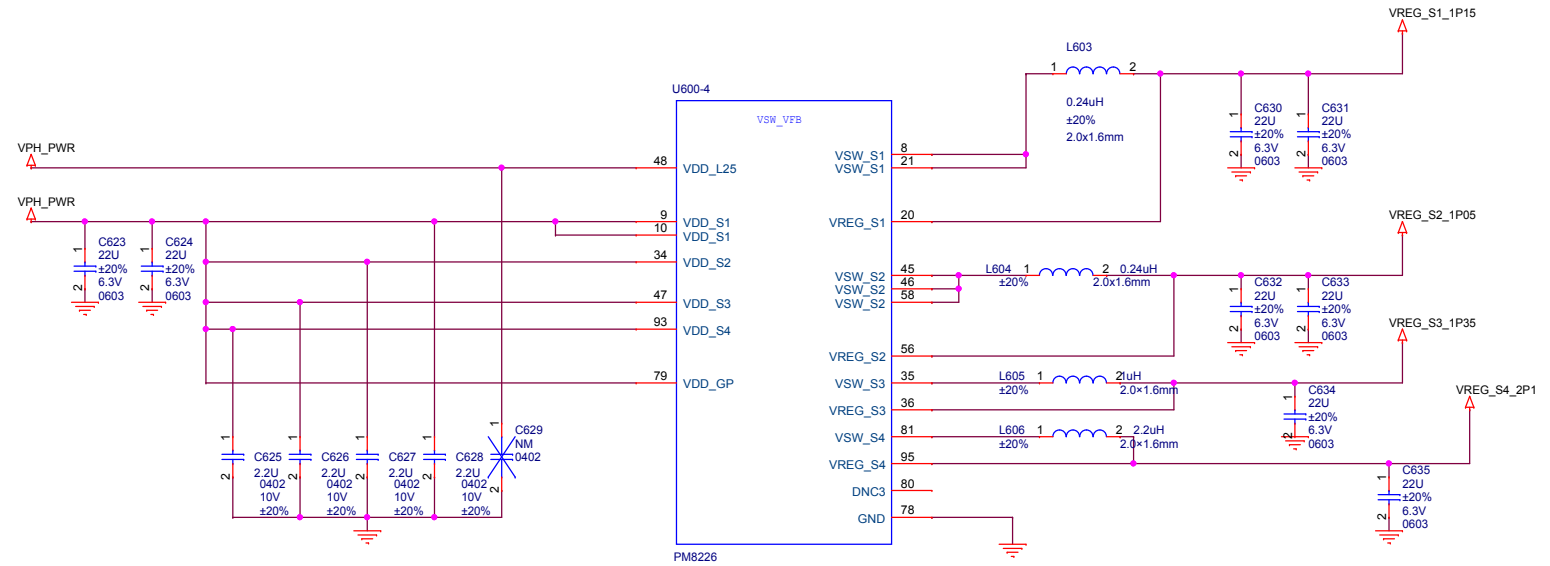

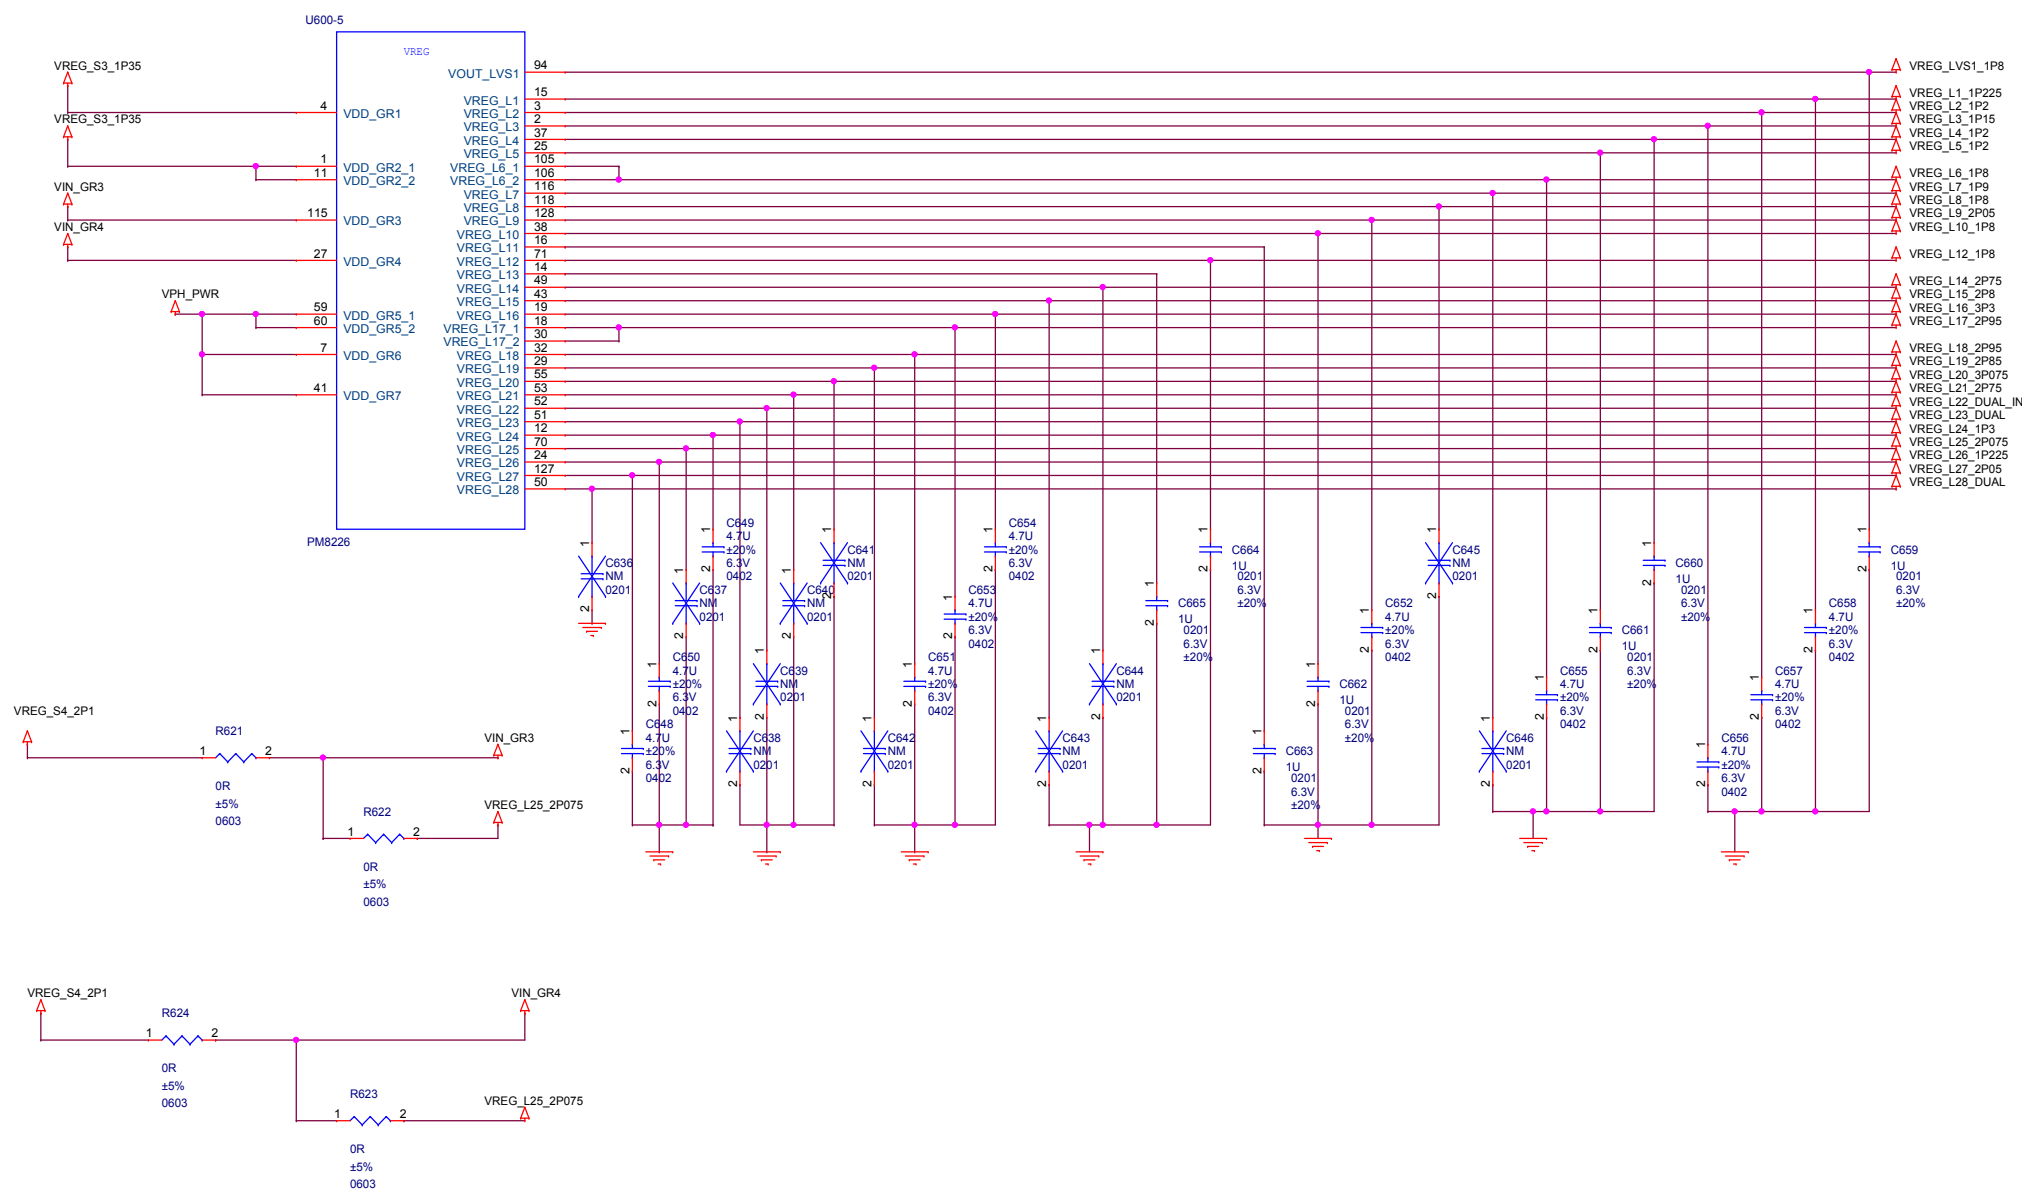

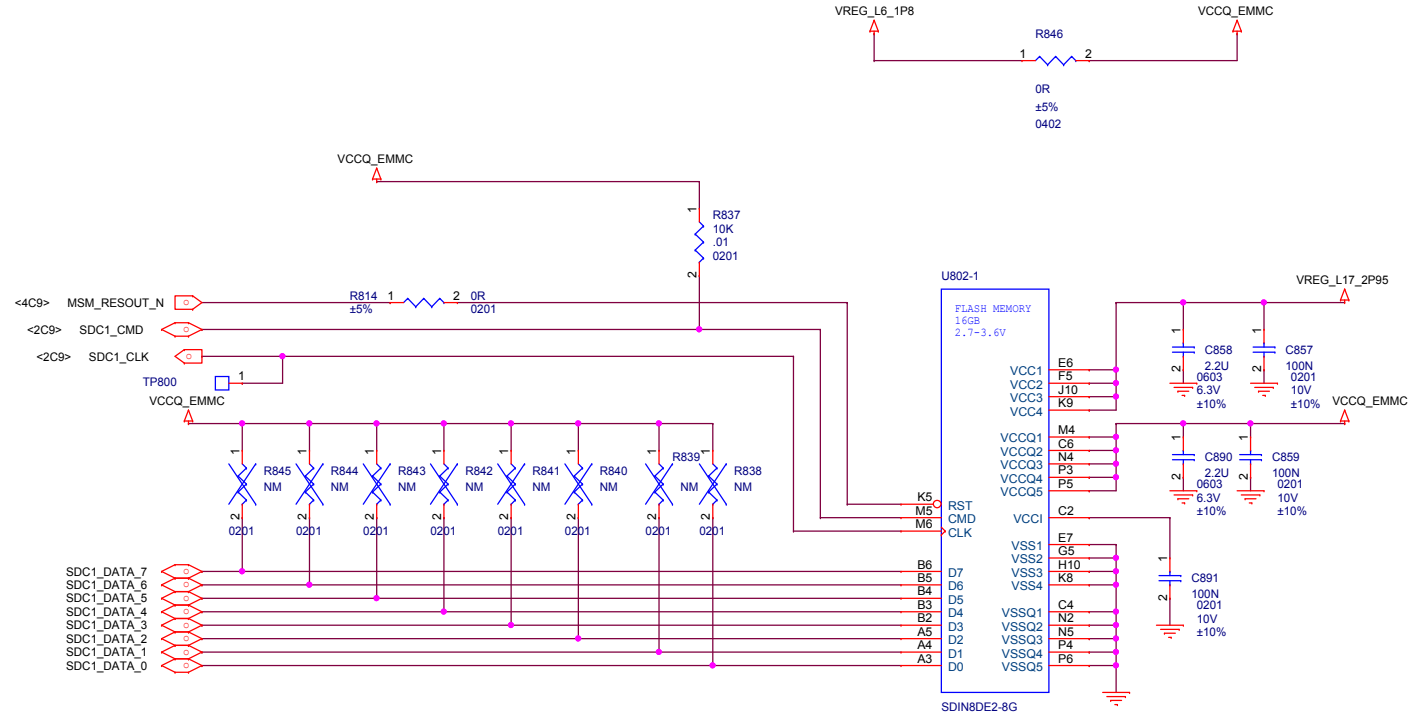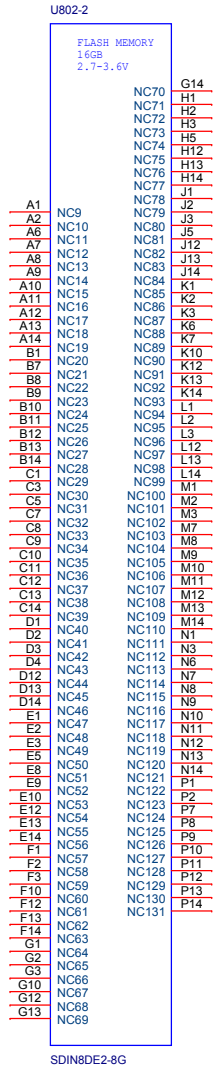

<3C10> MIPI_DSI0_CLK_P
<3C10> MIPI_DSI0_CLK_M
<3C10> MIPI_DSI0_DATA2_P
<3C10> MIPI_DSI0_DATA2_M




<4D22> MIPI_DSI0_DATA2_P_N
<2D22,4D22> MIPI_DSI0_CLK_M_N
<2D22,4C22> MIPI_DSI0_DATA1_P_N
<2D22,4C22> MIPI_DSI0_DATA0_M_N

<4C12> DSI_RST_N
<4A18> WLED_DRV_N


P0.1 CR1100,CR1103
不贴

<3C10> MIPI_DSI0_DATA0_P
<3C10> MIPI_DSI0_DATA0_M
<3C10> MIPI_DSI0_DATA1_P
<3C10> MIPI_DSI0_DATA1_M



<2D22,4D22> MIPI_DSI0_DATA0_P_N
<2D22,4D22> MIPI_DSI0_DATA0_M_N
<2D22,4D22> MIPI_DSI0_DATA1_P_N
<2D22,4D22> MIPI_DSI0_DATA1_M_N

CTP

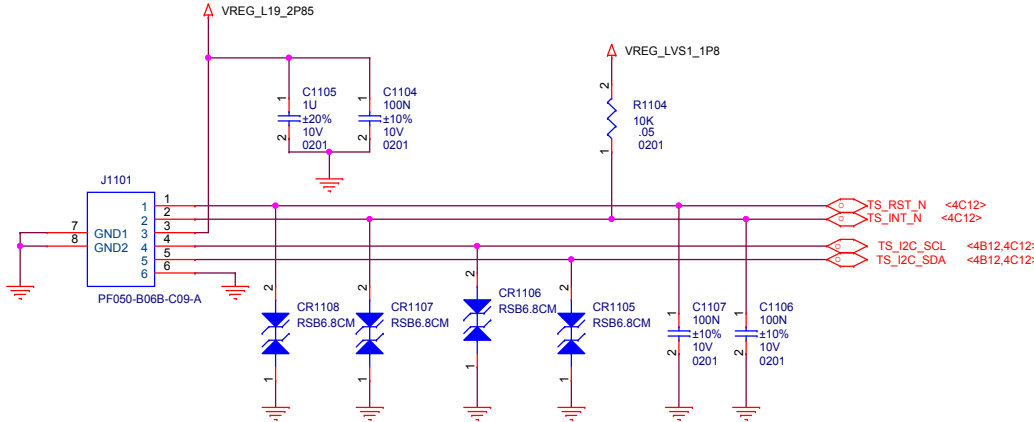

I2C ID
0xBA (power on @INT=low)
0x28 (power on @INT=high)


Sensor ID (identify different TP module)
OPT1/OPT2 need to connect to TP
(please refer to Goodix design notice)

Main LCM

P0.1 CR1100,CR1103
不贴


Title		2013028_LCD_CTP
Size	Document Number	<Doc>
A3	<Doc>	
Date:	Monday, December 30, 2013	Sheet 22 of 28

Main Camera

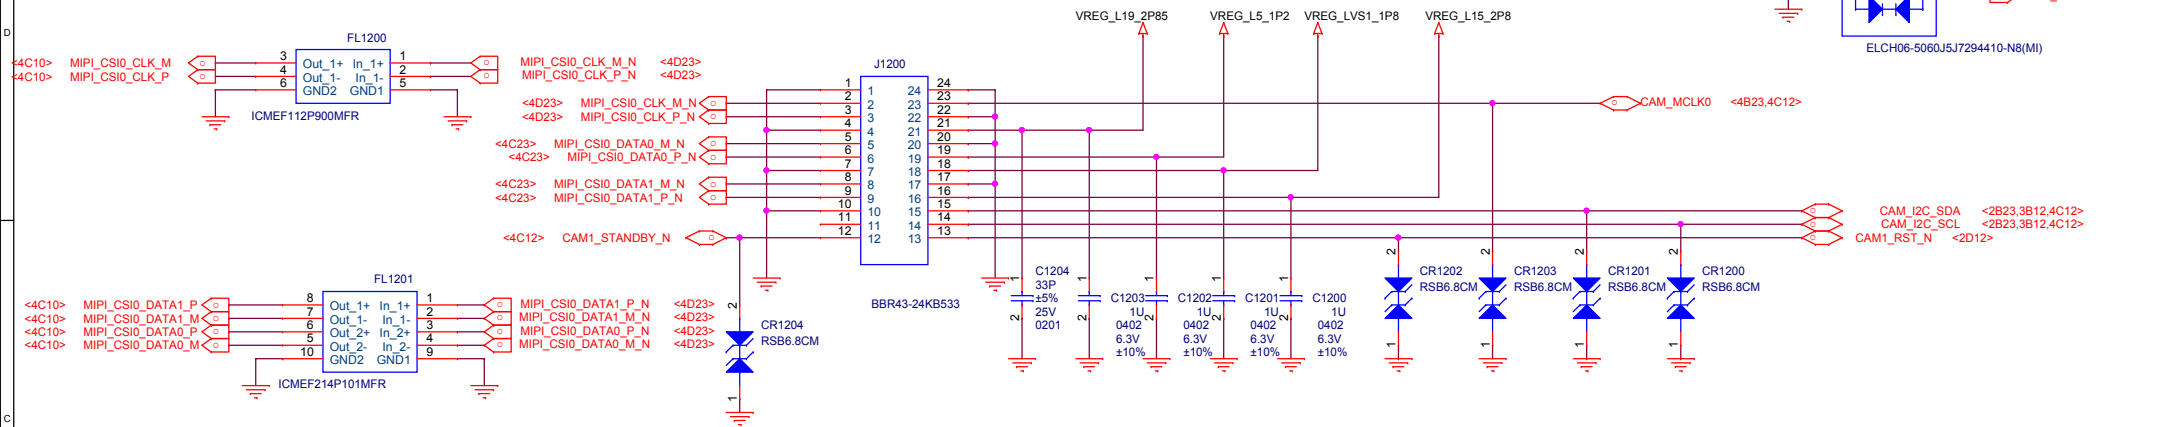


Sub Camera

ALS & PS Sensor

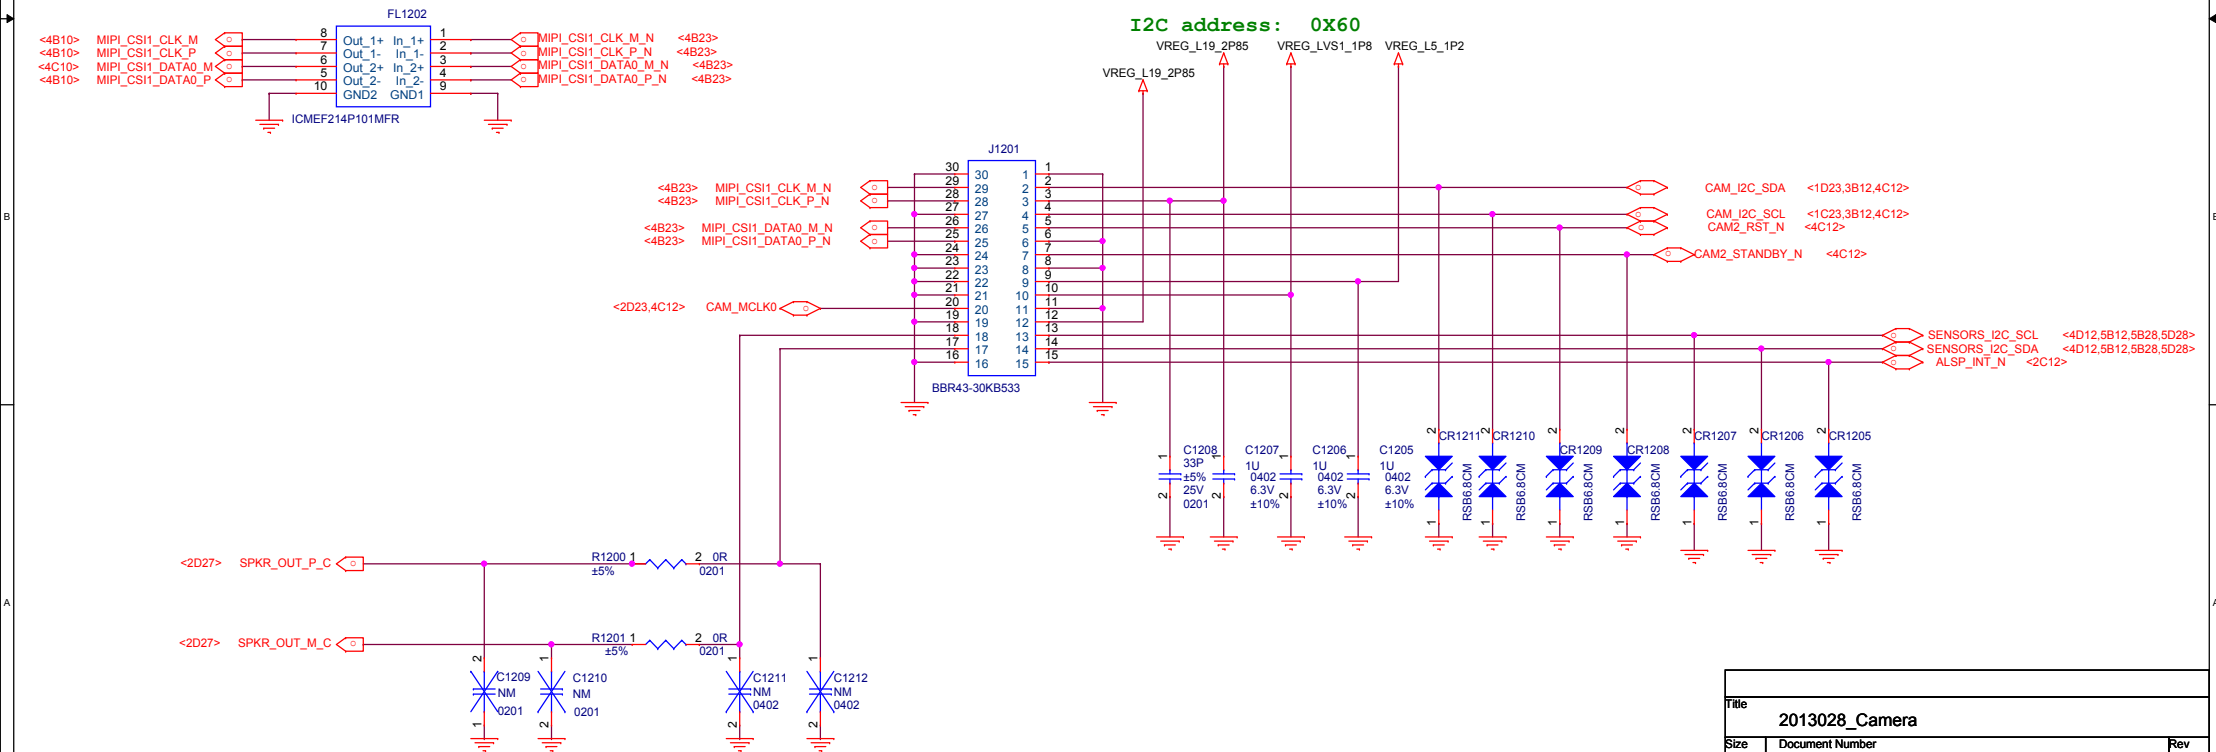


Title		
2013028_Camera		
Size	Document Number	Rev
A3	<Doc>	<RevCode>
Date:	Monday, December 30, 2013	Sheet 23 of 28



Receiver



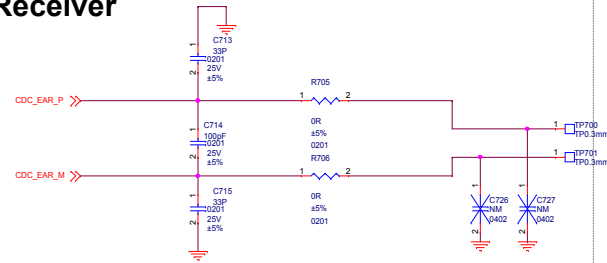


Earphone Audio

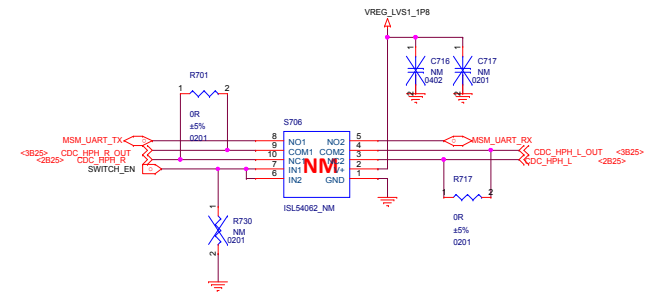


Handset Microphone

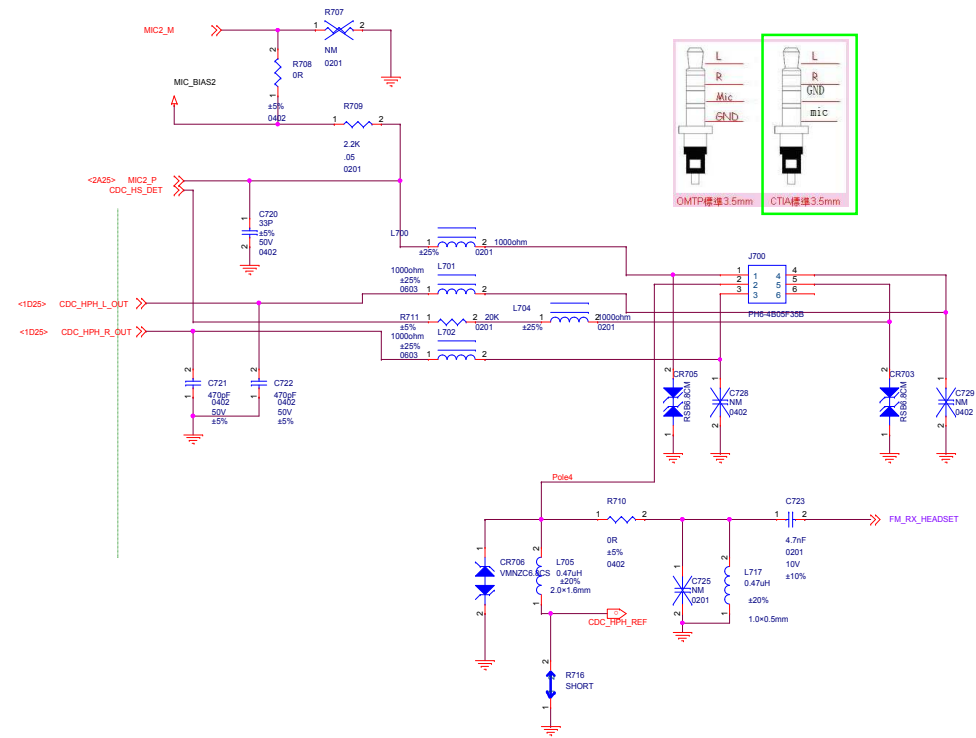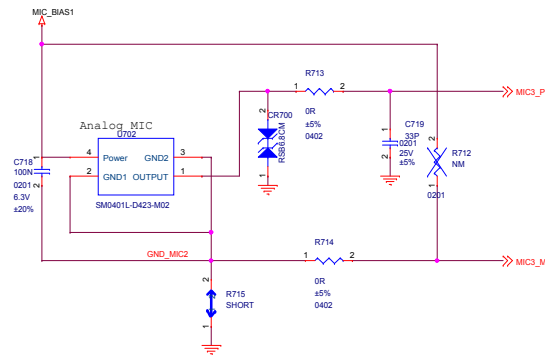

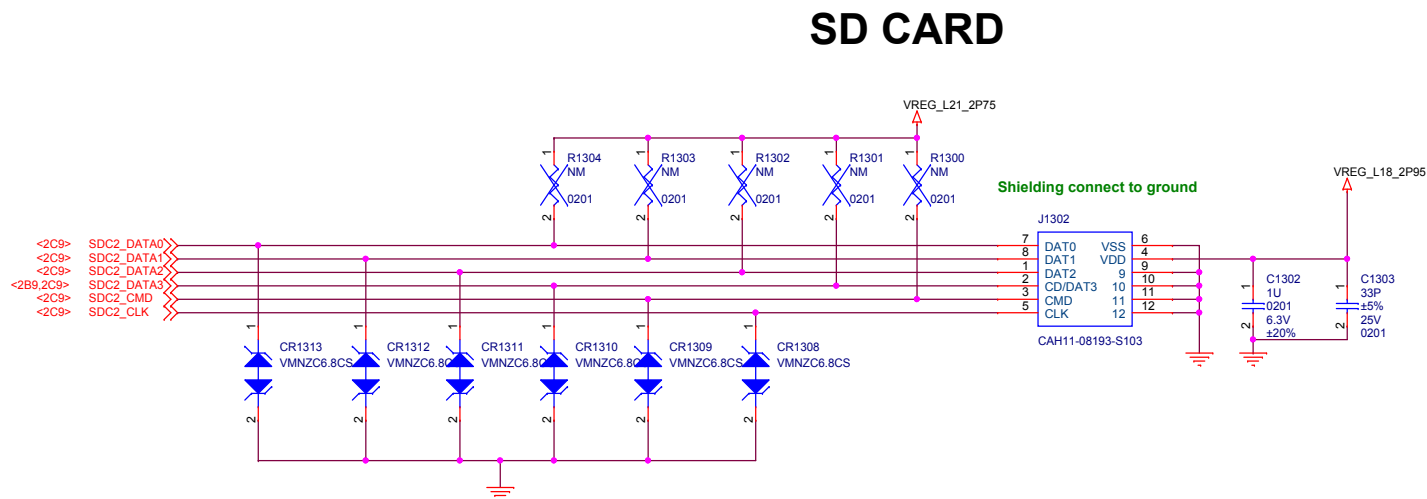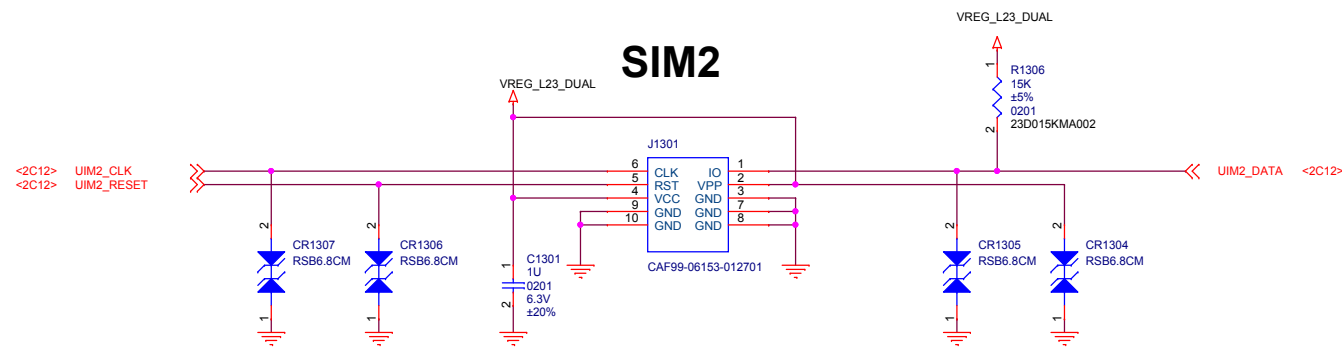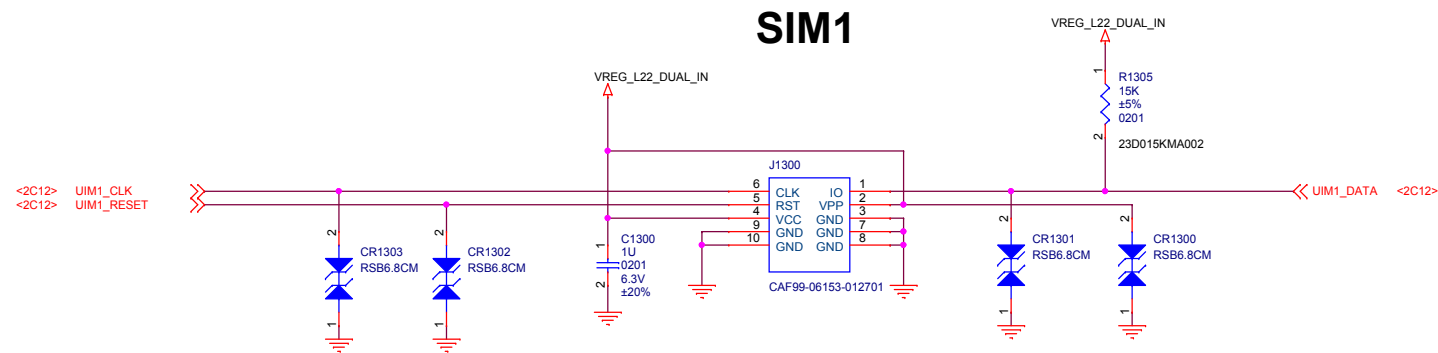


Title		
2013028_SIM&SDCARD		
Size A3	Document Number <Doc>	Rev 0.1
Date: Monday, December 30, 2013	Sheet 26 of 28	


MAIN MIC+USB+RGB

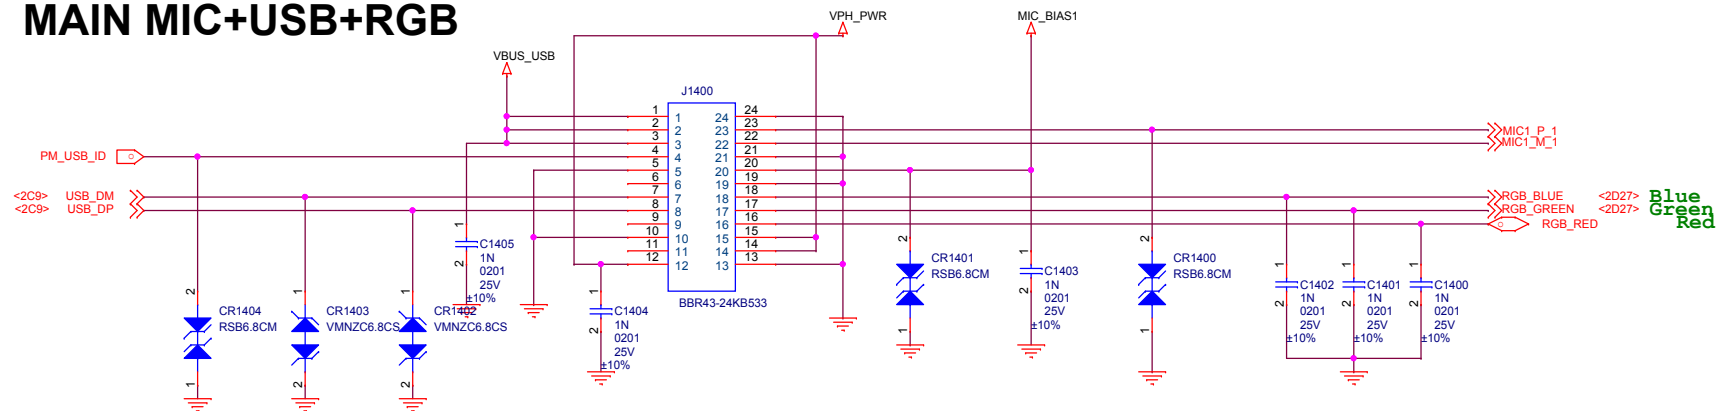


Power Key

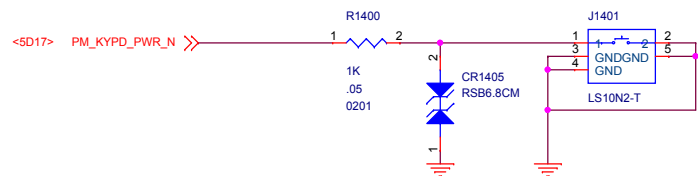


Volume Up

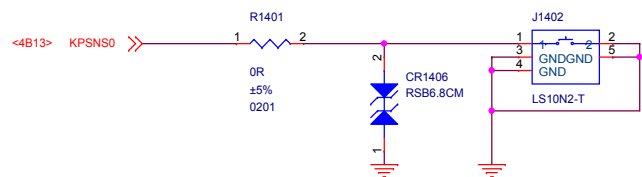

Volume Down

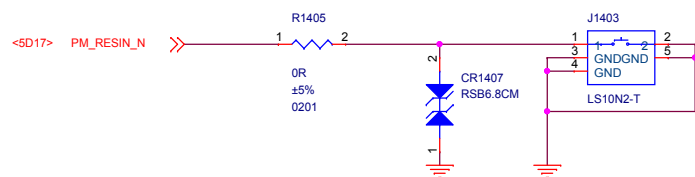

Handset Microphone 1

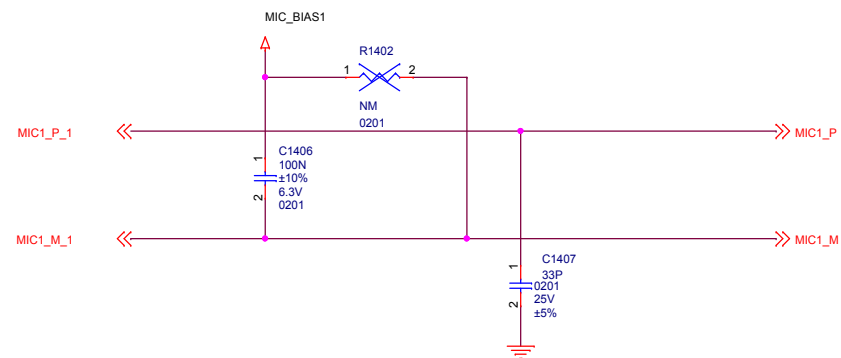

Title		
2013028_KEY&RGB		
Size	Document Number	Rev
A3	<Doc>	0.1
Date:	Monday, December 30, 2013	Sheet 27 of 28

G+G-Sensor

The diagram shows the pin configuration and connections for the LSM330TR sensor (U1500). The sensor is connected to a microcontroller via I2C (SCL_A/G and SDA/SDI_A/G). It also includes a Gyro sensor (GYRO_INT_N and ACCL_INT_N). The sensor is powered by two voltage regulators: VREG_LVS1_1P8 and VREG_L19_2P85. The sensor's internal components (R1507, R1506, C1502, C1503) are also shown.

Pin Connections:

- Pin 1:** VREG_LVS1_1P8
- Pin 2:** SCL_A/G
- Pin 3:** SDA/SDI_A/G
- Pin 4:** SCL_A/G
- Pin 5:** SDO_G
- Pin 6:** SDO_A
- Pin 7:** CS_G
- Pin 8:** CS_A
- Pin 9:** DRDY_G/INT2_G
- Pin 10:** INT1_G
- Pin 11:** INT1_A
- Pin 12:** INT2_A
- Pin 13:** DEN_G
- Pin 14:** CAP
- Pin 15:** GND
- Pin 16:** GND
- Pin 17:** GND
- Pin 18:** GND
- Pin 19:** GND
- Pin 20:** GND
- Pin 21:** CAP

Component Values:

- R1507:** 0R ±5% 0201
- R1506:** 10N ±10% 25V 0201
- C1502:** 10U ±20% 6.3V 0402
- C1503:** 10N ±10% 25V 0201
- C1501:** 100nF ±10% 16V 0201

Regulator Connections:

- VREG_LVS1_1P8:** Pin 1 to VREG_LVS1_1P8, Pin 2 to GND.
- VREG_L19_2P85:** Pin 1 to VREG_L19_2P85, Pin 2 to GND.

Microcontroller Connections:

- SCL_A/G:** Connect to microcontroller SCL pin.
- SDA/SDI_A/G:** Connect to microcontroller SDA pin.
- SDO_G:** Connect to microcontroller SDO pin.
- SDO_A:** Connect to microcontroller SDO pin.
- CS_G:** Connect to microcontroller CS pin.
- CS_A:** Connect to microcontroller CS pin.
- DRDY_G/INT2_G:** Connect to microcontroller DRDY pin.
- INT1_G:** Connect to microcontroller INT1 pin.
- INT1_A:** Connect to microcontroller INT1 pin.
- INT2_A:** Connect to microcontroller INT2 pin.
- DEN_G:** Connect to microcontroller DEN pin.
- CAP:** Connect to microcontroller CAP pin.

Regulator Connections:

- VREG_LVS1_1P8:** Pin 1 to VREG_LVS1_1P8, Pin 2 to GND.
- VREG_L19_2P85:** Pin 1 to VREG_L19_2P85, Pin 2 to GND.

Microcontroller Connections:

- SCL_A/G:** Connect to microcontroller SCL pin.
- SDA/SDI_A/G:** Connect to microcontroller SDA pin.
- SDO_G:** Connect to microcontroller SDO pin.
- SDO_A:** Connect to microcontroller SDO pin.
- CS_G:** Connect to microcontroller CS pin.
- CS_A:** Connect to microcontroller CS pin.
- DRDY_G/INT2_G:** Connect to microcontroller DRDY pin.
- INT1_G:** Connect to microcontroller INT1 pin.
- INT1_A:** Connect to microcontroller INT1 pin.
- INT2_A:** Connect to microcontroller INT2 pin.
- DEN_G:** Connect to microcontroller DEN pin.
- CAP:** Connect to microcontroller CAP pin.

Compass Sensor

U1502
AK09911C

5B12.5D28> SENSORS_I2C_SDA
5B12.5D28> SENSORS_I2C_SCL

<2C12> MAG_INT

C3 B3
A2
C2

SDA SCL
VDD VID
TST
RSTN VSS

A1
C1
A3
B1

VREG_LVS1_1P8
VREG_L19_2P85

C1507
100N
0201
6.3V
±20%

C1506
100N
0201
6.3V
±20%

CAD=0 0001100R/W
CAD=1 0001101R/W

[illegible]