


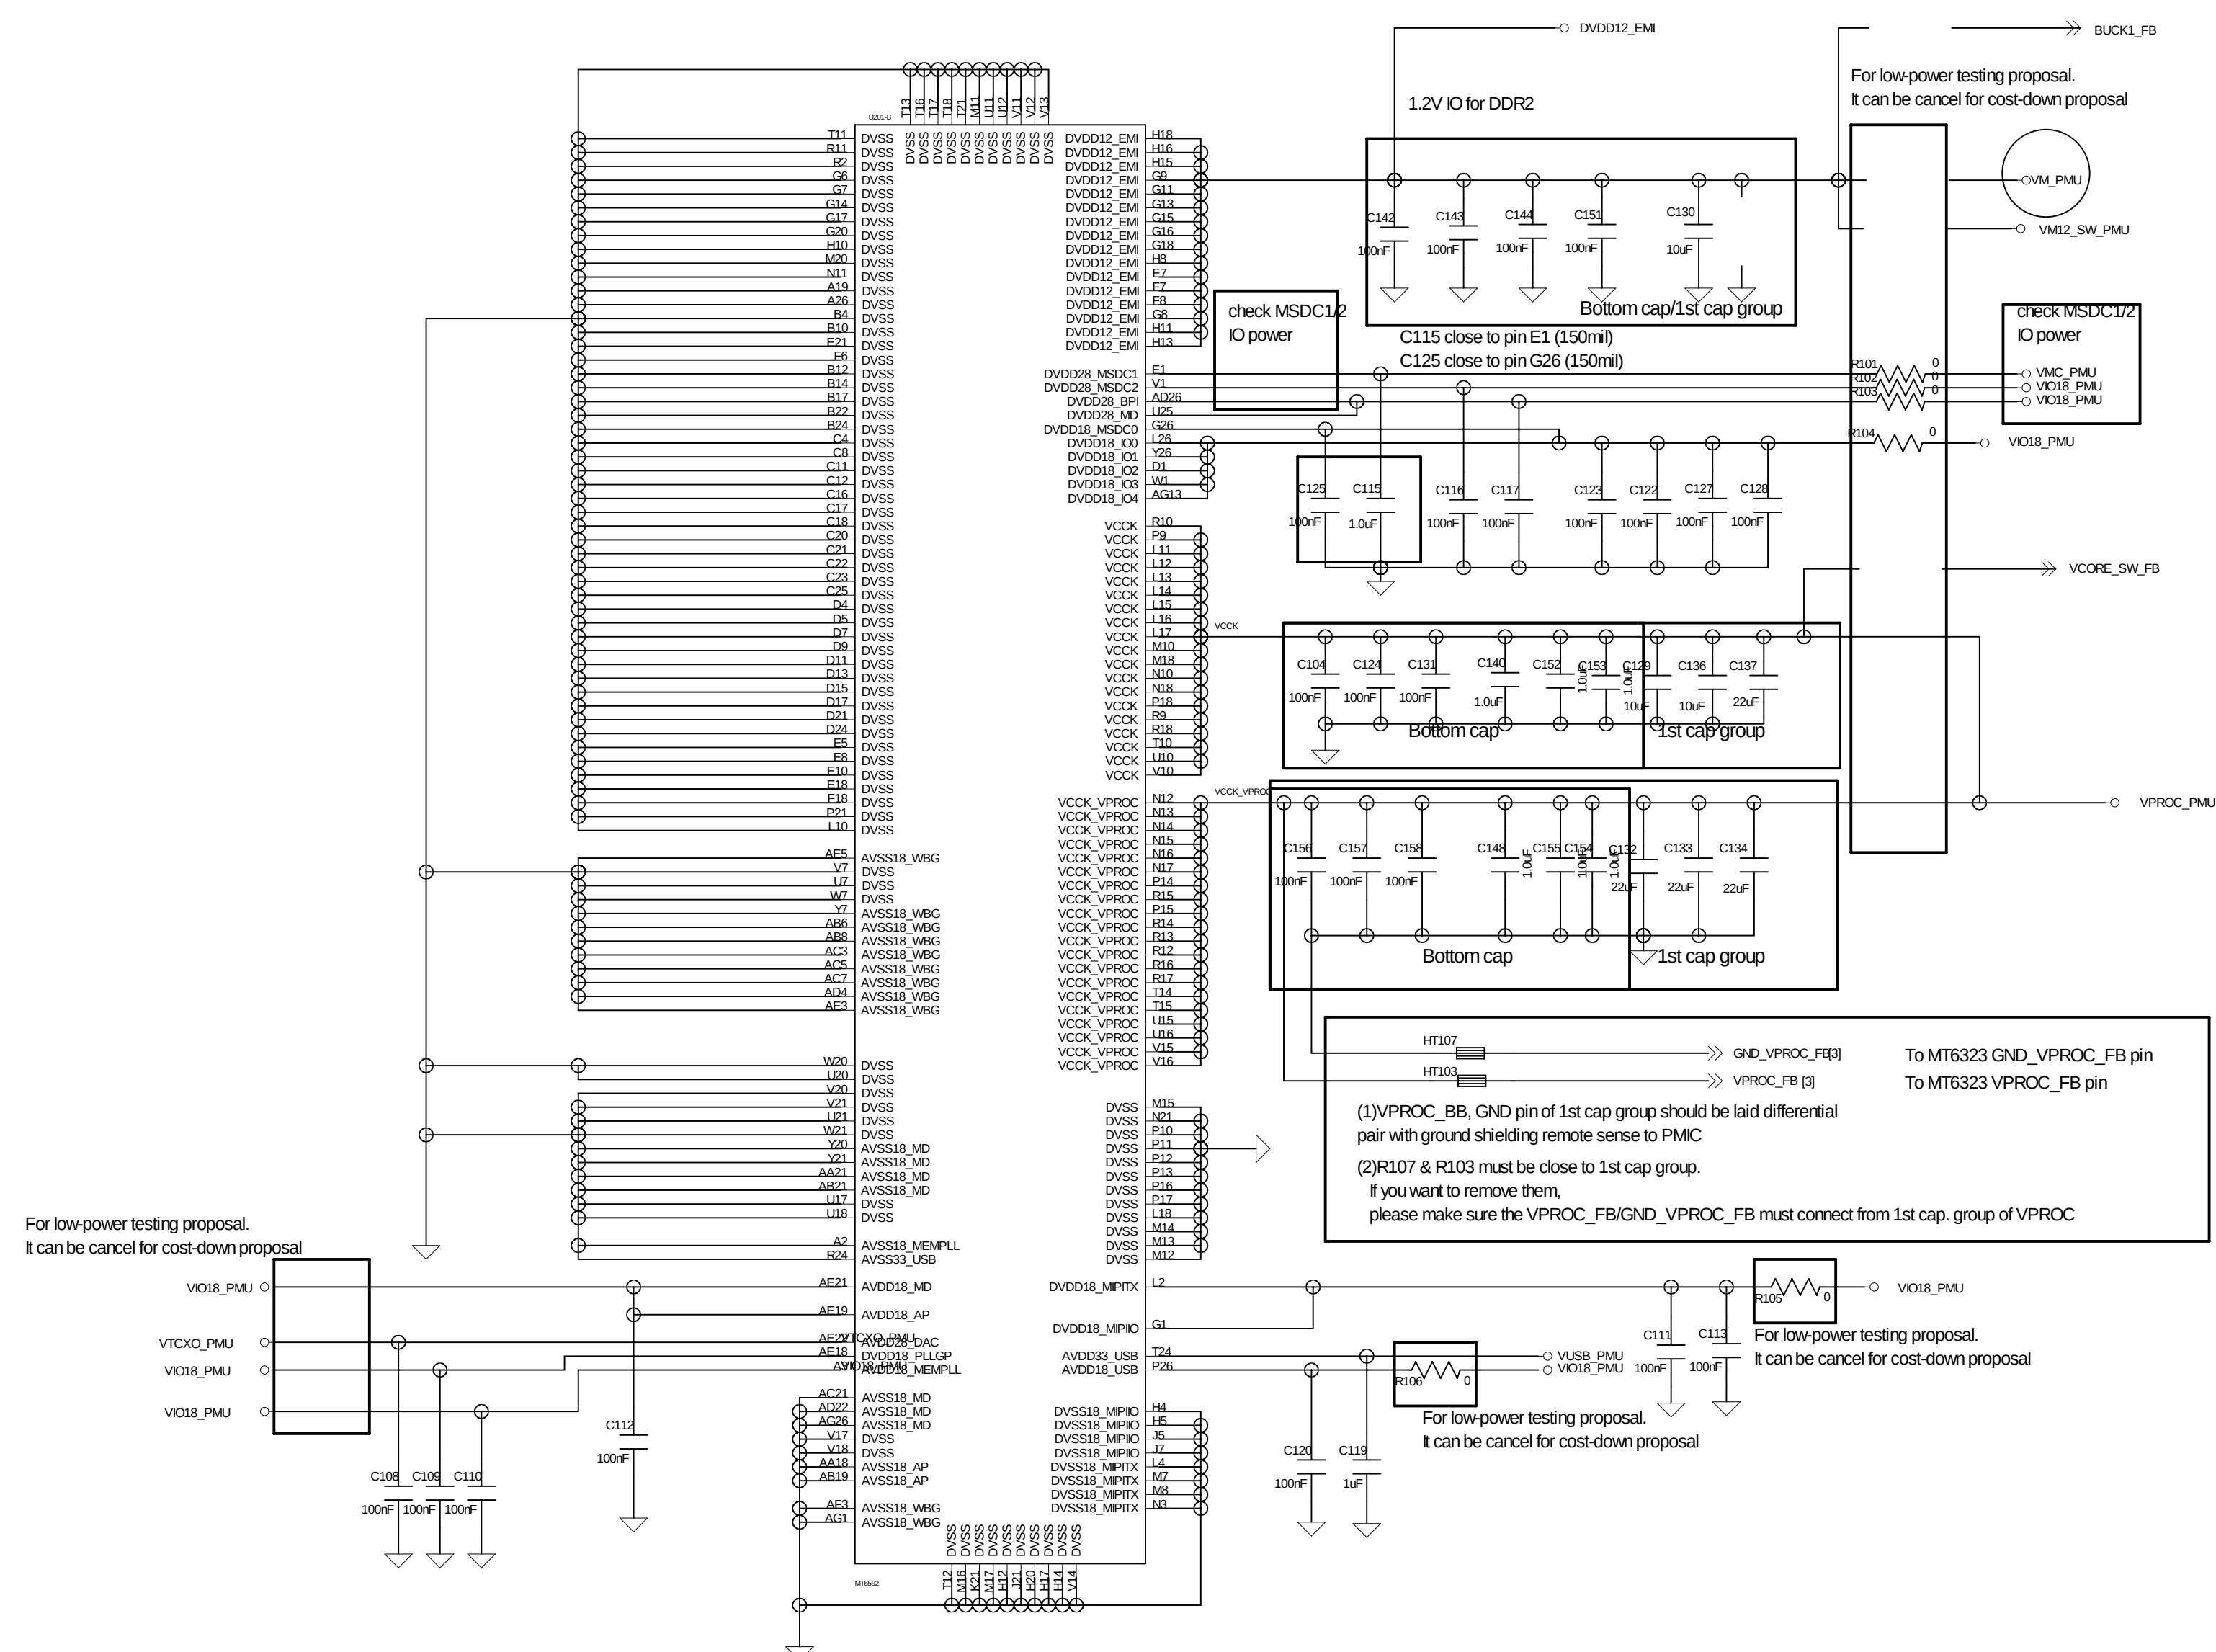

MT6582 R119=NF, R101=0, R102=NF, R120=NF, R110=0

MT6592 R119=0, R101=NF, R102=0, R120=0, R110=NF

MT6582 C135, C137,     NF

MT6592 C135=22uF, C137=22uF

The diagrams illustrate the connection of three PMU modules to the I2C bus. Each module is connected to the SDA line (SDA1, SDA2, or SDA1) and the SCL line (SCL1, SCL2, or SCL0). The SDA line is pulled up to VCC with a 10k resistor, and the SCL line is pulled up to VCC with a 2.2k resistor. The PMU modules are labeled VIO18_PMU, VIO18_PMU, and VIO18_PMU.

MT6605 OSC_EN (SRCLKENA) need to default low for MT6605 TESTMODE boot-strap

C208 are for ESD ehnhance proposal. It can be cancel for cost-down proposal.

For earphone & MSDC hotplug EINT, please choose EINT[0:15] with HW debounce for mechanism plug in/out related application. Ex earphone, MSDC, SIM hot-plug

Notice : Please choose EINT[0:15] with HW debounce for mechanism plug in/out related application. Ex earphone, MSDC, SIM hot-plug

For earphone & MSDC hotplug EINT,
please choose EINT[0:15]
with HW de-bounce function.


Notice :
Please choose EINT[0:15] with
HW debounce for
mechanism plug in/out related application.
Ex: earphone, MSDC, SIM hot-plug

Close to MT6582

Before you select BJT , please take power dissipation into consideration.
Refer to MT6323 design notice



Charger

1. Close to Battery Connector.
(Rsense (R328) <10mm)
2. Main path should be 40mil.
(VBUS -> U303's E, -> U303's C -> R328 -> VBUS)
3. Star connection from R328 to BAT Connector.
**cap rating depends on
Phone OVP spec.**

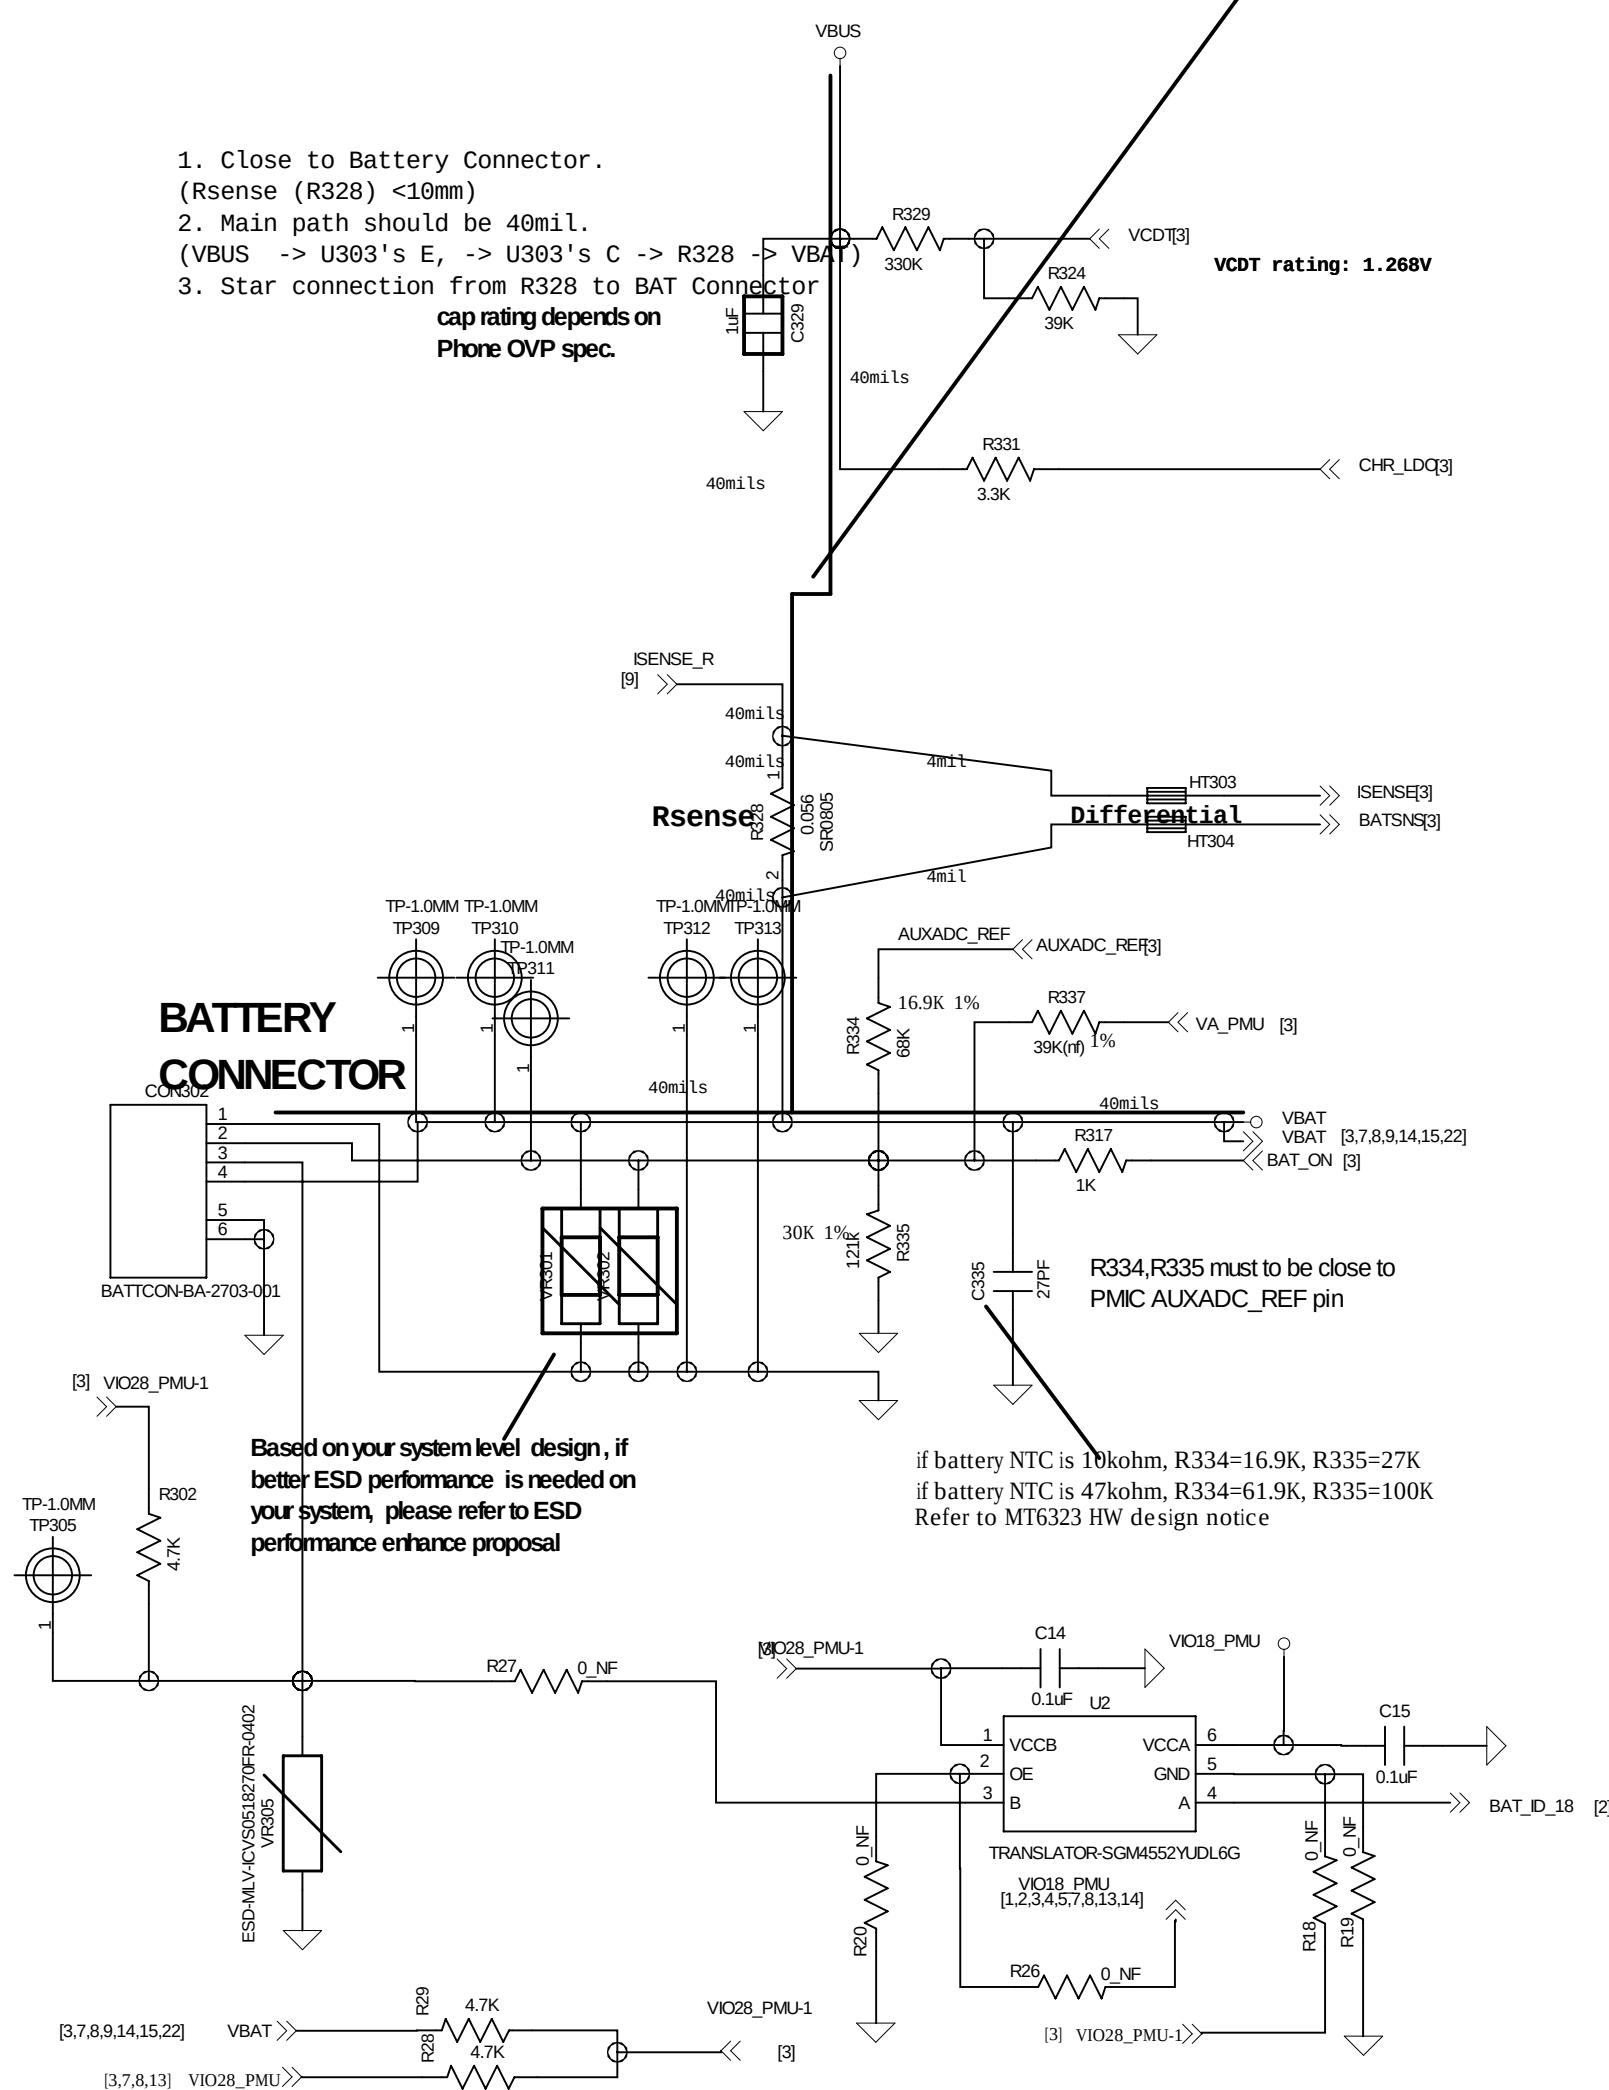

SGM4553°ÍNLSX5011 PIN2,PIN5¶¨Òåİà·£¬×ö¼¶ÈÝÈè¼¶È

VIBRATOR

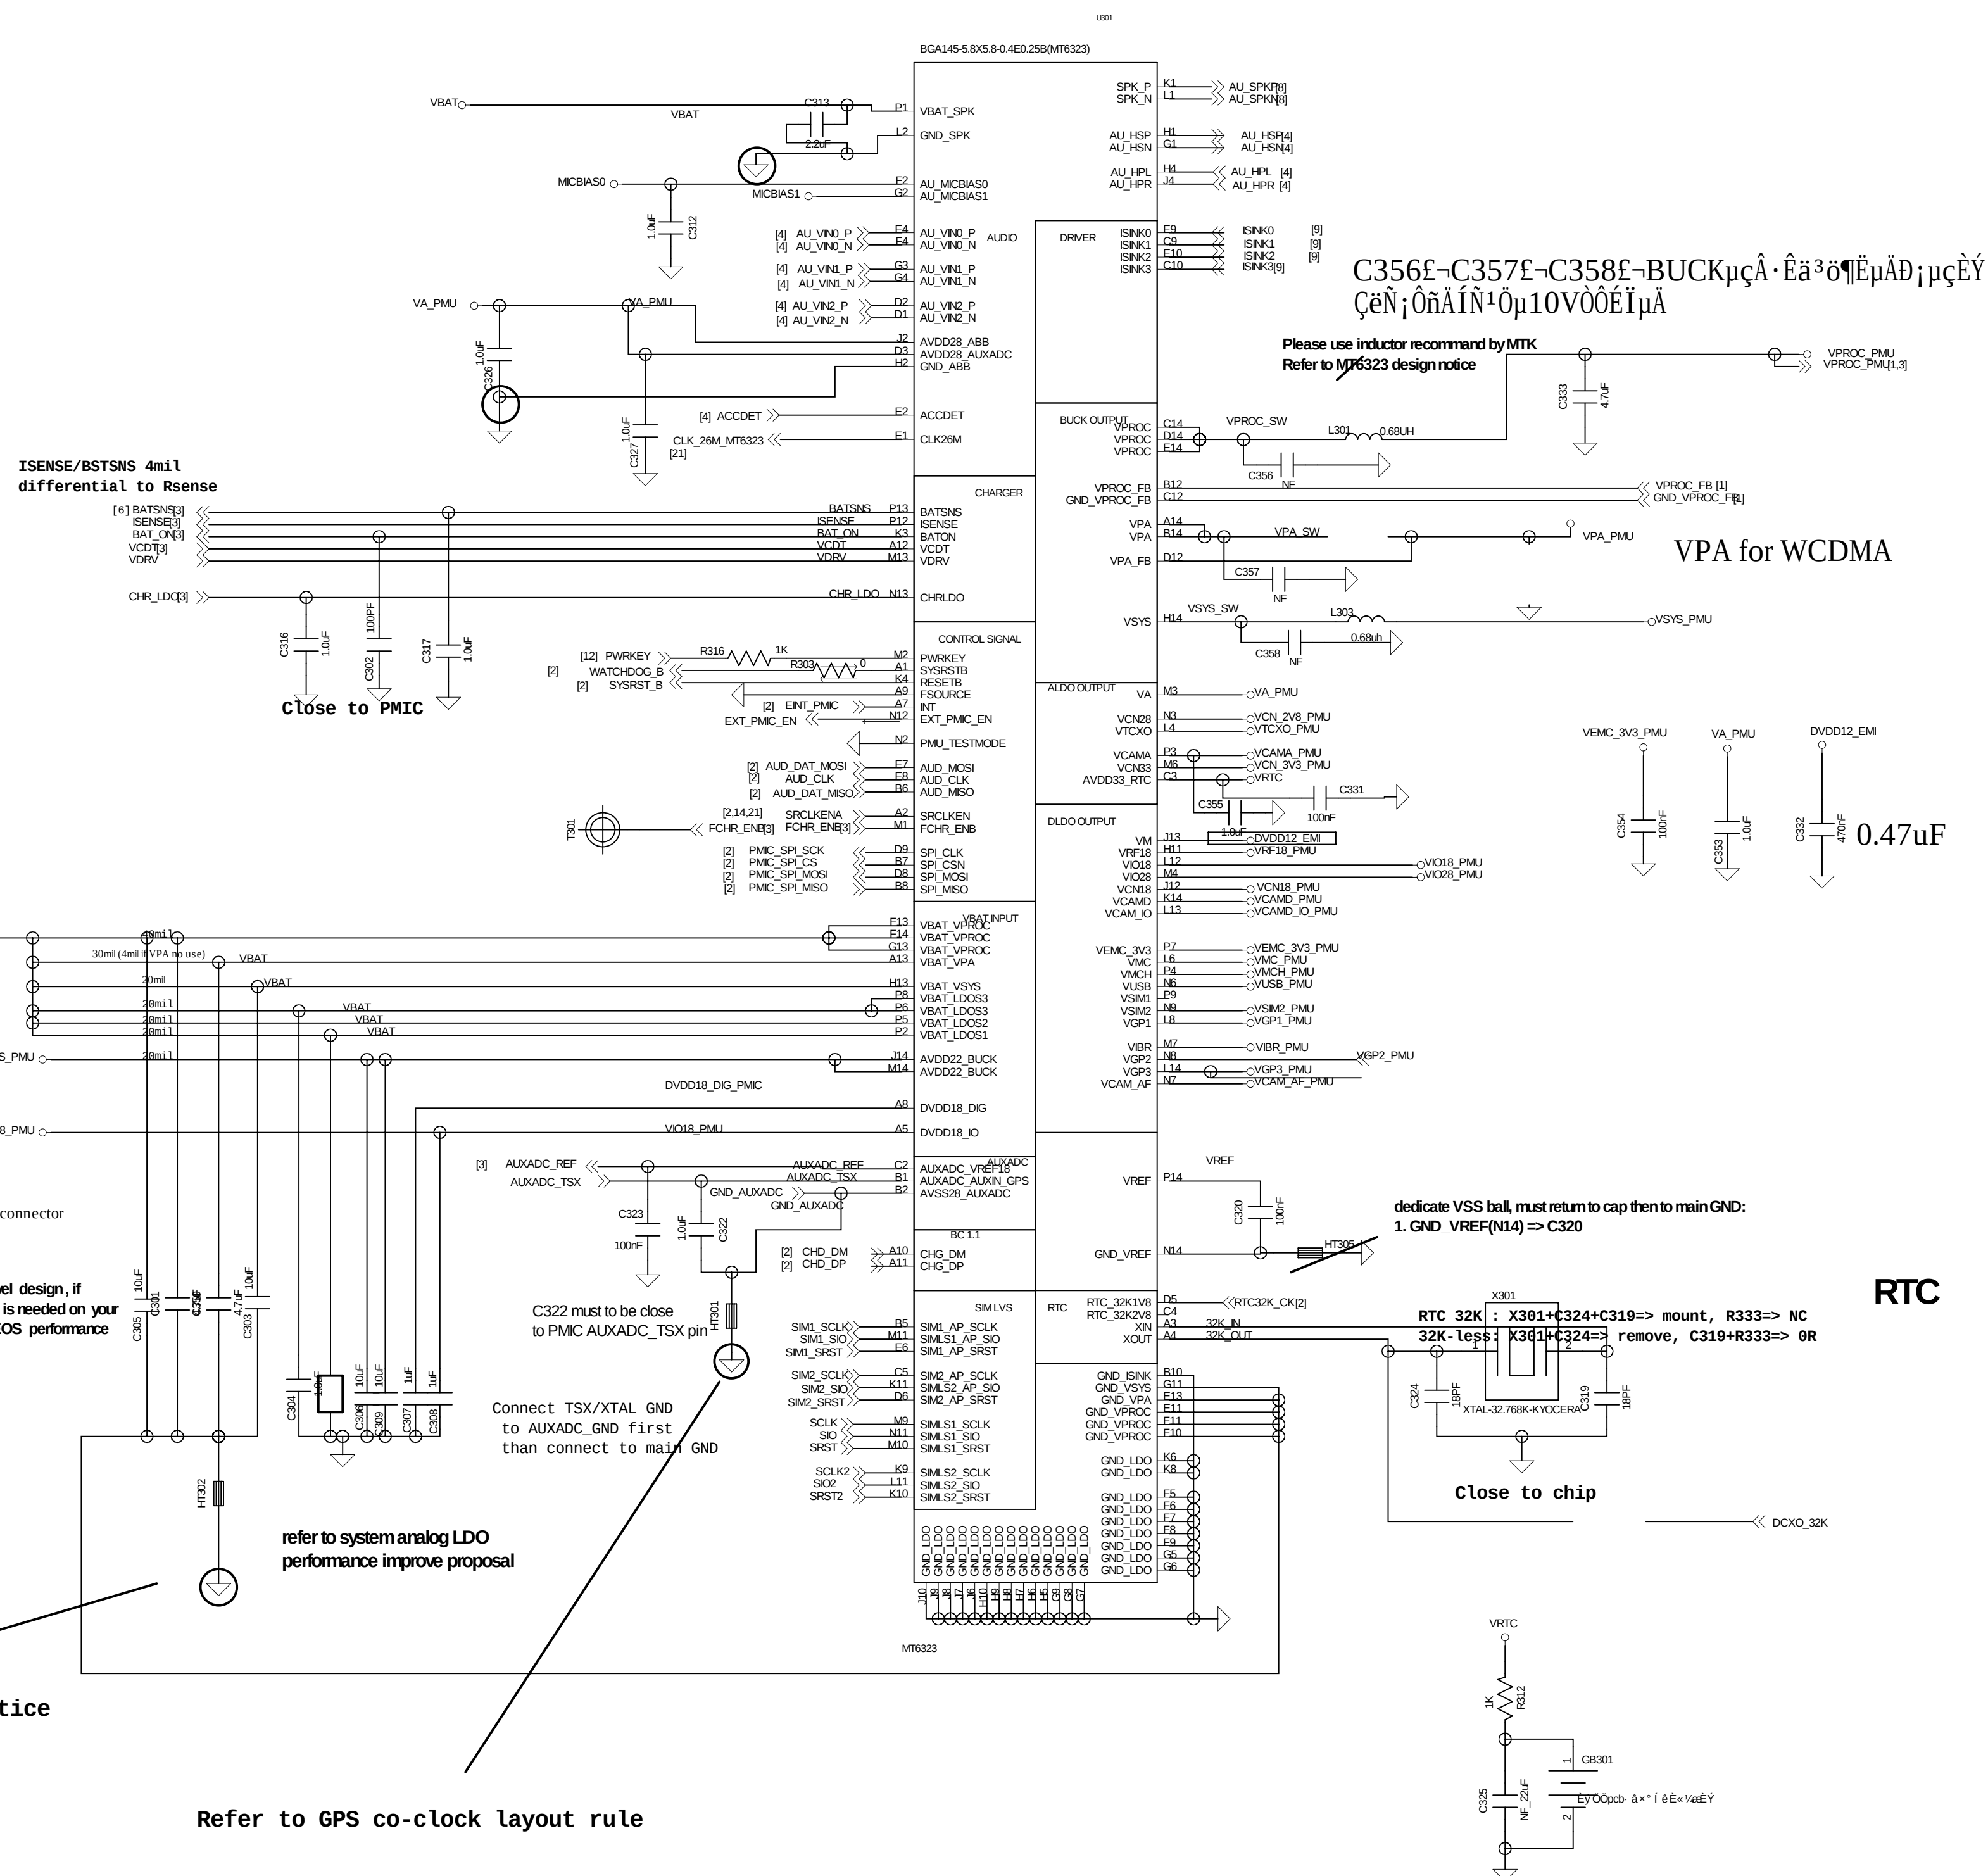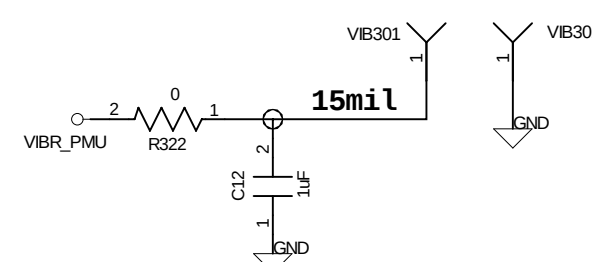

⇒ for longer RTC time sustain after battery remove,
please refer to RTC design notice


⇒ for longer RTC time sustain after battery remove,
please refer to RTC design notice

Symbol	LPDDR2/1.2V	PCDDR3L/1.35V	PCDDR3/1.5V	LPDDR1/1.8V	Default
SPI_CSN	H	L (20K)	H	L (20K)	PU
AUD_MOSI	L	H (20K)	H (20K)	L	PD


Earphone Audio

Based on your system level design, if better desense performance is needed on your system, please refer to desense performance enhance proposal



Receiver

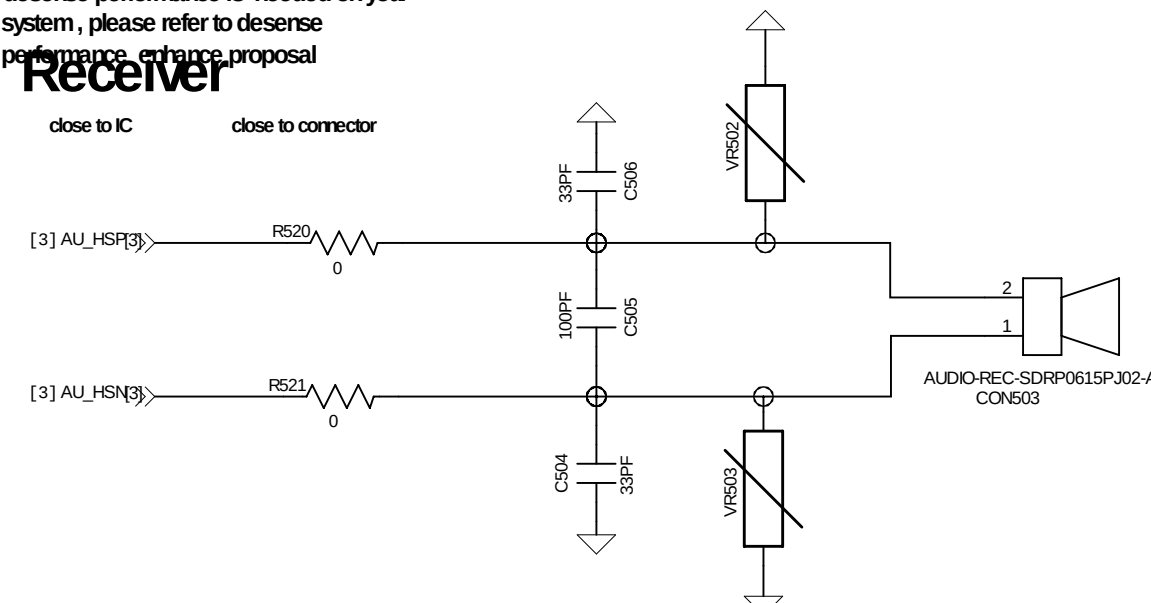


Handset Microphone 1

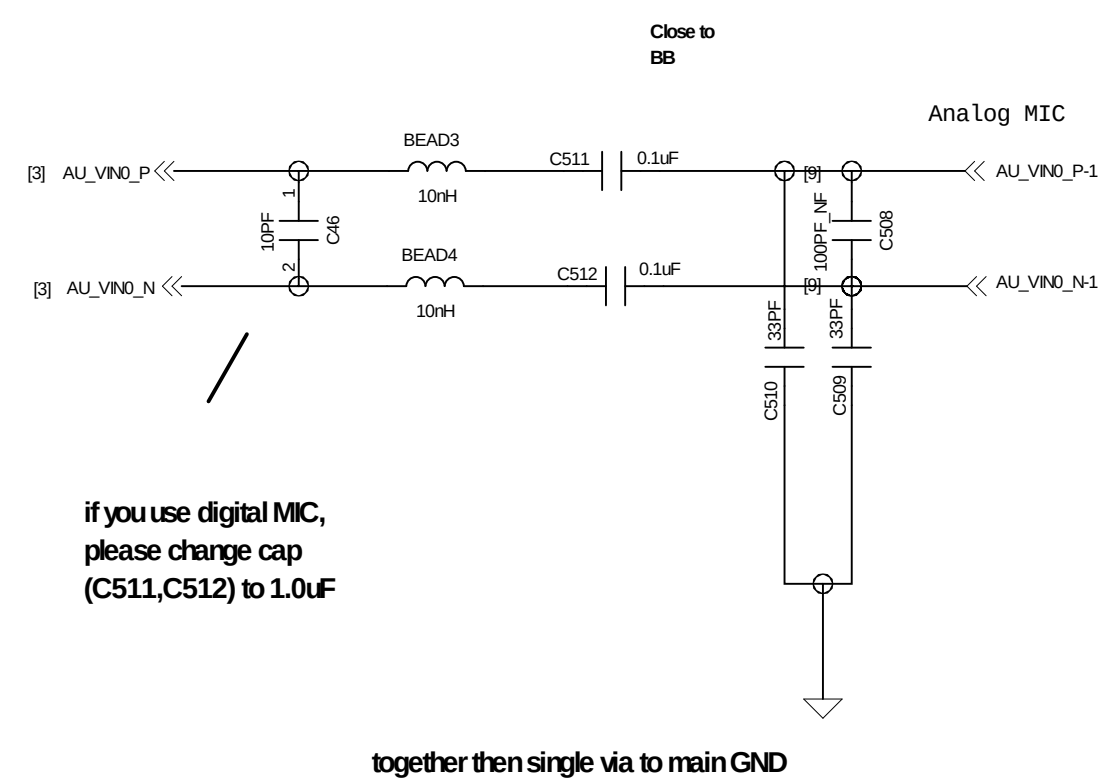


Handset Microphone 2-1

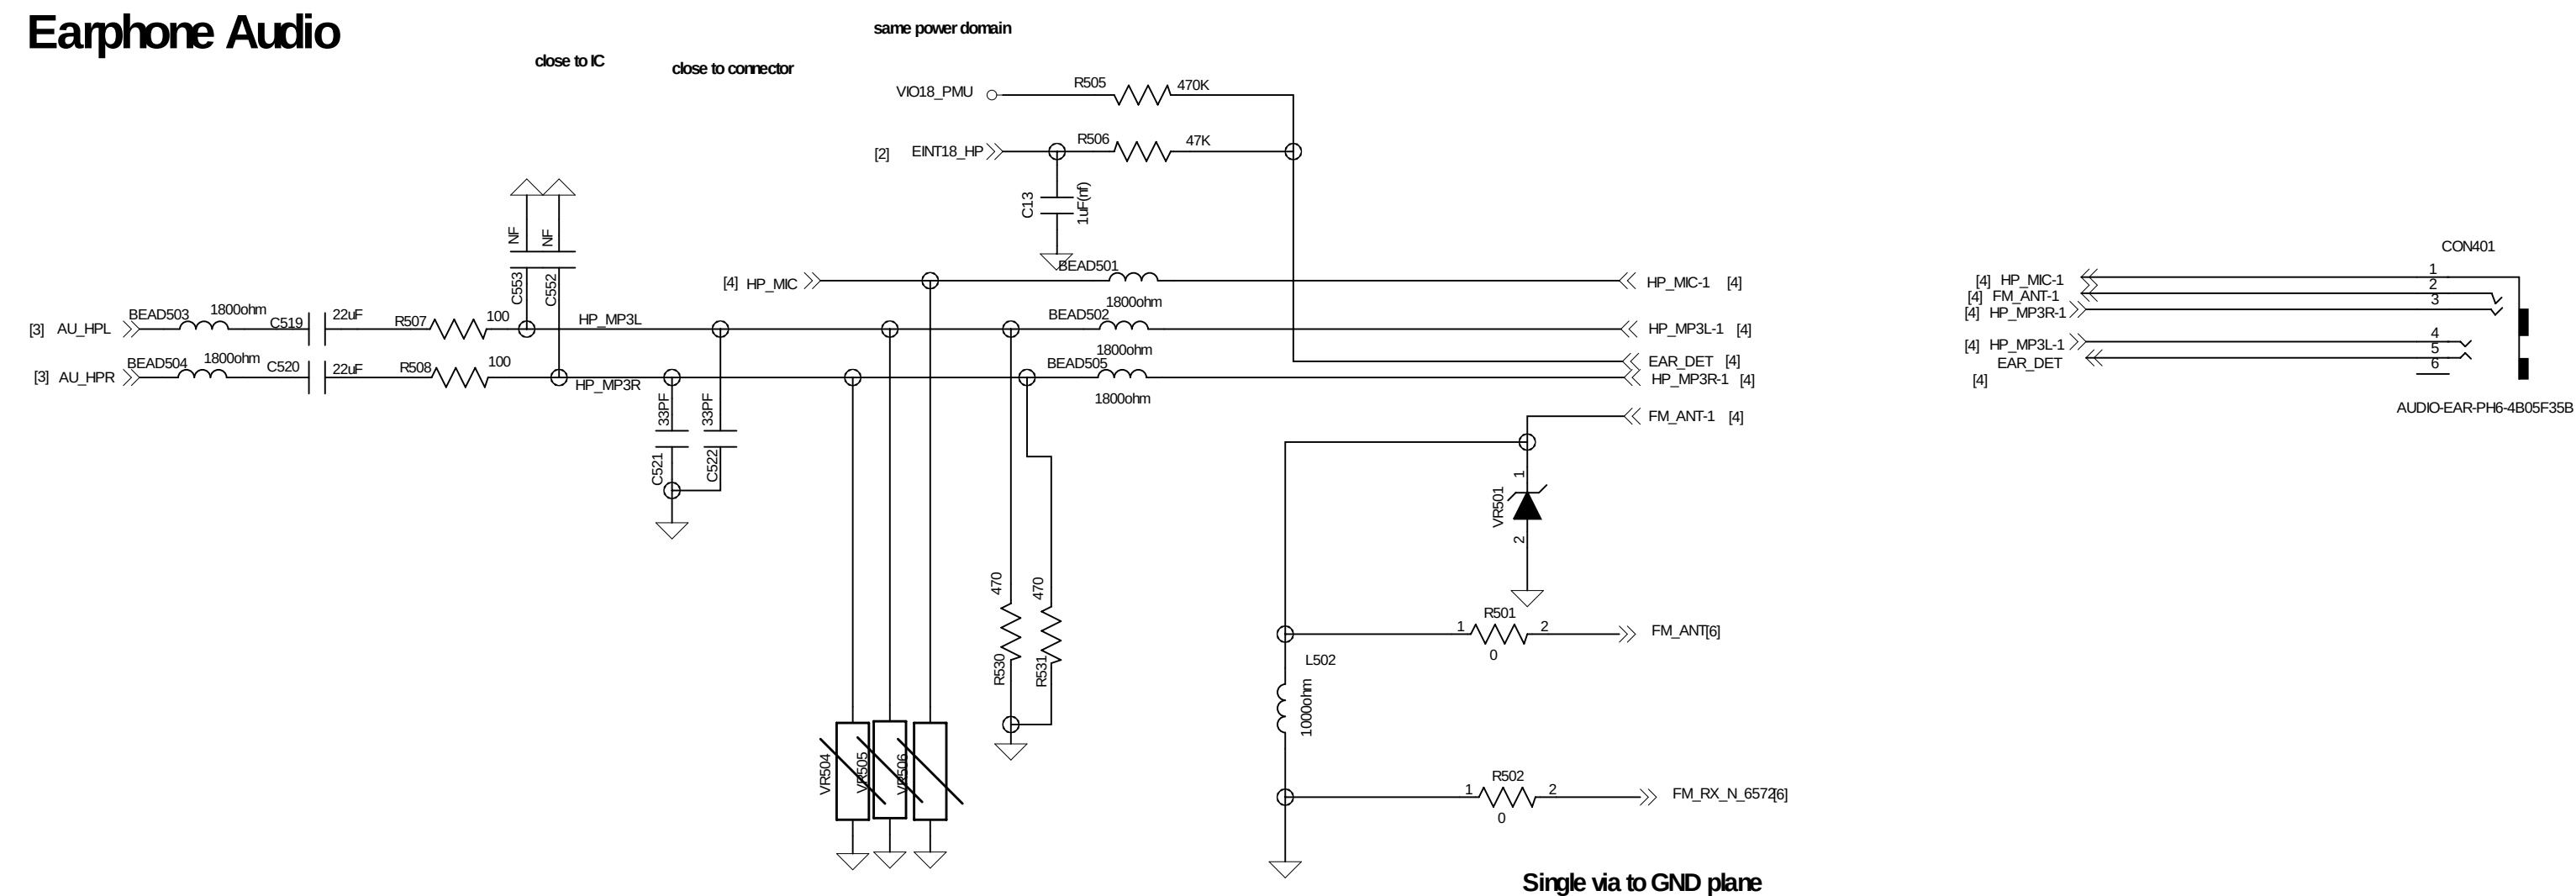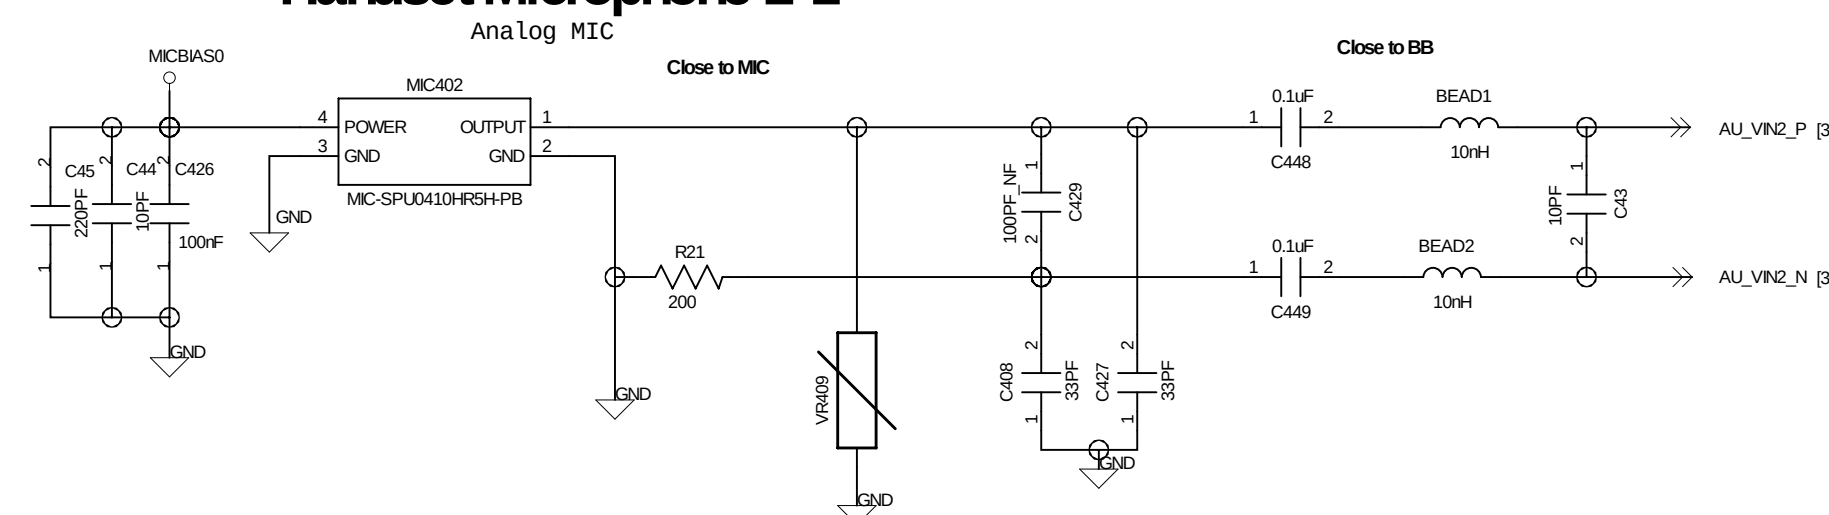


Earphone MICROPHONE


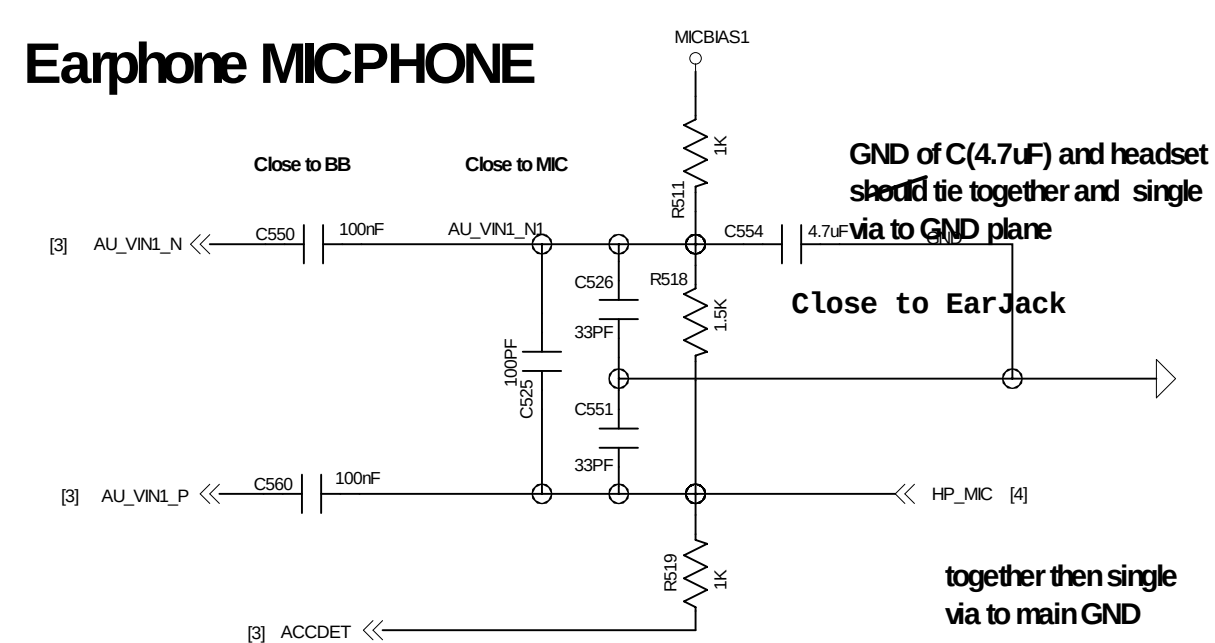




eMMC+LPDDR2

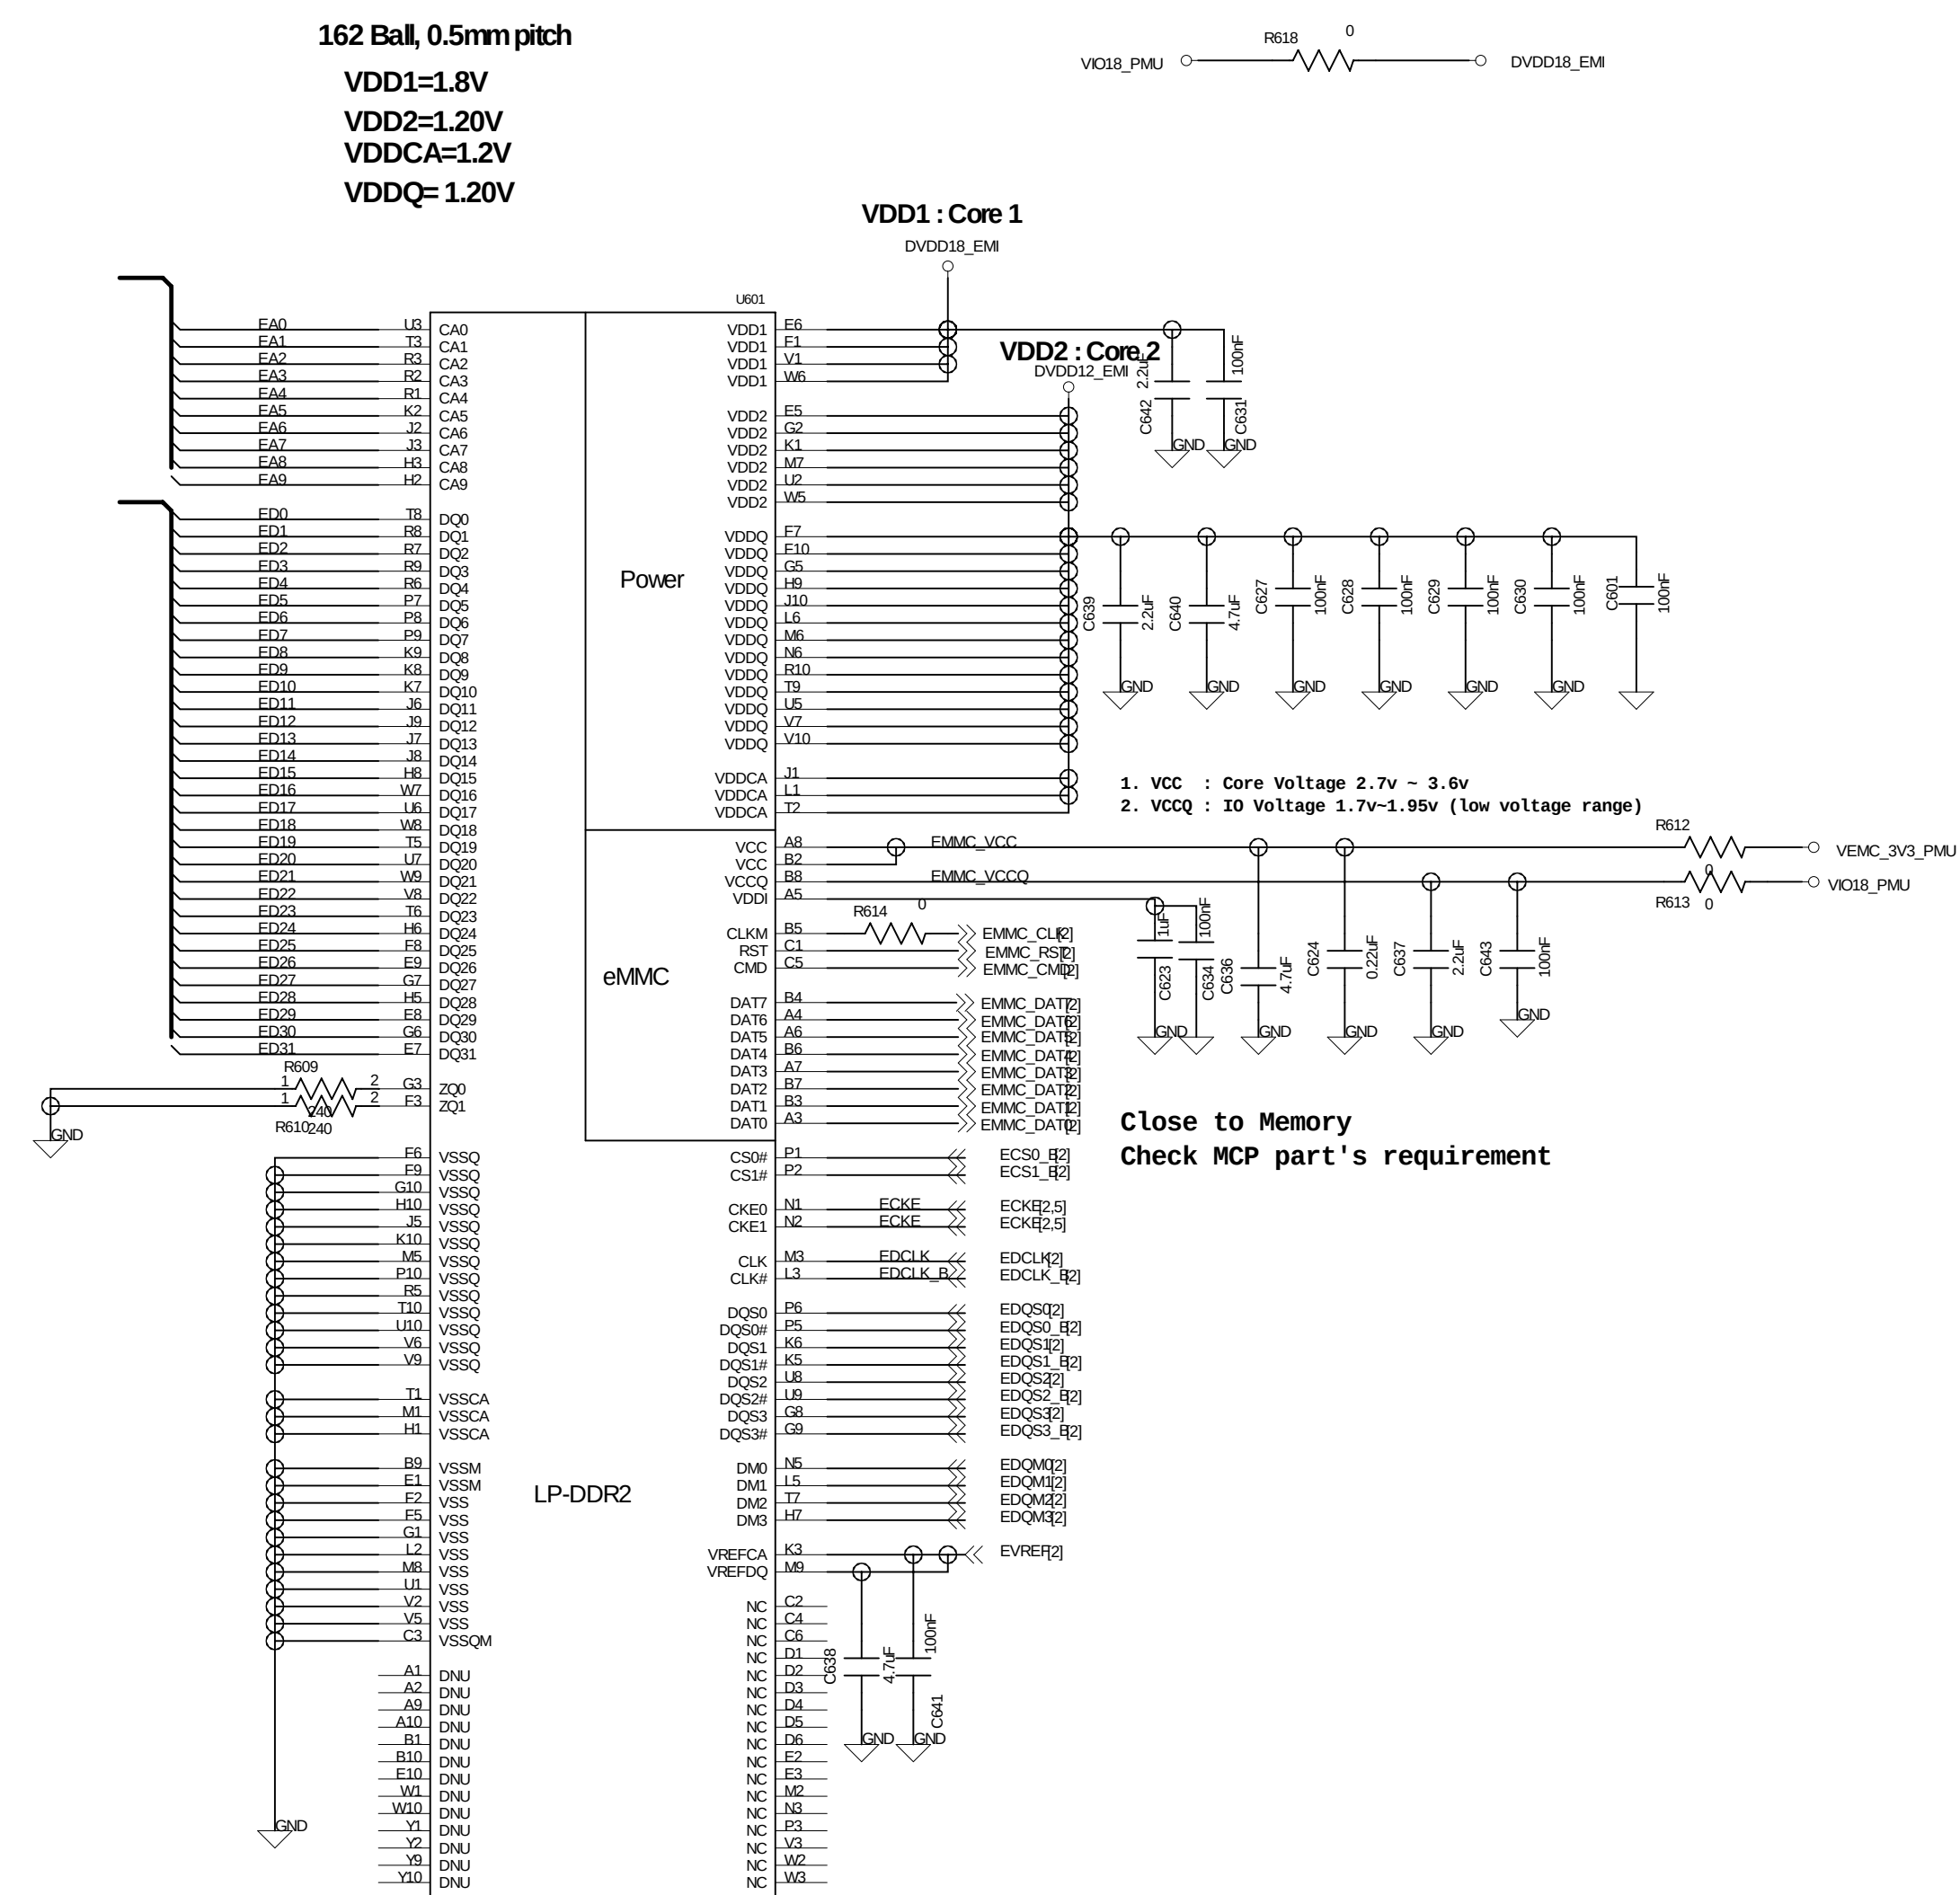

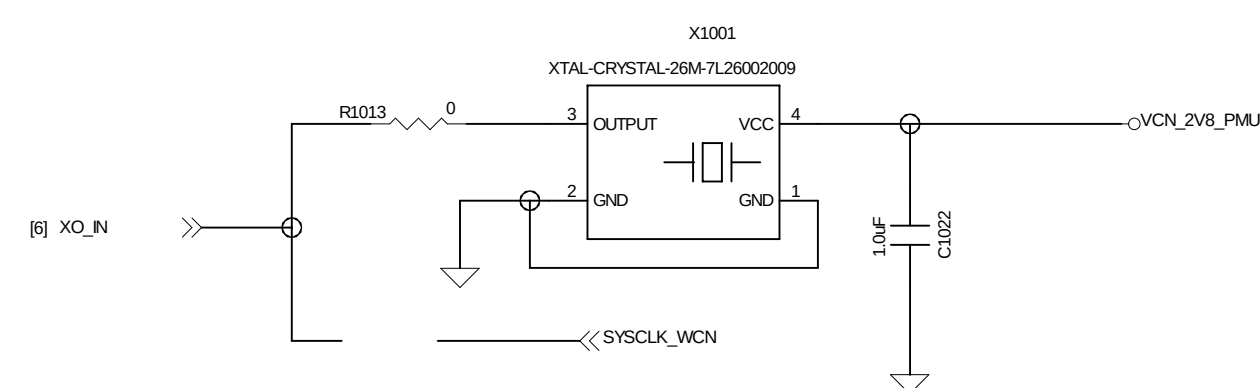


WIFI/BT/GPS Single ANT Ref.

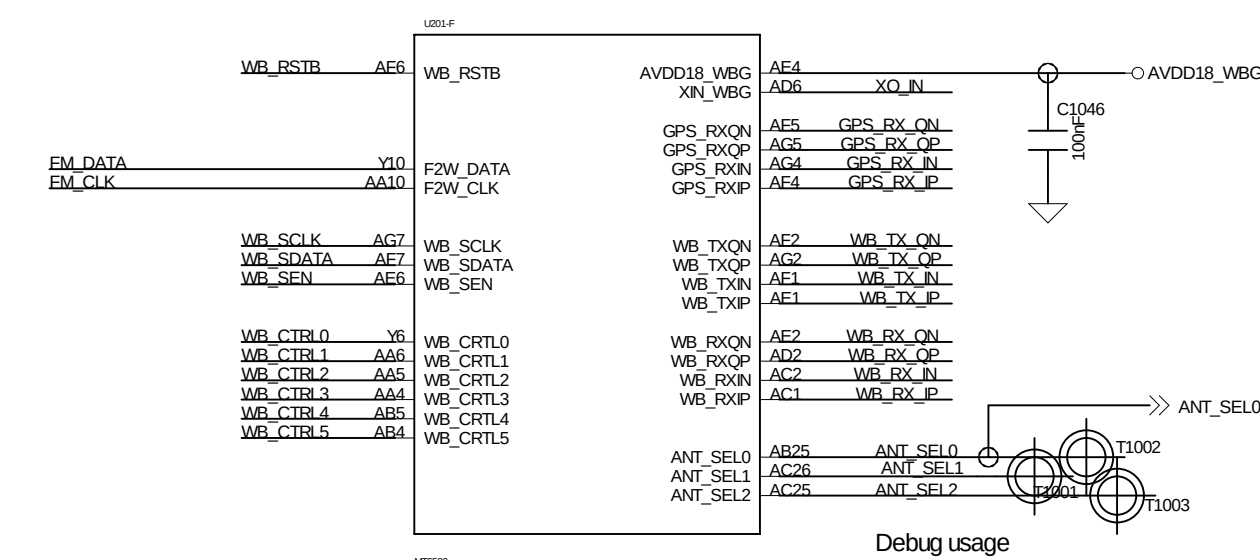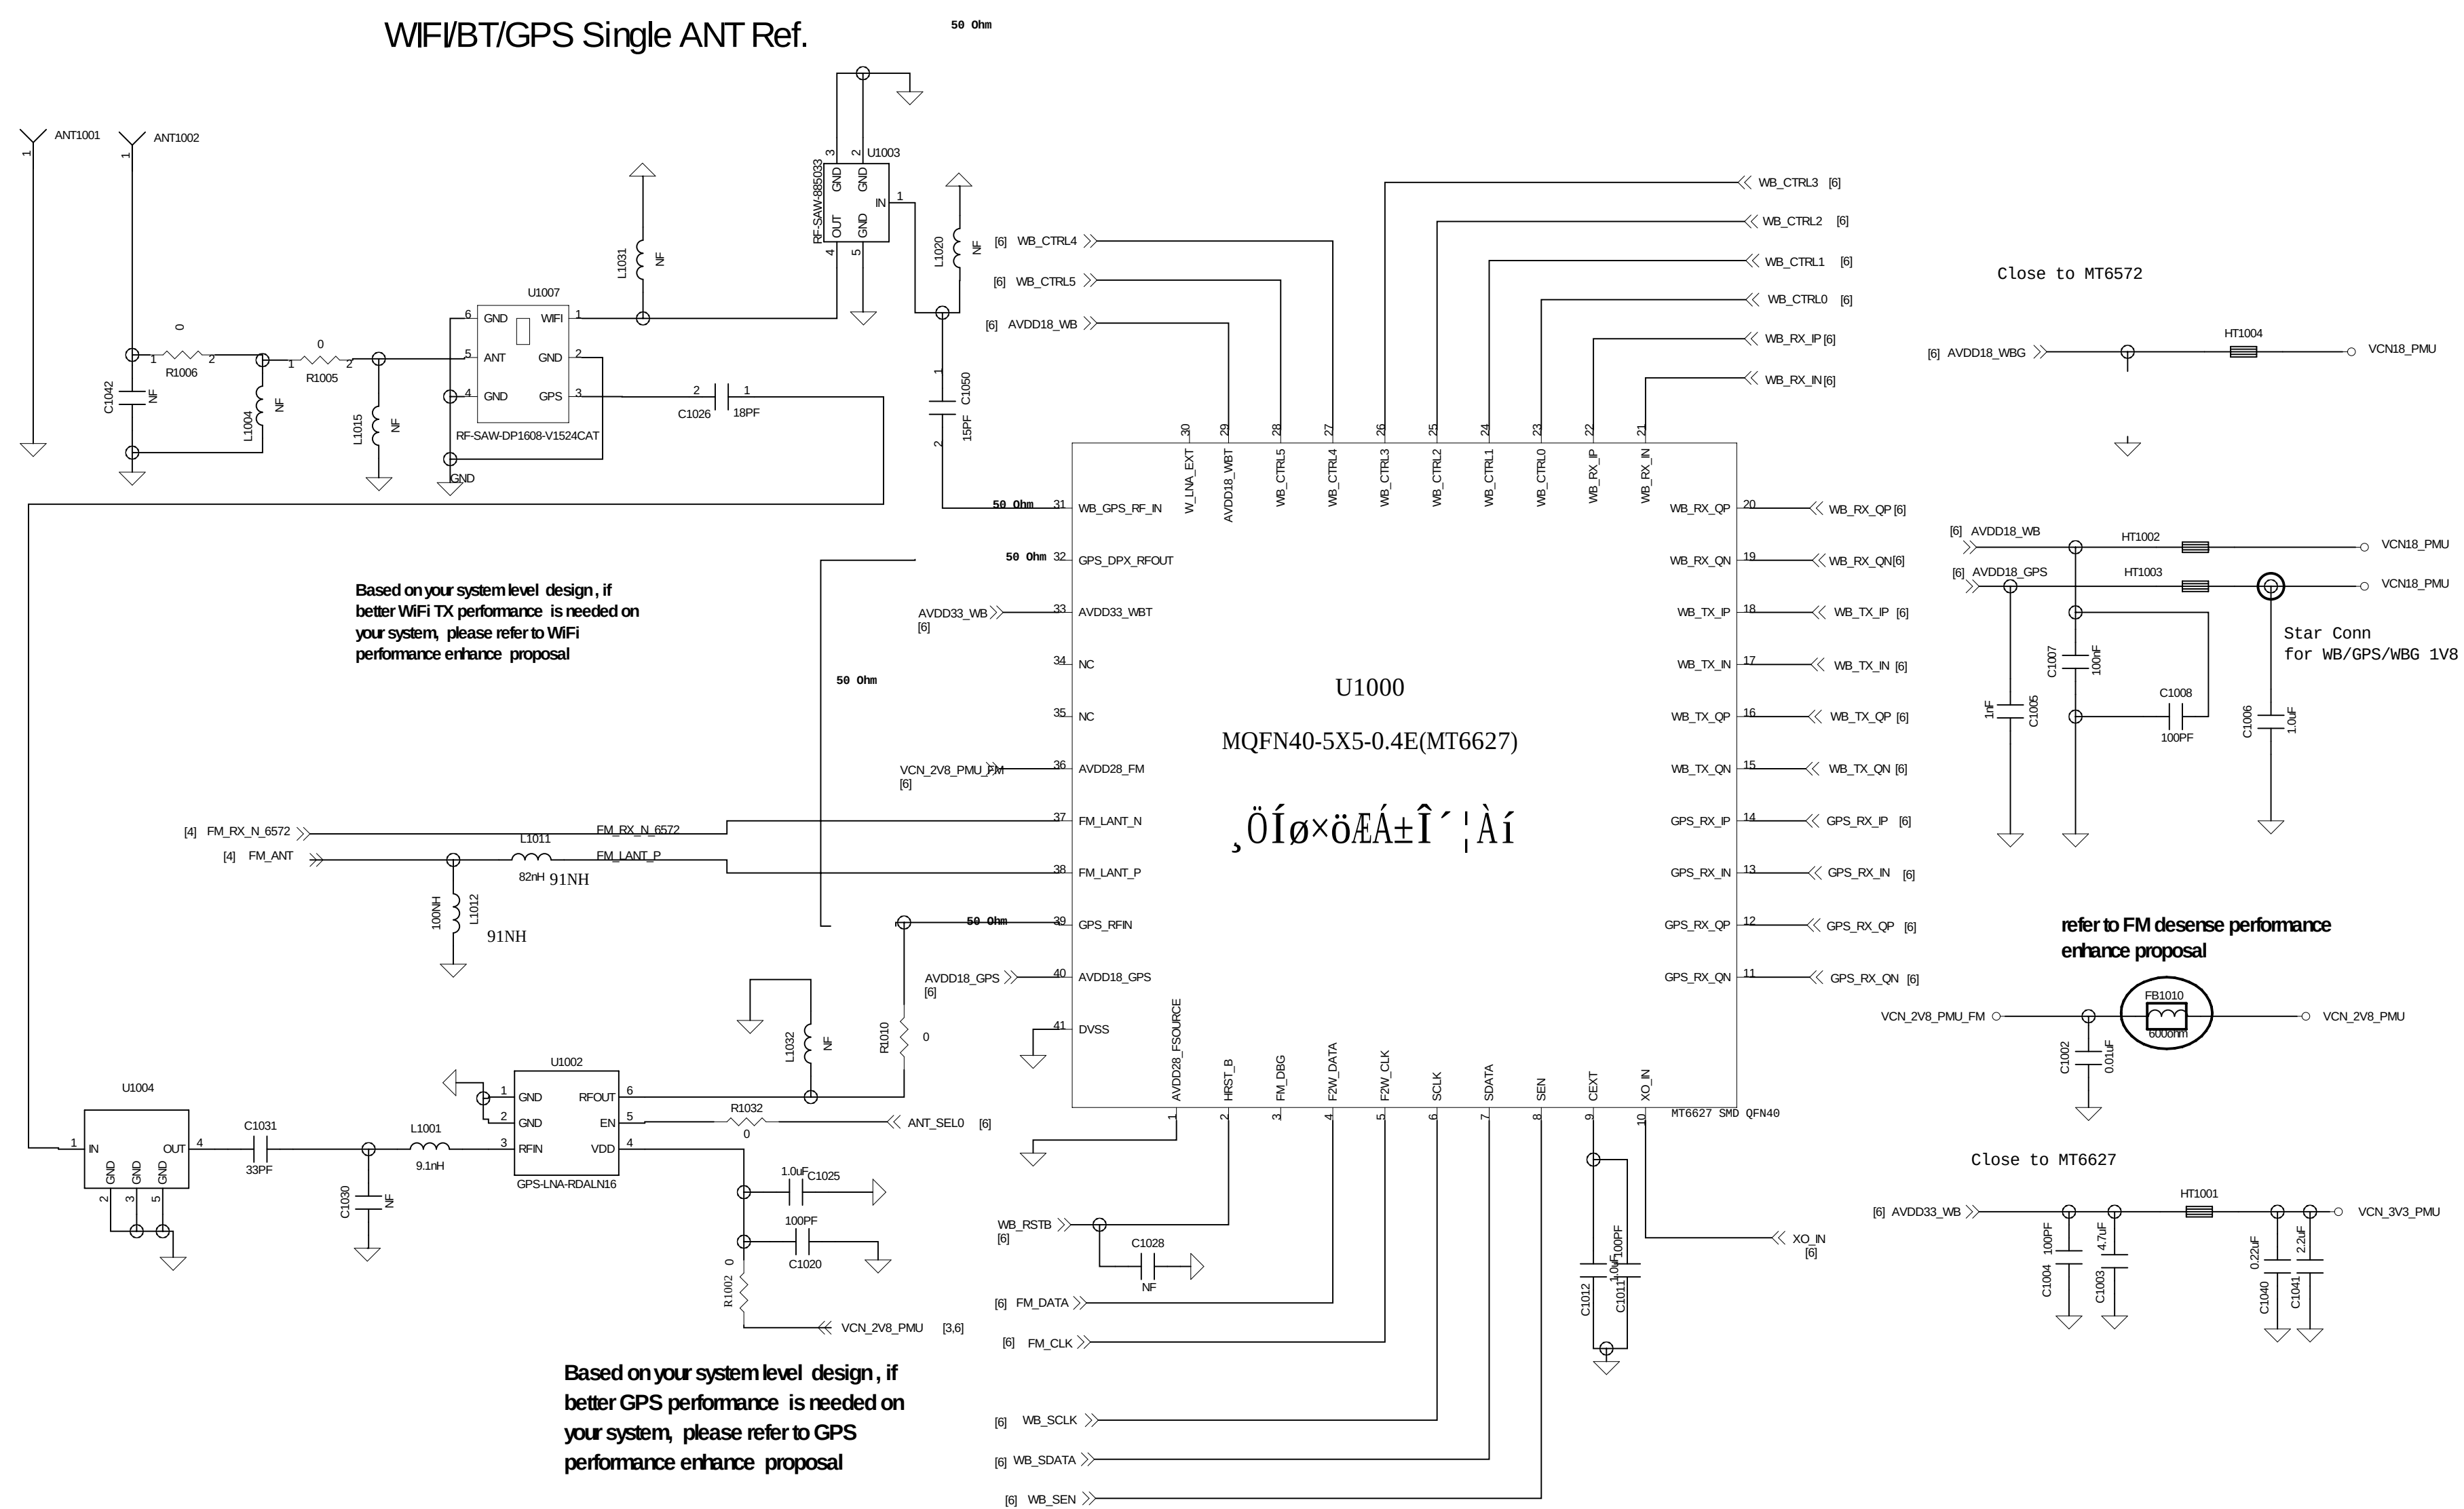

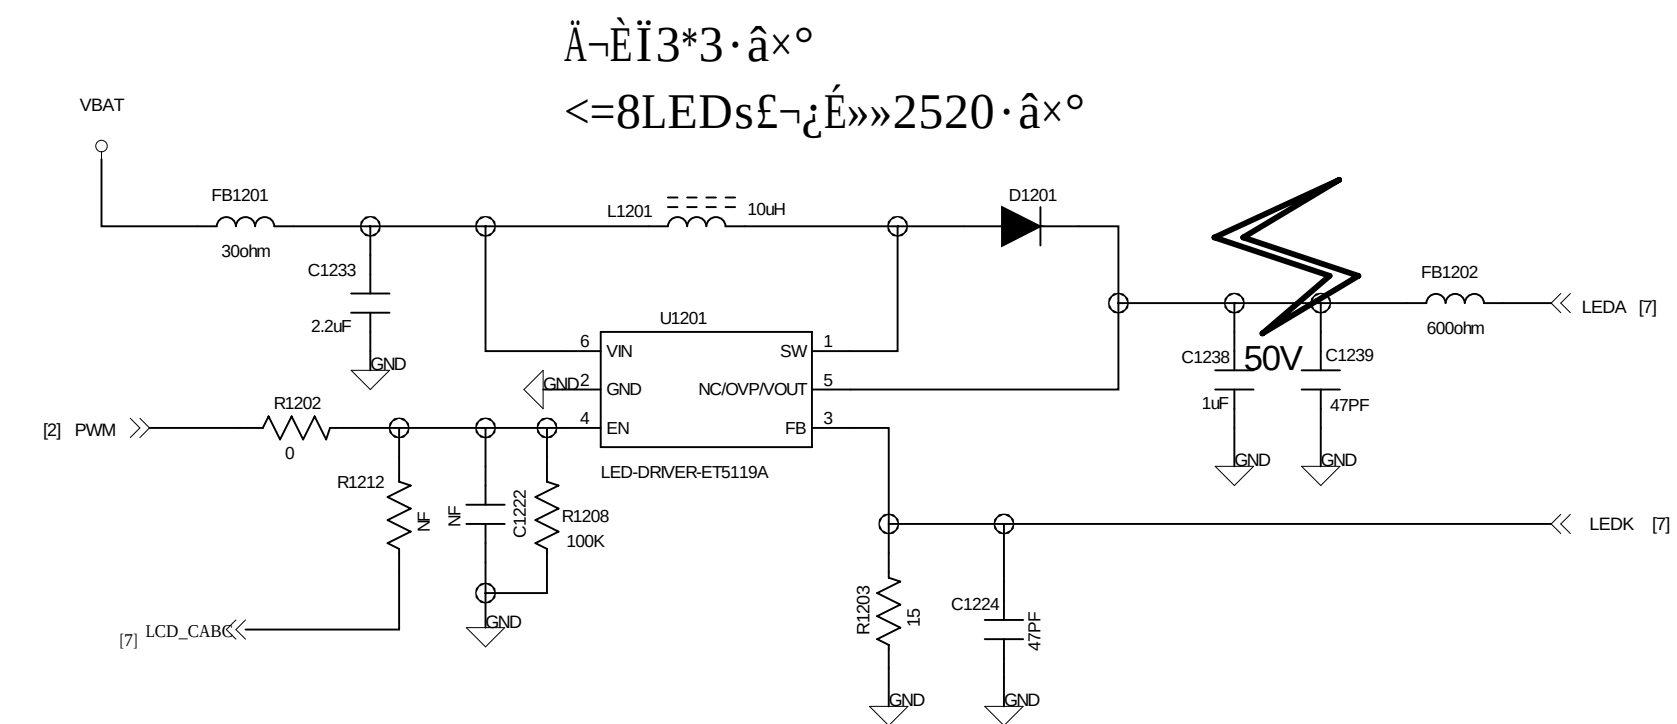
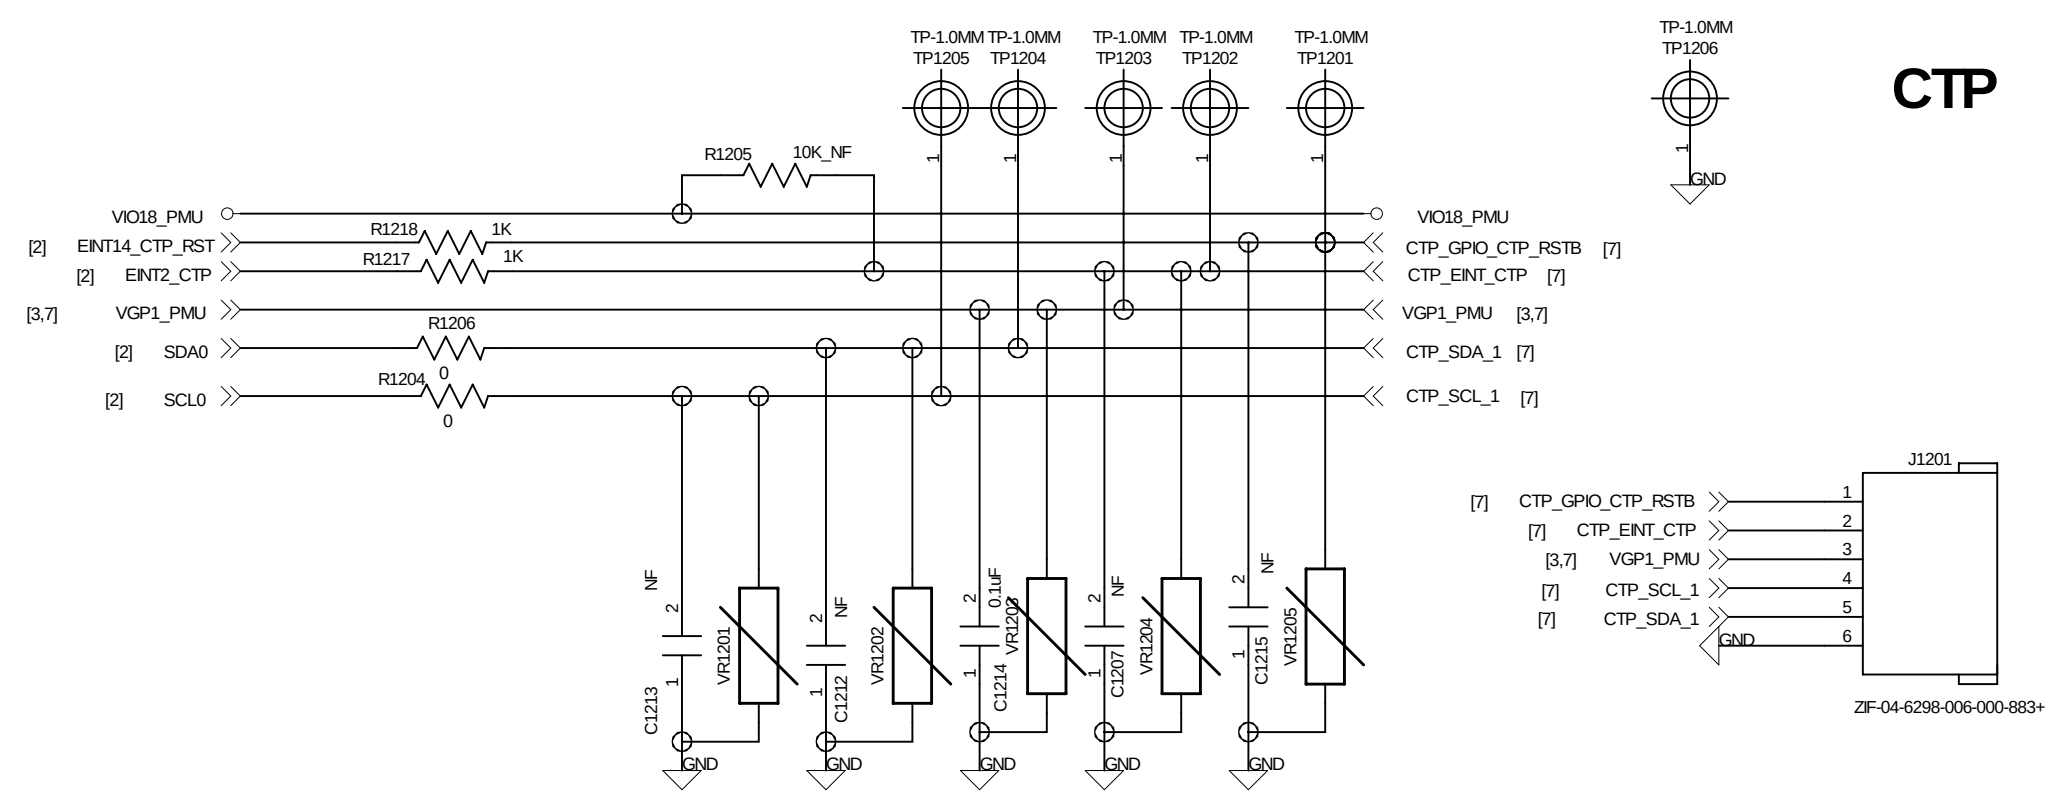


Main LCM

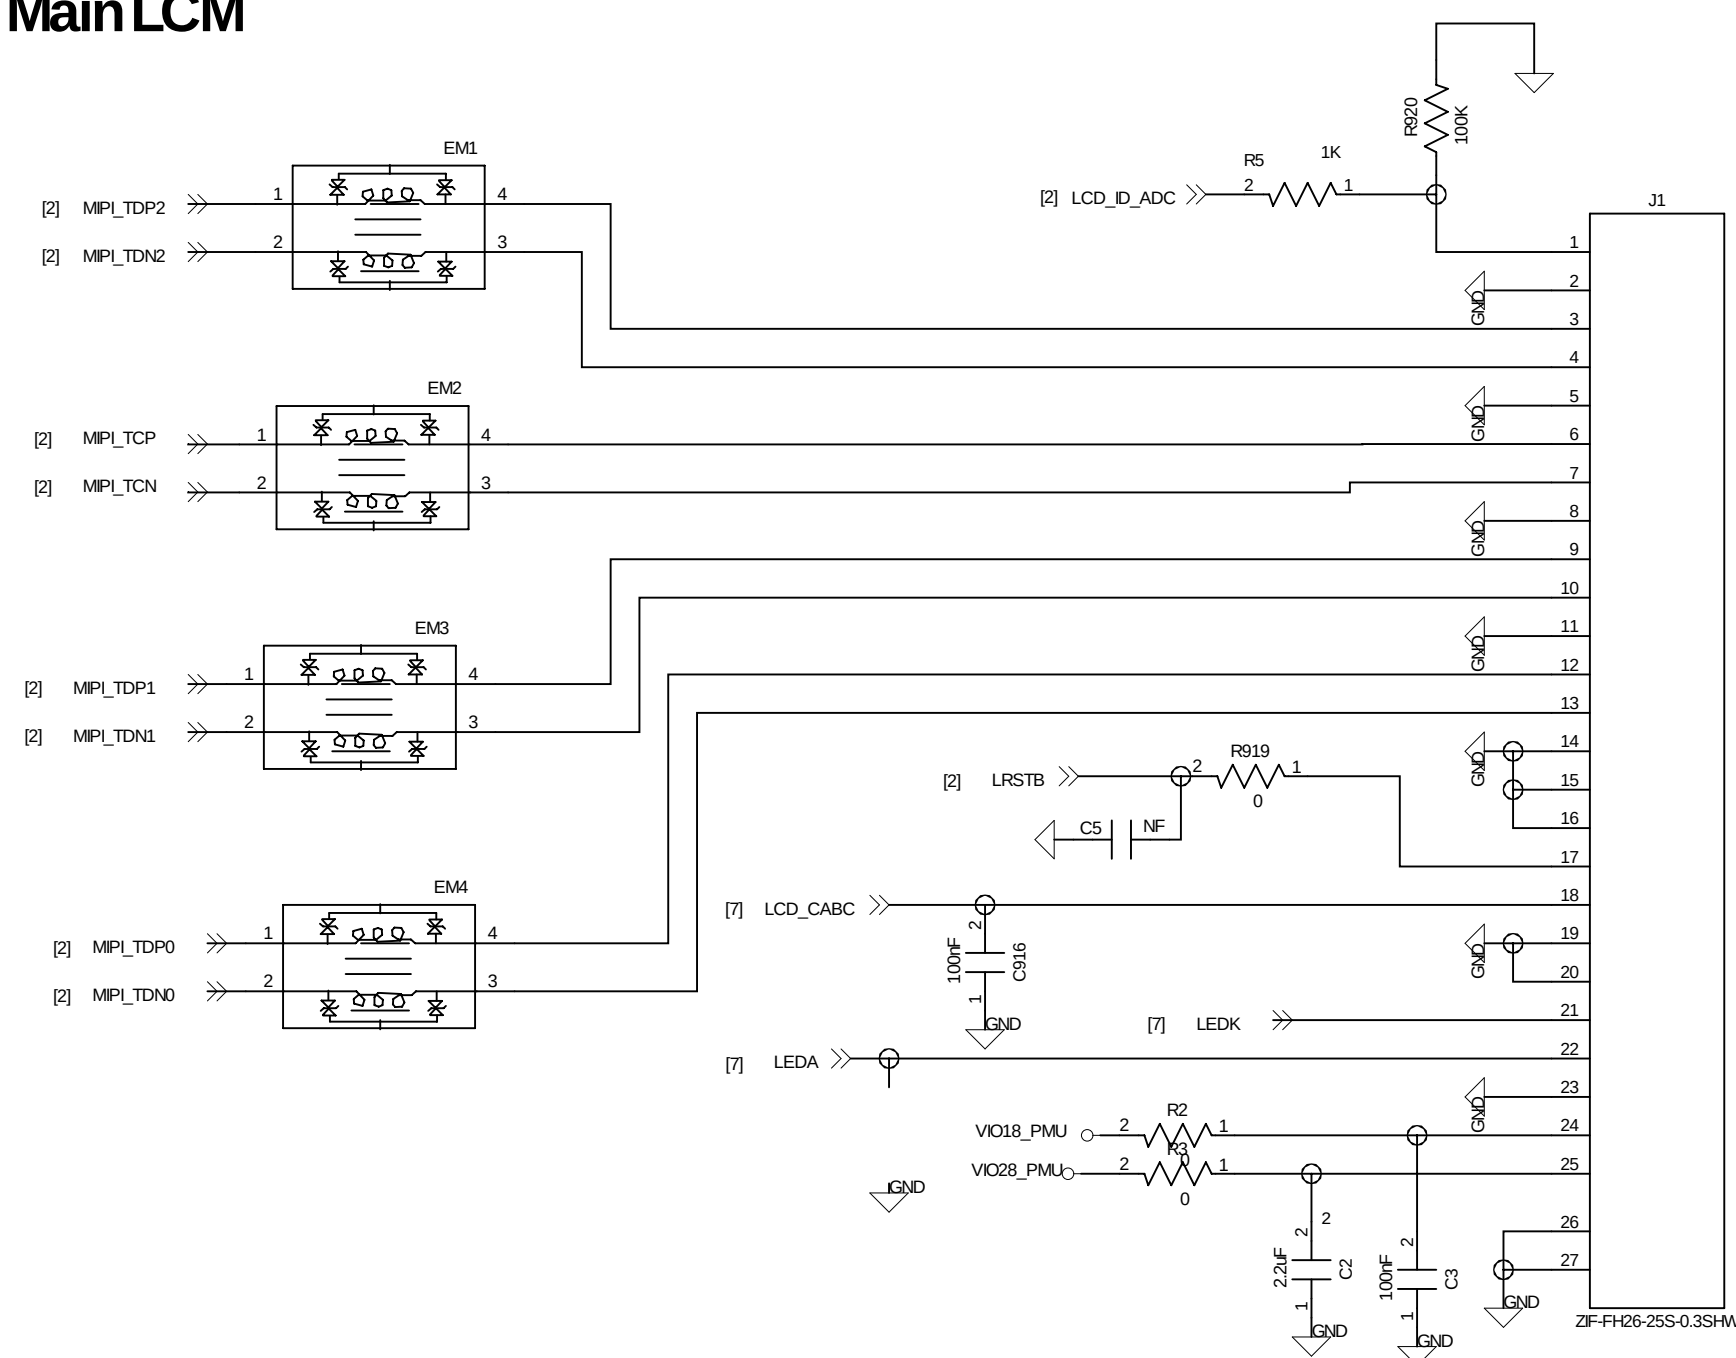

Sub Camera


FRONT camera+LP Sensor+SPK

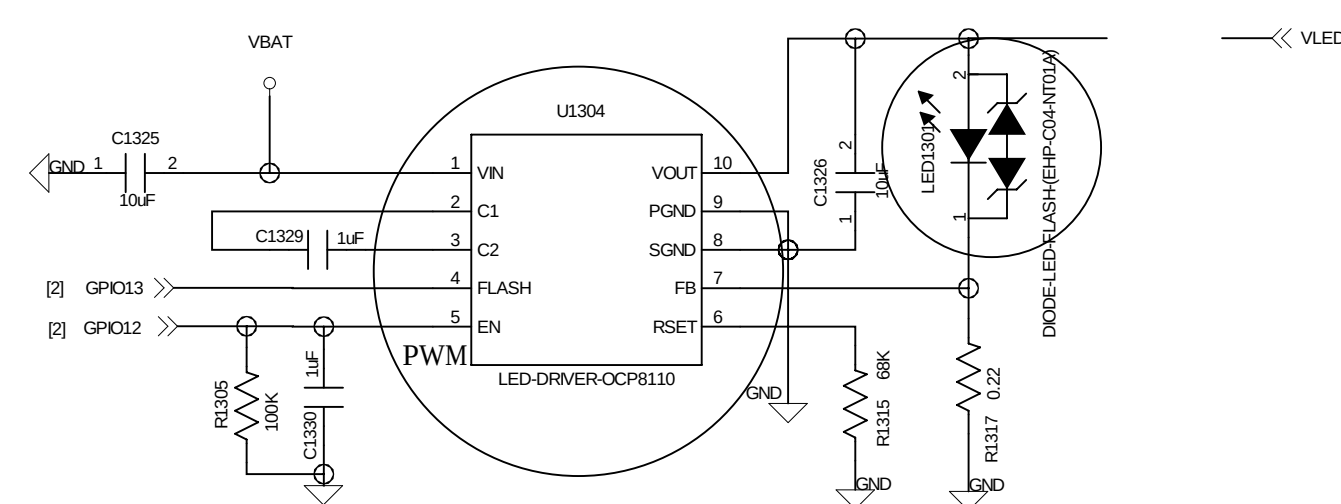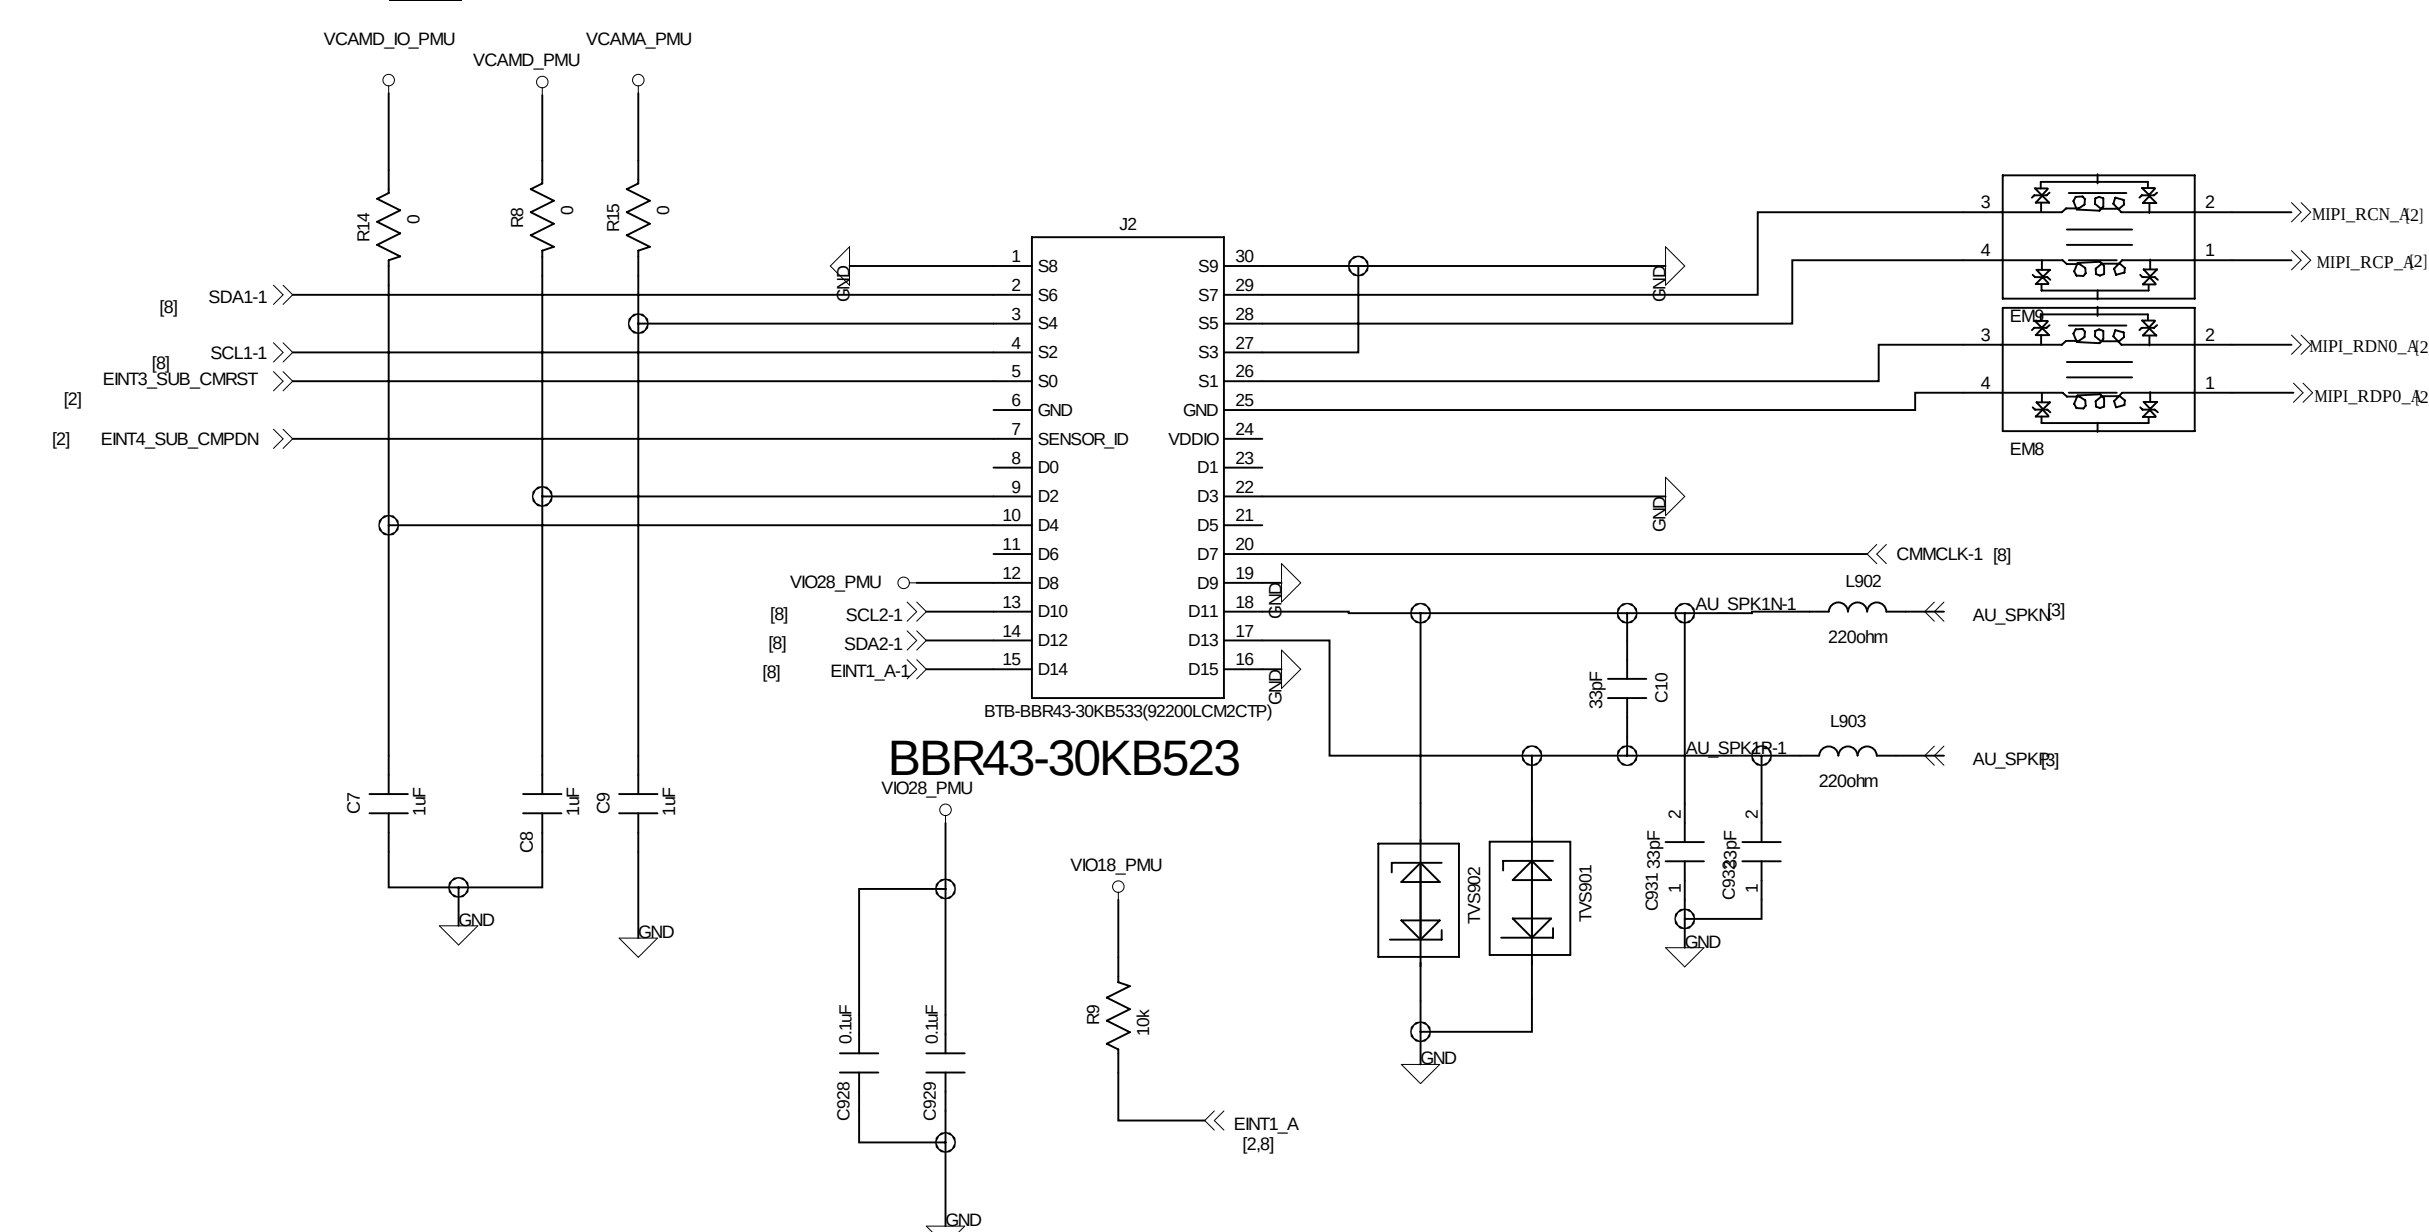


OCP8111 R1315=68K R1317=0.22

OCP8110 R1315=82K R1317=0.47


FLASH LED

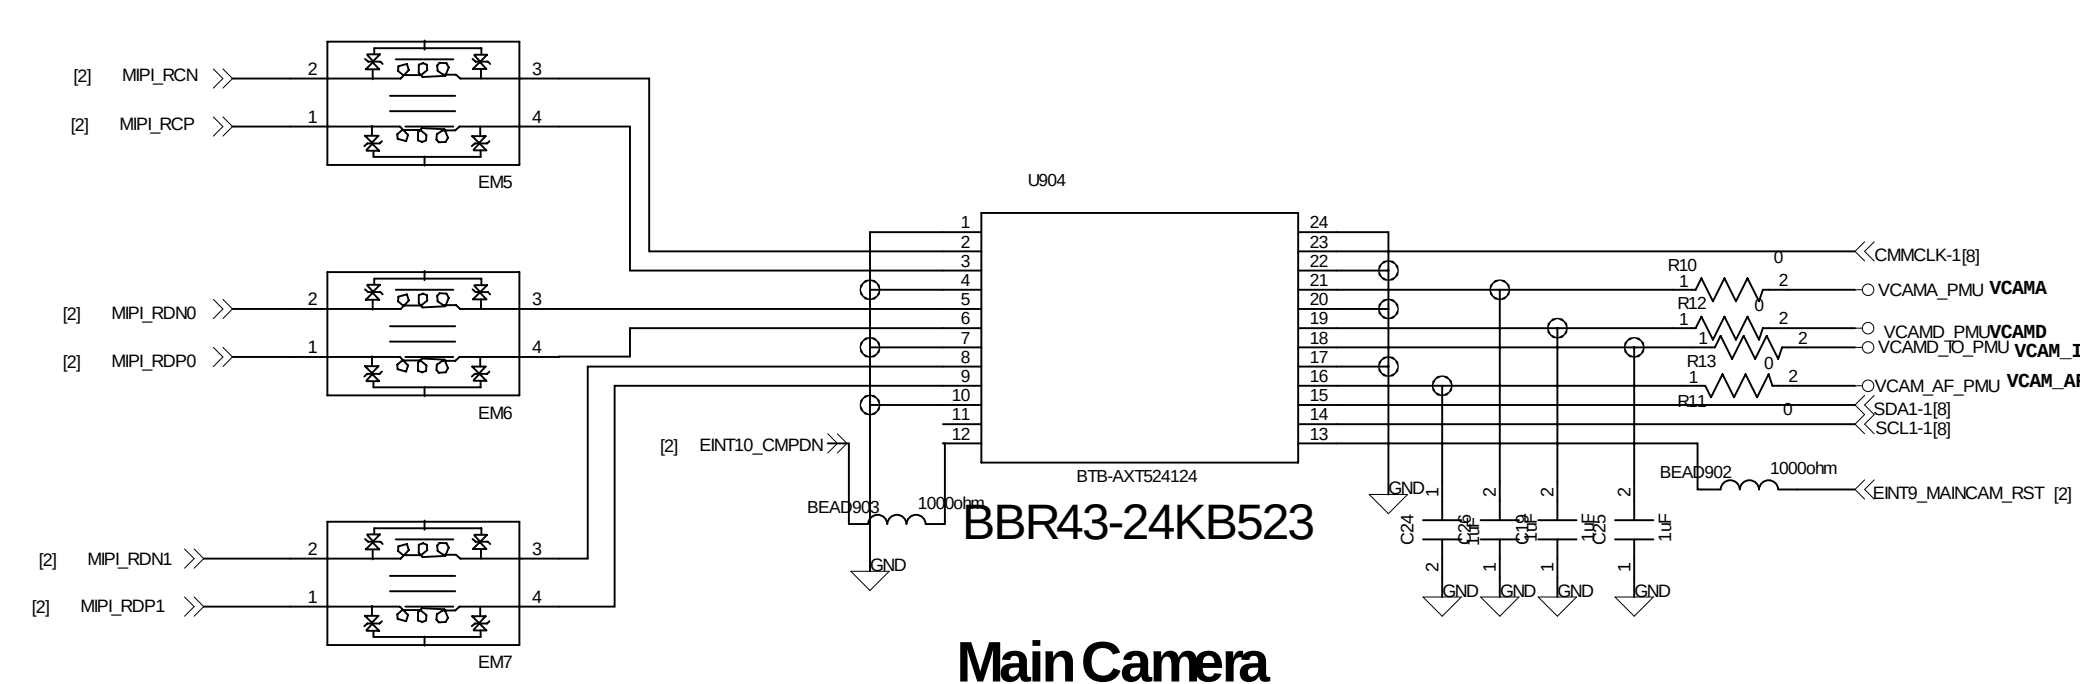

Main Camera

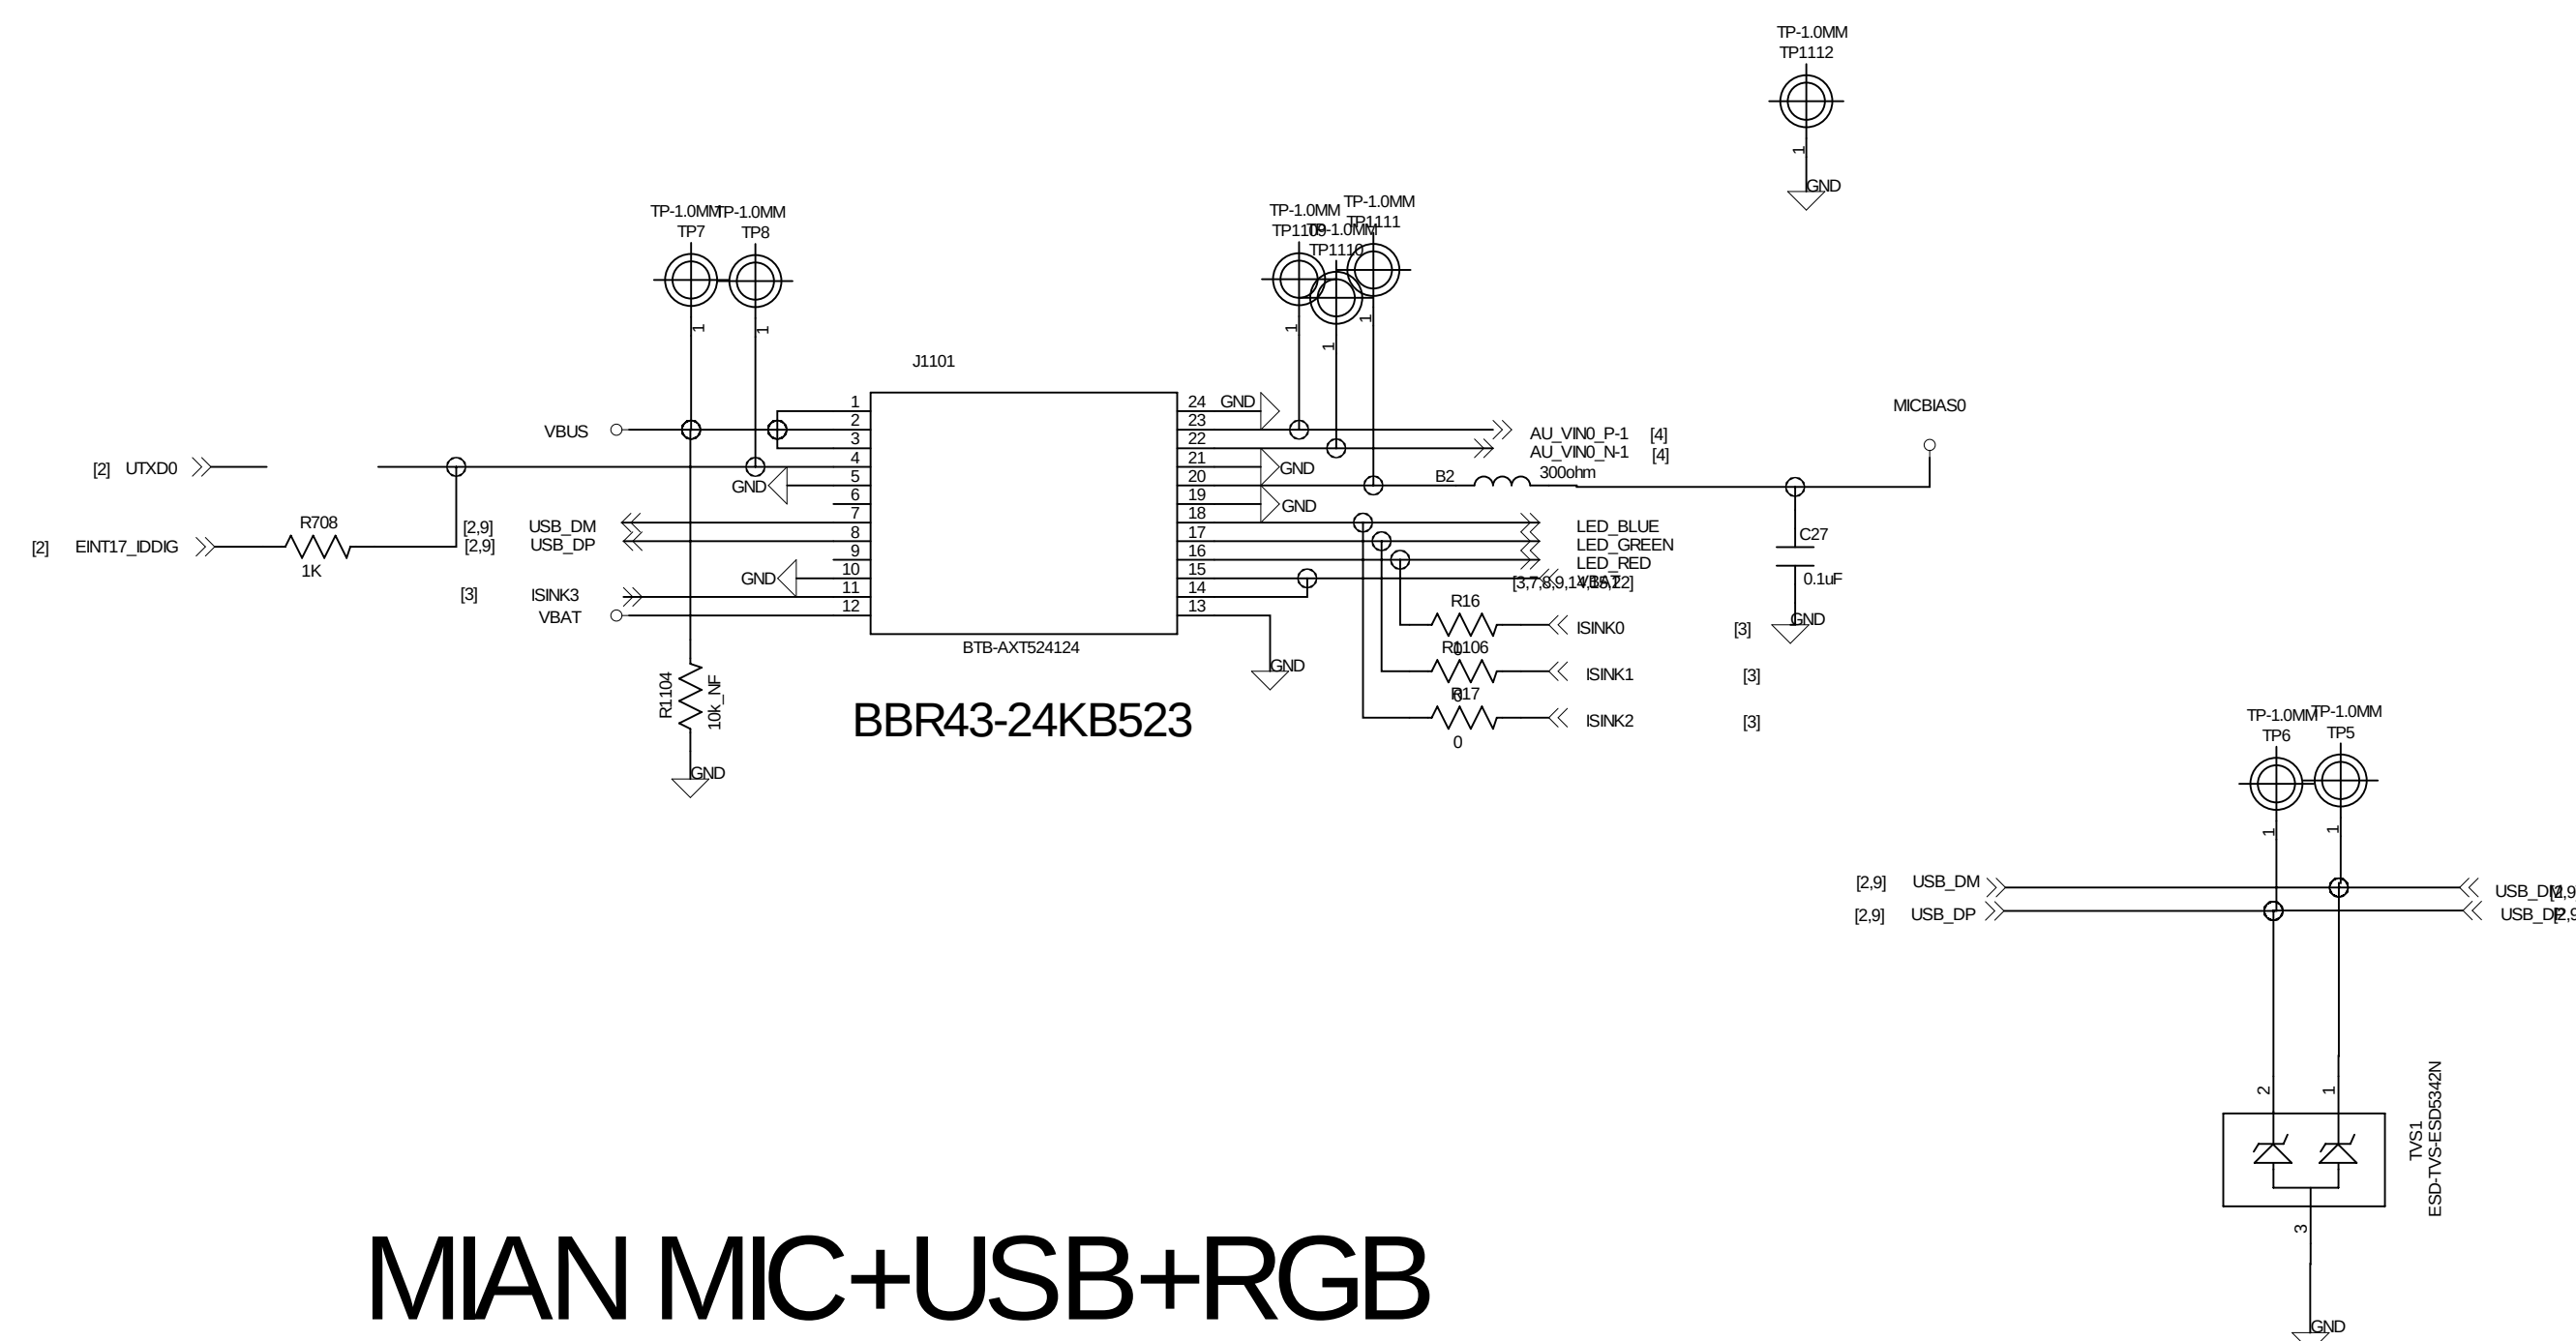

MIAN MIC+USB+RGB

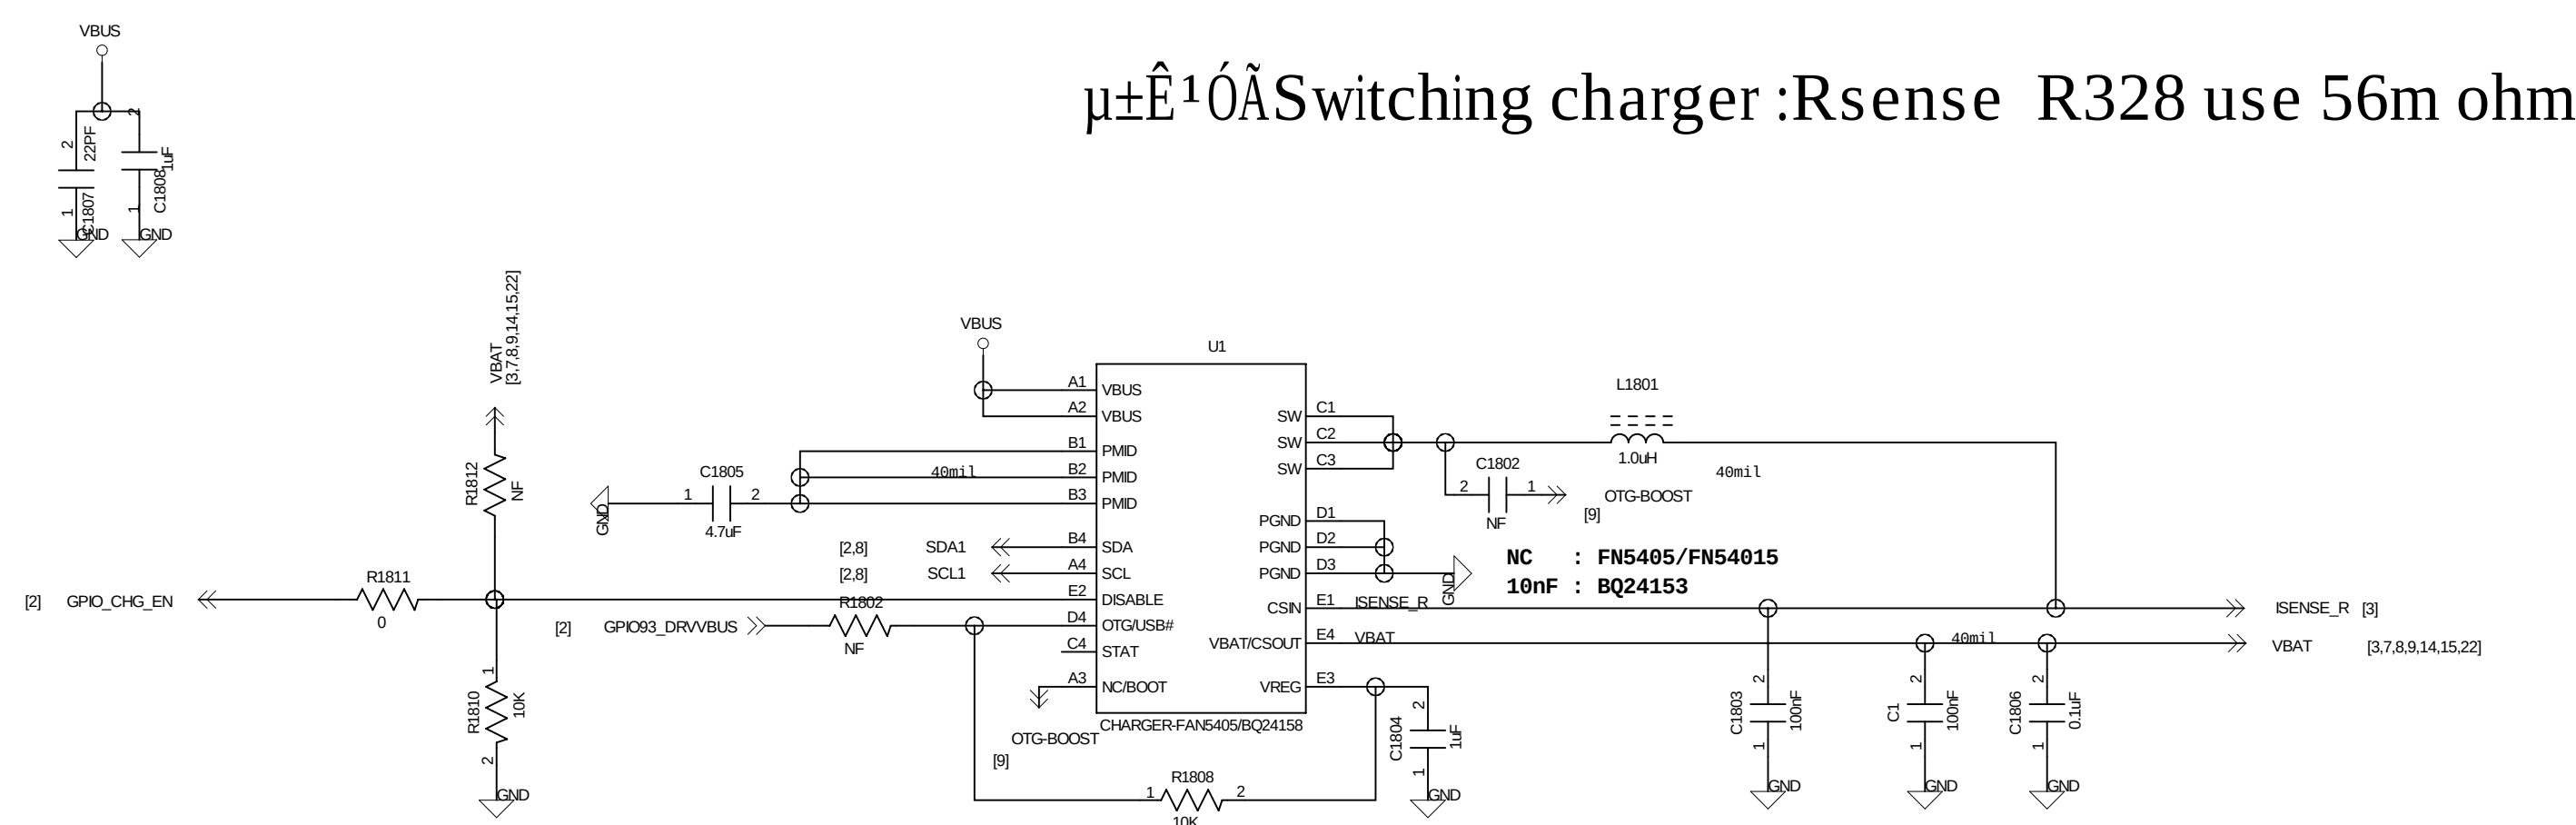



Switching charger :Rsense R328 use 56m ohm



FN5405 R1810=10K,R1812=NF, C1802=NF
 FN5402 R1810=NF, R1812=10K,C1802=NF
 BQ24158 R1810=10K,R1812=NF, C1802=10nF

If switching charger is used:
 (1) R1801-R1805, C1801-C1806, L1801, U1801 are needed
 (2) U303, U304 change to NC
 (3) R328 change to 56m Ohm


Switching Charger

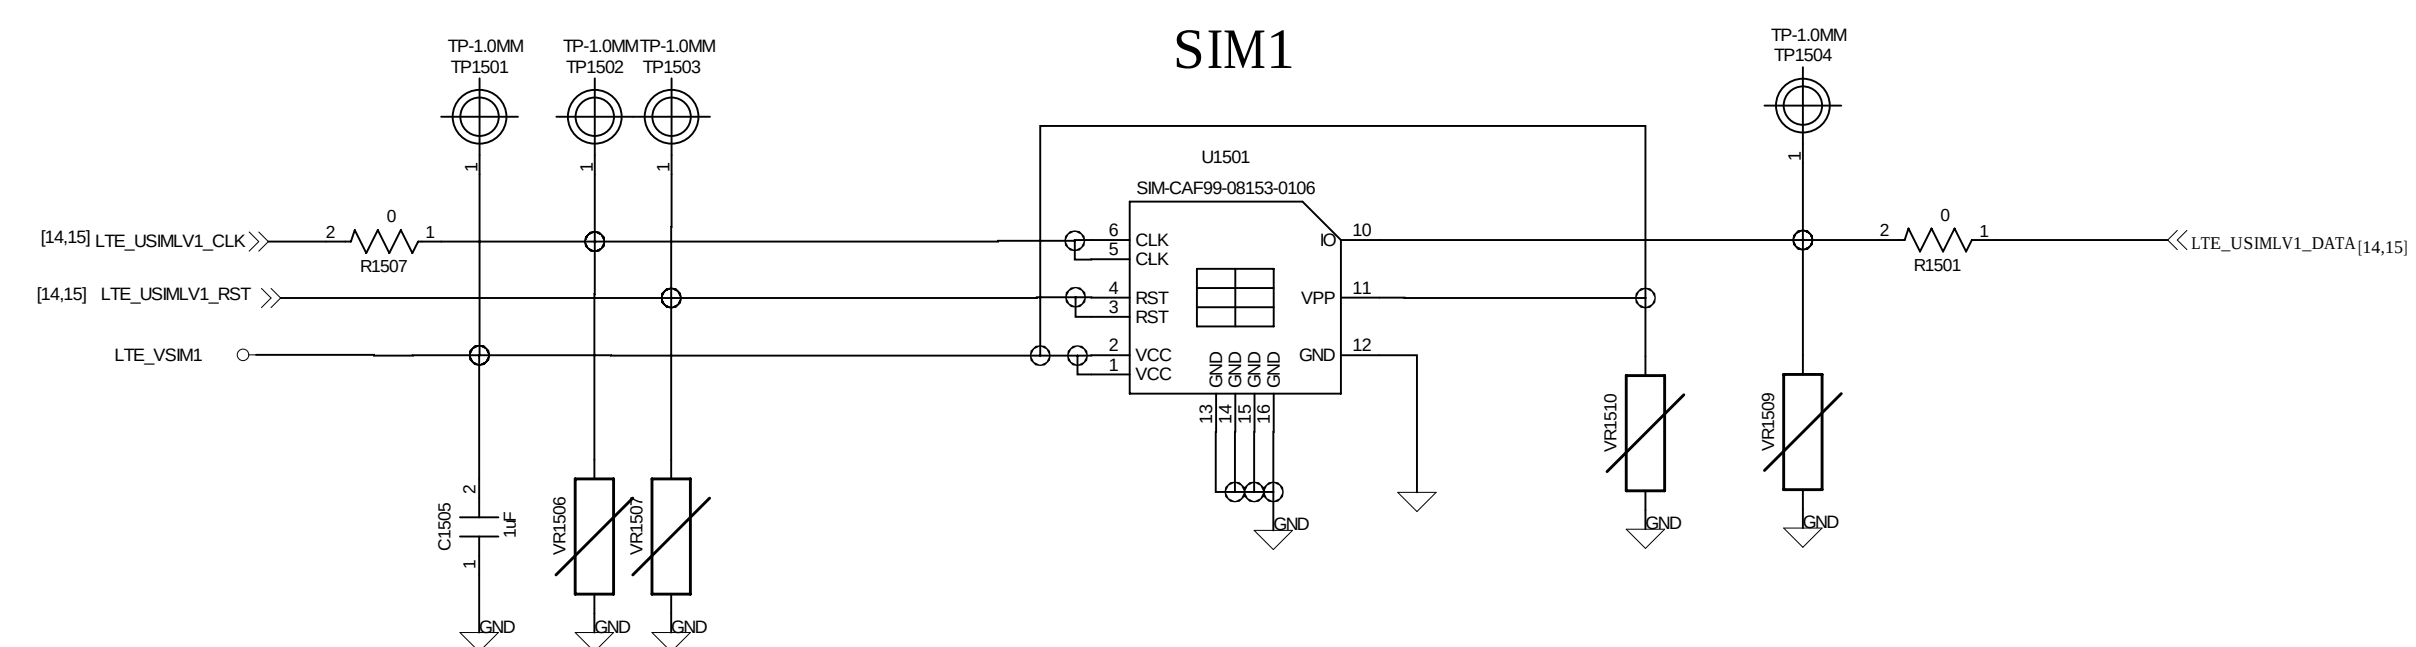

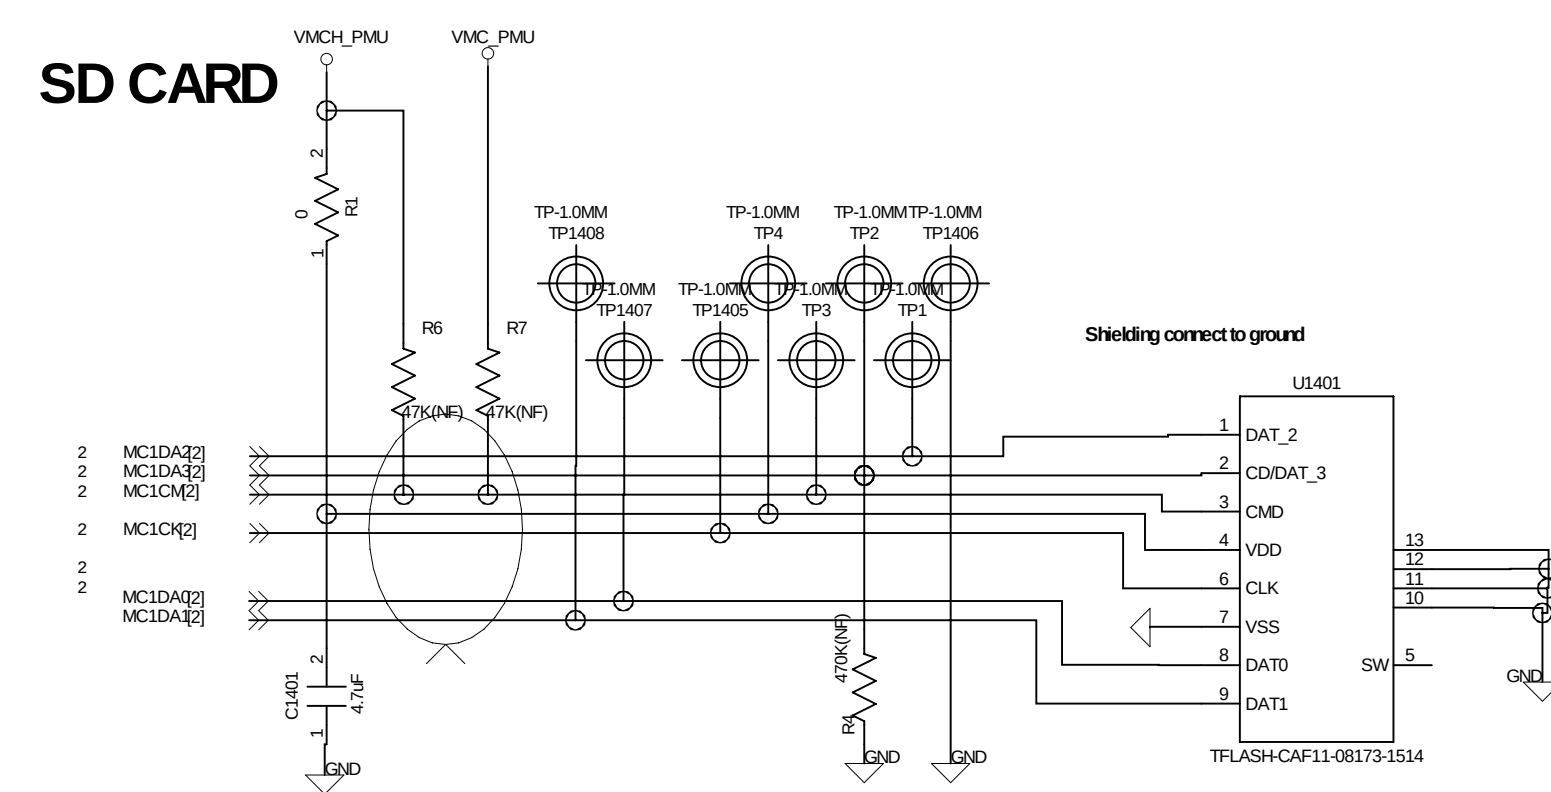

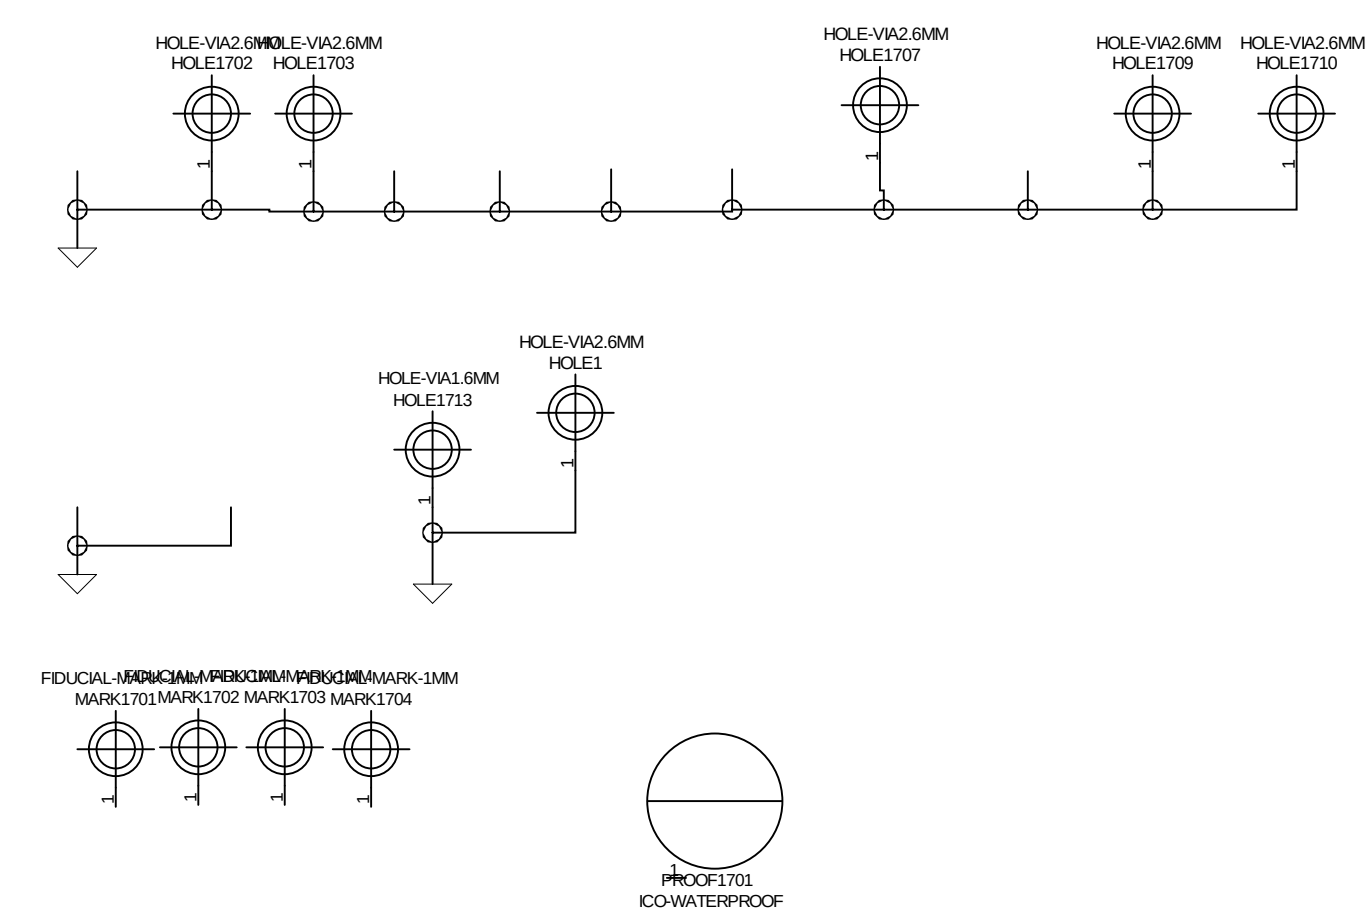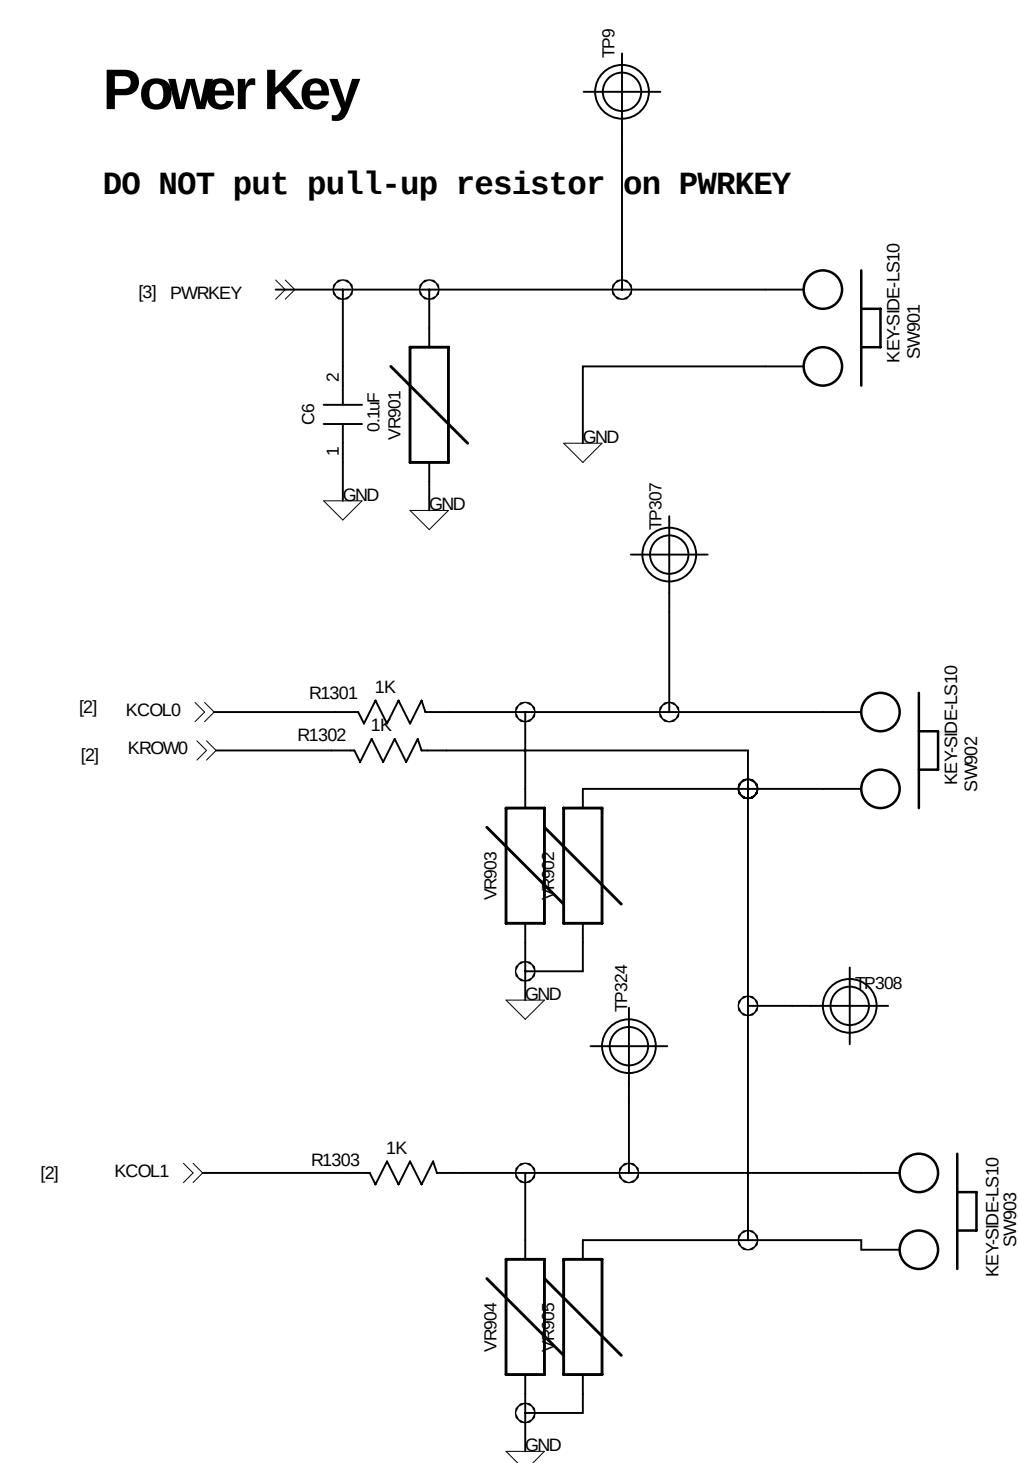


M-Sensor

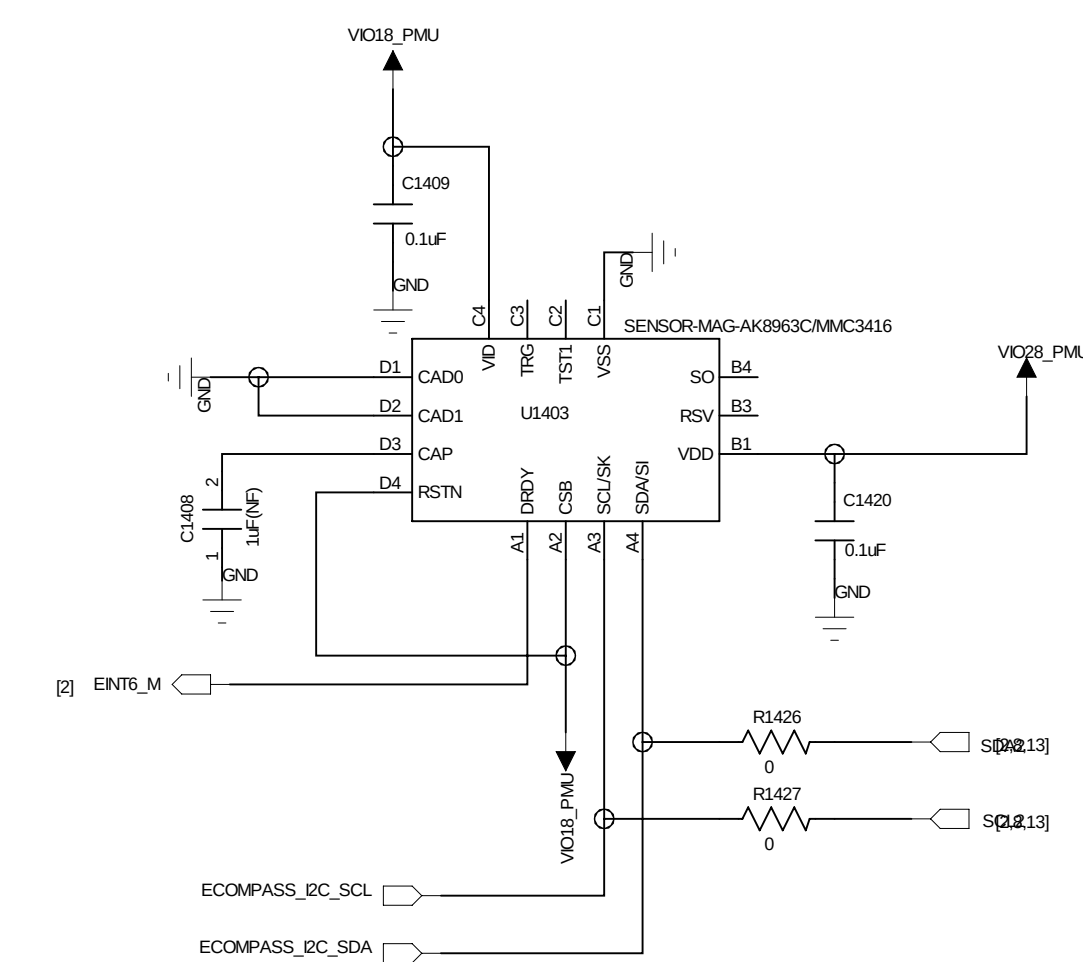


0x18 Write

Gyroscope



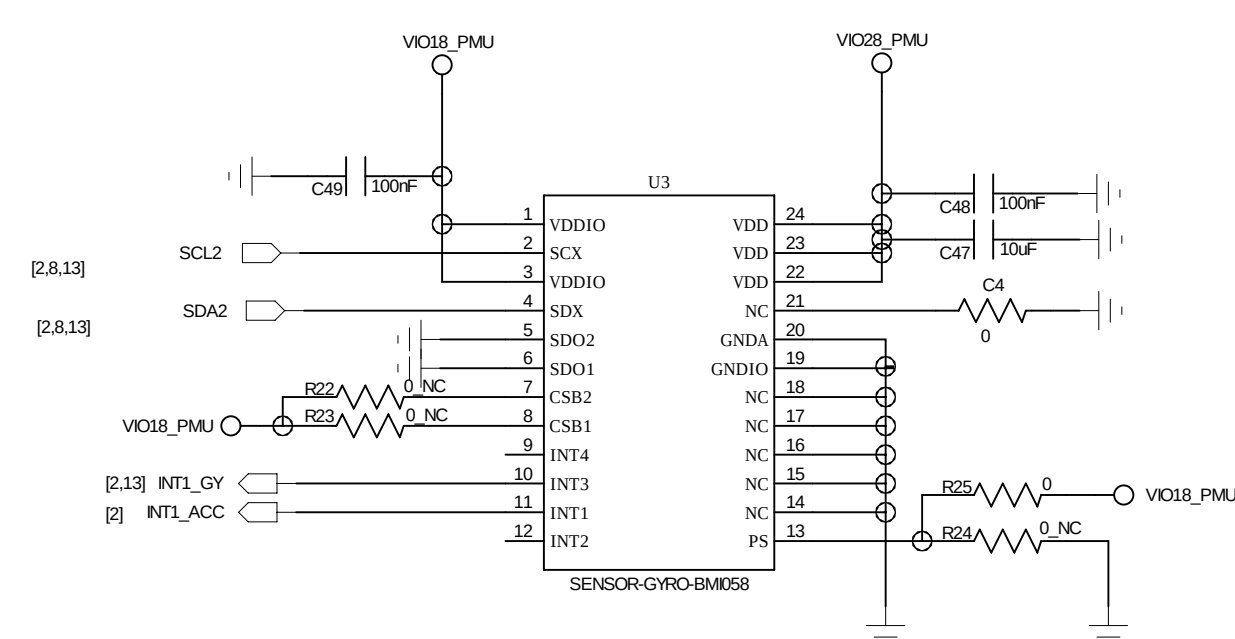




LSM330 C12=0.01uF(25V)
LSM330 R22 R23=0


Gyroscope

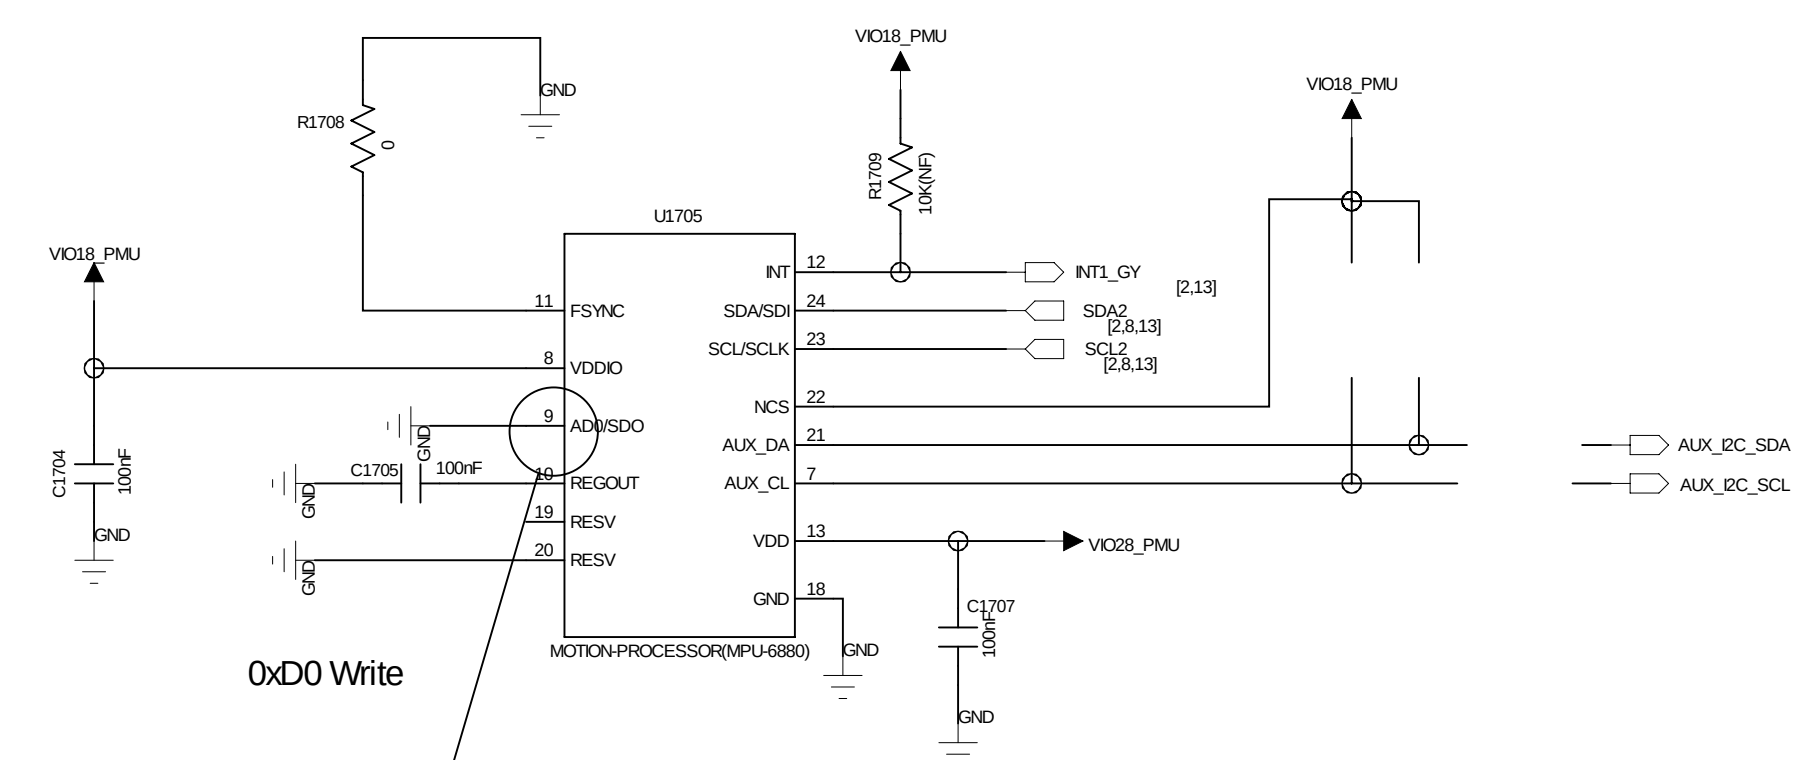




AD0=0 7b1101000 0x68
AD0=1 7b1101001 0x69

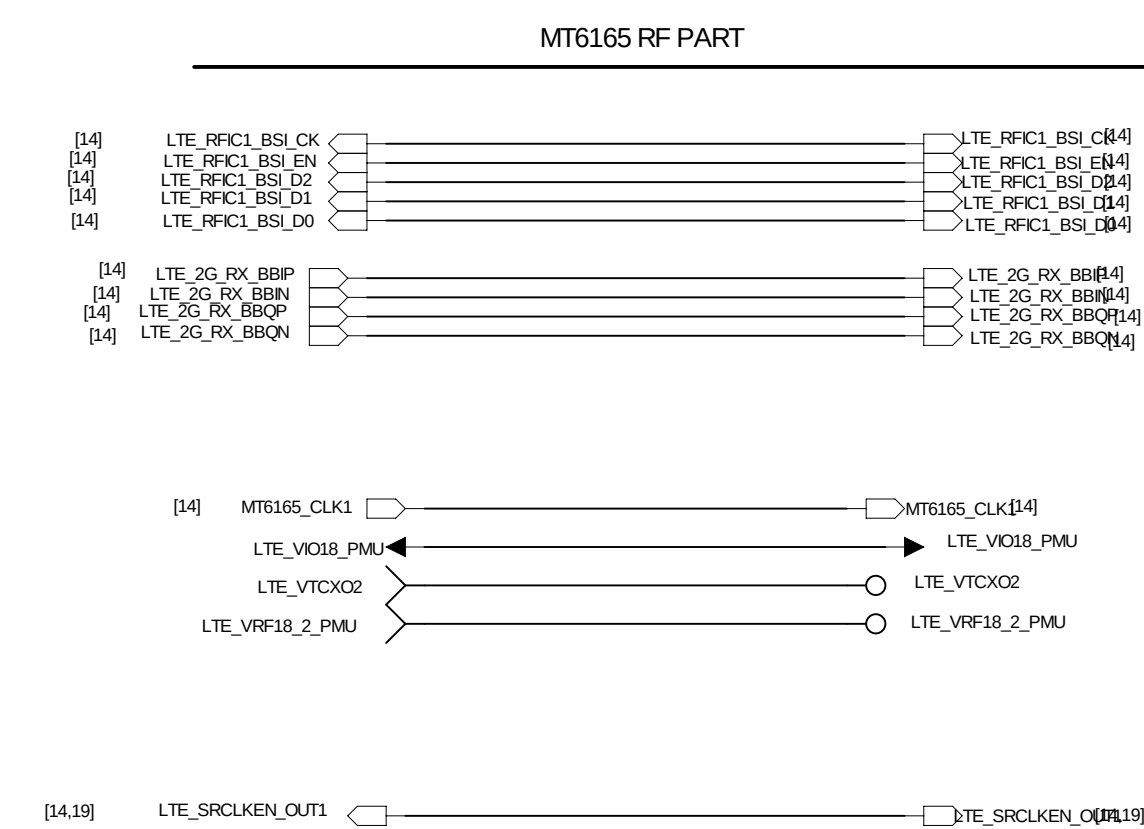
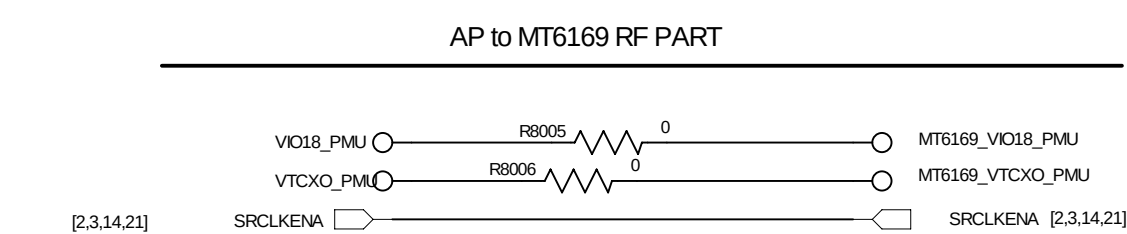
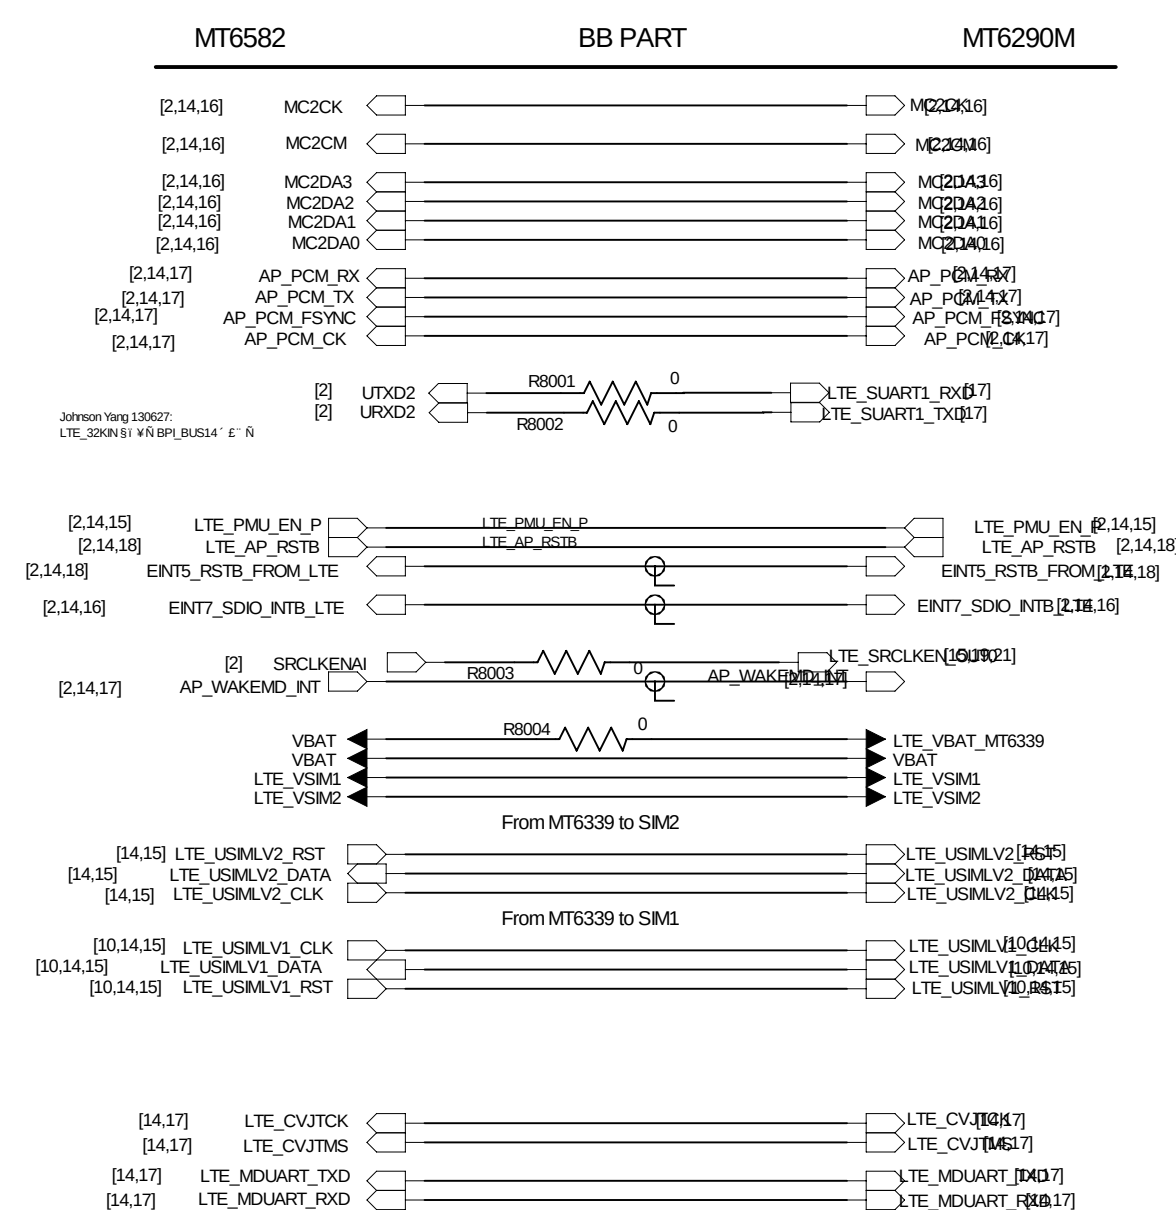














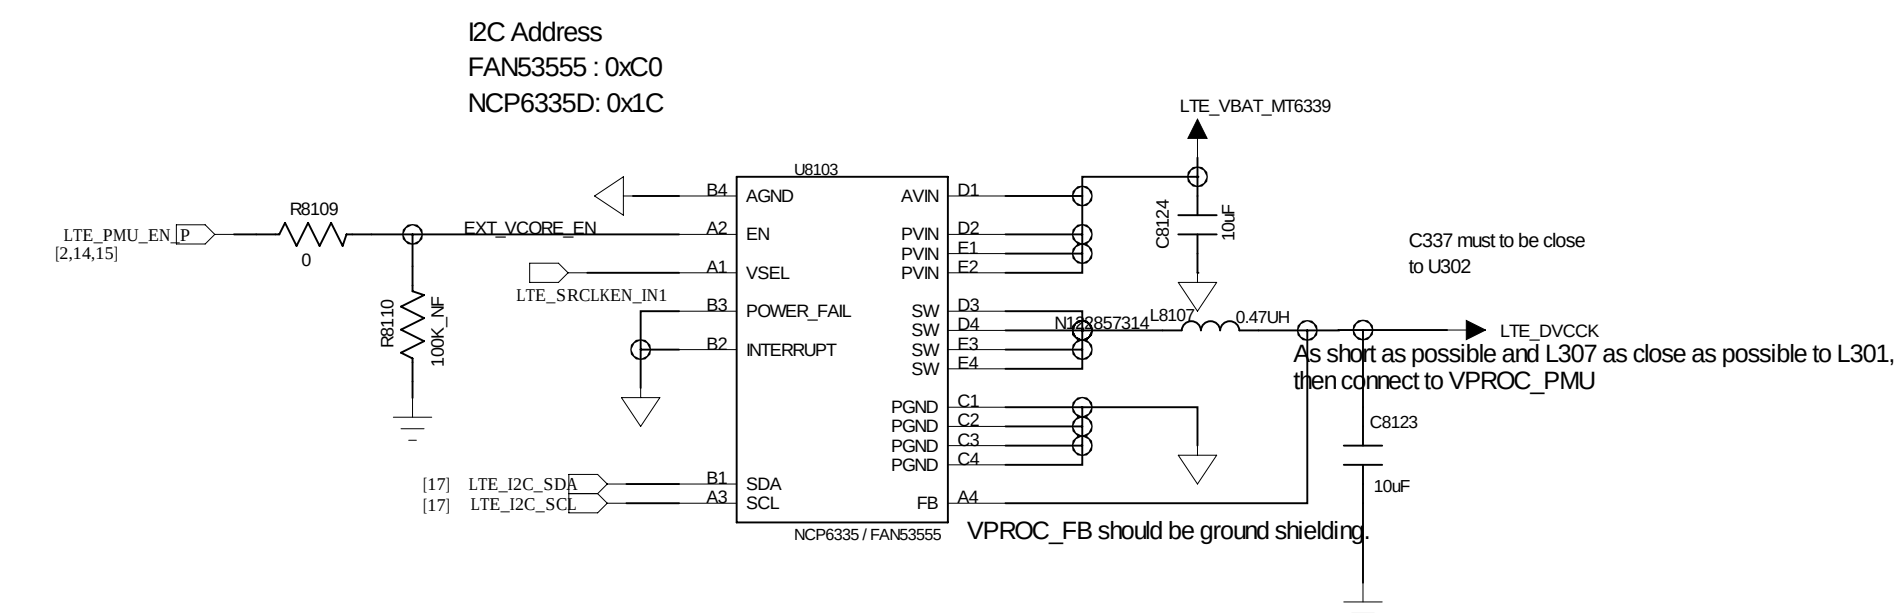
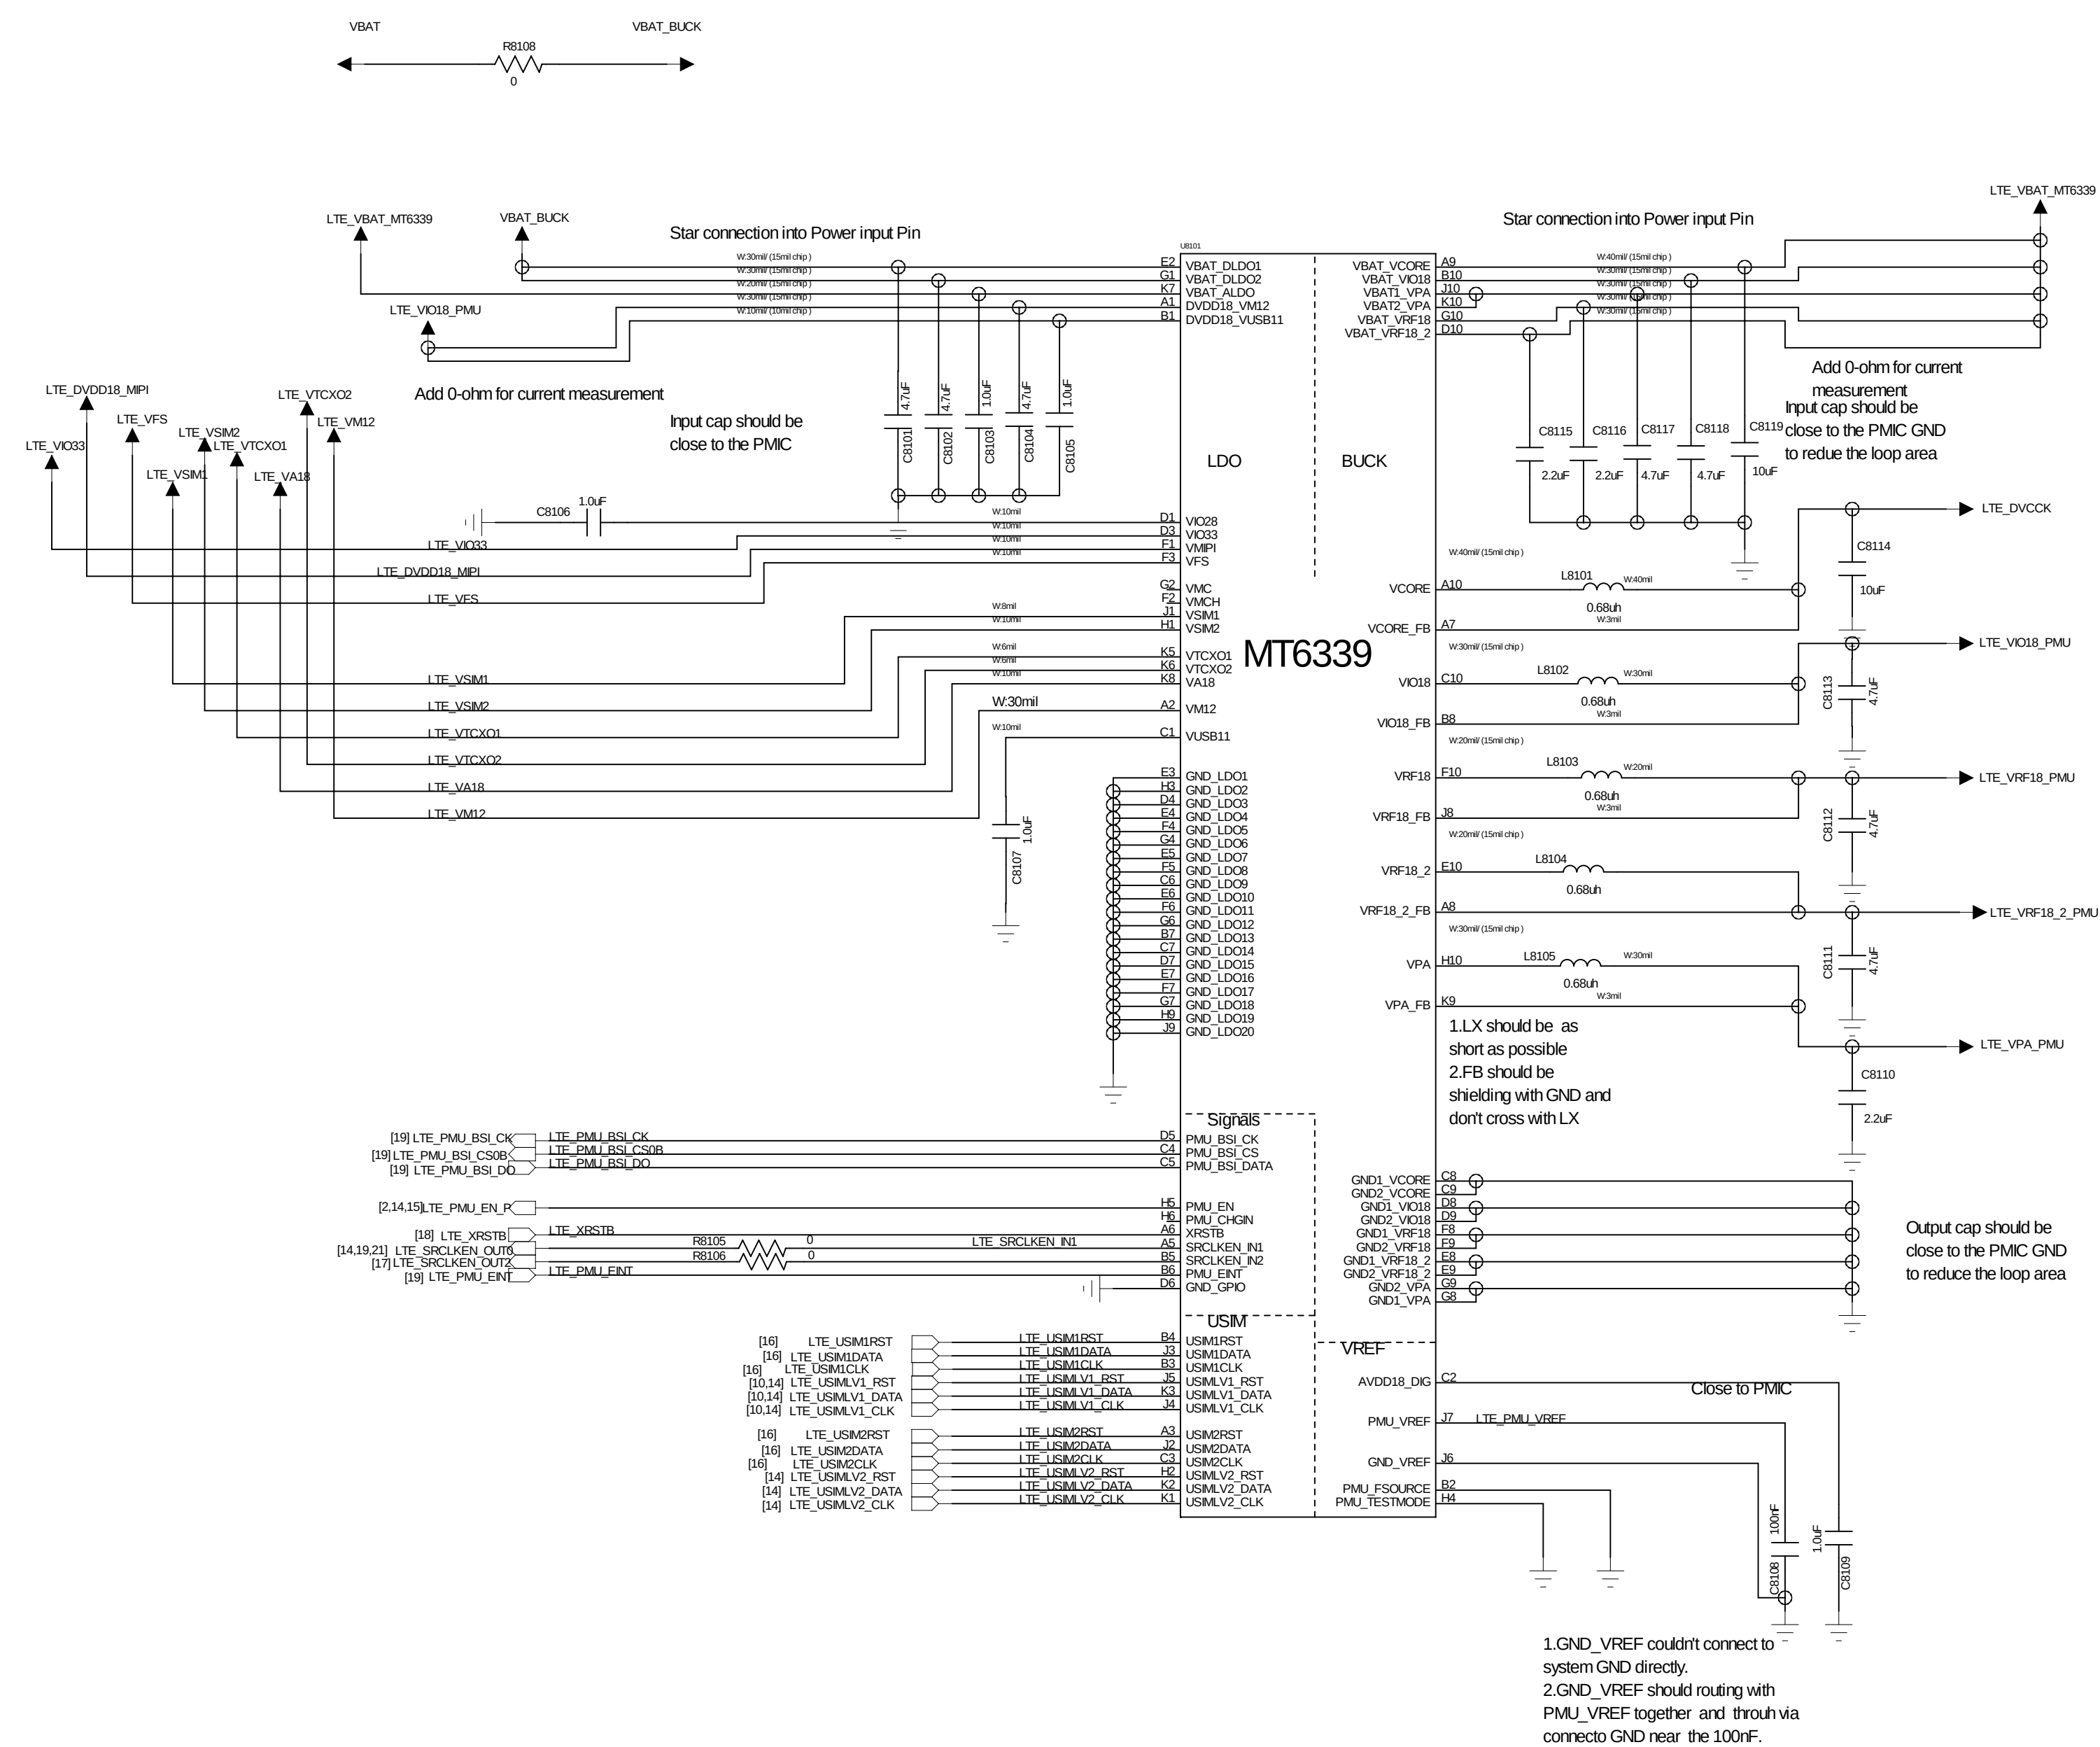


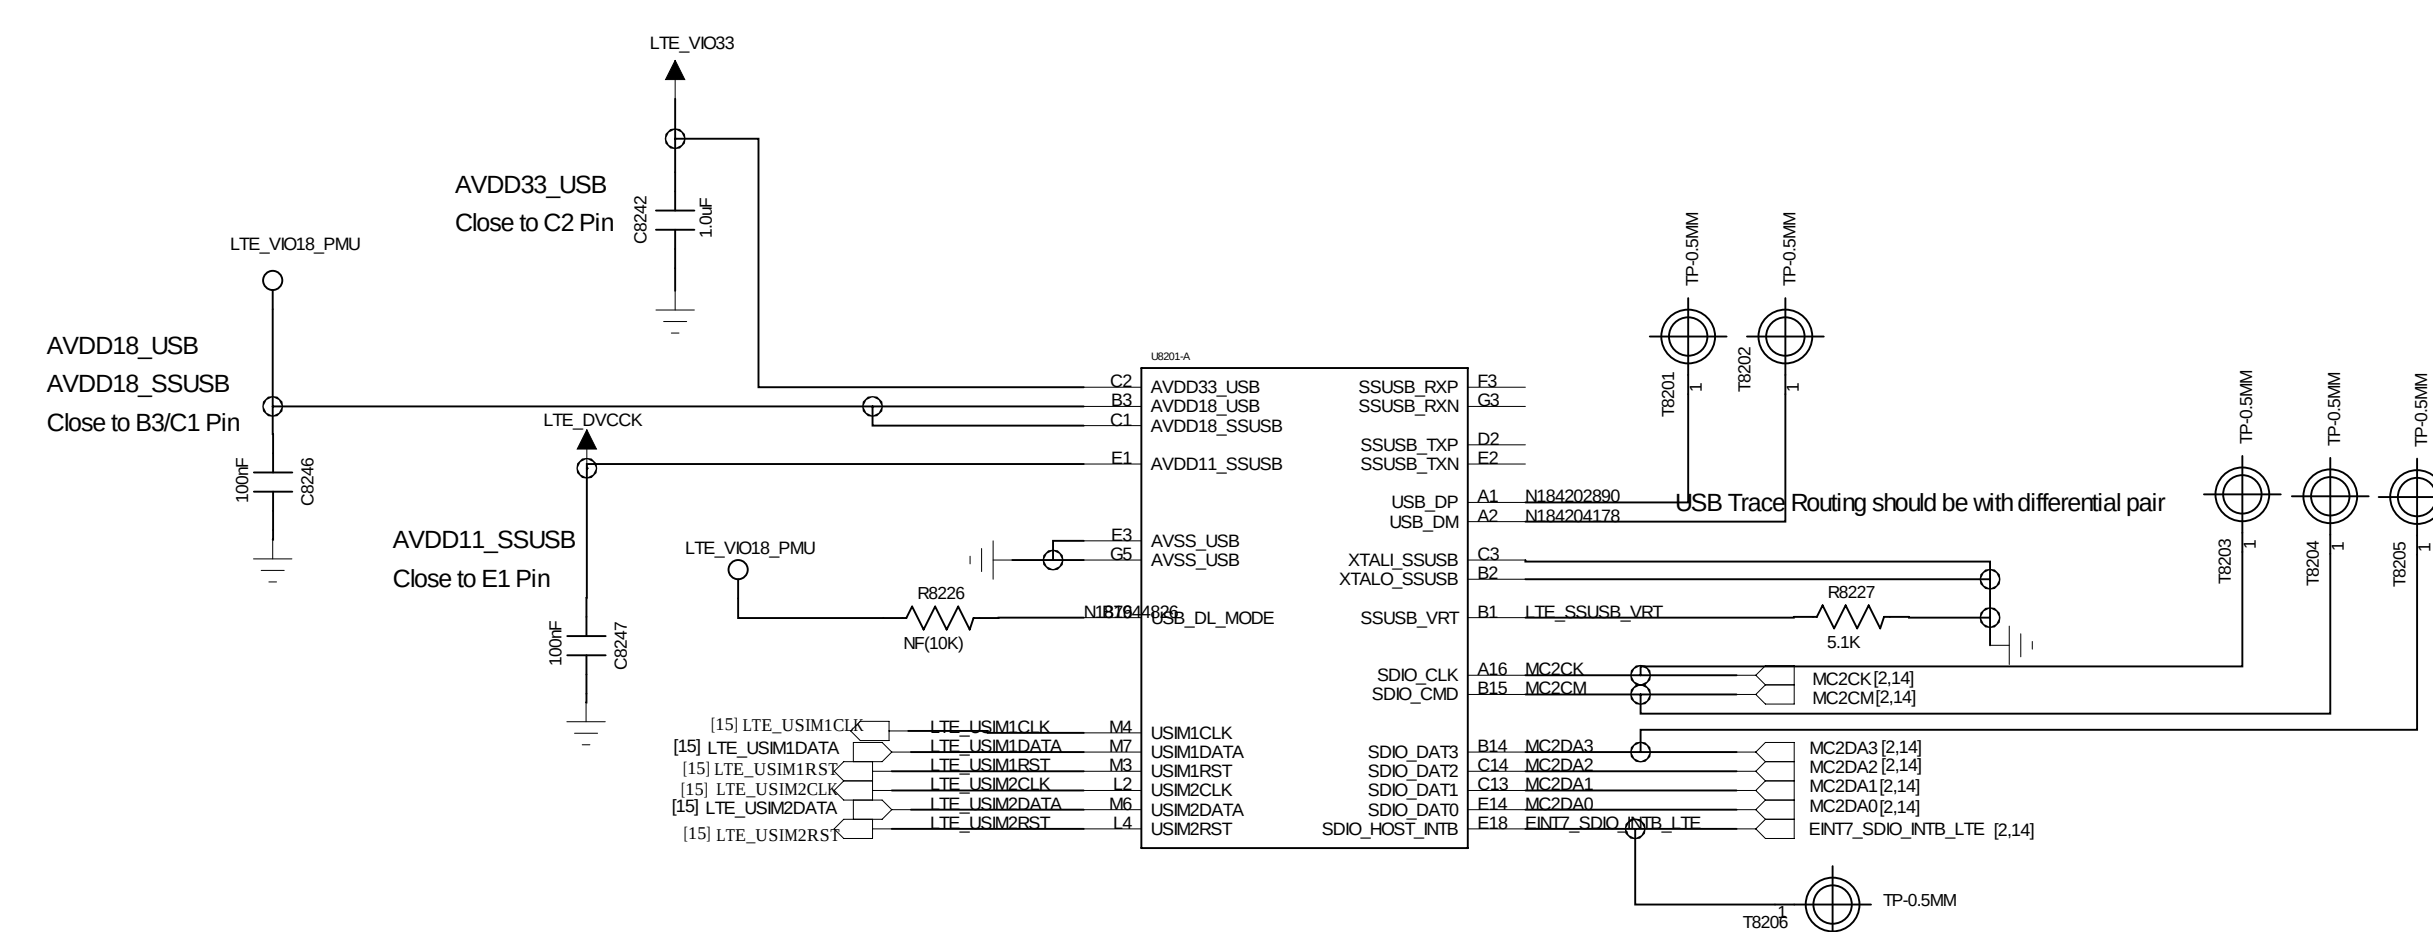

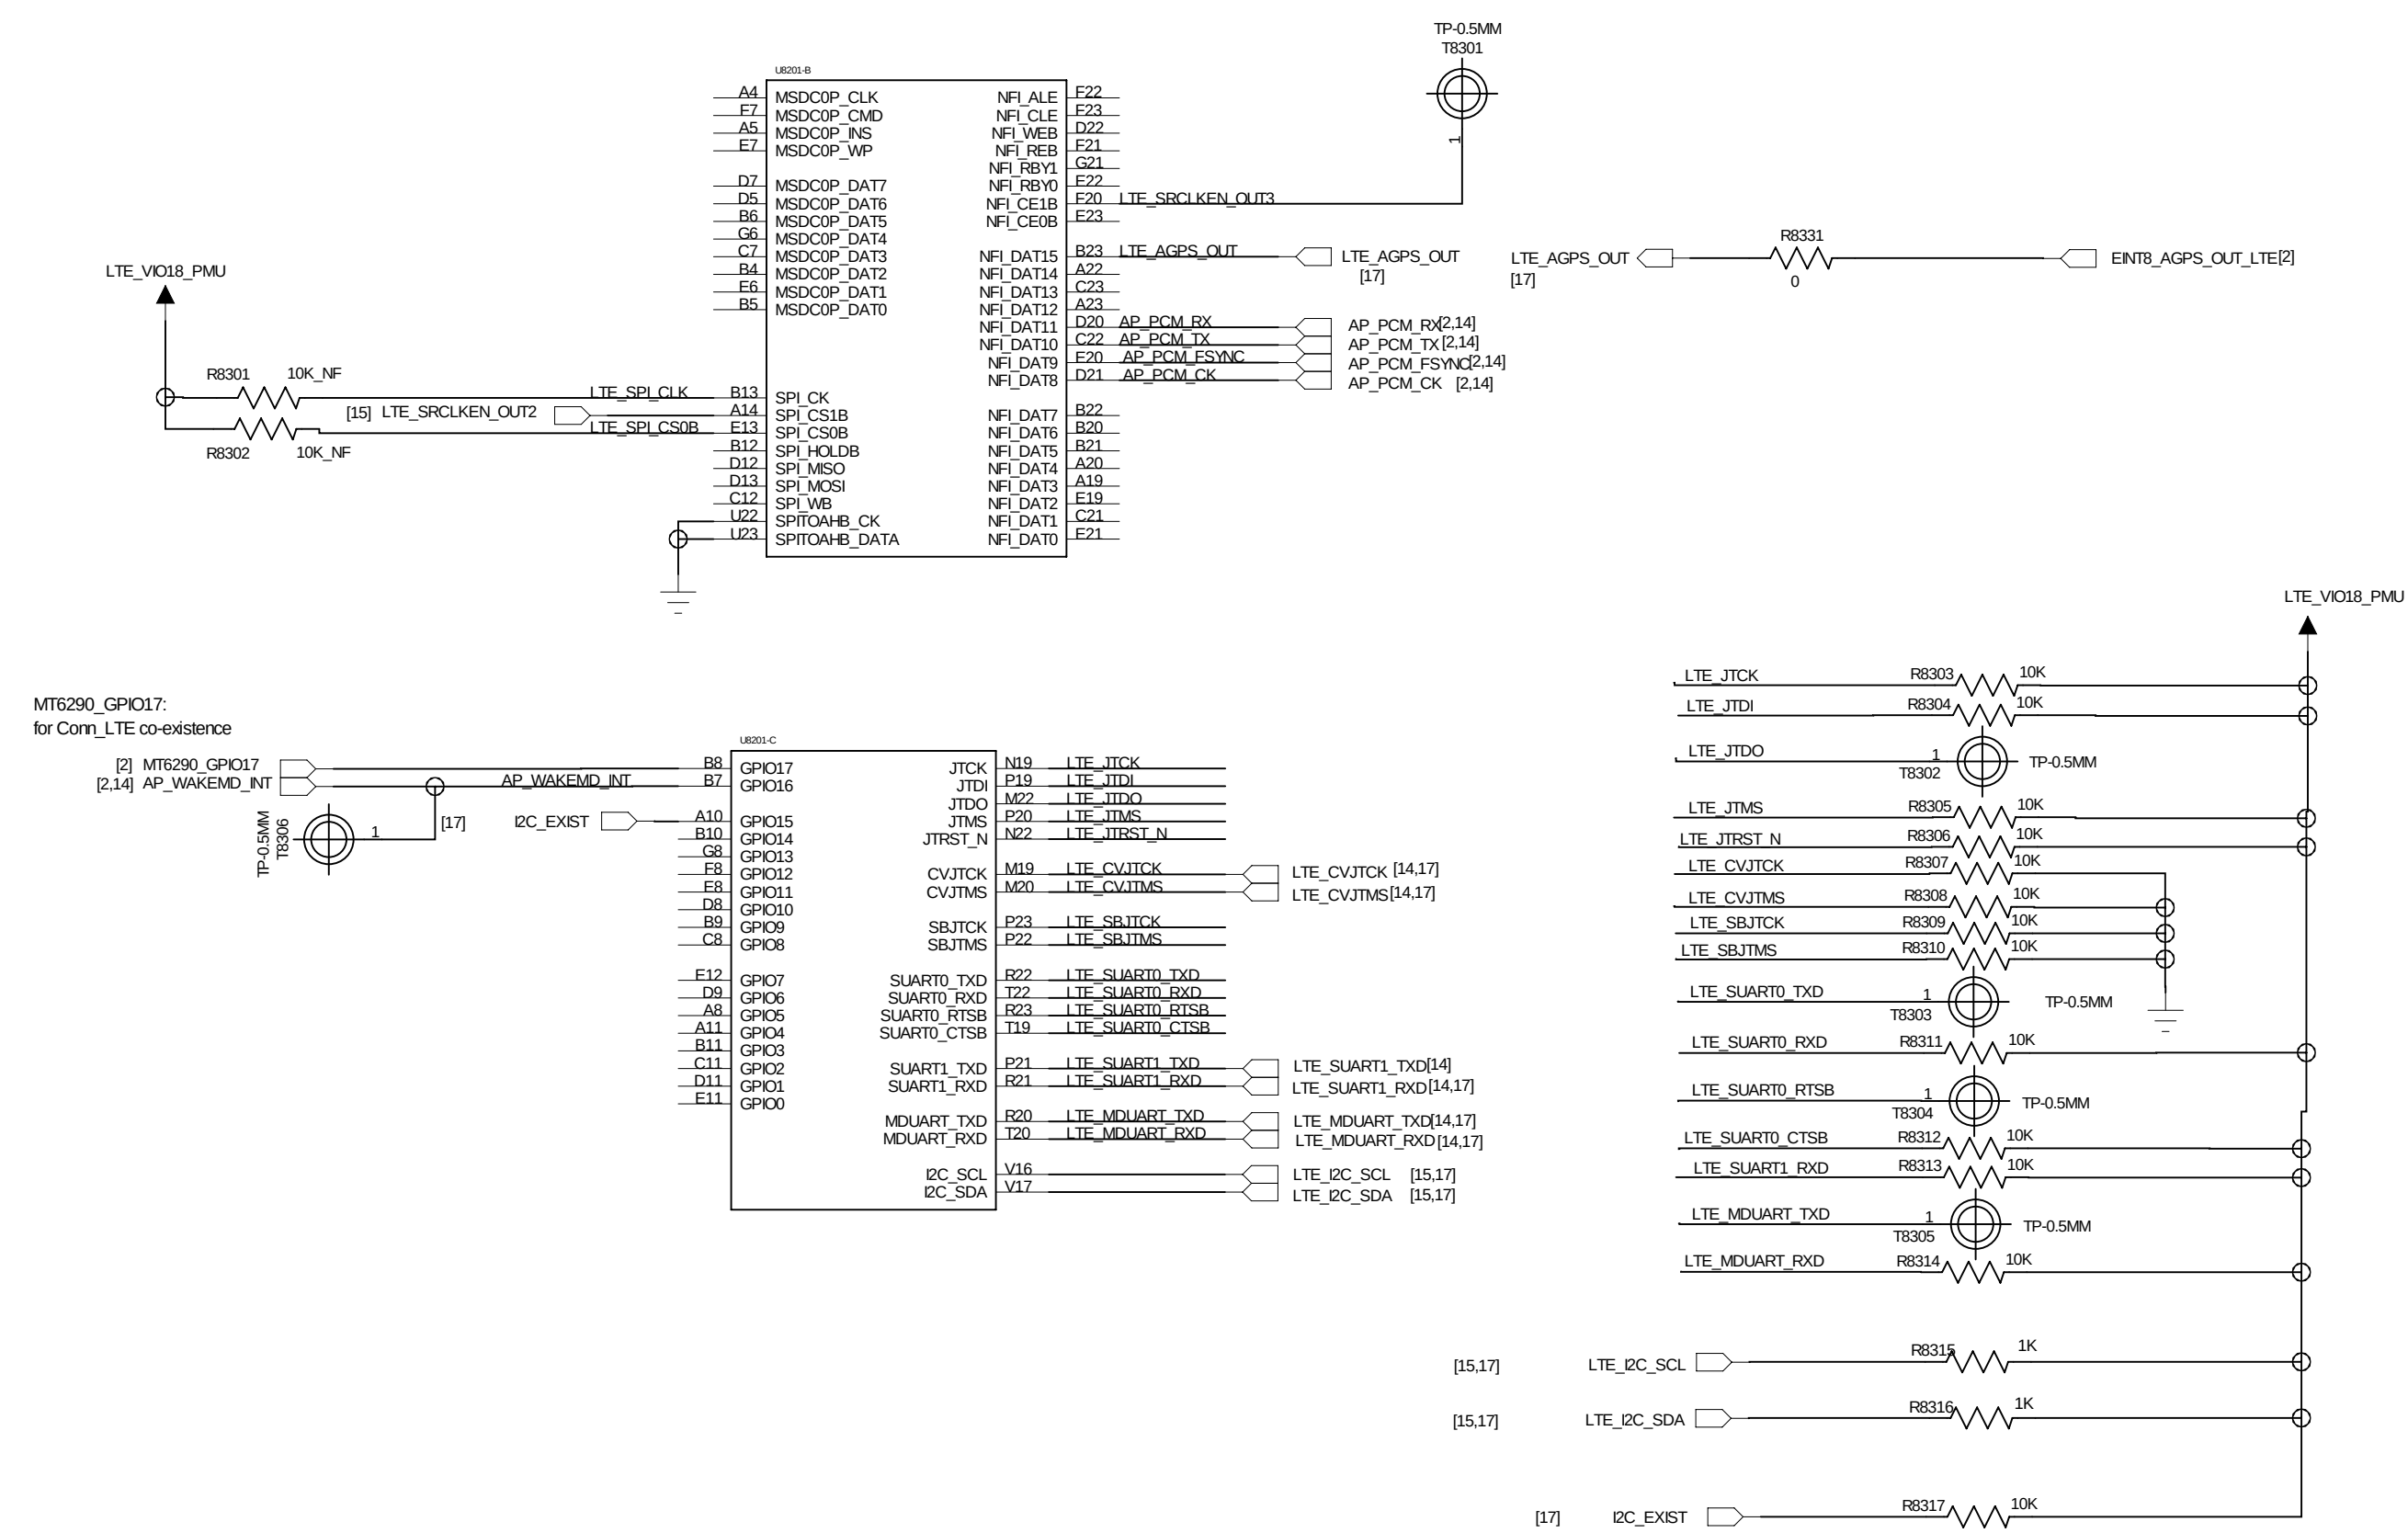

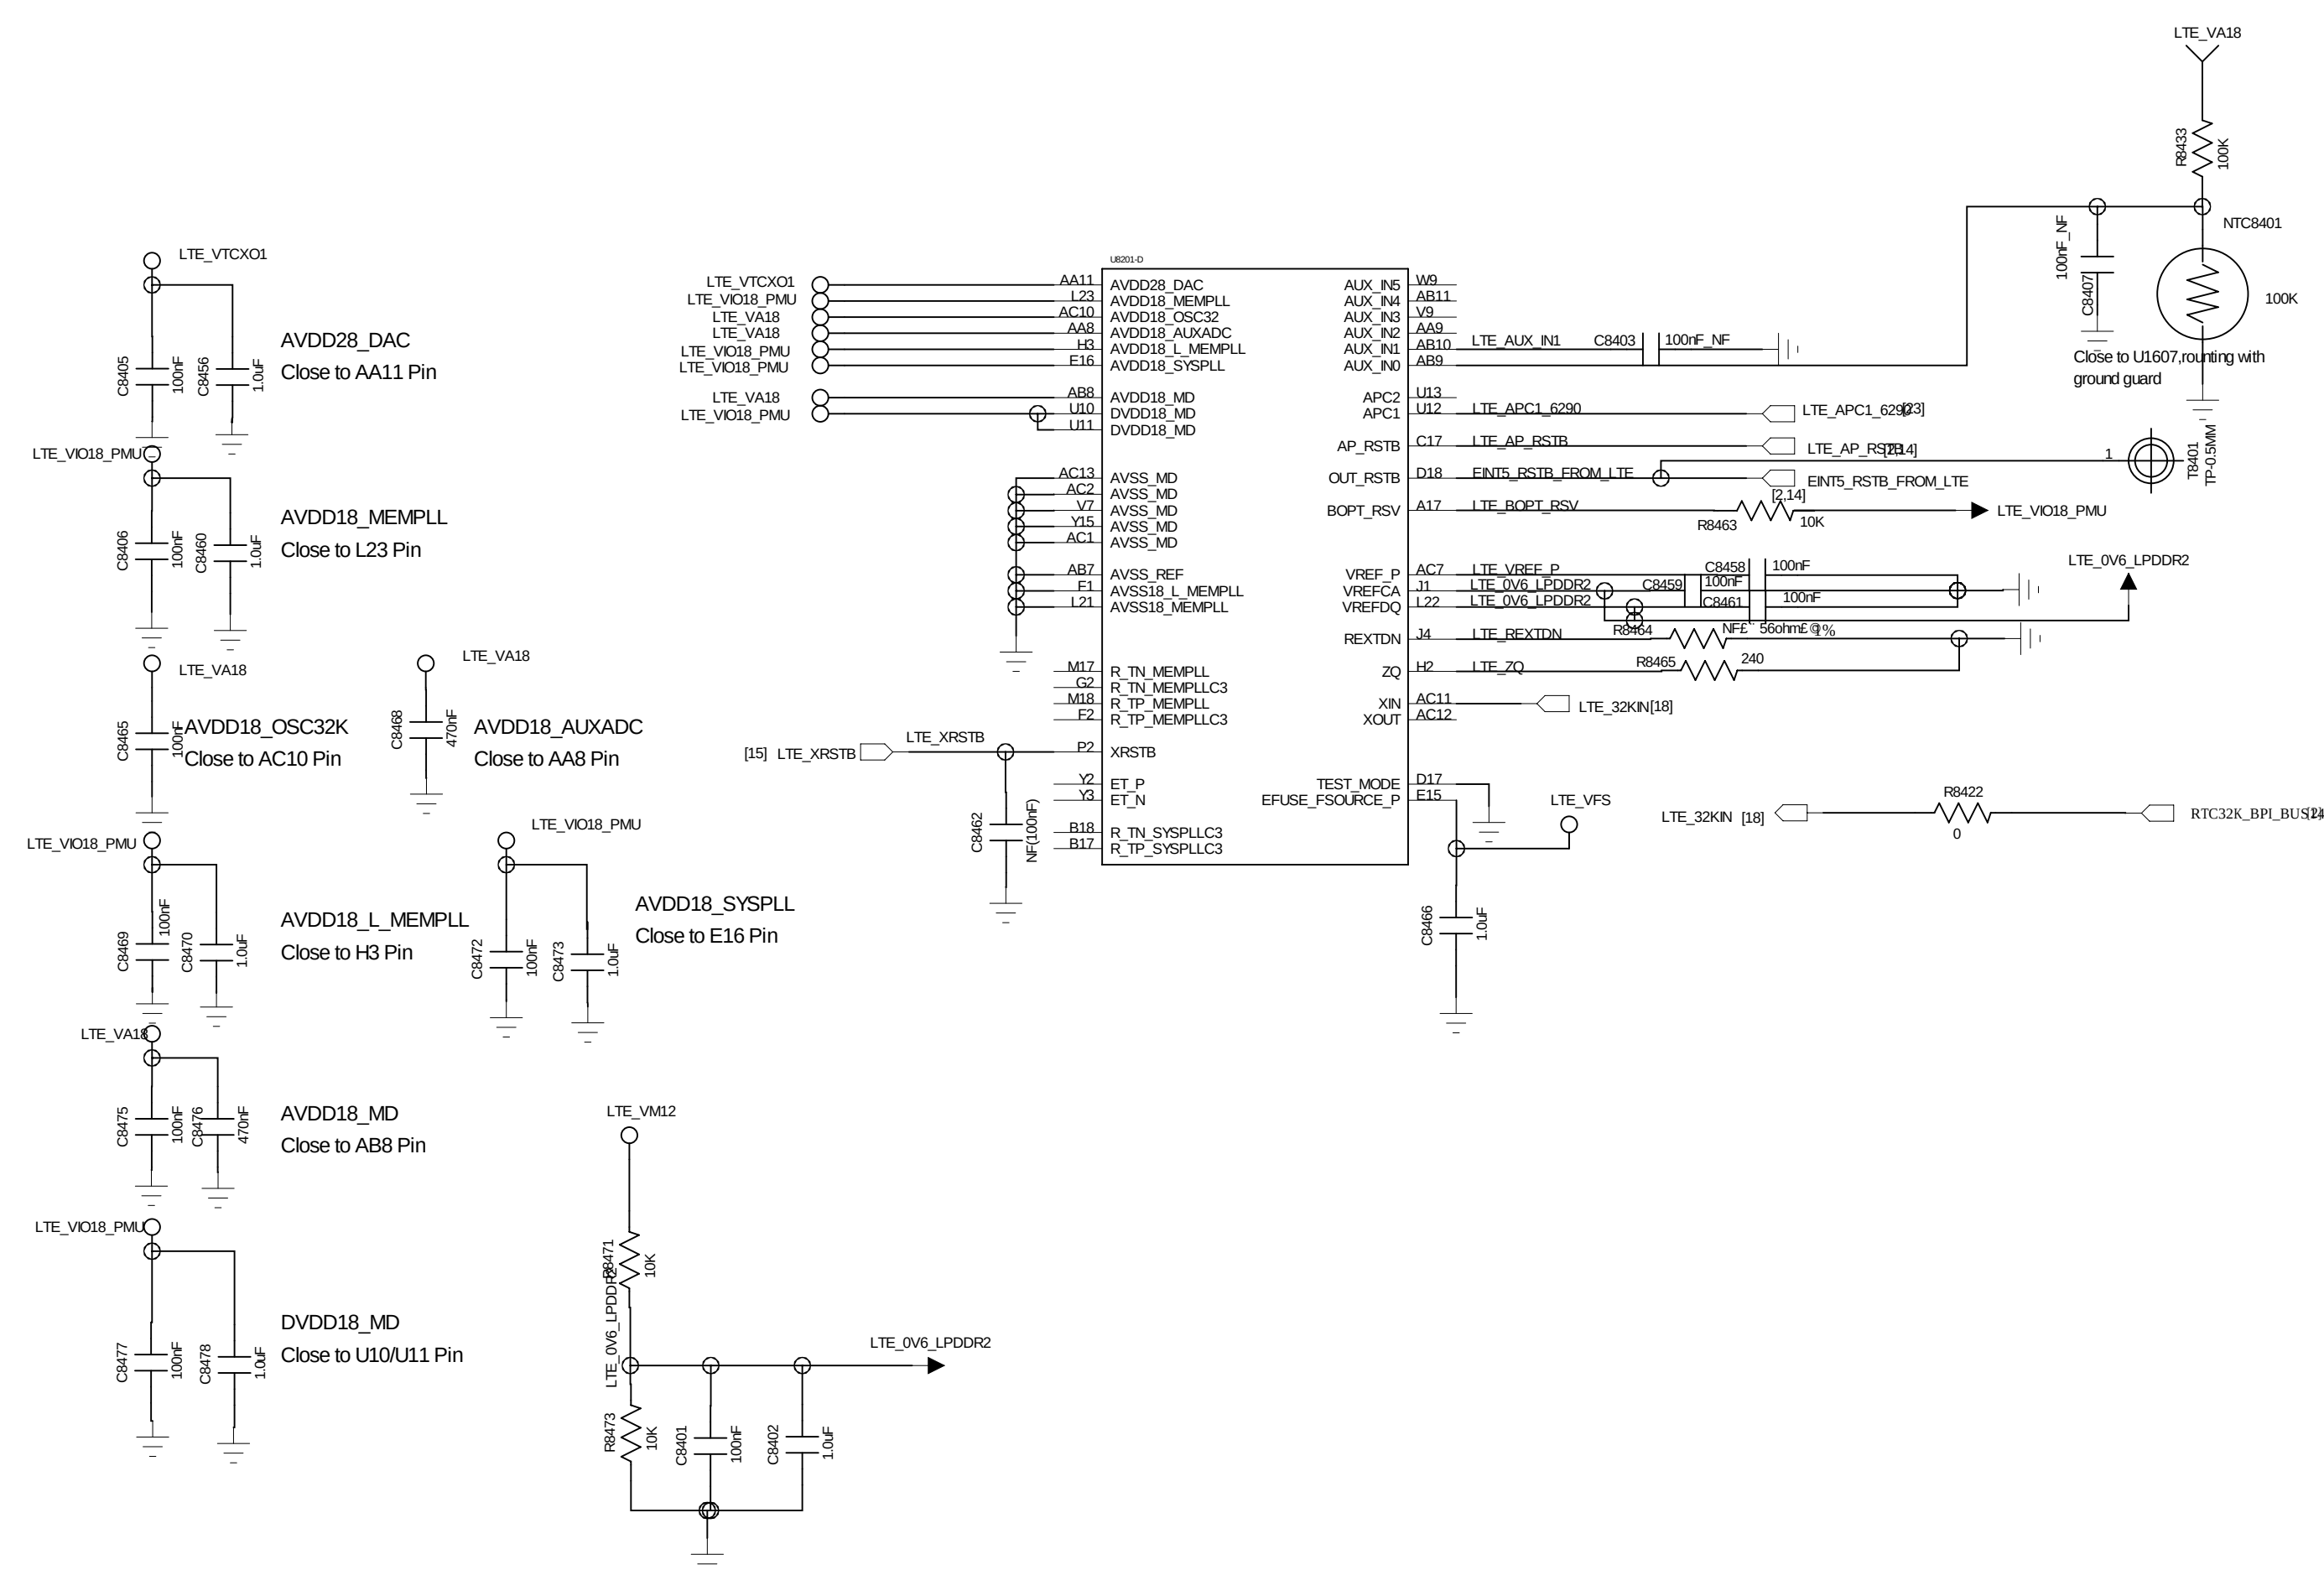
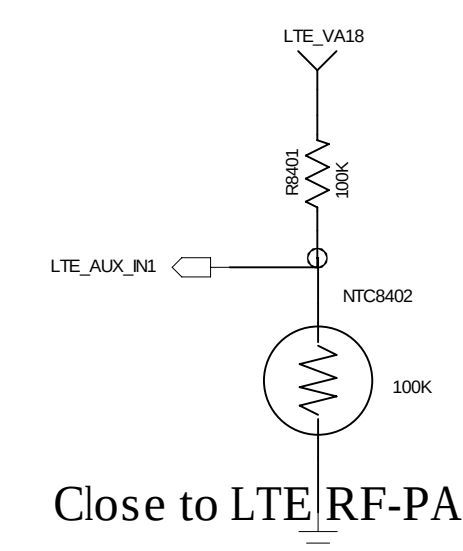


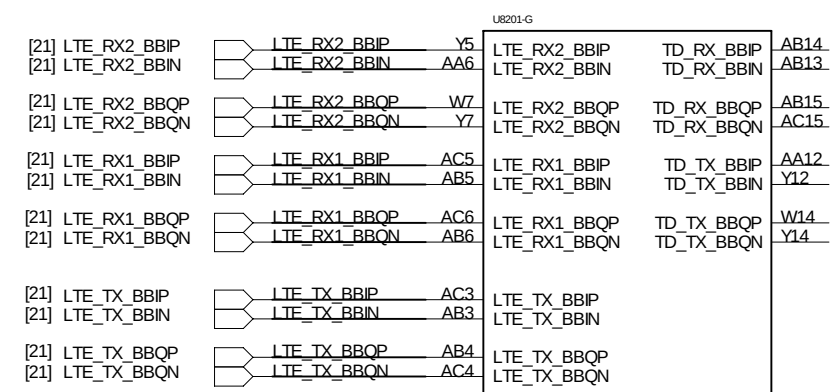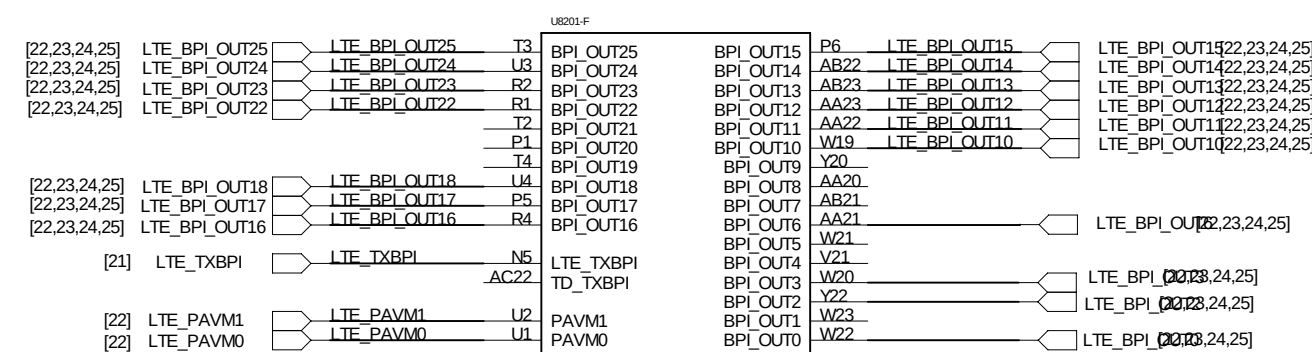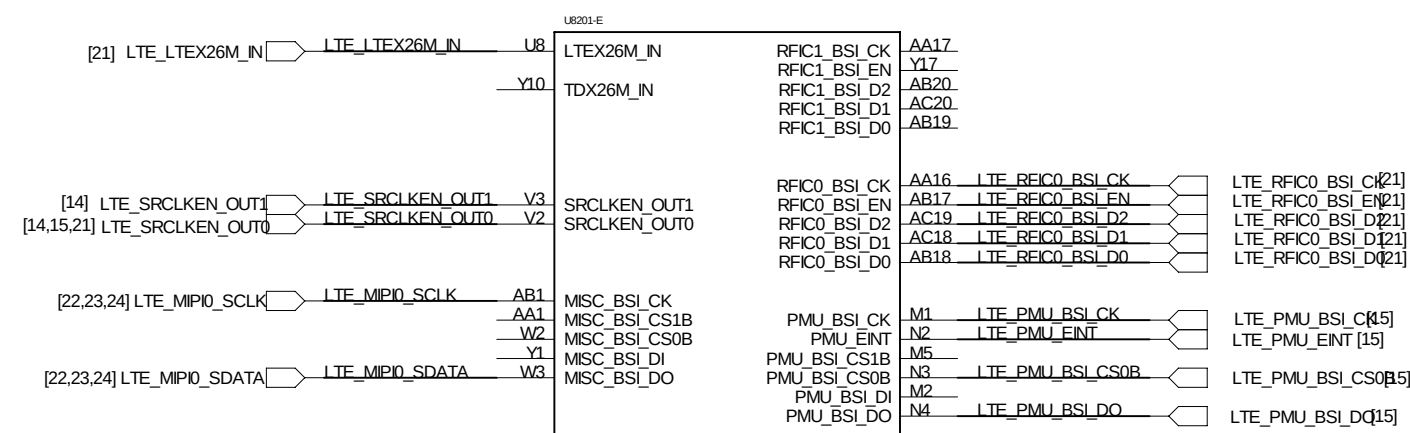

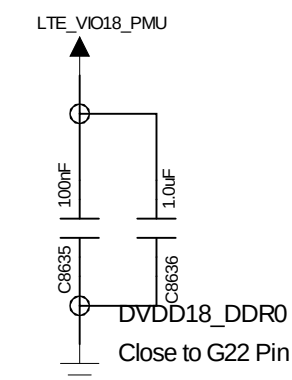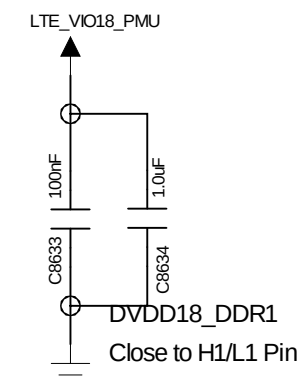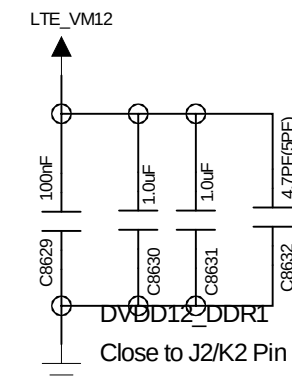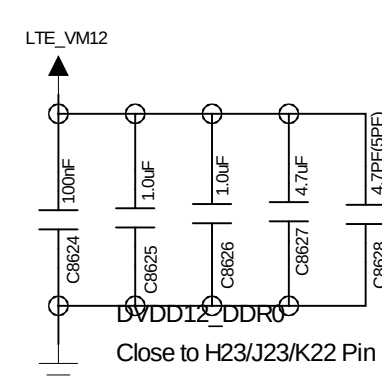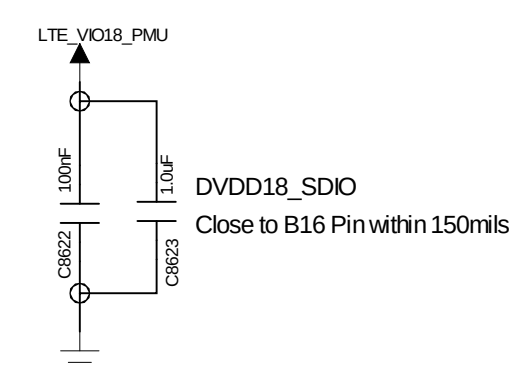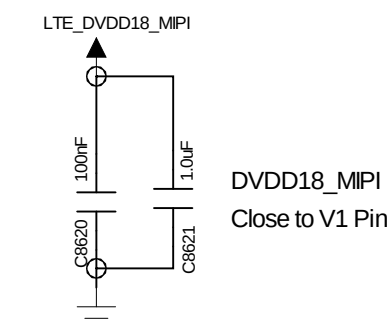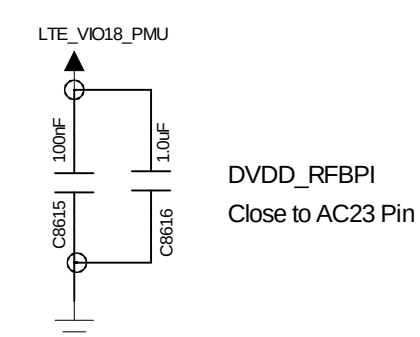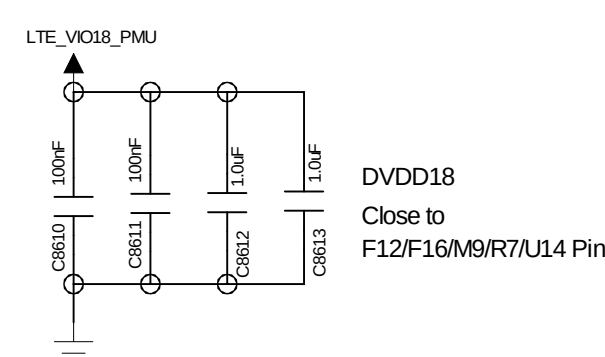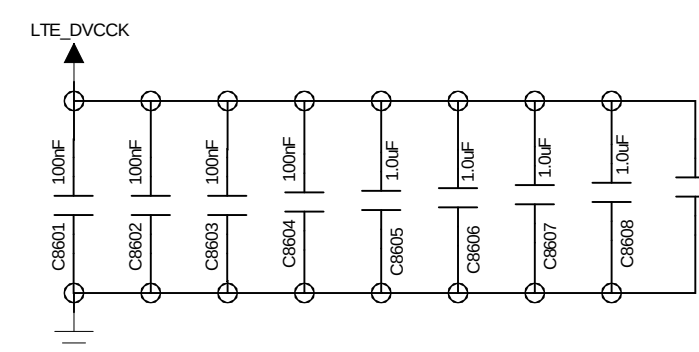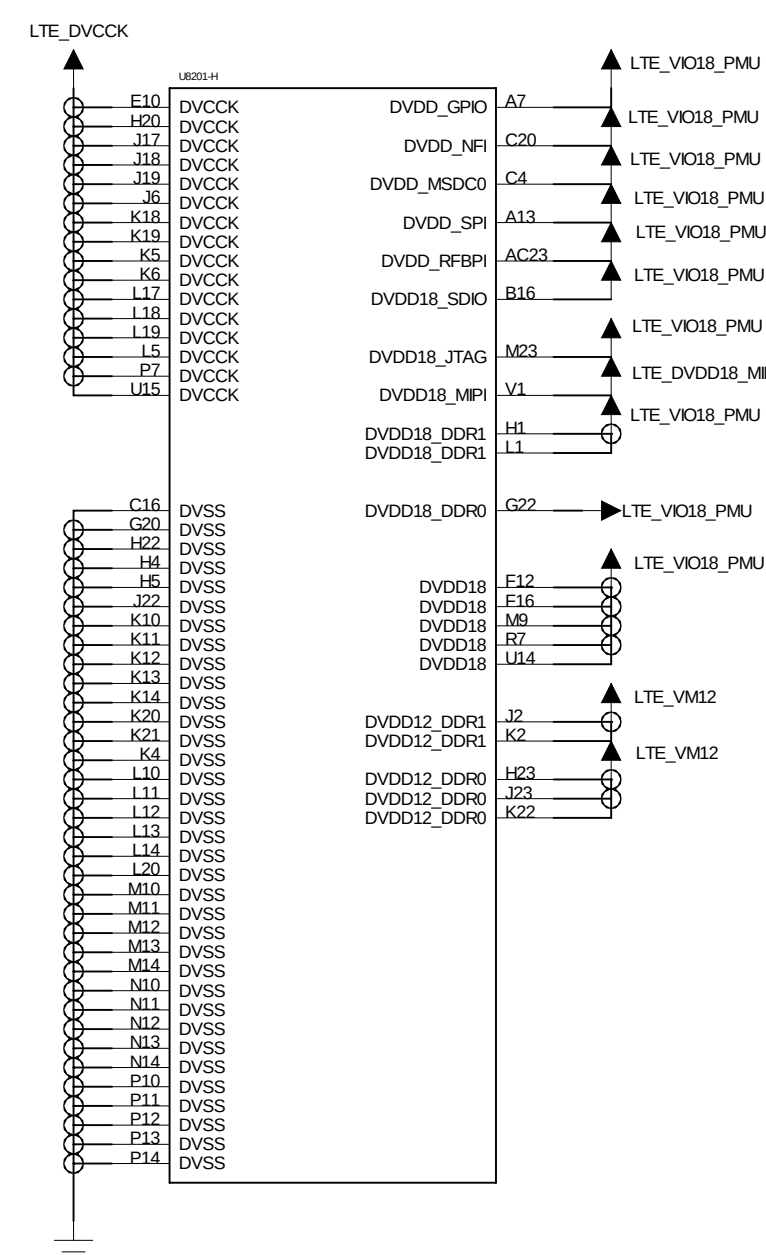

Off-Page Connector

(To RF front-end)

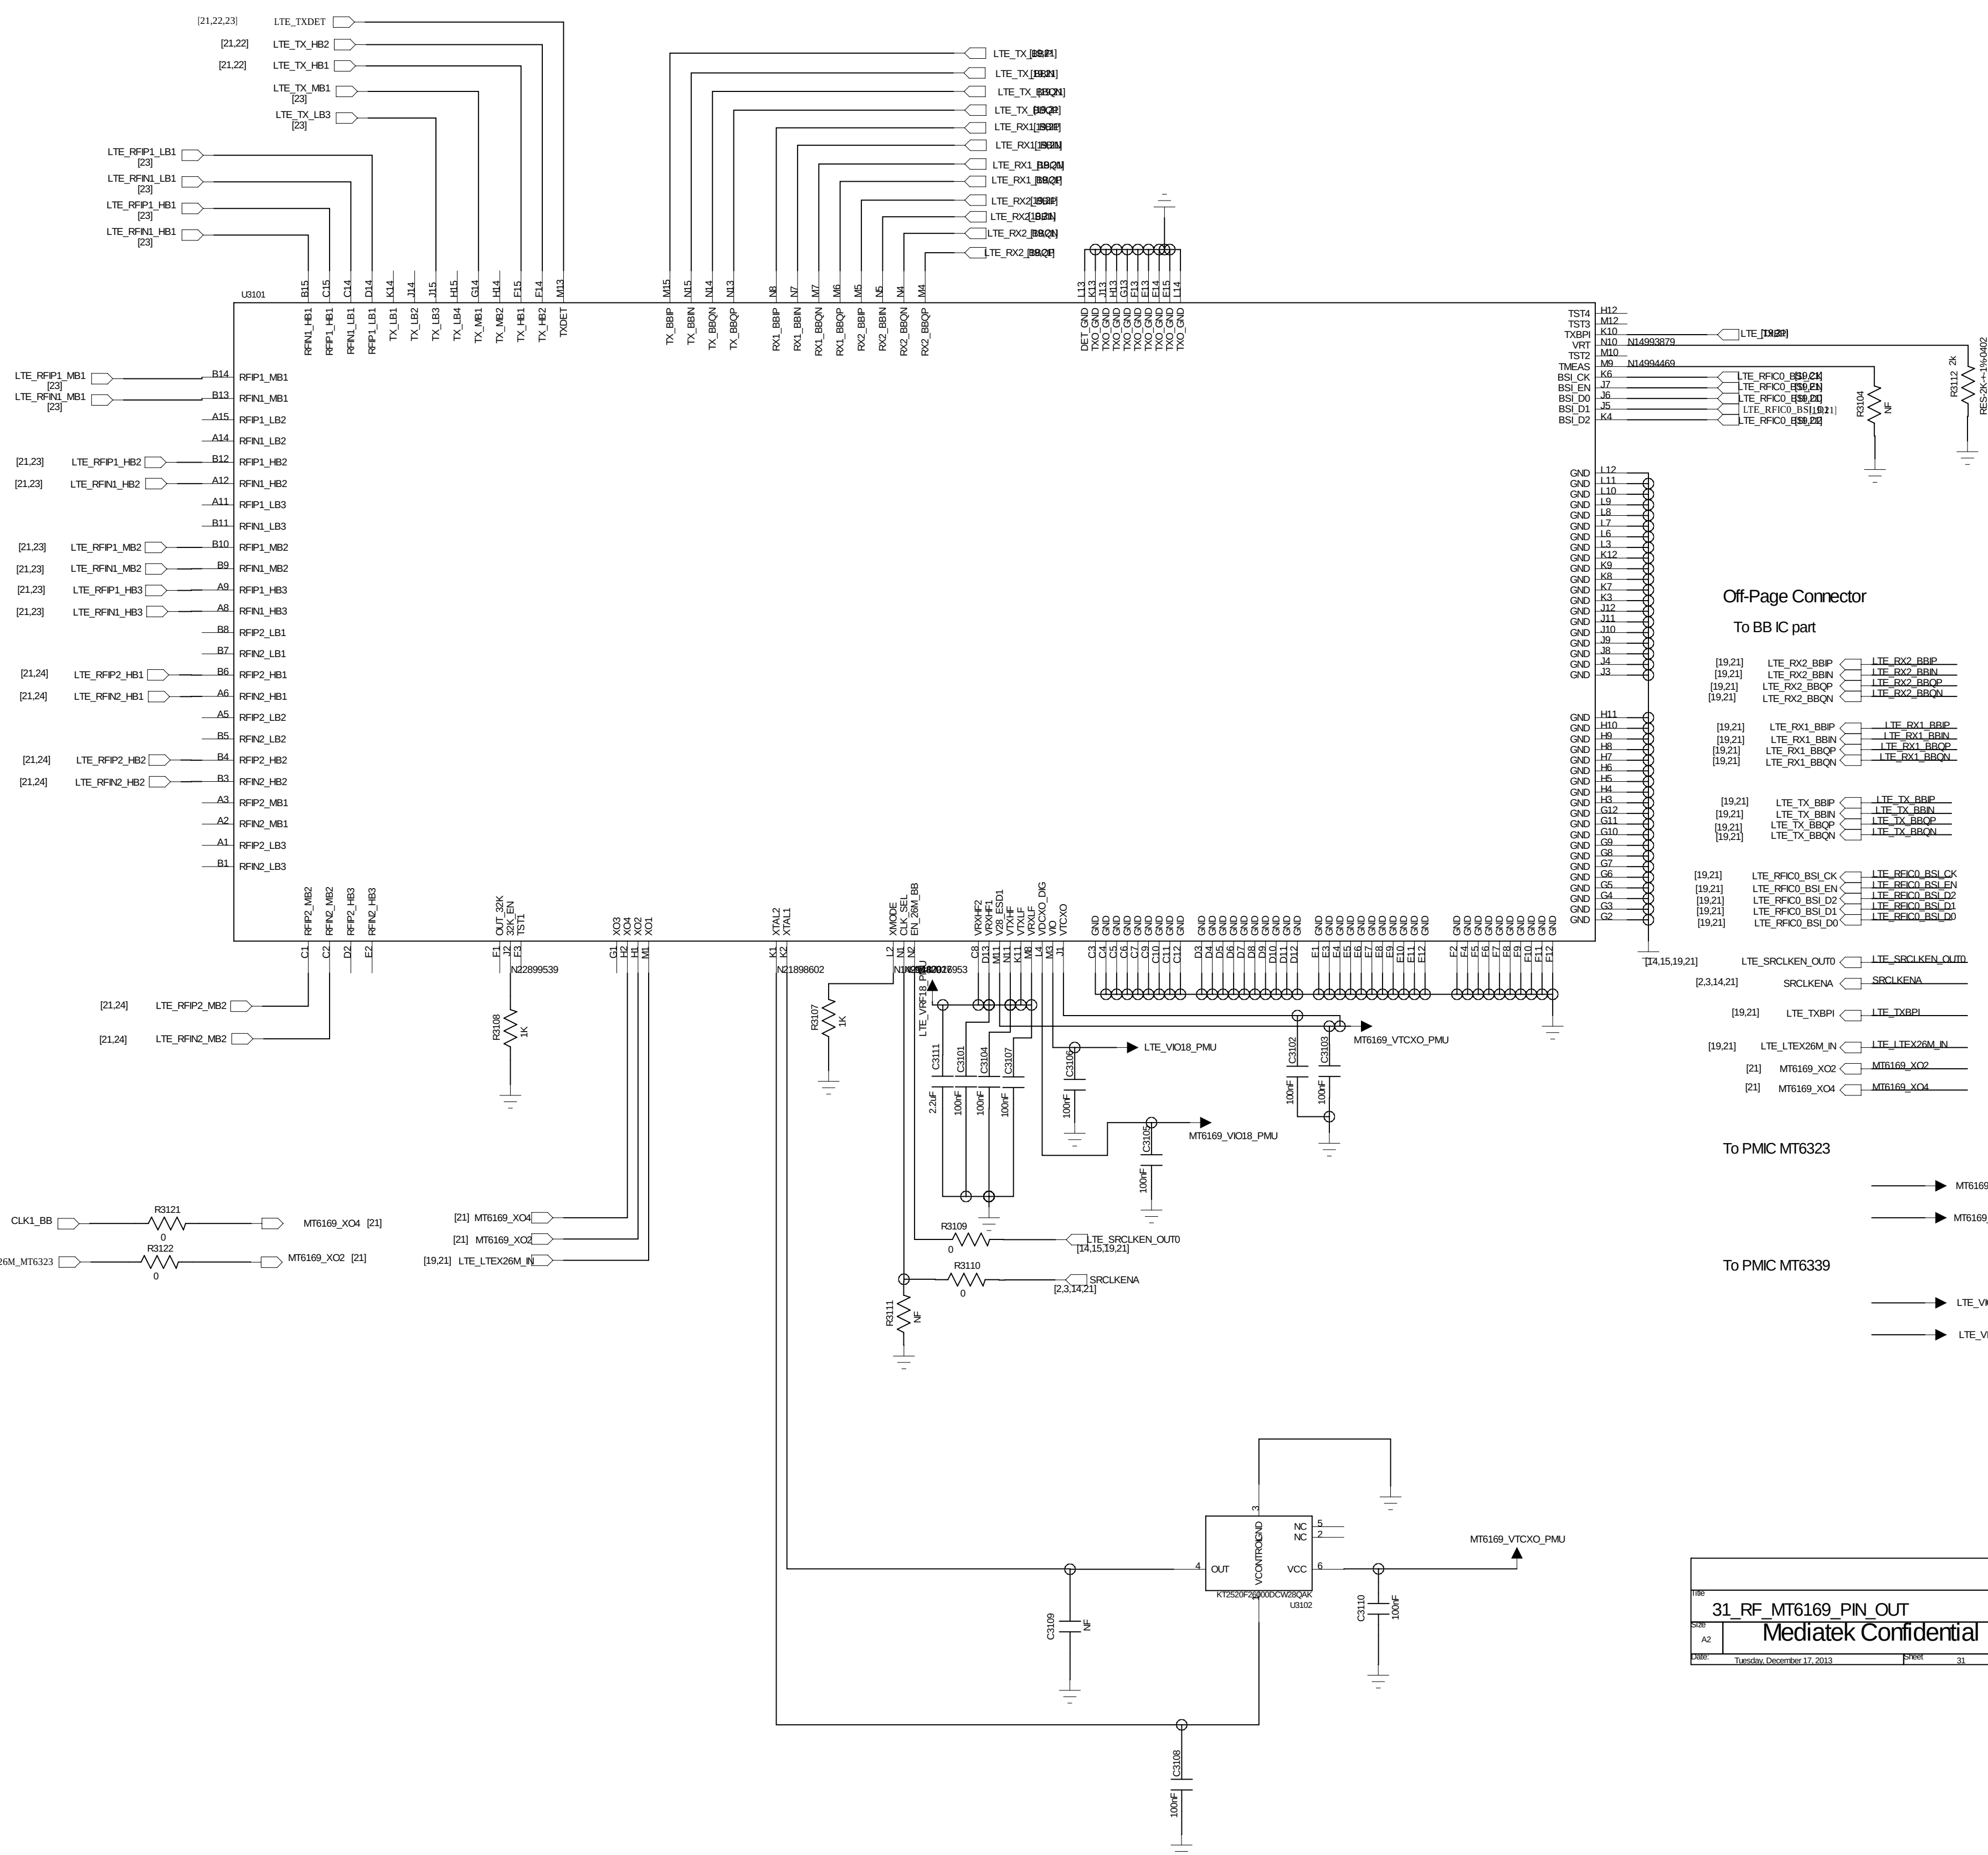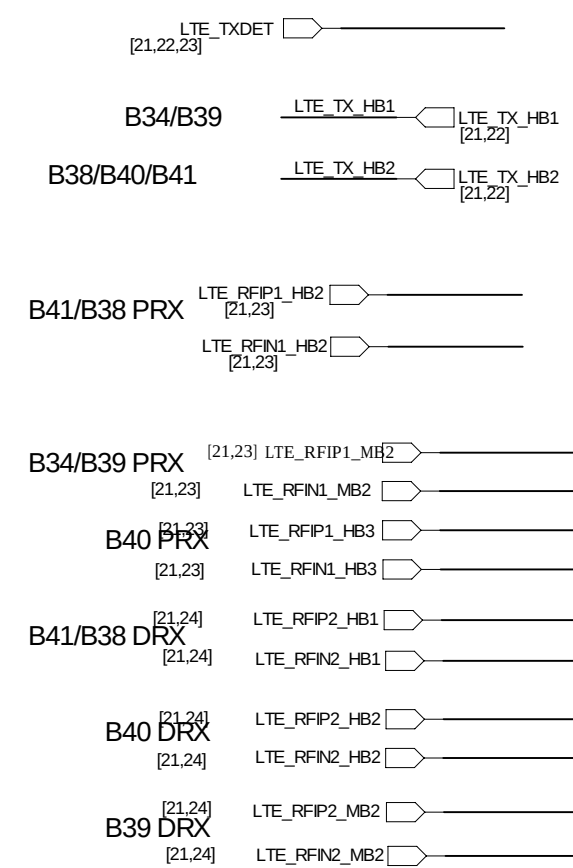

[illegible]

[19.22] LTE_PAVM1 LTE_PAVM1
[19.22] LTE_PAVM0 LTE_PAVM0

LTE_DVDD18_M1PI ◀

Signal	Pin	Pin	Signal
LTE_MPIO_SDATA	[19,22,23,24]		LTE_MPIO_SDATA
LTE_MPIO_SCLK	[19,22,23,24]		LTE_MPIO_SCLK
LTE_MPI1_SDATA	[22,23,24]		LTE_MPI1_SDATA
LTE_MPI1_SCLK	[22,23,24]		LTE_MPI1_SCLK

```


VDD_RFSW<--2--R3242--1-->LTE_VTCX01
              0

```

VDD_RFSW only connect to
LTE_VTCXO1 by MT6339.
(LTE_VTCXO2 off at CSFB)



VBAT

LTE_VPA_PMU

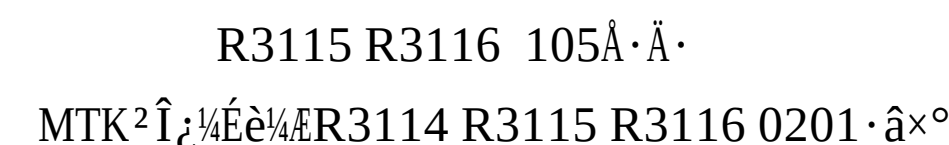


<http://www.xinxunwei.com> TEL:400-800-9990 QQ:4006538586



ASM Main2 824~1990MHz

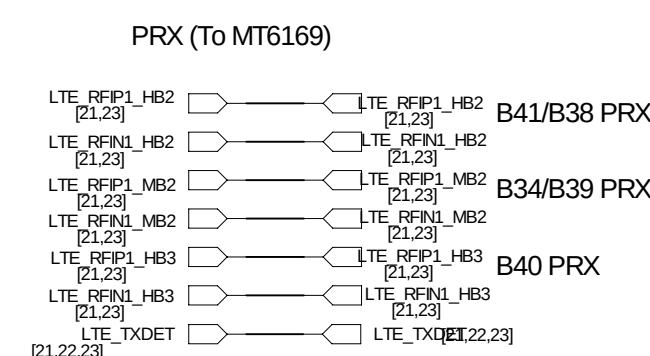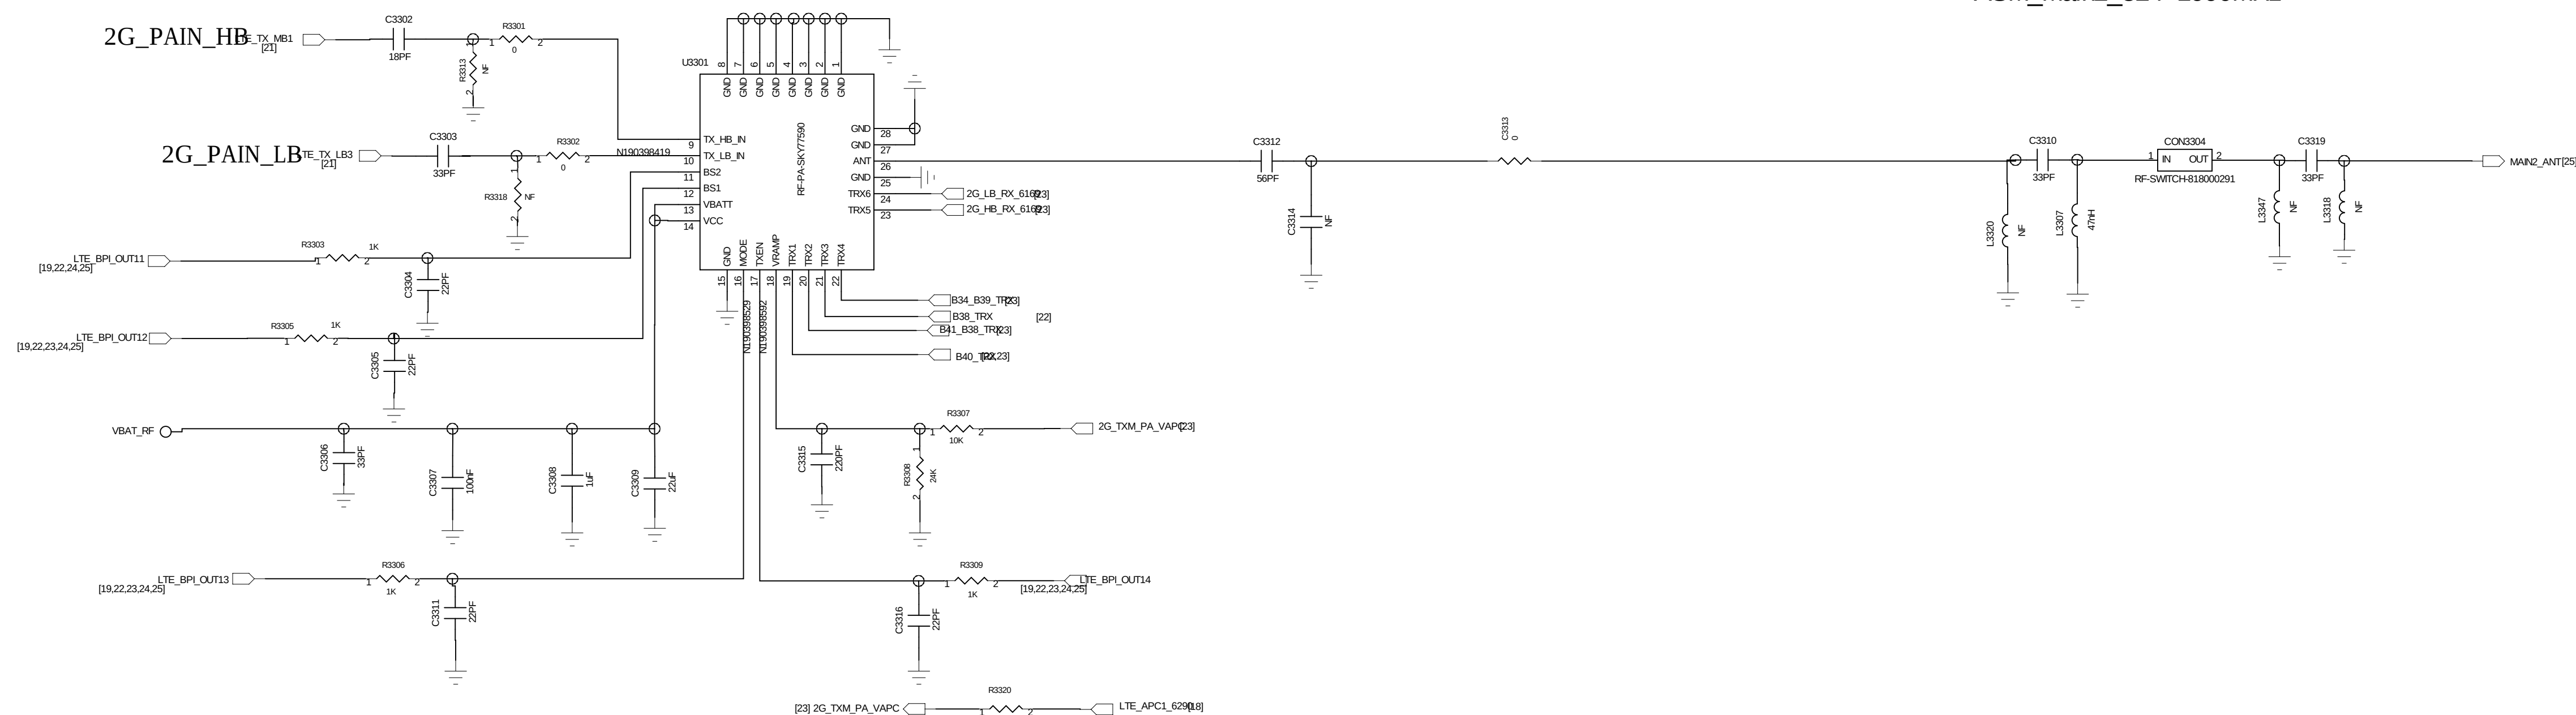

2G (To MT6165)

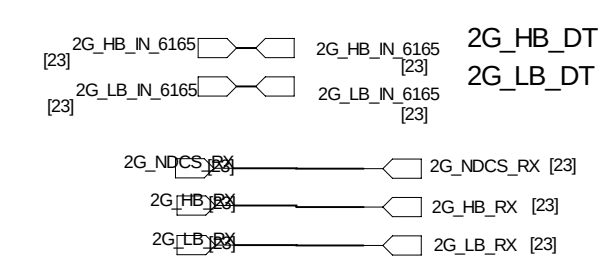


To MMMB/discrete PA/3P4T

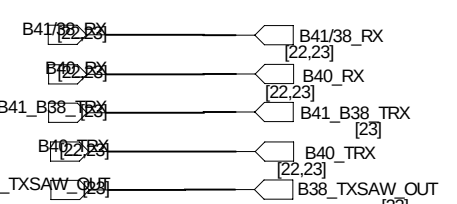


To LTE_VTCXO1 (0ohm to MT6339)




MIPI (To MT6290/6339)

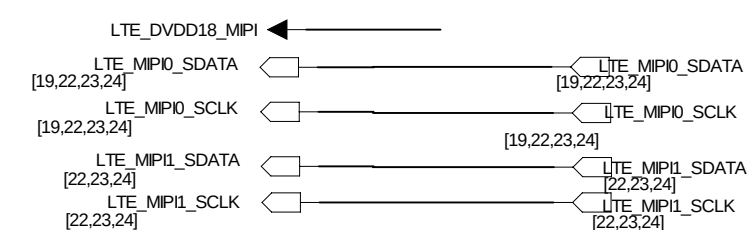


BPI config.

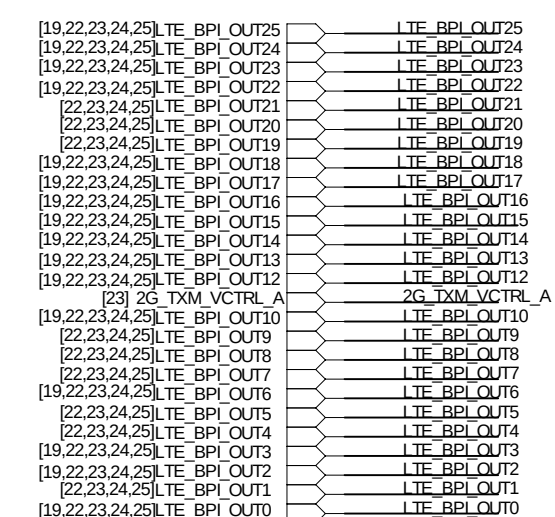


B38/41, B40 PRX

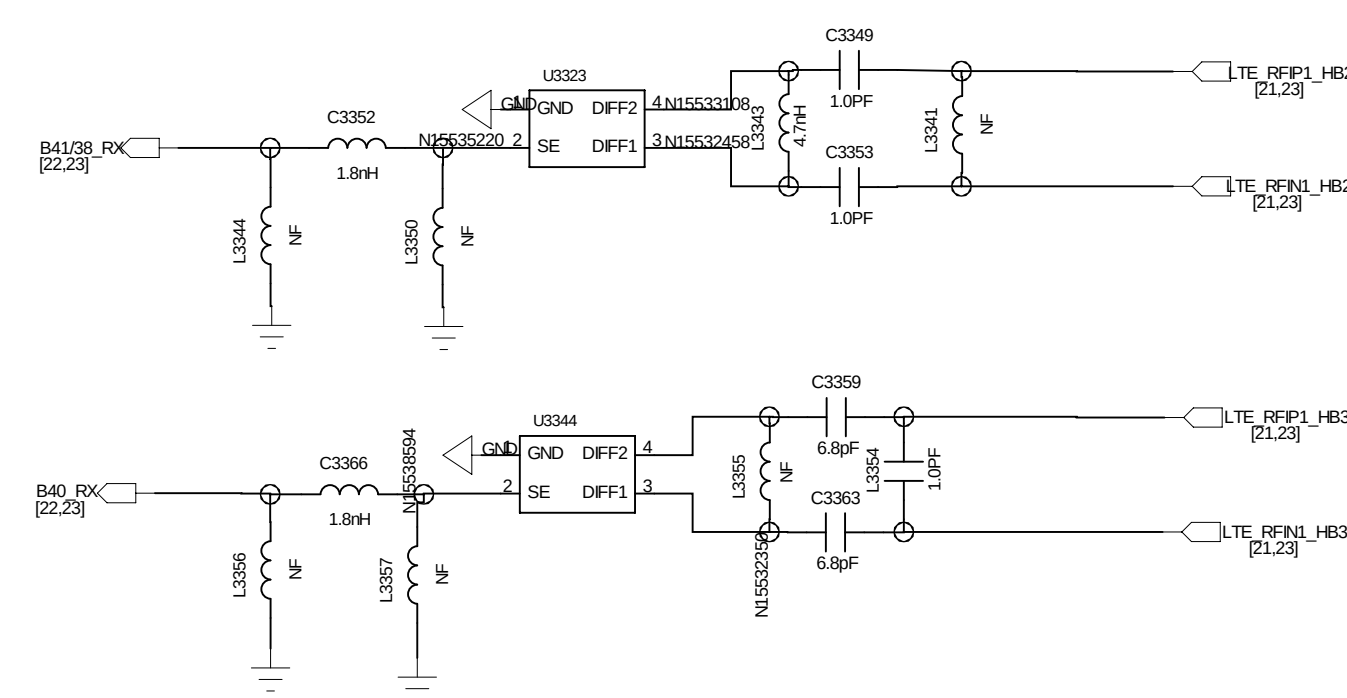

B34 & B39 PRX

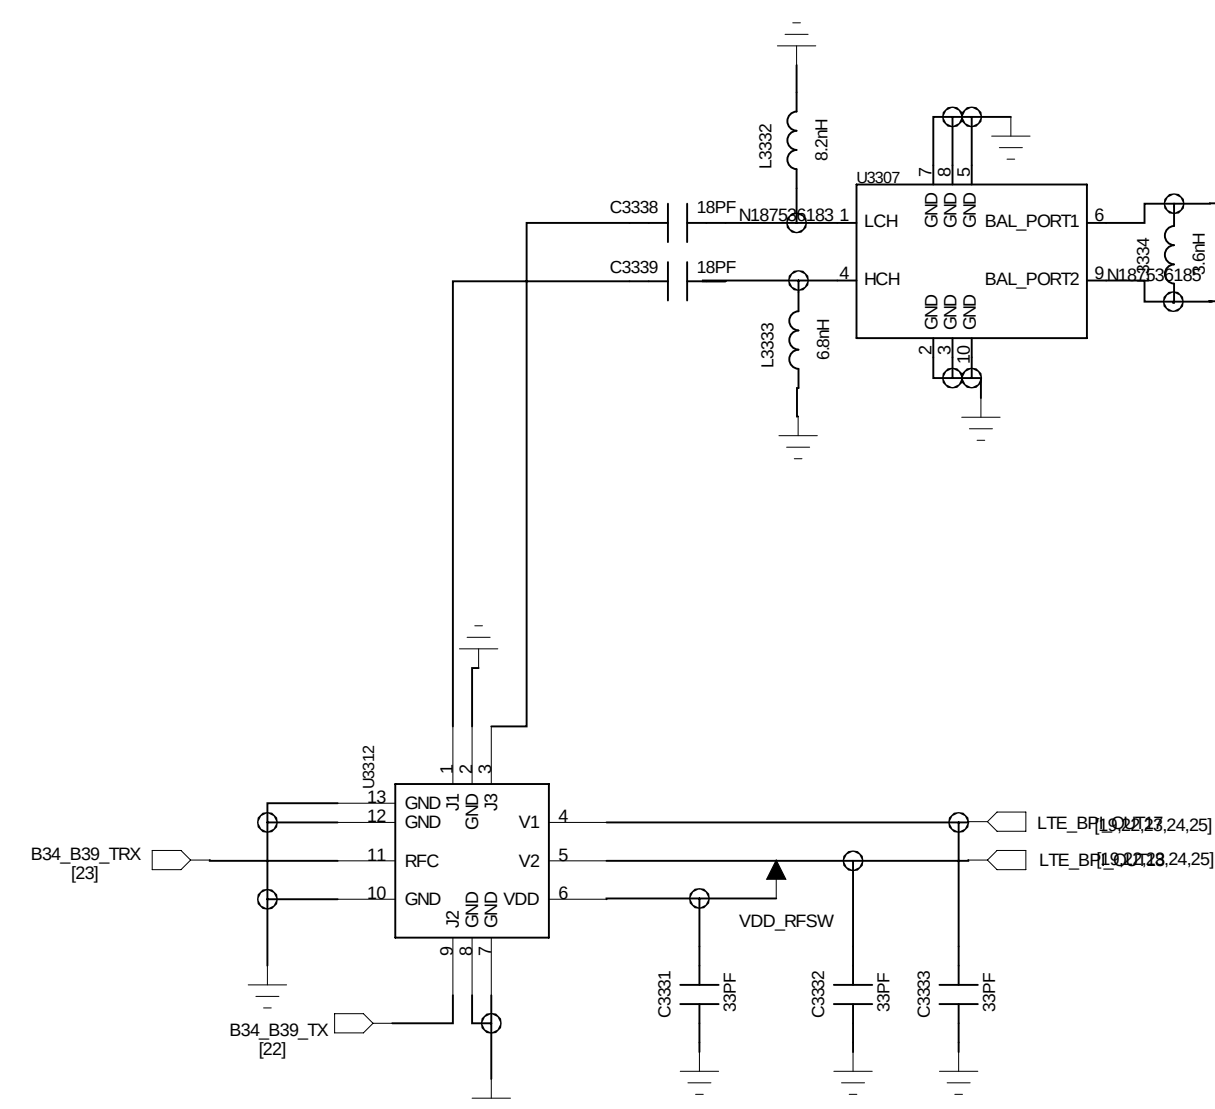

DRX ANT: 704~2700MHz

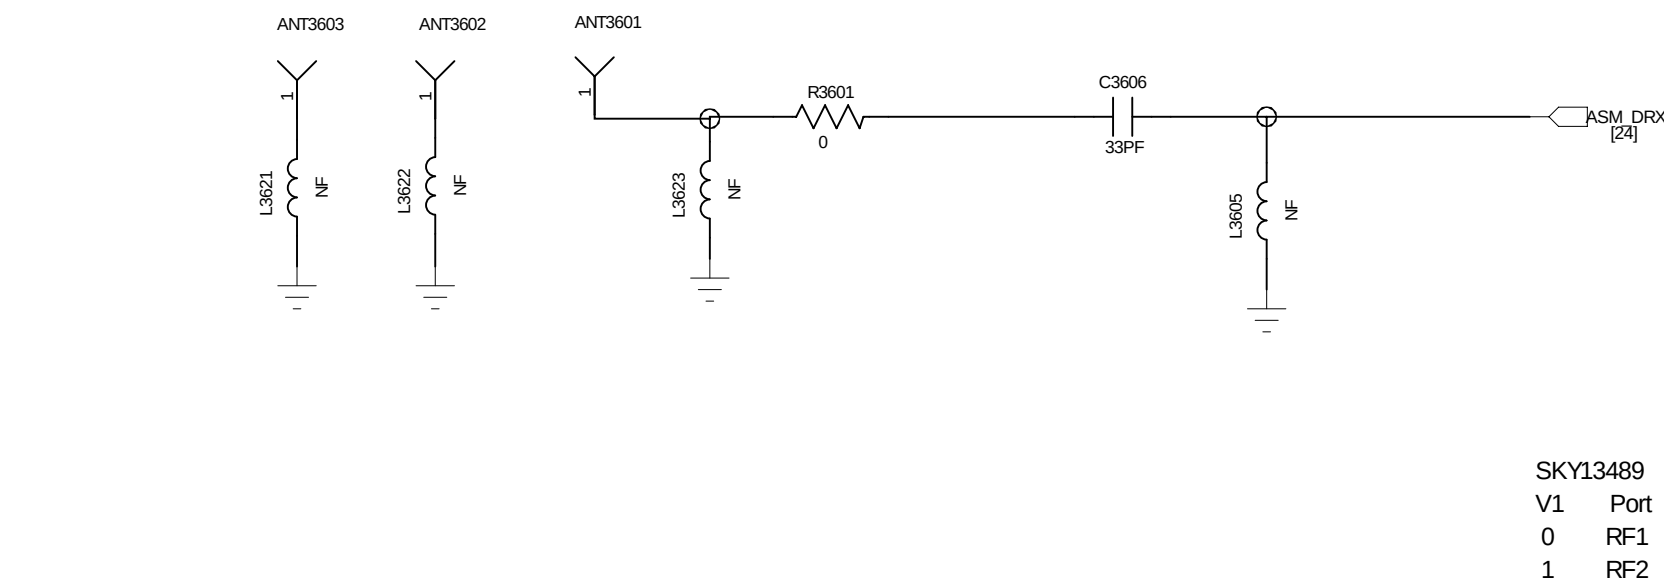

To LTE_VTCXO1 (0ohm to MT6339)
VDD_RF5W

BPI config.	
[19.22.23.24.25] LTE_BPI_OUT25	LTE_BPI_OUT25
[19.22.23.24.25] LTE_BPI_OUT24	LTE_BPI_OUT24
[19.22.23.24.25] LTE_BPI_OUT23	LTE_BPI_OUT23
[19.22.23.24.25] LTE_BPI_OUT22	LTE_BPI_OUT22
[22.23.24.25] LTE_BPI_OUT21	LTE_BPI_OUT21
[22.23.24.25] LTE_BPI_OUT20	LTE_BPI_OUT20
[22.23.24.25] LTE_BPI_OUT19	LTE_BPI_OUT19
[19.22.23.24.25] LTE_BPI_OUT18	LTE_BPI_OUT18
[19.22.23.24.25] LTE_BPI_OUT17	LTE_BPI_OUT17
[19.22.23.24.25] LTE_BPI_OUT16	LTE_BPI_OUT16
[19.22.23.24.25] LTE_BPI_OUT15	LTE_BPI_OUT15
[19.22.23.24.25] LTE_BPI_OUT14	LTE_BPI_OUT14
[19.22.23.24.25] LTE_BPI_OUT13	LTE_BPI_OUT13
[19.22.23.24.25] LTE_BPI_OUT12	LTE_BPI_OUT12
[19.22.23.24.25] LTE_BPI_OUT11	LTE_BPI_OUT11
[19.22.23.24.25] LTE_BPI_OUT10	LTE_BPI_OUT10
[22.23.24.25] LTE_BPI_OUT9	LTE_BPI_OUT9
[22.23.24.25] LTE_BPI_OUT8	LTE_BPI_OUT8
[22.23.24.25] LTE_BPI_OUT7	LTE_BPI_OUT7
[19.22.23.24.25] LTE_BPI_OUT6	LTE_BPI_OUT6
[22.23.24.25] LTE_BPI_OUT5	LTE_BPI_OUT5
[22.23.24.25] LTE_BPI_OUT4	LTE_BPI_OUT4
[19.22.23.24.25] LTE_BPI_OUT3	LTE_BPI_OUT3
[19.22.23.24.25] LTE_BPI_OUT2	LTE_BPI_OUT2
[22.23.24.25] LTE_BPI_OUT1	LTE_BPI_OUT1
[19.22.23.24.25] LTE_BPI_OUT0	LTE_BPI_OUT0
BPI0	AT_SEL_DRX
BPI1	AT_SEL_MAIN1
BPI2	AT_SEL_MAIN2
BPI3	NA
BPI4	NA
BPI5	3P4B39_TX_SEL
BPI6	3P4B39_TX_SEL
BPI7	3P4B39_TX_SEL
BPI8	NA
BPI9	3P4B39_PA_EN
BPI10	3P4B39_VCTL_A
BPI11	3P4B39_VCTL_B
BPI12	3P4B39_VCTL_C
BPI13	3P4B39_VCTL_D
BPI14	3P4B39_PA_ENABLE
BPI15	ANT_DRX_SP31_V1
BPI16	ANT_DRX_SP31_V2
BPI17	NA
BPI18	ANT_Main1_SP81_V1
BPI19	ANT_Main1_SP81_V2
BPI20	ANT_Main1_SP81_V3
BPI21	3P41_V1
BPI22	3P41_V2
BPI23	3P41_V3
BPI24	3P41_V4
BPI25	3P41_V4

Main2 ANT: 704~2170MHz

