

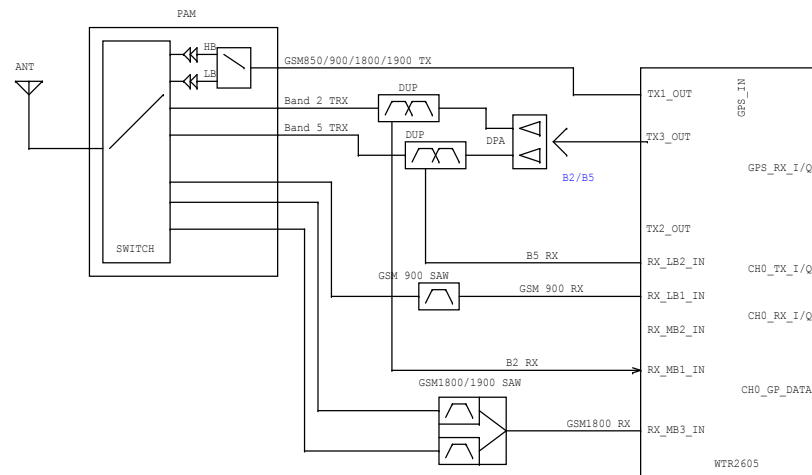


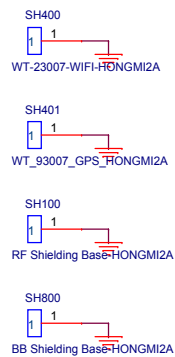


Title	
2013028	
Size	Document Number
A3	<Doc>
Date:	Monday, December 30, 2013

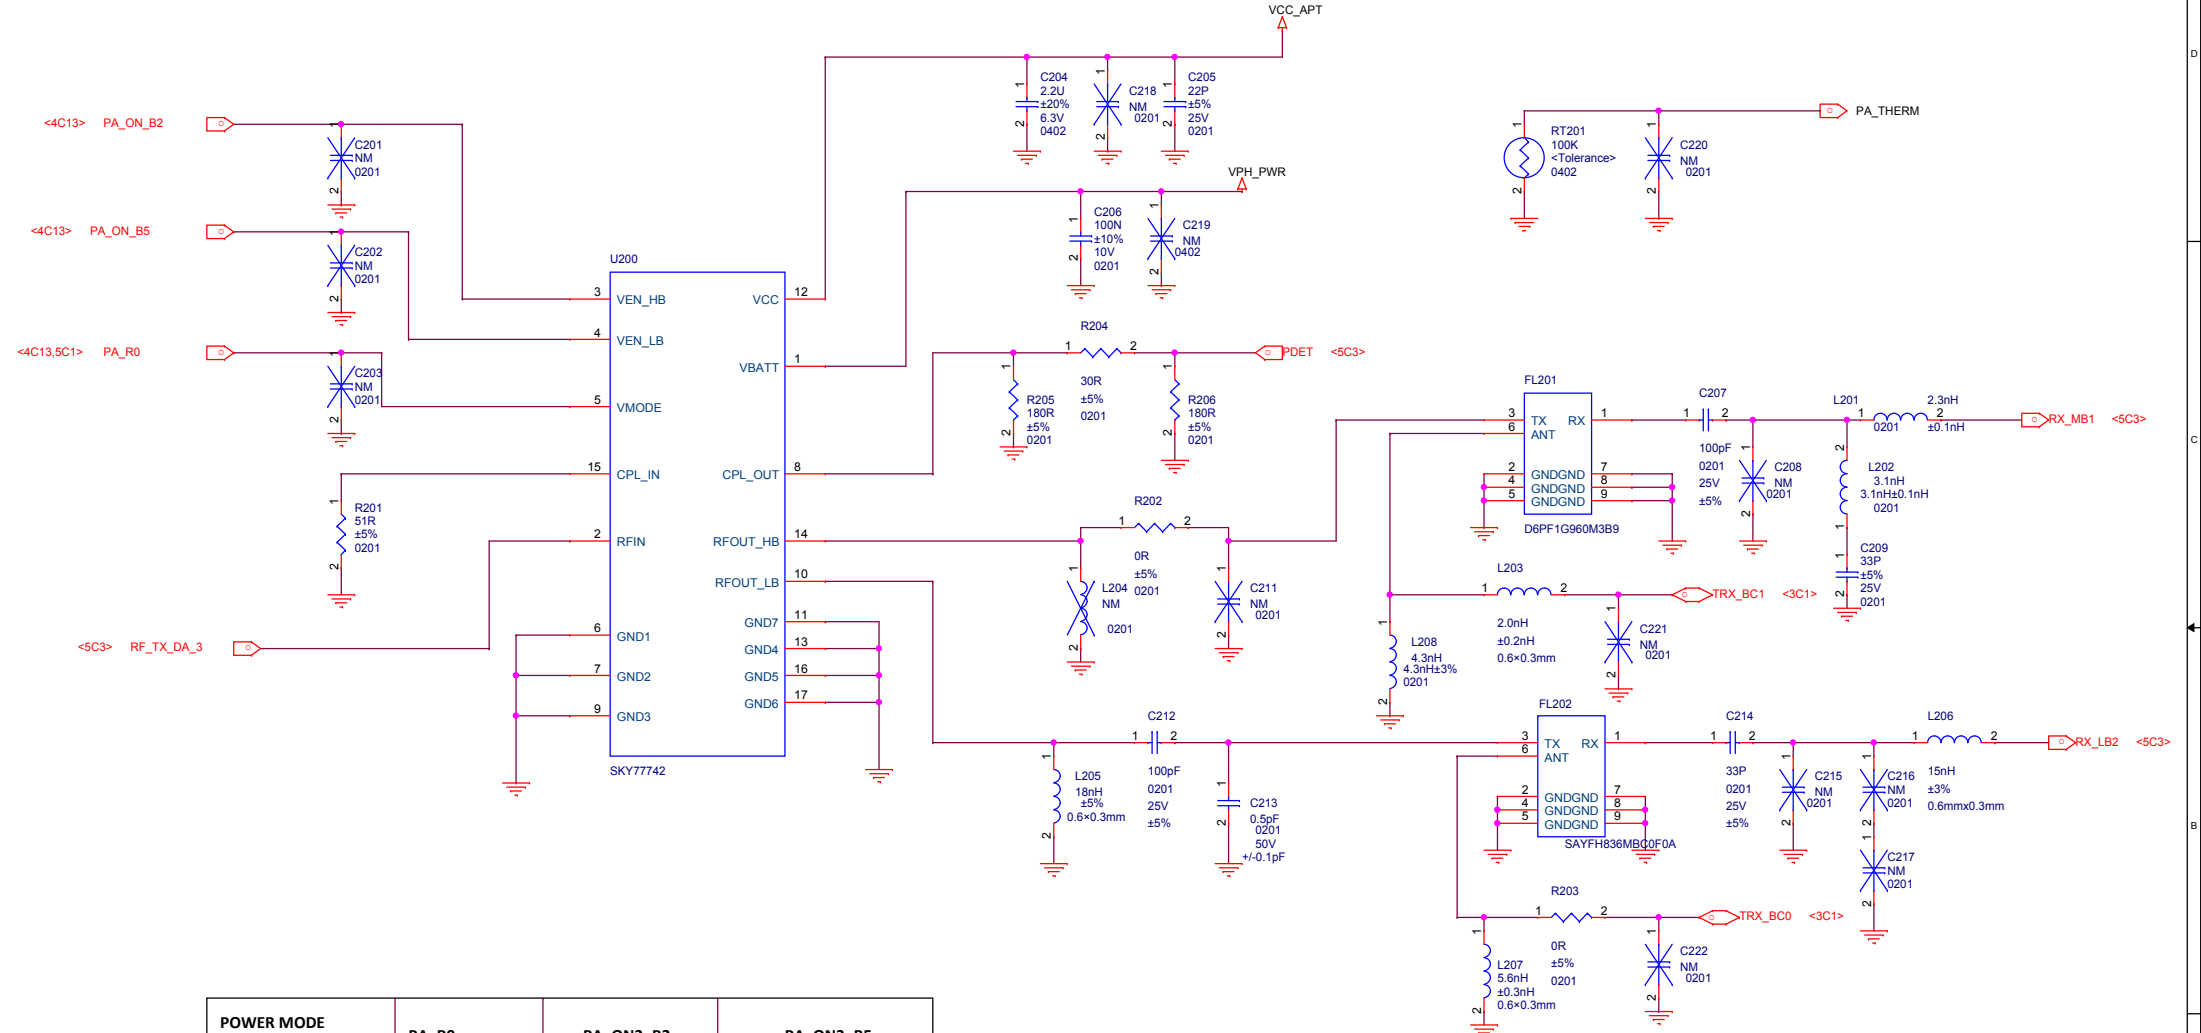



POWER MODE	PA_R0	PA_ON2_B2	PA_ON3_B5
B2 HIGH POWER	L	H	L
B2 LOW POWER	H	H	L
B5 HIGH POWER	L	L	H
B5 LOW POWER	H	L	H
SHUT DOWN	L	L	L

Note: All LNA inputs have DC present. Shunt cap must block DC, and be <= 33pF to guarantee LNA gain settling time.


Title		2013028
Size	Document Number	<Doc>
Date:		Monday, December 30, 2013

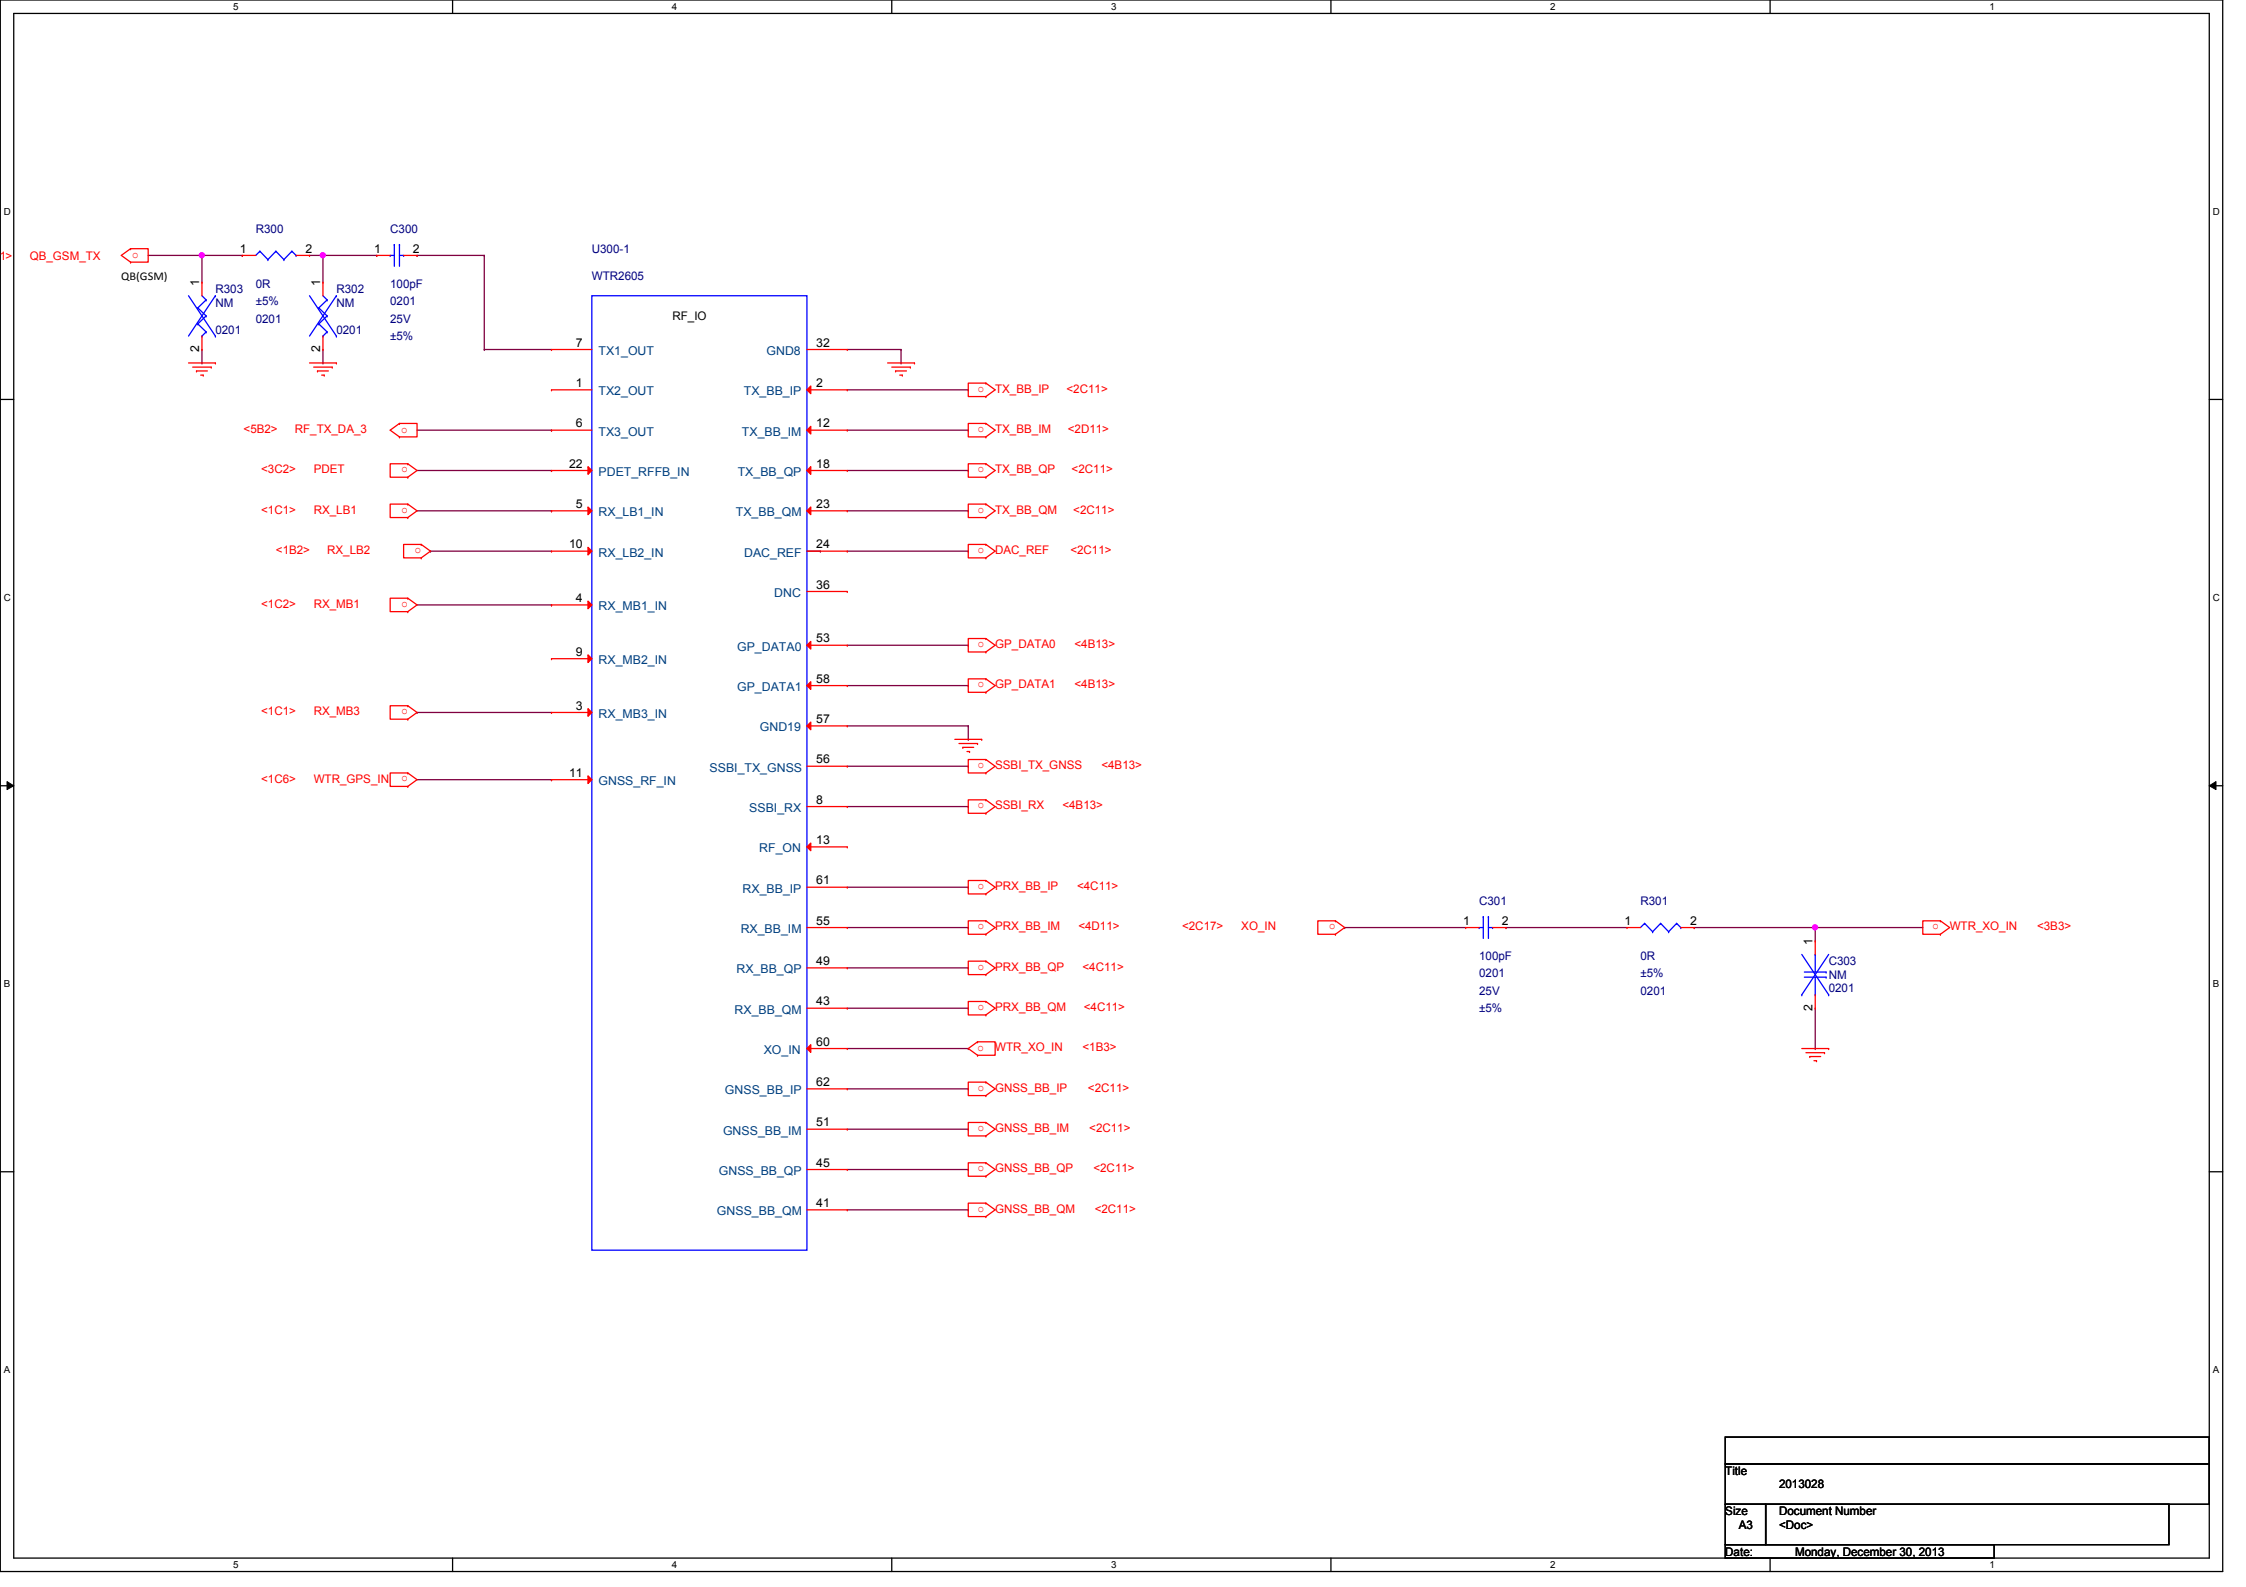

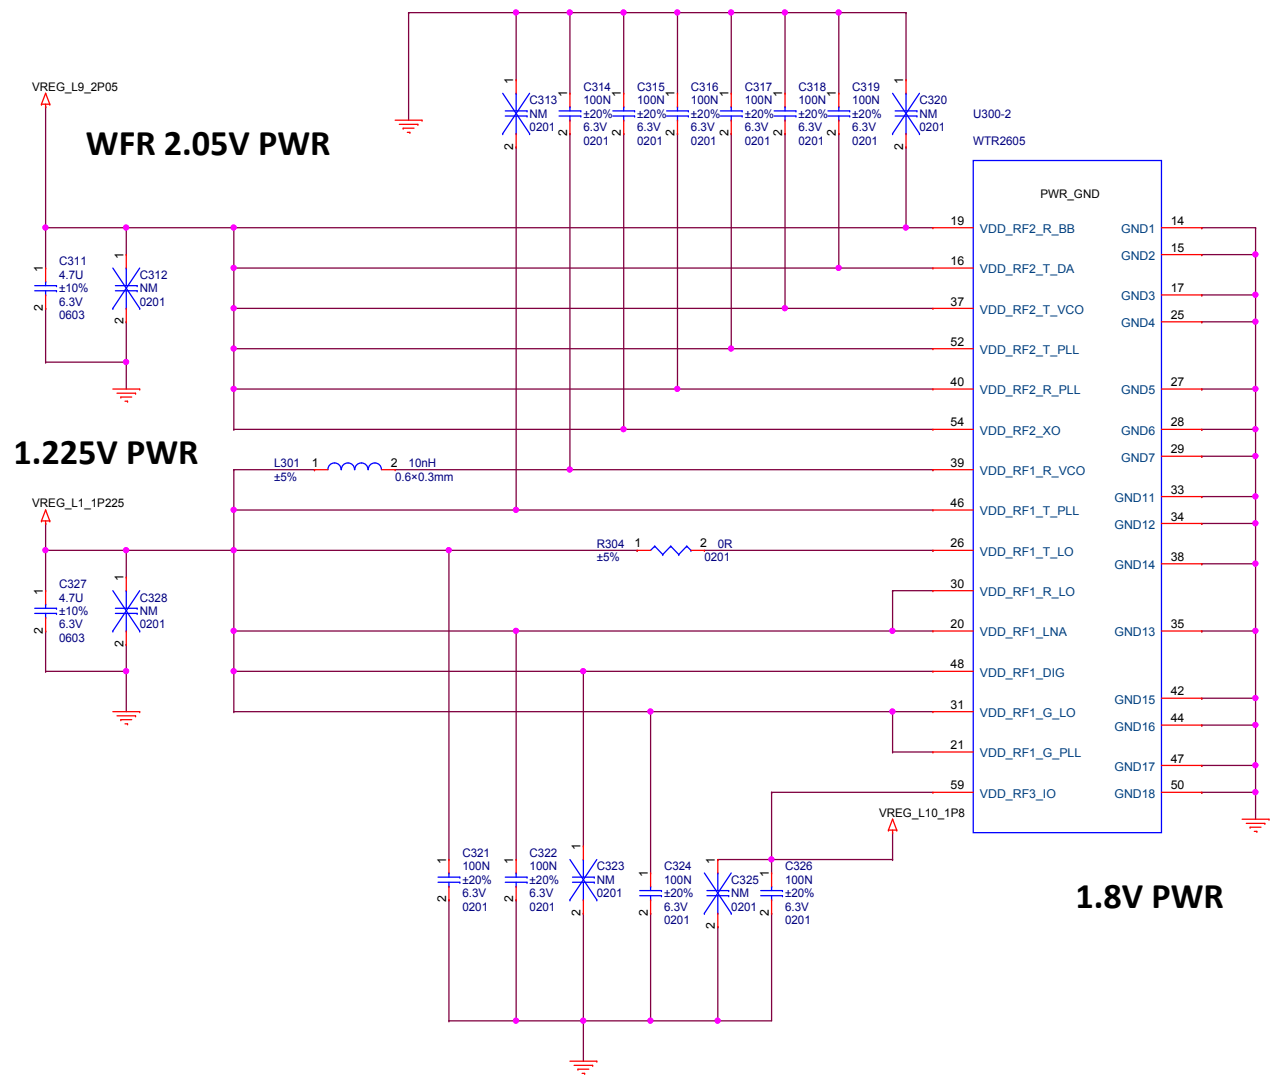



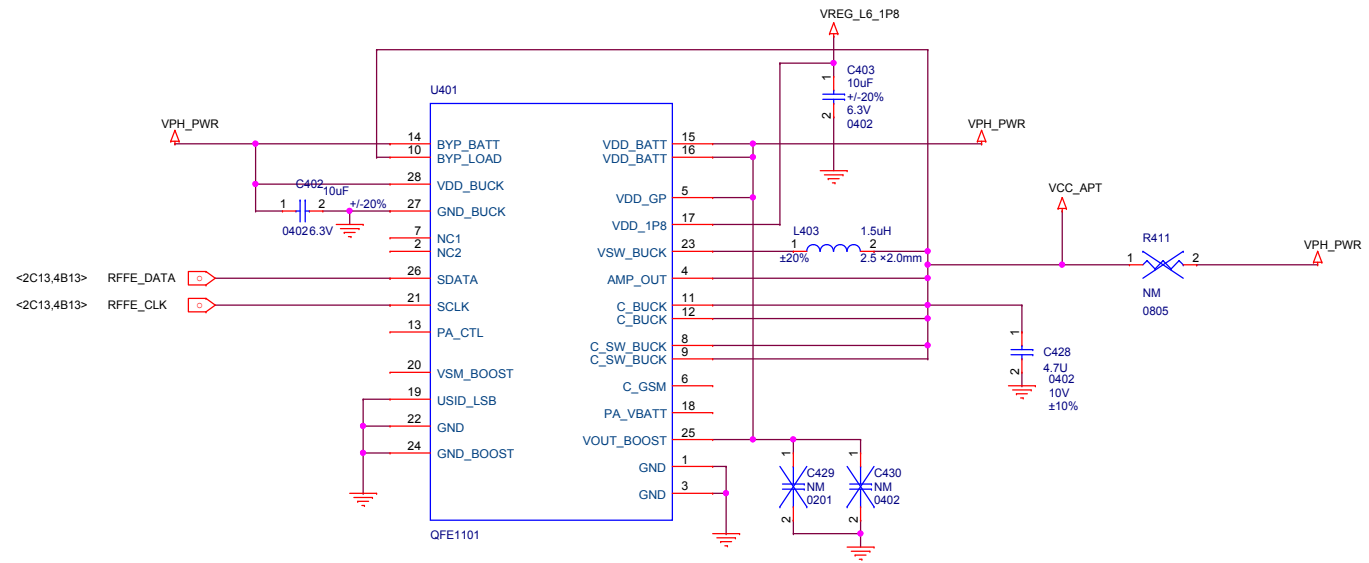


Title	
2013028	
Size	Document Number
A3	<Doc>
Date:	Monday, December 30, 2013

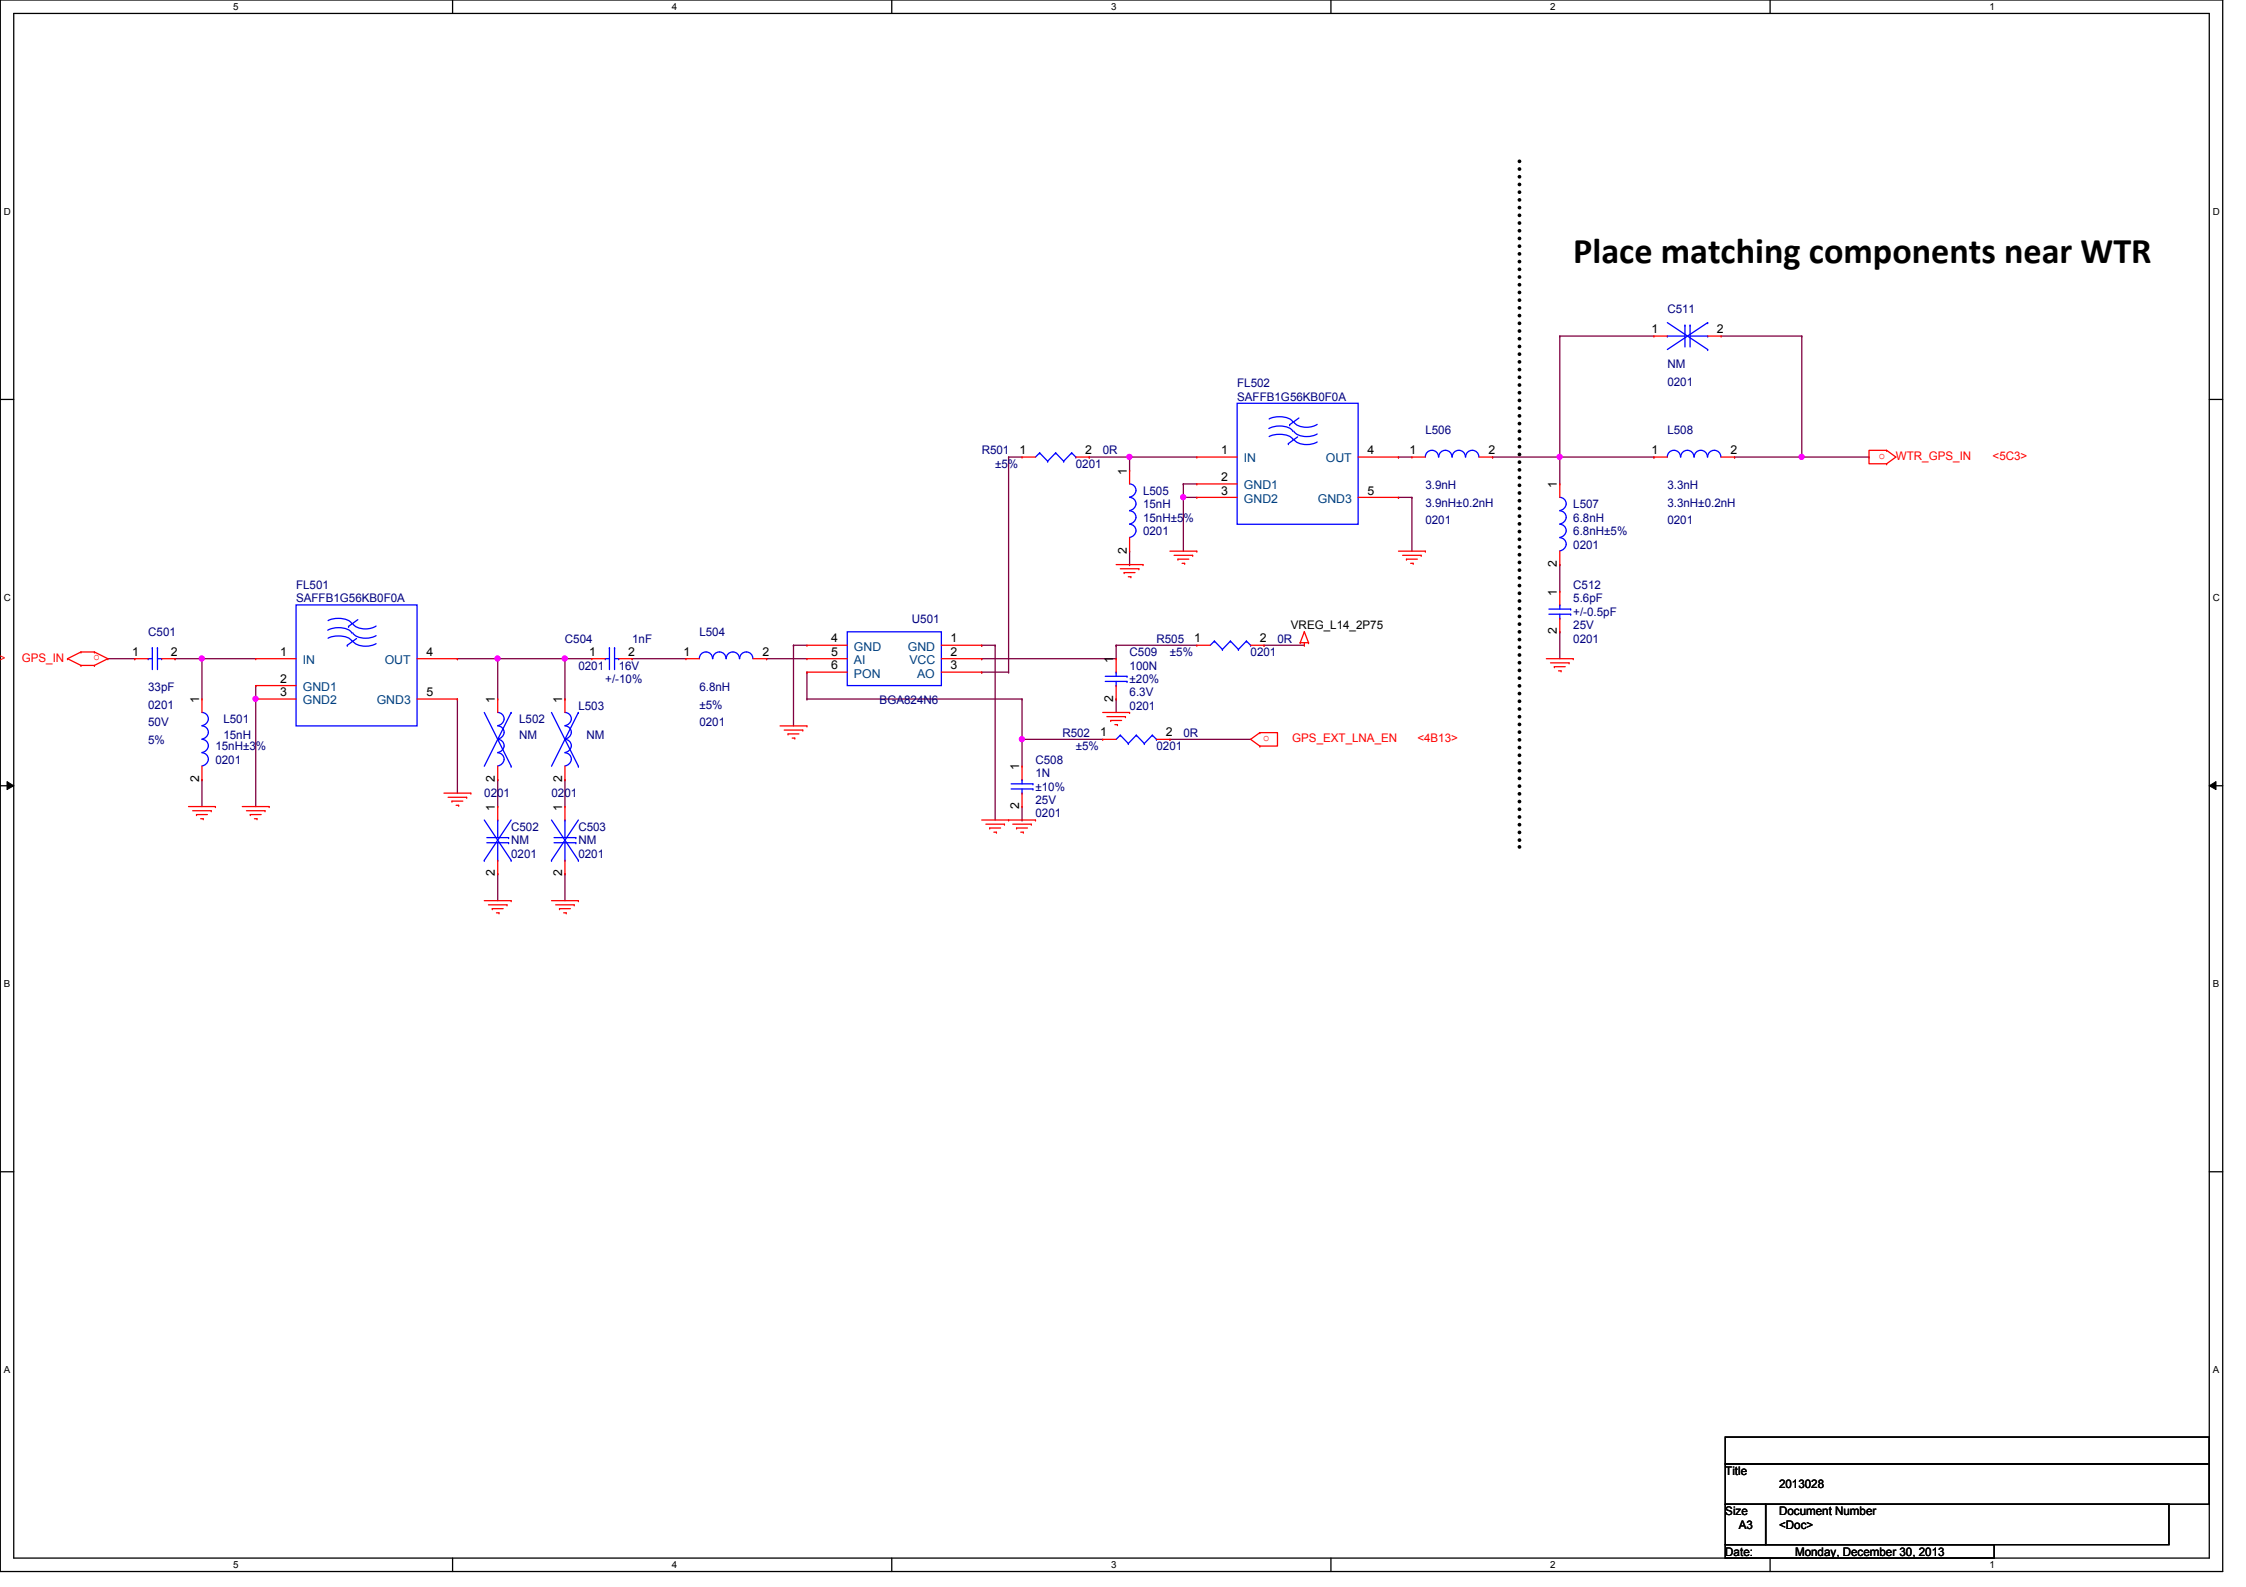



Place matching components near WTR

Title	
2013028	
Size	Document Number
A3	<Doc>
Date:	Monday, December 30, 2013

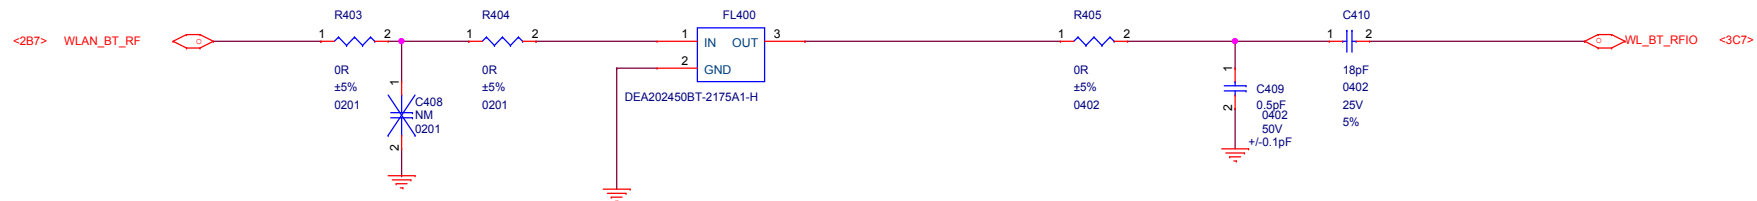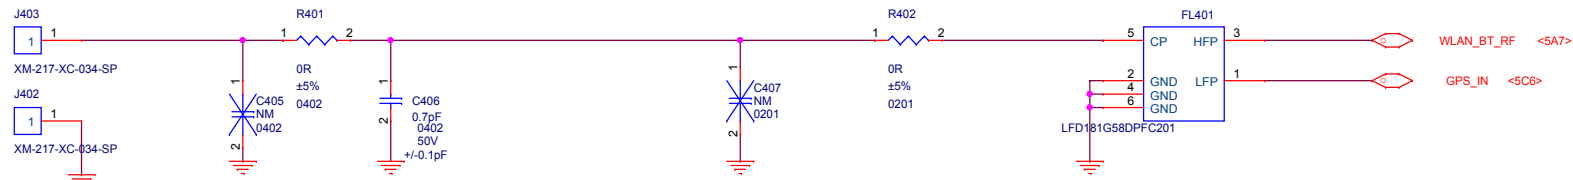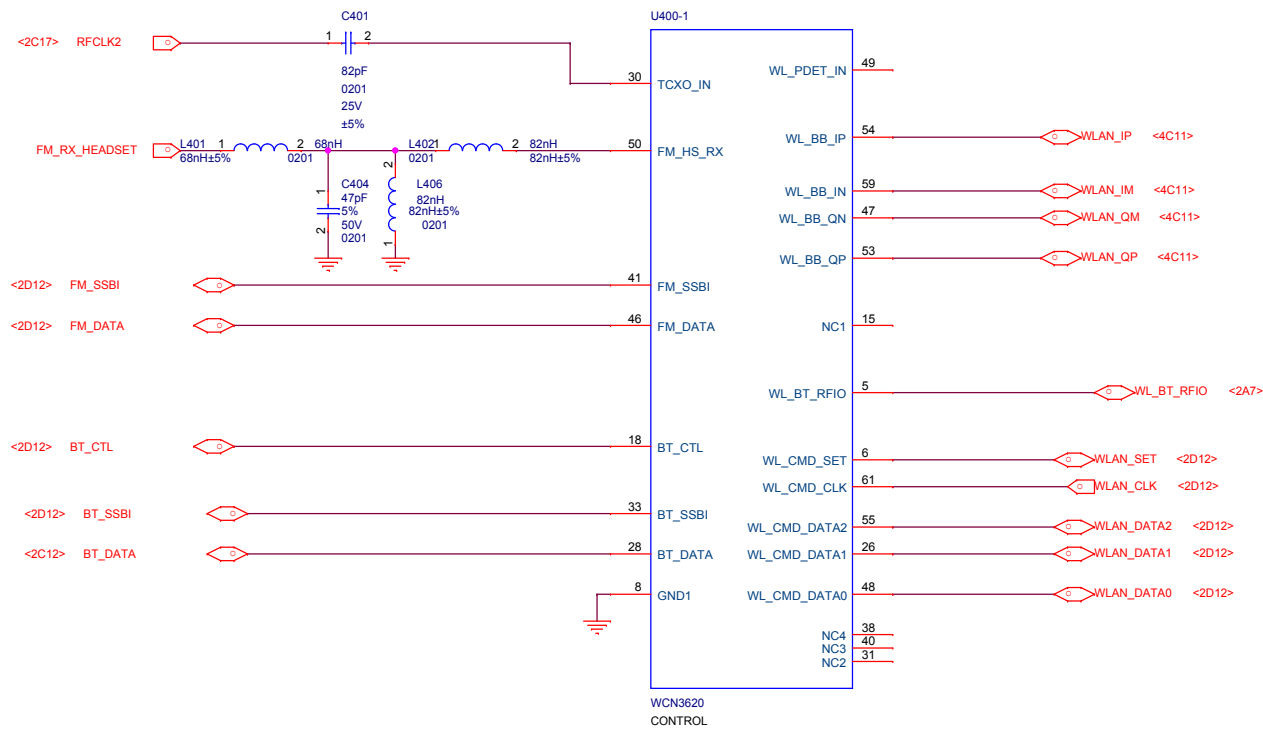


Title	
2013028	
Size	Document Number
A3	<Doc>
Date: Monday, December 30, 2013	

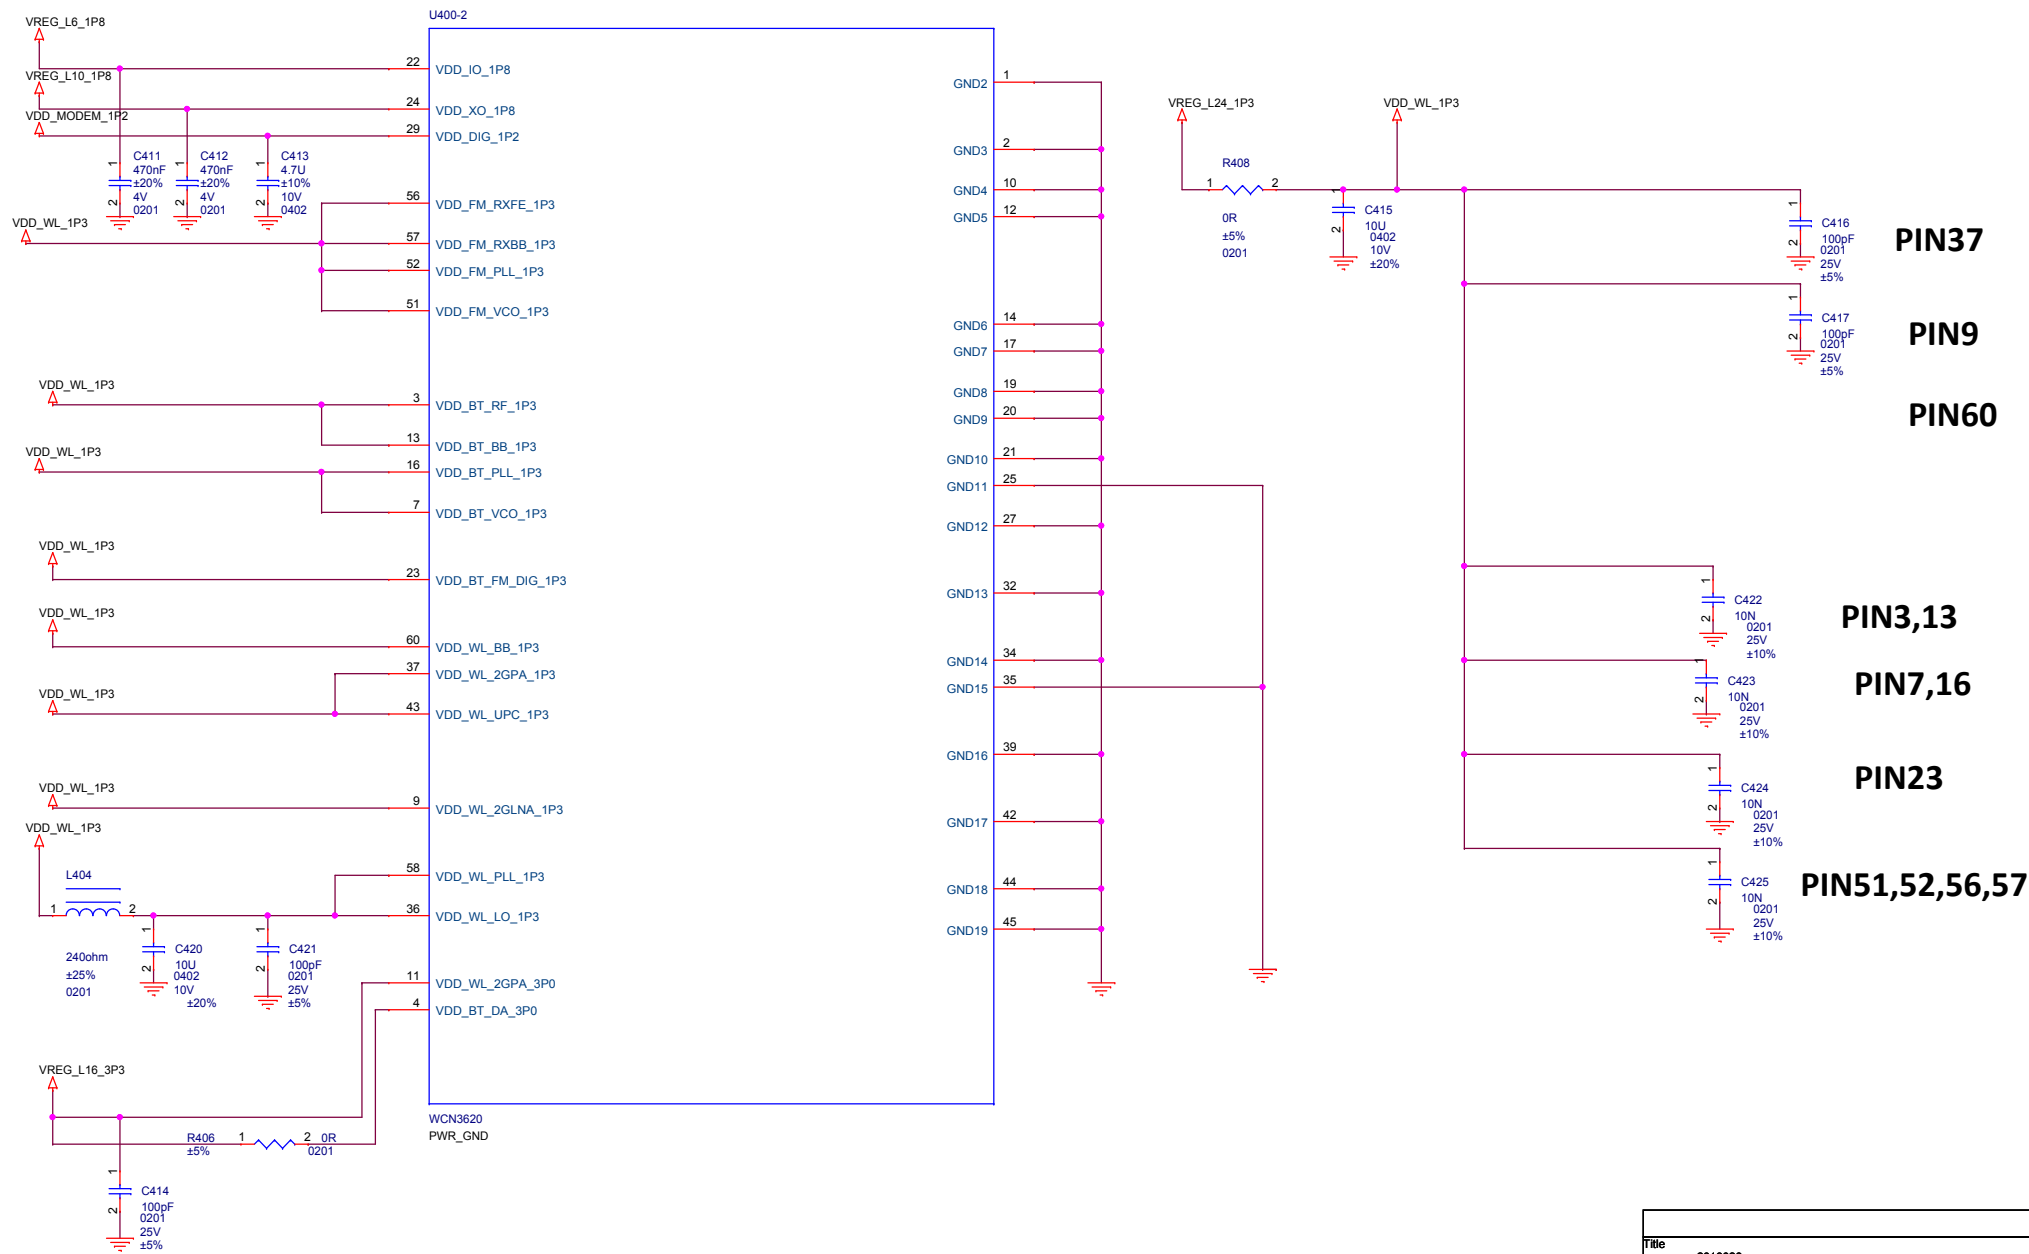


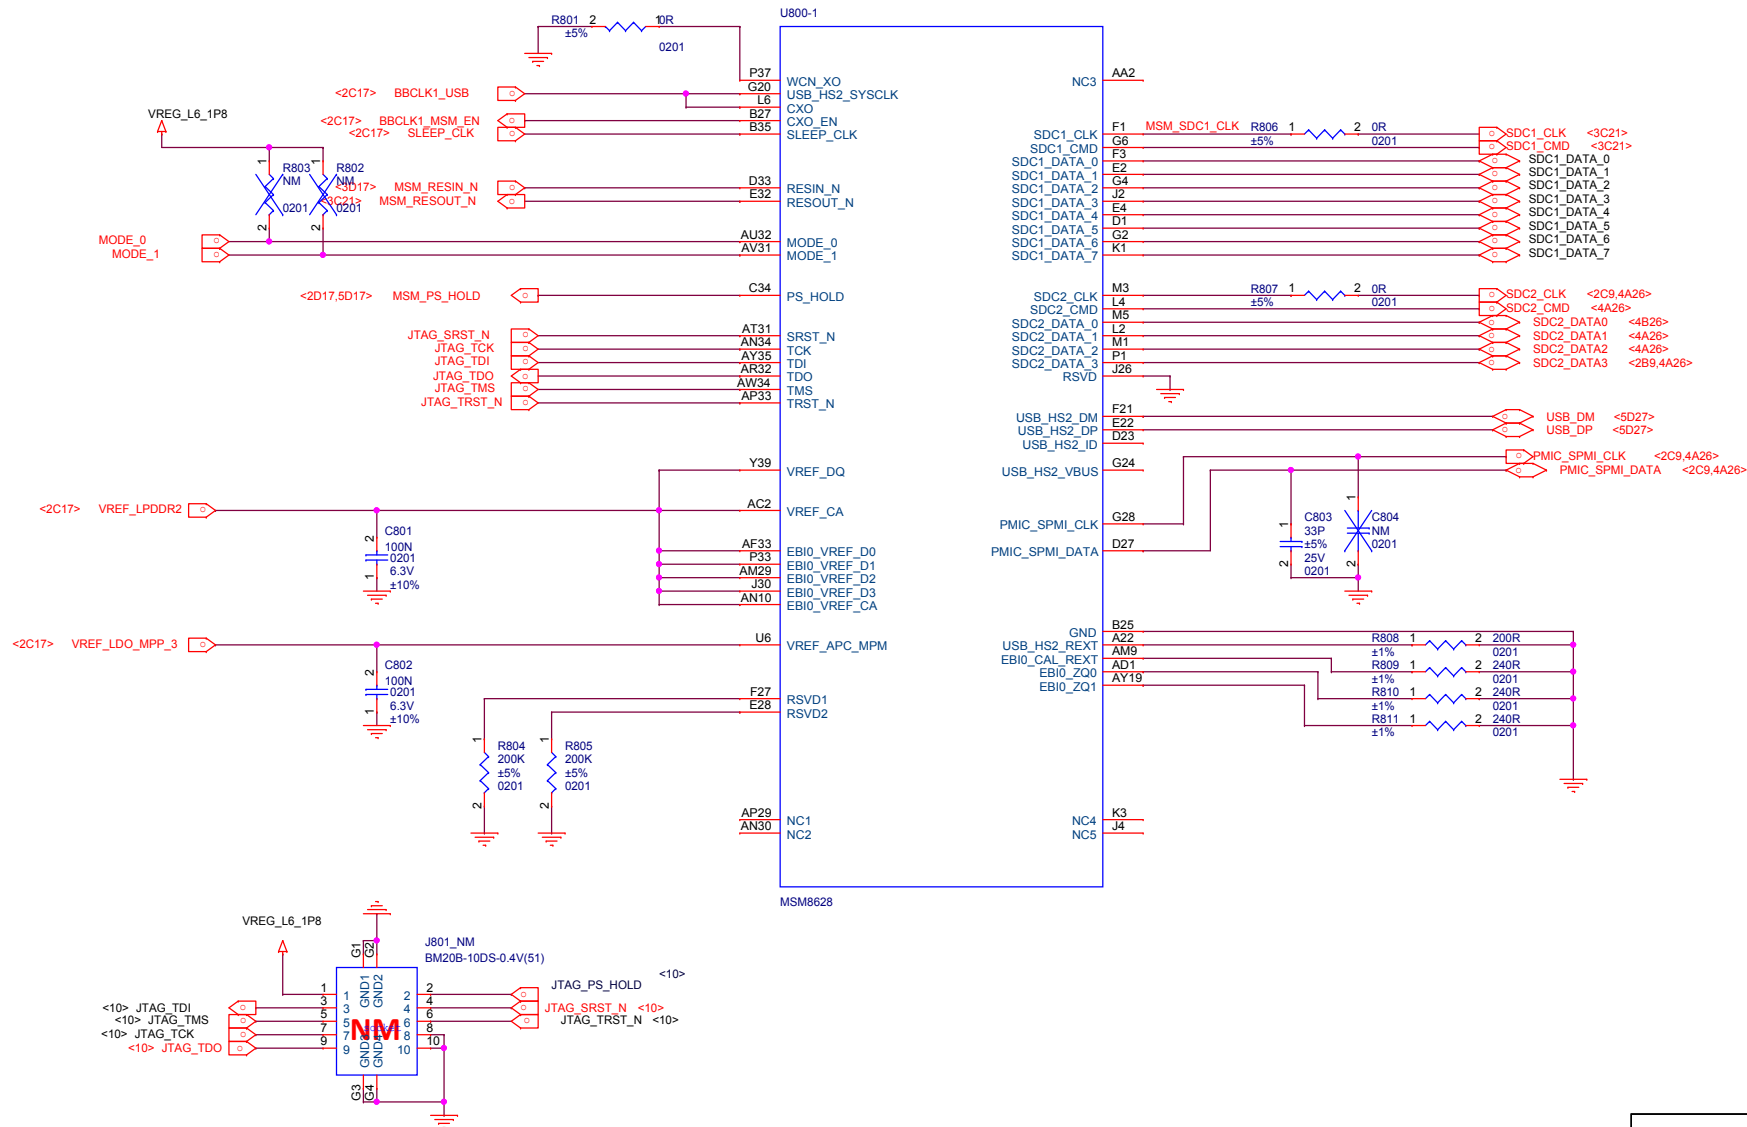



Title		
2013028		
Size	Document Number	Rev
A3	<Doc>	0.1
Date:	Monday, December 30, 2013	Sheet 9 of 28


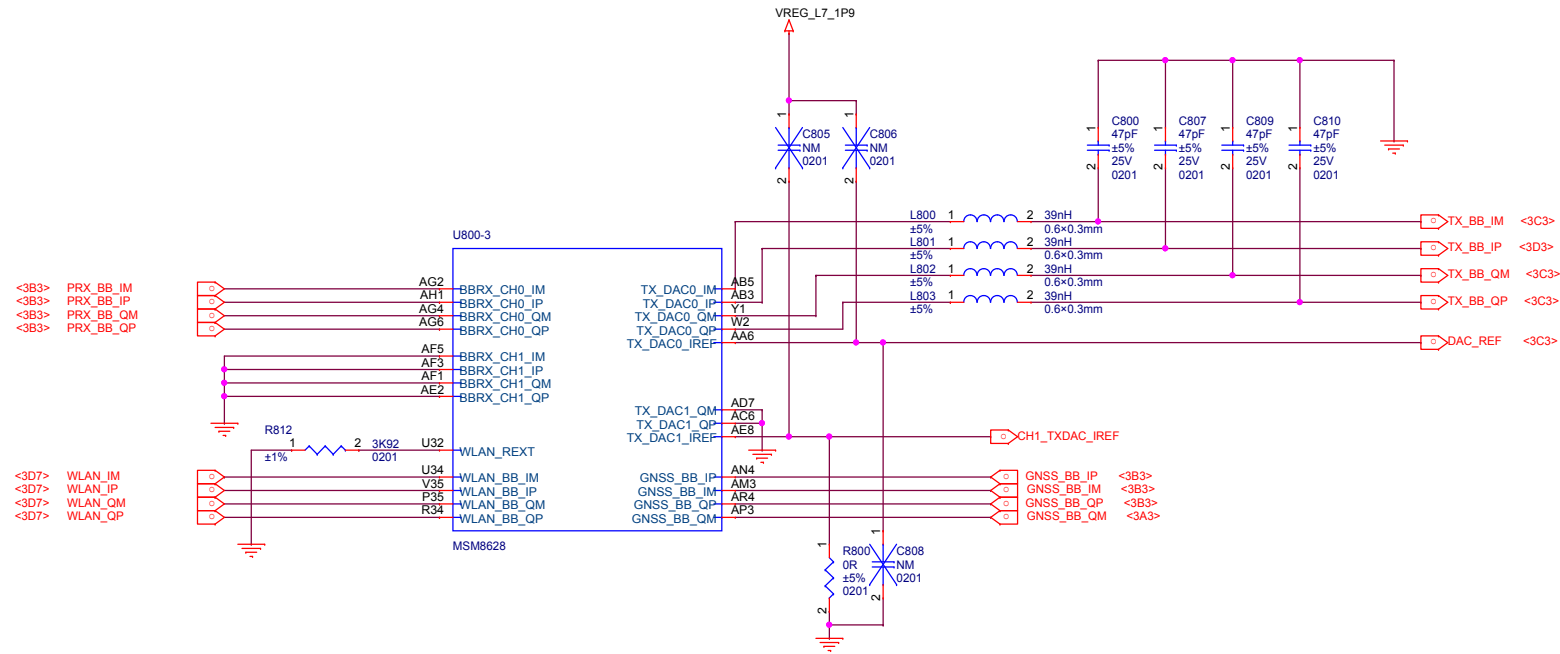



Title			
2013028_MSM8628_RF			
Size A3	Document Number		Rev 0.1
	<Doc>		
Date: Monday, December 30, 2013		Sheet 11 of 28	


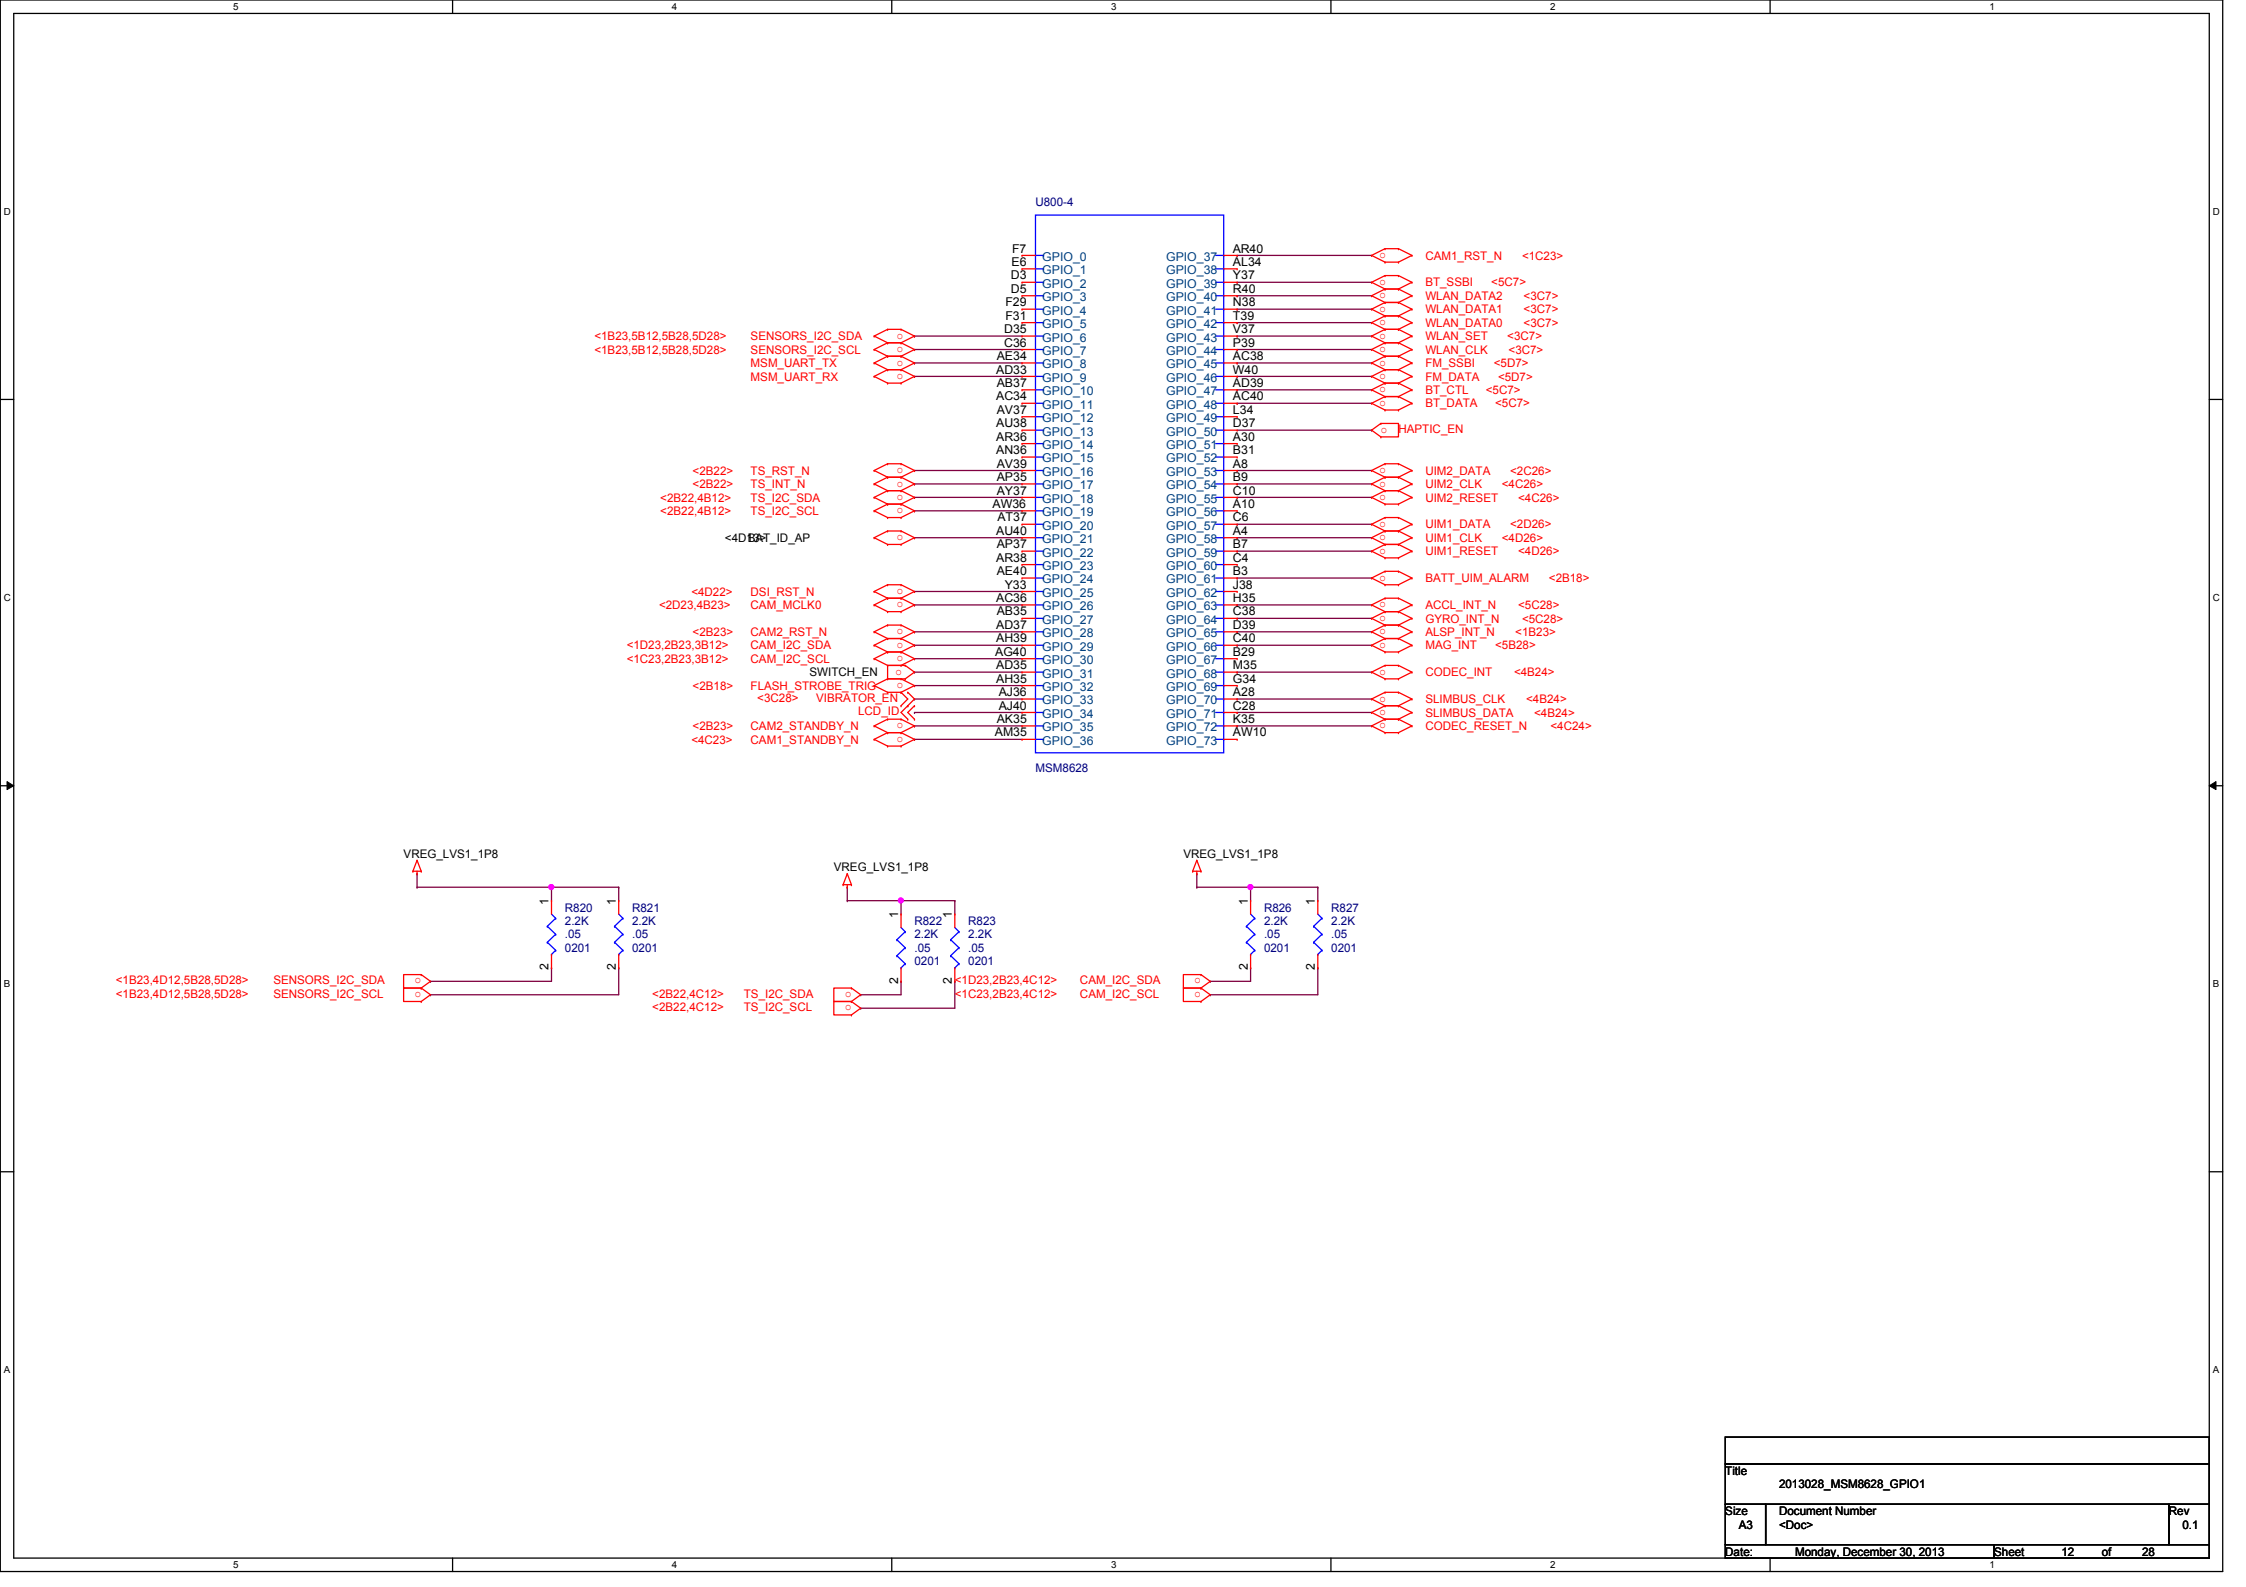


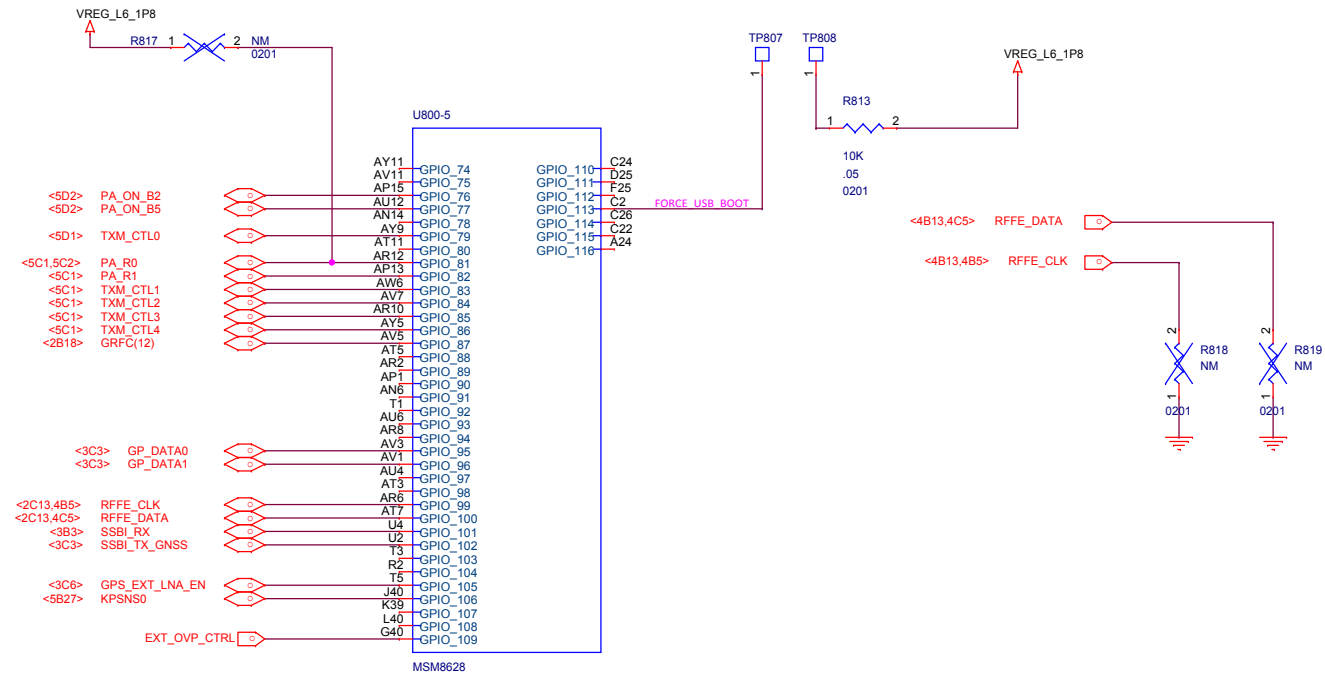

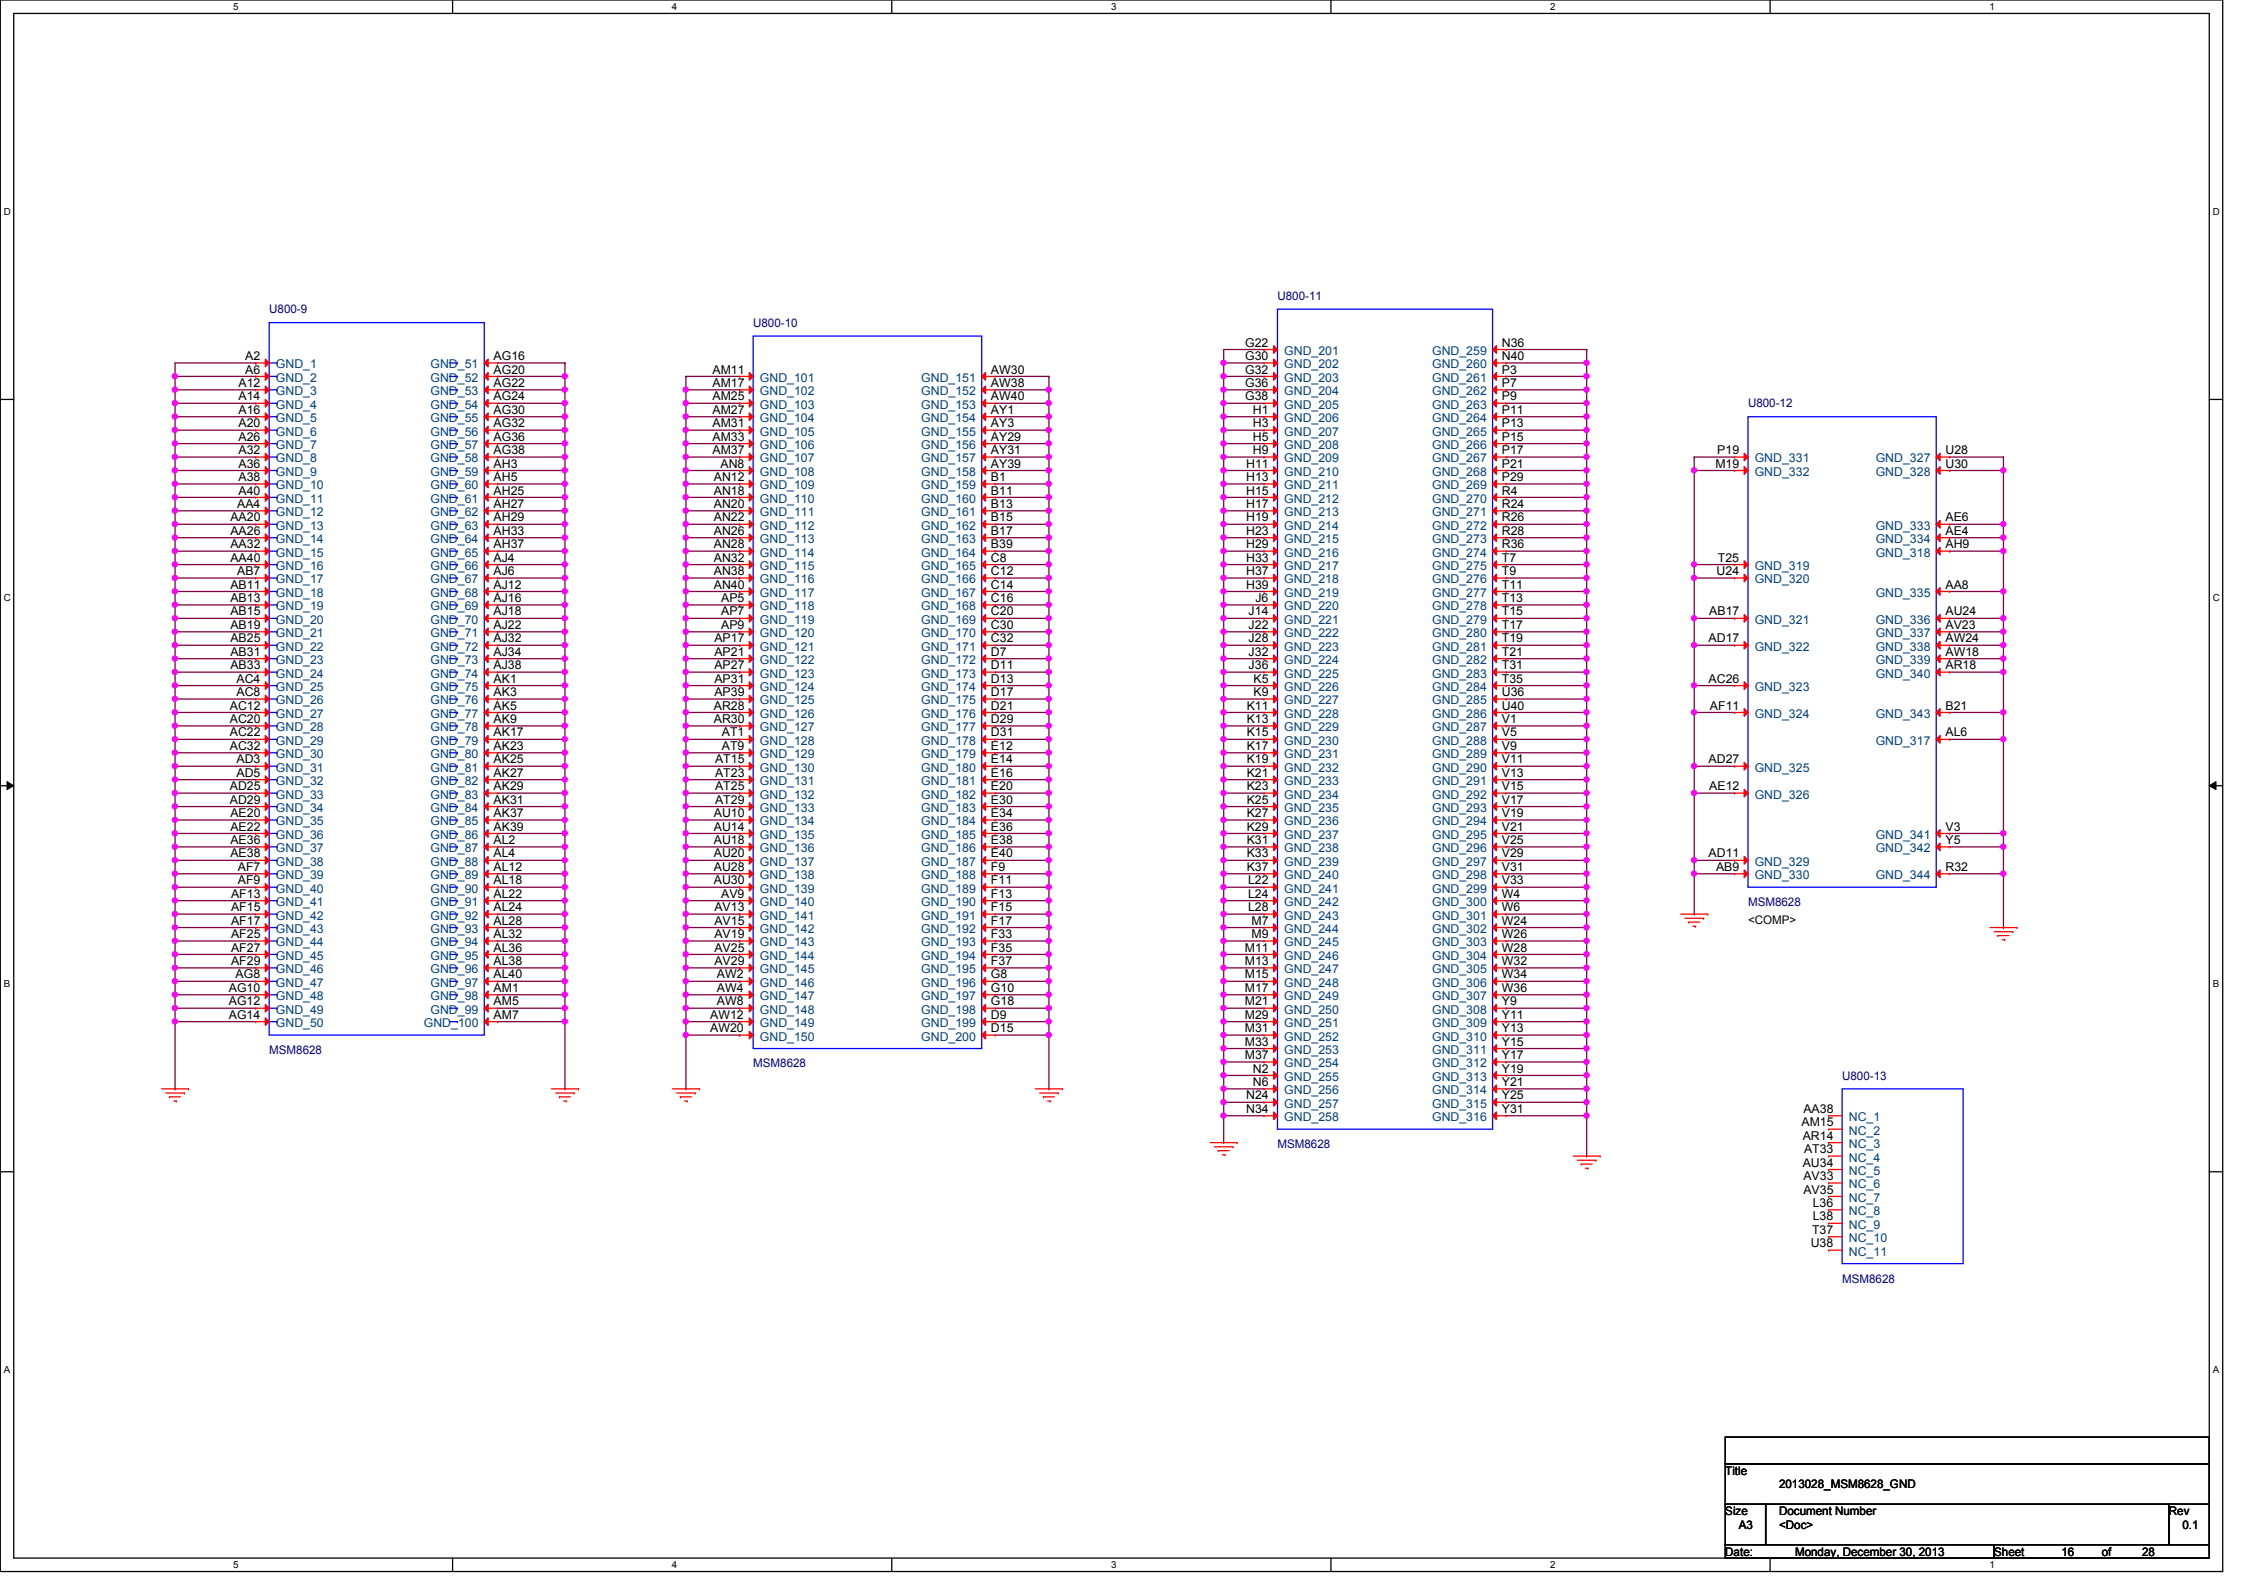


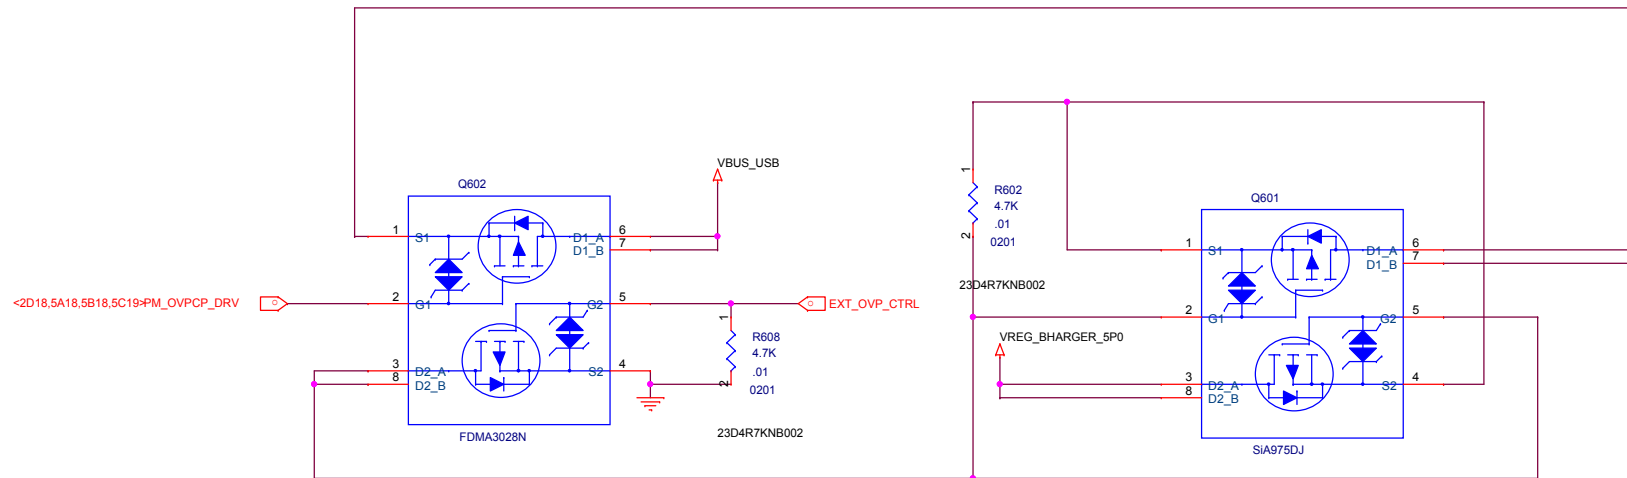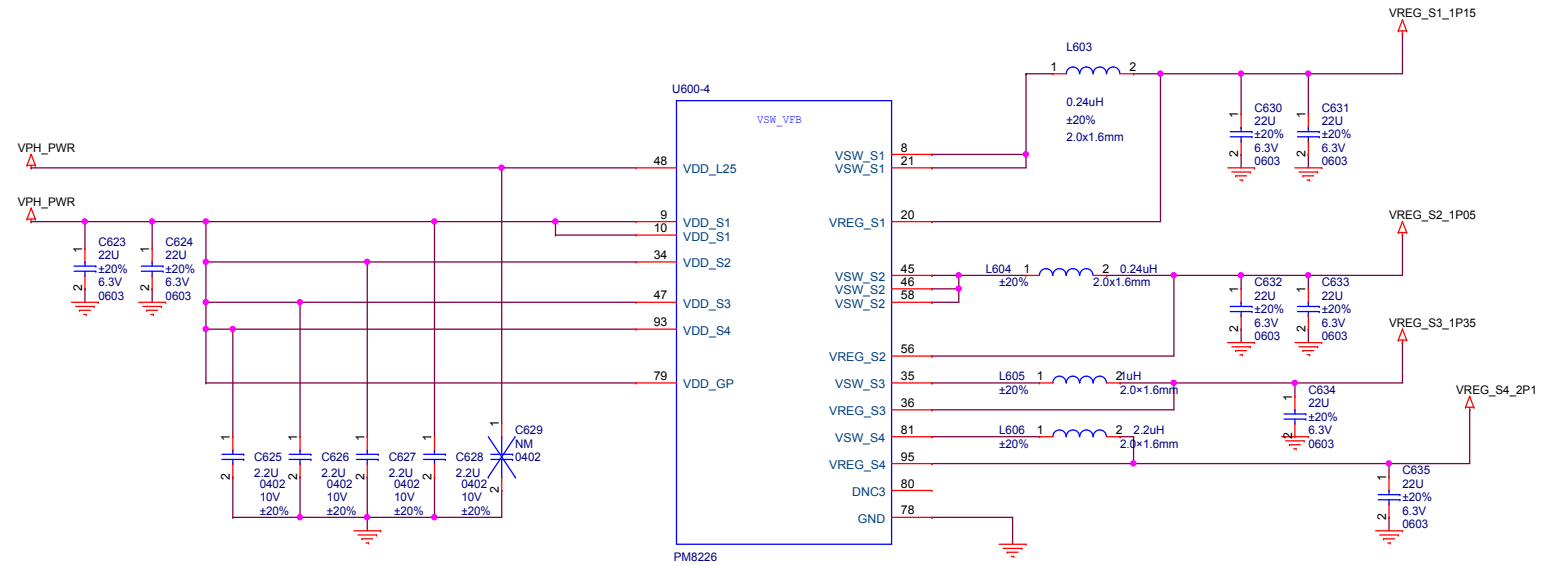

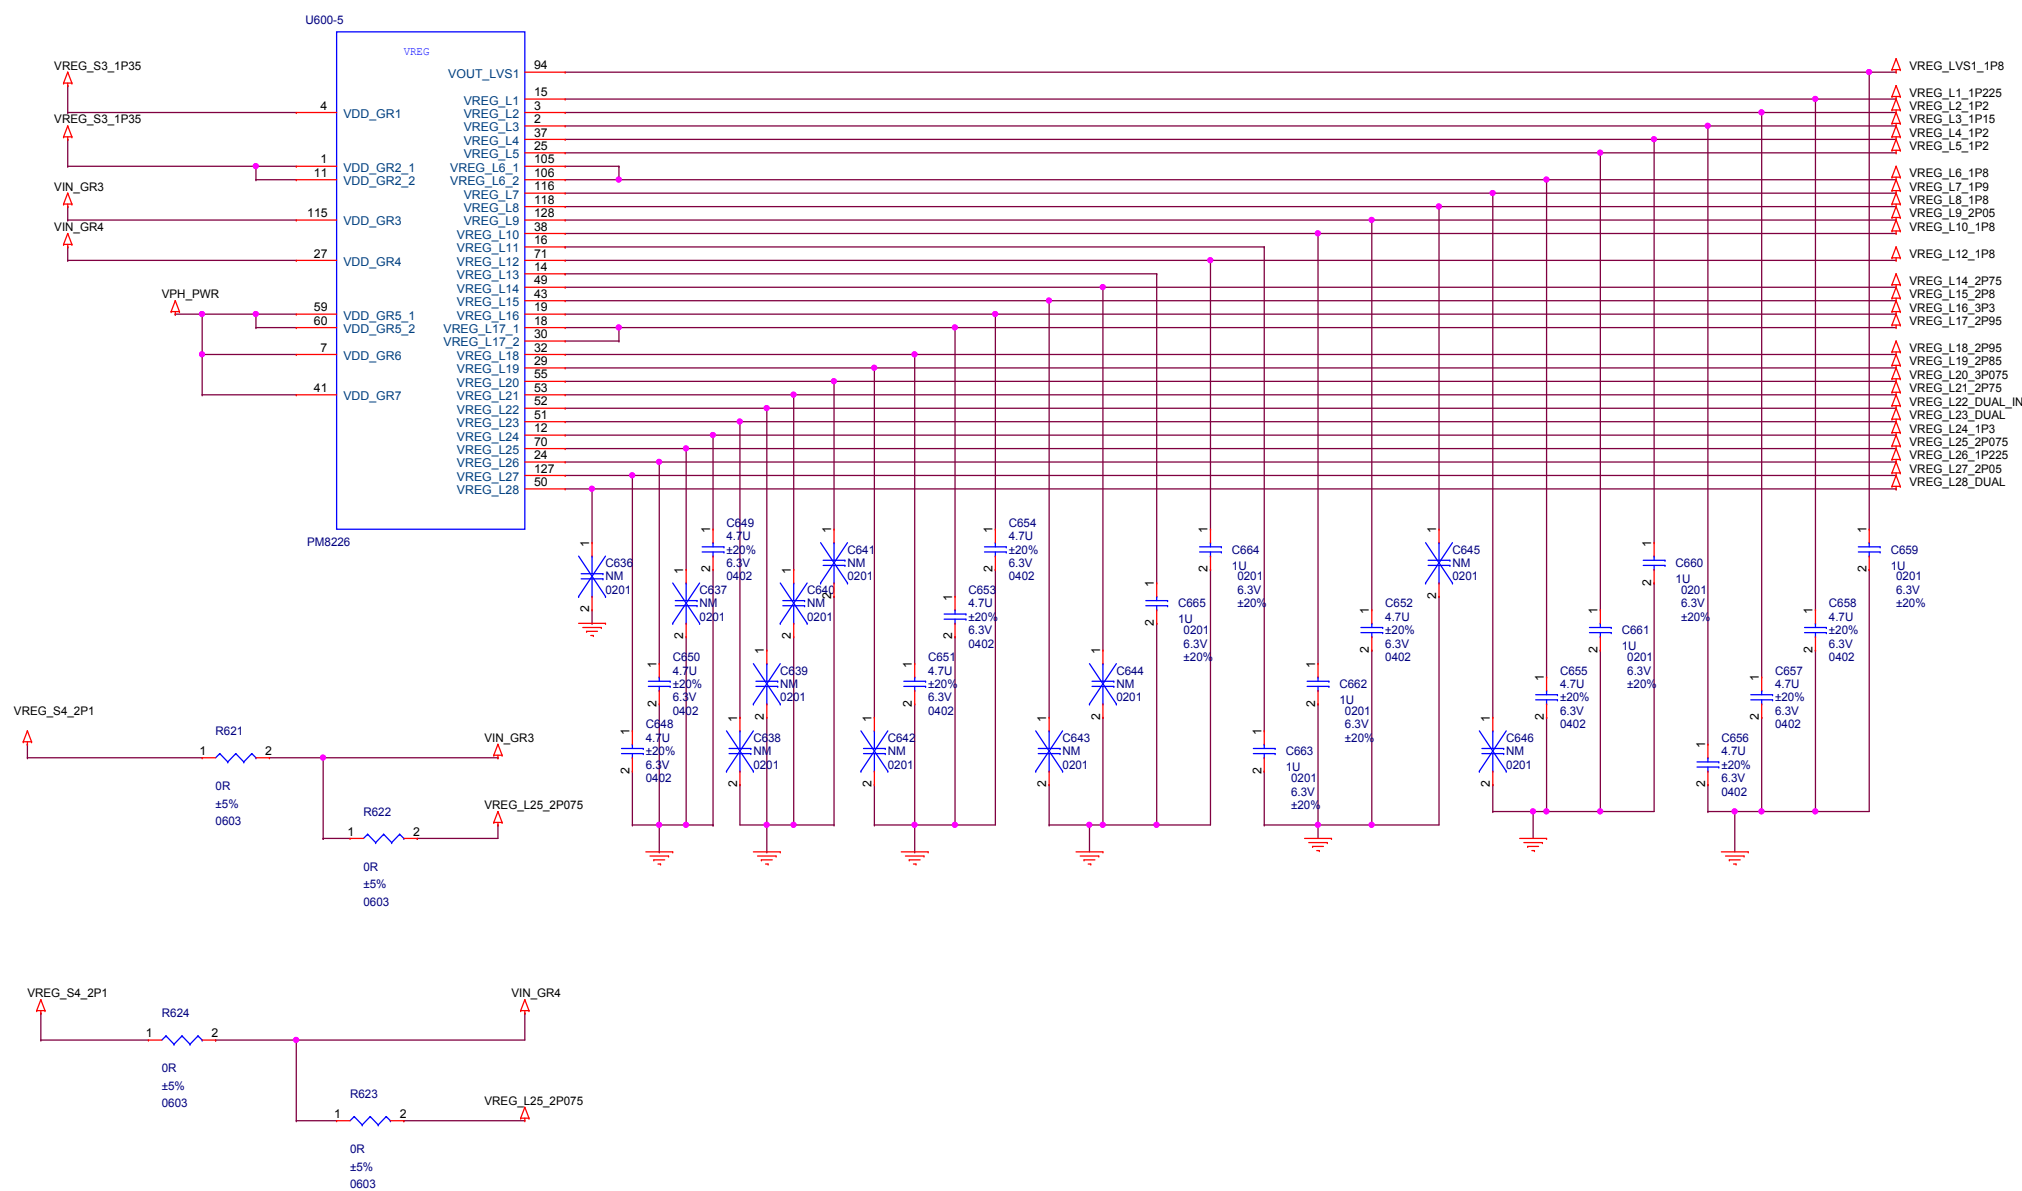


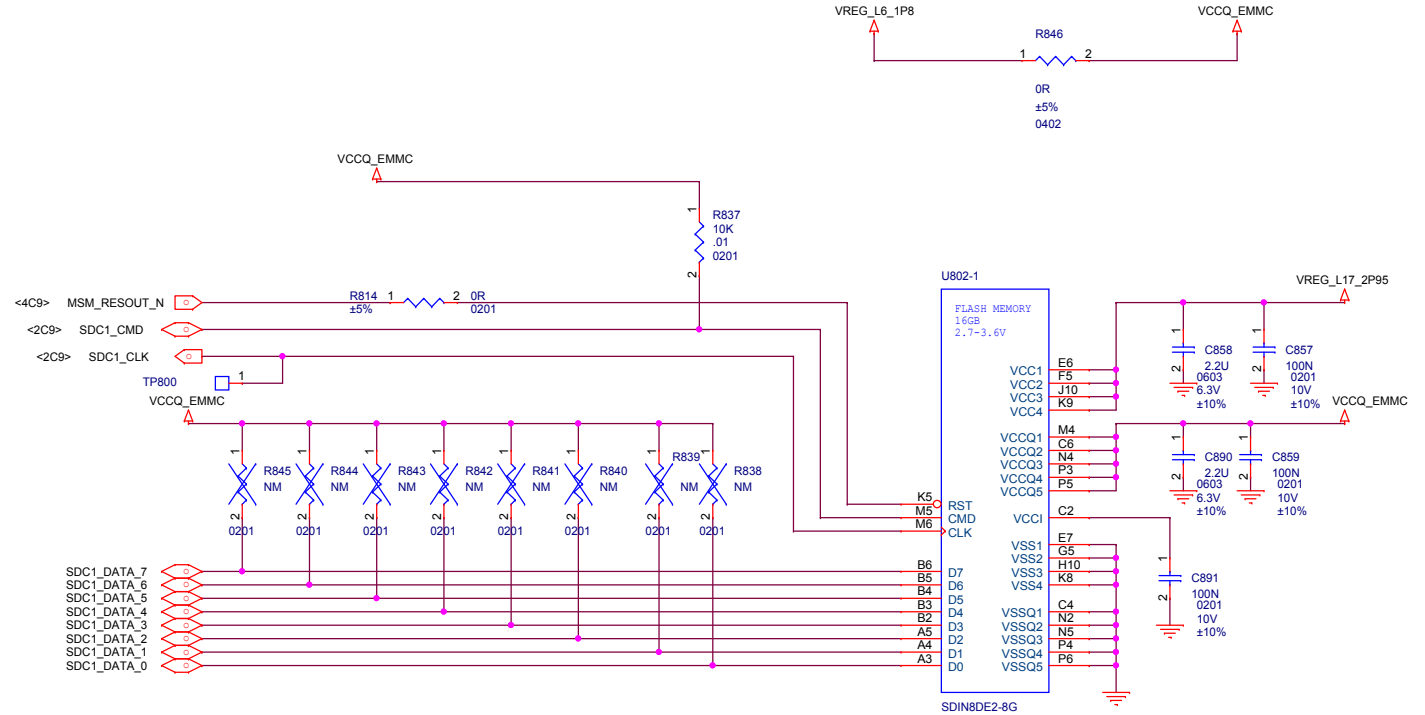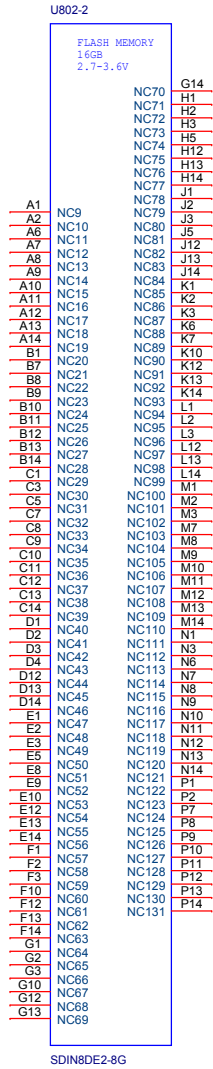

<3C10> MIPI_DSI0_CLK_P
<3C10> MIPI_DSI0_CLK_M
<3C10> MIPI_DSI0_DATA2_P
<3C10> MIPI_DSI0_DATA2_M



<2D22,4D22> MIPI_DSI0_CLK_P_N
<2D22,4D22> MIPI_DSI0_CLK_M_N
<2D22,4D22> MIPI_DSI0_DATA2_P_N
<2D22,4D22> MIPI_DSI0_DATA2_M_N



Main LCM


<4D22> MIPI_DSI0_DATA2_P_N
<2D22,4D22> MIPI_DSI0_CLK_M_N
<2D22,4C22> MIPI_DSI0_DATA1_P_N
<2D22,4C22> MIPI_DSI0_DATA0_M_N

<4C12> DSI_RST_N
<4A18> WLED_DRV_N



P0.1 CR1100, CR1103
不贴

CTP


<3C10> MIPI_DSI0_DATA0_P
<3C10> MIPI_DSI0_DATA0_M
<3C10> MIPI_DSI0_DATA1_P
<3C10> MIPI_DSI0_DATA1_M



<2D22,4D22> MIPI_DSI0_DATA0_P_N
<2D22,4D22> MIPI_DSI0_DATA0_M_N
<2D22,4D22> MIPI_DSI0_DATA1_P_N
<2D22,4D22> MIPI_DSI0_DATA1_M_N



<4C12> TS_RST_N
<4C12> TS_INT_N
<4B12,4C12> TS_I2C_SCL
<4B12,4C12> TS_I2C_SDA

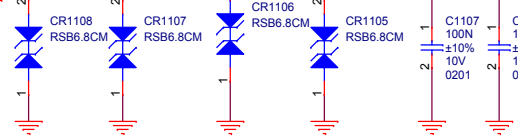


I2C ID
0xBA (power on @INT=low)
0x28 (power on @INT=high)

Sensor ID (identify different TP module)
OPT1/OPT2 need to connect to TP
(please refer to Goodix design notice)


Title		2013028_LCD_CTP
Size	Document Number	<Doc>
A3	<Doc>	Rev
Date:	Monday, December 30, 2013	Sheet 22 of 28

Main Camera

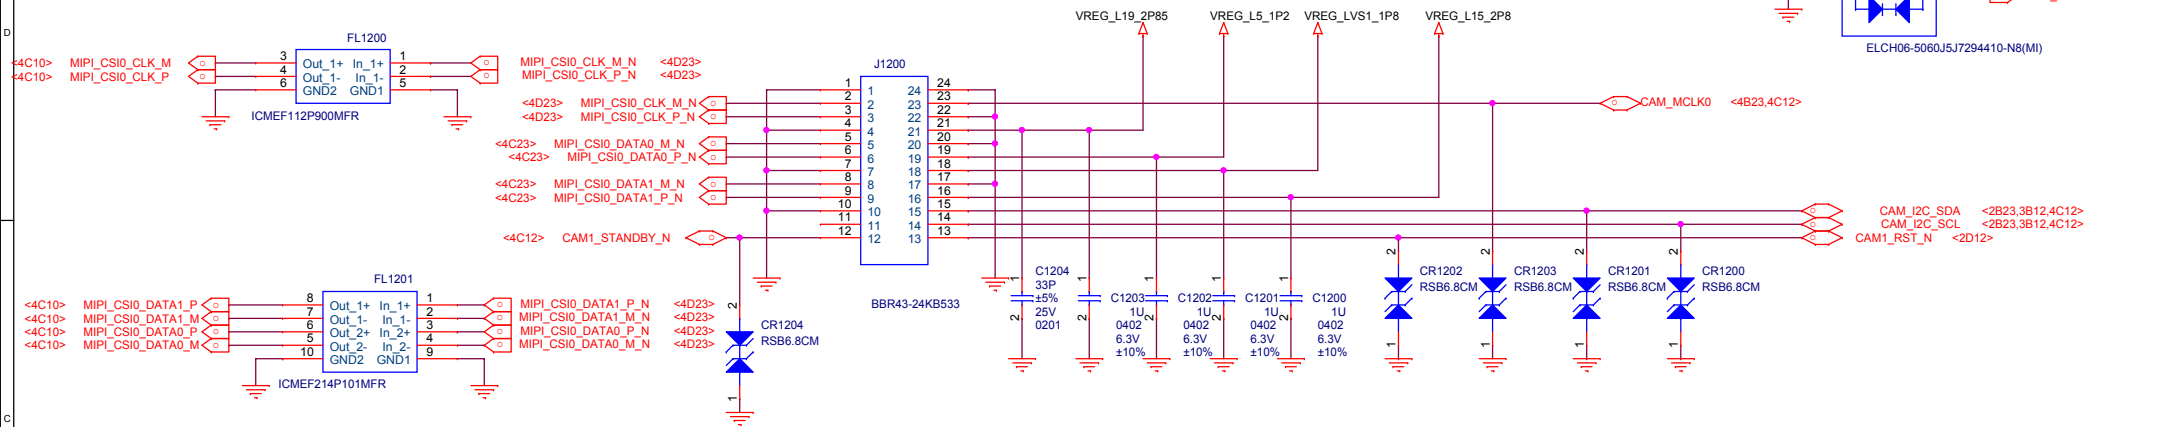


Sub Camera

ALS & PS Sensor

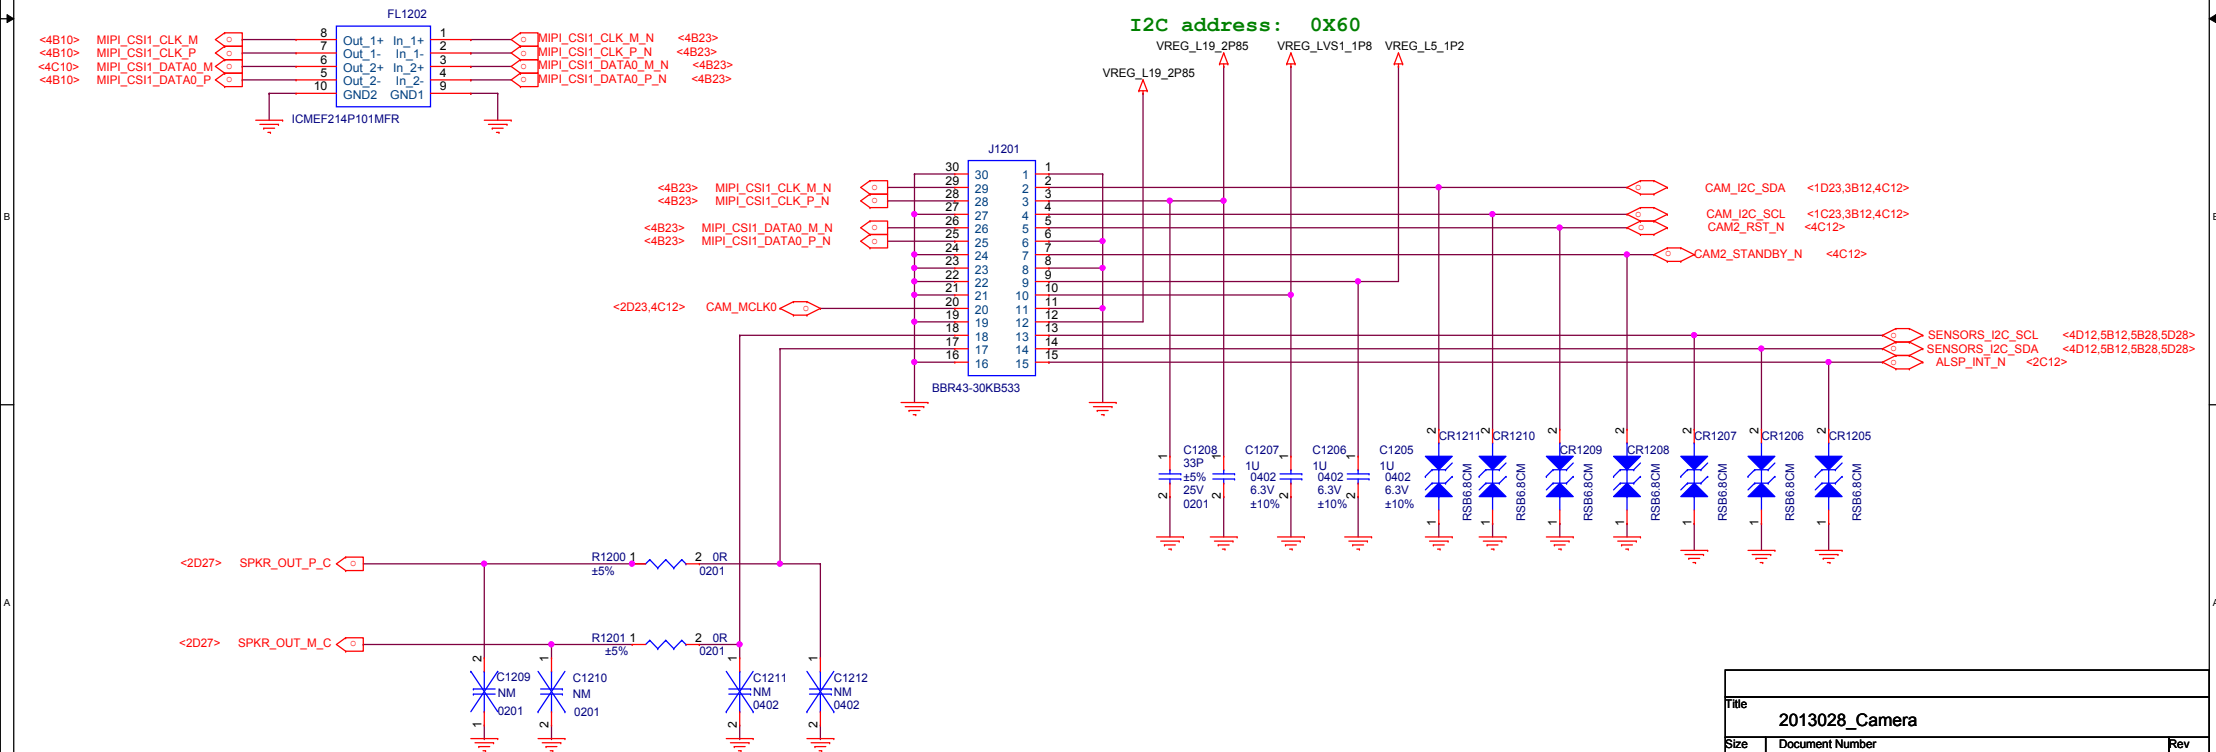


Title		
2013028_Camera		
Size	Document Number	Rev
A3	<Doc>	<RevCode>
Date:	Monday, December 30, 2013	Sheet 23 of 28




Receiver



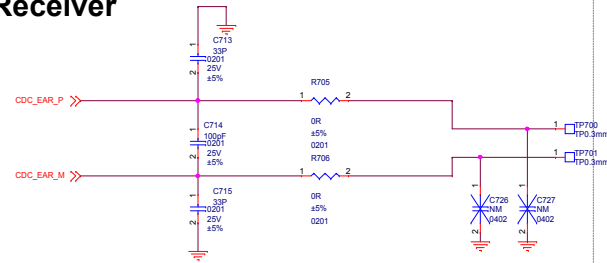


Earphone Audio

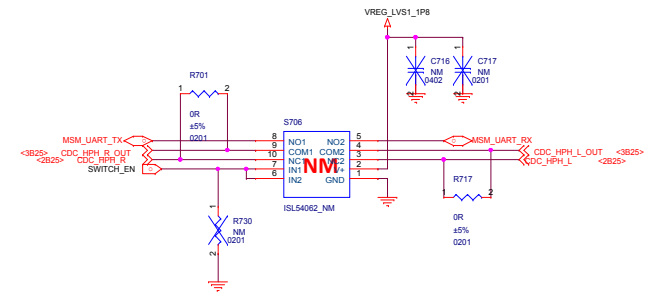


Handset Microphone

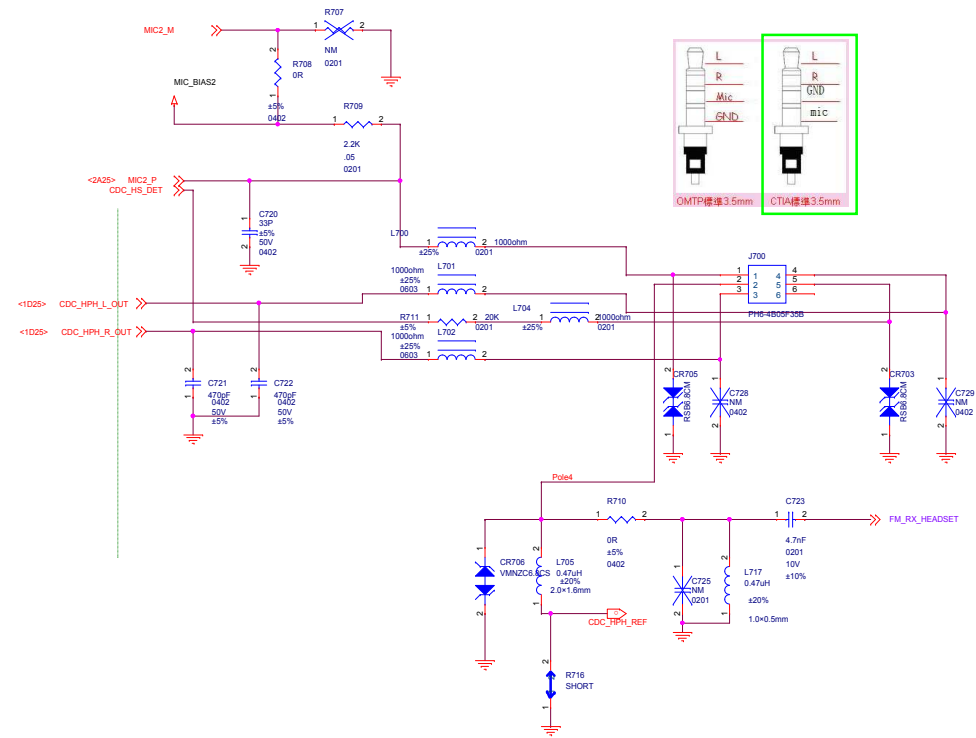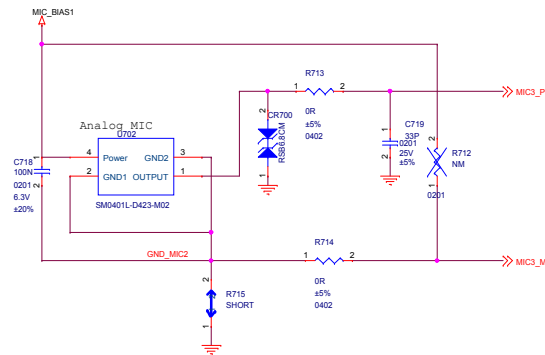

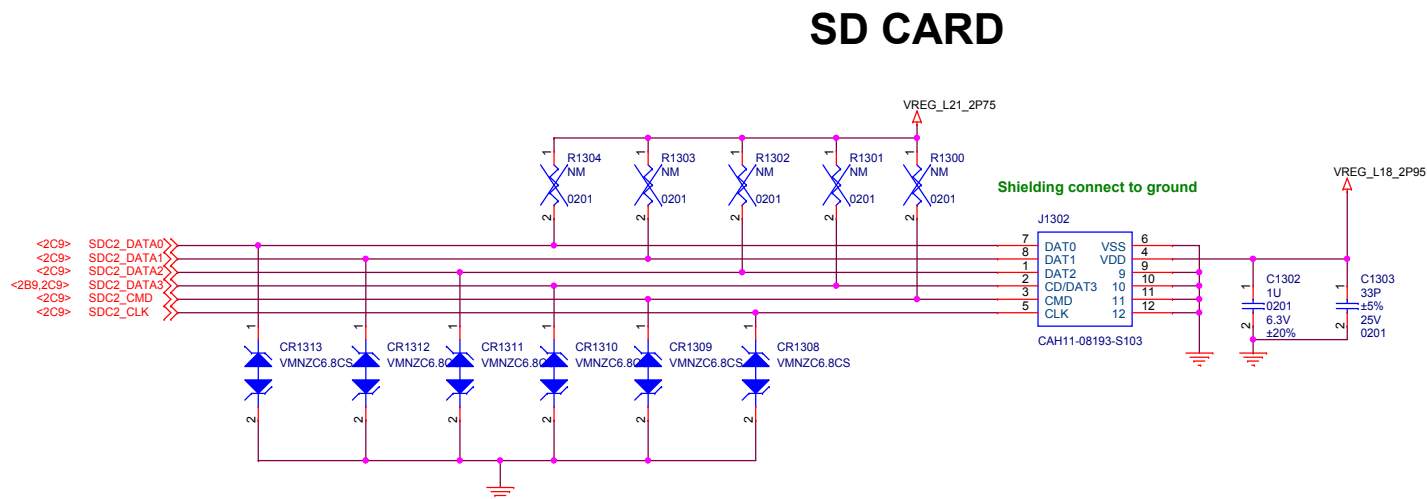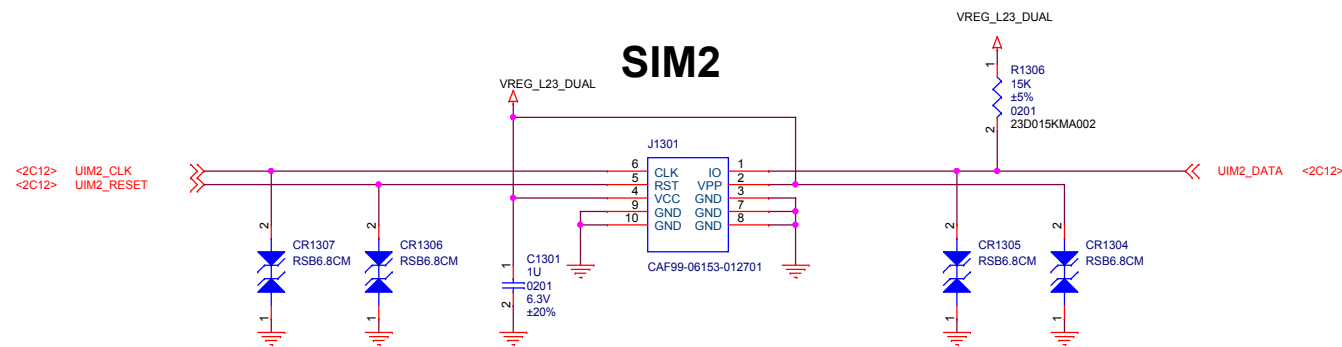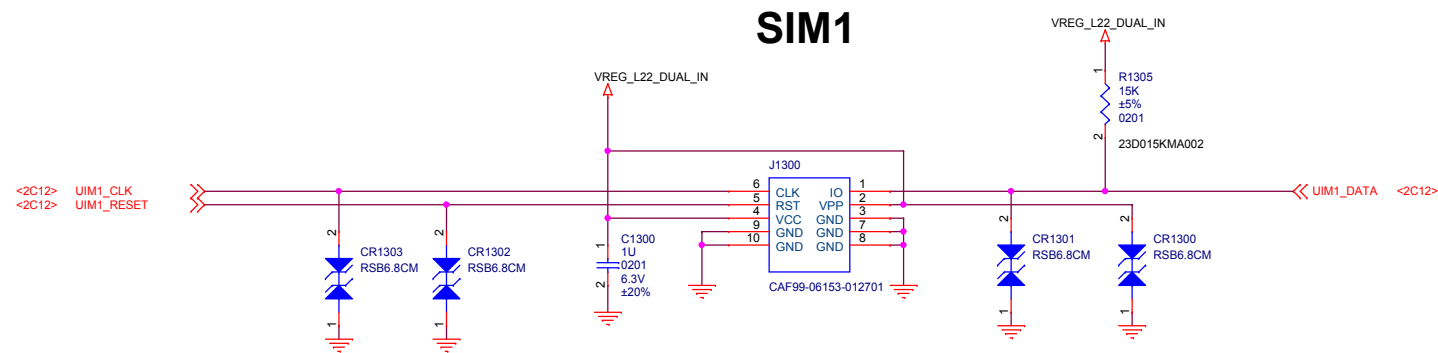


Title		
2013028_SIM&SDCARD		
Size A3	Document Number <Doc>	Rev 0.1
Date: Monday, December 30, 2013	Sheet 26 of 28	


MAIN MIC+USB+RGB

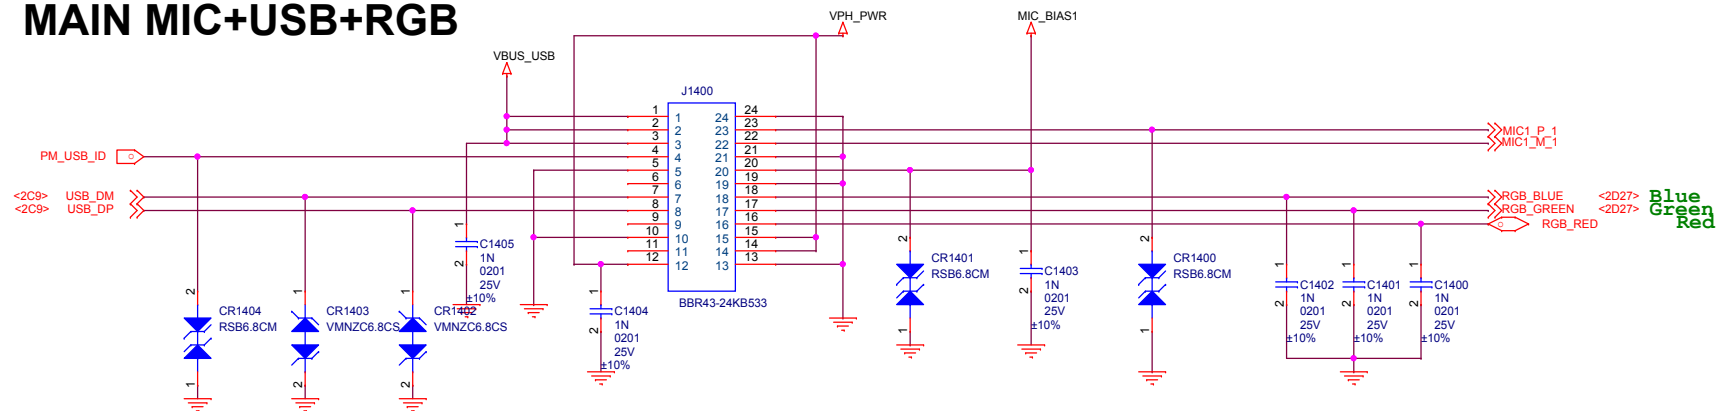


Power Key

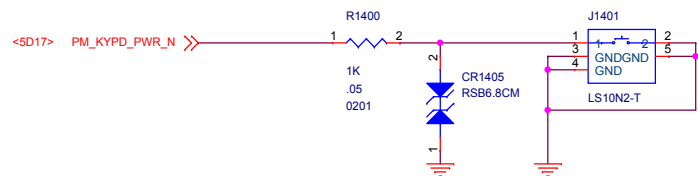


Volume Up

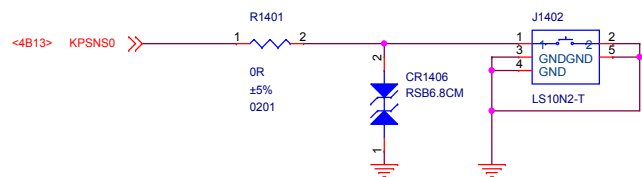

Volume Down

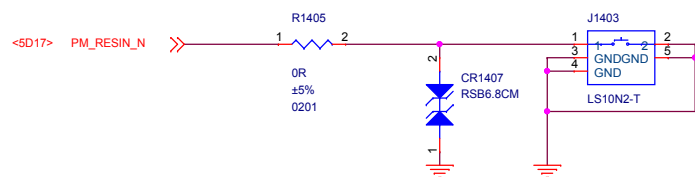

Handset Microphone 1

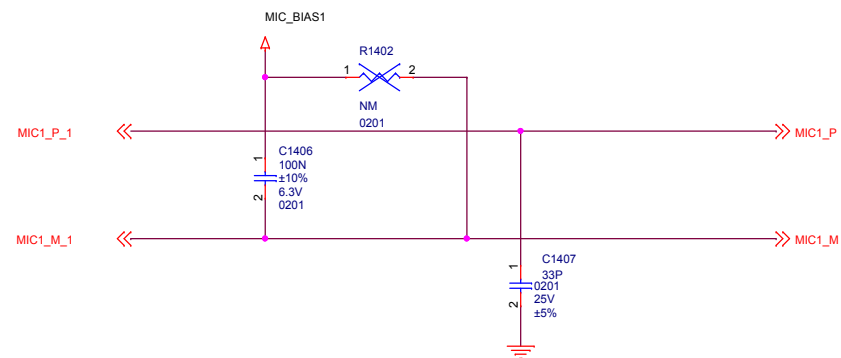

Title		
2013028_KEY&RGB		
Size	Document Number	Rev
A3	<Doc>	0.1
Date:	Monday, December 30, 2013	Sheet 27 of 28

[illegible][illegible][illegible]

Title			
2013028_Sensors			
Size	Document Number		Rev
A3	<Doc>		<Rev Code>
Date:	Monday, December 30, 2013	Sheet	28 of 28