


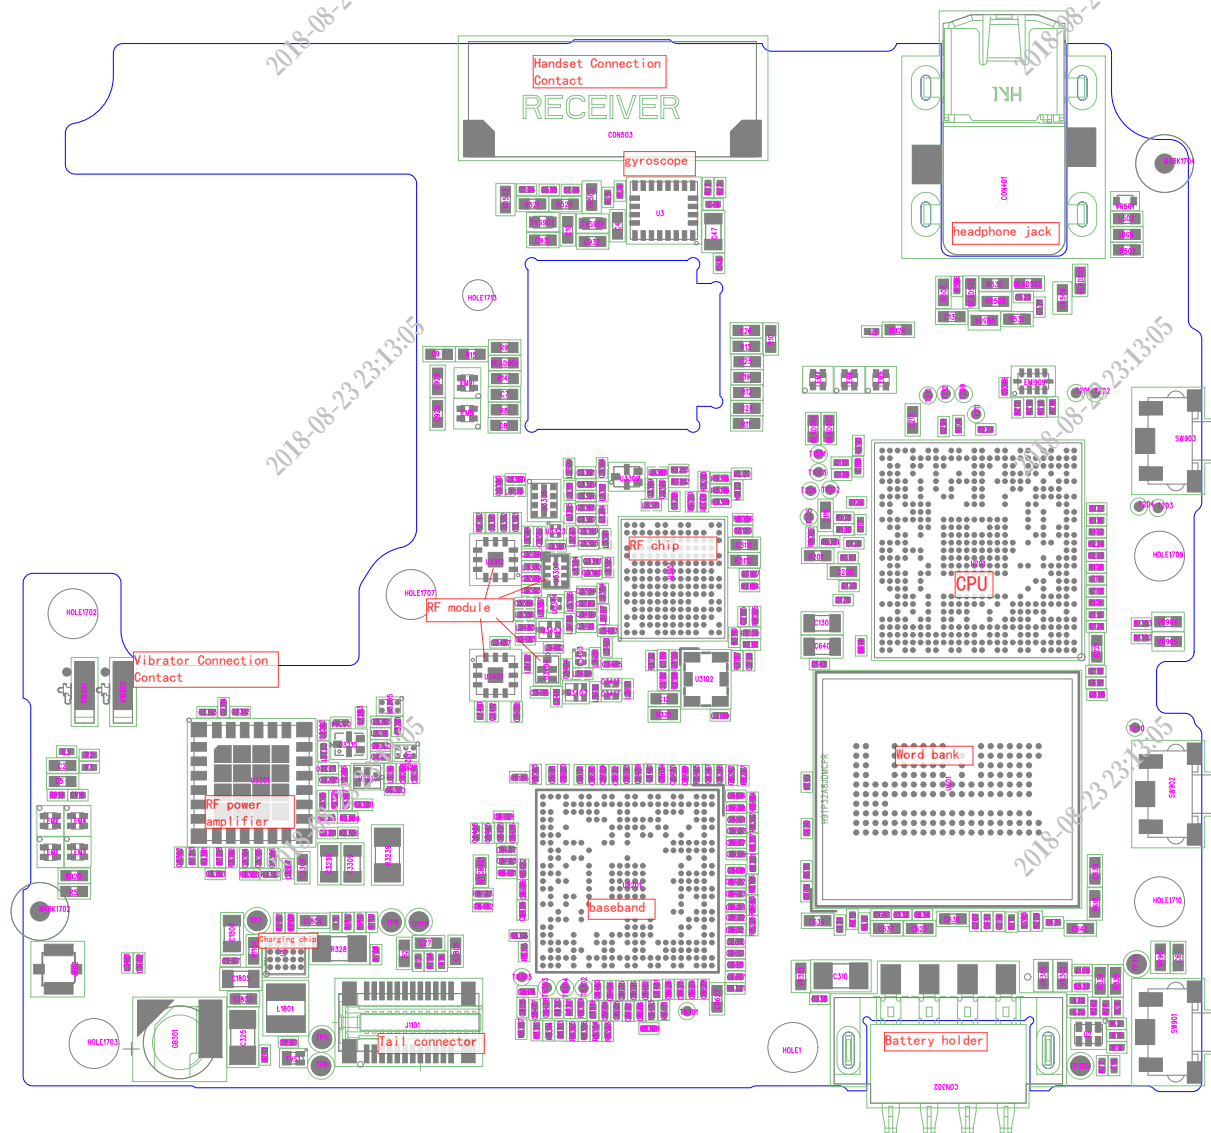
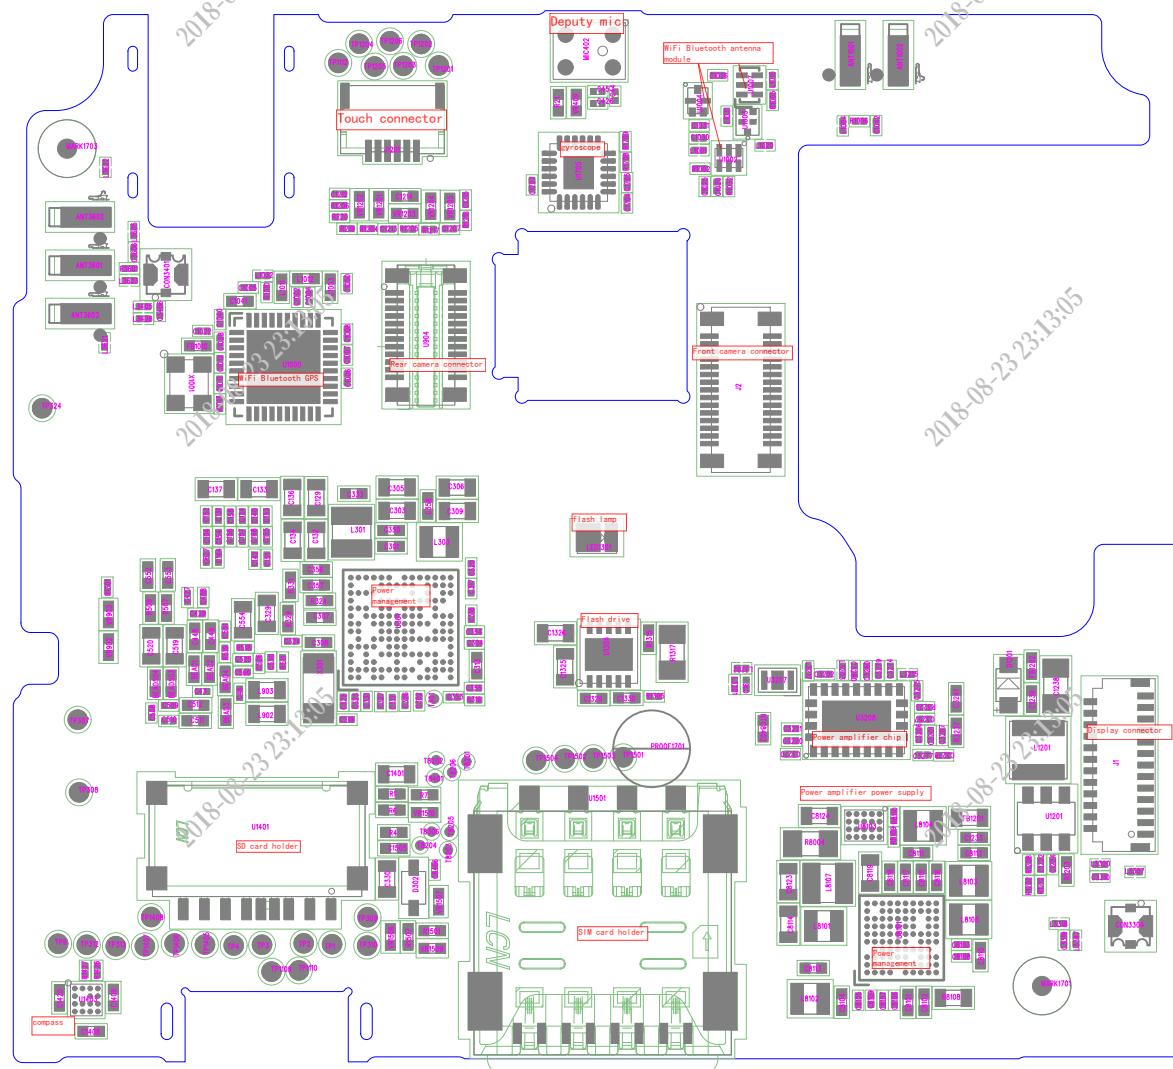


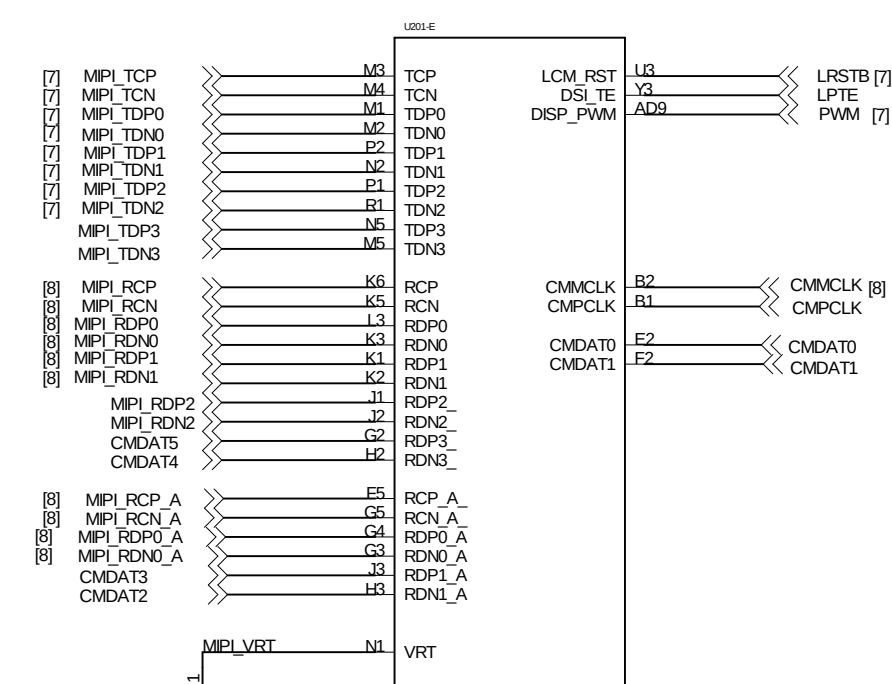





Close to MT6582

For earphone & MSDC hotplug EINT,
please choose EINT[0:15]
with HW de-bounce function.


Notice :
Please choose EINT[0:15] with
HW debounce for
mechanism plug in/out related application.
Ex: earphone, MSDC, SIM hot-plug

TITLE: <TITLE>		REV: <REV>	
DOCUMENT NO.: 02_MT6582_BASEBAND		SIZED: A1	
DEPARTMENT: Hardware DEPT.			
COMPANY: 			
DESIGNER: <DESIGNER>	Last Saved Date: 2014-7-3		SHEET: 2 OF 25

Before you select BJT , please take power dissipation into consideration.
Refer to MT6323 design notice


Charger

1. Close to Battery Connector.
(Rsense (R328) <10mm)
2. Main path should be 40mil.
3. Star connection from R328 to BAT connector
cap rating depends on
Phone OVP spec.

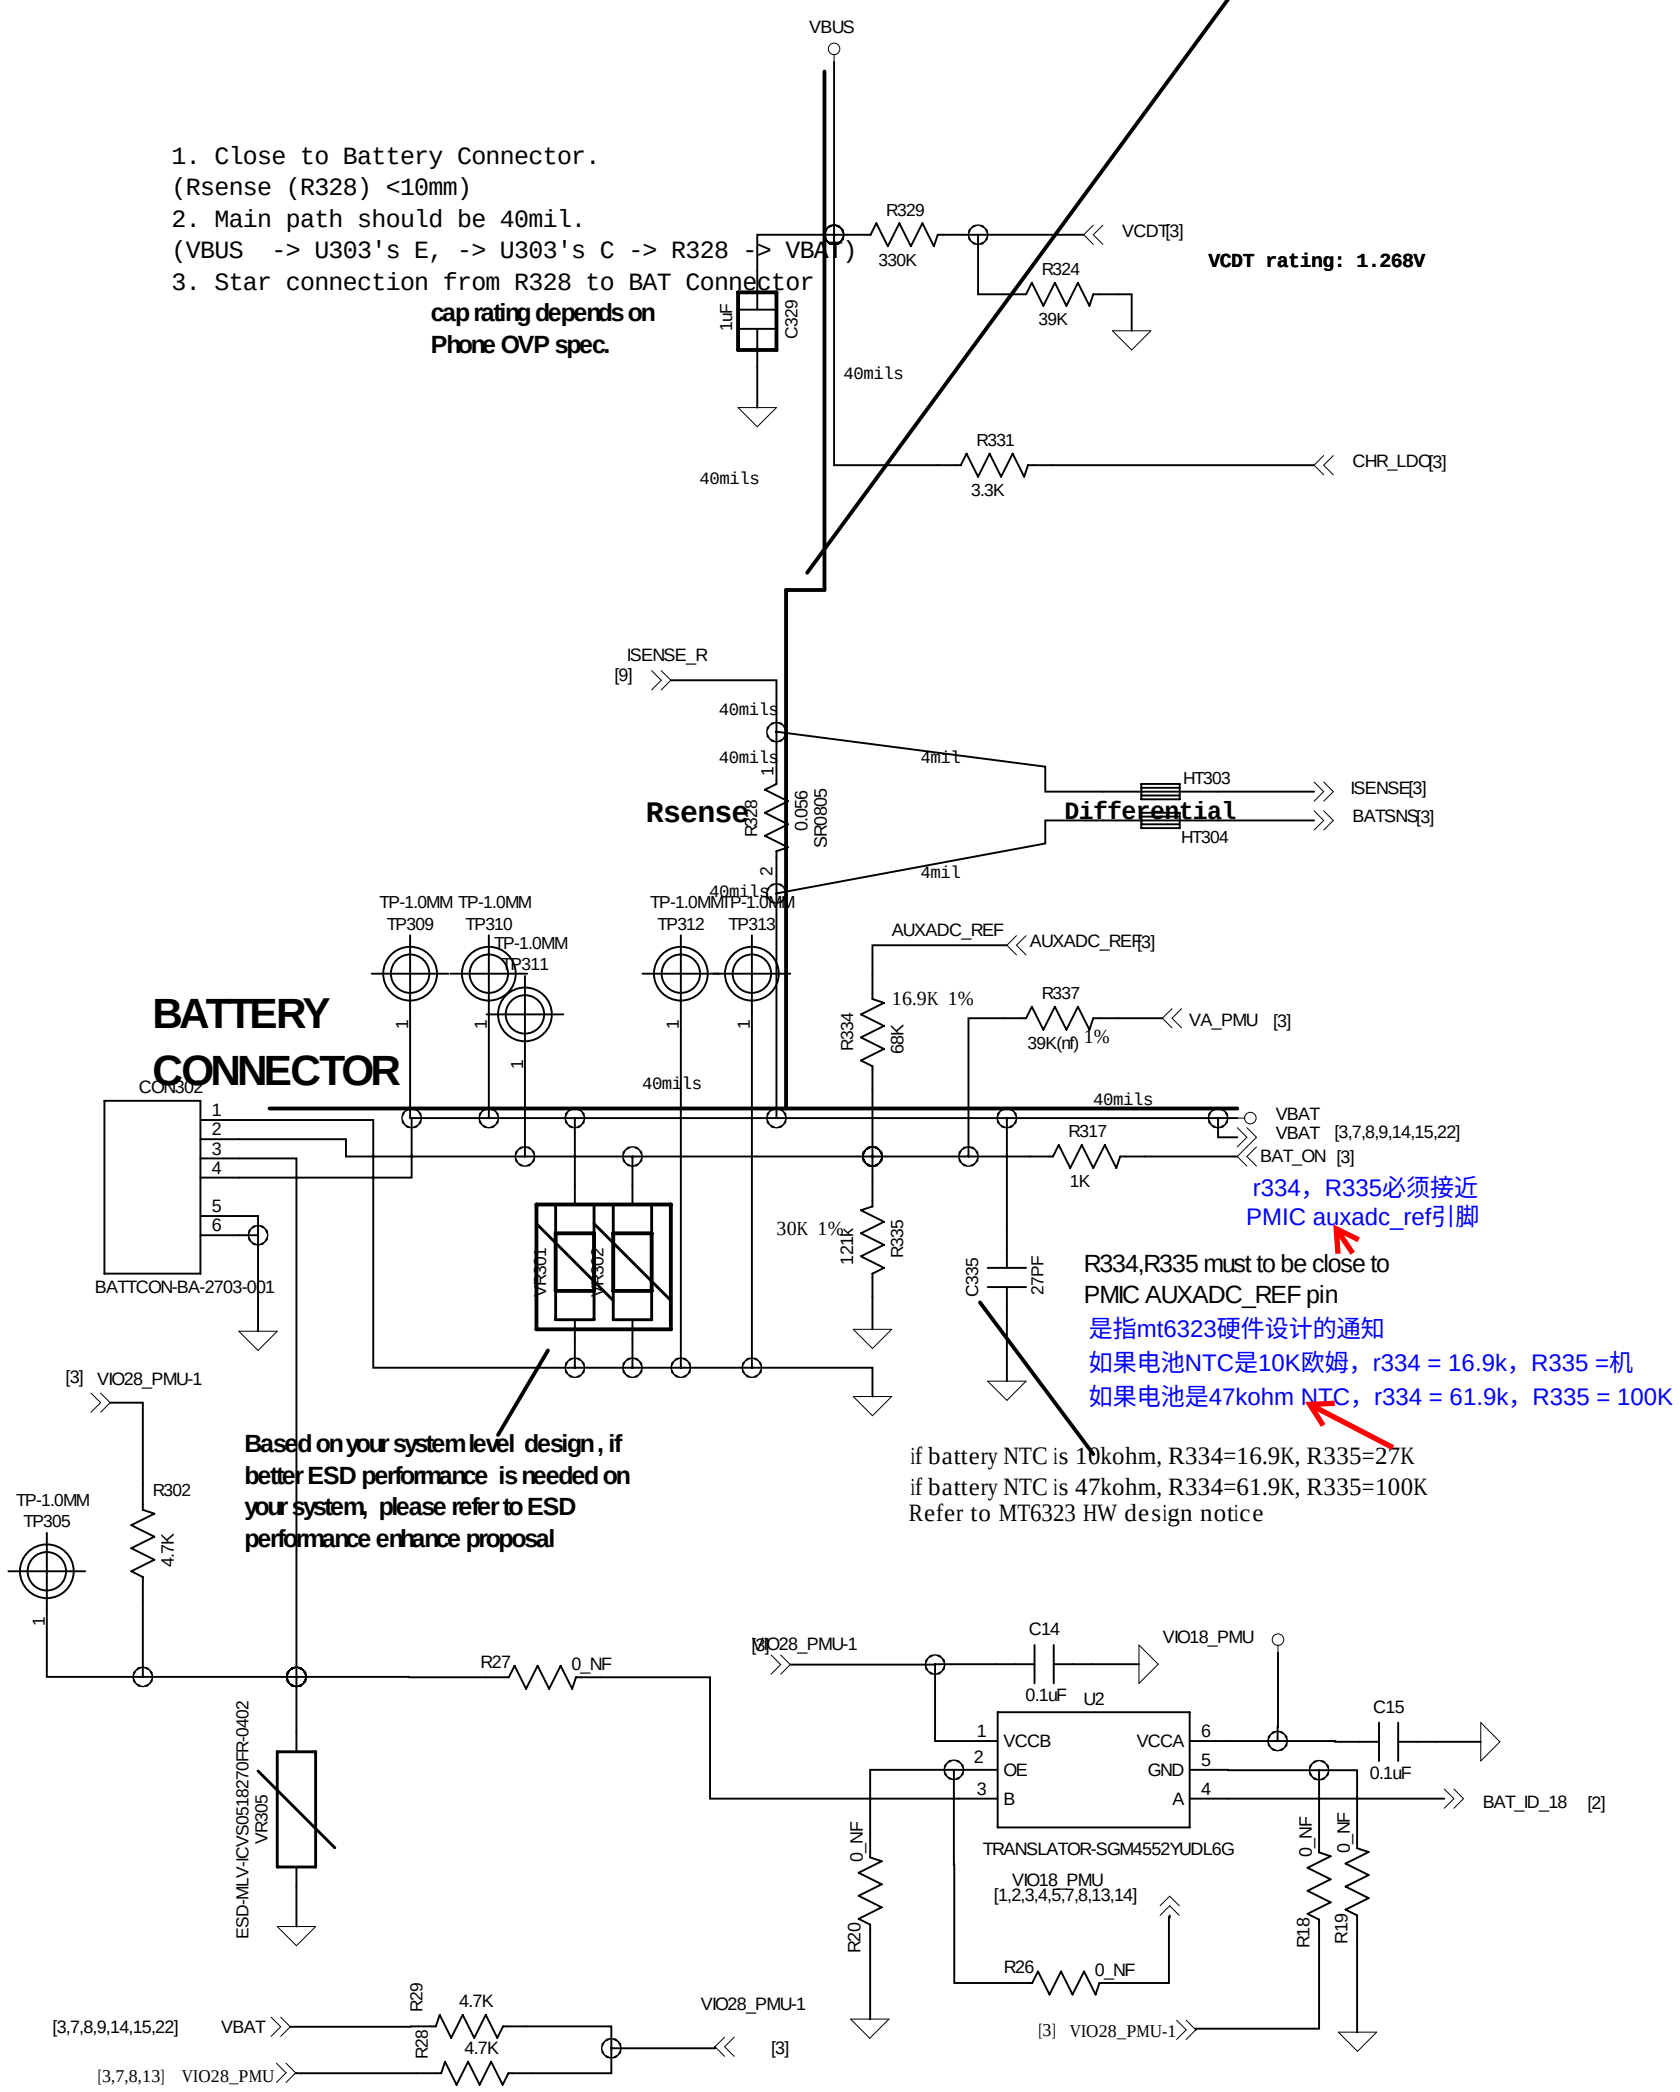

SGM4553 INLSX5011 PIN2,PIN5

VIBRATOR

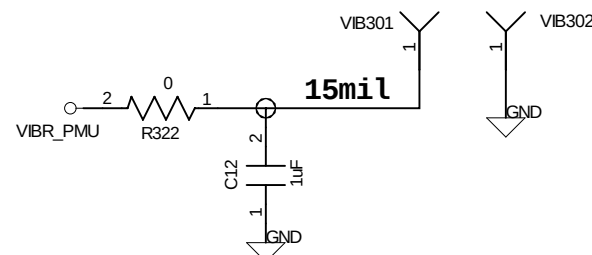

ISENSE/BTSNS 4m1
differential to Rsense 差分检测电阻

close to PMIC

Add Zener Diode
Place on the path
from VBAT to IC
(Battery connector
or test point or IO
connector)
VF : 4.89V~5.38V


Refer to MT6323 design
notice for Zener selection

Based on your system level design, if
better EOS performance is needed on your
system, please refer to EOS performance
enhance proposal

refer to system analog LDO
performance improve proposal

Refer to MT6323 design notice
for Buck GND layout rule

Refer to GPS co-clock layout rule

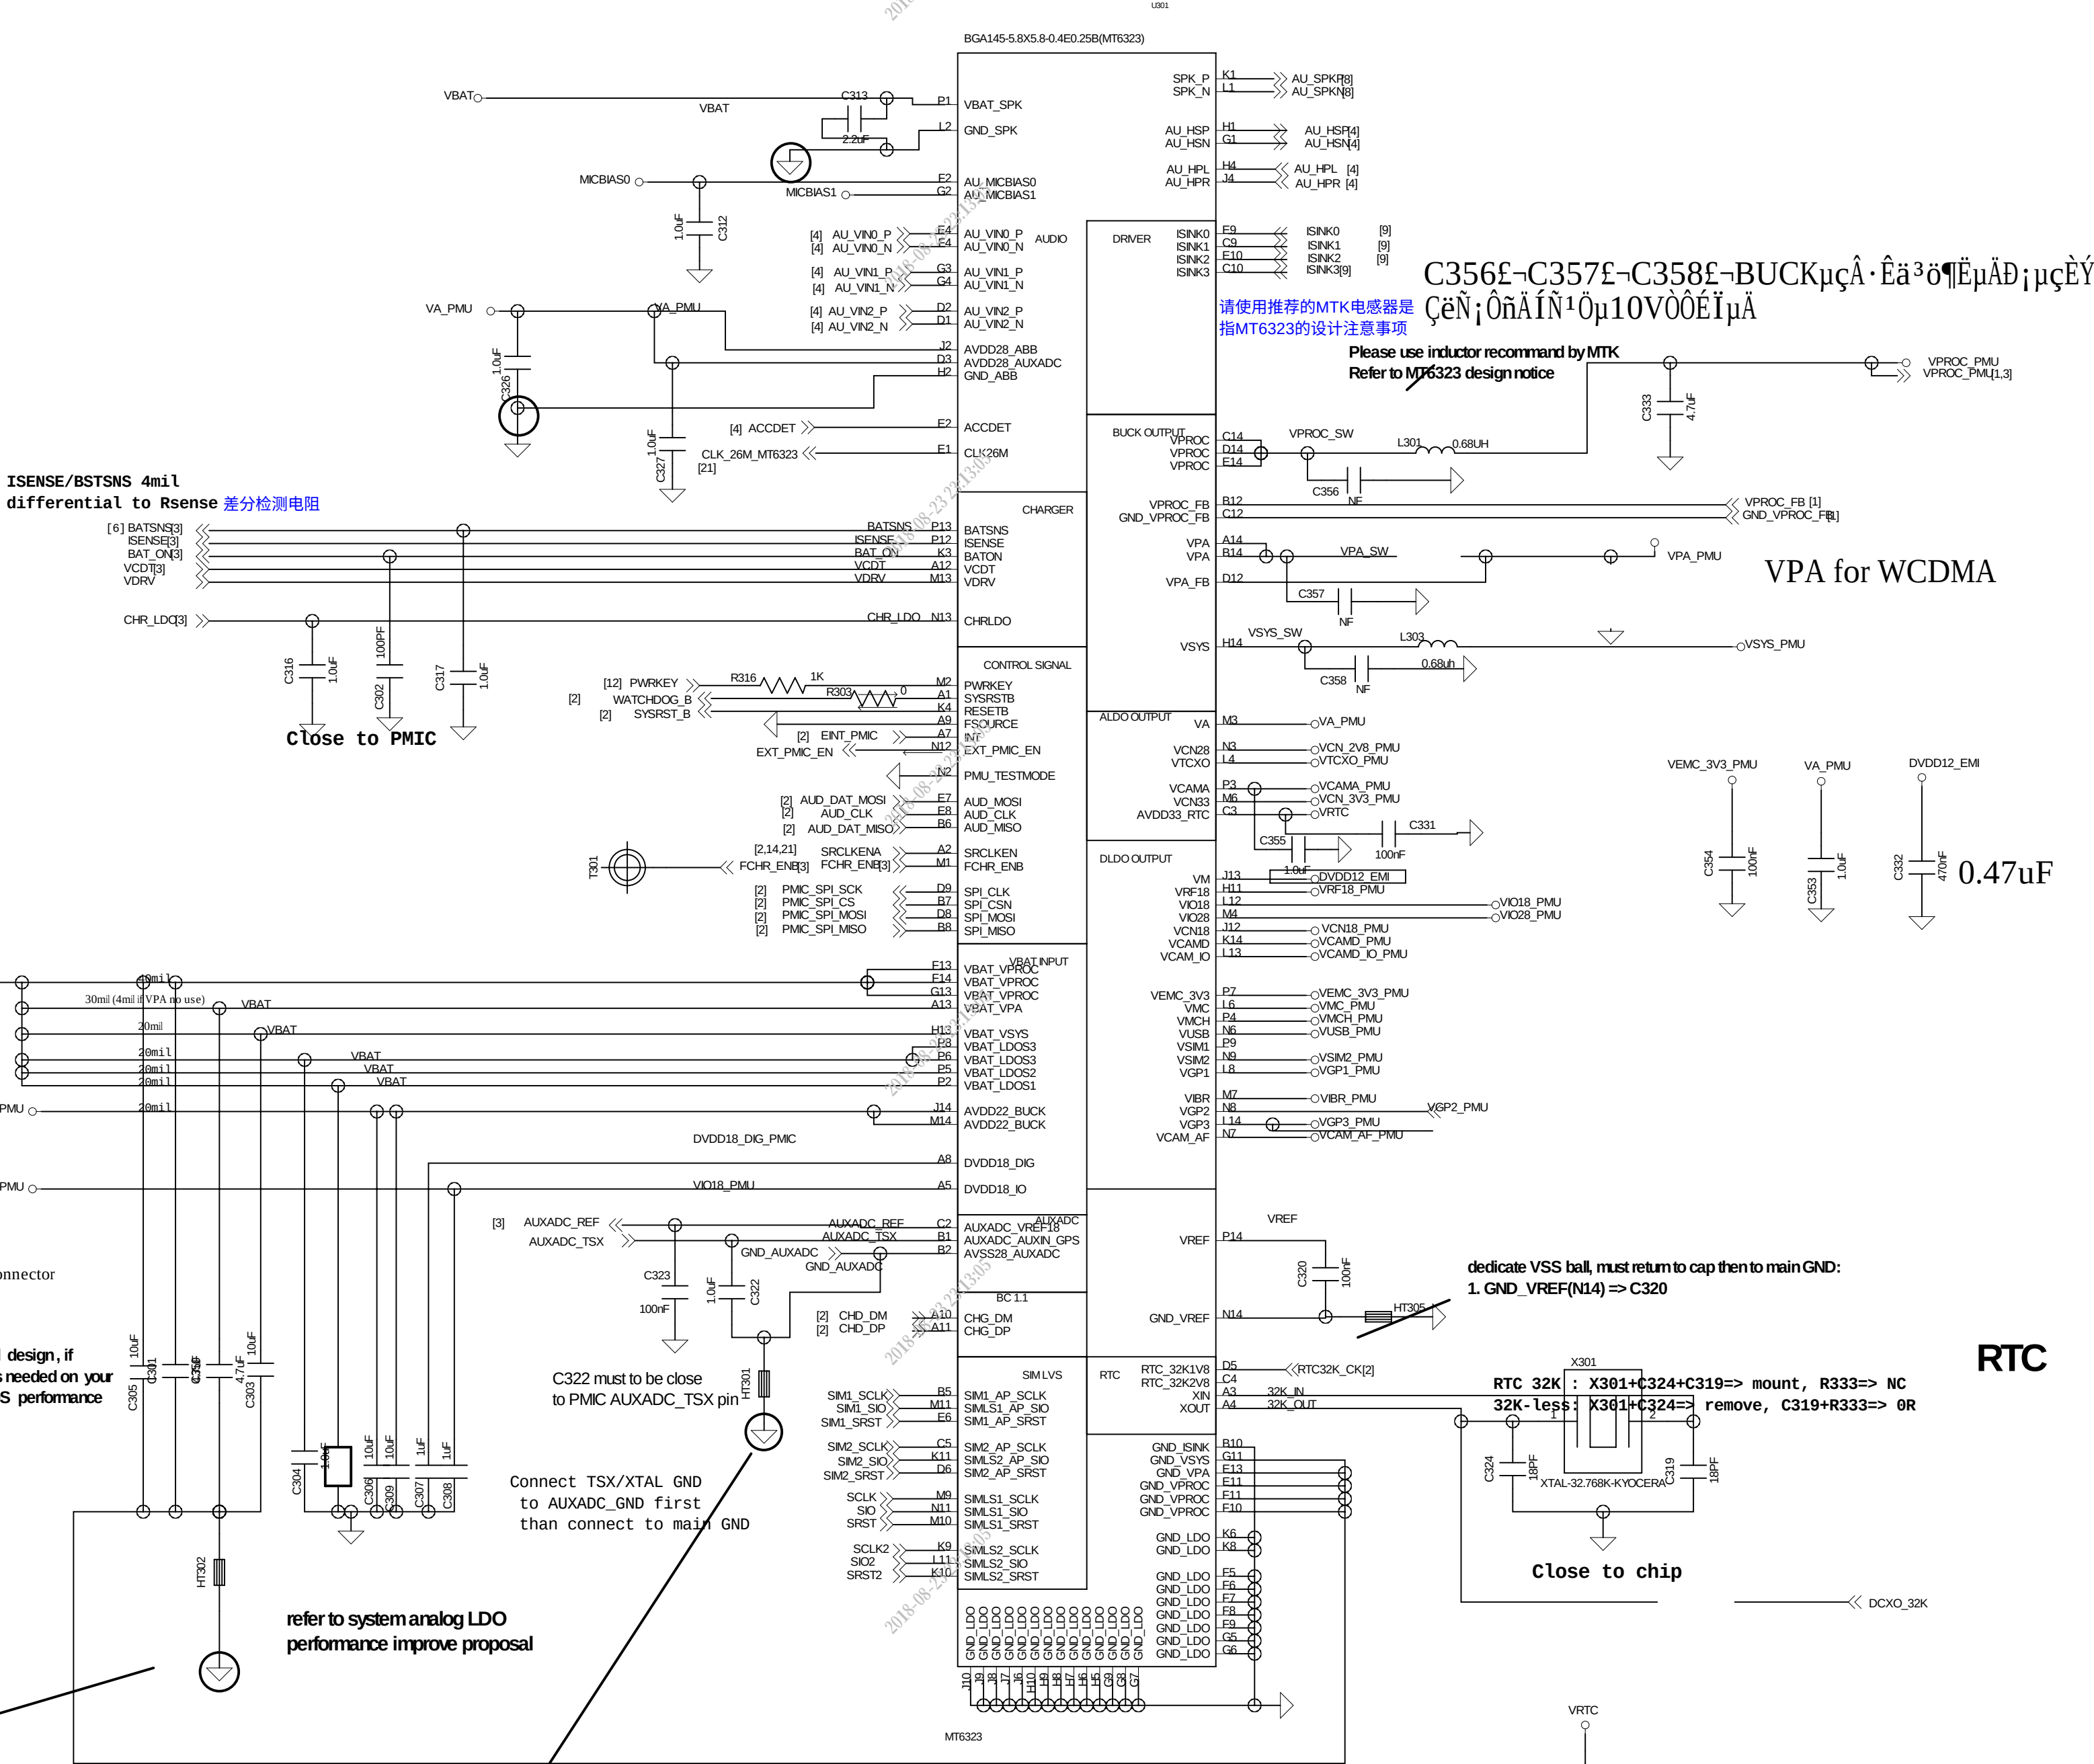

C356E-C357E-C358E-BUCK
Please use inductor recommend by MTK
Refer to MT6323 design notice


VPA for WCDMA

0.47uF

dedicate VSS ball, must return to cap then to main GND:
1. GND_VREF(N14) => C320

RTC

RTC 32K : X301+C324+C319=> mount, R333=> NC
32K- less : X301+C324=> remove, C319+R333=> 0R



=> for longer RTC time sustain after battery remove,
please refer to RTC design notice

=> for longer RTC time sustain after battery remove,
please refer to RTC design notice


Symbol	LPDDR2/1.2V	PCDDR3L/1.35V	PCDDR3/1.5V	LPDDR1/1.8V	Default
SPI_CSN	H	L (20K)	H	L (20K)	PU
AUD_MOSI	L	H (20K)	H (20K)	L	PD

TITLE:	<TITLE>	REV:	<REV>
DOCUMENT NO:	03_MT6323_PMIC_AUDIO	SIZE:	A1
DEPARTMENT:	Hardware DEPT.		
COMPANY:	WINGTEC		
DESIGNER:	<DESIGNER>	Last Saved Date:	2014-7-3
SHEET:	3	OF	25

RECEIVED



Analog MIC




close to connector

same power domain



AUDIO-EAR-PH6-4805F35B

[illegible][illegible]

TITLE:	<TITLE>	REV:	<REV>
--------	---------	------	-------

DOCUMENT NO:	05 AUDIO	SIZE:	A1
--------------	----------	-------	----

[illegible]DEPARTMENT: Hardware DEPT.


COMPANY: **WINGTECH**



EXERCISES

DESIGNER:	<DESIGNER>	Last Saved Date:	2014-7-3	SHEET:	4	OF	25
-----------	------------	------------------	----------	--------	---	----	----

eMMC+LPDDR2




162 Ball, 0.5mm pitch
VDD1=1.8V
VDD2=1.20V
VDDCA=1.2V
VDDQ= 1.20V

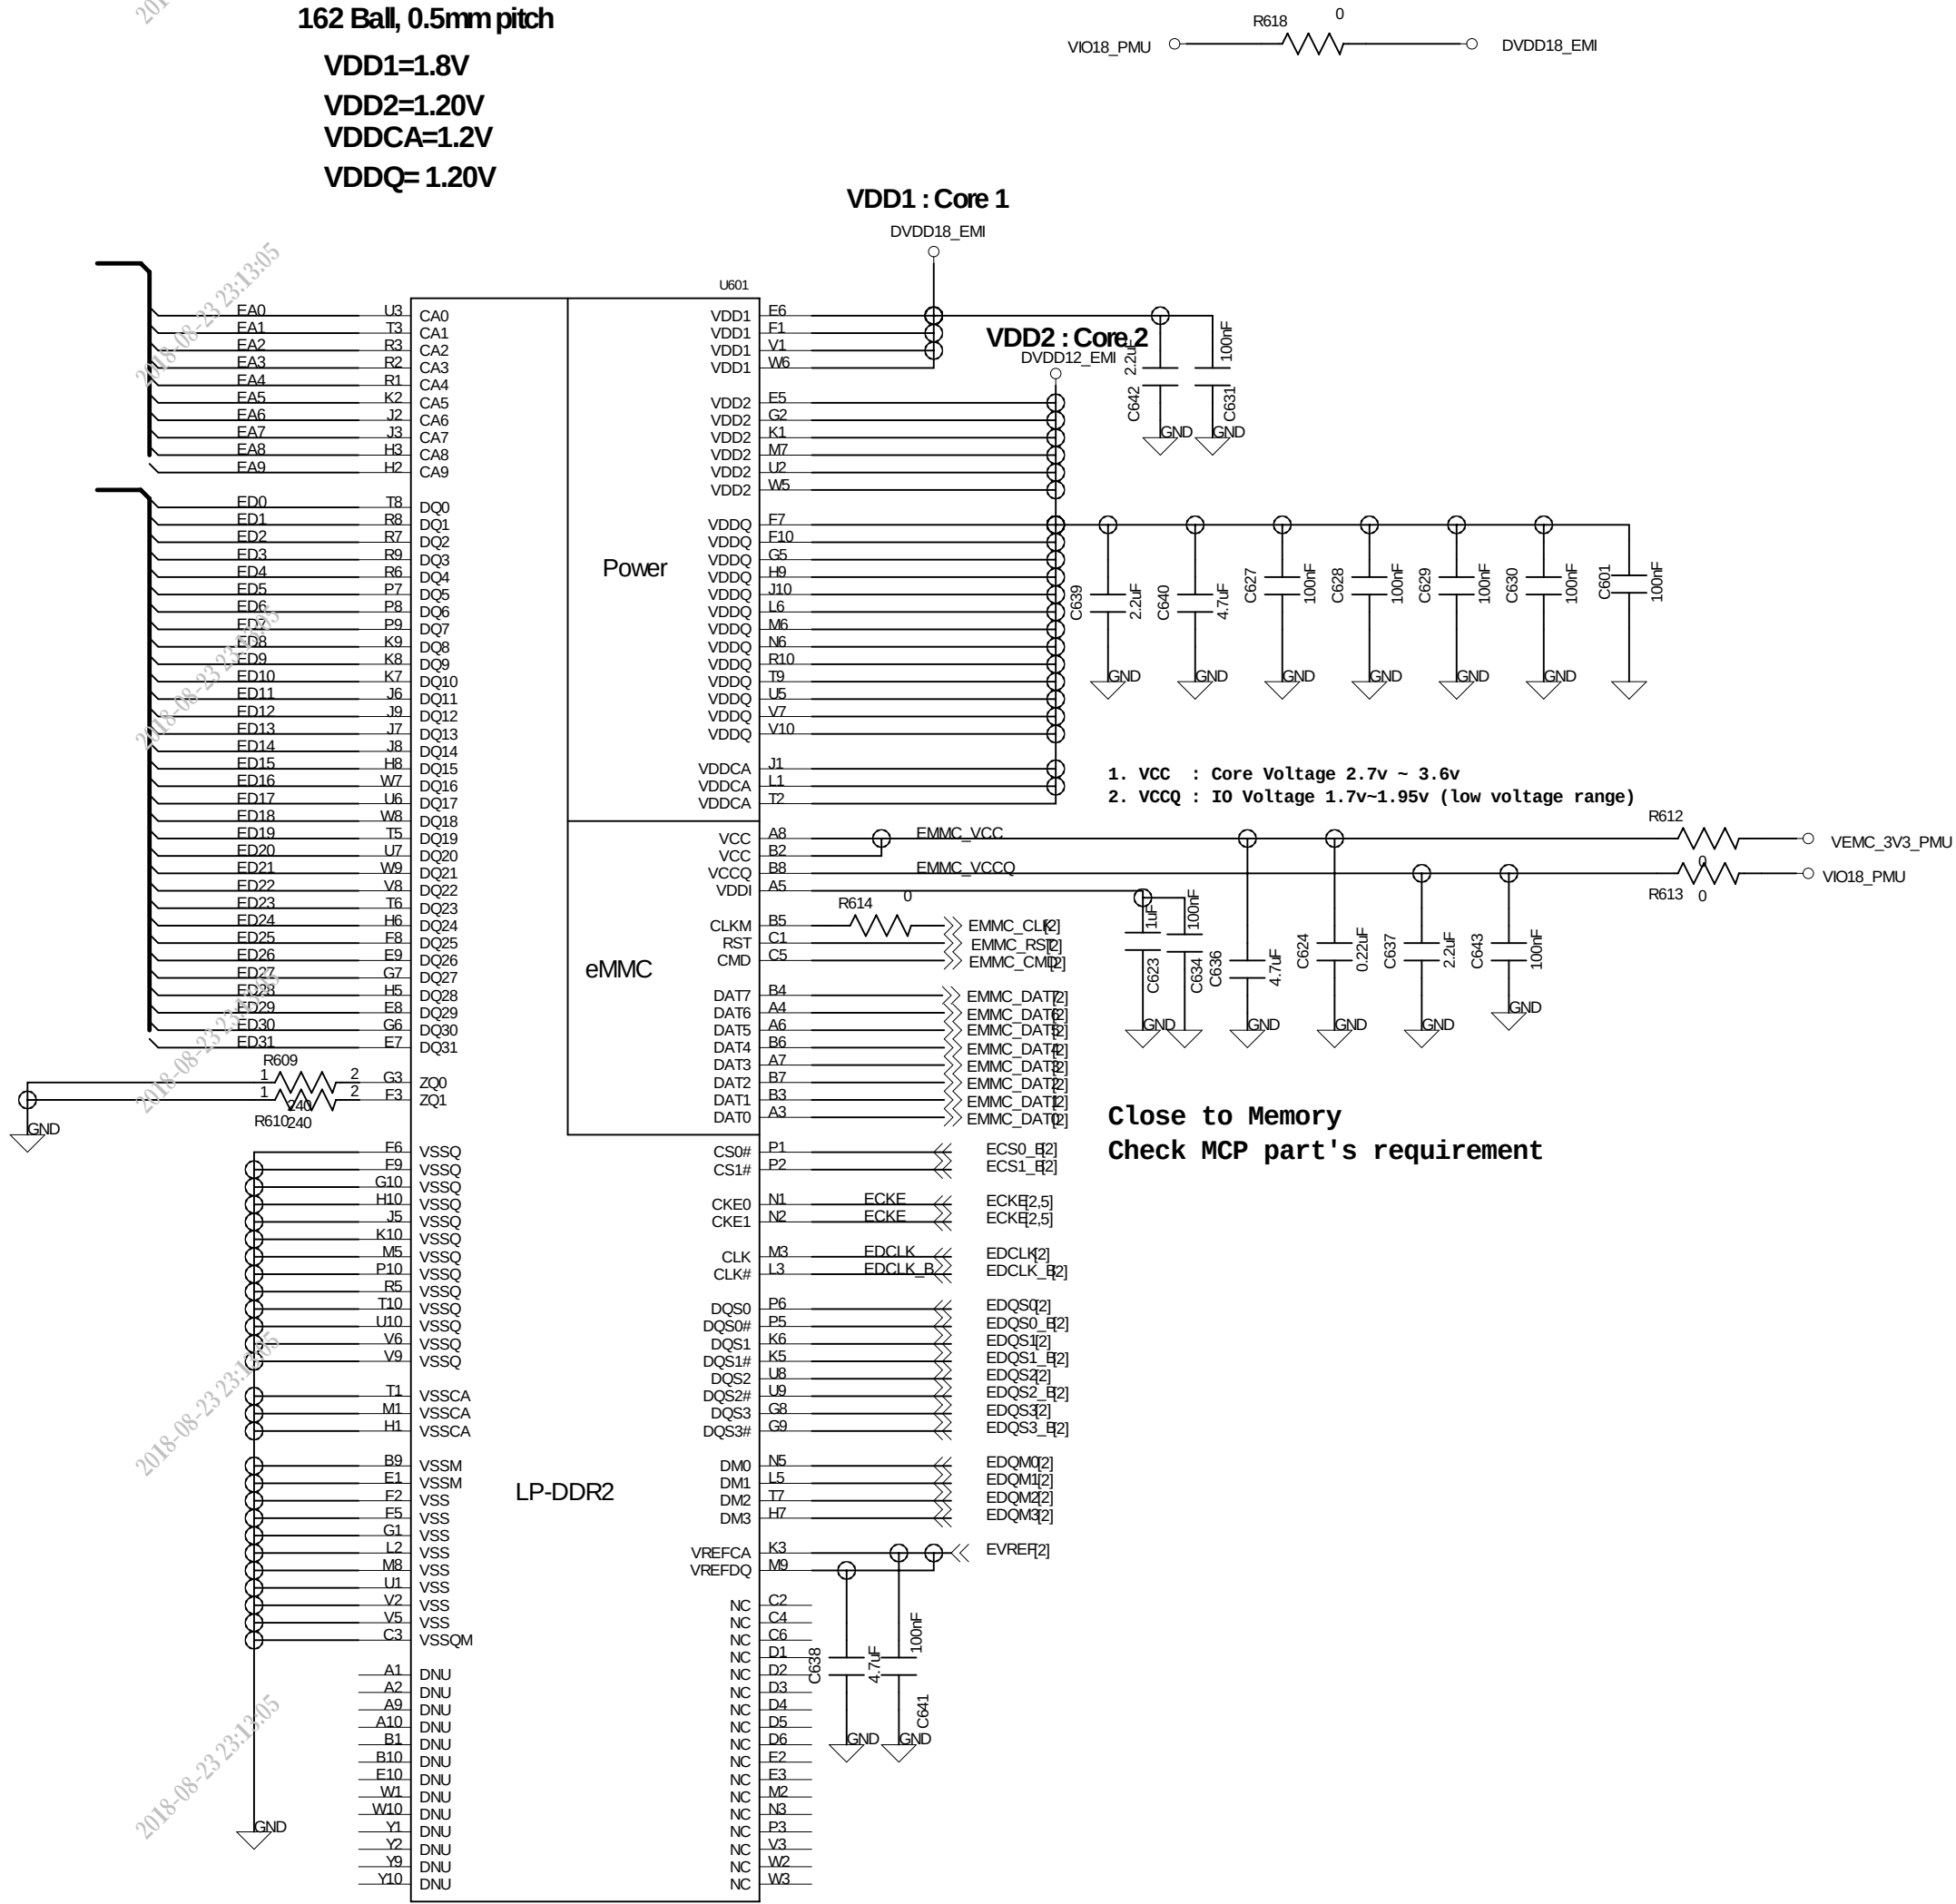

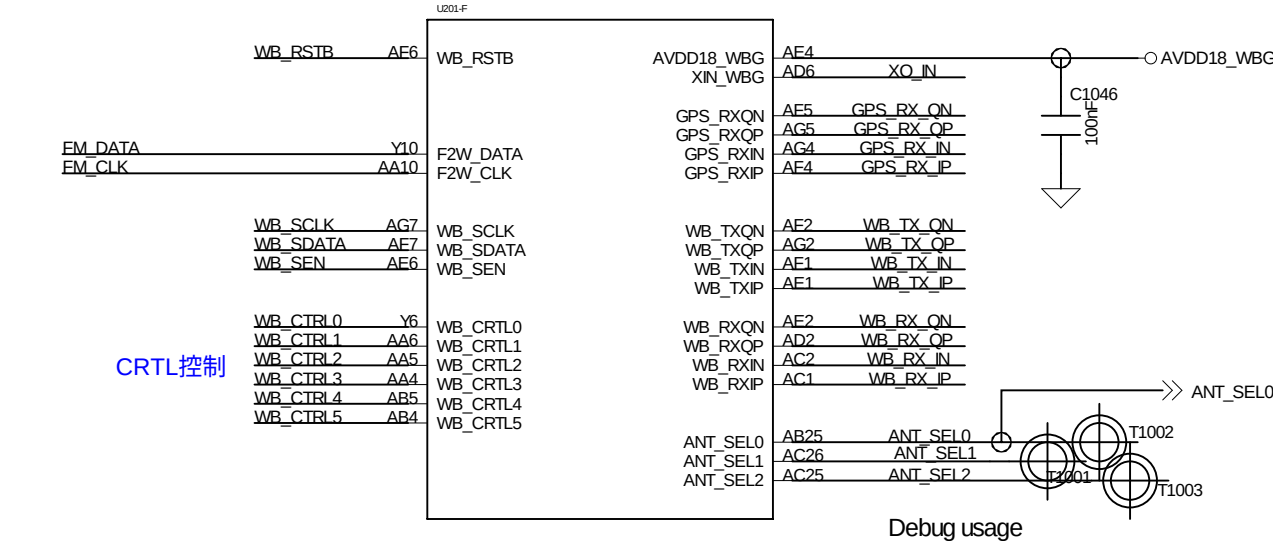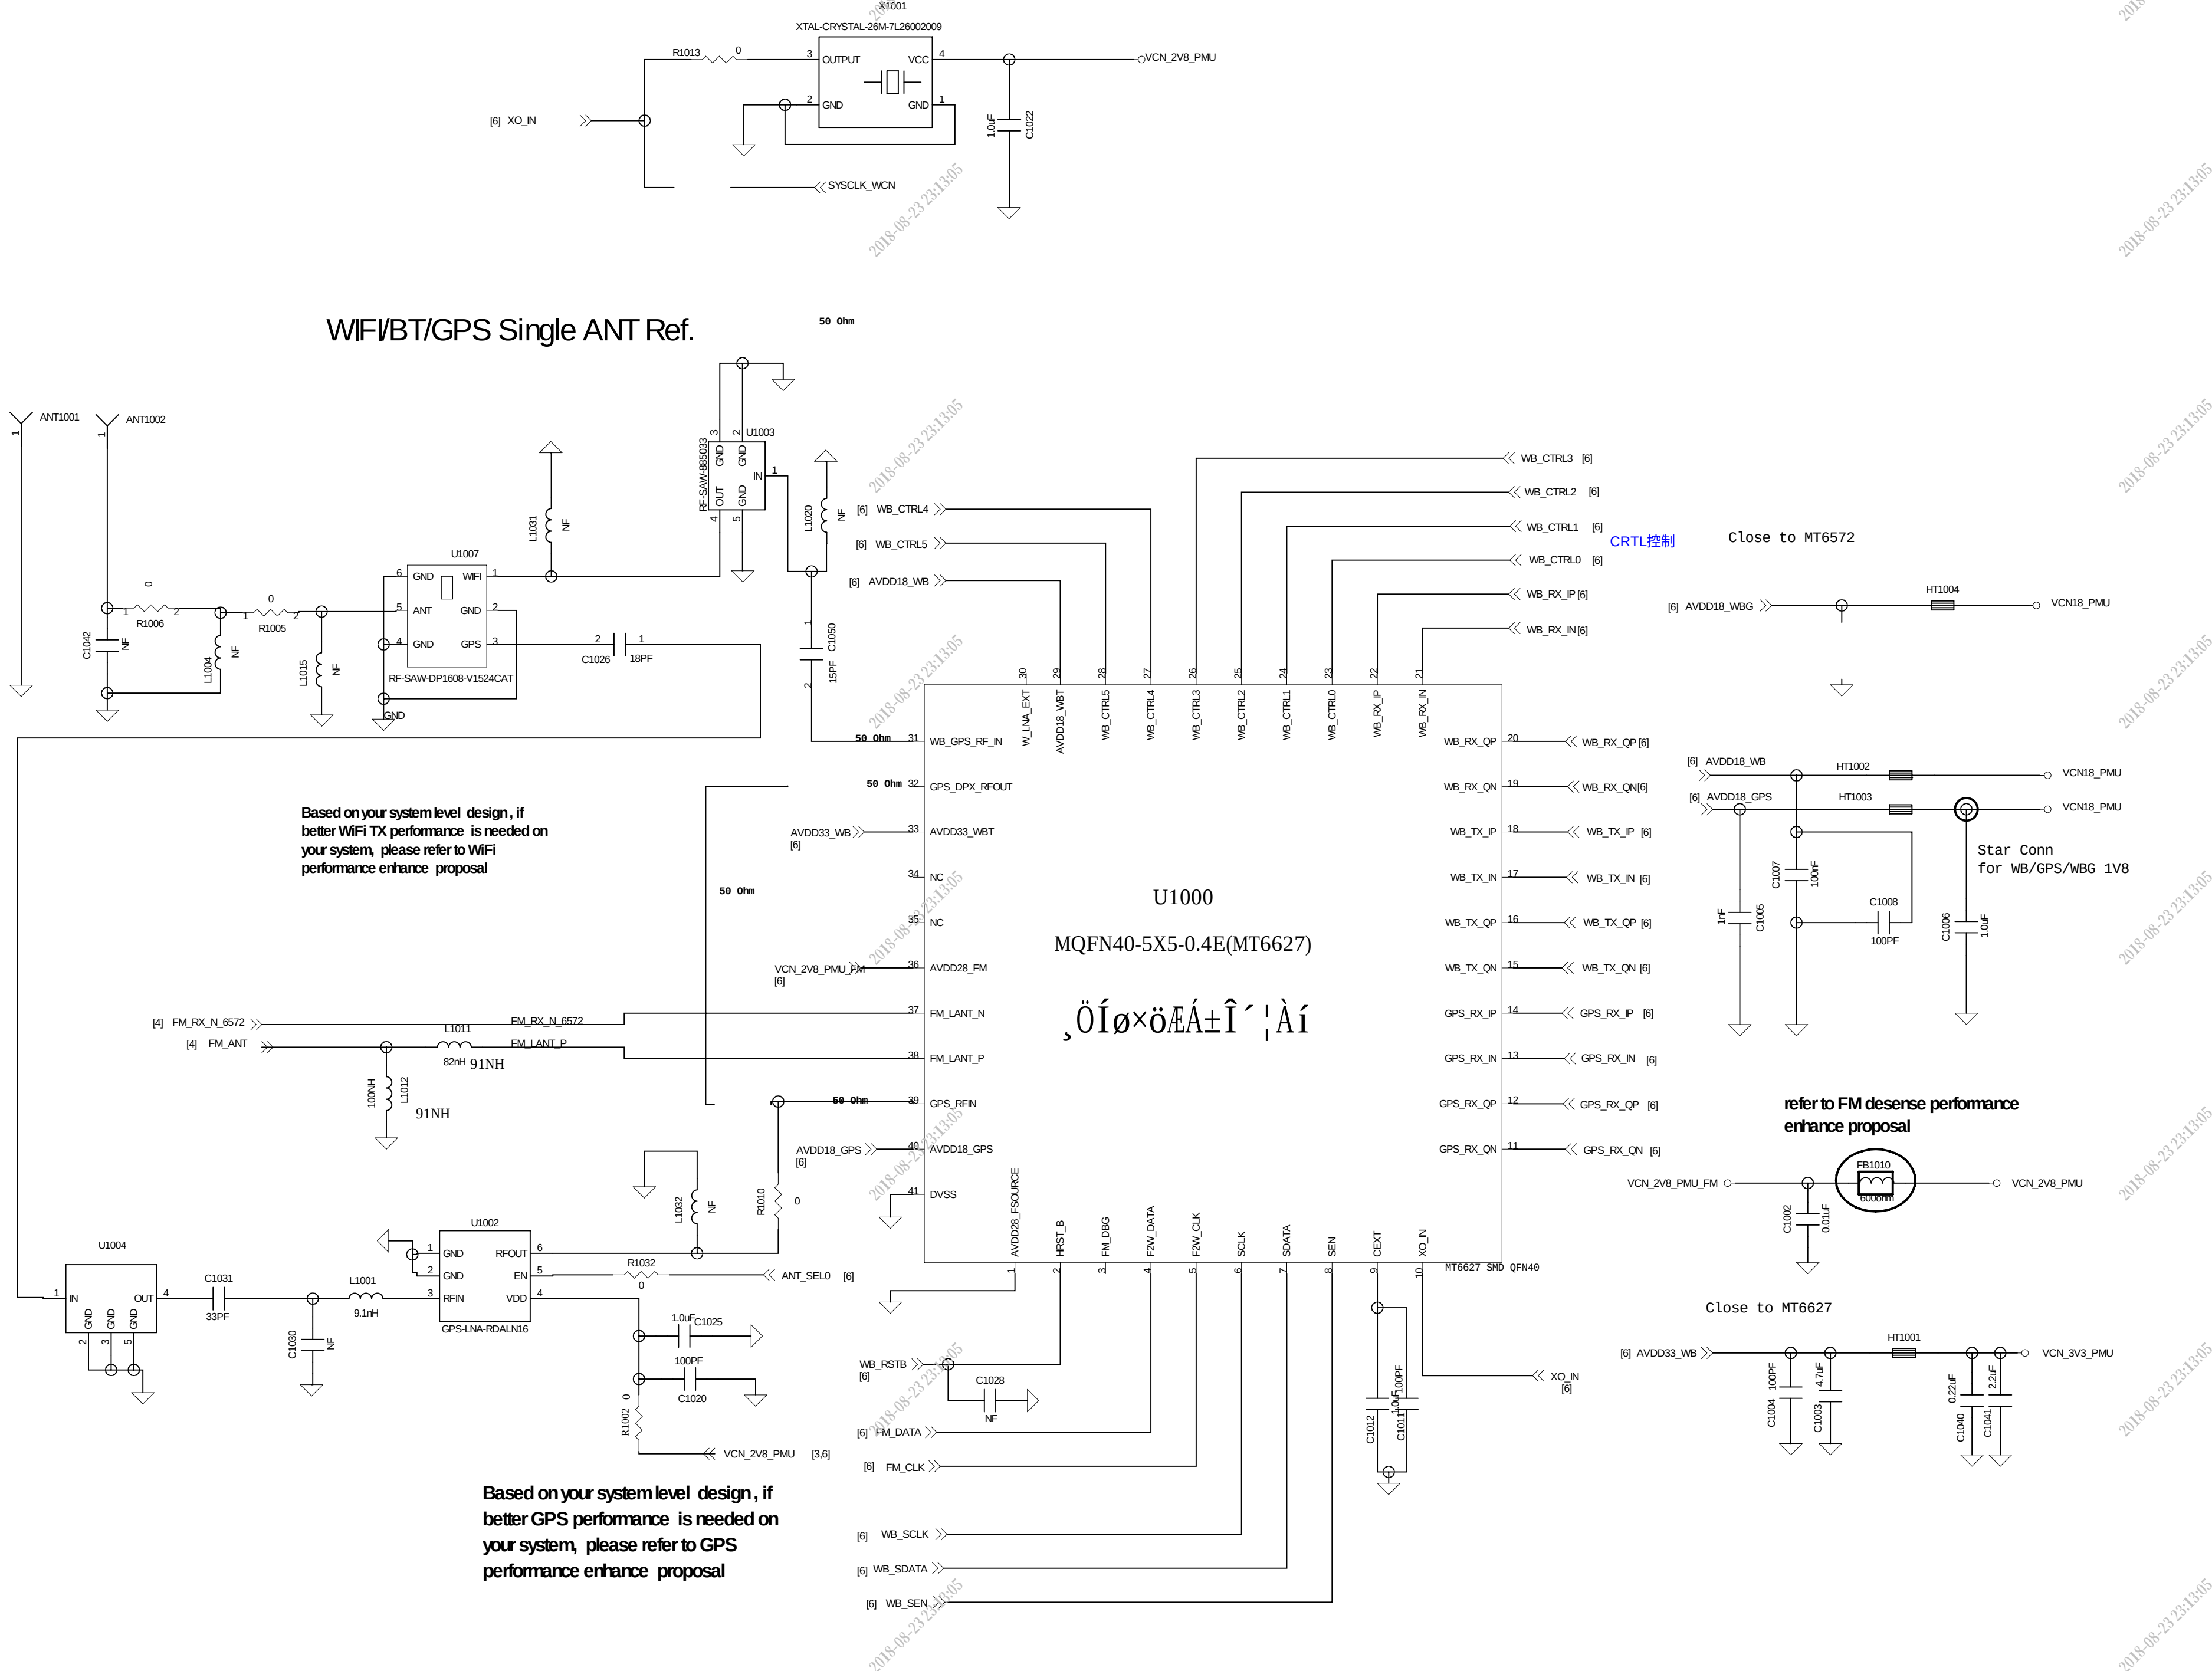

TITLE: <TITLE>		REV: <REV>	
DOCUMENT NO: 10_WIFI_BT_GPS_FM_MT6627		SIZED: A1	
DEPARTMENT: Hardware DEPT.			
COMPANY:			
DESIGNER: <DESIGNER>	Last Saved Date: 2014-7-3	SHEET: 6 OF 25	

FRONT_camera+LP Sensor+SPK

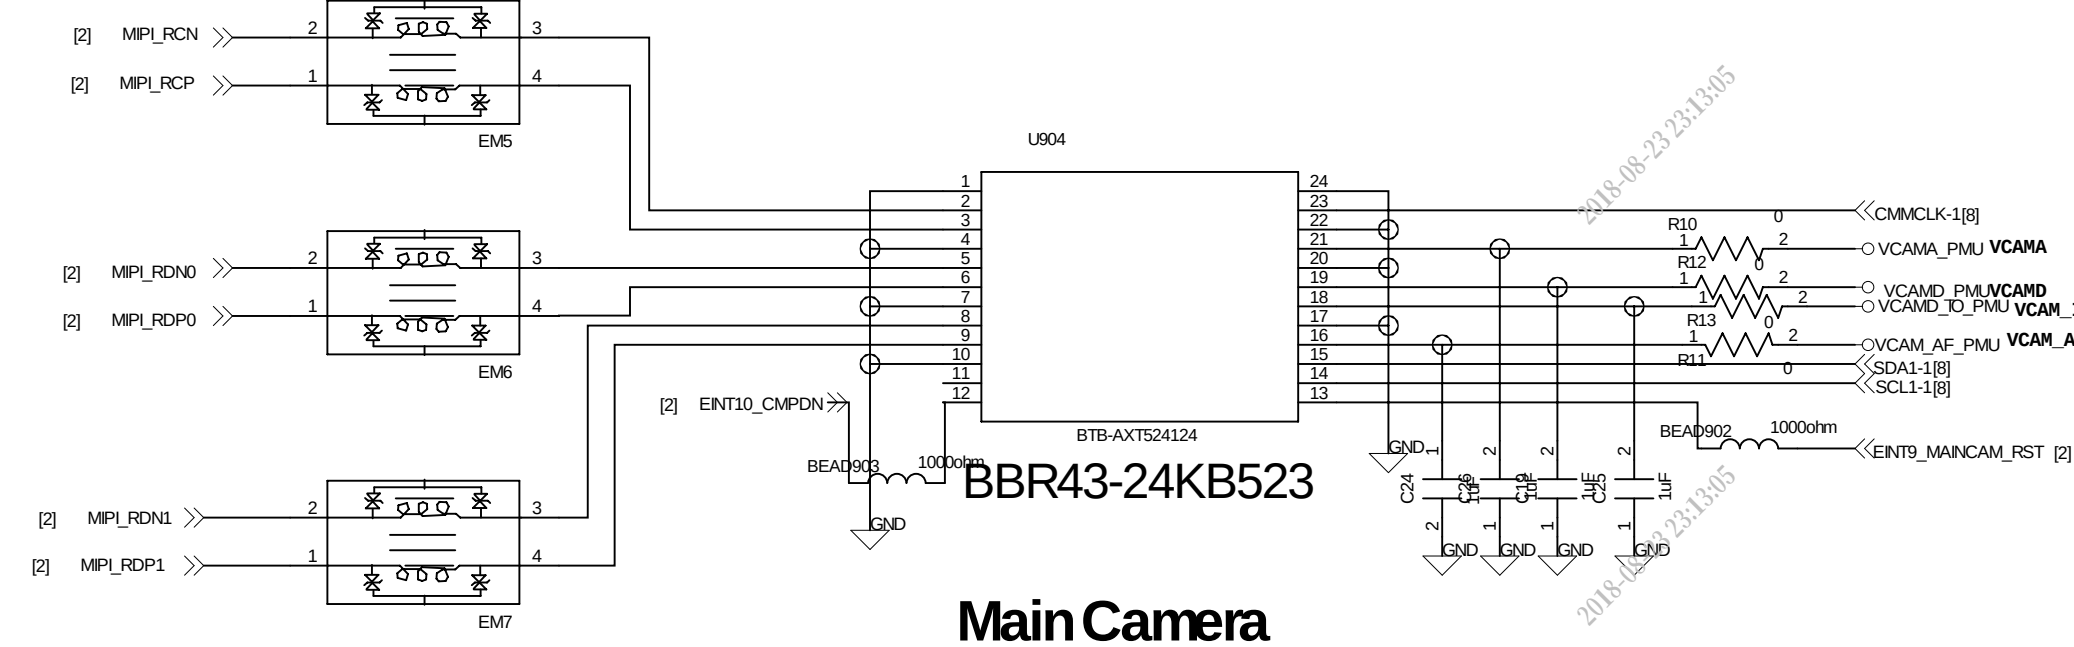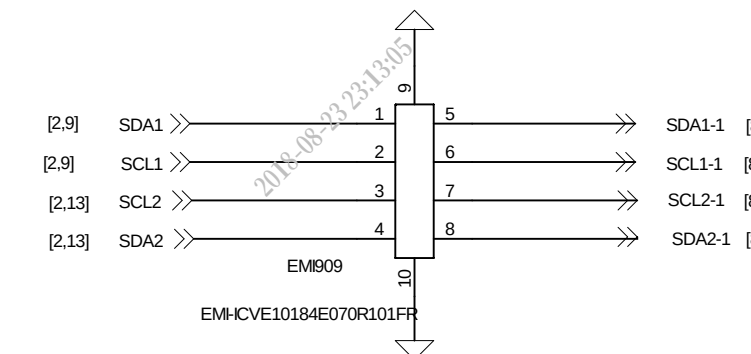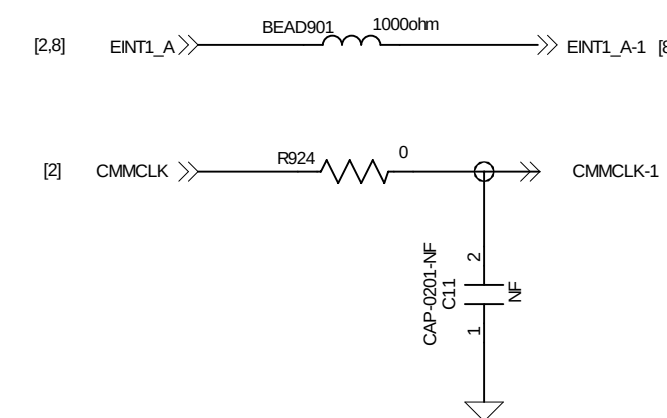

OCP8110 R1315=82K R1317=0.47

FLASH LED


TITLE: <TITLE>		REV: <REV>
DOCUMENT NO: 13_CAMERA	SIZED: A1	
DEPARTMENT: Hardware DEPT.		
COMPANY: 		
DESIGNER: <DESIGNER>	List Saved Date: 2014-7-3	SHEET: 8 OF 25




If switching charger is used:


- (1) R1801~R1805, C1801~C1806, L1801, U1801 are needed
- (2) U303, U304 change to NC
- (3) R328 change to 56m Ohm

Switching Charger

TITLE: <TITLE>		REV: <REV>
DOCUMENT NO.: 14_USB	SIZED: A1	
DEPARTMENT: Hardware DEPT.		
COMPANY: 		
DESIGNER: <DESIGNER>	Last Saved Date: 2014-7-3	SHEET: 9 of 25


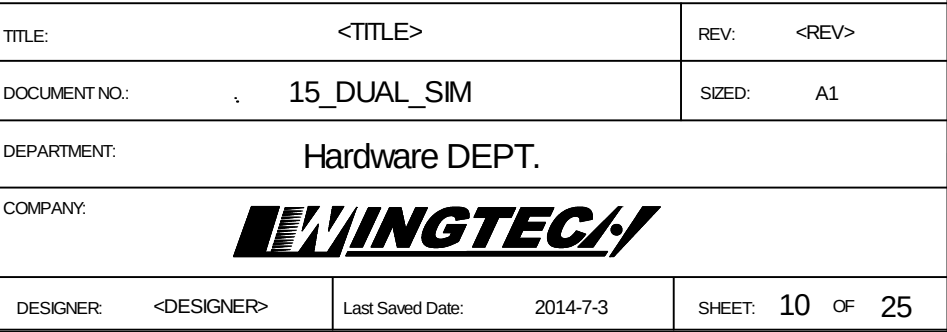


SD CARD

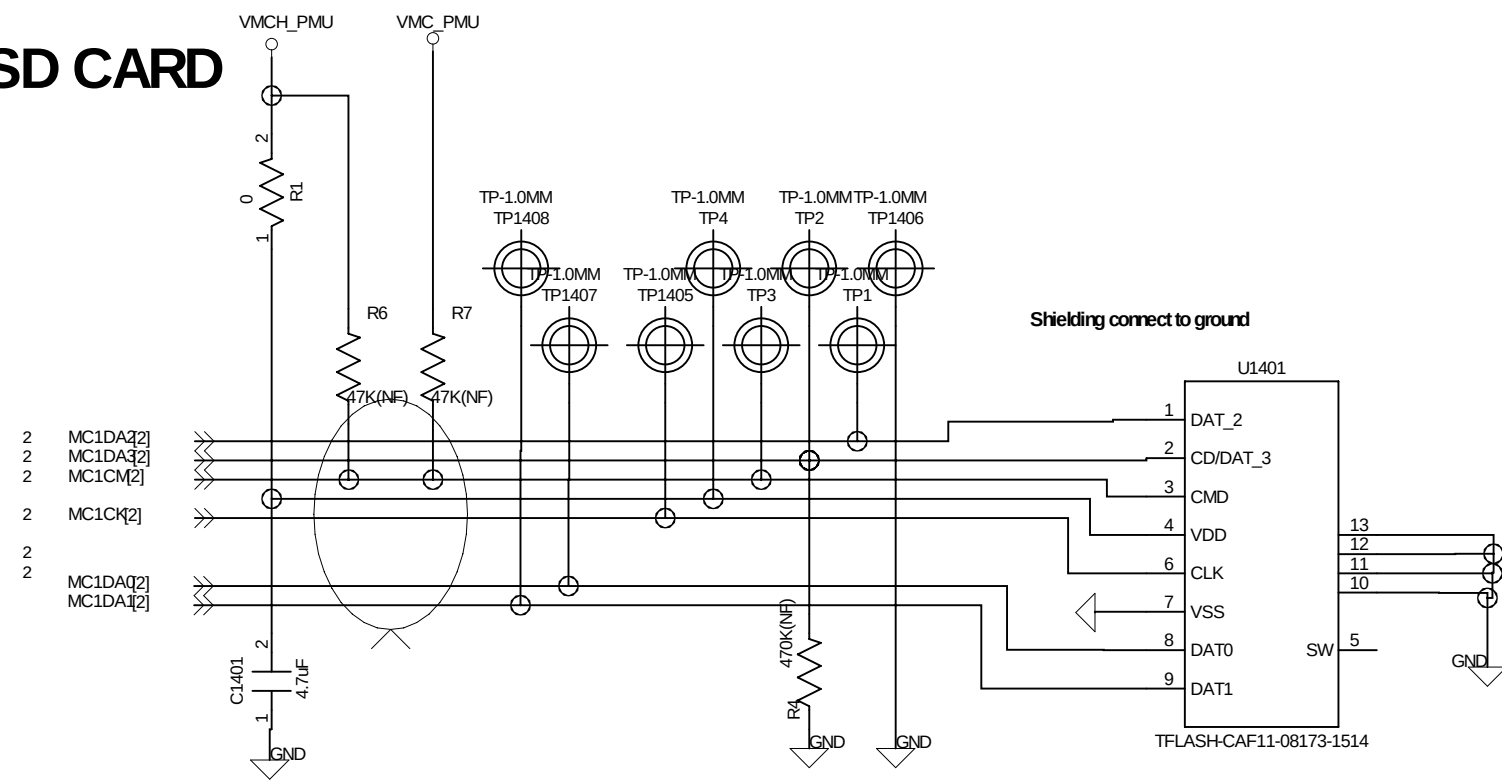


Power Key

DO NOT put pull-up resistor on PWRKEY

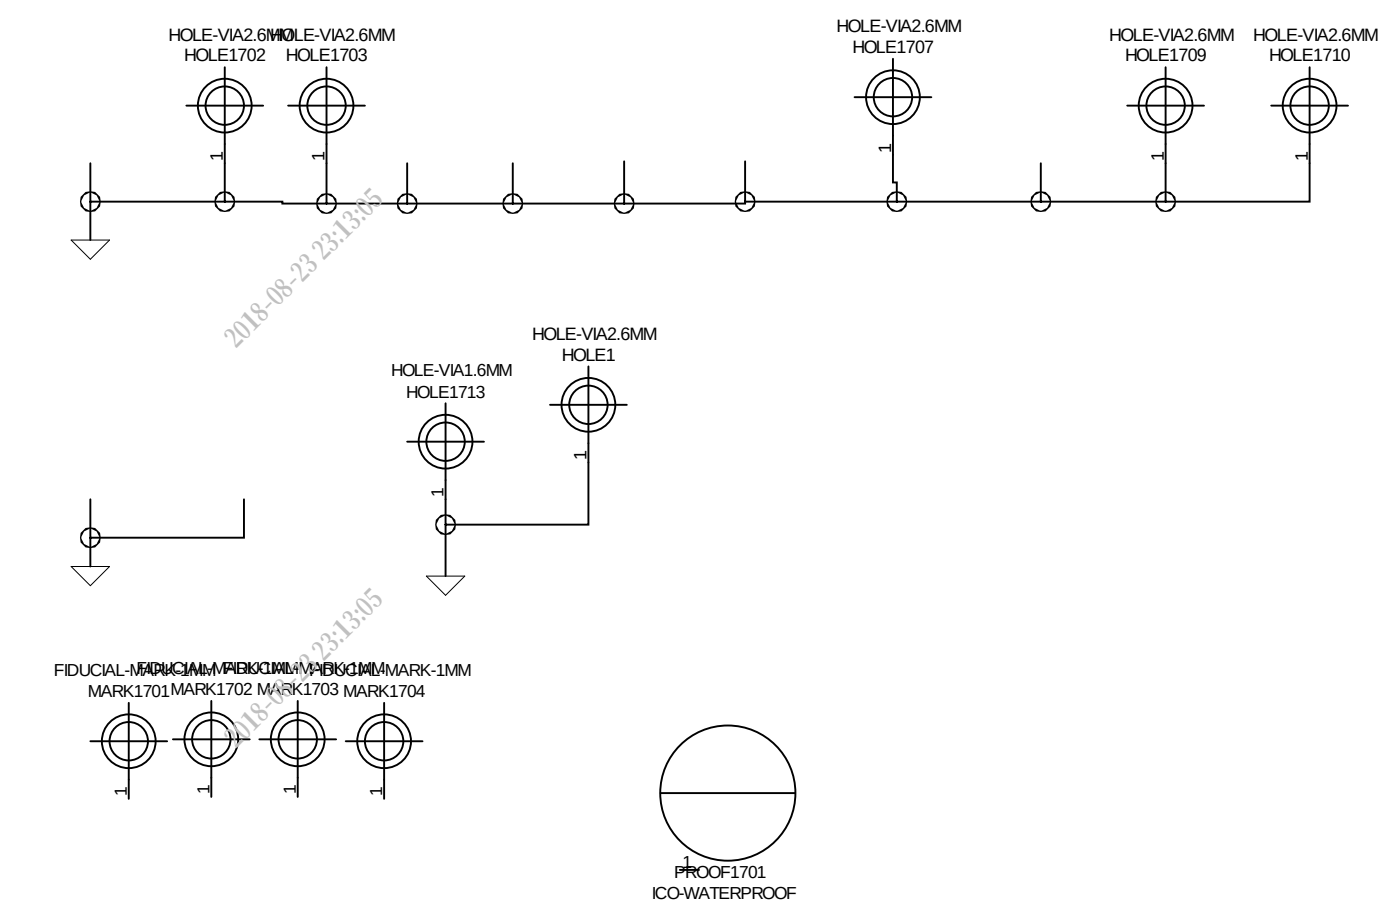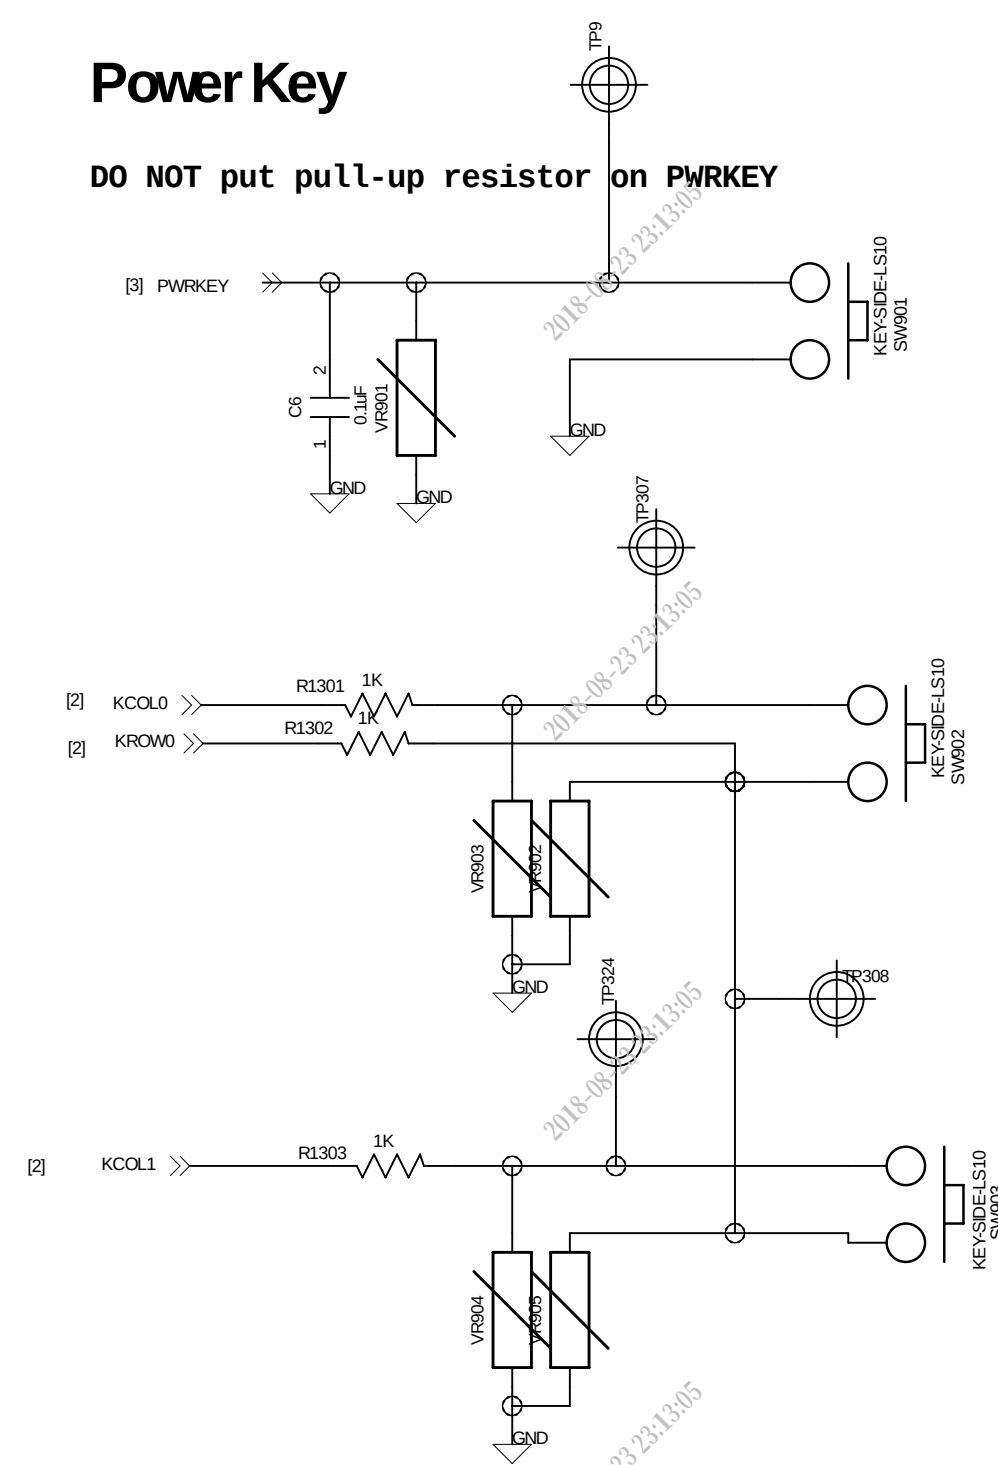


TITLE: <TITLE>		REV: <REV>
DOCUMENT NO.: 17_KEY_LEDS		SIZED: A1
DEPARTMENT: Hardware DEPT.		
COMPANY: 		
DESIGNER: <DESIGNER>	Last Saved Date: 2014-7-3	SHEET: 12 OF 25

Gyroscope

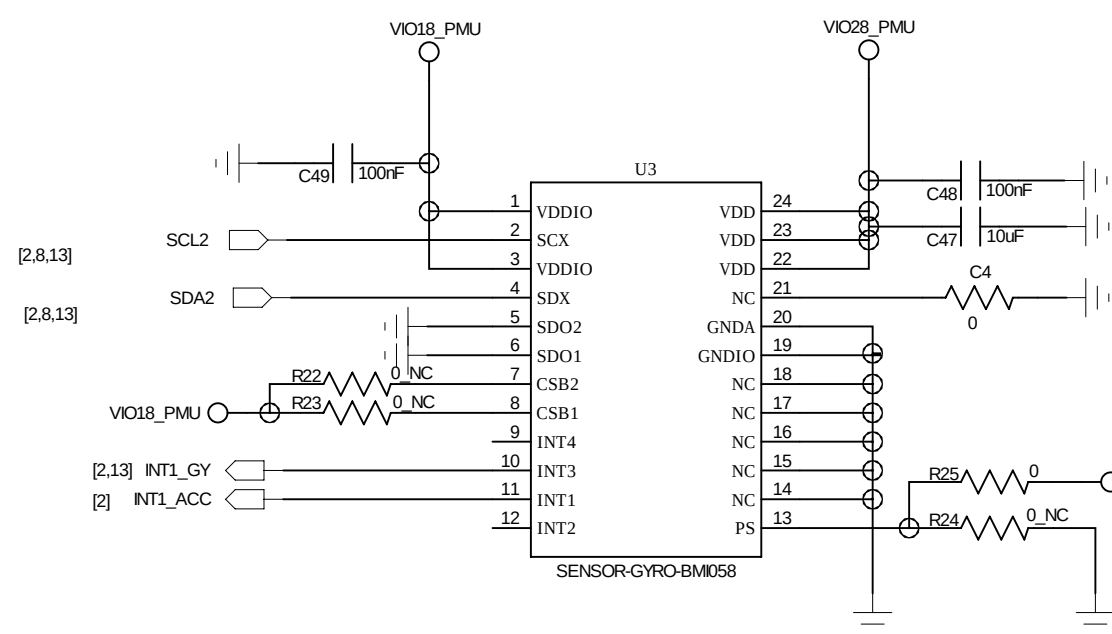


LSM330 C12=0.01uF(25V)
LSM330 R22 R23=0

M-Sensor



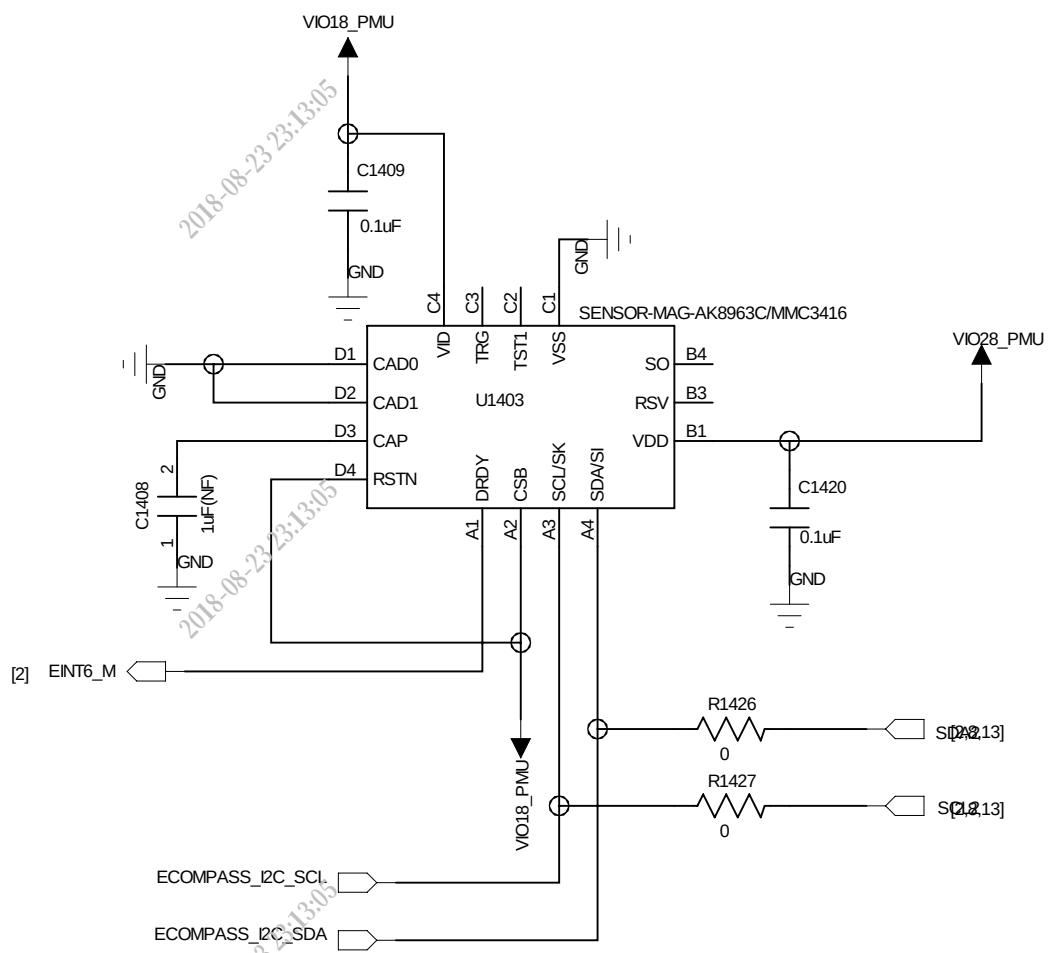




0x18 Write


Gyroscope

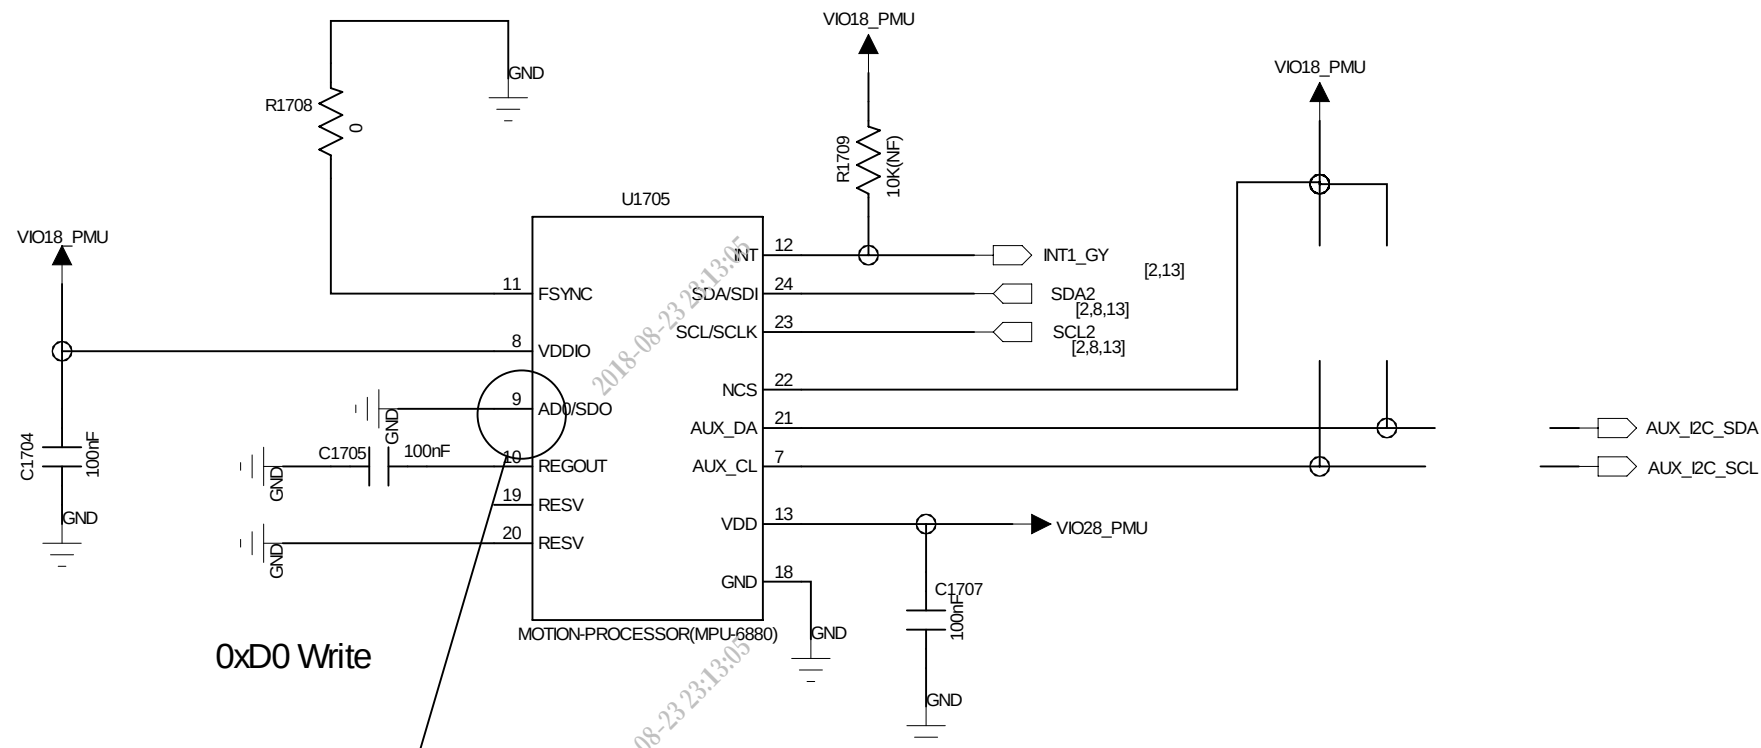

AD0=0 7b1101000 0x68
AD0=1 7b1101001 0x69

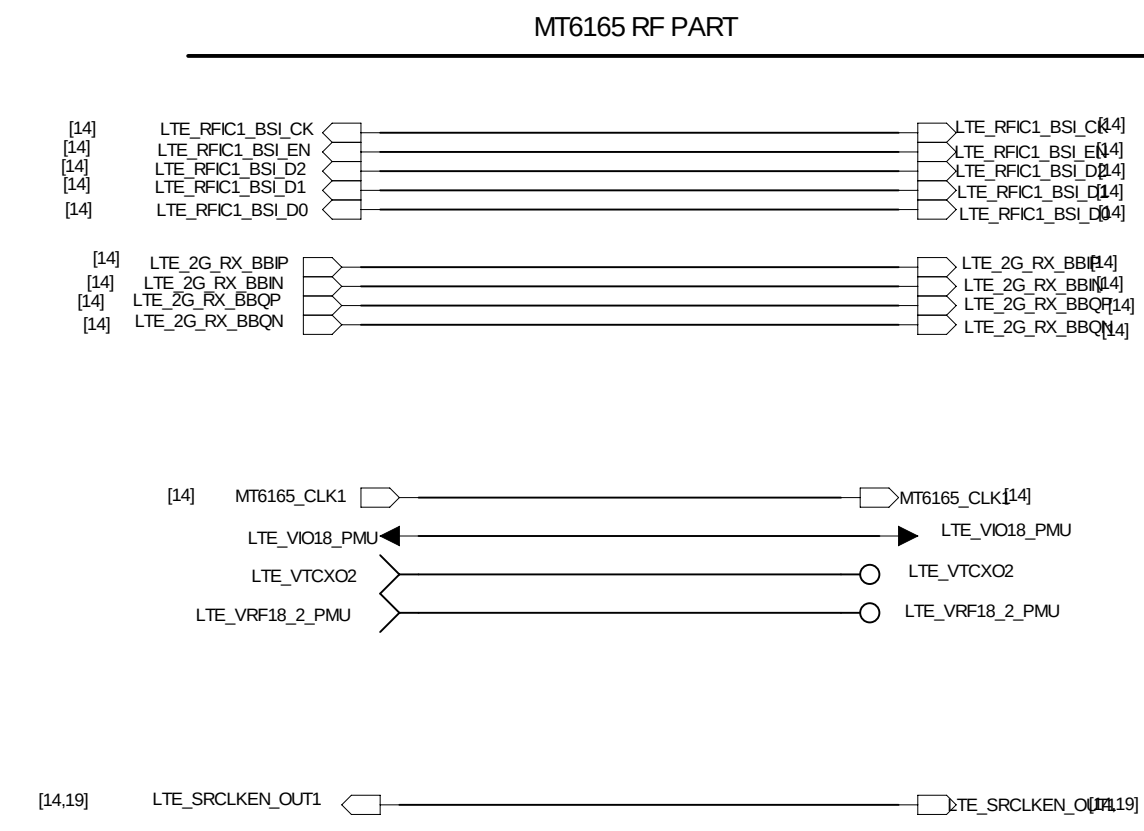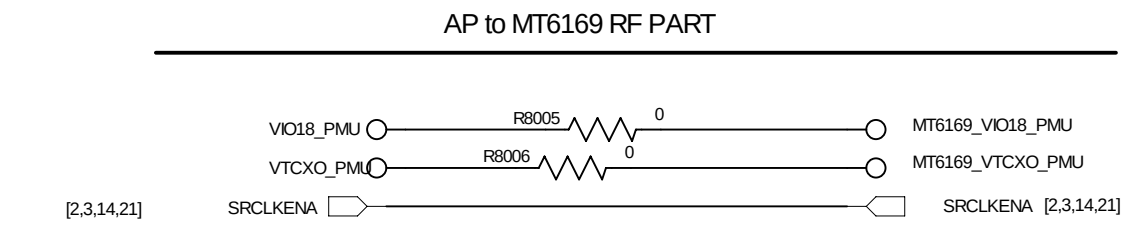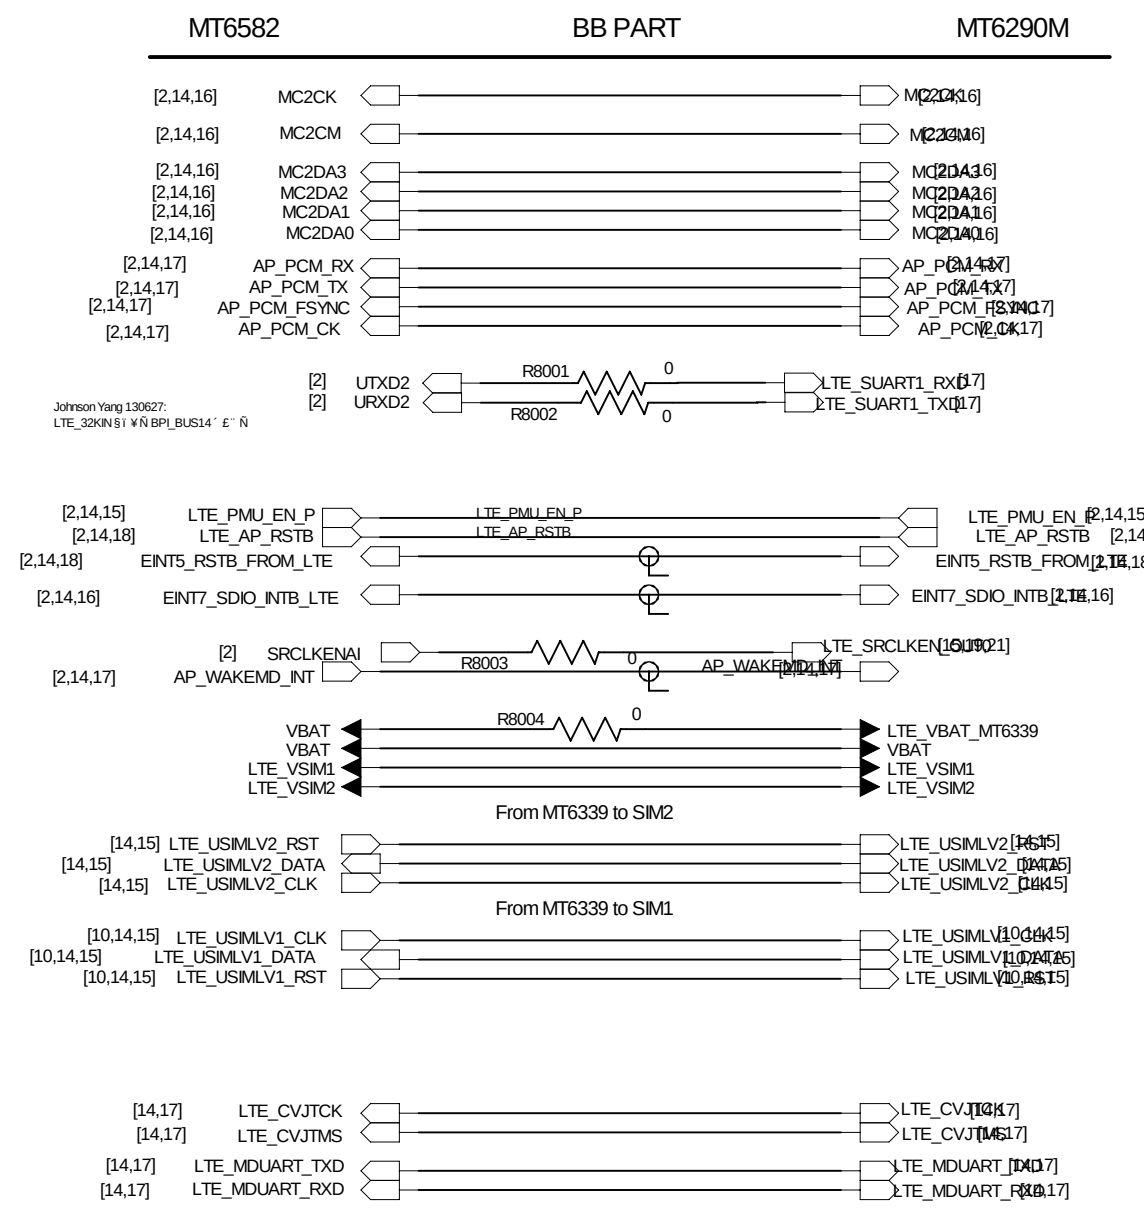

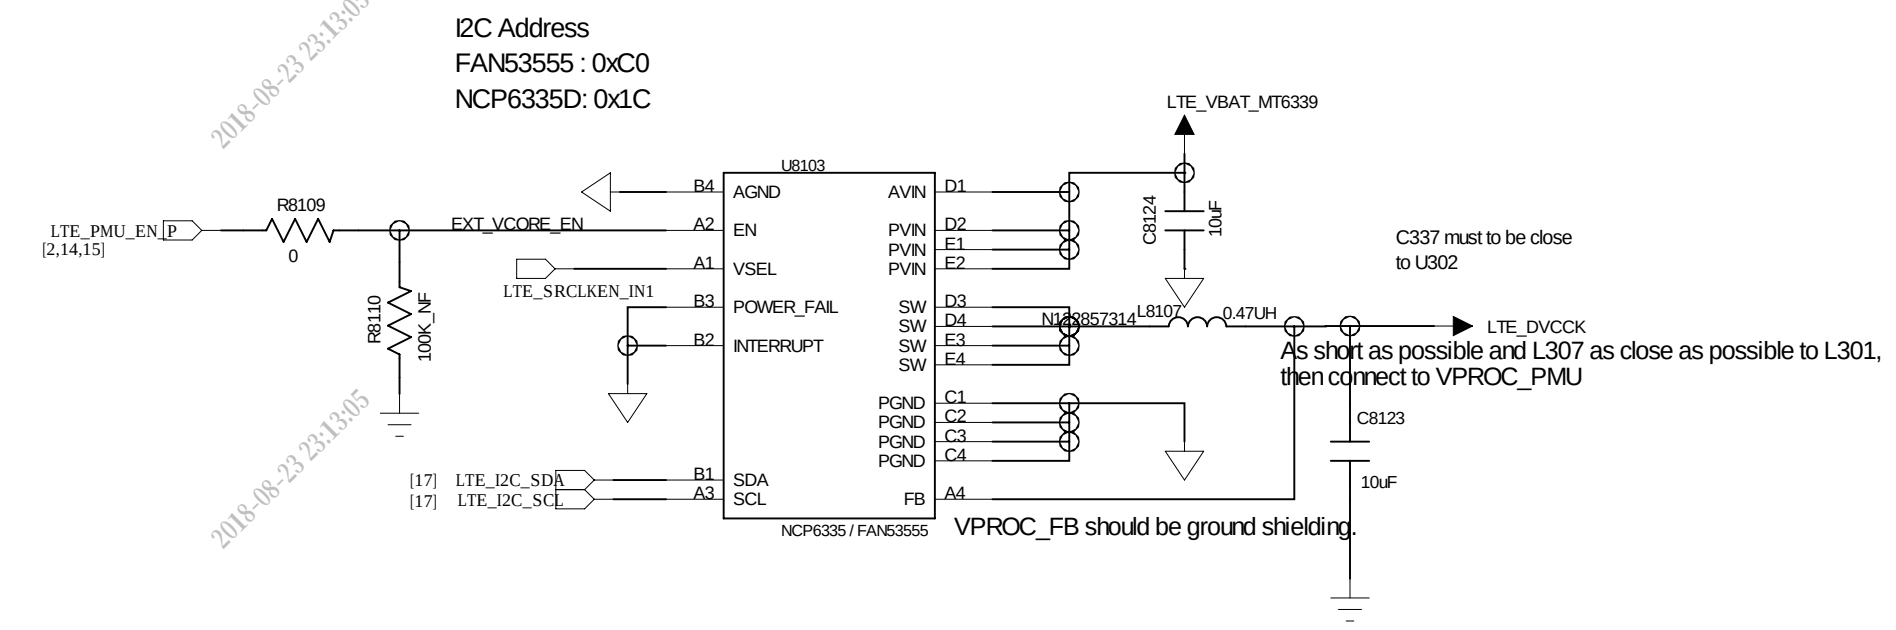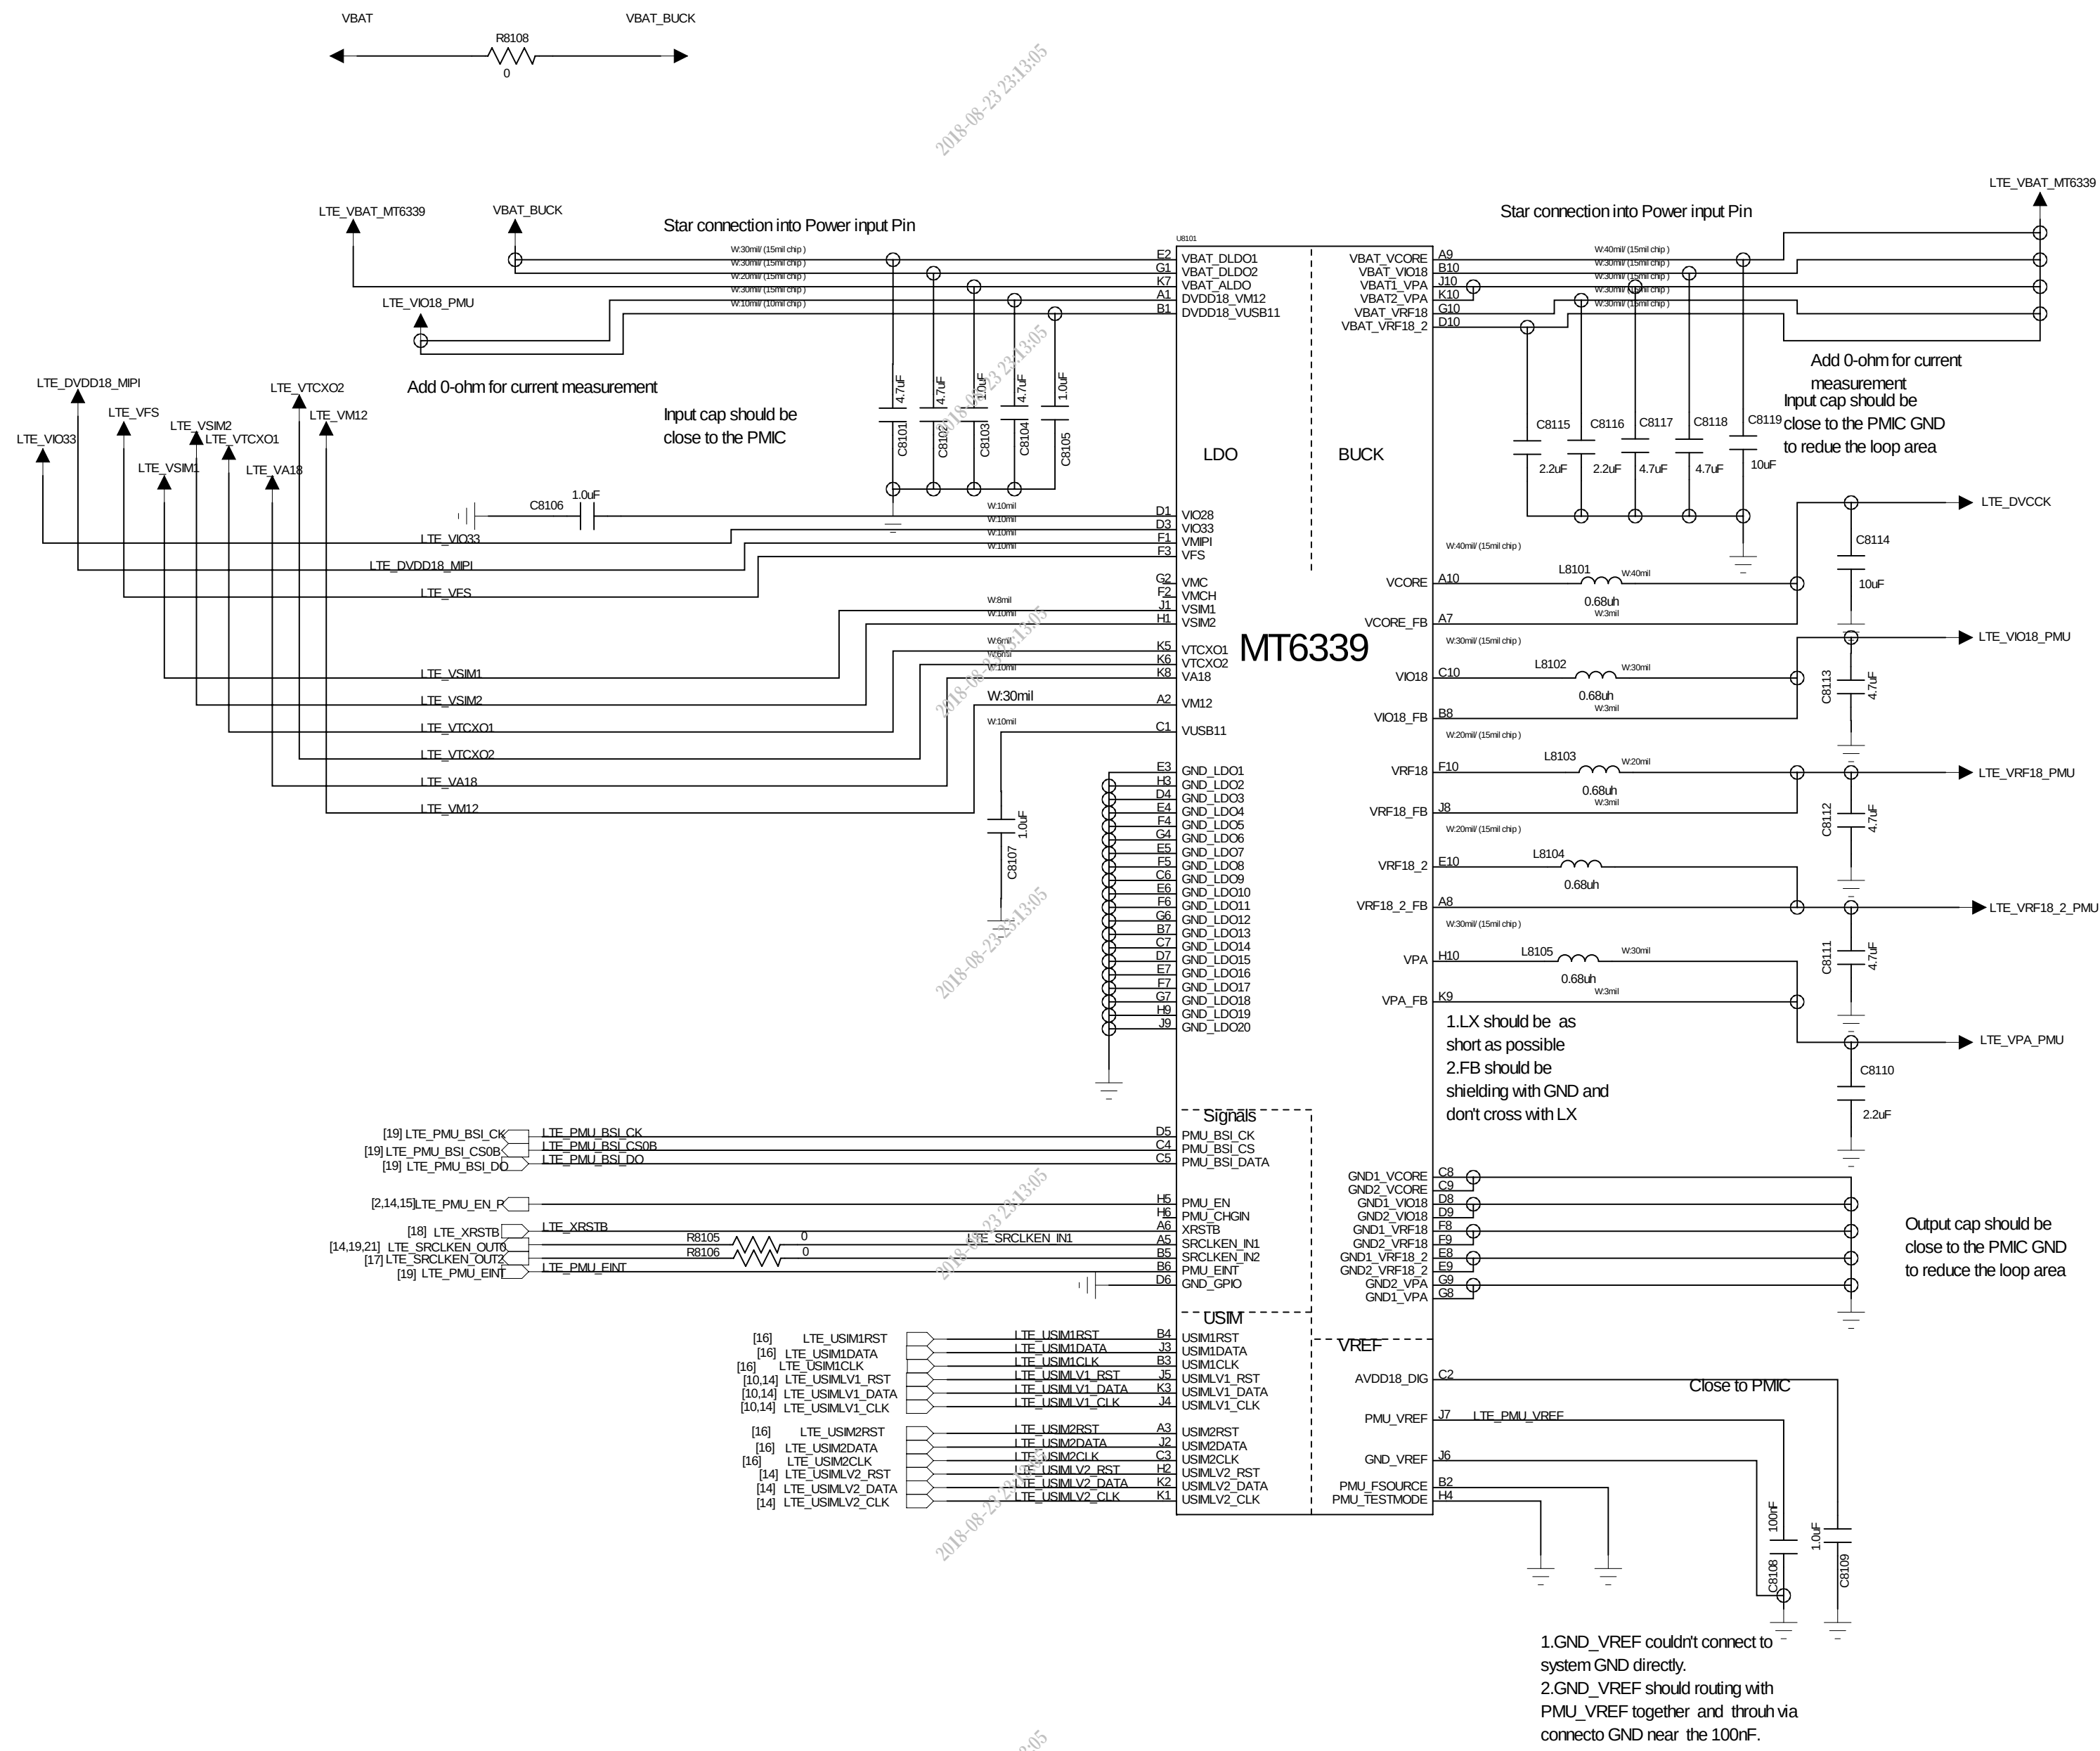

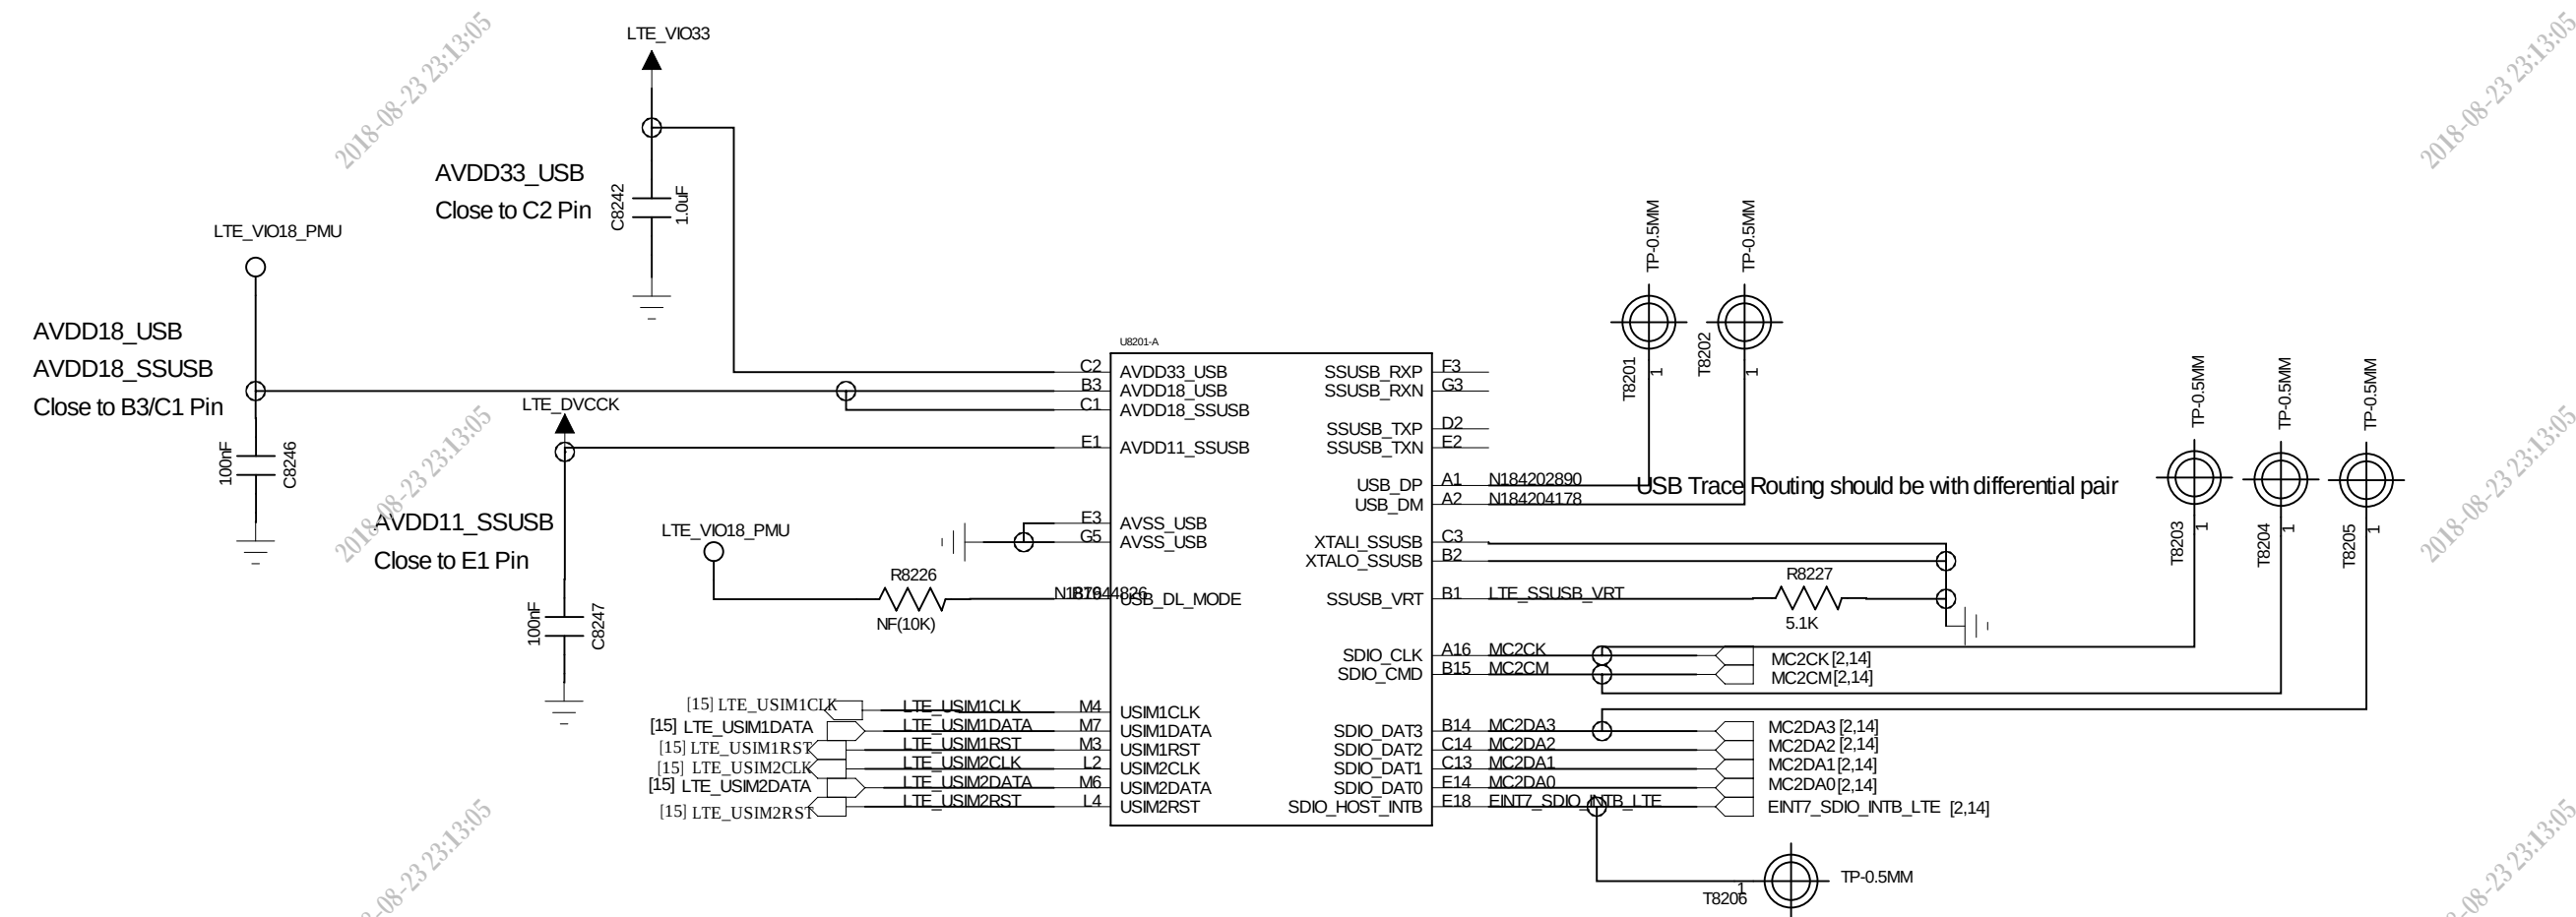

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05




2018-08-23 23:13:05















2018-08-23 23:13:05

2018-08-23 23:13:05

2018-08-23 23:13:05


2018-08-23 23:13:05

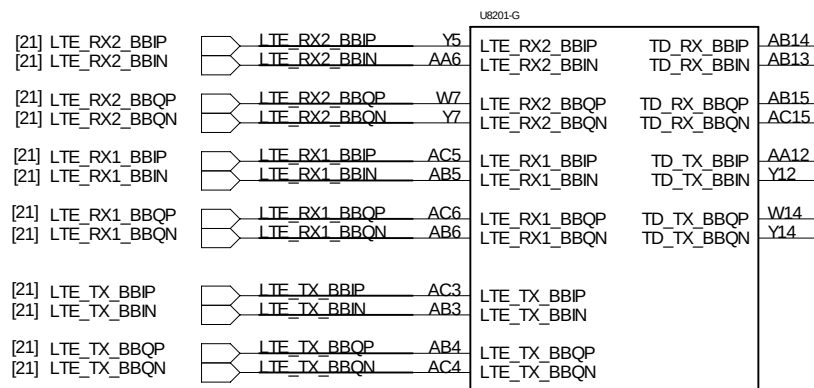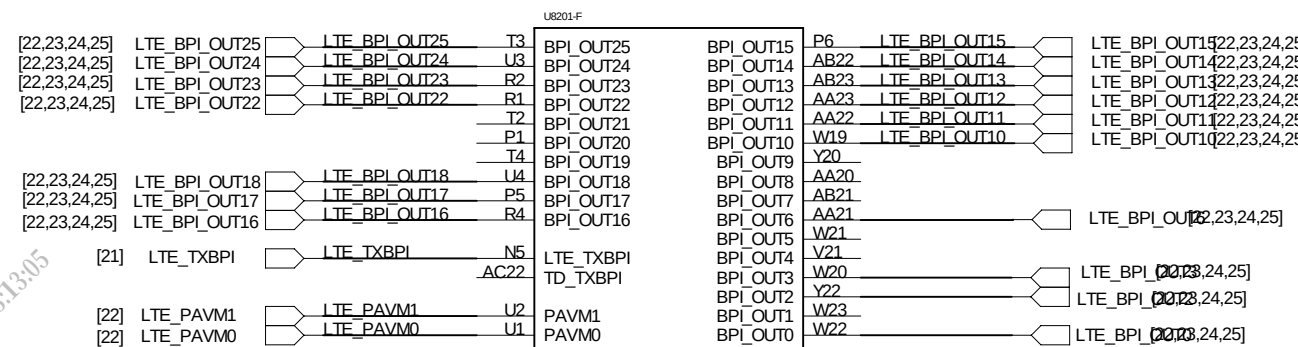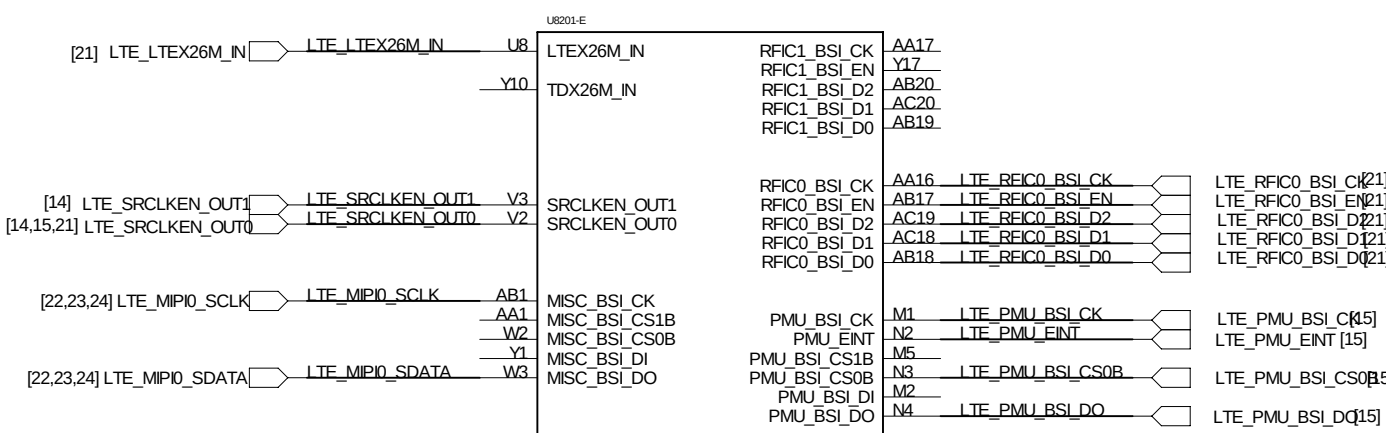

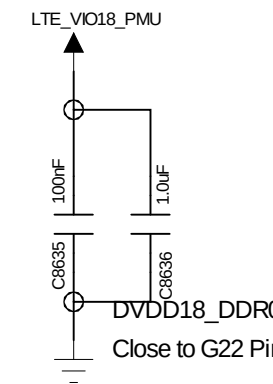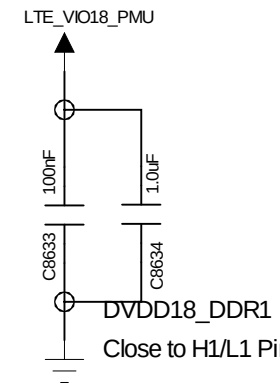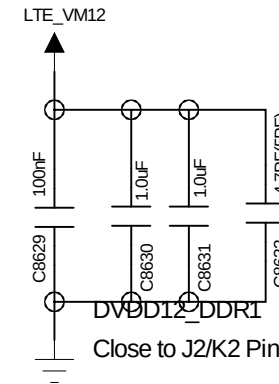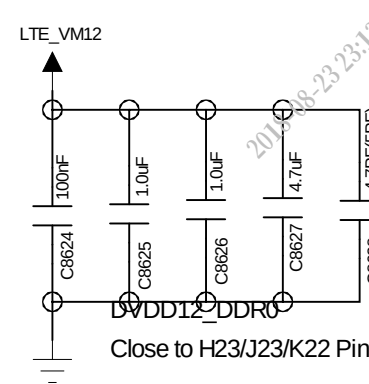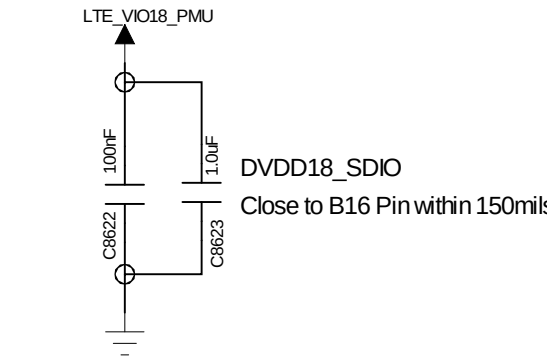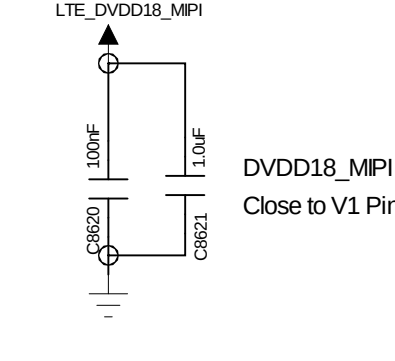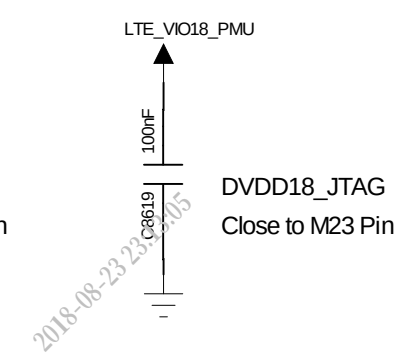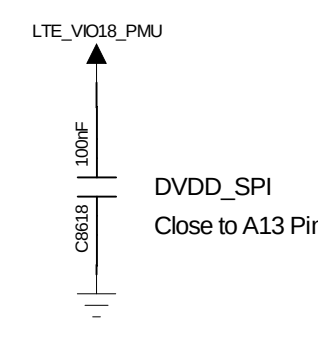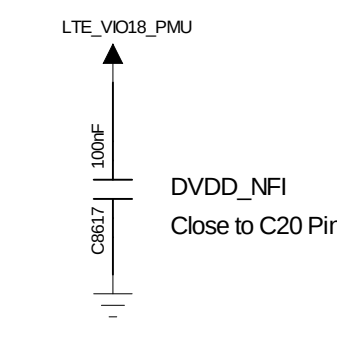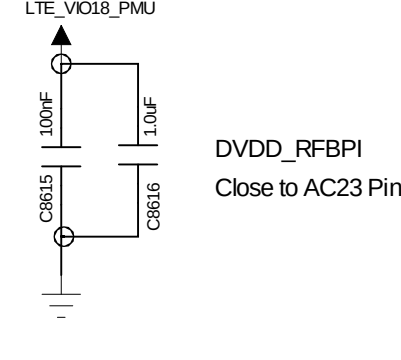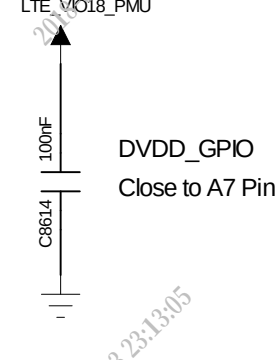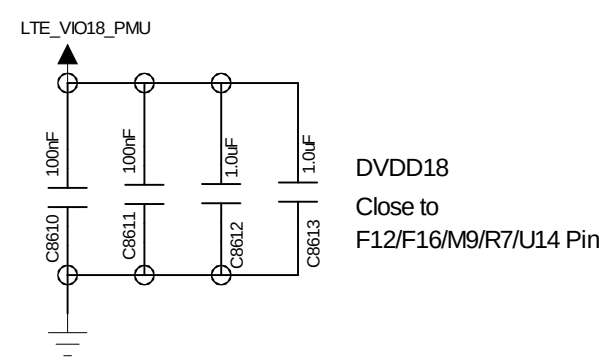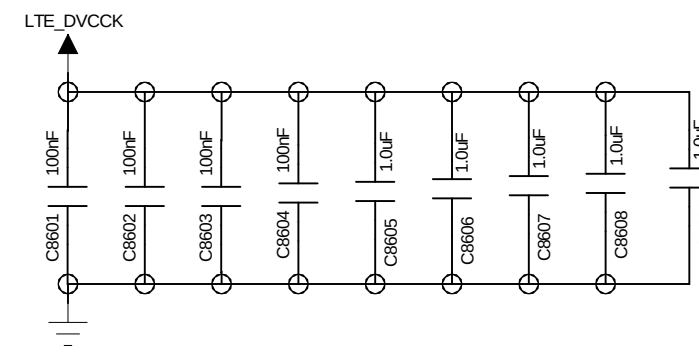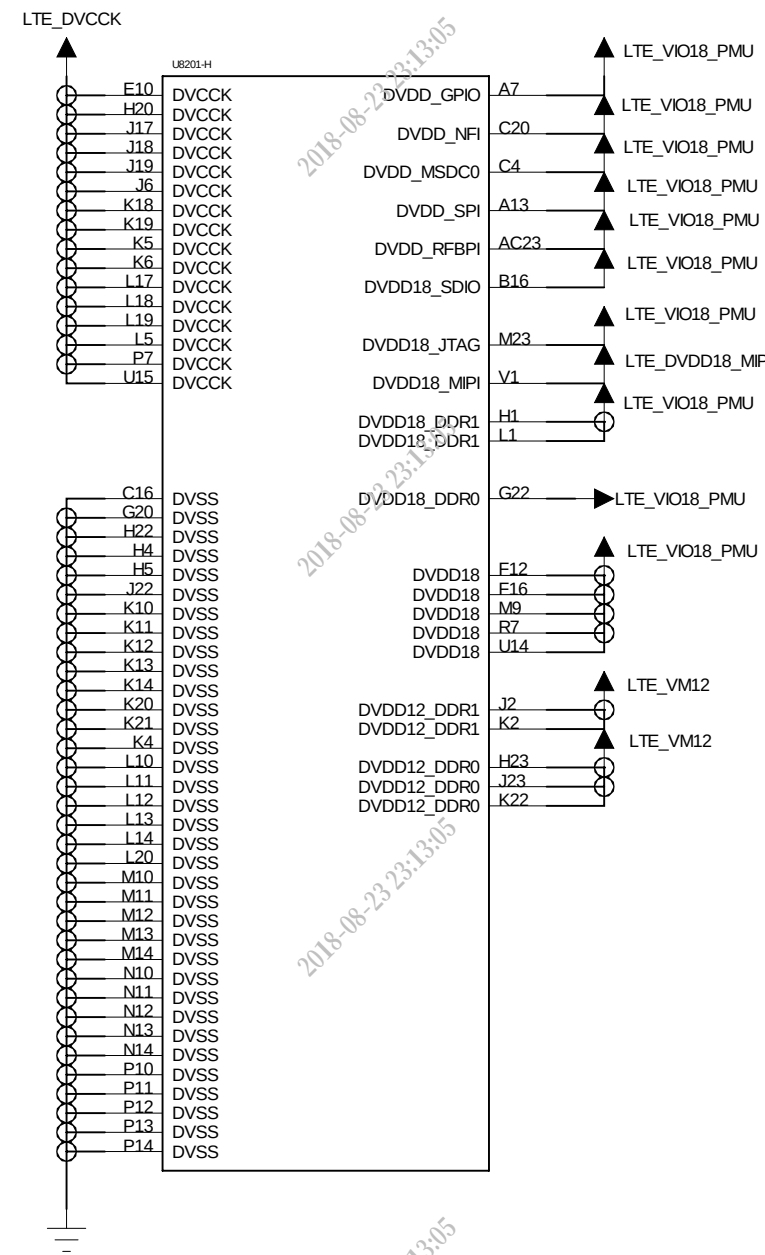





Power Net Connection

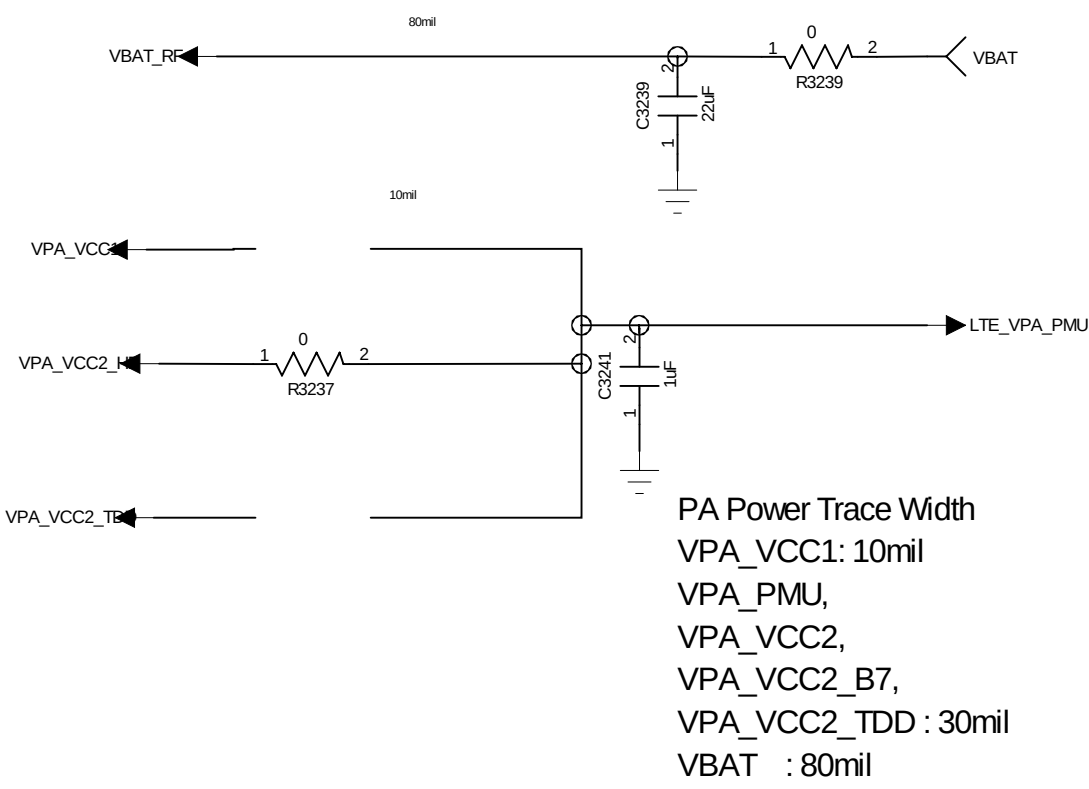

R3115 R3116 105A·A·
MTK²ÊÉ4R3114 R3115 R3116 0201·â×°

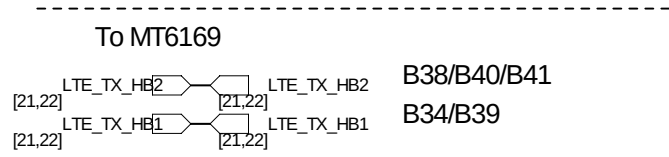


BPI config.

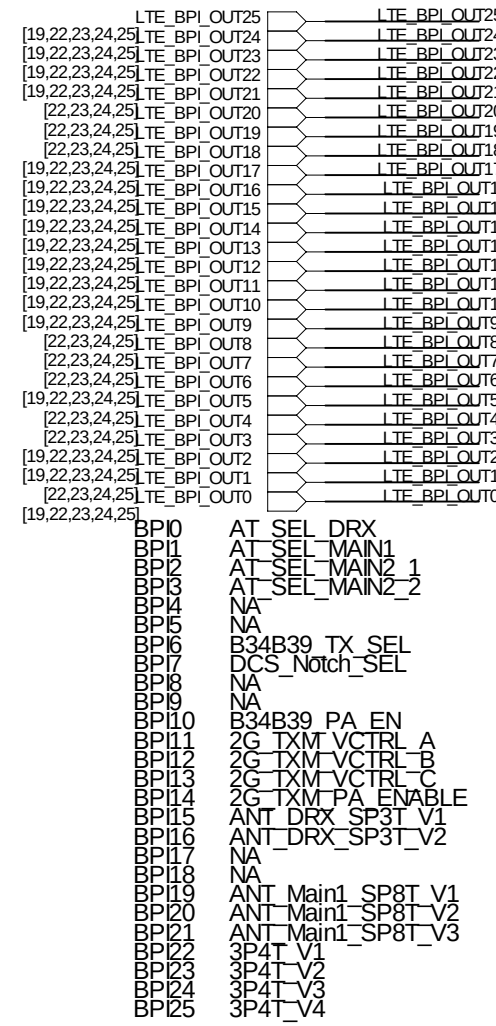


PA VMode to MT6290 (SKY77761)



MIPI (To MT6290/6339)

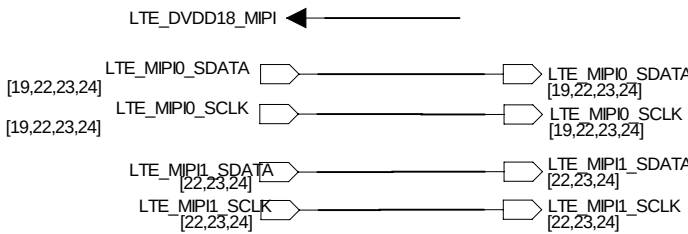


To LTE_VTCXO1 (0ohm to MT6339)



VDD_RFSW only connect to
LTE_VTCXO1 by MT6339.
(LTE_VTCXO2 off at CSFB)






PA Power




32_RF_MT6169_RF_TX
MTK Confidential
Tuesday, December 17, 2013

TITLE:	<TITLE>	REV:	<REV>
DOCUMENT NO:	32_RF_MT6169_RF_TX	SIZED:	A1
DEPARTMENT:	Hardware DEPT.		
COMPANY:	WINGTEC		
DESIGNER:	<DESIGNER>	Last Saved Date:	2014-7-3
		SHEET:	22 OF 25


DRX ANT: 1880~2690MHz

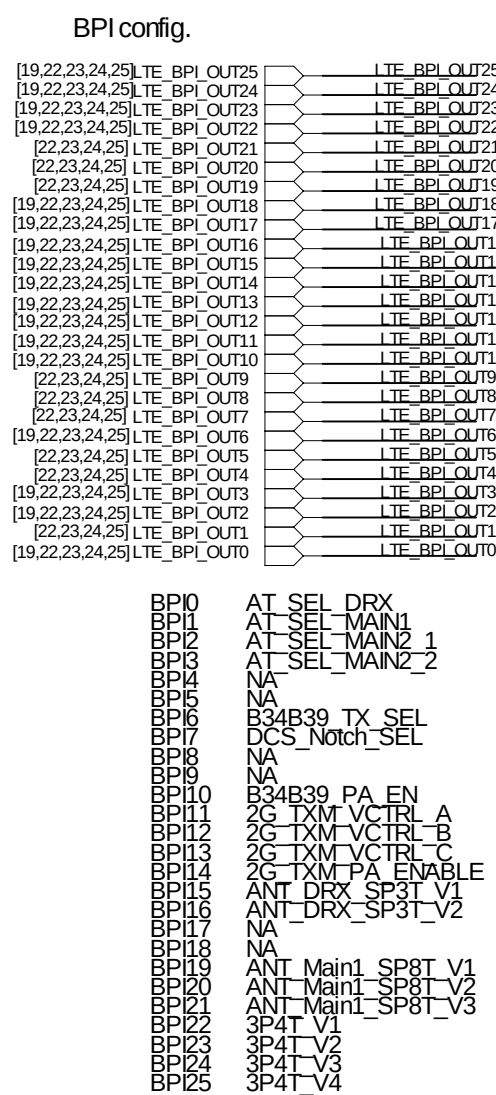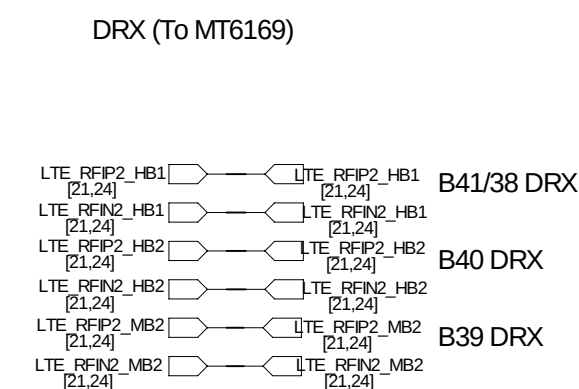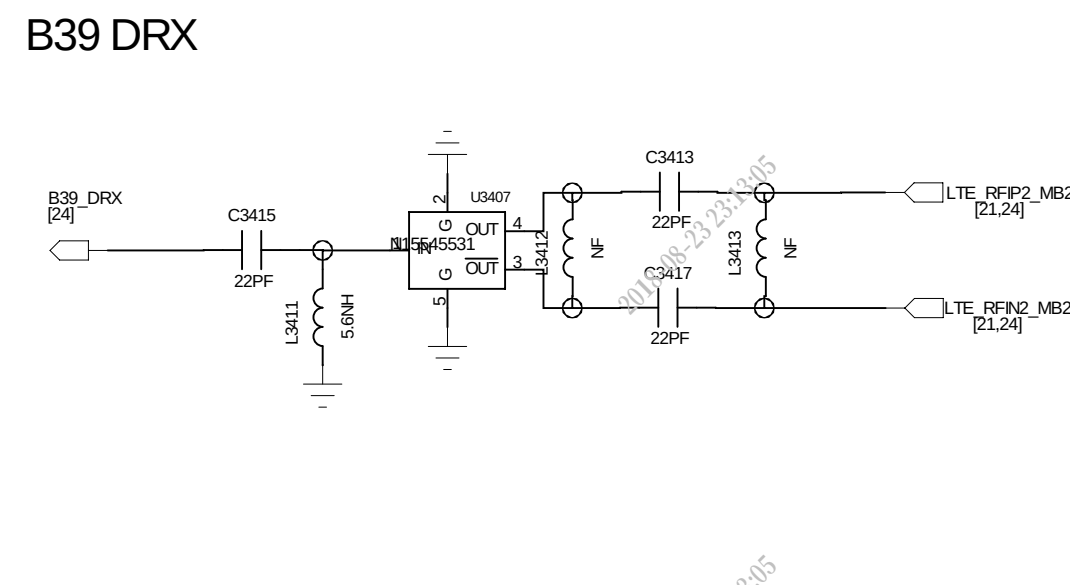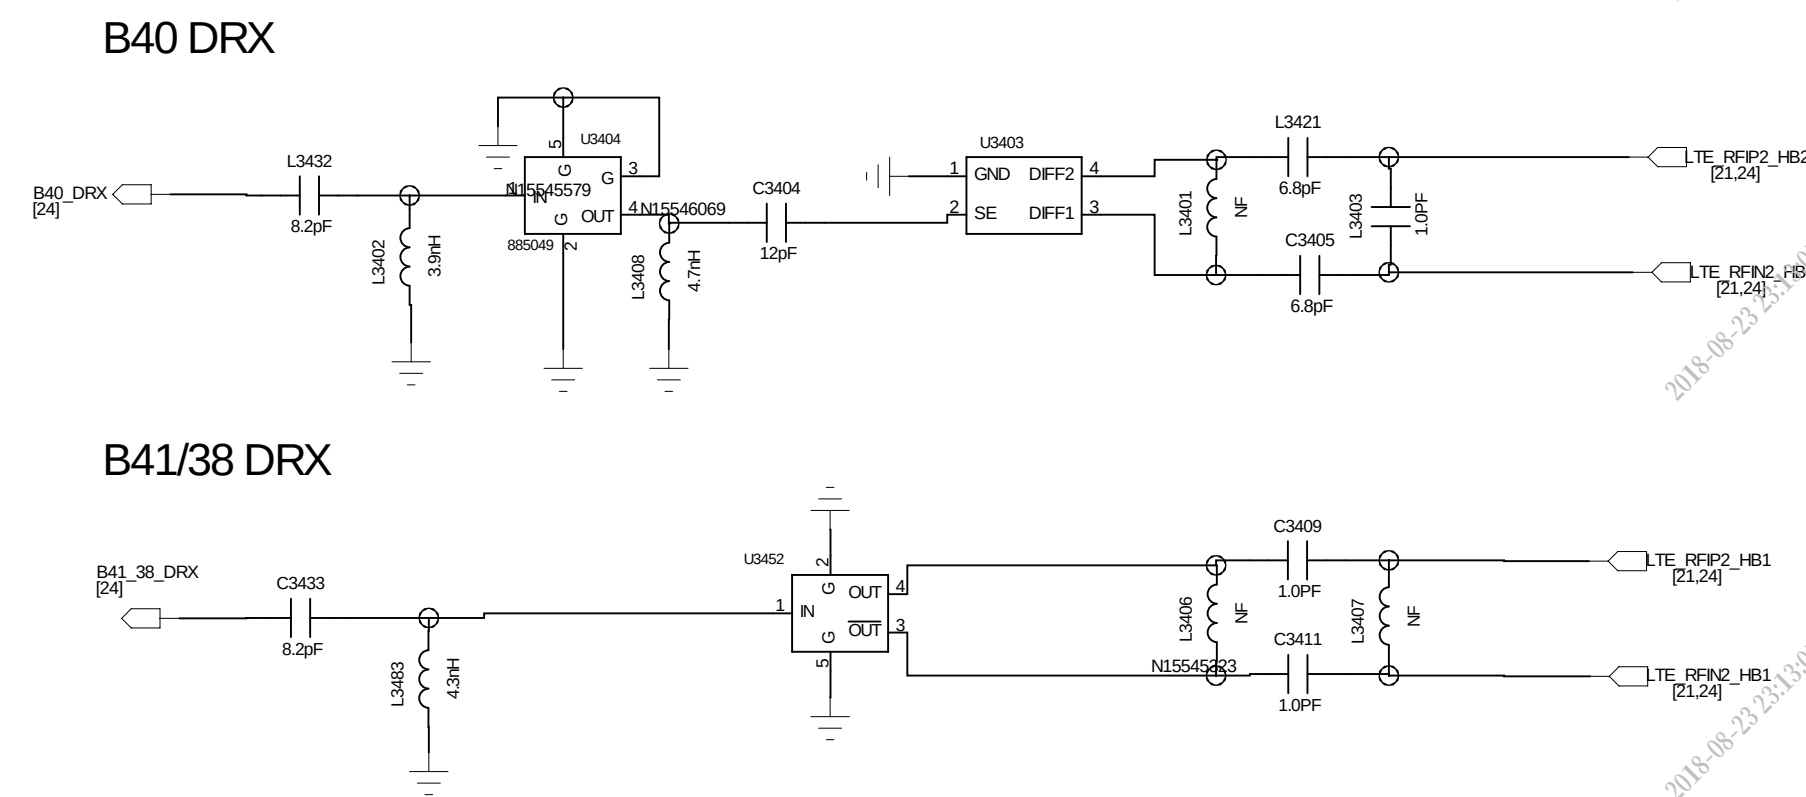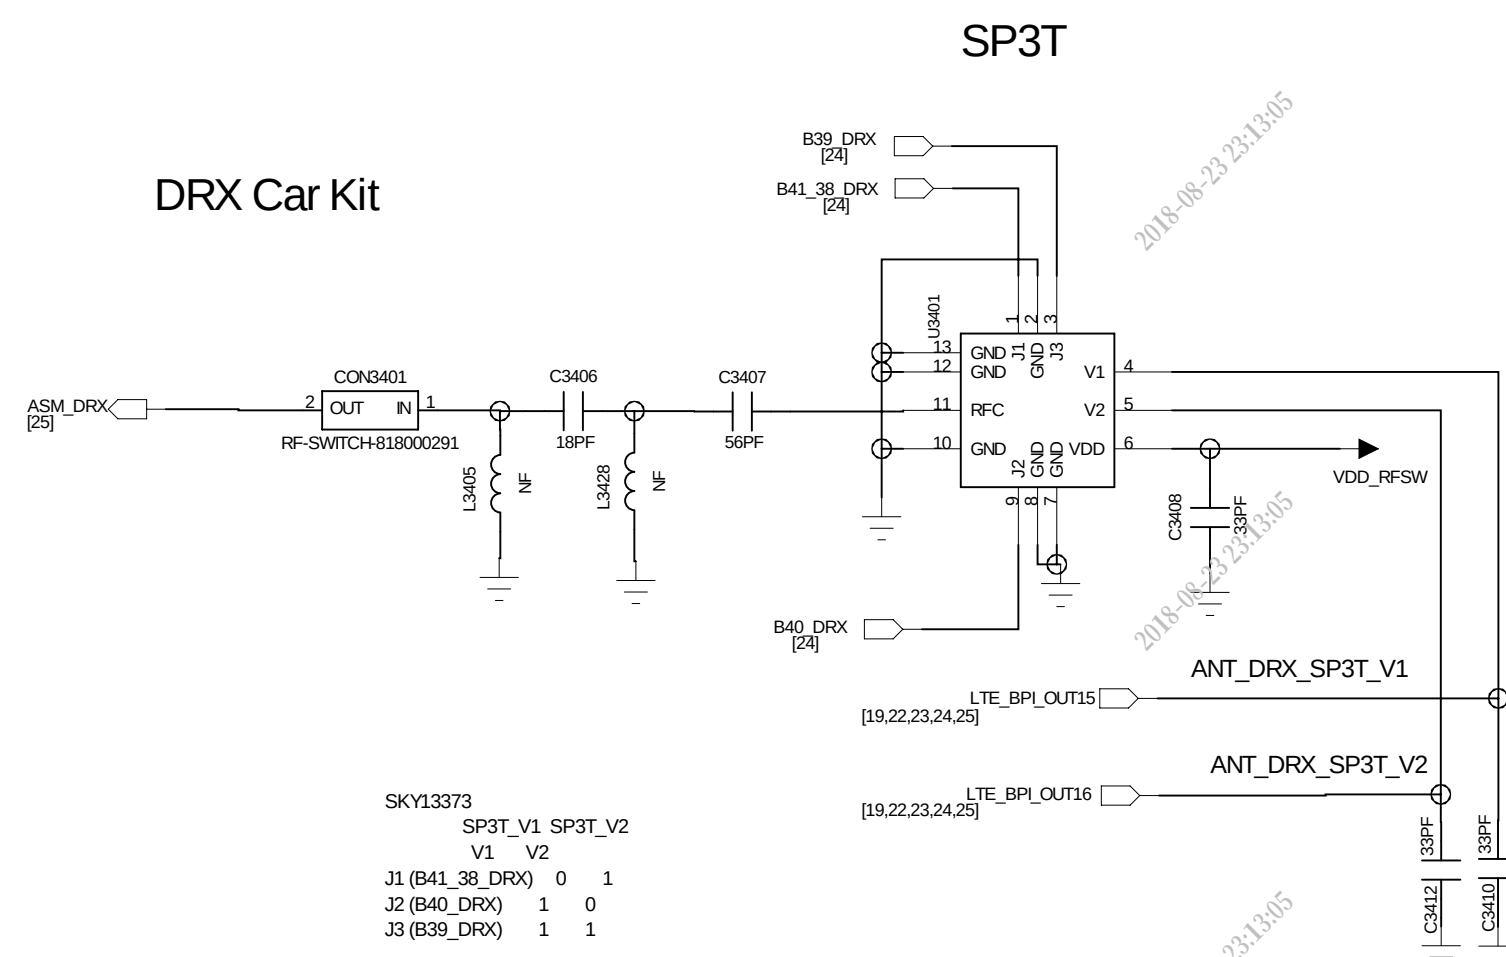

To LTE_VTCXO1 (0ohm to MT6339)

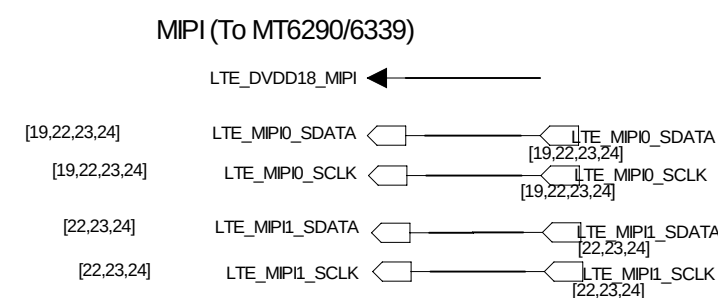

TITLE: <TITLE>		REV: <REV>	
DOCUMENT NO.: 34_RF_MT6169_RF_DRX		SIZED: A1	
DEPARTMENT: Hardware DEPT.			
COMPANY: 			
DESIGNER: <DESIGNER>	List Saved Date: 2014-7-3	SHEET: 24 OF 25	



To LTE_VTCXO1 (0ohm to MT6339)

19:22.23.24.24.1 LTE BPI OUT25	LTE BPI OUT25
19:22.23.24.24.1 LTE BPI OUT24	LTE BPI OUT24
19:22.23.24.24.1 LTE BPI OUT23	LTE BPI OUT23
19:22.23.24.24.1 LTE BPI OUT22	LTE BPI OUT22
19:22.23.24.24.1 LTE BPI OUT21	LTE BPI OUT21
19:22.23.24.24.1 LTE BPI OUT20	LTE BPI OUT20
19:22.23.24.1 LTE BPI OUT19	LTE BPI OUT19
19:22.23.24.1 LTE BPI OUT18	LTE BPI OUT18
19:22.23.24.1 LTE BPI OUT17	LTE BPI OUT17
19:22.23.24.1 LTE BPI OUT16	LTE BPI OUT16
19:22.23.24.1 LTE BPI OUT15	LTE BPI OUT15
19:22.23.24.1 LTE BPI OUT14	LTE BPI OUT14
19:22.23.24.1 LTE BPI OUT13	LTE BPI OUT13
19:22.23.24.1 LTE BPI OUT12	LTE BPI OUT12
19:22.23.24.1 LTE BPI OUT11	LTE BPI OUT11
19:22.23.24.1 LTE BPI OUT10	LTE BPI OUT10
19:22.23.24.1 LTE BPI OUT9	LTE BPI OUT9
19:22.23.24.1 LTE BPI OUT8	LTE BPI OUT8
19:22.23.24.1 LTE BPI OUT7	LTE BPI OUT7
19:22.23.24.1 LTE BPI OUT6	LTE BPI OUT6
19:22.23.24.1 LTE BPI OUT5	LTE BPI OUT5
19:22.23.24.1 LTE BPI OUT4	LTE BPI OUT4
19:22.23.24.1 LTE BPI OUT3	LTE BPI OUT3
19:22.23.24.1 LTE BPI OUT2	LTE BPI OUT2
19:22.23.24.1 LTE BPI OUT1	LTE BPI OUT1
19:22.23.24.1 LTE BPI OUT0	LTE BPI OUT0

TITLE: <TITLE>		REV: <REV>
DOCUMENT NO.: 36_RF_AT	SIZED: A1	
DEPARTMENT: Hardware DEPT.		
COMPANY: 		
DESIGNER: <DESIGNER>	Last Saved Date: 2014-7-3	SHEET: 25 OF 25