


	CIS	LA
FDD	1/ 3/ 5/ 7/ 8/ 20/ 28	1/2/ 3/4/ 5/ 7/ 8/12/13/17/26/28/66
TDD	38/ 40/ 41	38/ 40/ 41
3G	1/ 5/ 8	1/2/4/ 5/ 8
2G	850/900/1800	850/900/1800/1900

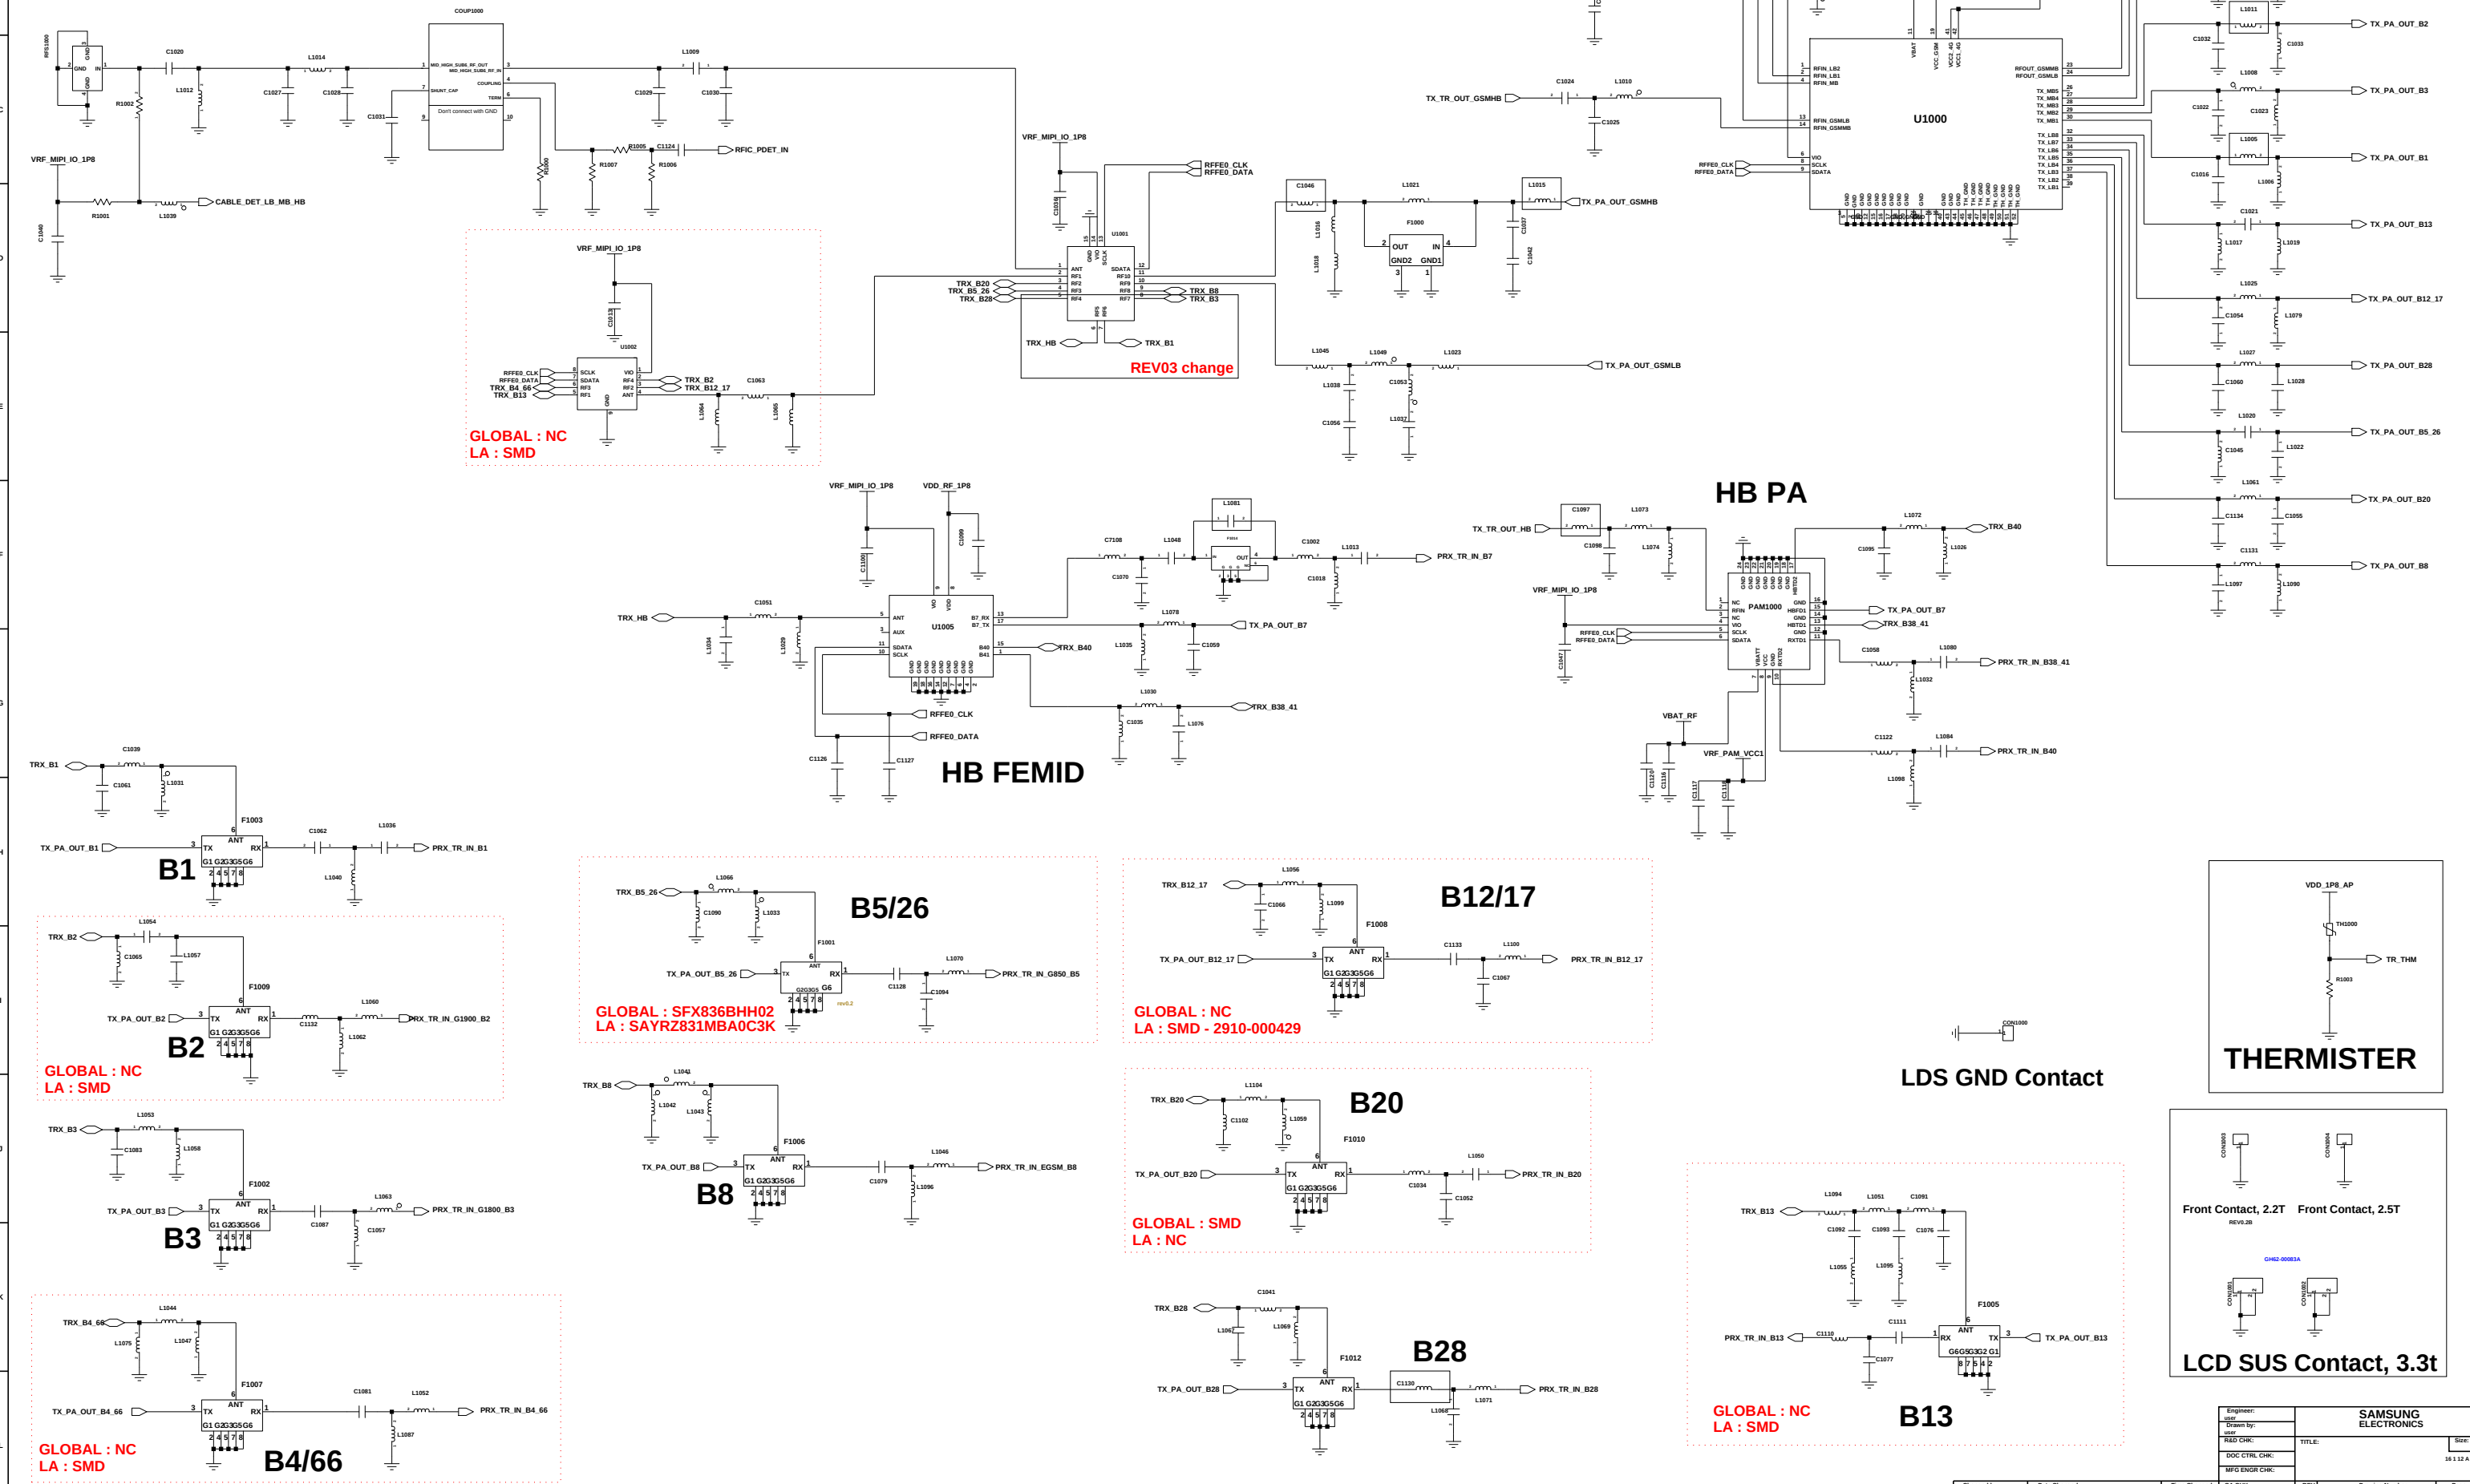


DRX






APT MODULATOR

26MHz TCXO



TRANSCIEVER

Engineer		
Drawn By:		
Revd Chk:	TITLE:	Size
Doc Ctrl Chk:		
Mfg Engr Chk:		
QA Chk:	Drawing Number	27






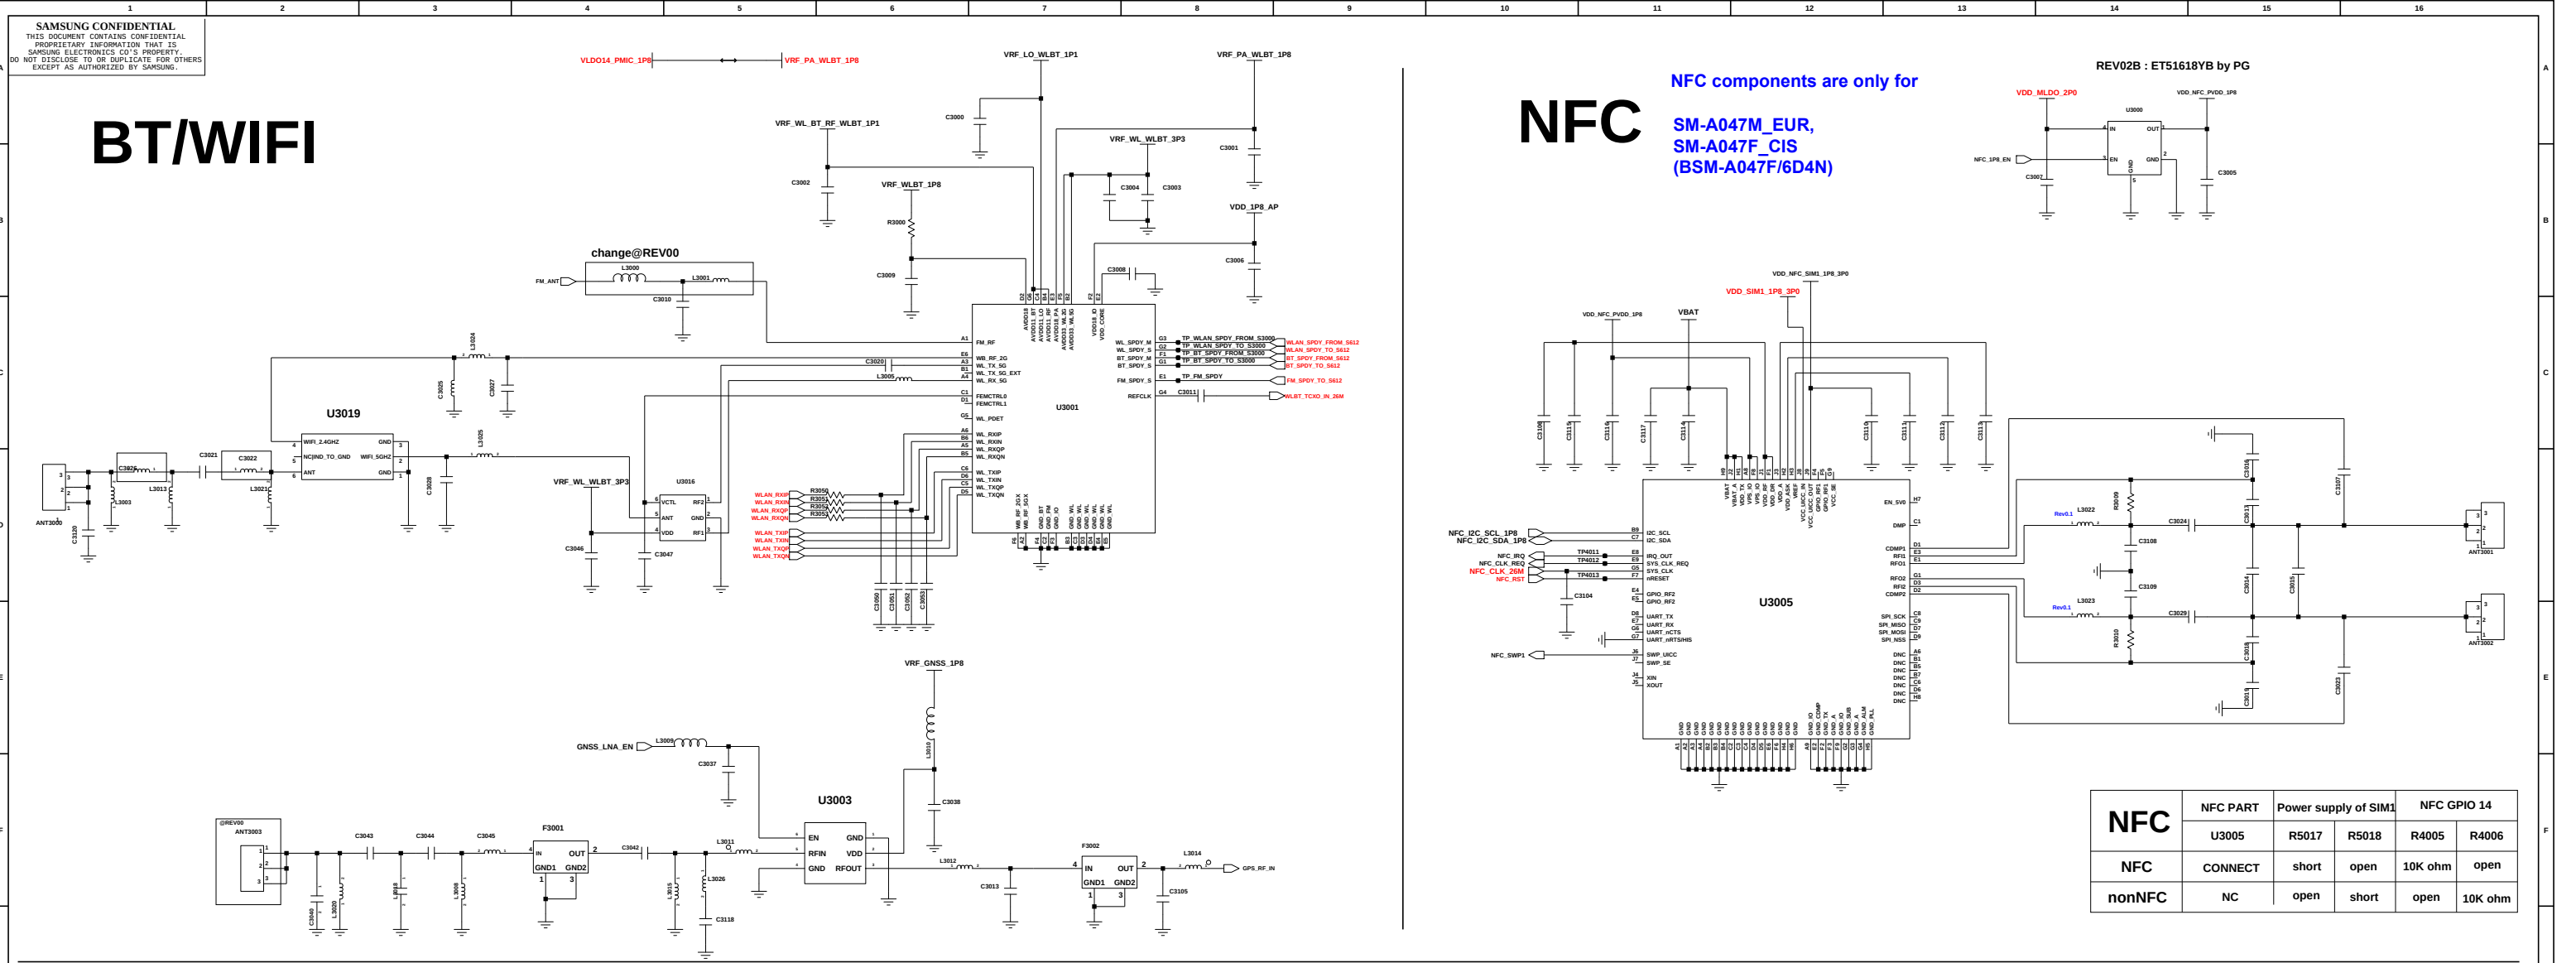


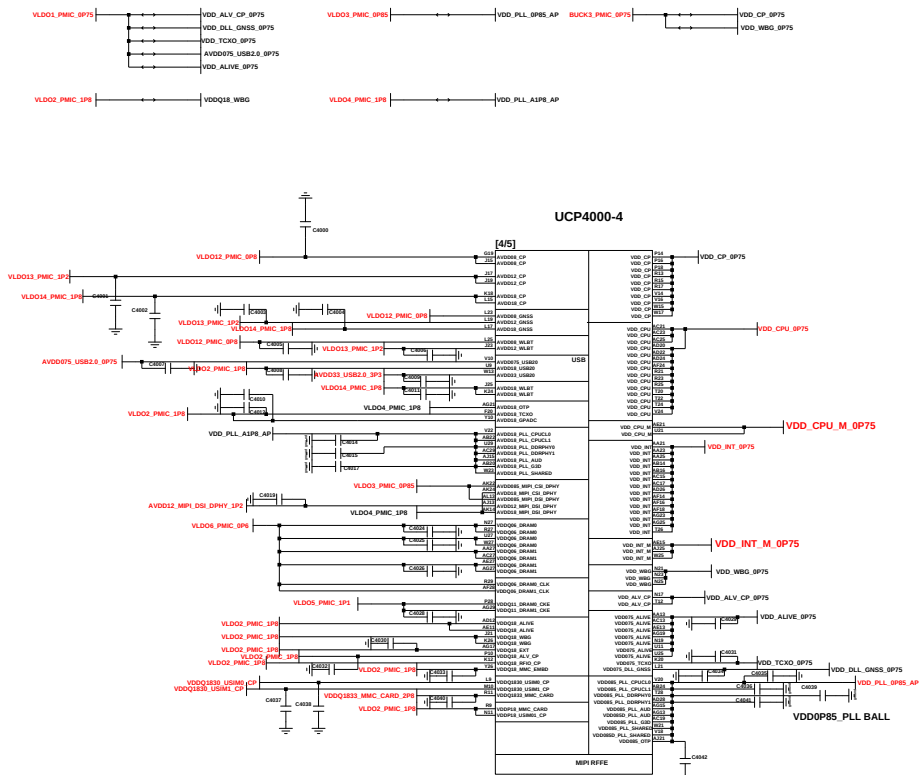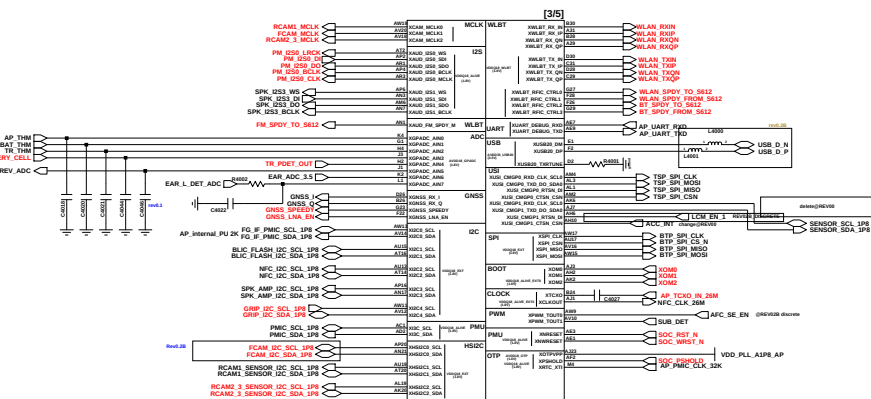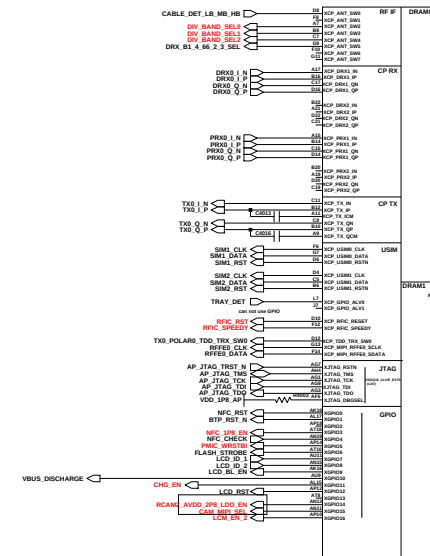

I2C Pull-up Register

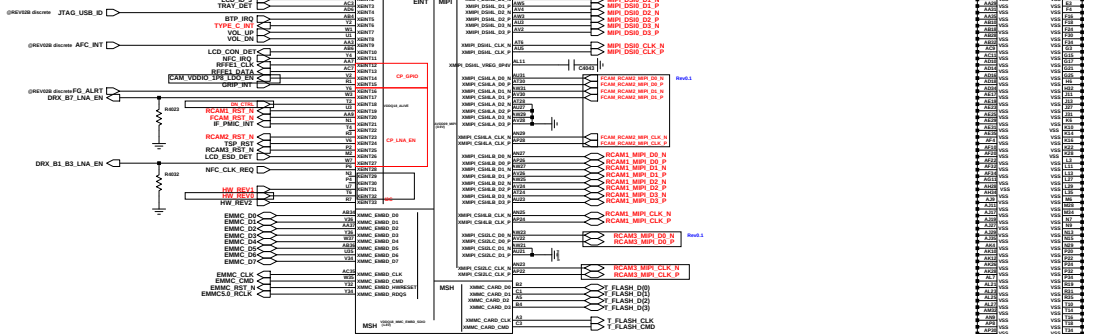


AP Decap




PCB JTAG

Discrete array leakage added

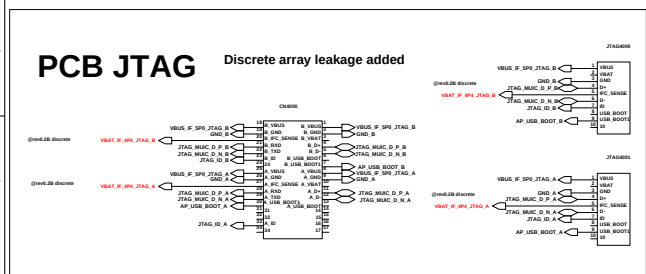




Discrete array leakage added

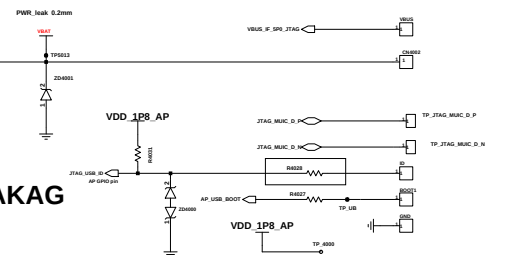


POWER OFF LEAKAG

Engineer:					
Drawn by:					
Field Ck:				TITLE:	Scale:
DOC CTRL CK:					
MFG ENGR CK:					
QA CK:	REV:	Drawing Number:	Page: 4/7		


MAIN_PMIC

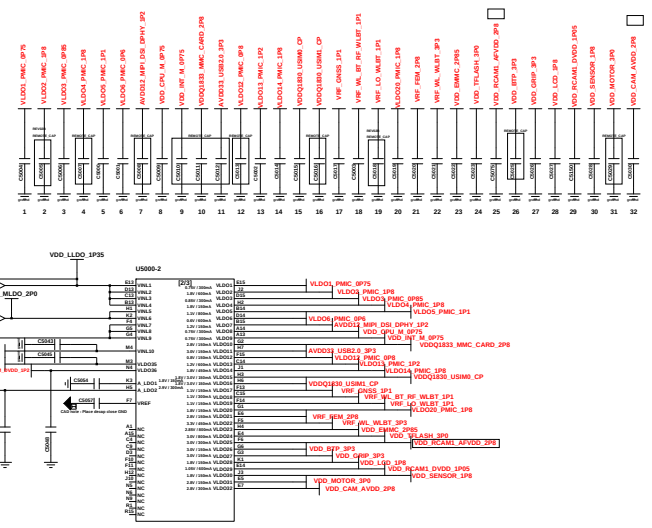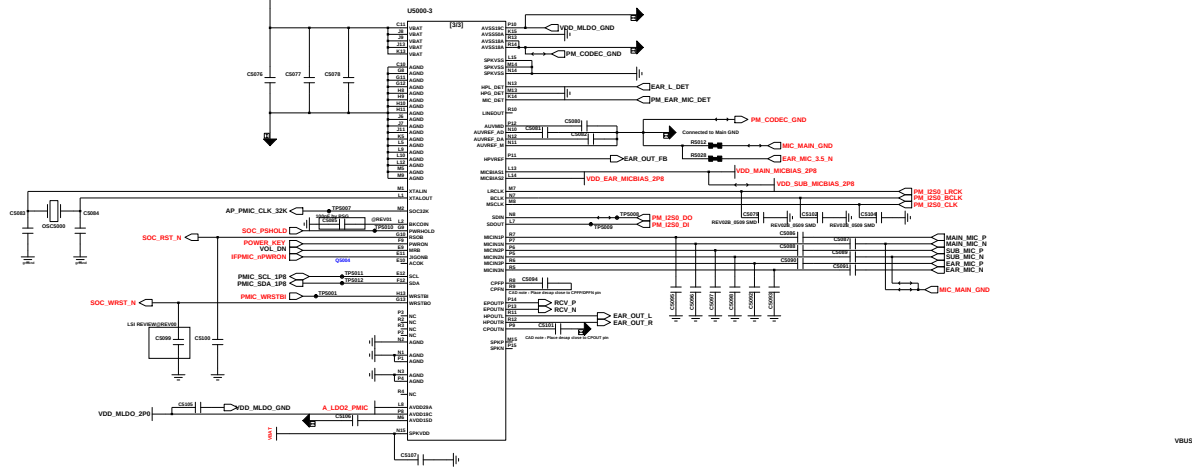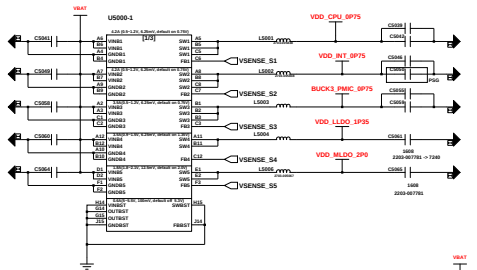

SIM & SD CARD (3IN3)

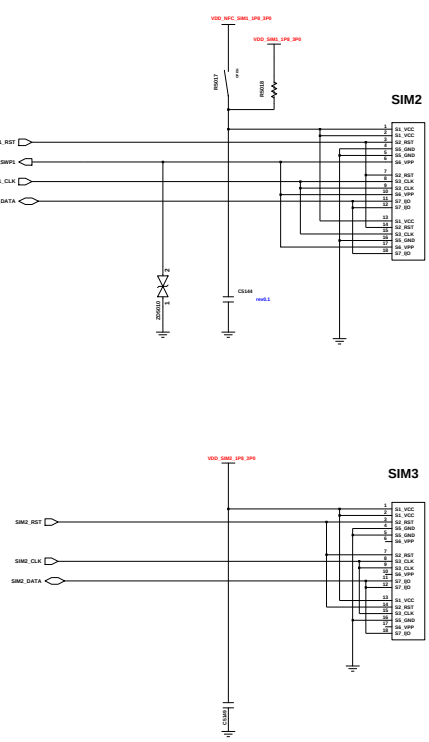


VOLUME KEY

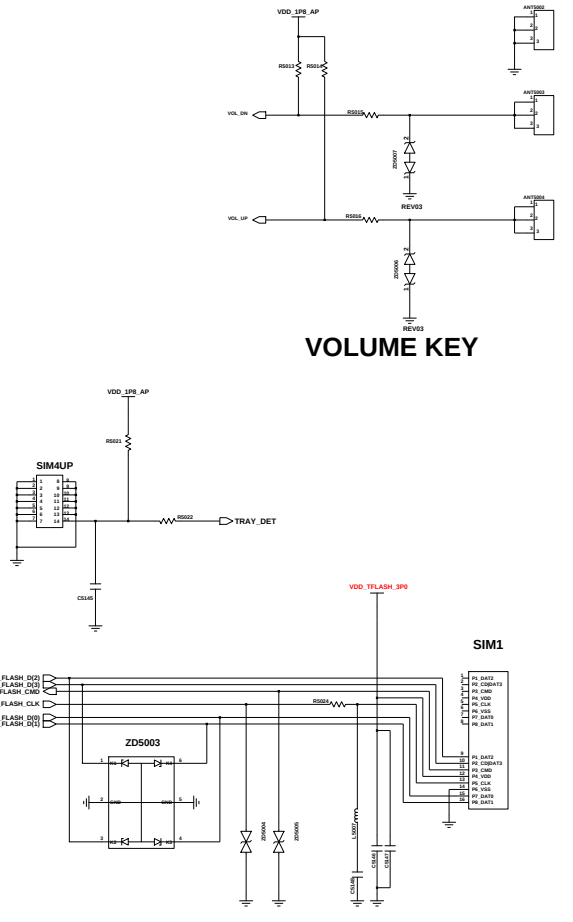

IF_PMIC = Charger SY6970C + F/G MAX17260 + PDIC ET7303


Charger

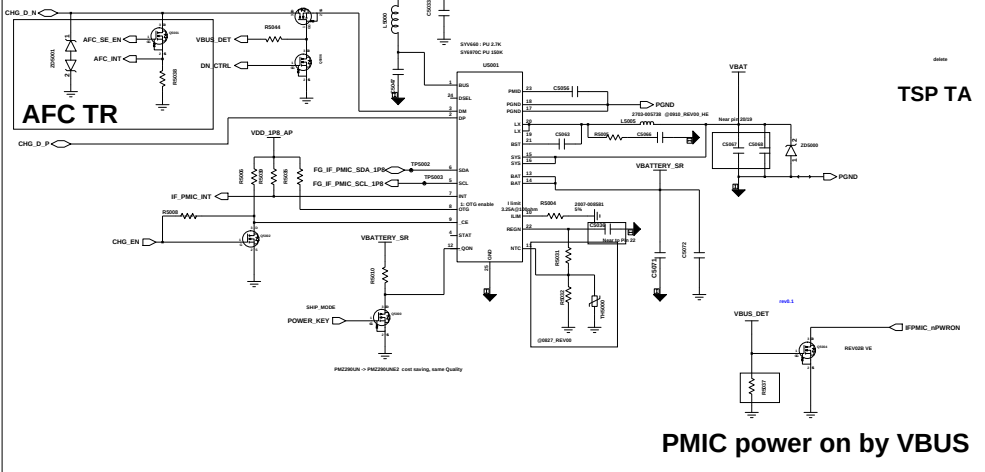

TSP TA


PMIC power on by VBUS

PD IC

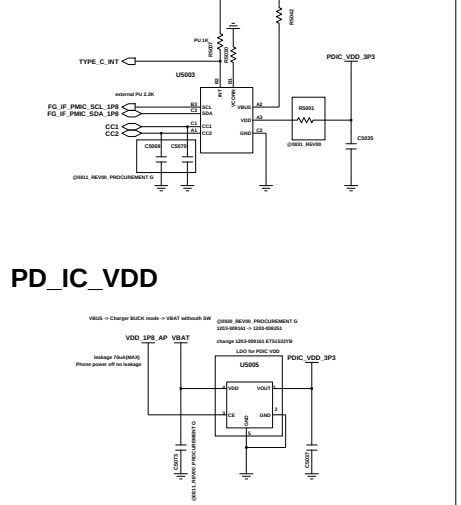


PD_IC_VDD

F/G

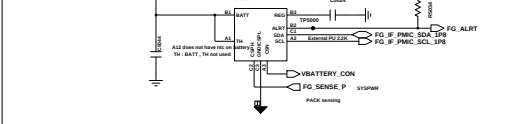

OVP


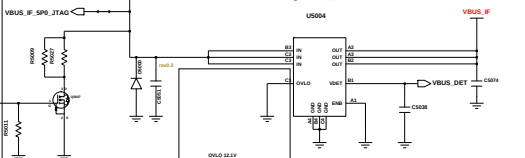



BATTERY CON


MOTOR

eMCP

* Default eMCP 3G LPDDR4X & 32GB eMMC 5.1 : 1108 - 000678
eMCP 4G LPDDR4X & 64GB eMMC 5.1 : 1108 - 000725
eMCP 4G LPDDR4X & 128GB eMMC 5.1 : 1108 - 000717

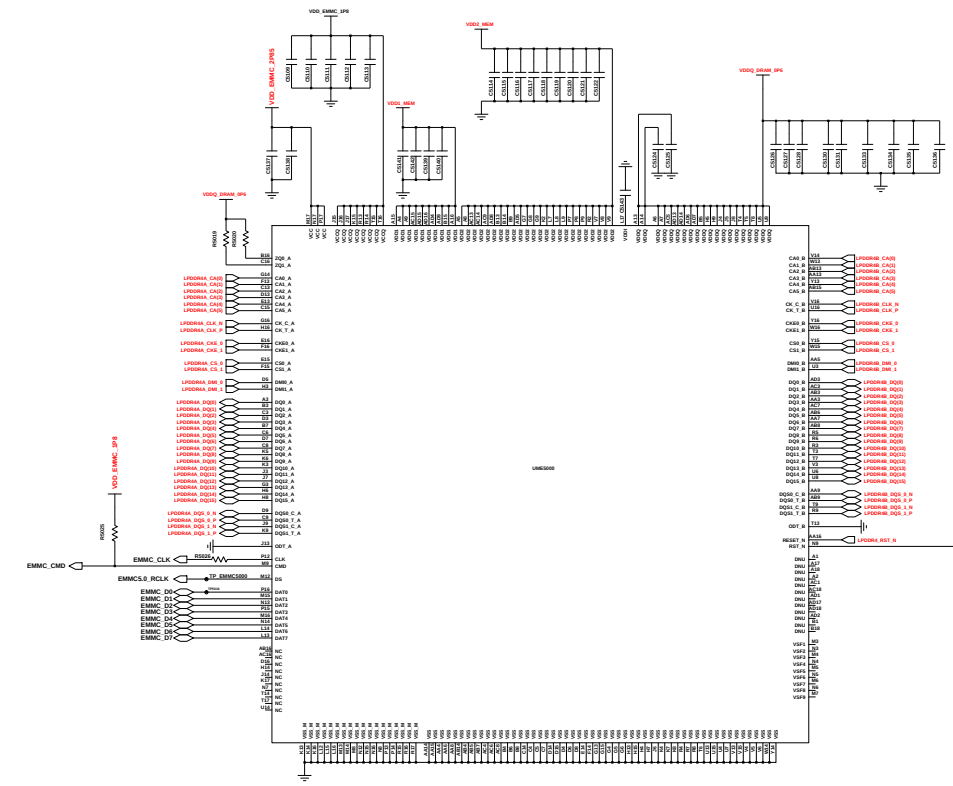

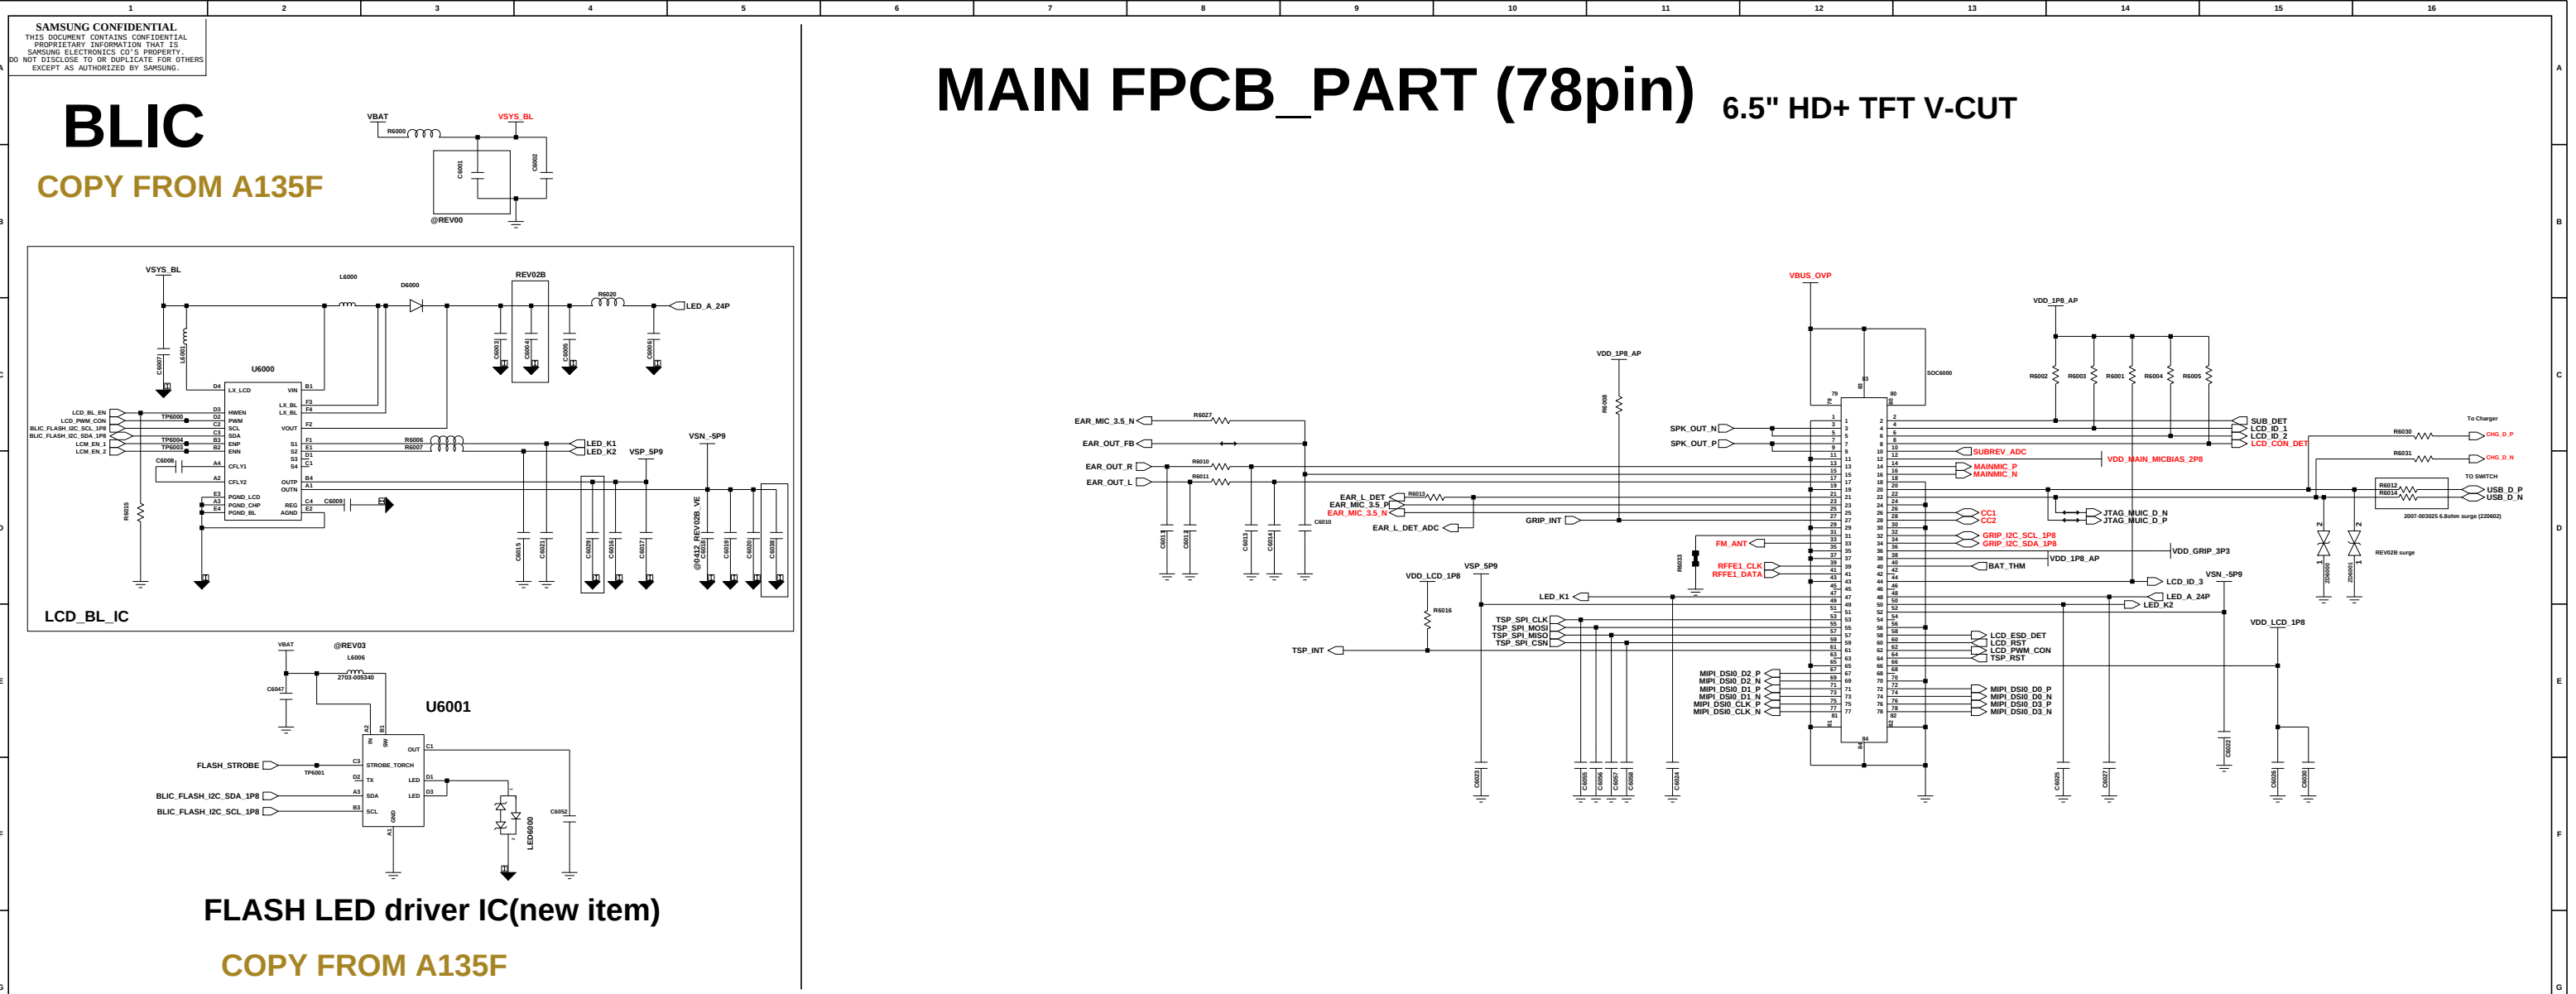

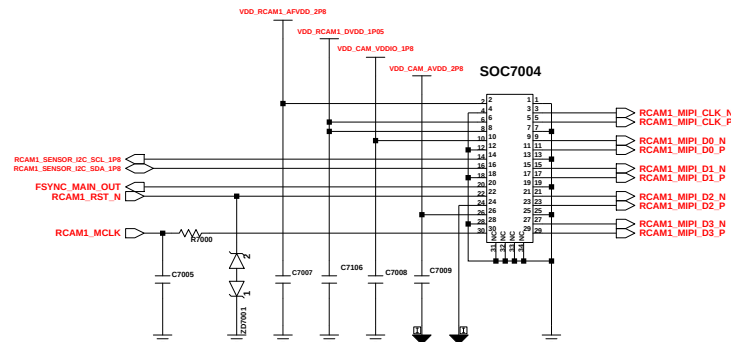

RCAM1_50M(30PIN)



CAMERA MIPI SWITCH



RF BAND

NFC

MEMORY


F R7006

R7007

3+32

4+64

4+12

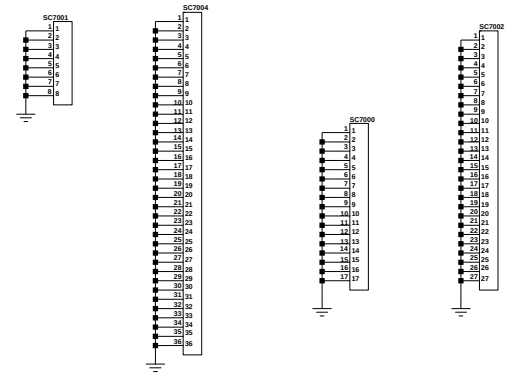



SHIELD CAN

CAM LDO



CAMERA, DISPLAY

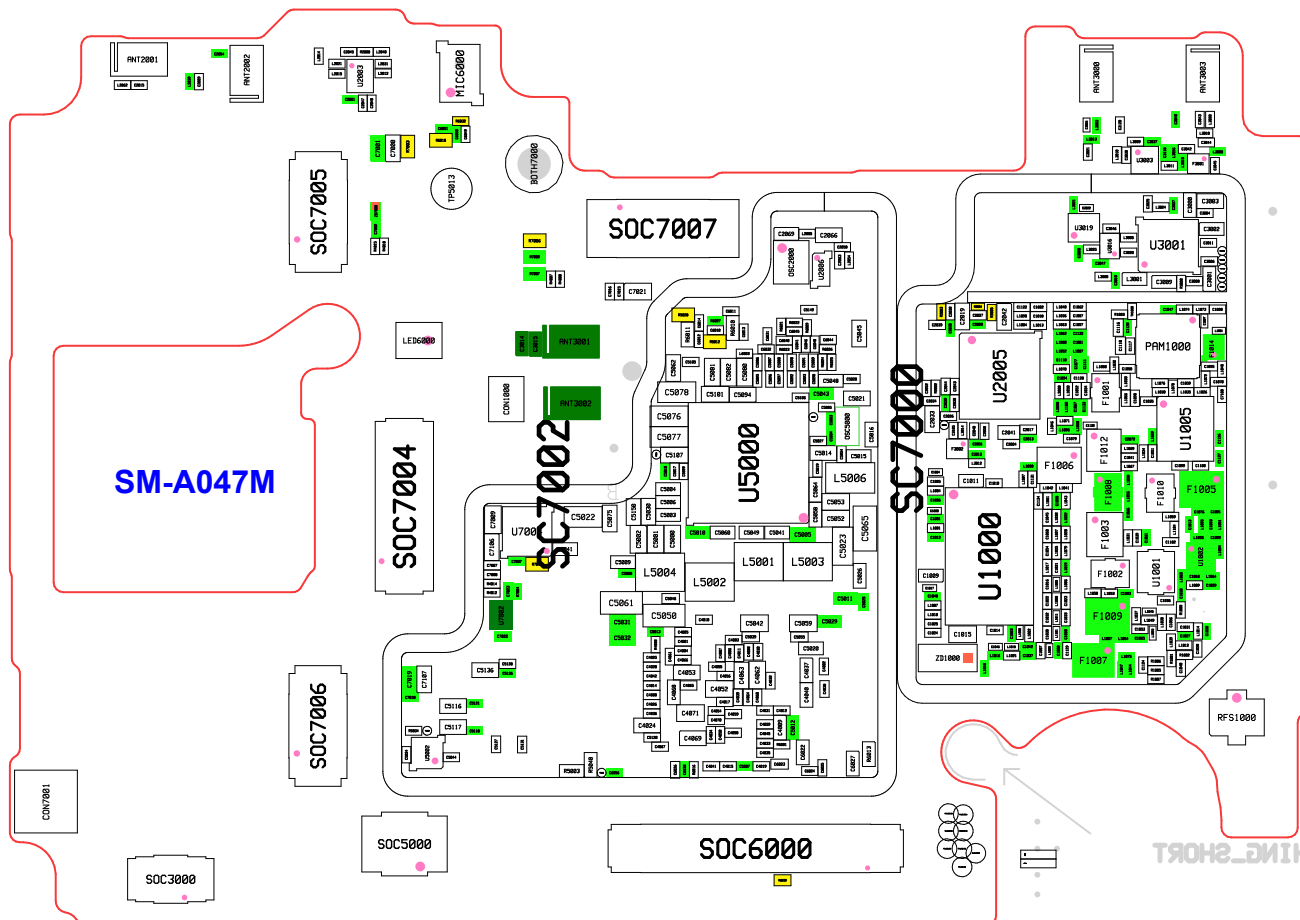

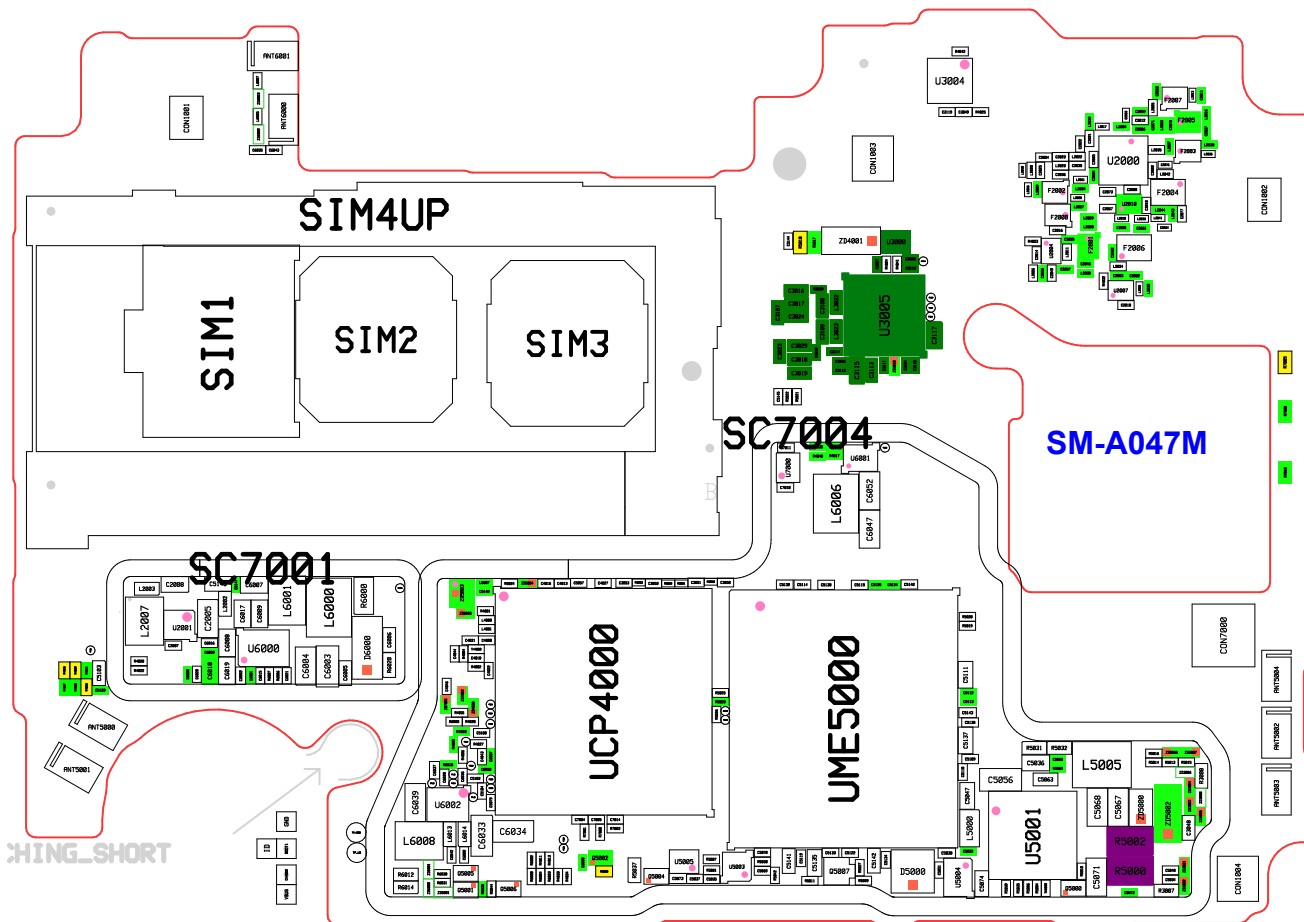

HING_SHORT