


Title <i>Person</i>			
Size C	Document Number	Contents	Rev V1.0
Date: <i>Wednesday, April 01, 2020</i>		Sheet	1 of 38

Switching Charger Power Path

RTA6953 address: 0x68 BQ25601 address: 0x68

10
Don't forget to check the power good sequence. Connect to the pwr0 pin and
measure the voltage. The sequence is:
1. Power good (PG) pin is pulled up to VDD.
2. Power good (PG) pin is pulled down to GND.
3. Power good (PG) pin is pulled up to VDD.
4. Power good (PG) pin is pulled down to GND.
5. Power good (PG) pin is pulled up to VDD.
6. Power good (PG) pin is pulled down to GND.
7. Power good (PG) pin is pulled up to VDD.
8. Power good (PG) pin is pulled down to GND.
9. Power good (PG) pin is pulled up to VDD.
10. Power good (PG) pin is pulled down to GND.

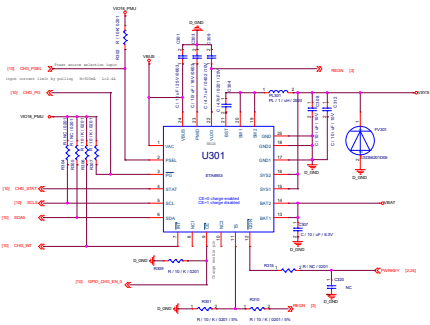


Rev	Rev
1.0	1.0
1.1	1.1
1.2	1.2
1.3	1.3
1.4	1.4
1.5	1.5
1.6	1.6
1.7	1.7
1.8	1.8
1.9	1.9
2.0	2.0
2.1	2.1
2.2	2.2
2.3	2.3
2.4	2.4
2.5	2.5
2.6	2.6
2.7	2.7
2.8	2.8
2.9	2.9
3.0	3.0
3.1	3.1
3.2	3.2
3.3	3.3
3.4	3.4
3.5	3.5
3.6	3.6
3.7	3.7
3.8	3.8
3.9	3.9
4.0	4.0
4.1	4.1
4.2	4.2
4.3	4.3
4.4	4.4
4.5	4.5
4.6	4.6
4.7	4.7
4.8	4.8
4.9	4.9
5.0	5.0
5.1	5.1
5.2	5.2
5.3	5.3
5.4	5.4
5.5	5.5
5.6	5.6
5.7	5.7
5.8	5.8
5.9	5.9
6.0	6.0
6.1	6.1
6.2	6.2
6.3	6.3
6.4	6.4
6.5	6.5
6.6	6.6
6.7	6.7
6.8	6.8
6.9	6.9
7.0	7.0
7.1	7.1
7.2	7.2
7.3	7.3
7.4	7.4
7.5	7.5
7.6	7.6
7.7	7.7
7.8	7.8
7.9	7.9
8.0	8.0
8.1	8.1
8.2	8.2
8.3	8.3
8.4	8.4
8.5	8.5
8.6	8.6
8.7	8.7
8.8	8.8
8.9	8.9
9.0	9.0
9.1	9.1
9.2	9.2
9.3	9.3
9.4	9.4
9.5	9.5
9.6	9.6
9.7	9.7
9.8	9.8
9.9	9.9
10.0	10.0

[illegible]

Backlight

File: Arman			
Size: C	Document Number: 04_POWER_LCMBIAS_BL_FLASH		Rev: V1.0
Date: Wednesday, April 01, 2020	Sheet: 4 of 38		








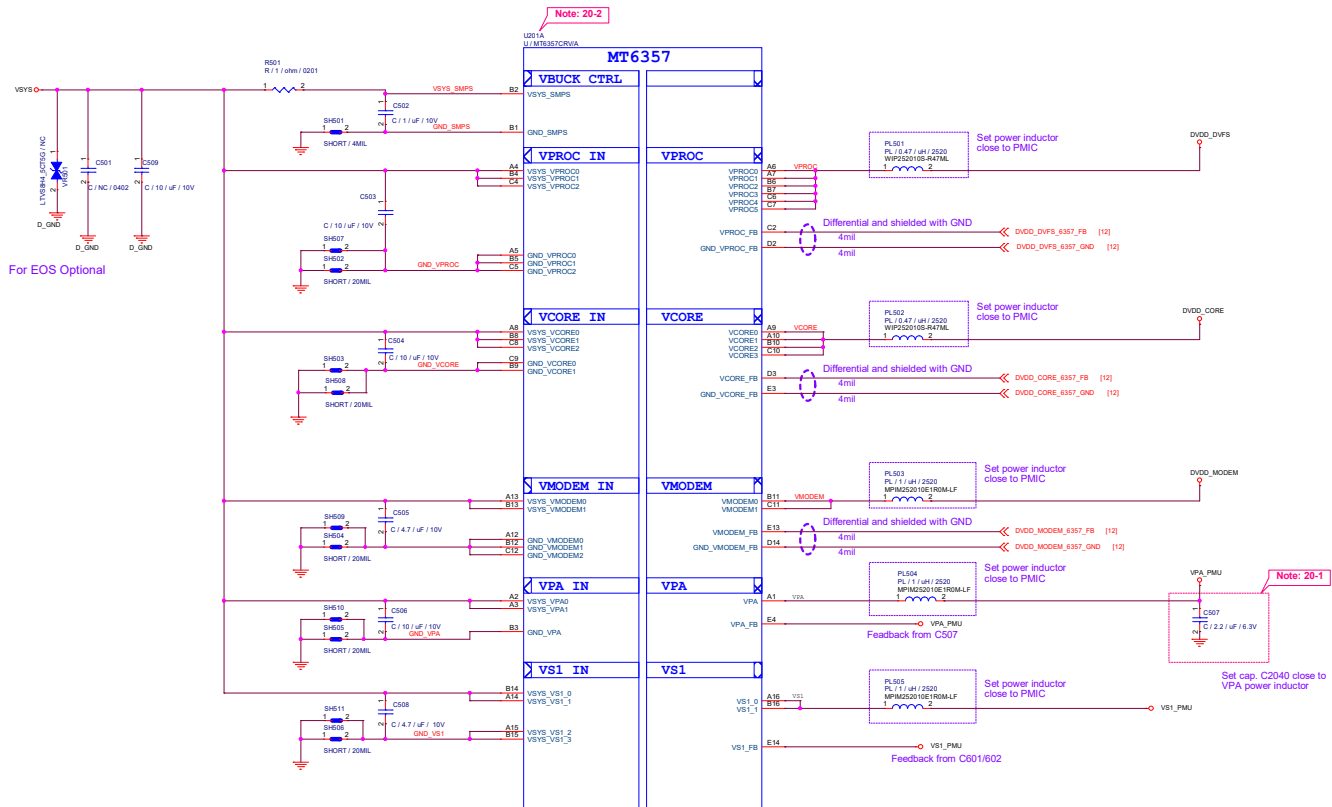


Note 20-1: C507, please choose 0402 size


Note 20-2: PMIC Part number notice for MT6765/62/61 platform


MTK Platform	PMIC
MT6765 / 62	MT6357 CRV
MT6761	MT6357 MRV

Rev	Amend
Rev	Document Number
C	POWER_MT6357_Buck
Rev	Ver
1.0	V1.0
Date	Wednesday, April 01, 2020
Sheet	5 of 38

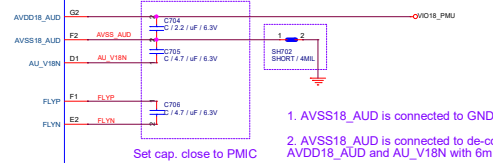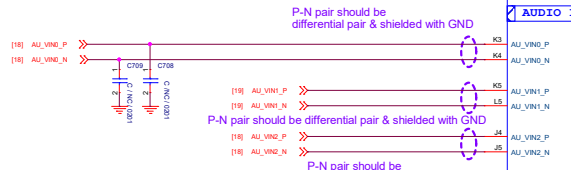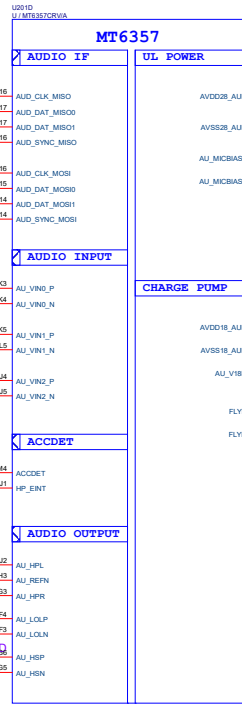

File	Amman
Doc C	Document Number
POWER_MT6357_Audio	Rev
Version	V1.0
Date	Wednesday, April 01, 2020
Sheet	7 of 35

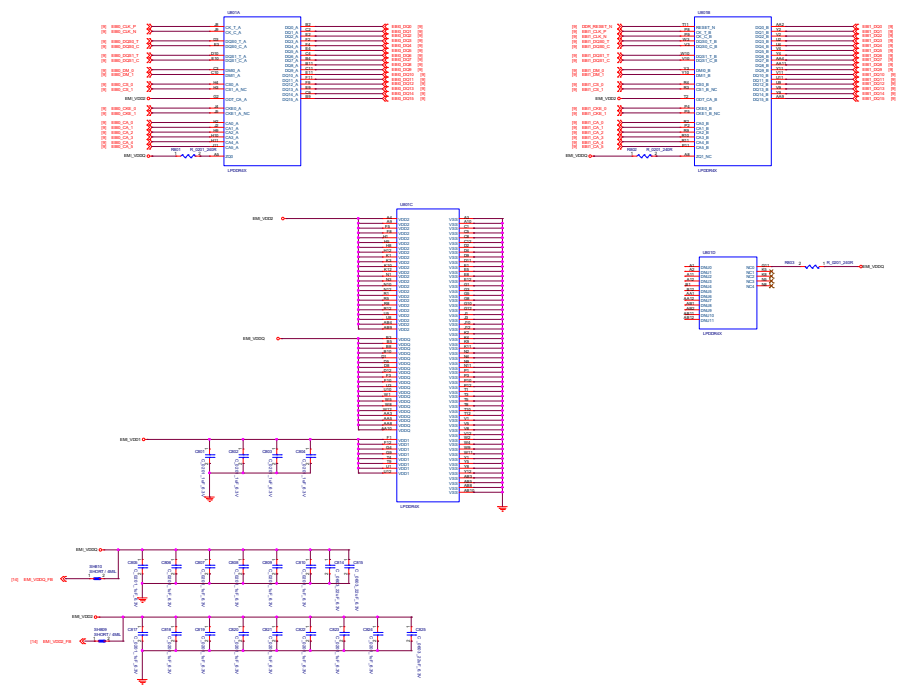


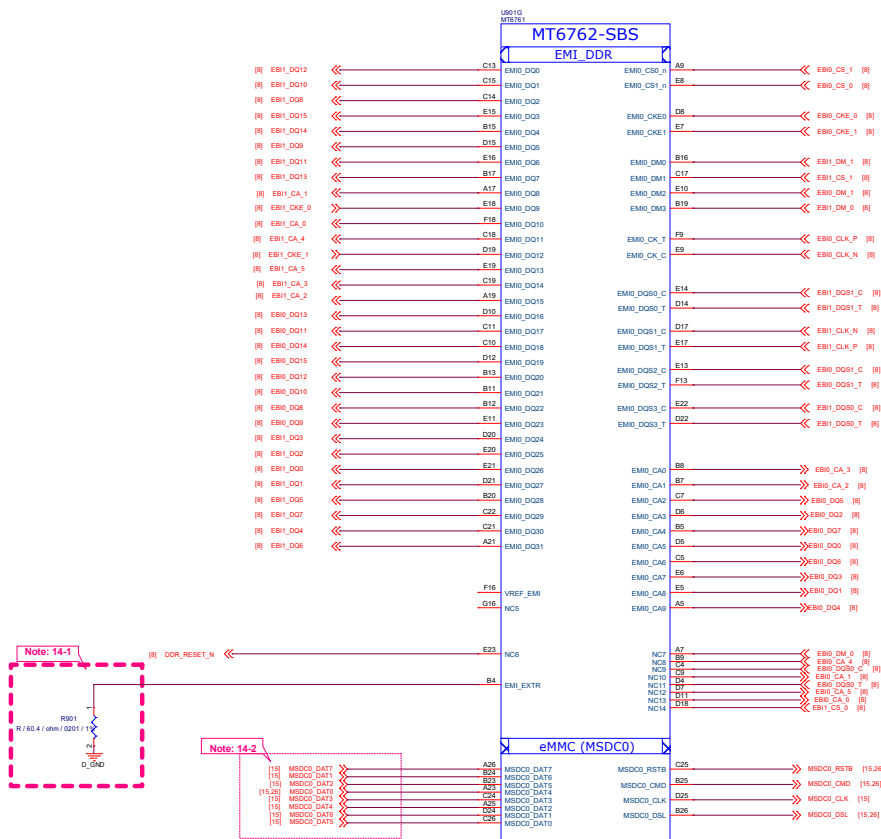

Note 14-1: R4001 please select 34.8 ohm (1%) resistor

Note 14-2: Please check eMCP LP3 and eMCP LP4X pin mux

File: Amman			
Doc C	Document Number: MT6761_EBI		Rev V1.0
Date:	Wednesday, April 01, 2020	Sheet	5 of 58

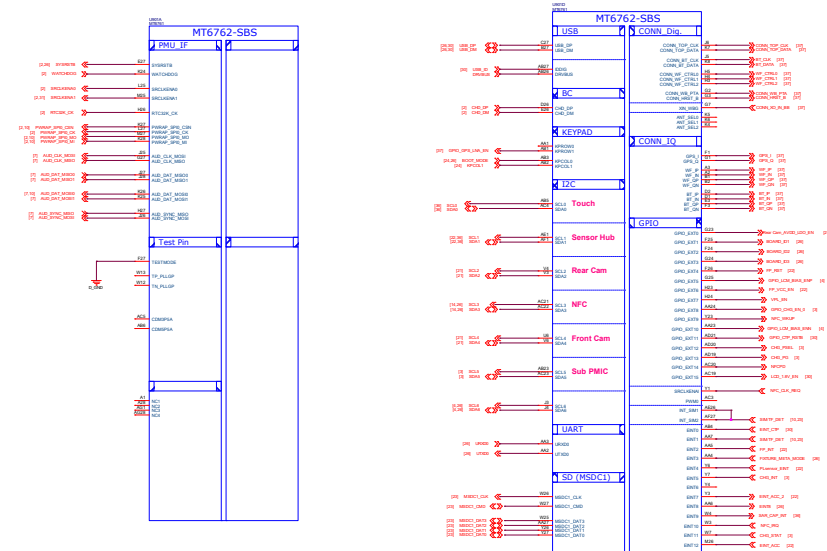


Note 12-3: "PWRAP SPI0 CSN" and "AUD_DAT MOSB0" are bootstrap pin to select which interface will be the JTAG pin out.

PWRAP SPI0 CSN	AUD_DAT MOSB0	AP JTAG	MO JTAG	JTAG Function
HI	LO	NA	NA	MO JTAG
HI	HI	SPD-ENTB	SPD-ENTB	SPD-ENTB
LO	LO	SPD-ENTB	NA	SPD-ENTB
LO	HI	MSDC1	NA	MSDC1

Note 12-4: PWRAP SPI0 MI is DDR type feature in bootstrap

PWRAP SPI0 MI	DDR	MSDC0 pin mux
LO	UPDR0	Follow LPI3 Ref SCH
HI	UPDR0X	Follow LPI3X Ref SCH



PWRAP SPI0 MI	PWRAP SPI0 MO	DDR	MSDC0 pin mux
default=LO	default=PO	UPDR0	Follow LPI3X Ref SCH
LO	LO	UPDR0	Follow LPI3 Ref SCH
LO	HI	UPDR0X	Follow LPI3X Ref SCH
HI	LO	UPDR0	Follow LPI3 Ref SCH
HI	HI	UPDR0X	Follow LPI3X Ref SCH



Note: 28-1




Note: 28-2





Note 28-2: VS2 Buck Layout placement please close to PMIC MT6357, only used for MT6762, NC for MT6761

[illegible]

MIC2

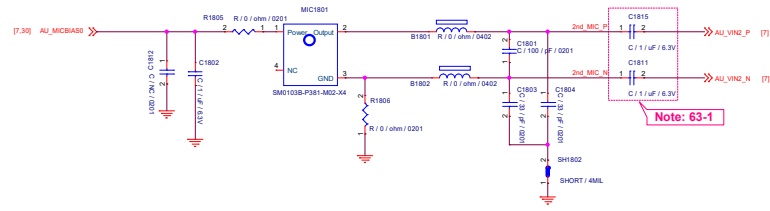

MIC1

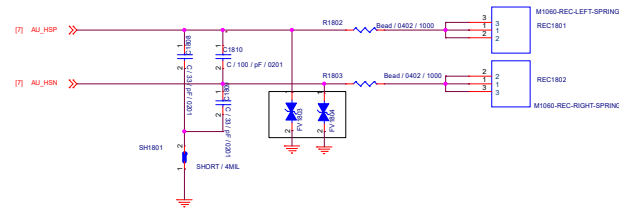


Schematic design notice of "63_PERI_AUDIO_IO" page.

Note 63-1: 1 uF for ACC mode
0 ohm for DCC mode


Rev	Amman	Rev
Doc	Document Number	Rev
MC	MC	Rev
Doc	Wednesday, April 01, 2020	Printed 18 of 38

Main LCM

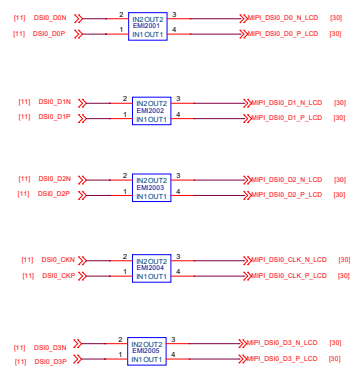


File		Revision	
Rev	Document Number	LCD F	Rev
C			V1.0
Date		Wednesday, April 01, 2009	Printed 20 of 38


Main Camera

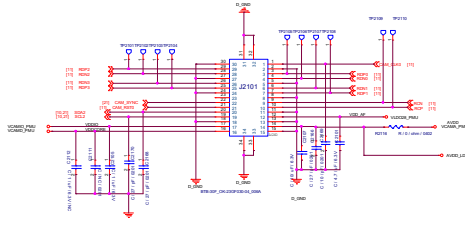


Front Camera

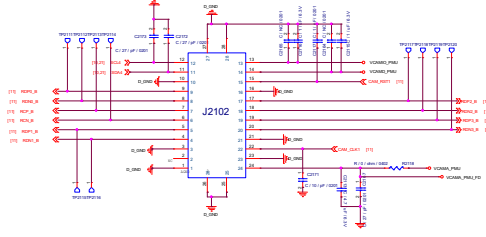



Main Flash LED



Macro Camera

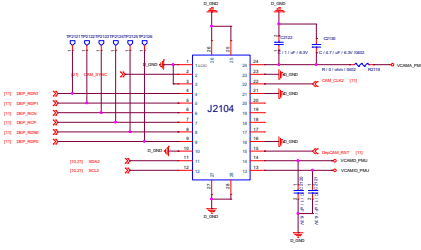


Dep Camera

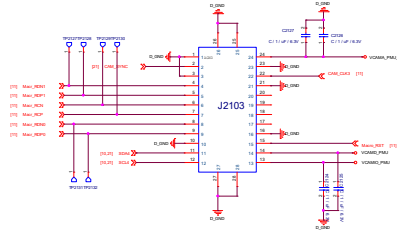


Date		Amount	
1/15		100.00	
Total		100.00	





G-Sensor

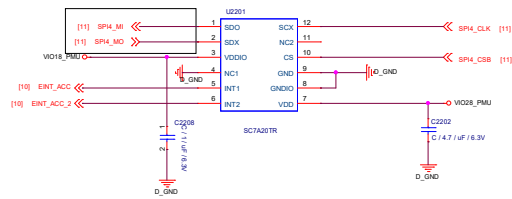

M SENSOR




FP

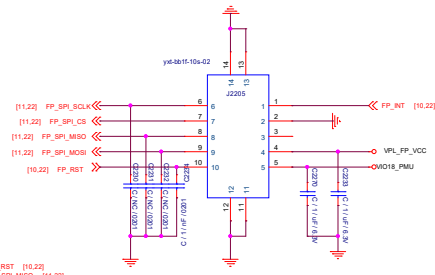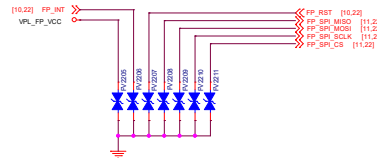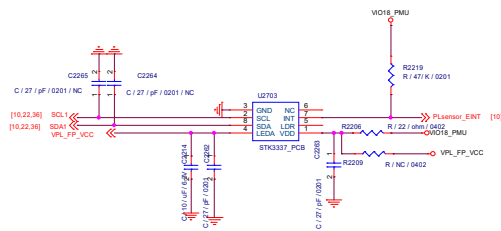


File	Amman
Rev	C
Document Number	Sensor
Date	Wednesday, April 03, 2008
Sheet	22 of 36

SIM1

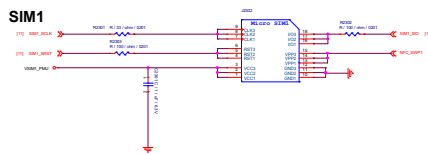


SIM2



SD CARD



Power Key / Key Pad


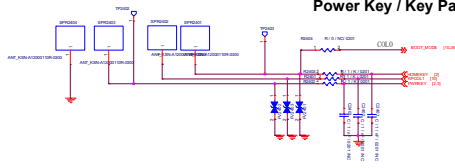


Title		Assistant	
Name		William E. Anderson	
Address		10000 1st St. N.E.	
City		Seattle	
State		Washington	
Zip		98105	

USB







BAT

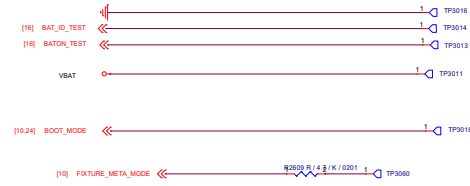

eMMC



Board_ID



File	Amman
Doc	Document Number
C	Test Point
Date	Wednesday, April 01, 2020
Sheet	26 of 38
Rev	V1.0

Note 52-1: NFC host I/F and power info are listed in the above connector, NFC COB reference schematic is in the file named "MTK ST NFC Reference Schematic_20170809"

Note 52-2: When NFC is applied, please keep
1. 0ohm NC between VSIM1_PMU and SIM1_VCC
2. 0ohm NC between VSIM2_PMU and SIM2_VCC


Note 52-3: When NFC is applied, please follow NFC COB reference schematic to draw NFC COB schematic

Title		Accession	
Doc	Document Number	NFC	Rev
1			1.0
Date	Wednesday, April 11, 2018	Sheet	29 of 38

贴片器件，钢网要开




Shielding frame





Marks point





File			
Asmen			
Doc	Document Number	Shielding	Rev
C			V1.0
Date		Wednesday, April 11, 2018	Sheet 18 of 18

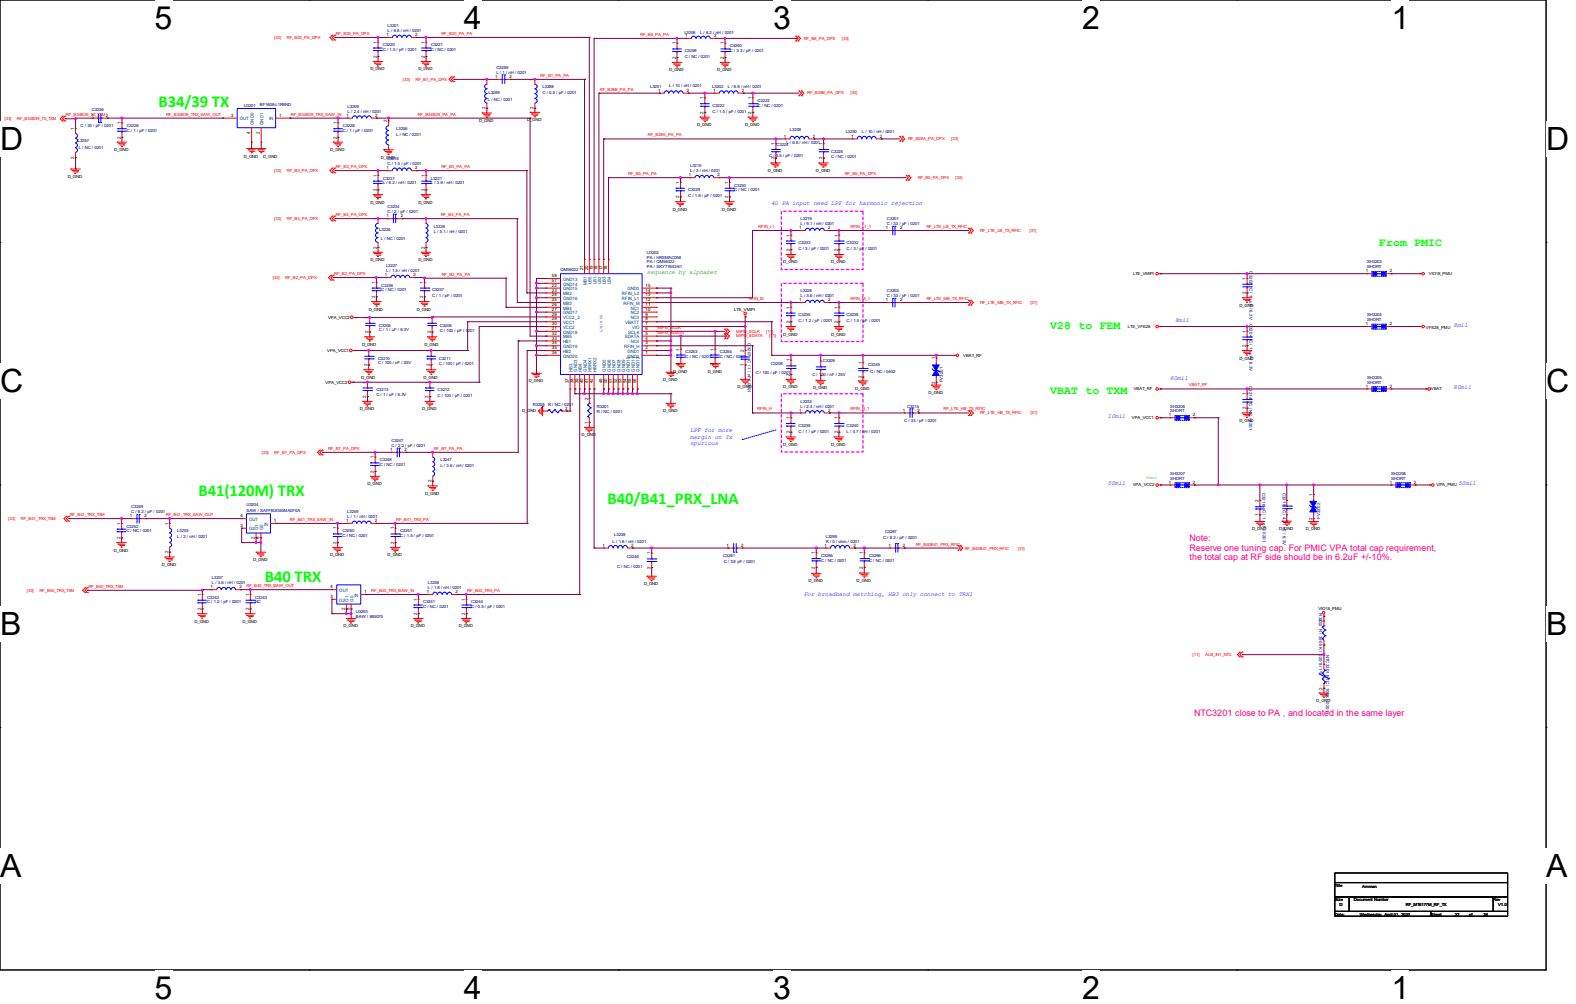

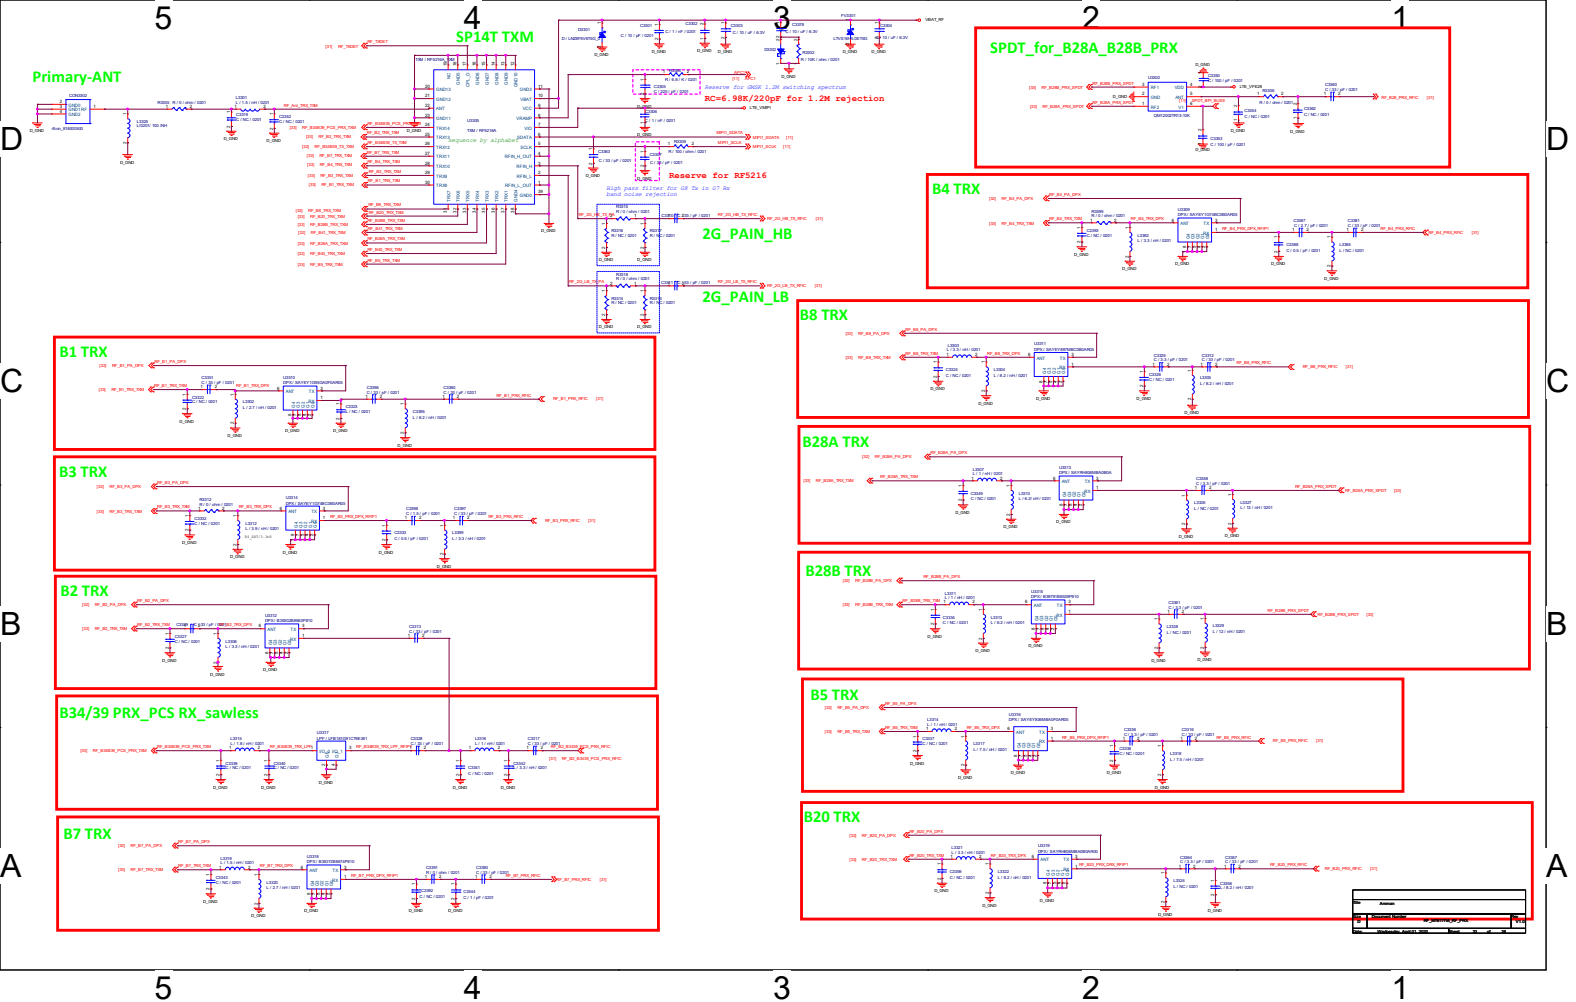

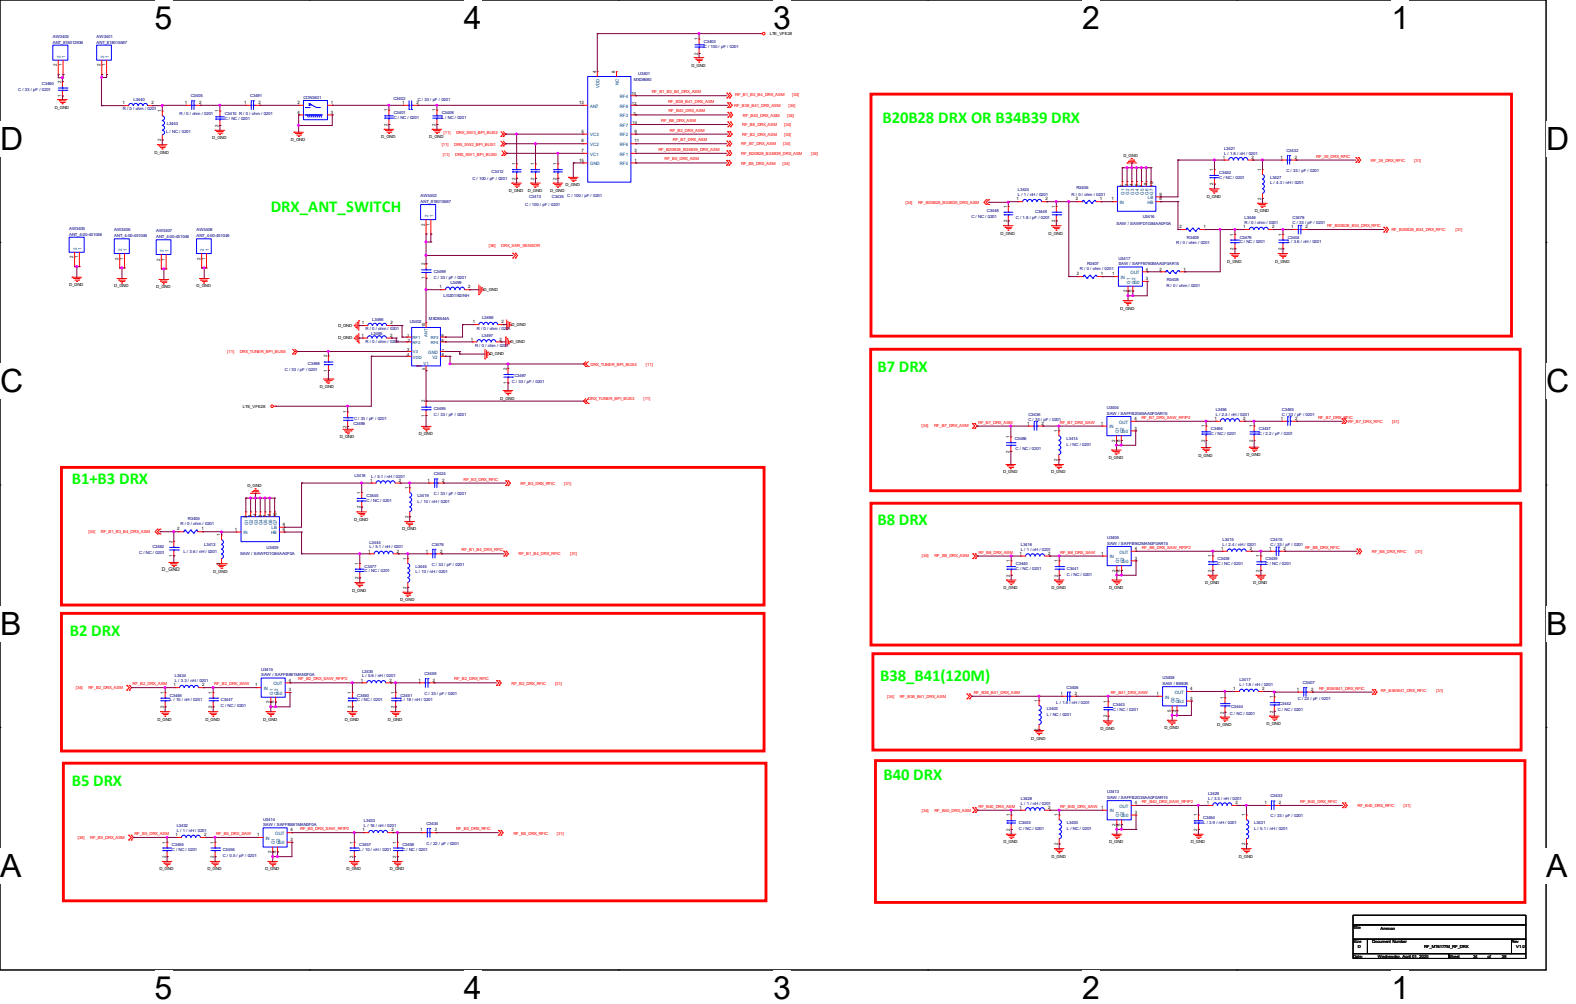

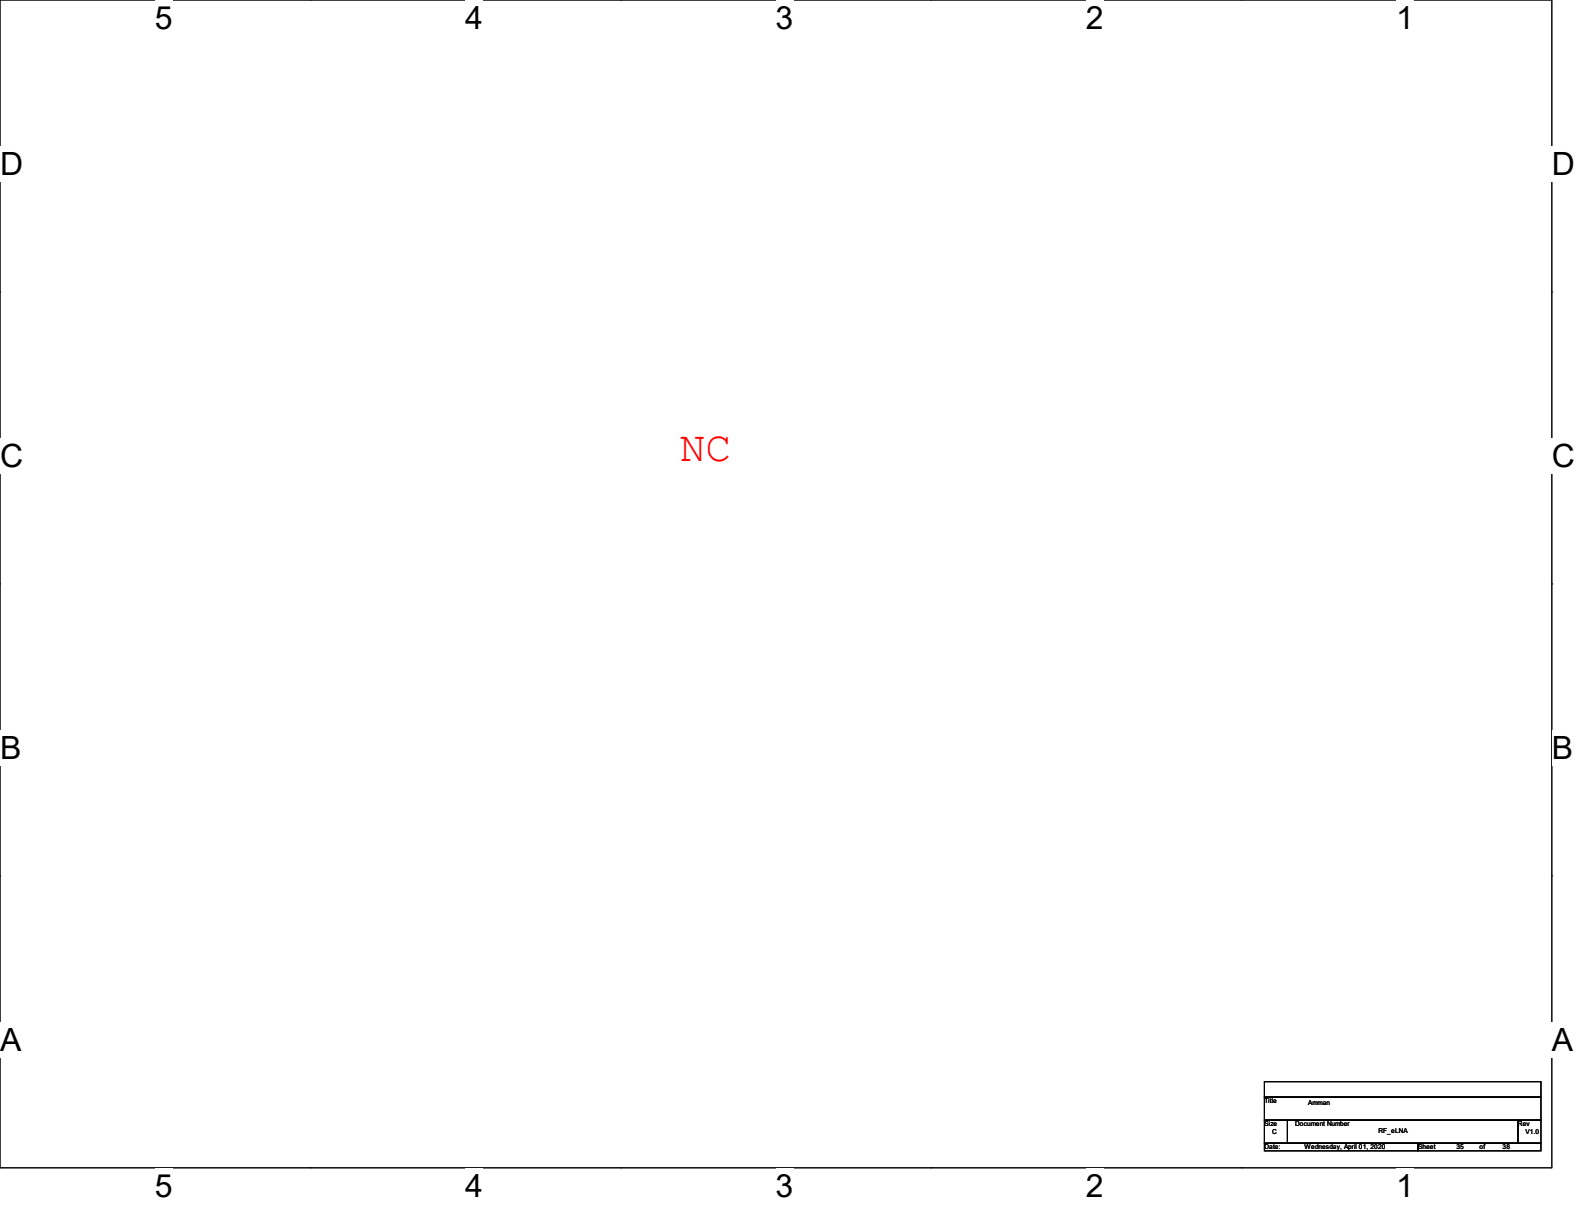

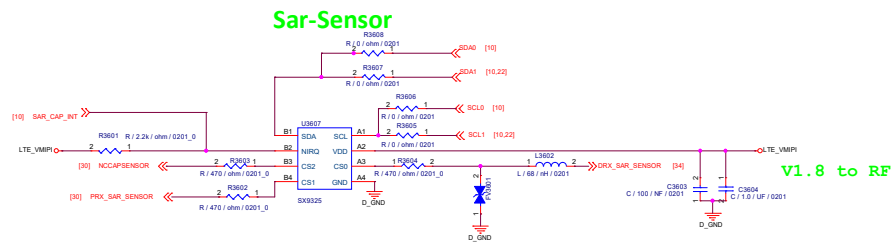

File: Amman			
Size: C	Document Number: Capsensor		Rev: V1.0
Date: Wednesday, April 01, 2020	Sheet: 36	of 38	

