

Lenovo  motorola a lenovo company Material or Methods Specification		NO. SB28C22984 (SP68C22979)	
TITLE: ASSY,PWA,LTE,Beckham,LATAM,4+64			
REVISION DATE: 24-May-2018	MEMO:	ISSUE: 01	PAGE: 1 OF 6

ISSUE:	MEMO:	ORIGINATOR:	DETAIL SPEC CHANGES:	DATE:
Rev 01		chenwt/huanglh	Spec Release	24-May-2018

1. GENERAL DESCRIPTION

The SB28C22984 (SP68C22979) is a mainboard of Moto Z3 product family supporting key functions of

- QC SDM636 processor
- 64 GB onboard storage capacity
- 6.01-inch pOLED QHD+ display
- 12MP Close loop+ f1.7, 1.4um , 5MP FF +F2.0+1.12um , dual CCT flash
- 8MP FF +F2.0+1.12um
- Support for 15W fast-charge
- 802.11a/b/g/n/ac WiFi + Bluetooth 5.0 + NFC
- Moto MODS support



2. SCHEMATIC OR CIRCUITRY DIAGRAM

TITLE: ASSY,PWA,LTE,Beckham,LATAM,4+64

REVISION DATE: 24-May-2018

MEMO:

ISSUE: 01

PAGE: 2 OF 6


Beckham System Block V1.4

Note1:WCN3980 &SDR660 reuse PM660 38.4MHz Clk

Note2:
Single SIM Model disable
UIM2, Including XT1929-
1(SS), XT1929-3(SS), XT1929-
4(SS), XT1929-6(SS), XT1929-
8(SS)

Dual SIM Model use
UIM1&2,including:
XT1929-5(DS), XT1929-6(DS)
.XT1929-8(DS)

Note3:SDM636 Group
including SDM-636-0,SDM-
636-1,SDM-636-2,SDM-636-3

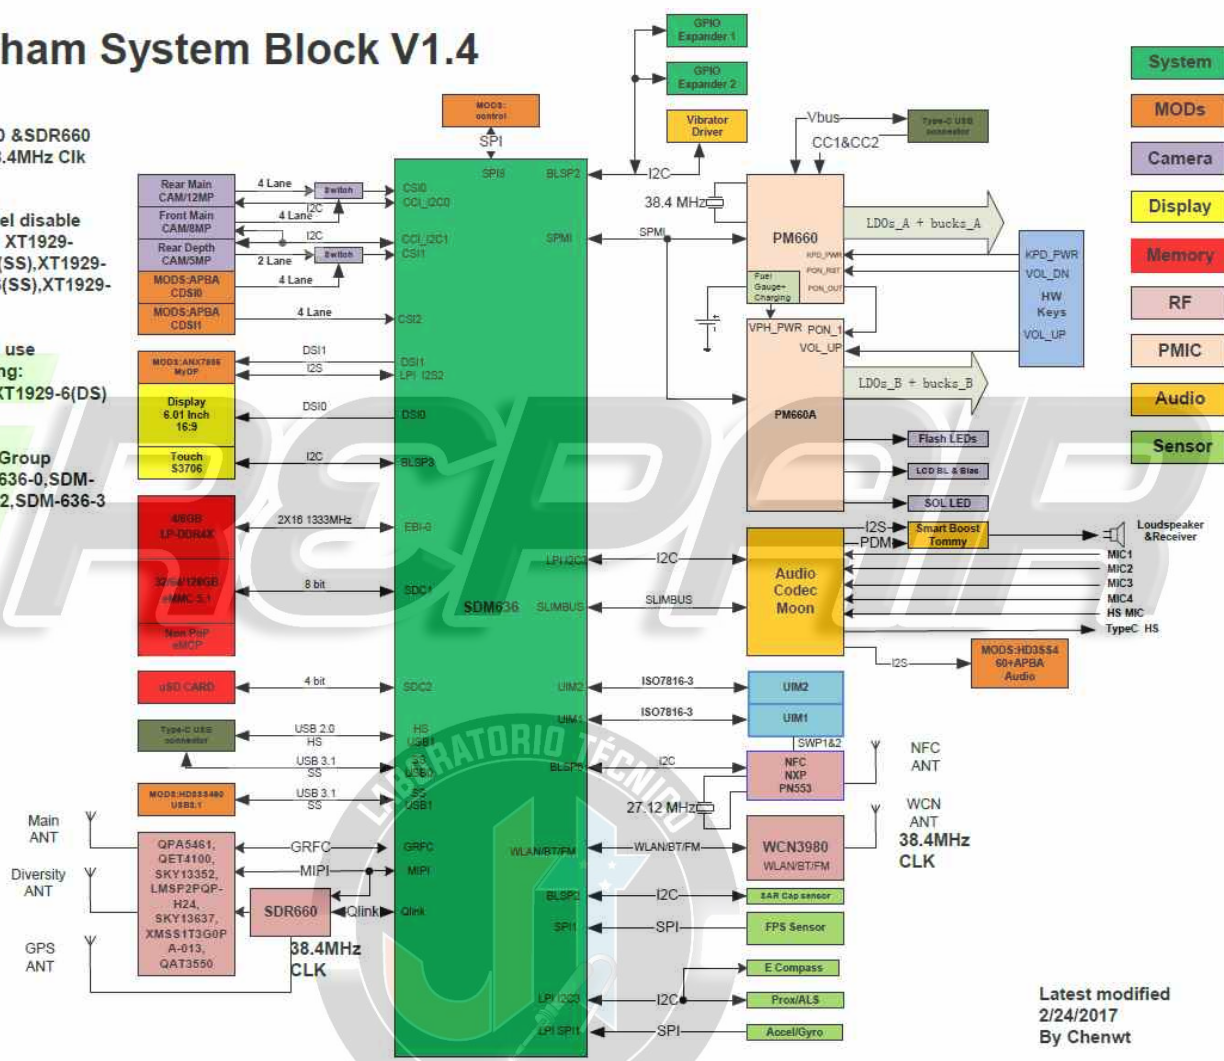

Latest modified
2/24/2017
By Chenwt


3. KEY COMPONENTS INFORMATION (BOM)

  Material or Methods Specification		NO. SB28C22984 (SP68C22979)	
TITLE: ASSY,PWA,LTE,Beckham,LATAM,4+64			
REVISION DATE: 24-May-2018	MEMO:	ISSUE: 01	PAGE: 3 OF 6


No.	Description	Vendor P/N	Manufacturer	Reference Designator
0	Digital Signal Processor / GSM baseband IC / Display controller / USB high-speed transceiver	SDM-636-2-692NSP-TR-00-0-AA	Qualcomm	U1000
1	eMCP (4GB +64GB) LPDDR4x+eMMC	KMDH6001DM-B422	Samsung	U1600
2	eMCP (4GB +64GB) LPDDR4x+eMMC	H9HP52ACPMMDAR-KMM	Hynix	U1600
3	Power management chip	PM-660-0-219WLPSP-TR-00-0	Qualcomm	U2000
4	Power management chip	PM-660A-0-196WLPSP-TR-02-0-01	Qualcomm	U2400
5	Accelerometer sensor plus Gyro	LSM6DS3TR-C	ST Micro	U6110
6	Gyroscope	See in 6	N/A	N/A
7	Hall sensor	N/A	N/A	N/A
8	Television Signal Processor	N/A	N/A	N/A
9	Barometer	N/A	N/A	N/A
10	Audio Codec	XMCS1550-CWZR	Cirrus	U6250
11	Wireless transceiver	SDR-660-0-180WLPSP-TR-01-0	Qualcomm	U3100
12	WLAN/ Bluetooth chip	WCN-3980-0-82BWLSP-TR-0B-0	Qualcomm	U4000
13	RF DRX low bands Signal Switch	SKY13637-695LF	Skyworks	U7648
14	RF DRX Middle bands Signal Switch	BGS13S2N9	INFINEON	U7622
15	RF Main Low bands Signal Switch	LMSP2PQP-H24	Murata	U7050
16	RF Mid and high bands Signal Switch	SKY13552-669LF	Skyworks	U7000
17	RF power amplifier module	QPA5461	Qualcomm	U7100
18	GPS front-end signal amplifiers	BGA824N6	INFINEON	U7810
19	Short-range wireless communications chips	PN553E2EV/C210XXY	NXP	U4100

4. DIMENSION

Lenovo  motorola a lenovo company		Material or Methods Specification		NO. SB28C22984 (SP68C22979)	
TITLE: ASSY,PWA,LTE,Beckham,LATAM,4+64					
REVISION DATE: 24-May-2018		MEMO:	ISSUE: 01	PAGE: 4 OF 6	

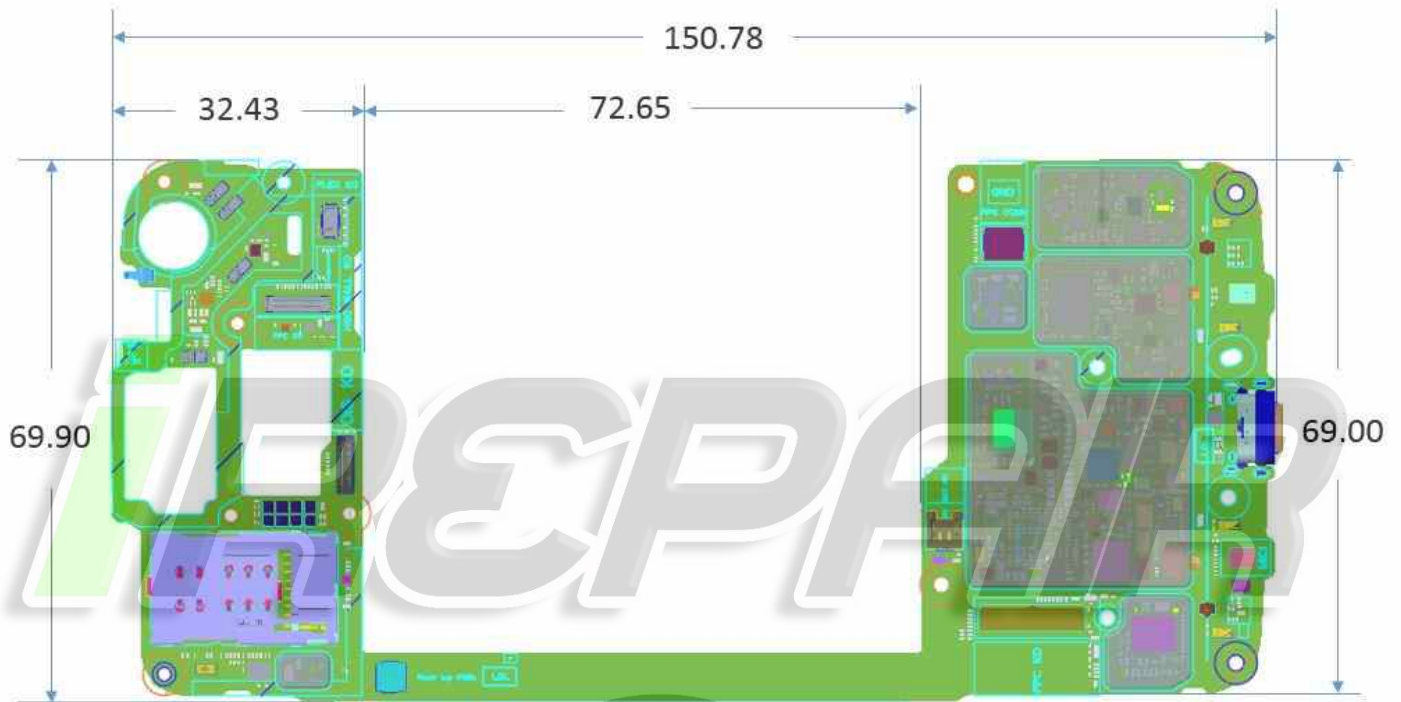

Lenovo  motorola a hewlett-packard company		Material or Methods Specification		NO. SB28C22984 (SP68C22979)	
TITLE: ASSY,PWA,LTE,Beckham,LATAM,4+64					
REVISION DATE: 24-May-2018		MEMO:	ISSUE: 01	PAGE: 5 OF 6	

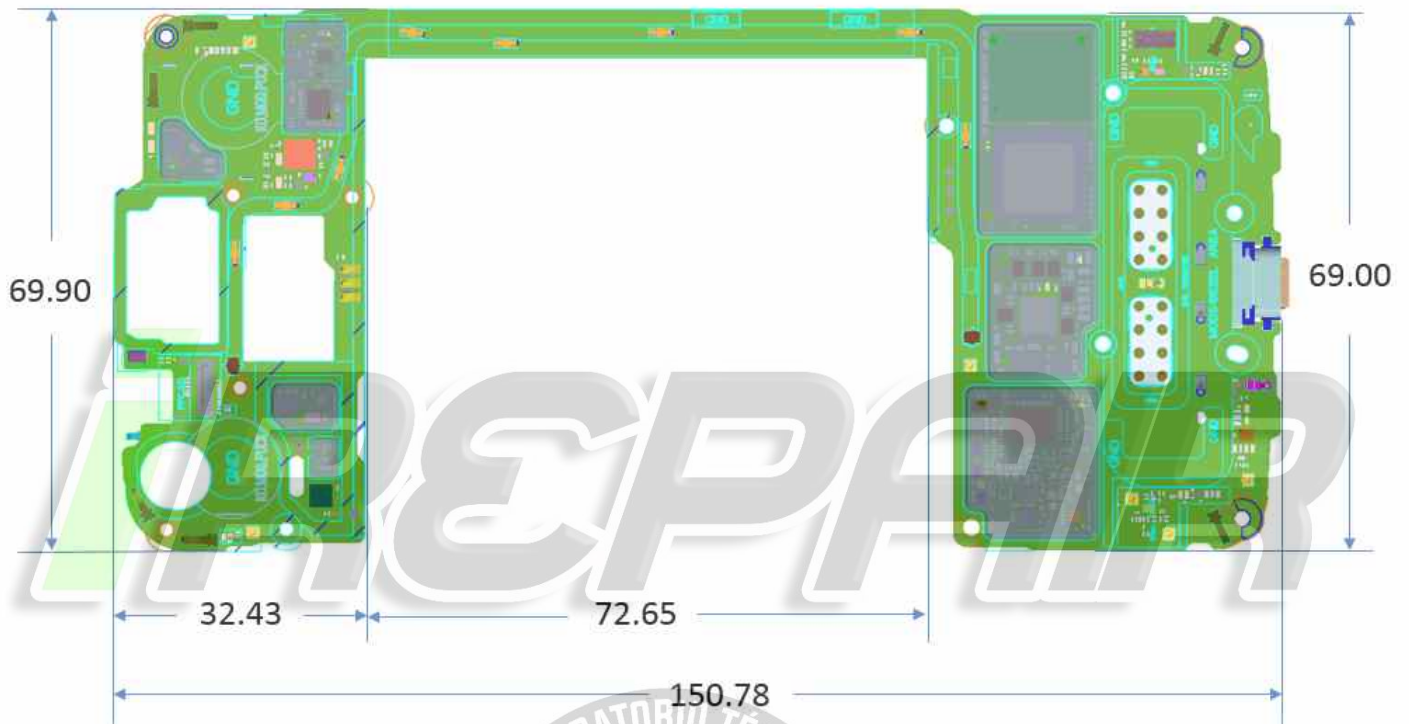

Lenovo  motorola a lenovo company		Material or Methods Specification		NO. SB28C22984 (SP68C22979)	
TITLE: ASSY,PWA,LTE,Beckham,LATAM,4+64					
REVISION DATE: 24-May-2018		MEMO:	ISSUE: 01	PAGE: 6 OF 6	

5. **WORKING CONDITION**

- 5.1 Voltage range: DC 3.4 ~ 4.4V
- 5.2 Temperature range: -10 ~ +55 degrees Celsius

6. **GENERAL NOTES & RESTRICTIONS**

- 6.1 **NOTE:** This specification cannot be distributed to parties outside of Motorola without first having on file a signed Non-Disclosure Agreement.
- 6.2 All information will be tracked and maintained in Motorola database.

iREPAIR

