


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

Project : MT6797
REF_SCH TOP LEVEL

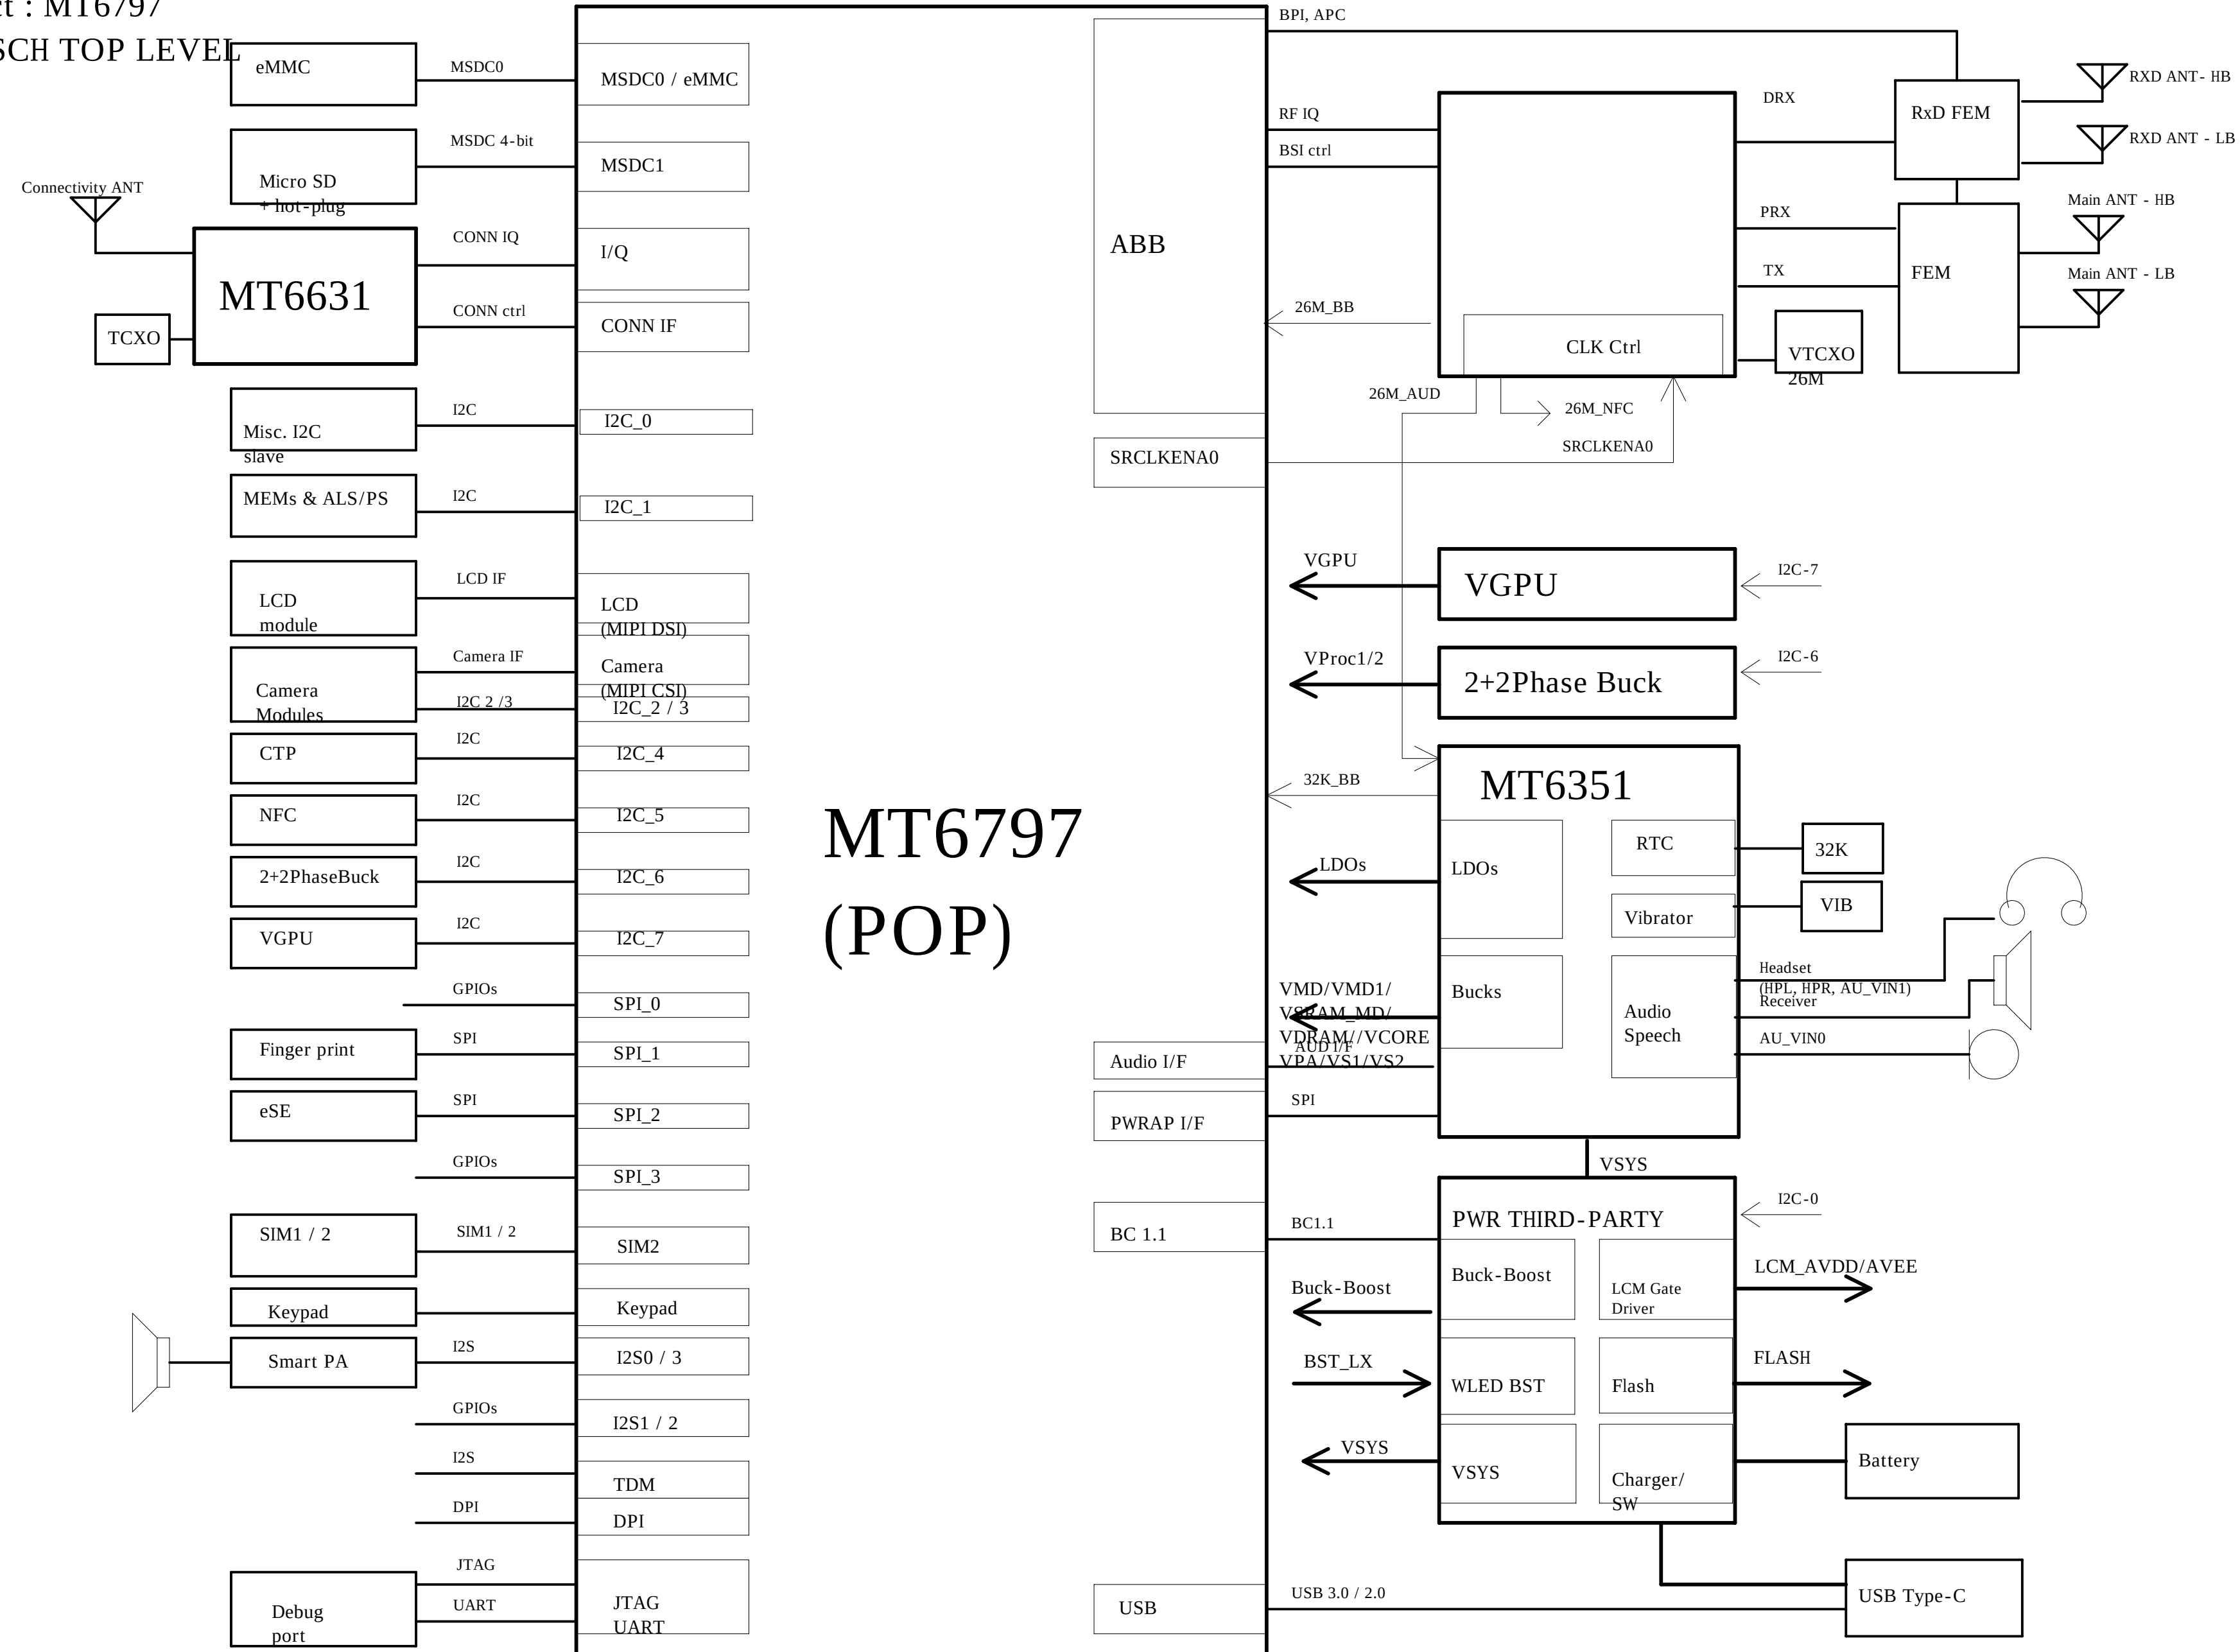

		COMPANY:			
		TITLE:			
		CX880			
DRAWN: <Drawn By>	DATED: <Drawn Date>				
ORDERD: <Checked By>	DATED: <Checked Date>				
QUALITY CONTROL: <QC By>	DATED: <QC Date>	CODE:	SIZE:	DRAWING NO.	REV:
RELEASED: <Release By>	DATED: <Release Date>	<Code>	A0	<Drawing Number>	<Revision>
		SCALE: <Scale>	SHEET: 46 20		


REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE




Schematic design notice of "10_BB_POWER_1" page.

Note 10-1:
Note 10-2:
Note 10-3: Differential pairs of buck's remote sense must be placed at PCB
Note 10-4: back side right beneath MT6797 chip.

Note 10-5: For PCB layout, the star connection should be implemented in the MT6351's VIO18 output.


The purpose of this symbol is used for including POP LPDDR3 in BOM.



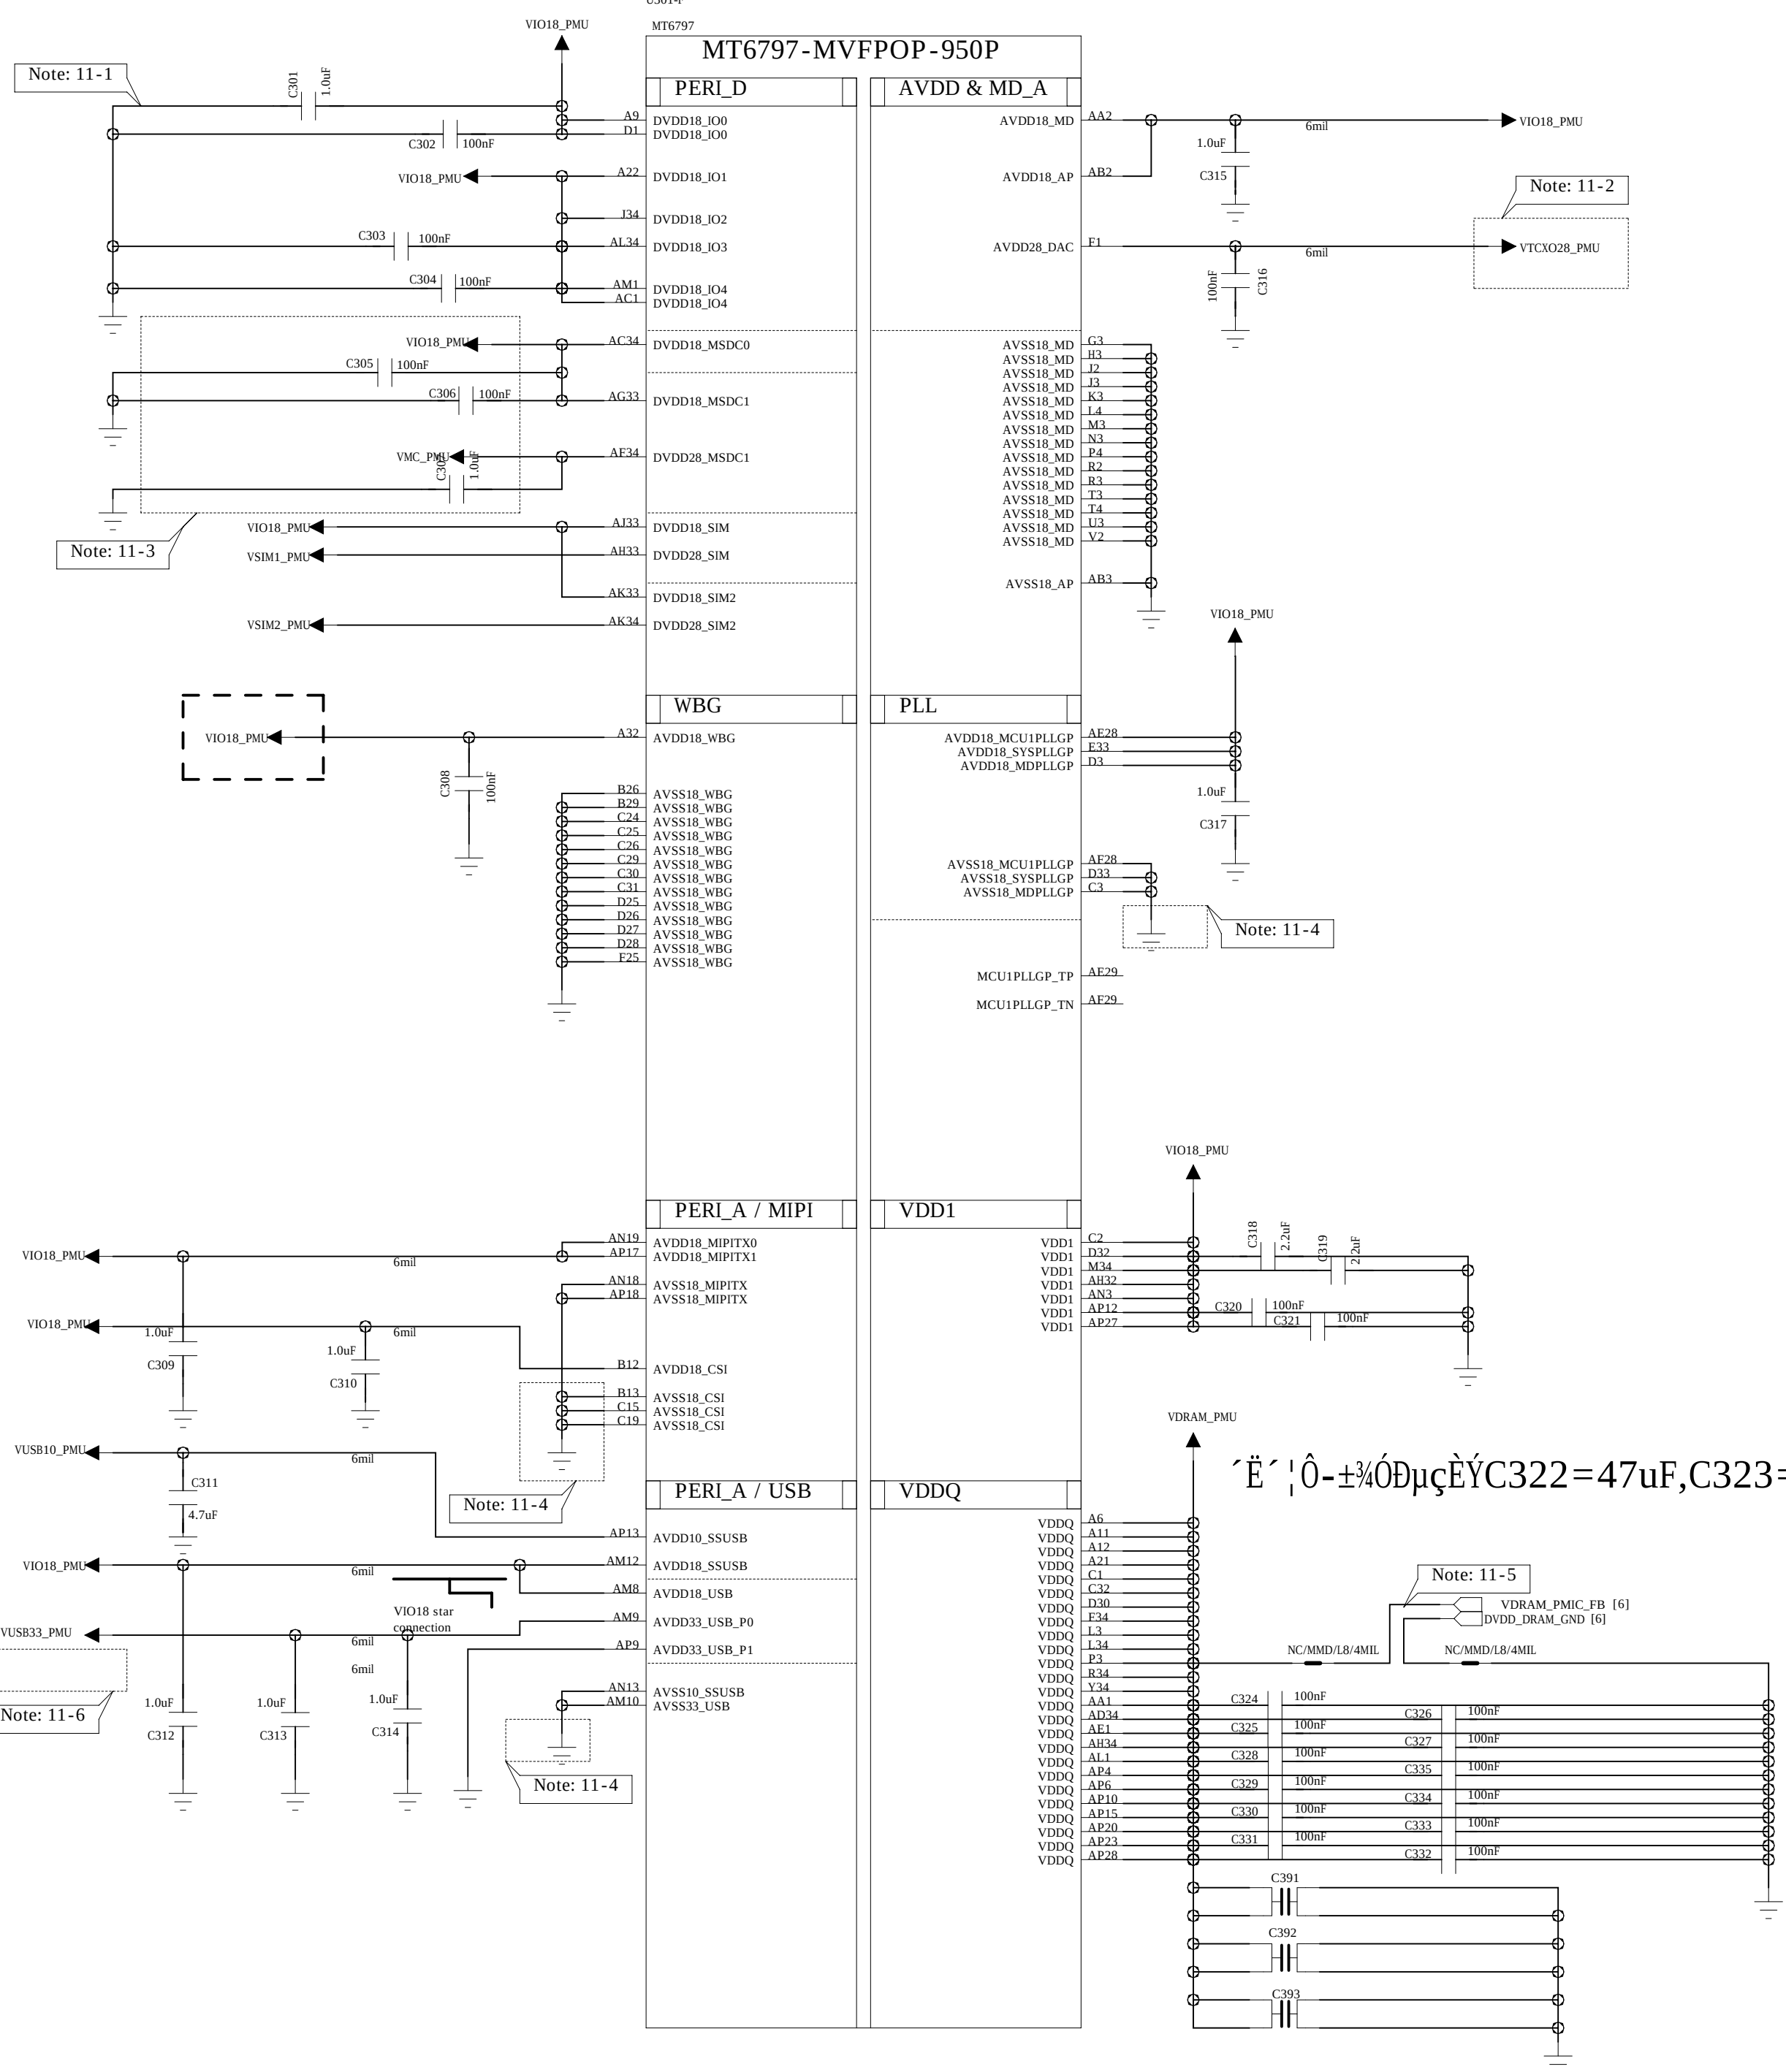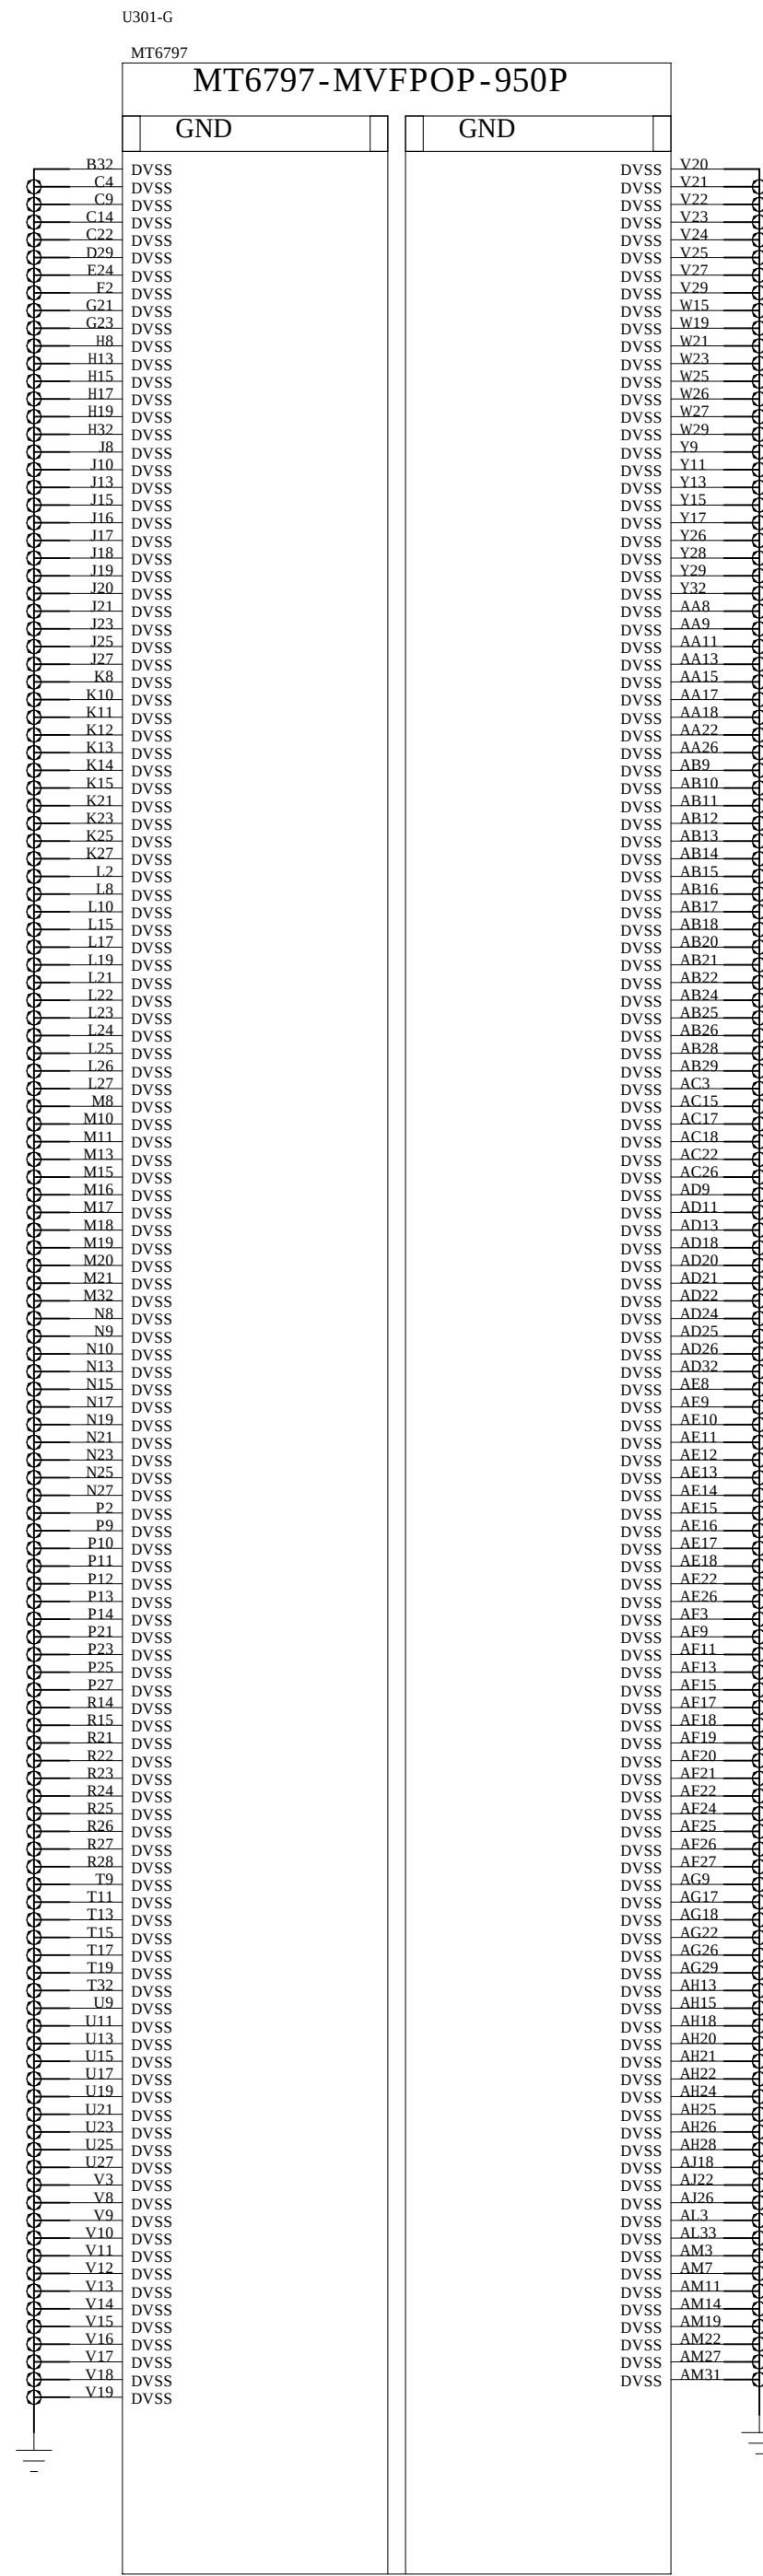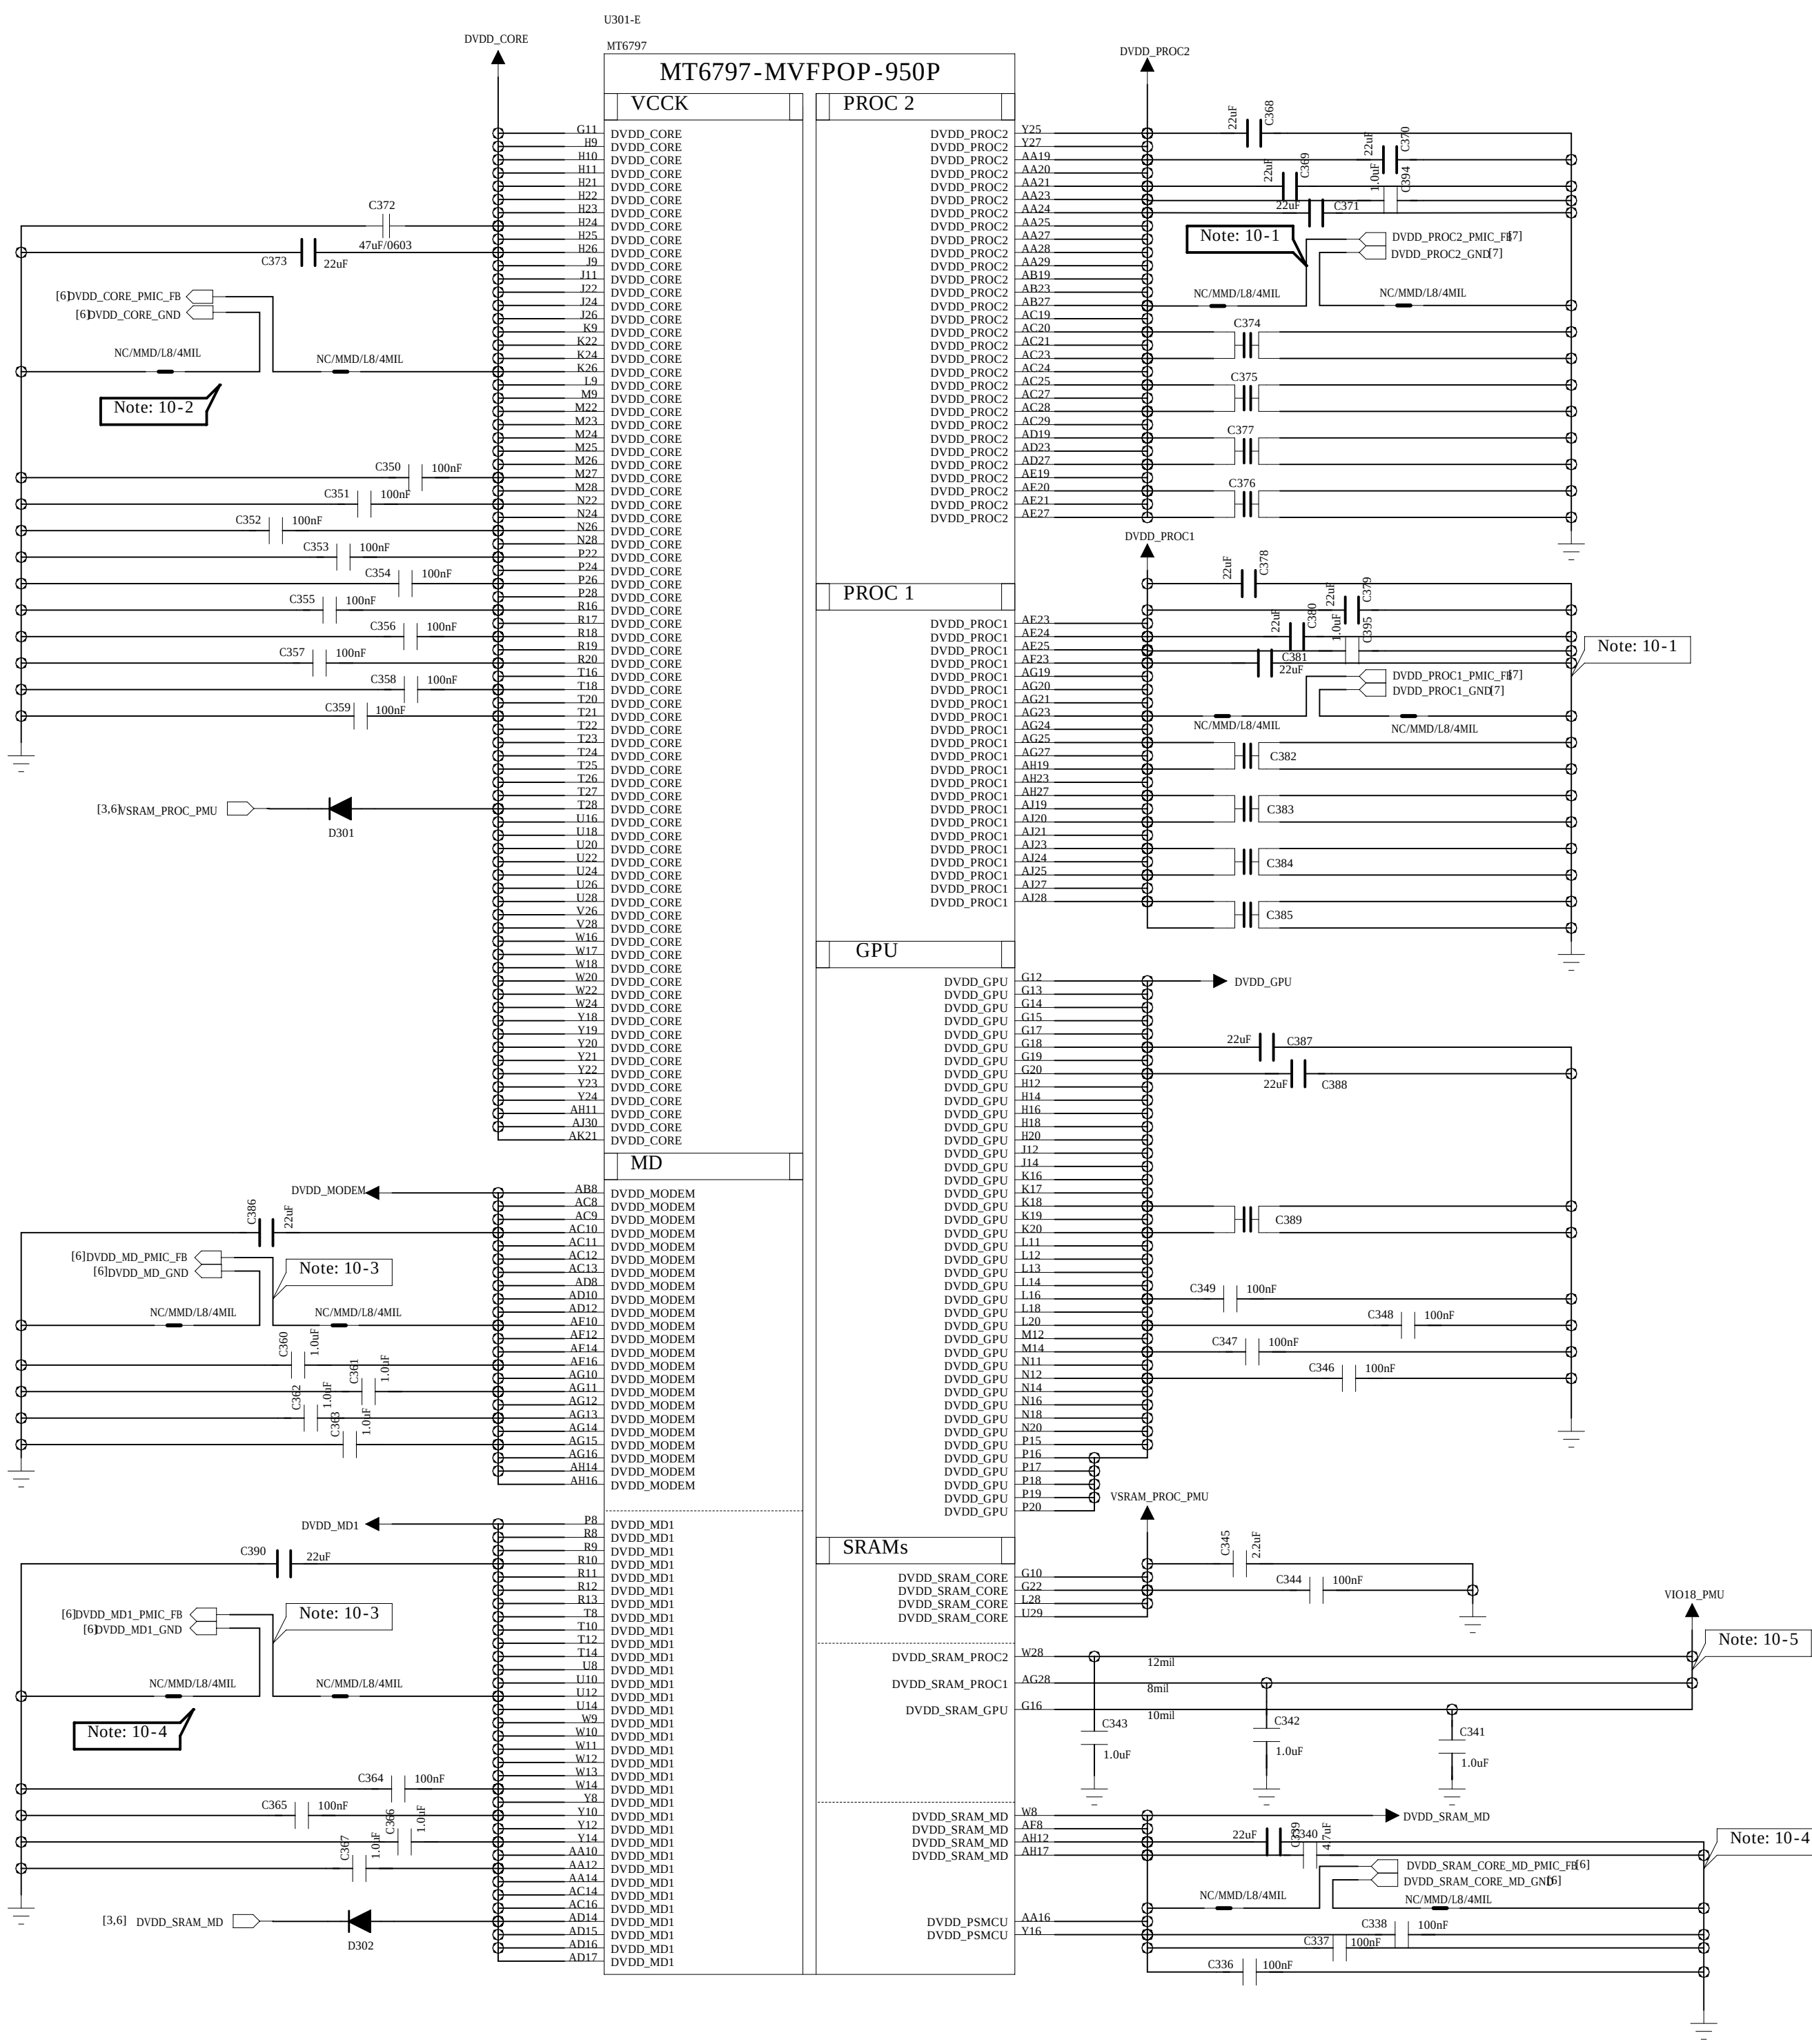

COMPANY: LC			
TITLE: CX880			
DESIGN: <Drawn By>	DATE: <Drawn Date>		
CHECKED: <Checked By>	DATE: <Checked Date>	CORE	SIZE
QUALITY CONTROL: <QC By>	DATE: <QC Date>	DRAWING NO. <Code> A0 <Drawing Number> Revision <Revision>	
RELEASED: <Released By>	DATE: <Released Date>	SCALE: <Scale>	SHEET: 26 20

REVISION RECORD			
LTB	REV NO	APPROVED	DATE

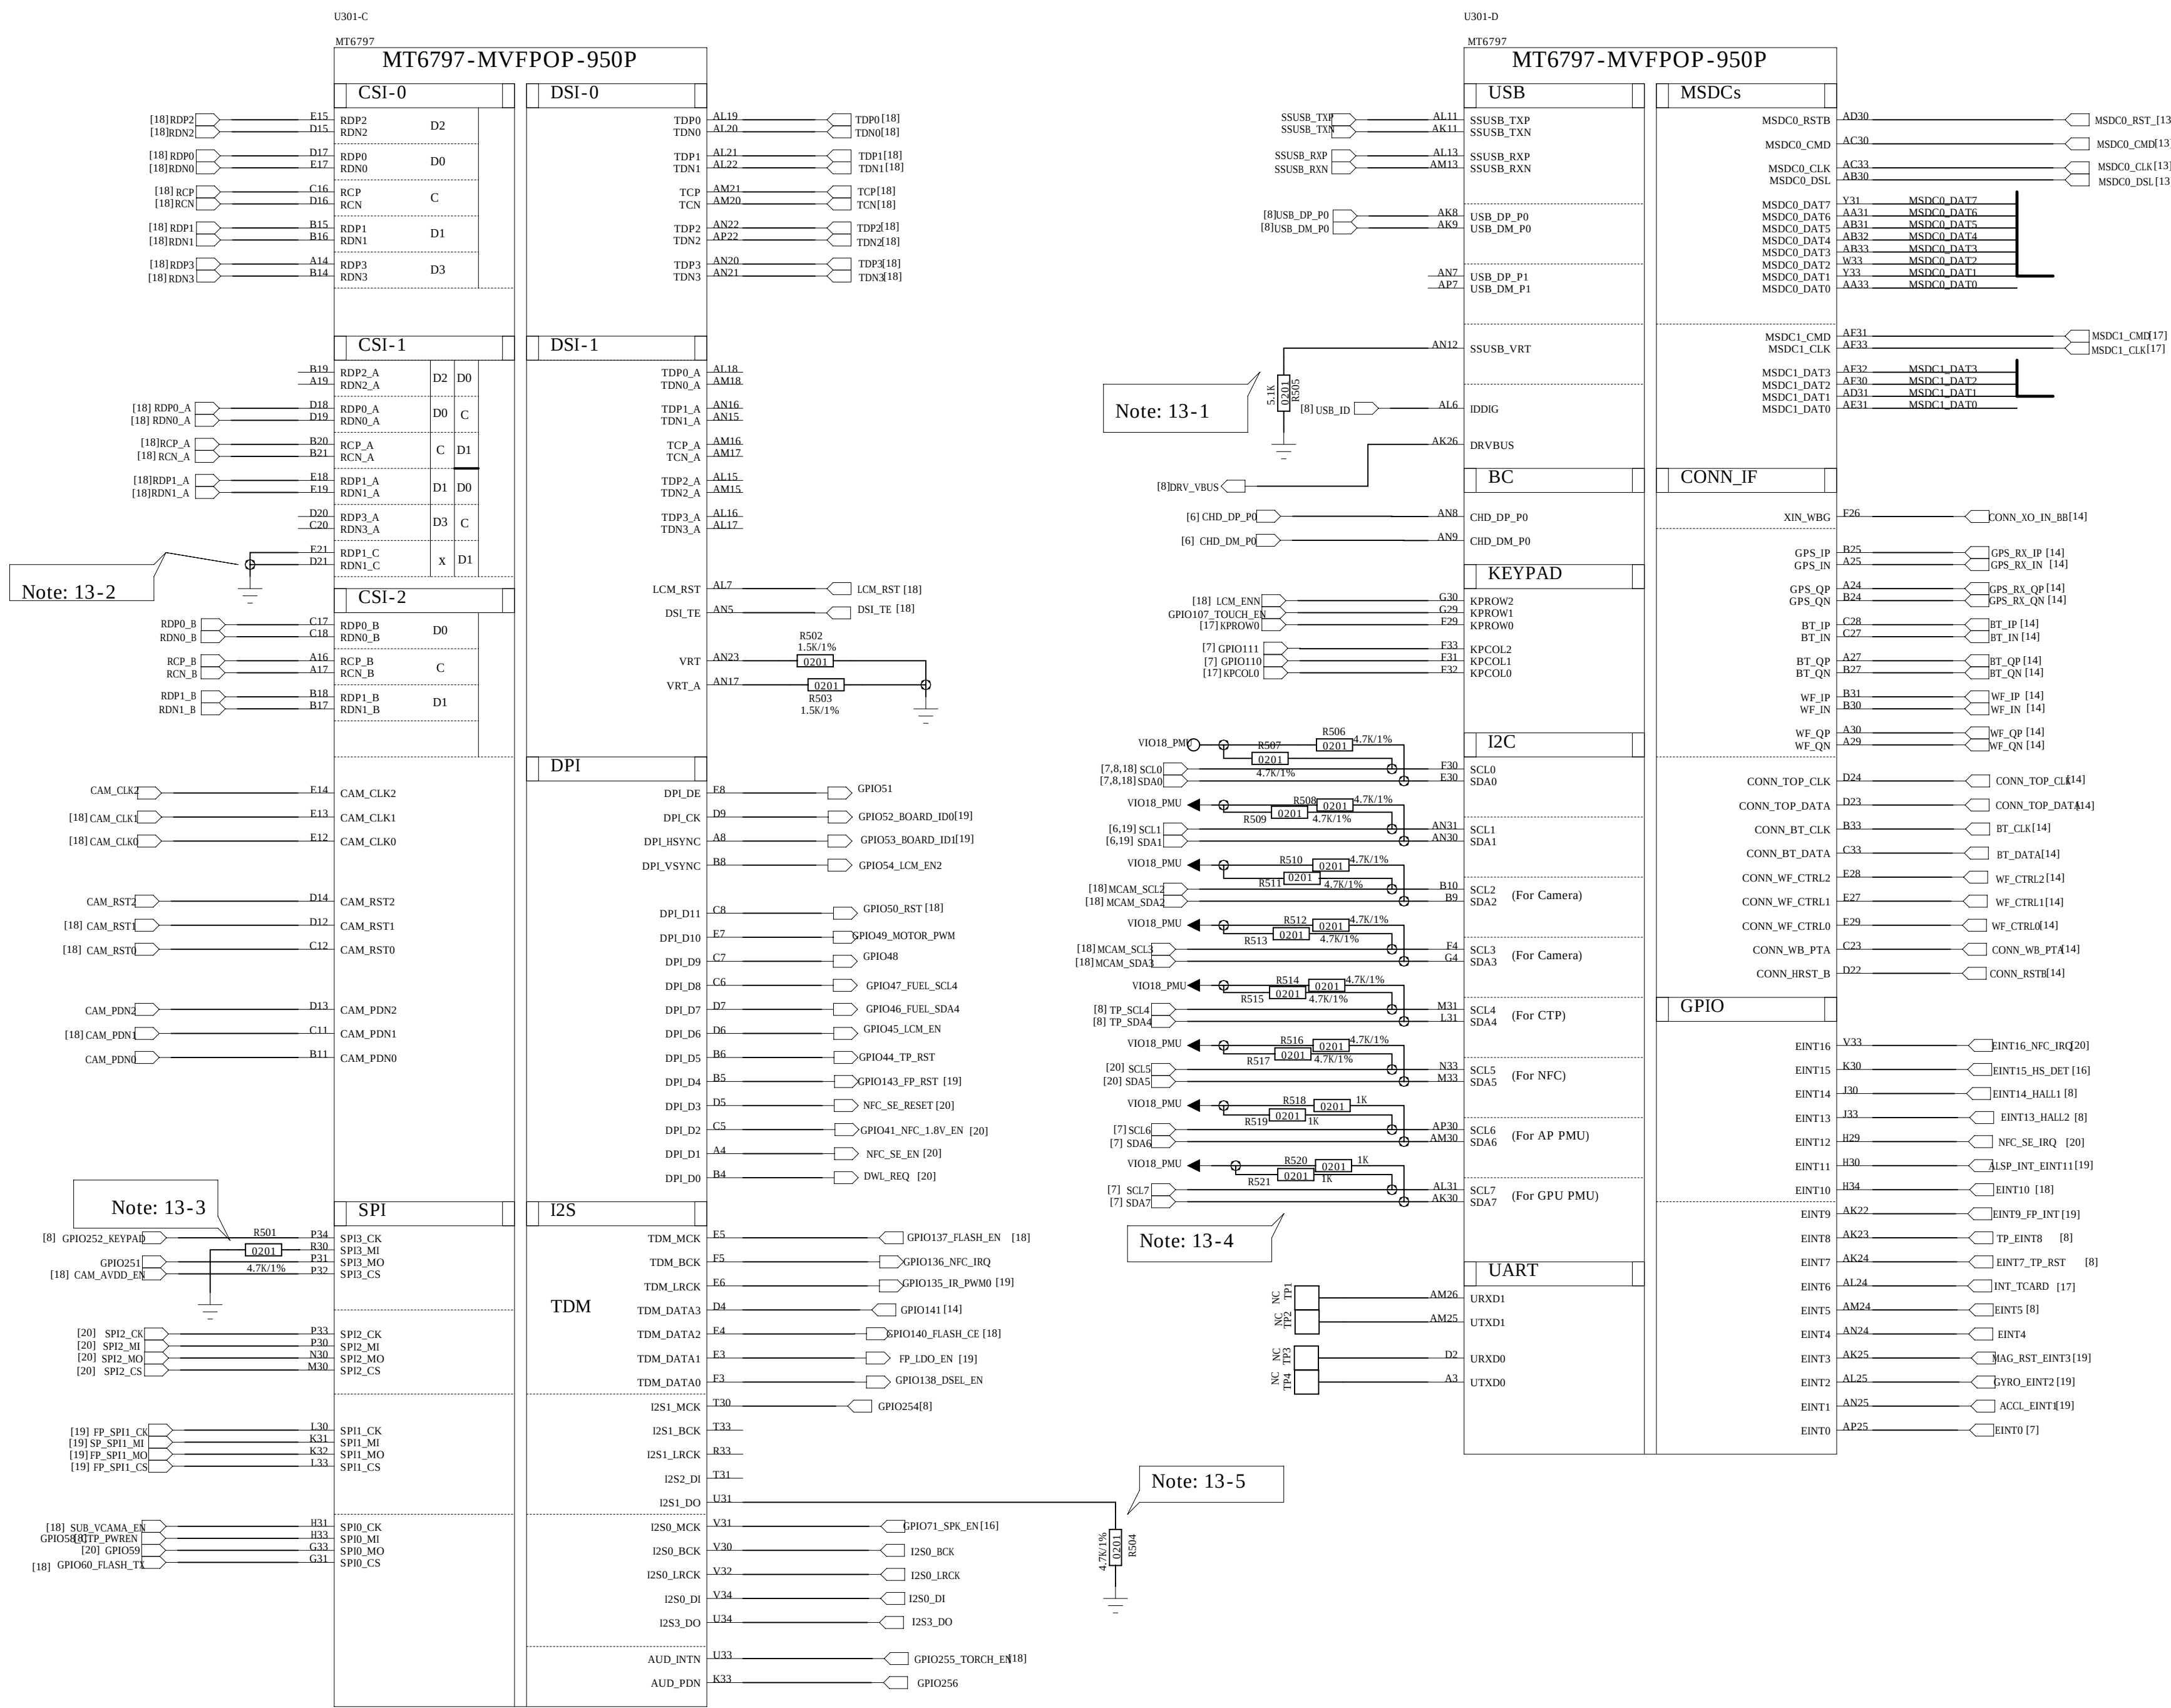

Schematic design notice of "12_BB_2" page.

Note 13-1: Default resistor of "SSUSB_VRT" can be NC if internal USB VRT is applied.

Note 13-2: Connect the the NC pins of CSI to GND


Note 13-3: The GPIO250 can't have external pull-up. 'C2K DROP_ZONE' output indicator is not allow to have external pull-up.

Note 13-4: The I/O type of I2C6/7 is push-pull; External pull-up is required if I2C6/7 slave devices can only support open-drain.

Note 13-5: The GPIO249 features I/O trap in system bootup that must be pulled down.



COMPANY: LC			
TITLE: CX880			
DESIGN: <Drawn By>	DATE: <Drawn Date>		
CHECKED: <Checked By>	DATE: <Checked Date>		
QUALITY CONTROL: <QC By>	DATE: <QC Date>		
RELEASED: <Released By>	DATE: <Release Date>		
CODE: A0		SIZE: <Drawing Number>	REV: <Revision>
SCALE: <Scale>		SHEET: 56	20

REVISION RECORD			
LTB	ECO NO	APPROVED	DATE

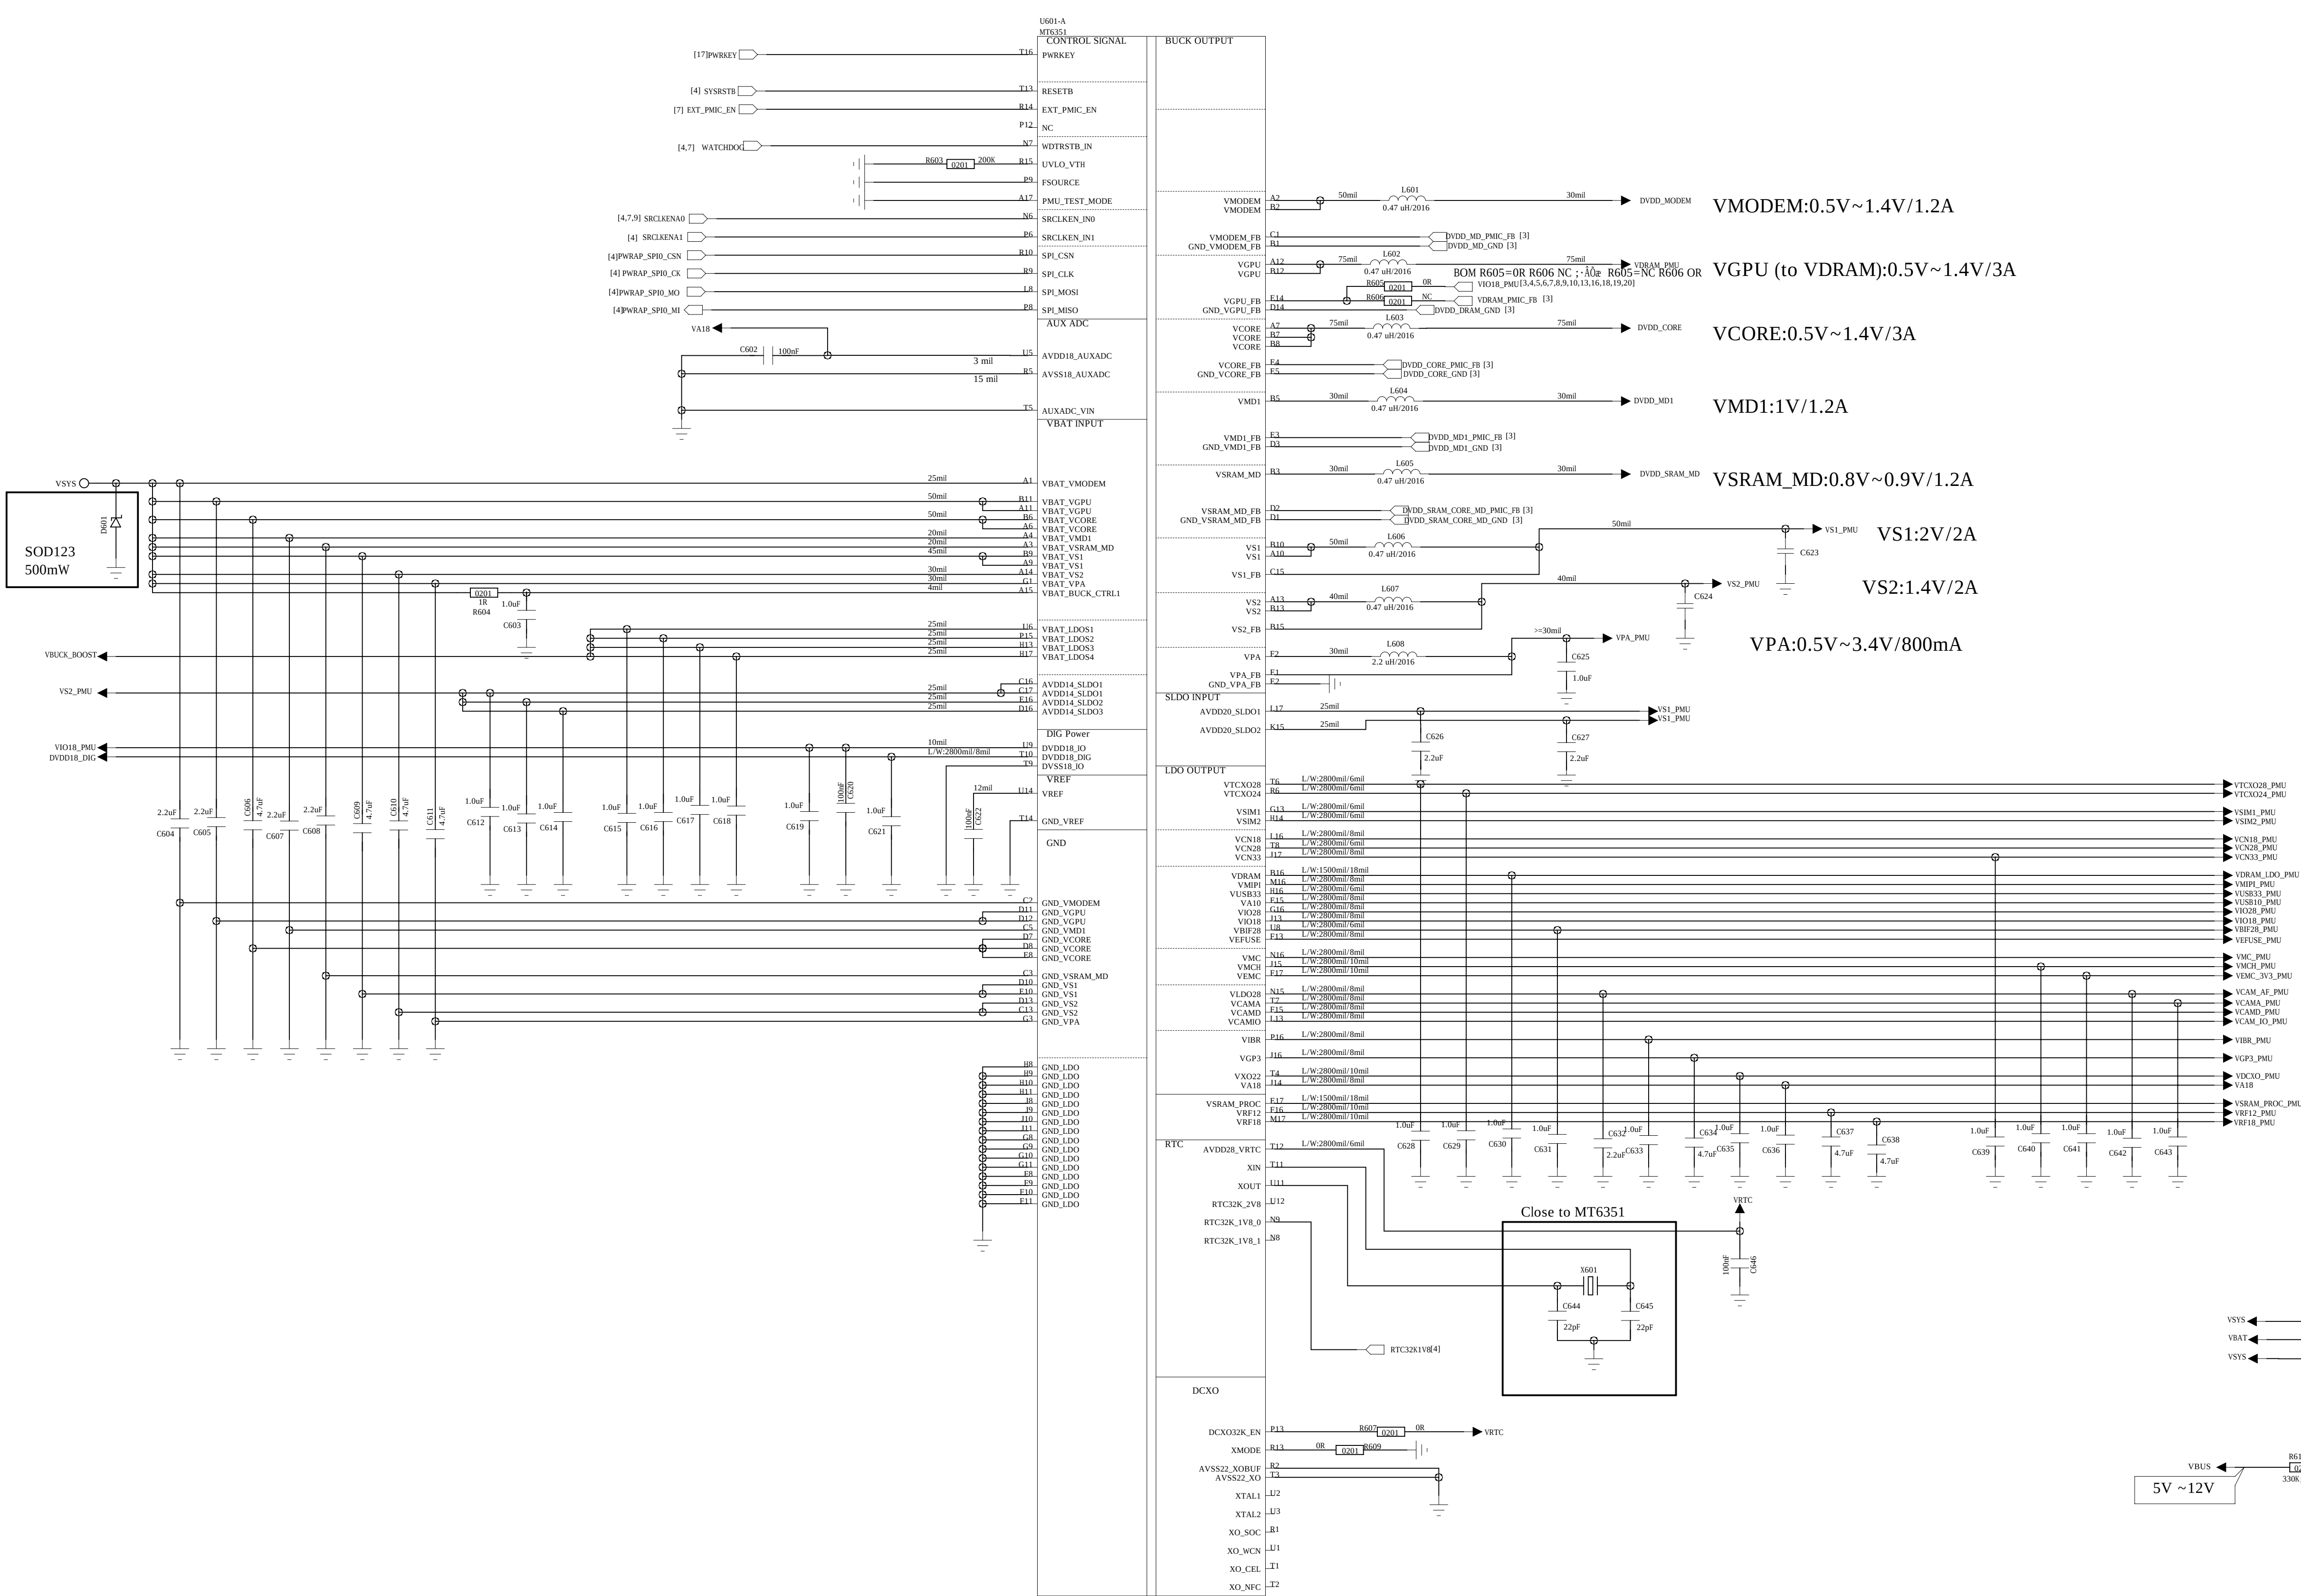

Schematic design notice of "21_POWER_MT6351_2" page.

Note 21-1: Reserve 1.5K in order to give additional power to turn on charger LED driver while low battery.

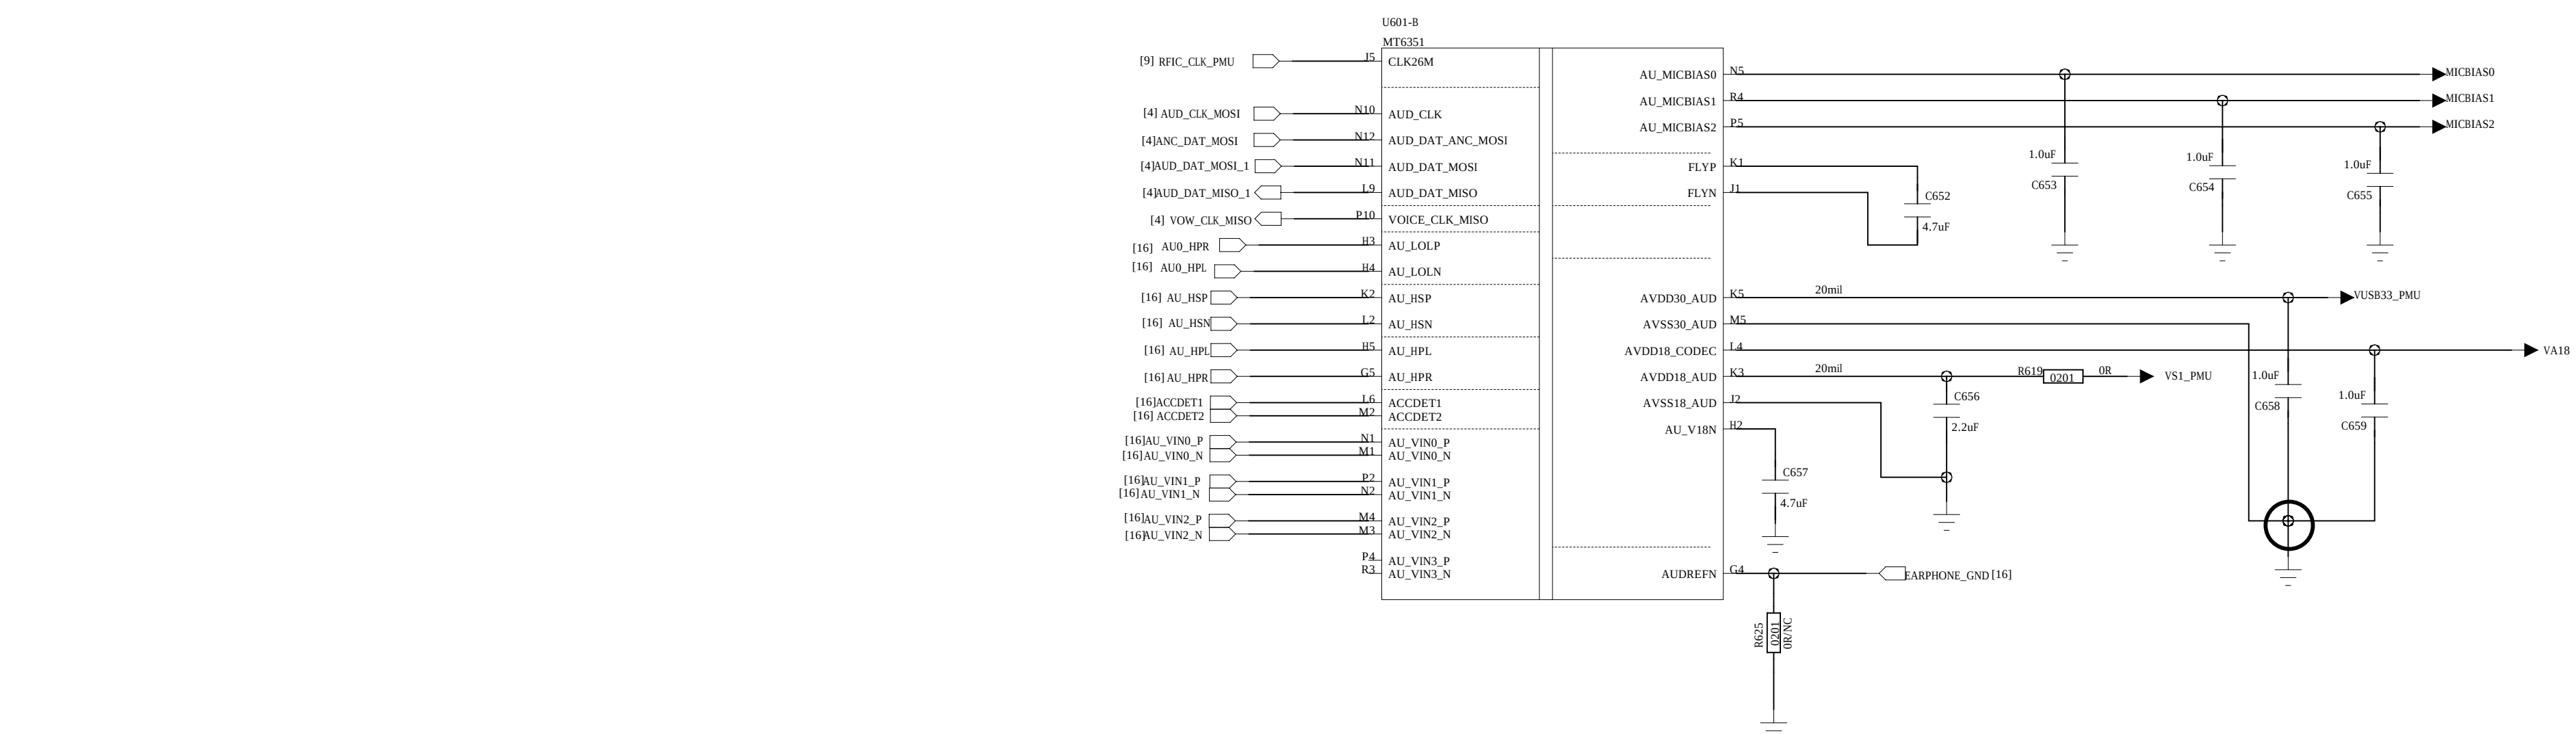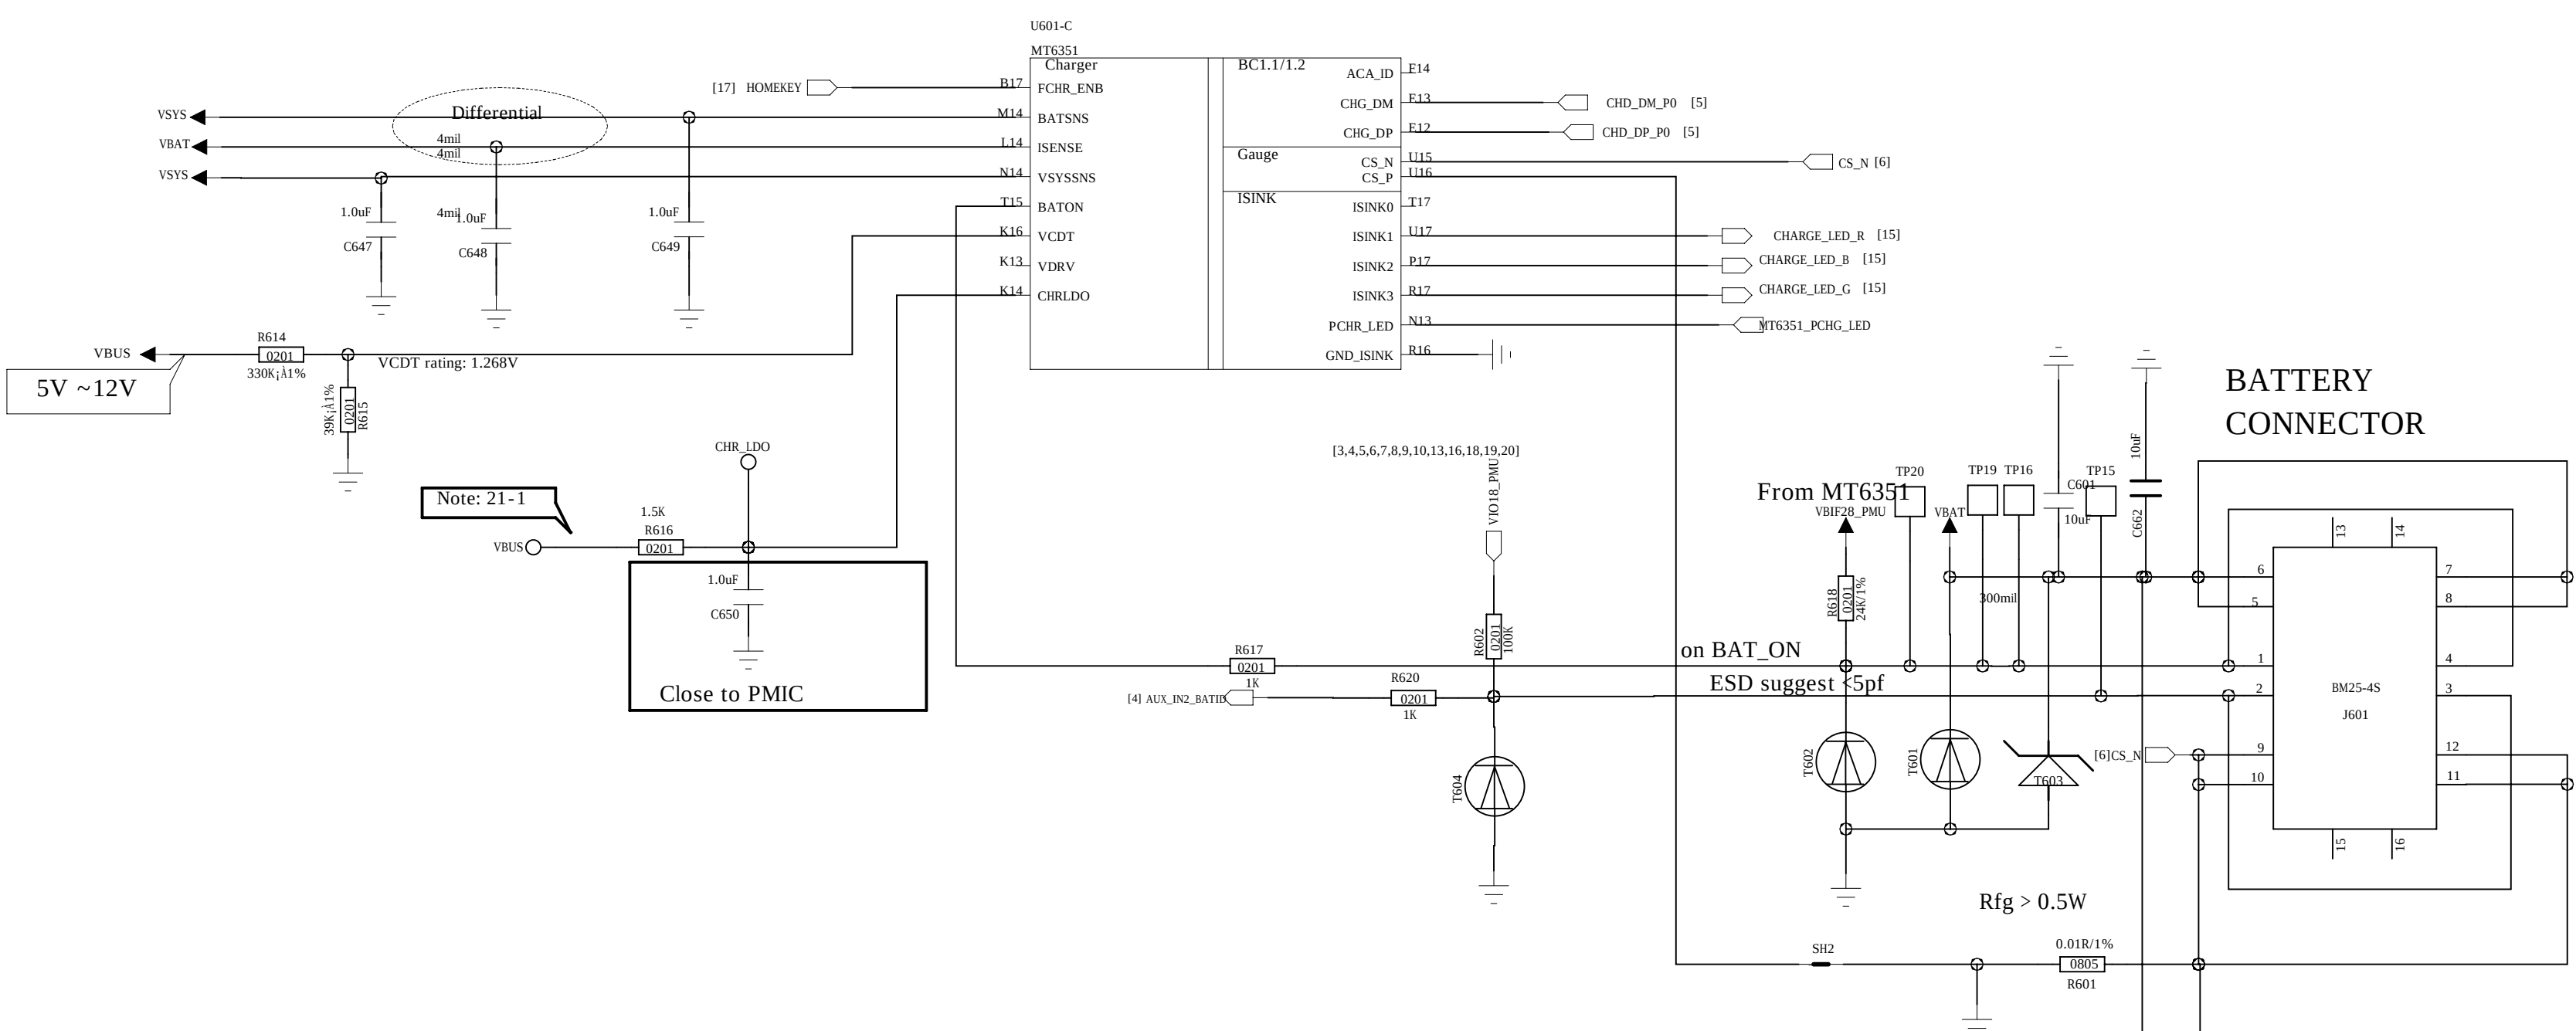


REVISION RECORD			
LTB	ECO NO	APPROVED	DATE

COMPANY:	LC		
TITLE:	CX880		
DRAWN:	<Drawn By>	DATE:	<Drawn Date>
CHECKED:	<Checked By>	DATE:	<Checked Date>
QUALITY CONTROL:	<QC By>	DATE:	<QC Date>
RELEASED:	<Released By>	DATE:	<Release Date>
CODE:	<Code>	SIZE:	<Size>
DRAWING NO:	A0	DRAWING NO:	<Drawing Number>
REV:	<Revision>	REV:	<Revision>
SCALE:	<Scale>	SCALE:	<Scale>
SHEET:	6	SHEET:	20

REVISION RECORD			
CTR	REV NO.	APPROVED	DATE

VPROC Buck

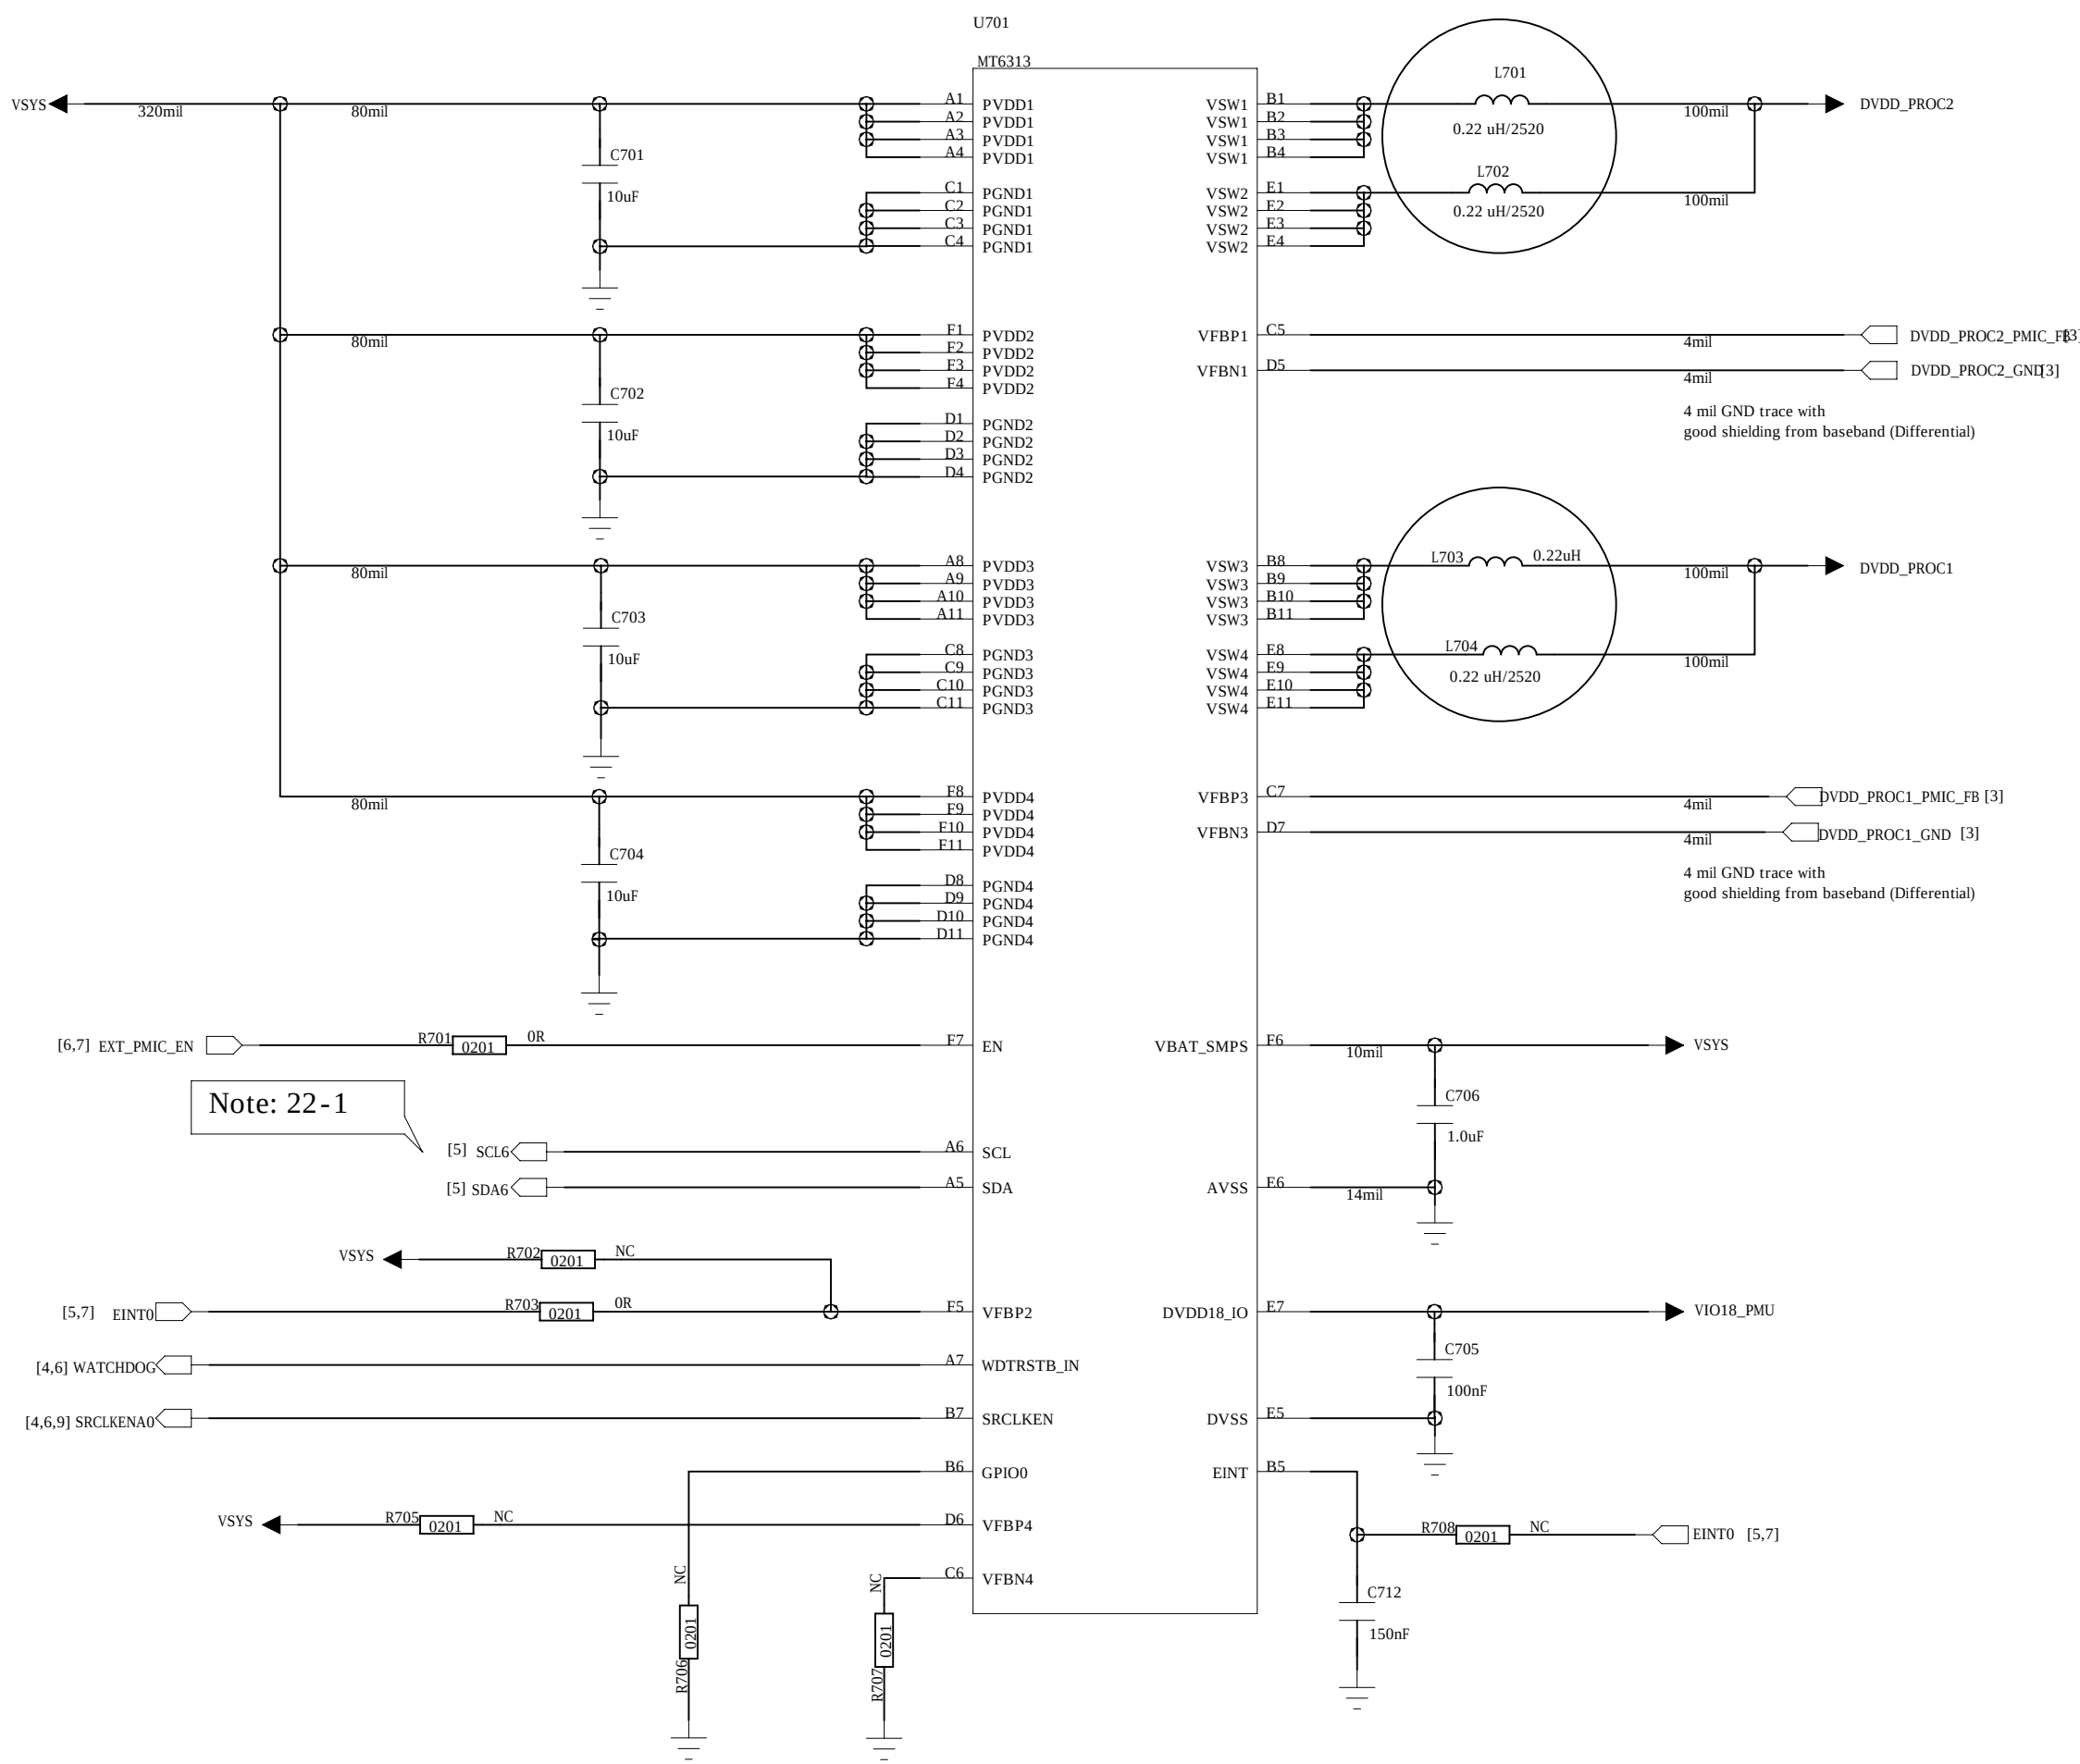


Schematic design notice of "22_POWER_2+2PHASE_BUCK" page.

Note 22-1: Buck EN is controlled by SRCLKEN0 or I2C

Buck for VDRAM

FAN53526 / Buck I2C address: 0X60 (Write:0xC0, Read:0xC1)

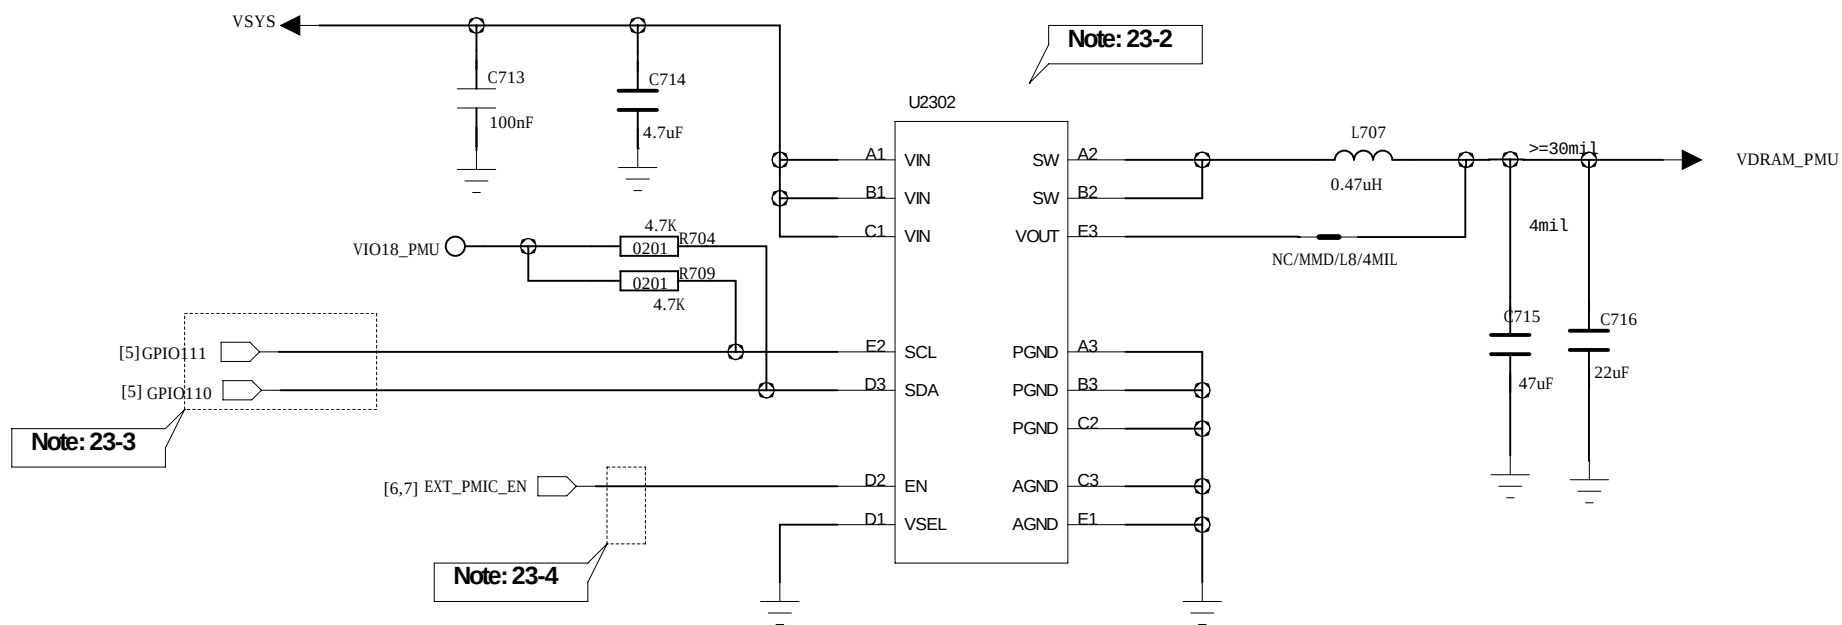

Schematic design notice of "23_POWER_VGPU_VM" page.

Note 23-2: BOM option to select MT6351's VGPU or 3rd party PMIC as VDRAM (1.2V) power

	U2302	PL2302	C2303	C2304	R2301	R2302
MT6351's VGPU as VDRAM	NC / DNI	NC / DNI	NC / DNI	NC / DNI	NC / DNI	NC / DNI
3rd party PMIC as VDRAM	FAN53526	0.47uF	0.1uF	4.7uF	4.7K	4.7K


Note: NC / DNI = No connect / Do not install.

Note 23-3: Use pin muted I2C-1 to control FAN53526 since its I2C base address is 0x60 same as VGPU and MHL.

Note 23-4: FAN53526's EN pin is driven by MT6351.

Companion Buck/Boost

FAN49101 / Buck-boost I2C address: 0X70 (Write:0xE0, Read:0xE1)

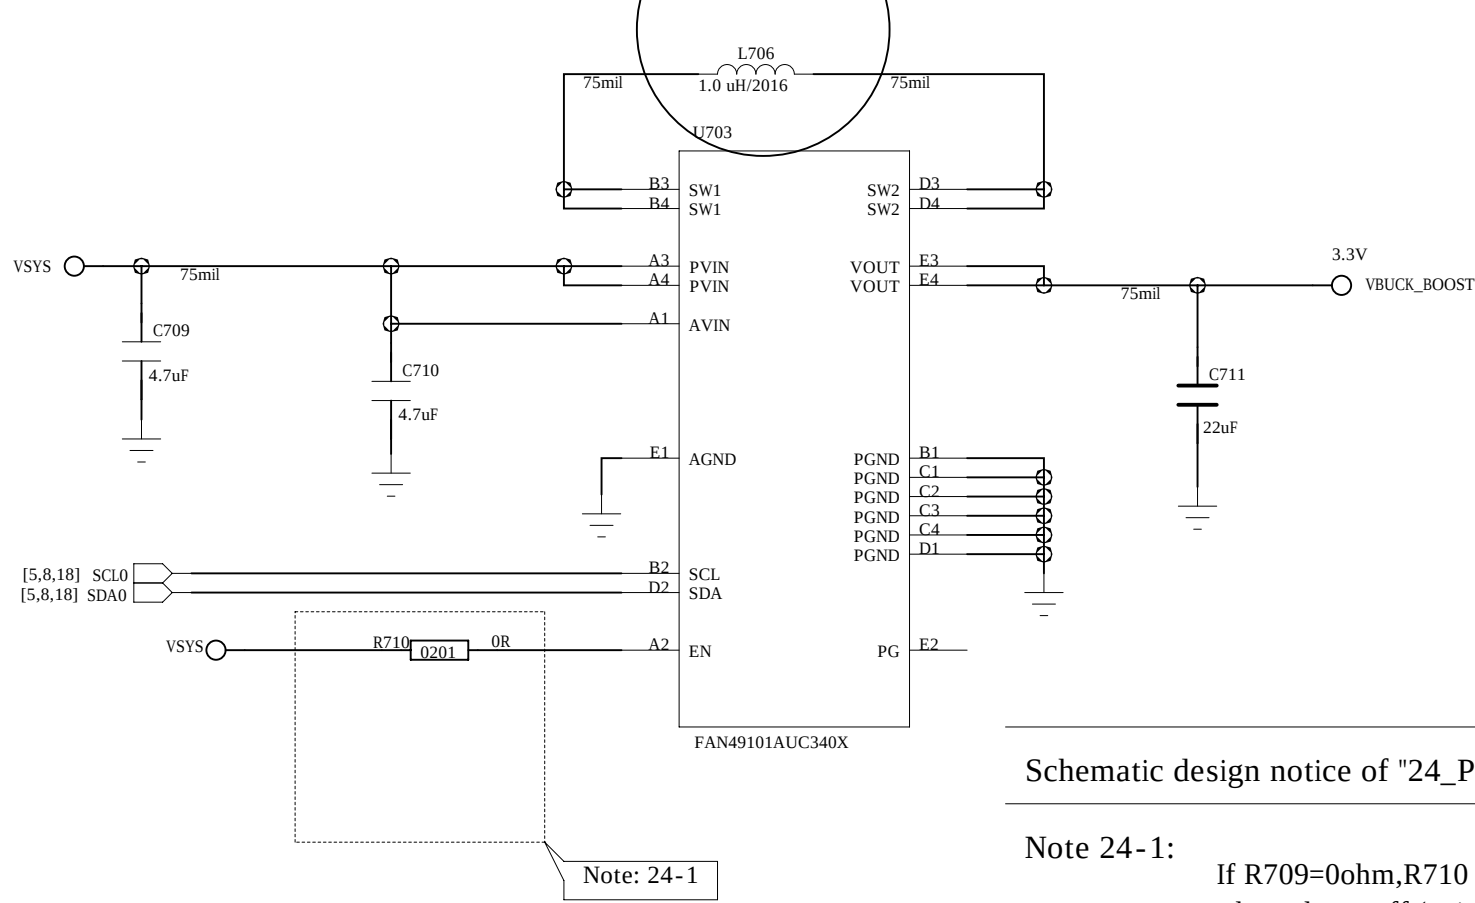


Schematic design notice of "24_POWER_THIRD-PARTY" page.

Note 24-1: If R709=0ohm,R710 NC,R5109=0ohm: MT6605 can't support card mode function when phone off (quick boot disable)
If R709=NC,R710=0ohm,R5109=0ohm: MT6605 can support card mode function when phone off(quick boot disable)

2-Phase Buck

FAN53555 / Buck I2C address: 0X60 (Write:0xC0, Read:0xC1)



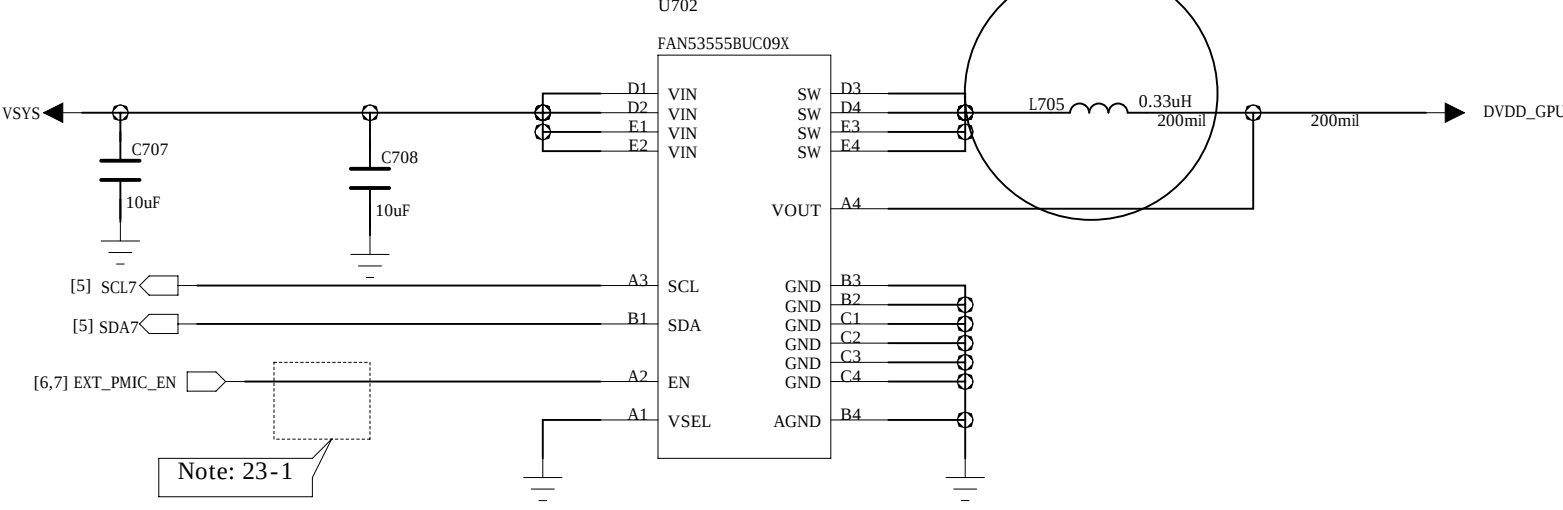


Schematic design notice of "23_POWER_VGPU" page.


Note 23-1: FAN53555's EN pin is driven by MT6351.

COMPANY: LC			
TITLE: 20_POWER_MT6328			
CODE:	SIZE:	DRAWING NO:	REV:
<Code>	A0	<Drawing Number>	<Revision>
SCALE: <Scale>	SHEET: 20		

REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE

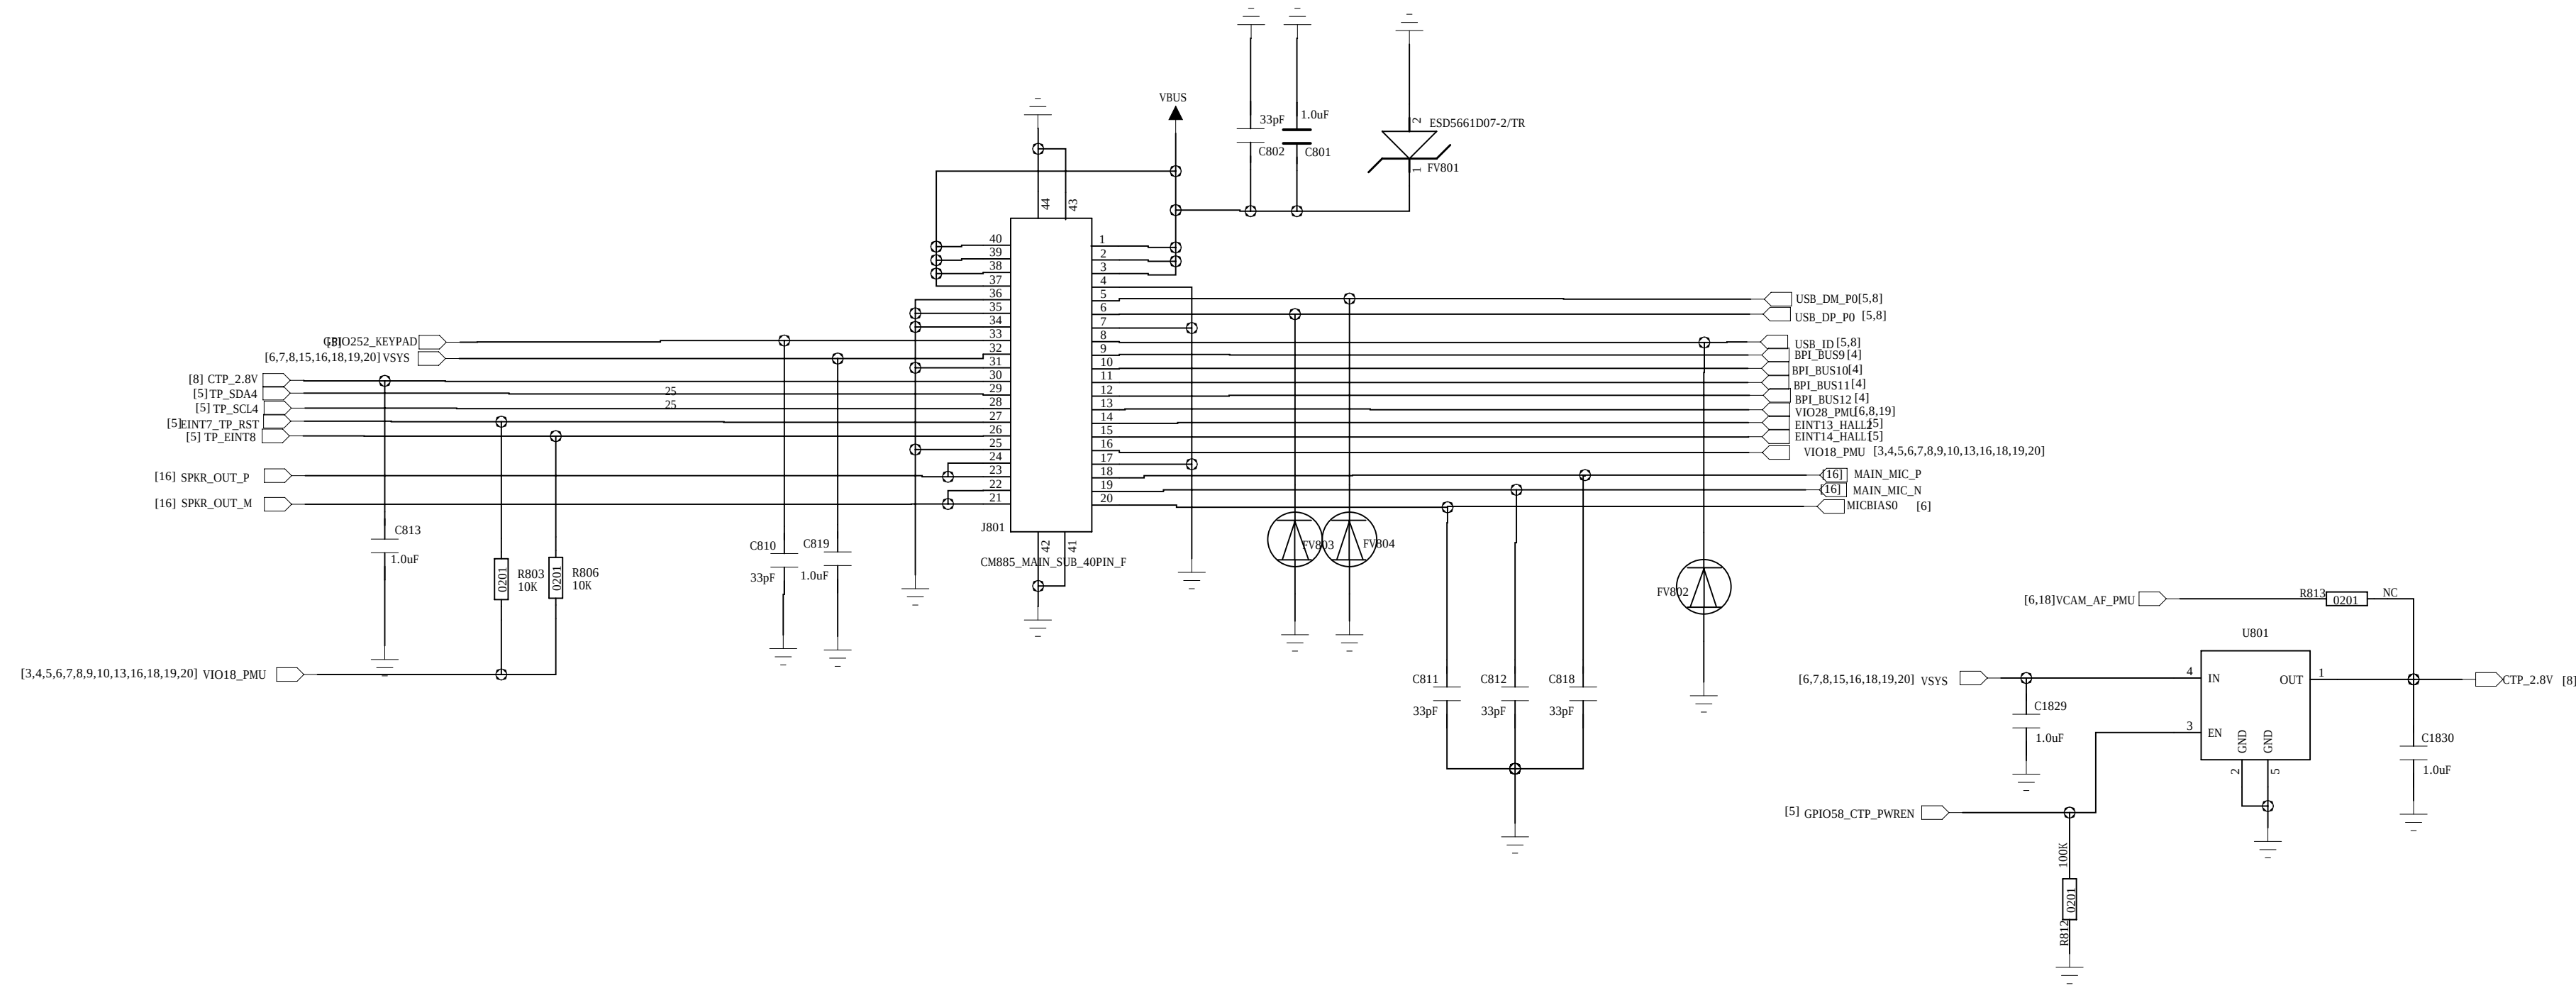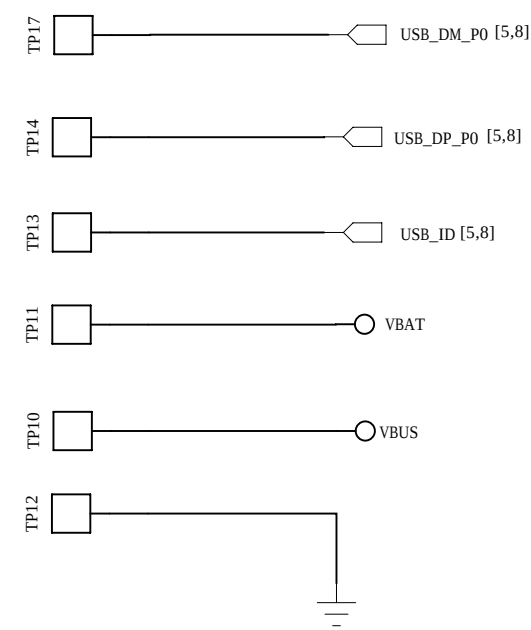


SW Charger / Power Path

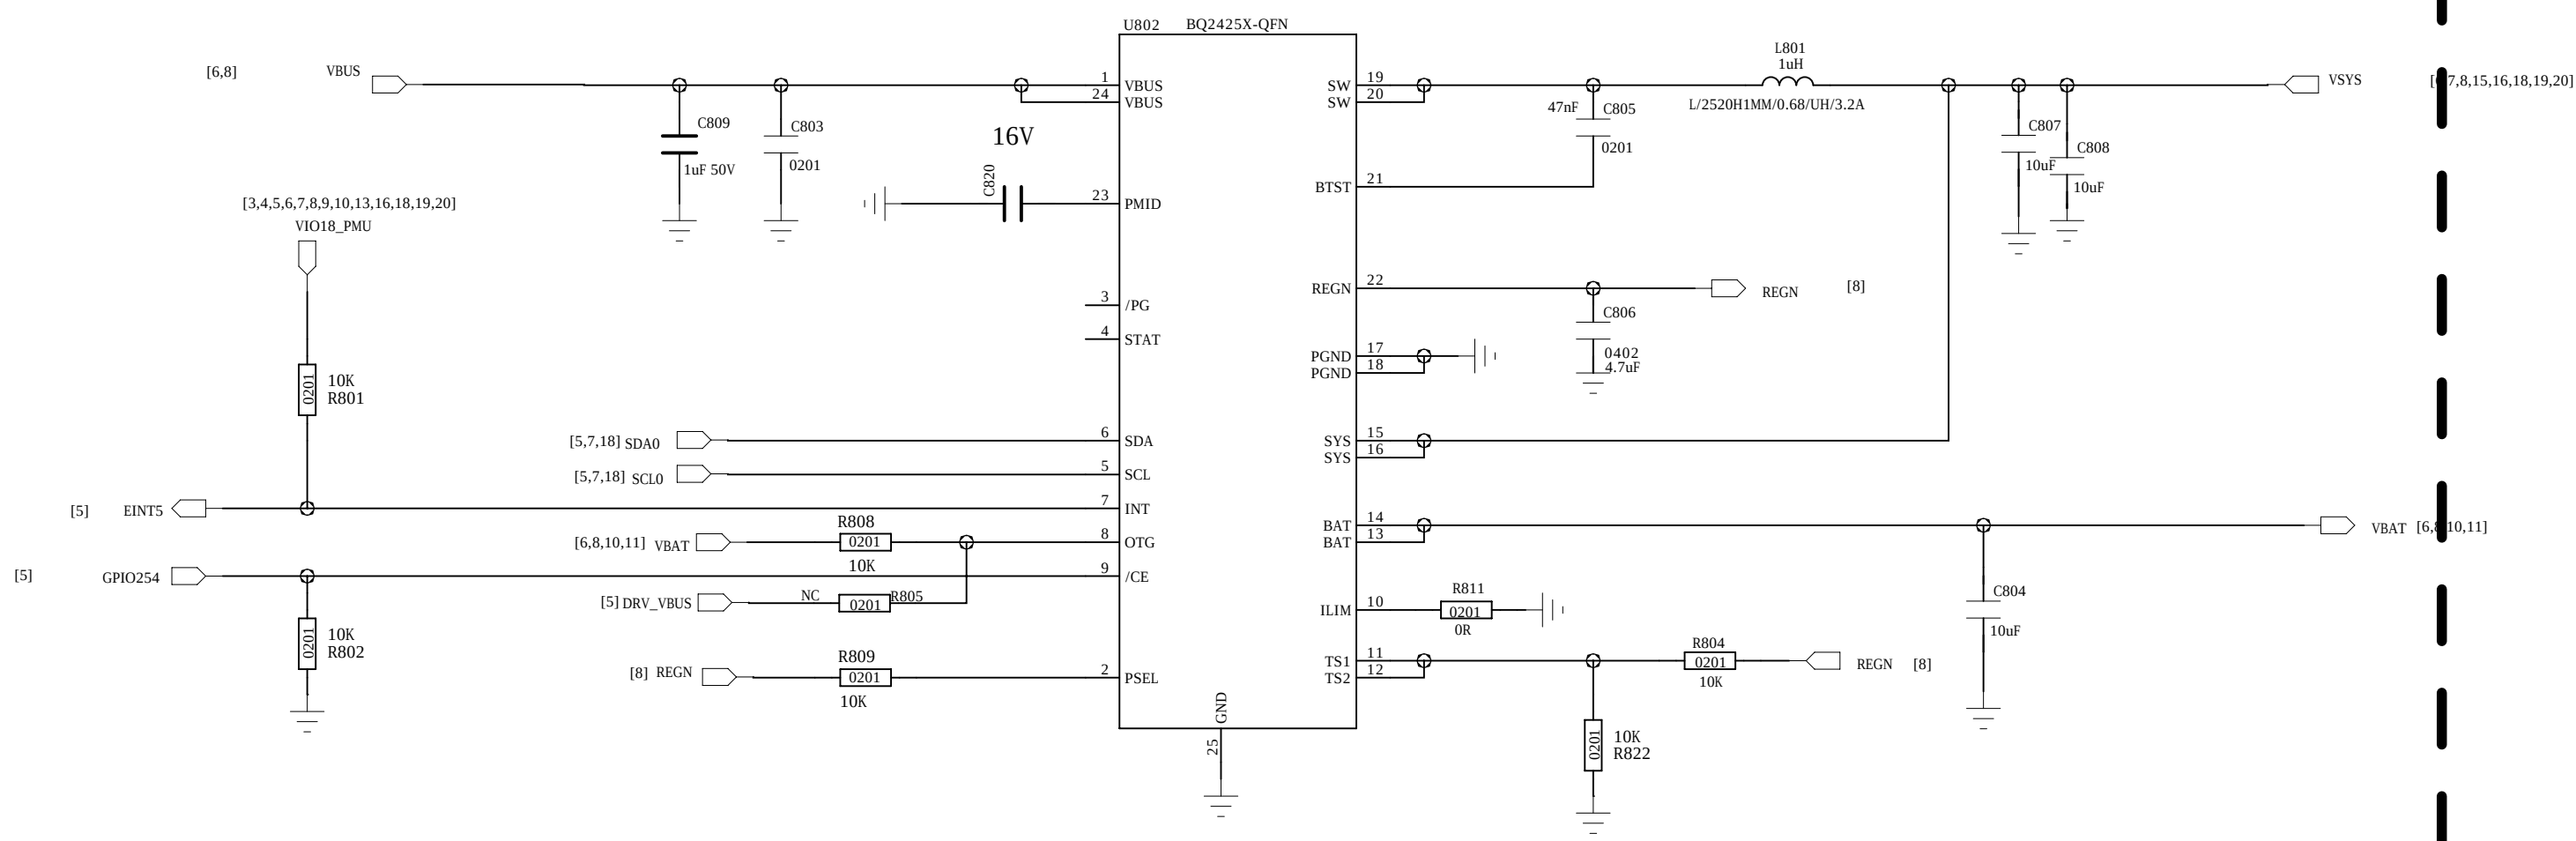

DRAWN: <Drawn By>				DATED: <Drawn Date>			
CHECKED: <Checked By>				DATED: <Checked Date>			
QUALITY CONTROL: <QC By>				DATED: <QC Date>			
RELEASED: <Released By>				DATED: <Release Date>			
CODE: <Code>				SIZE: A0			
DRAWING NO: <Drawing Number>				REV: <Revision>			
SCALE: <Scale>				SHEET 8 20			


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

DPDT SWITCH

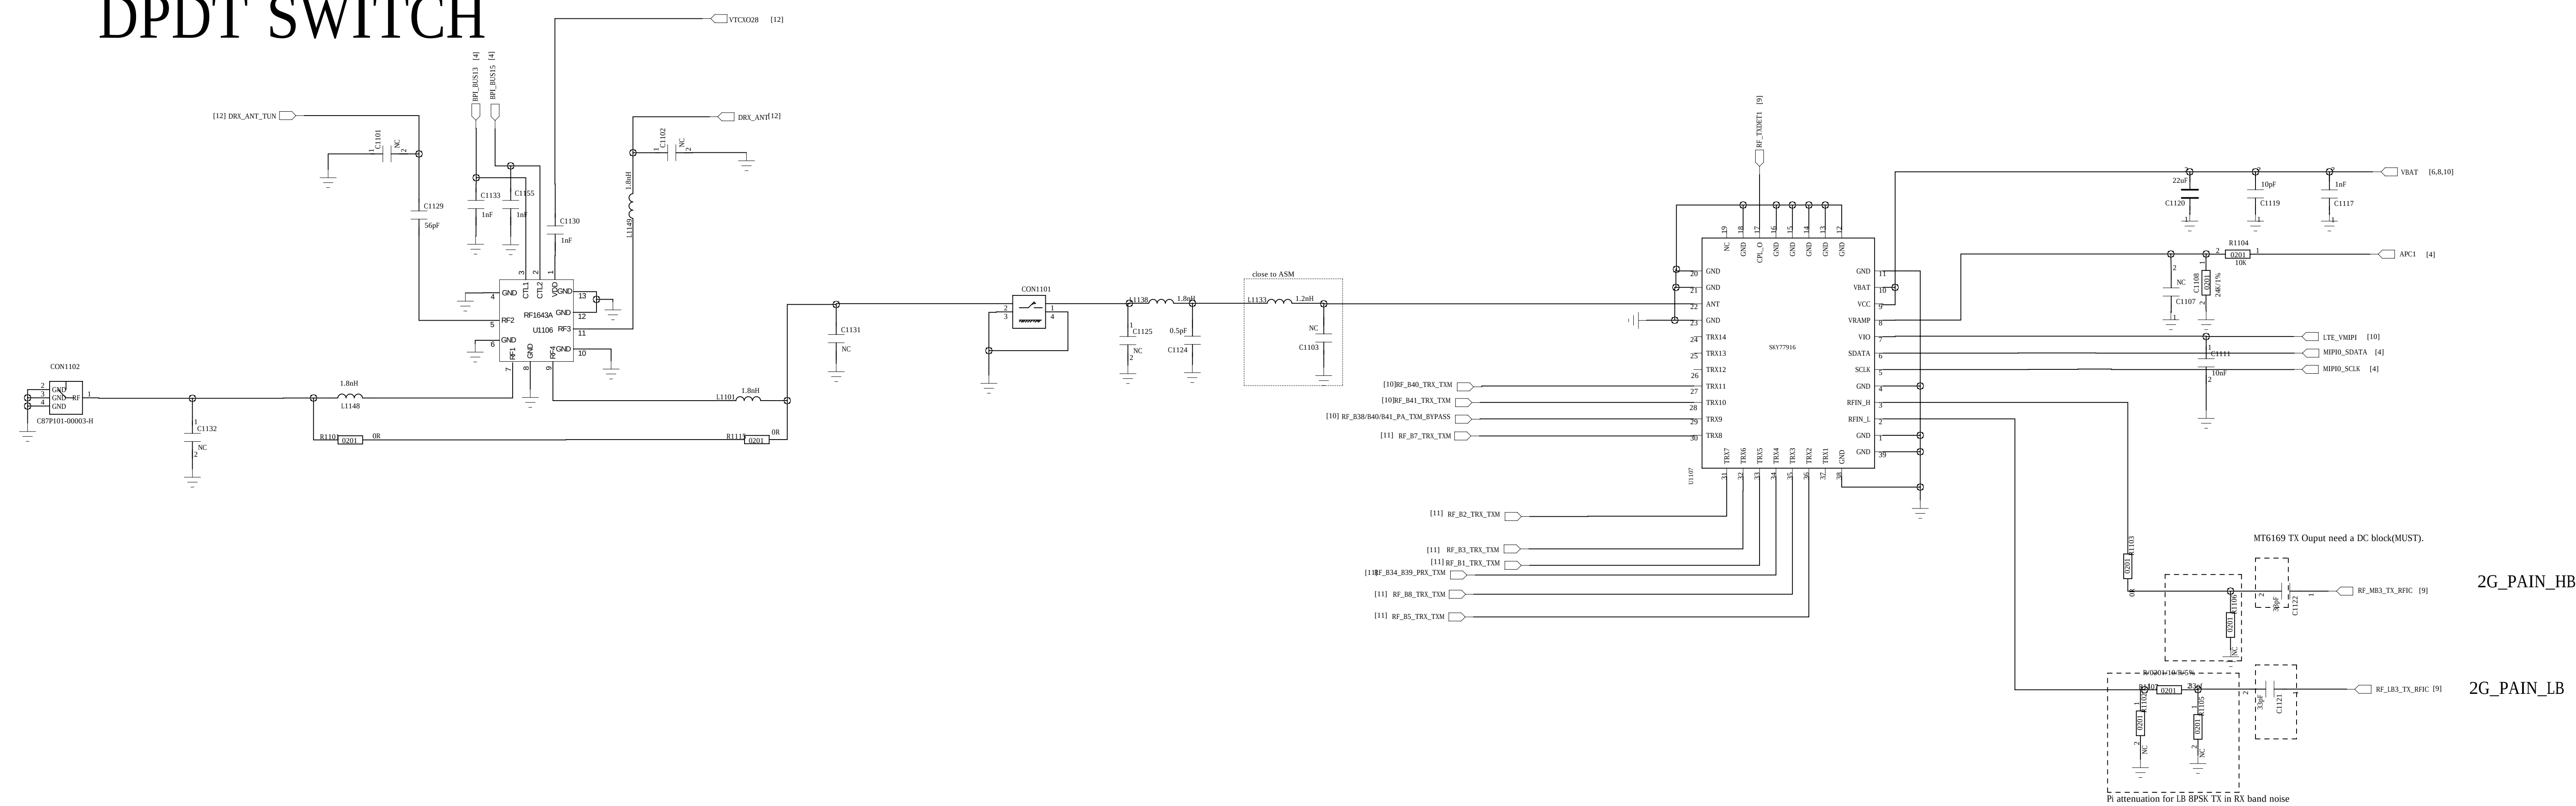

B1 TRX


no CA by xiaozhanglong

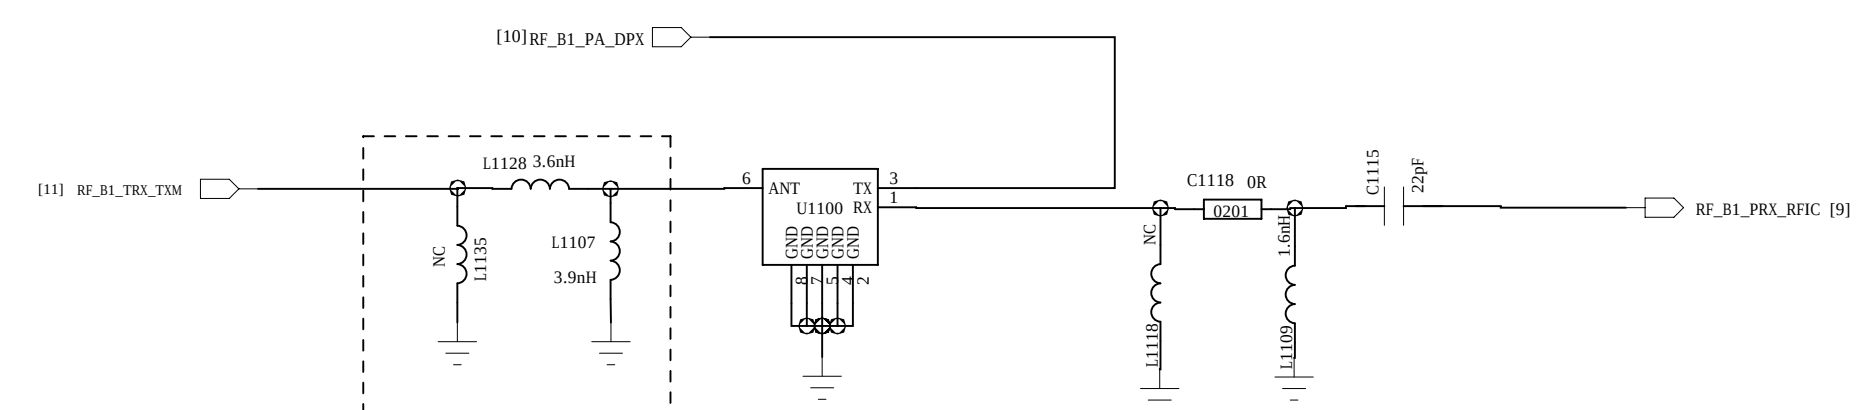


no CA new 20160413

B3 TRX


no CA by xiaozhanglong

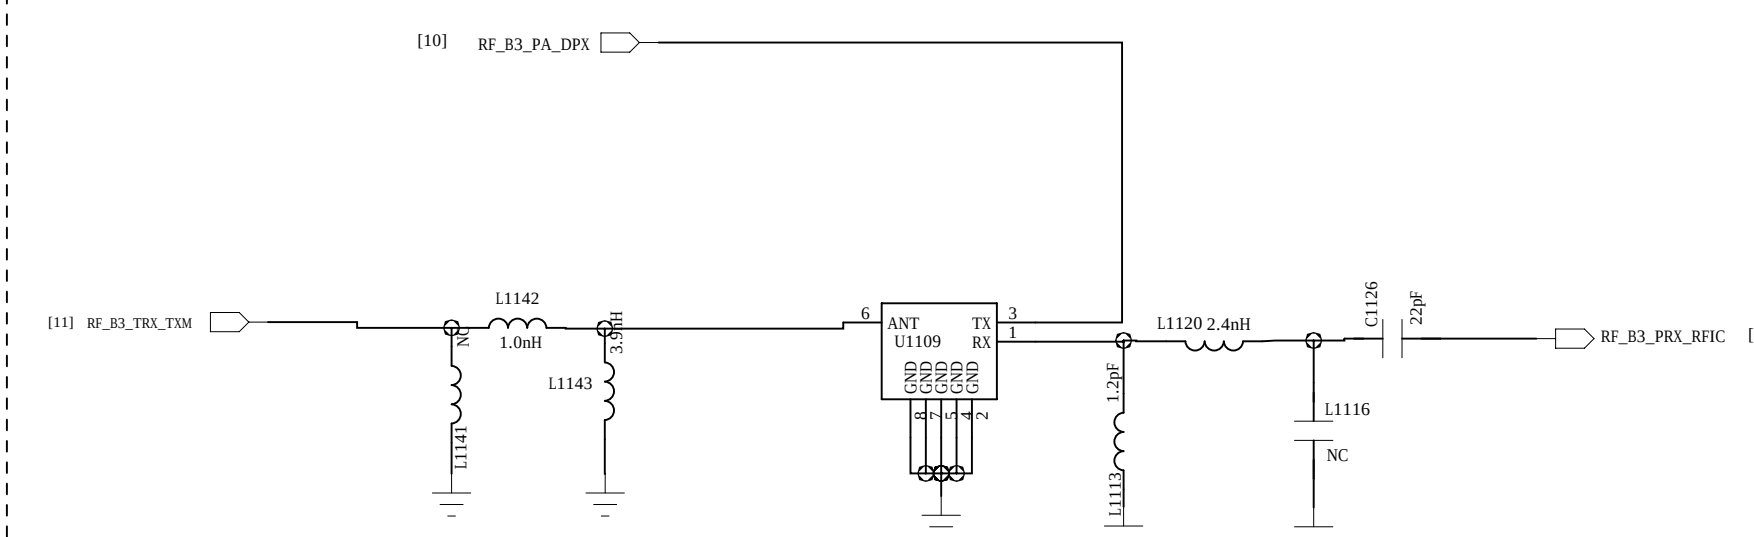 1.8×1.4 


B7 TRX

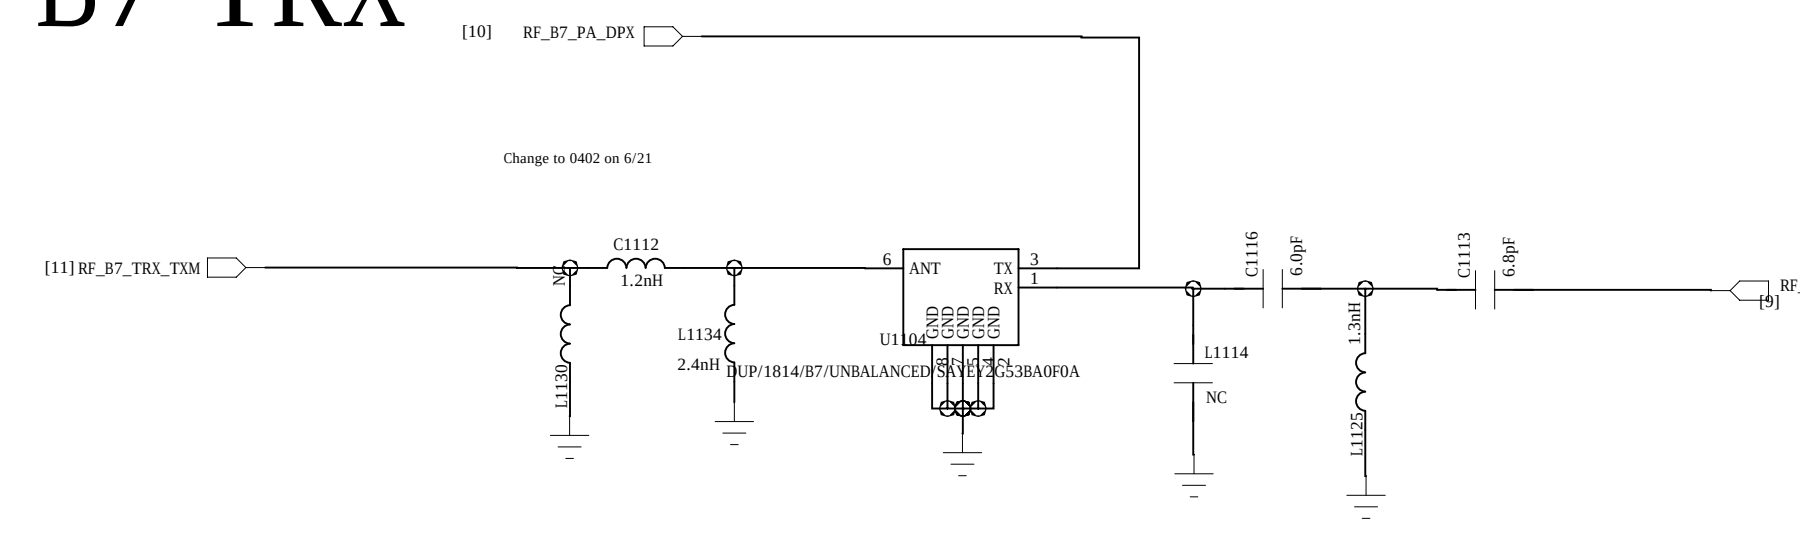


B2 TRX

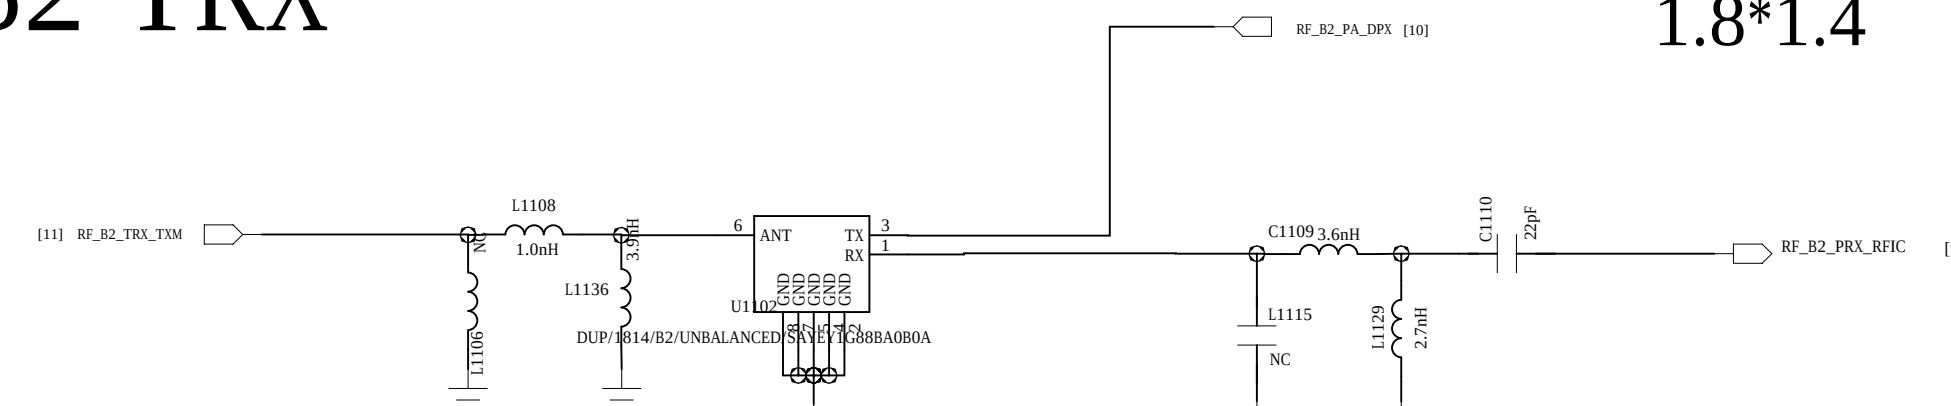 1.8×1.4 


B8 TRX

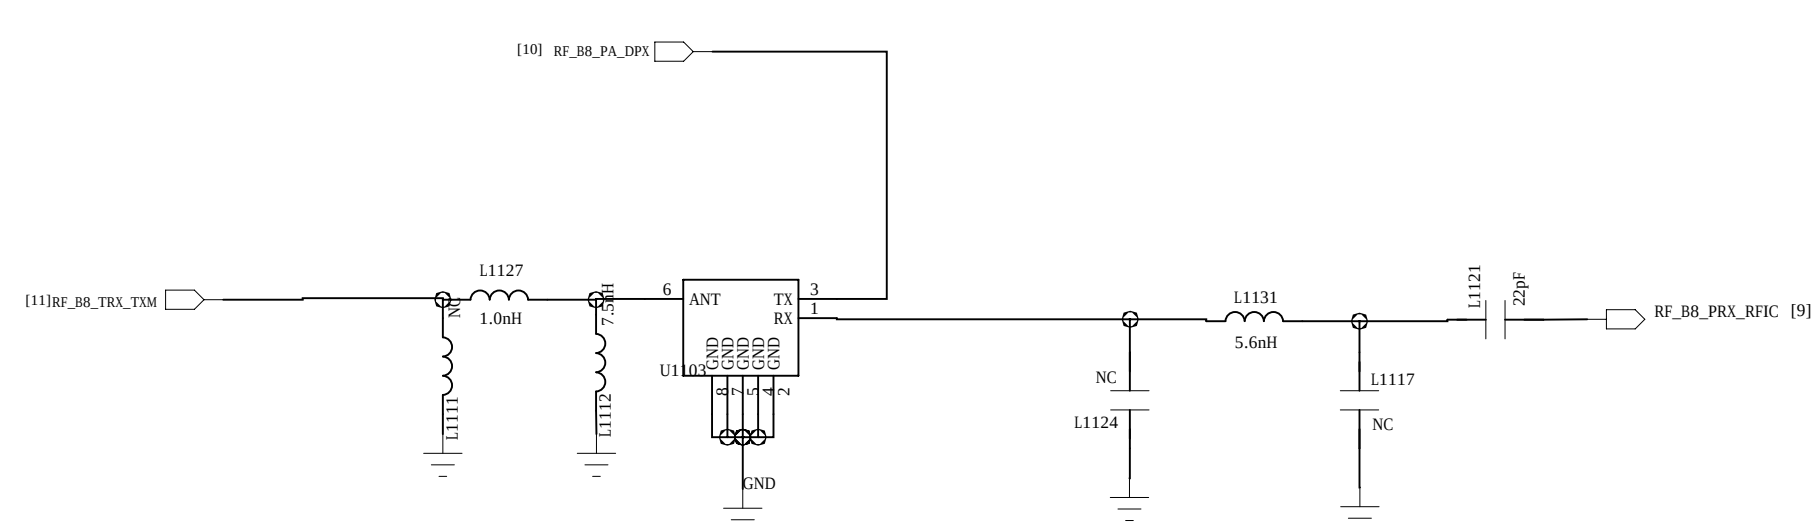 1.8×1.4 

B5 TRX

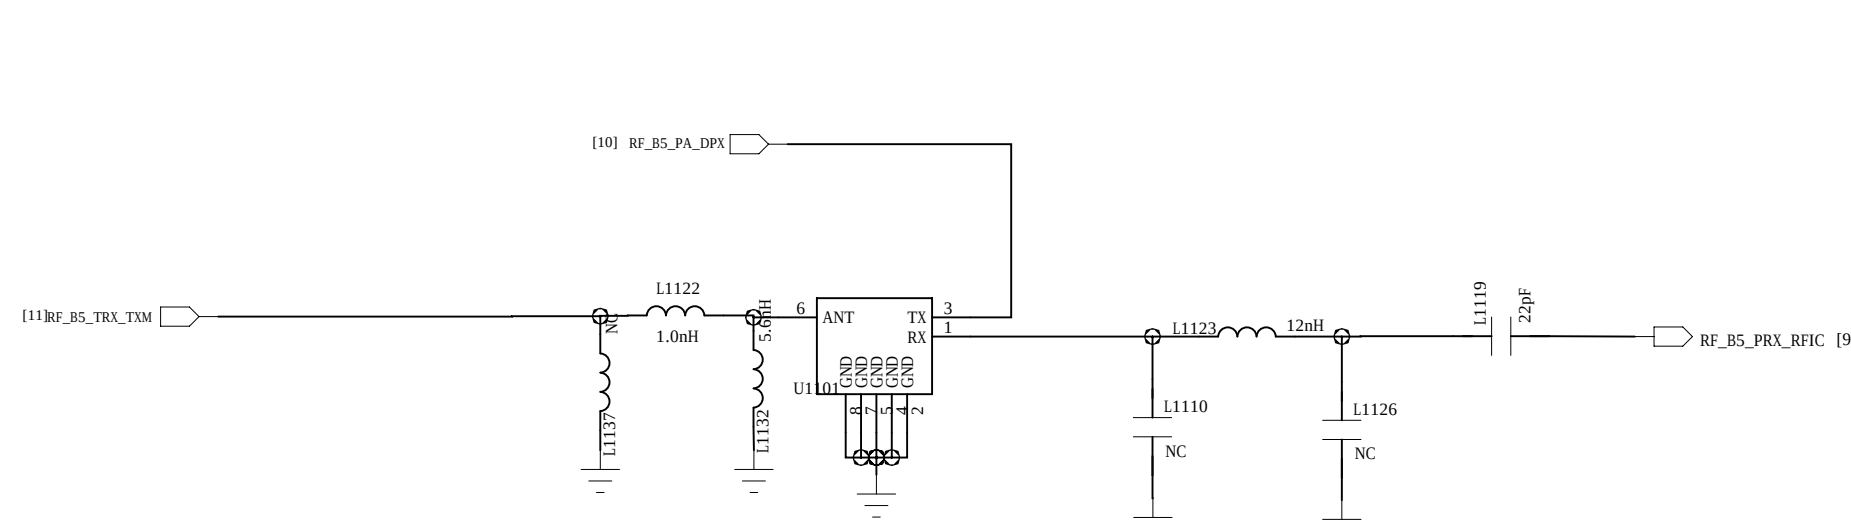 1.8×1.4 

B34/39 PRX


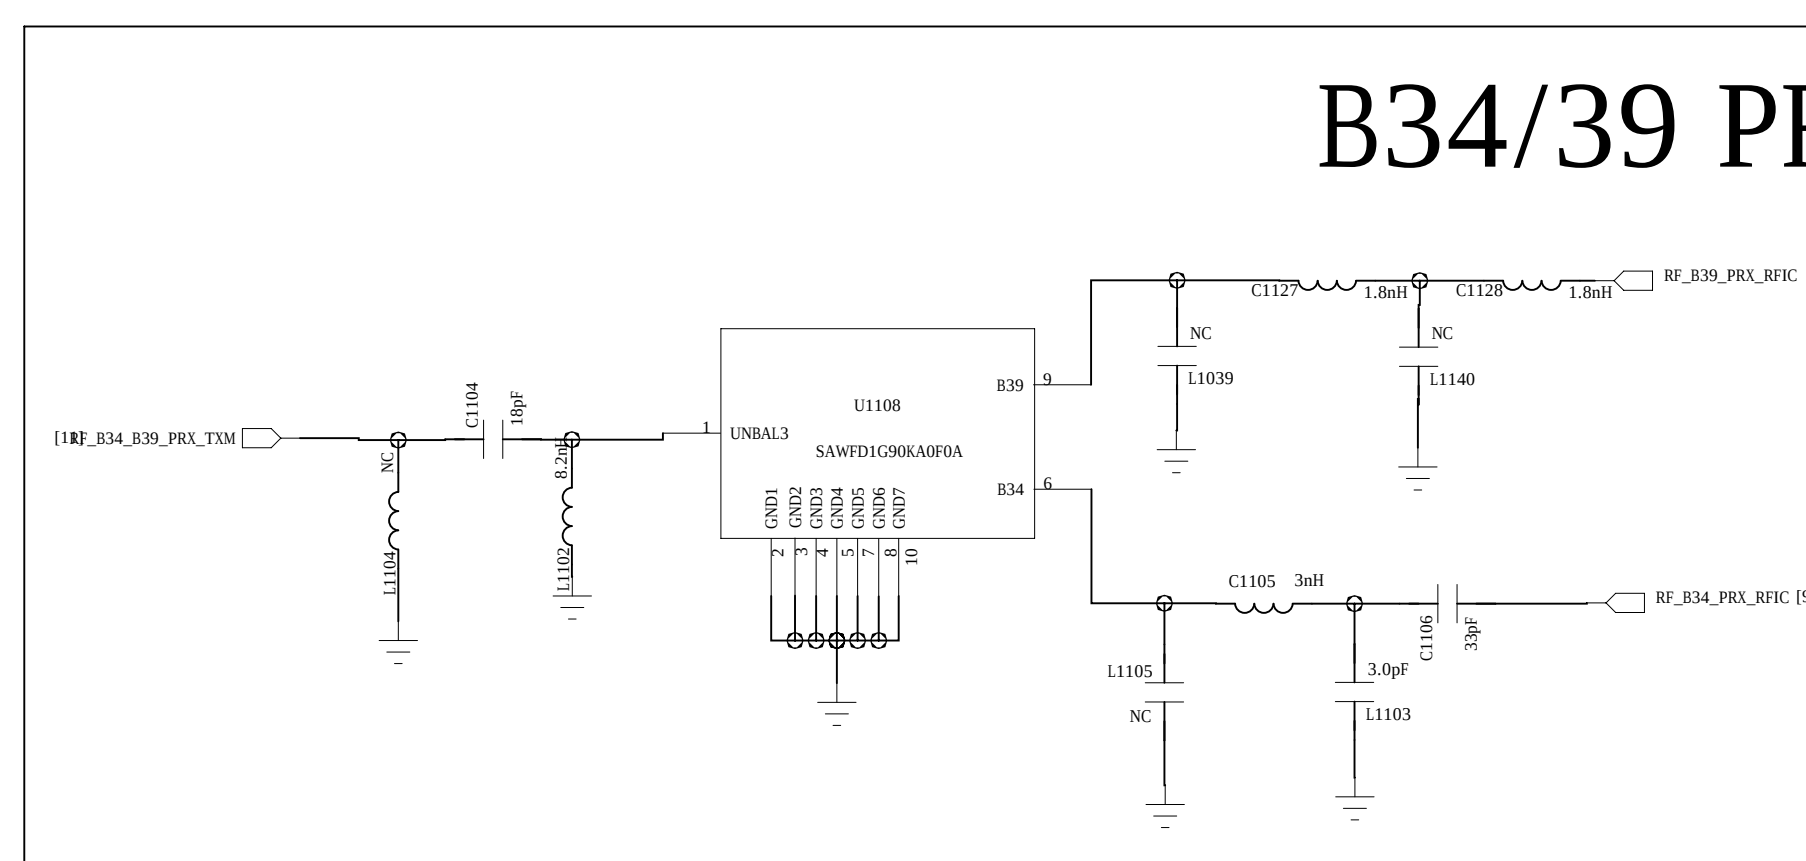


NO CA by xiaozhanglong


COMPANY:		LC	
TITLE:		CX880	
CODE:	SIZE:	DRAWING NO:	REV:
<Code>	A0	<Drawing Number×Revision>	
SCALE: <Scale>		SHEET: 1d 20	

DRAWN <Drawn By>		DATE <Drawn Date>		CX880			
CHECKED <Checked By>		DATE <Checked Date>		CAGE	SIZE	DRAWING NO.	REV.
QUALITY CONTROL <QC By>		DATE <QC Date>		<Code> A0 <Drawing Number>×<Revision>			
RELEASED <Released By>		DATE <Release Date>		SCALE <Scale>		SHEET: 1st 20	







REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE

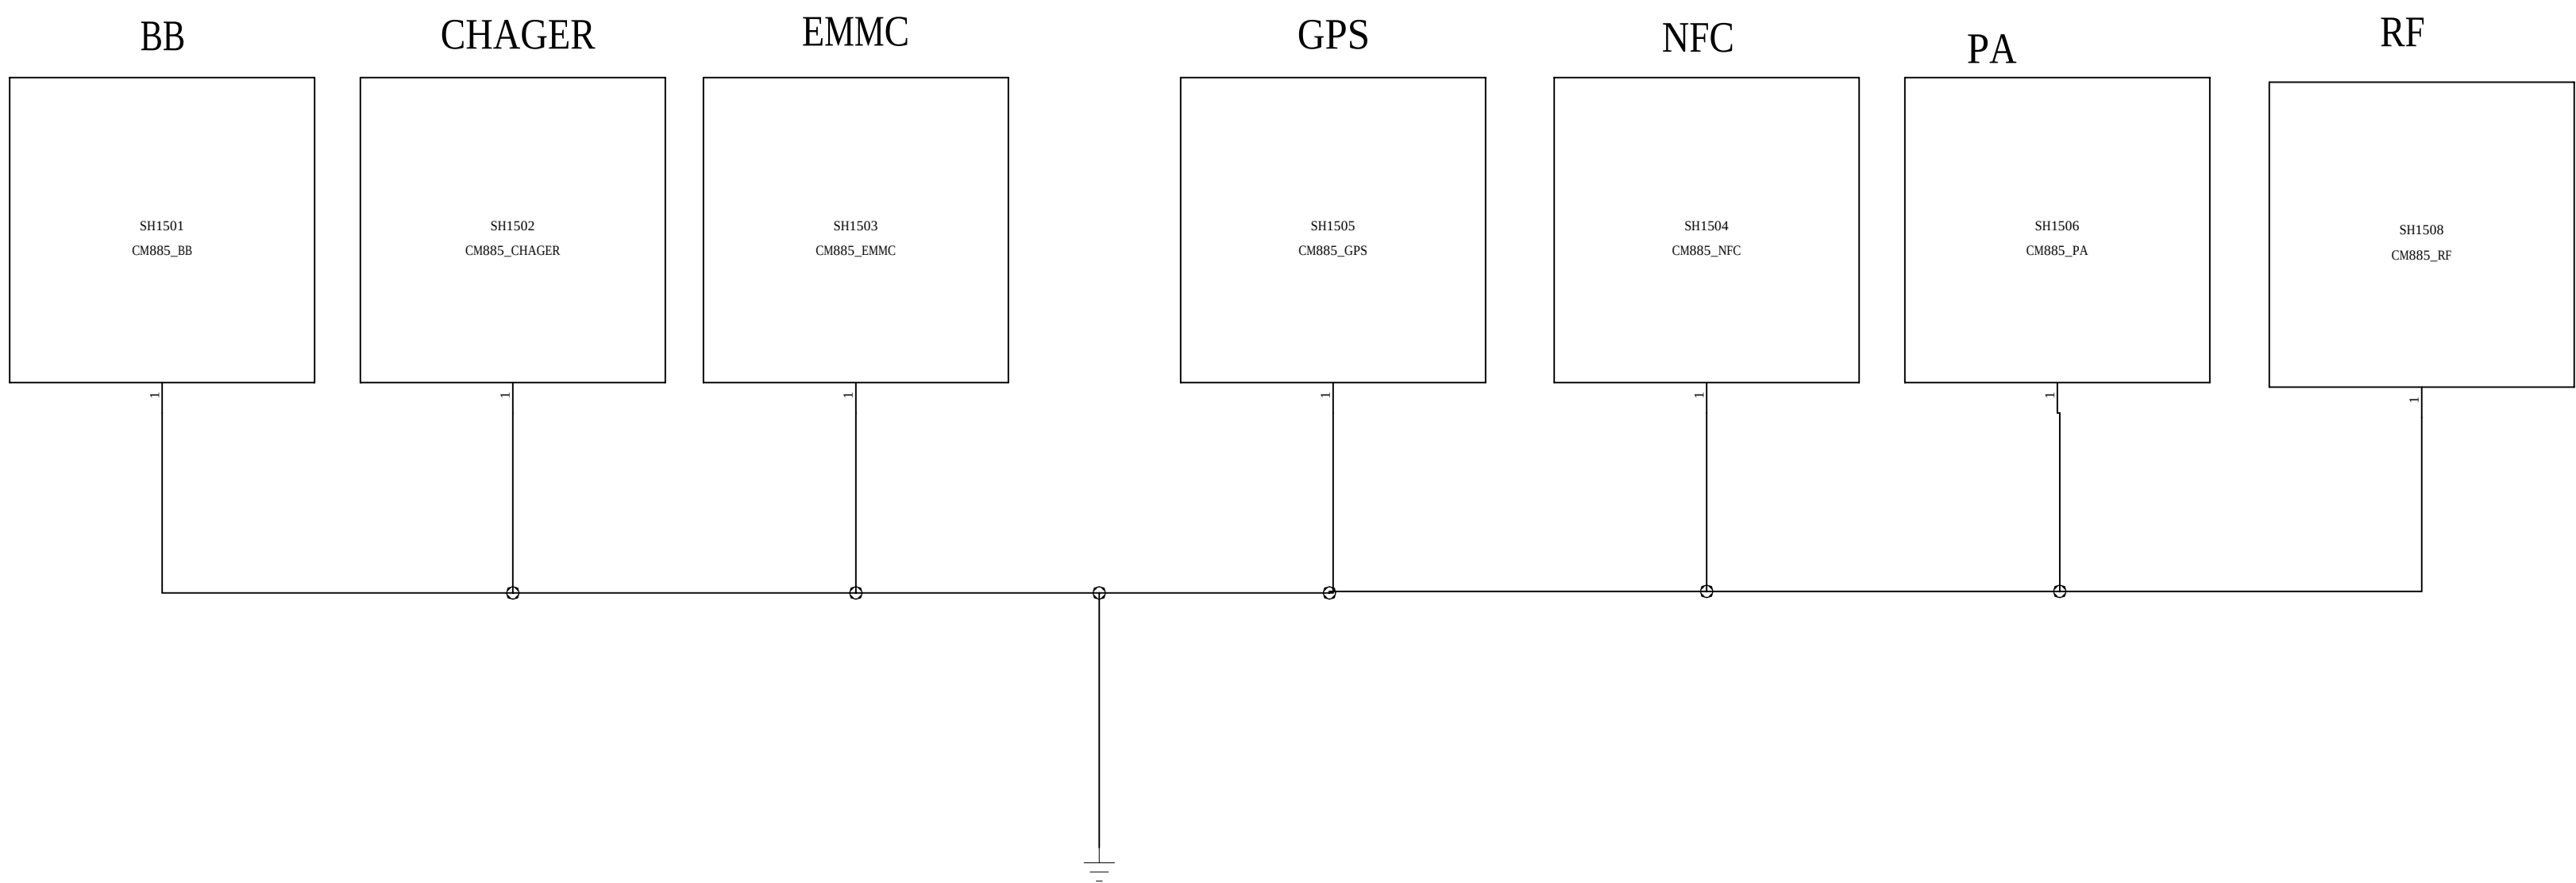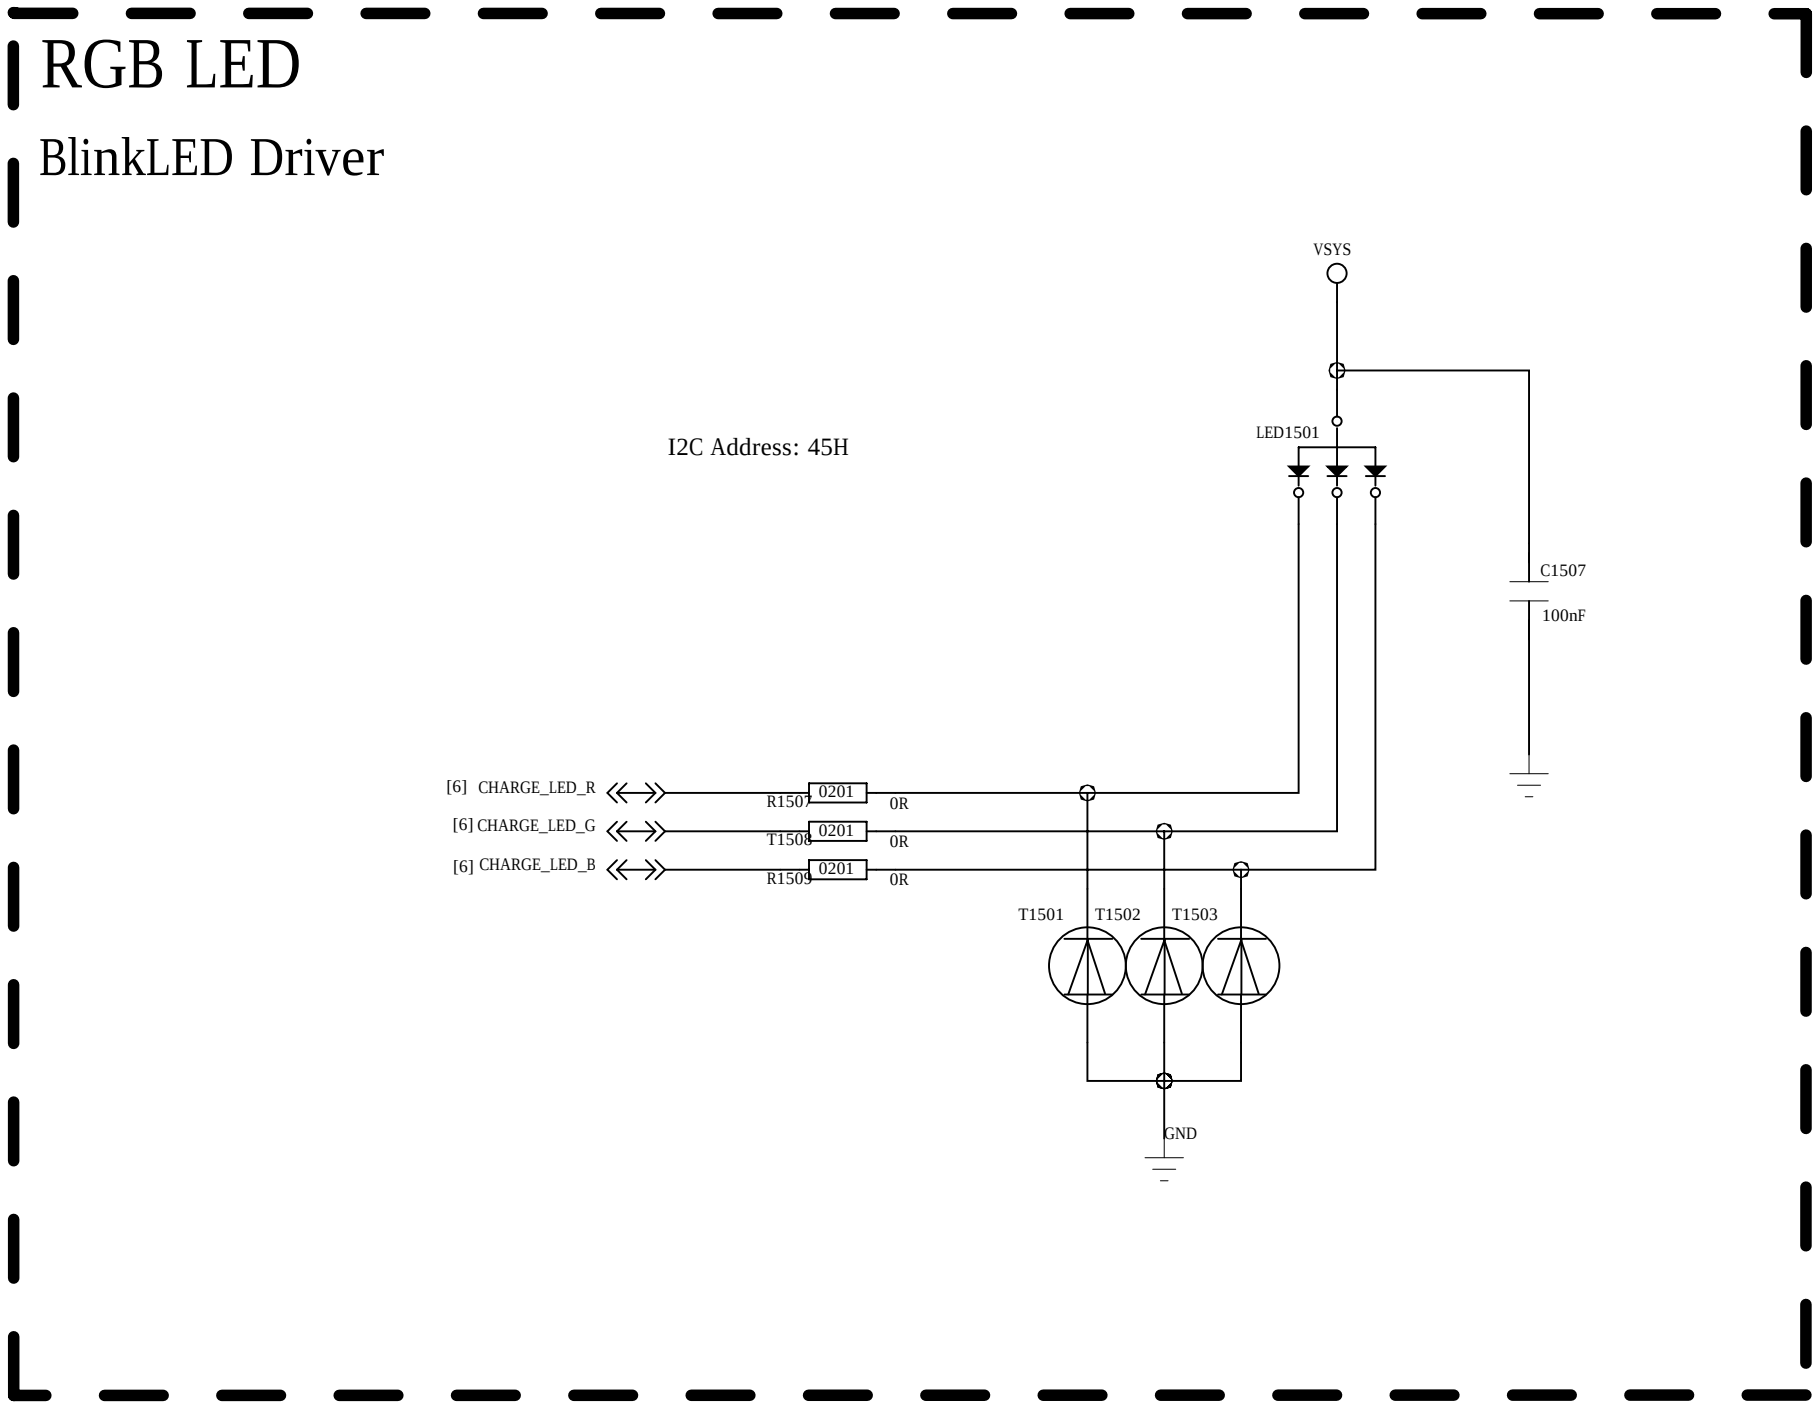

MOTOR DRIVER CIRCUIT

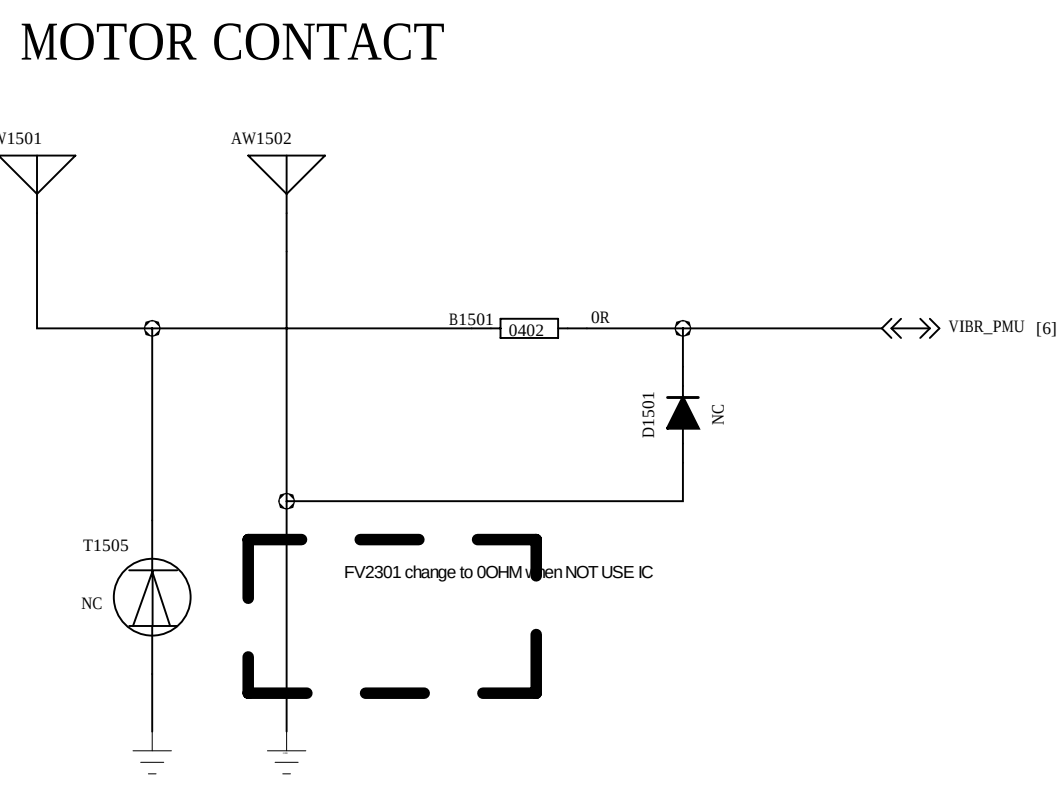

REVISION RECORD			
ITER	ECD NO:	APPROVID:	DATE:

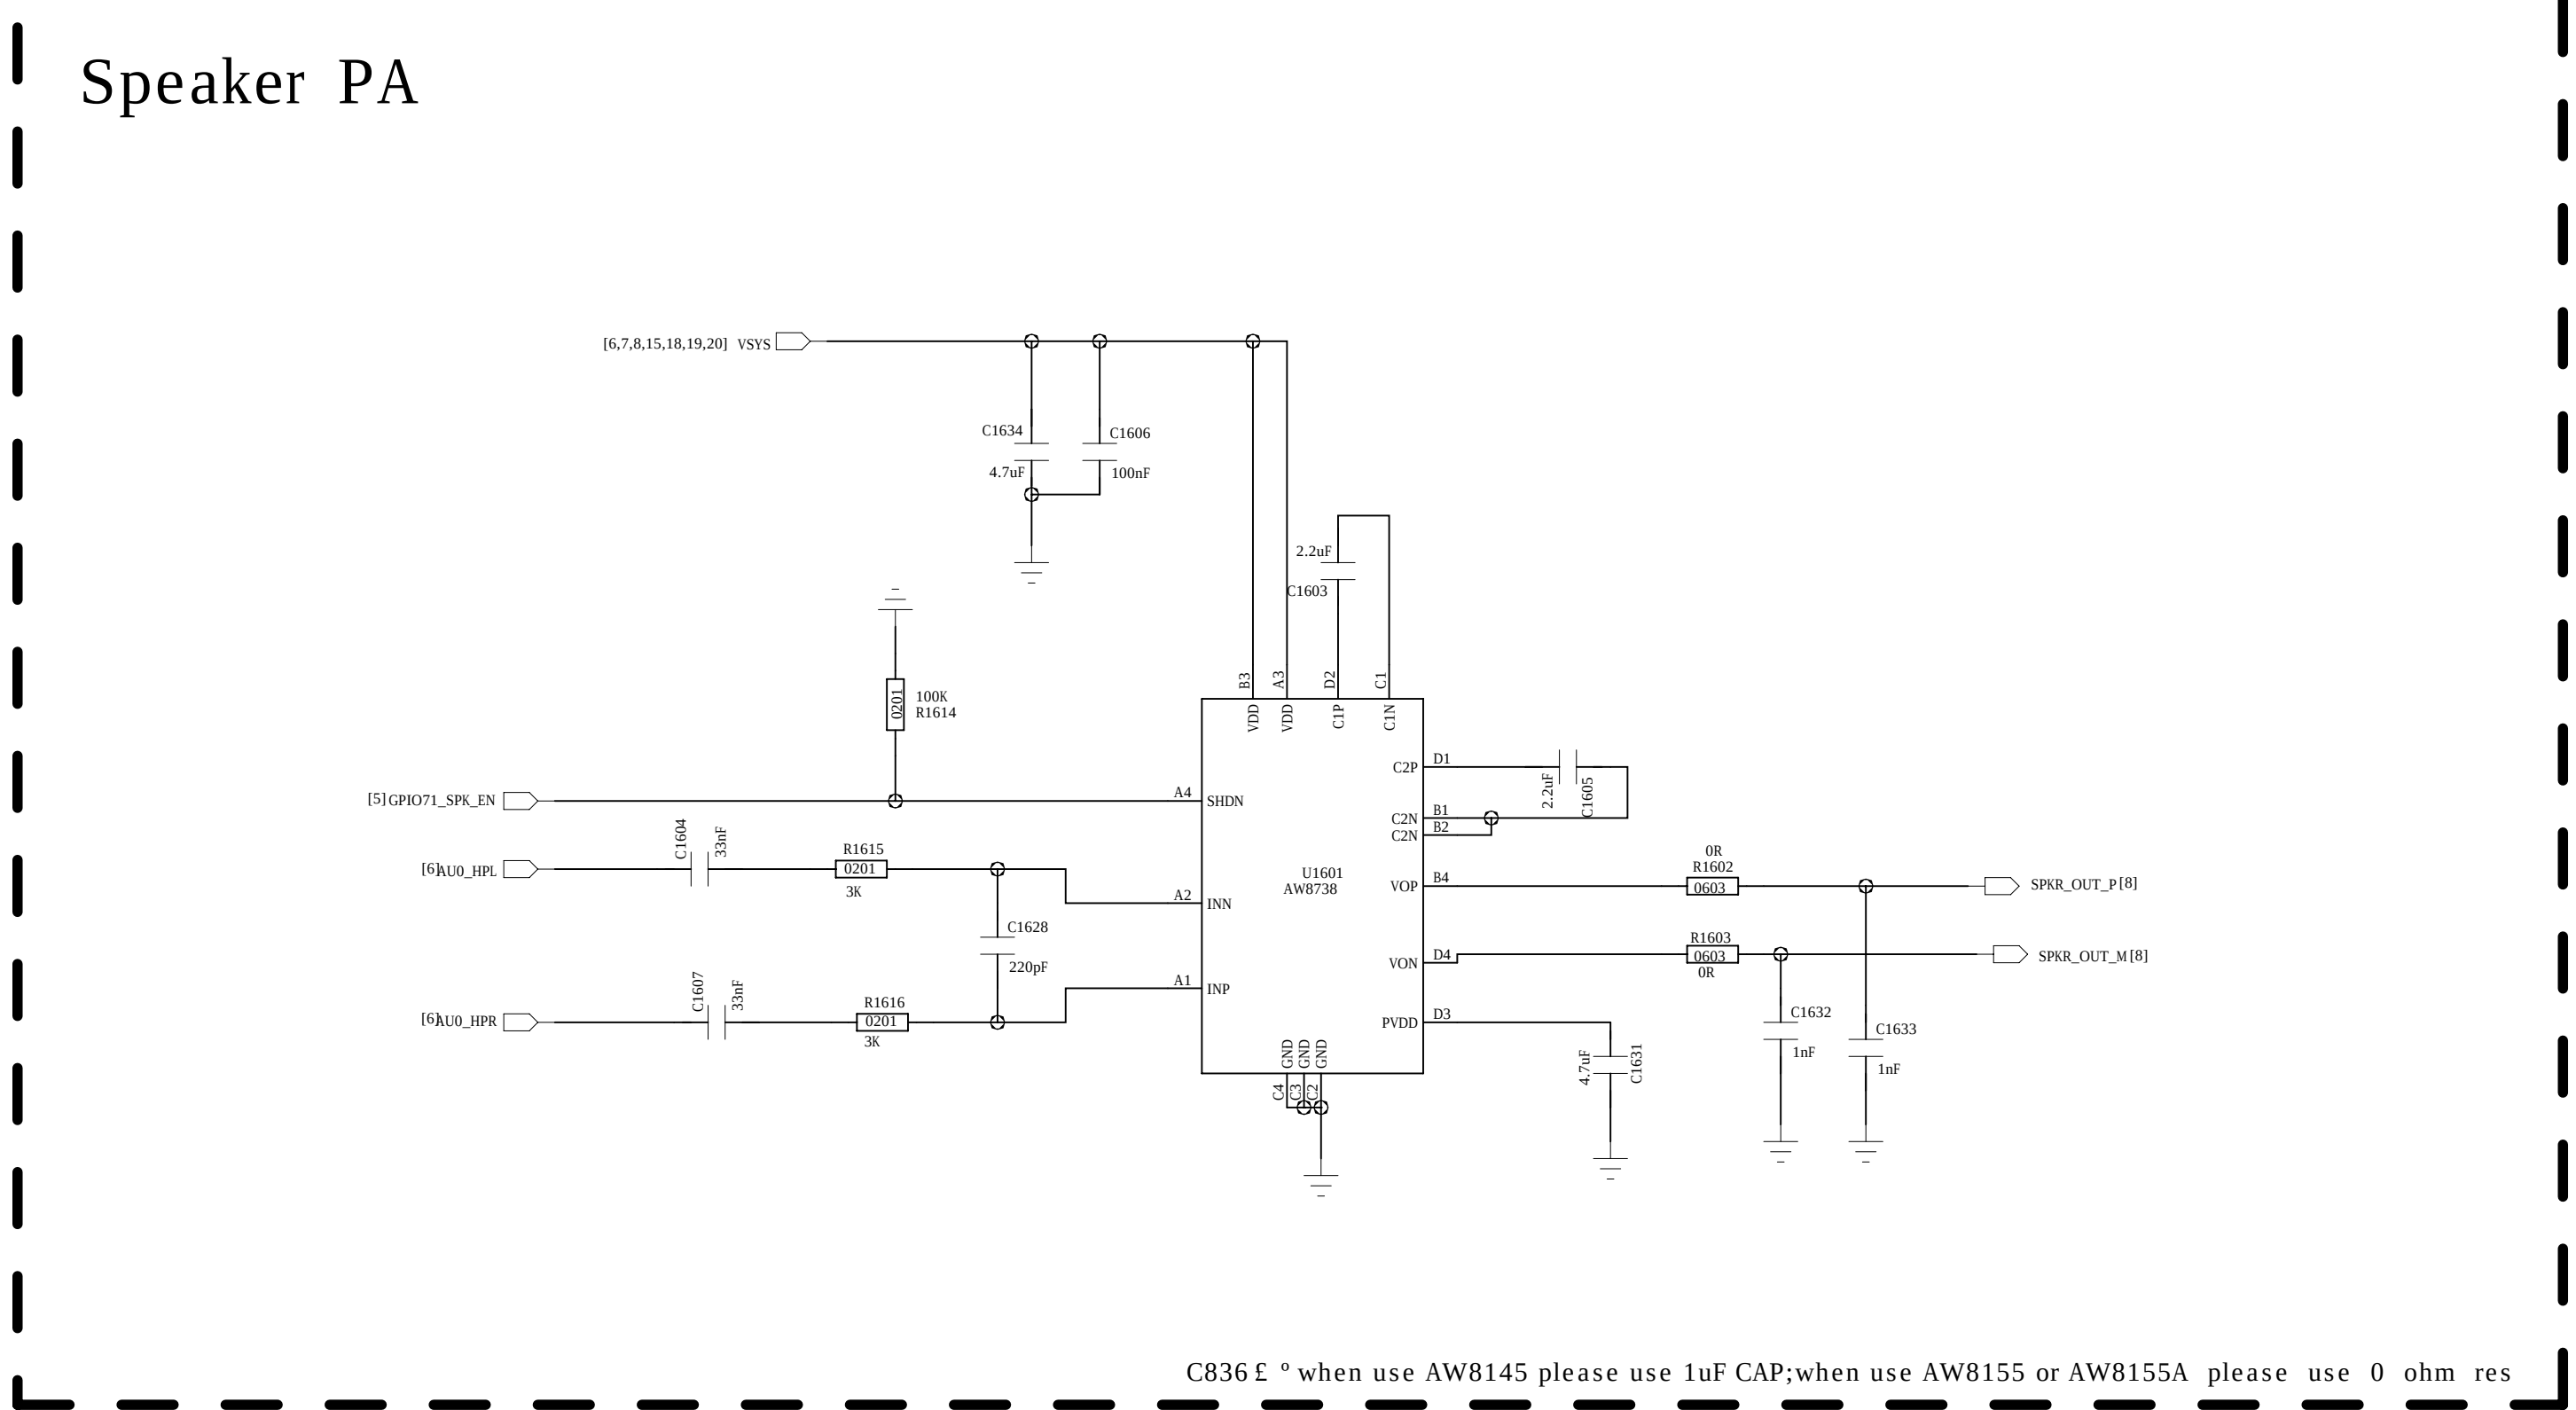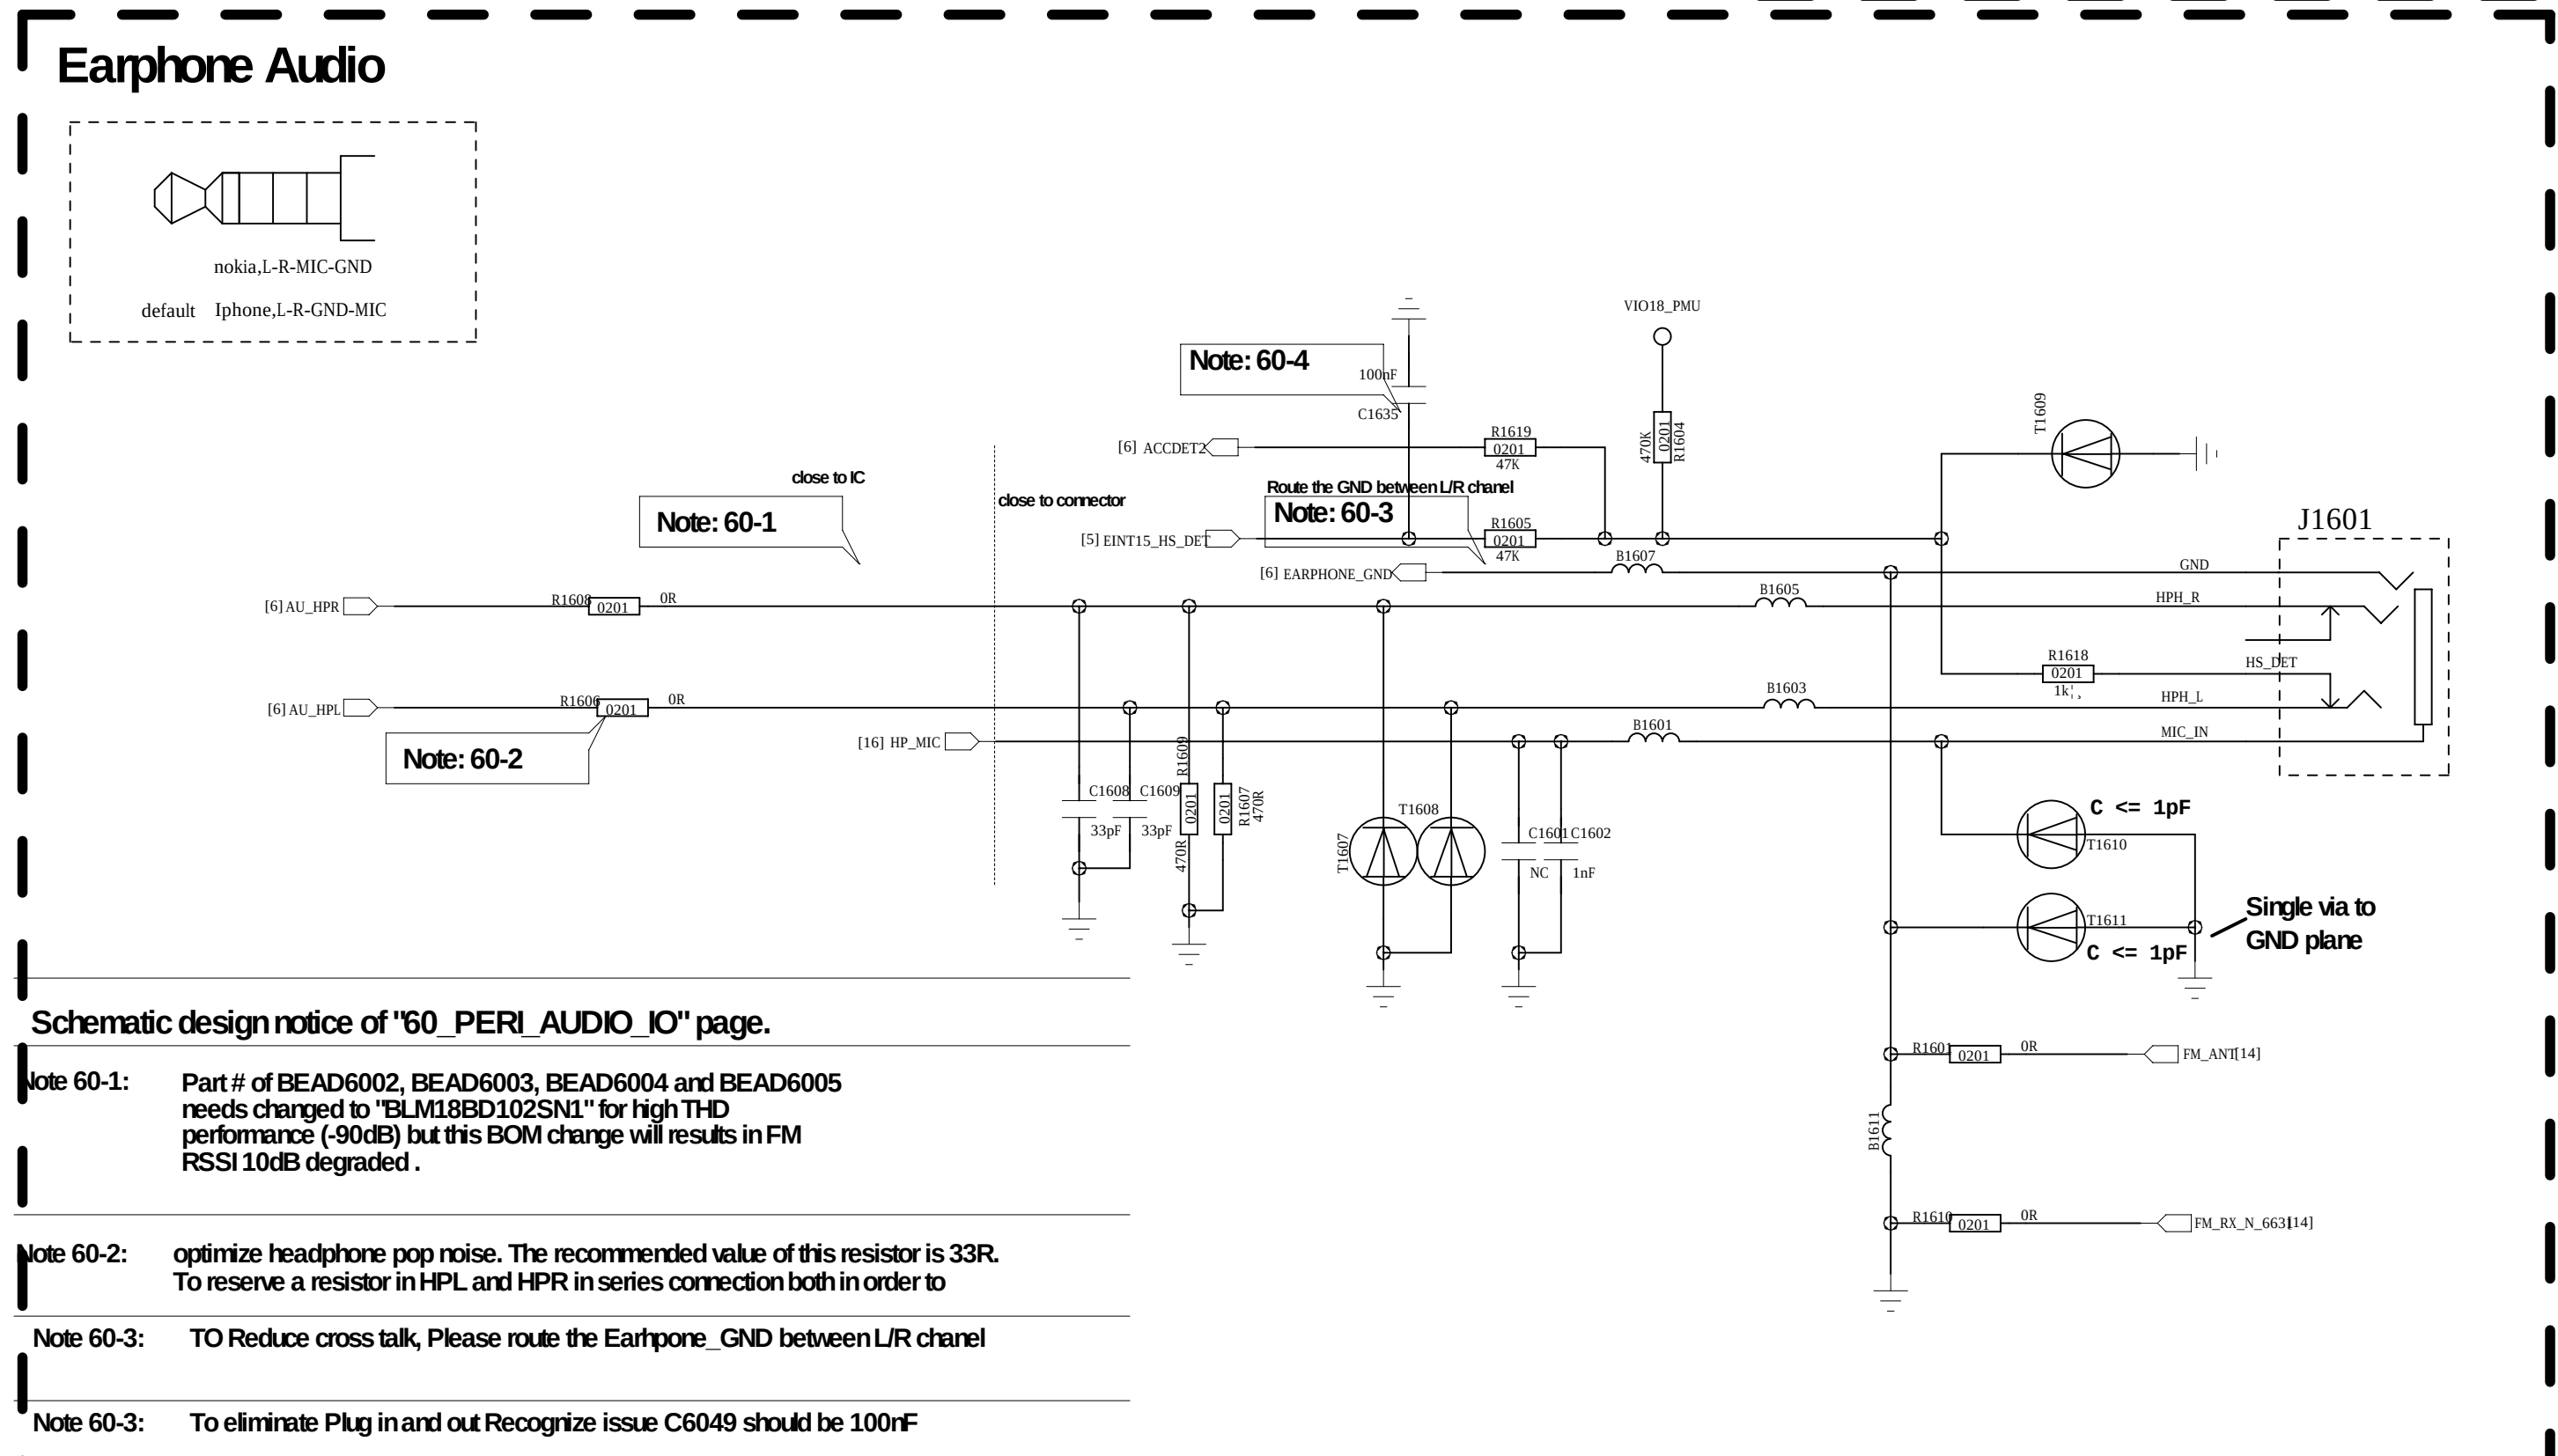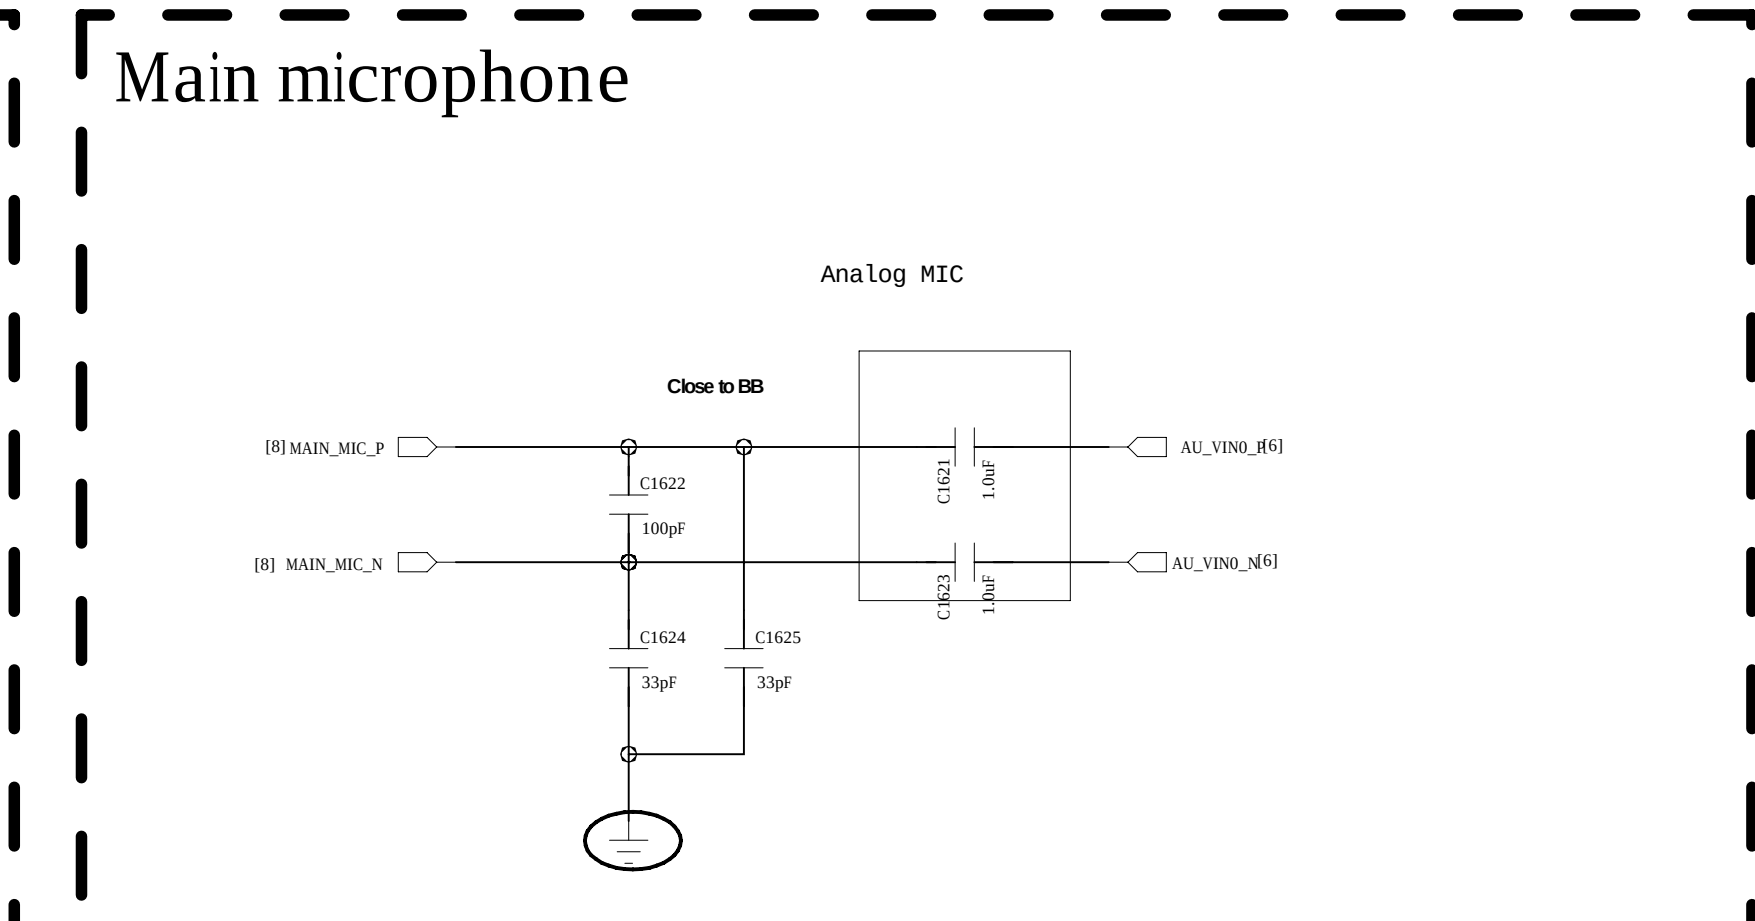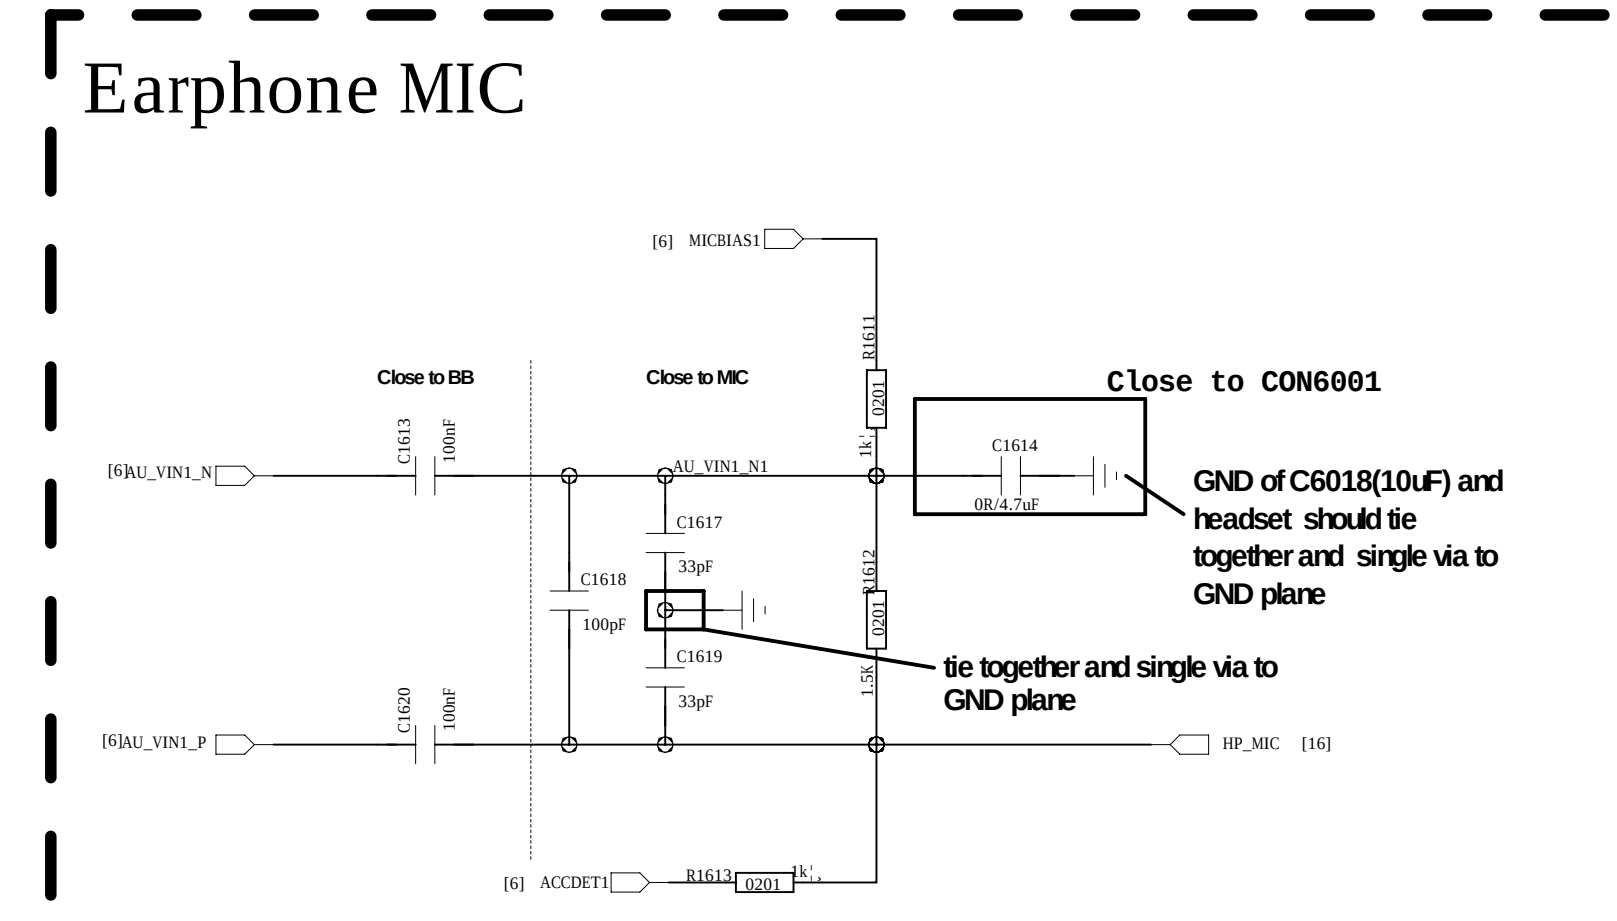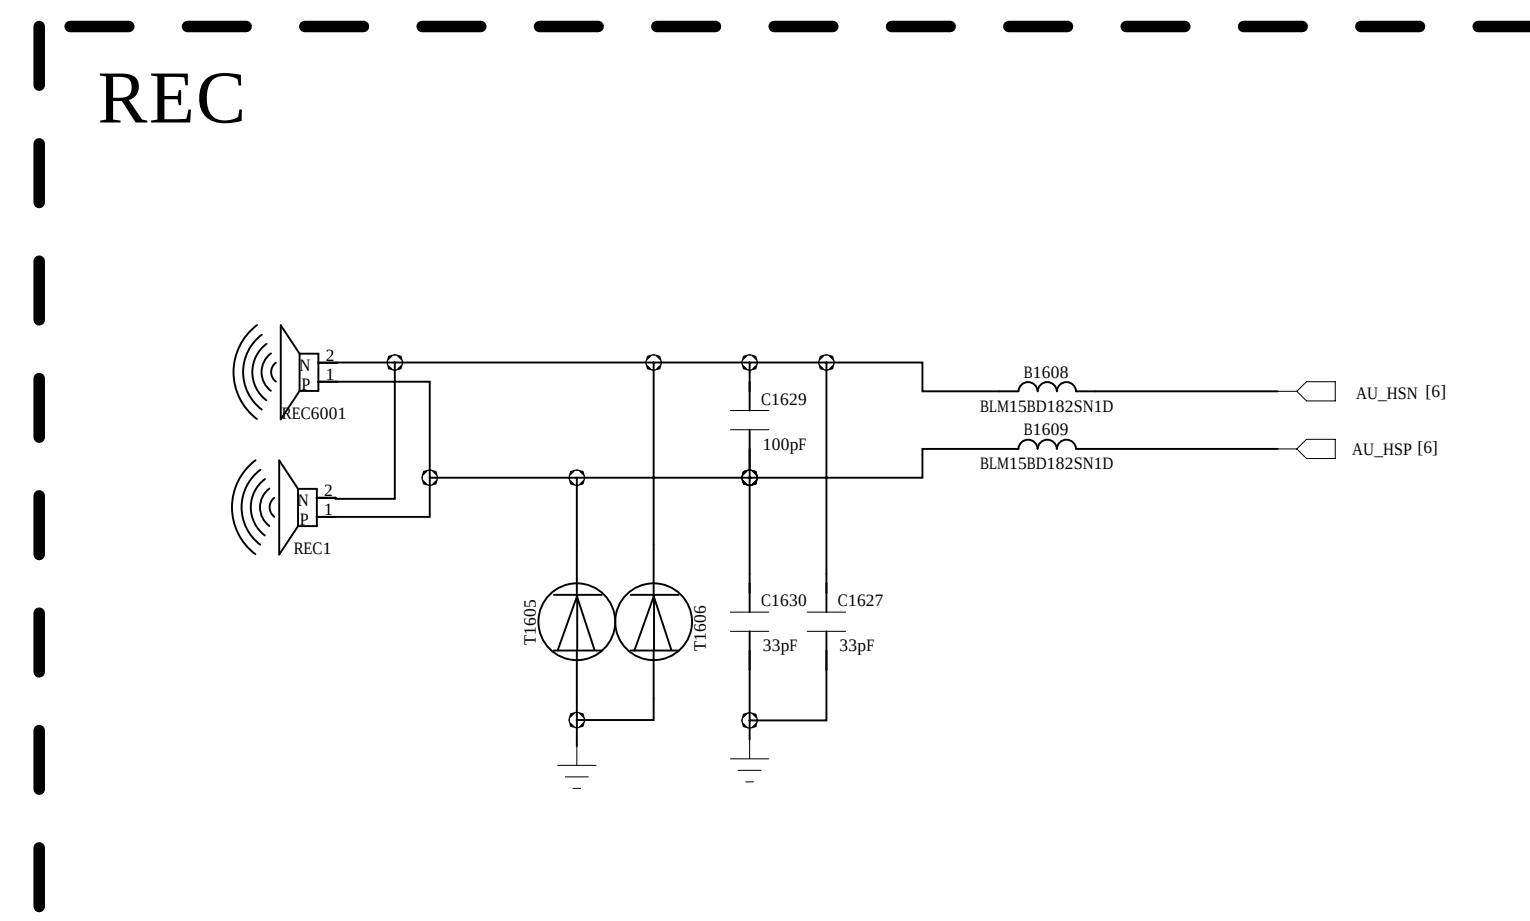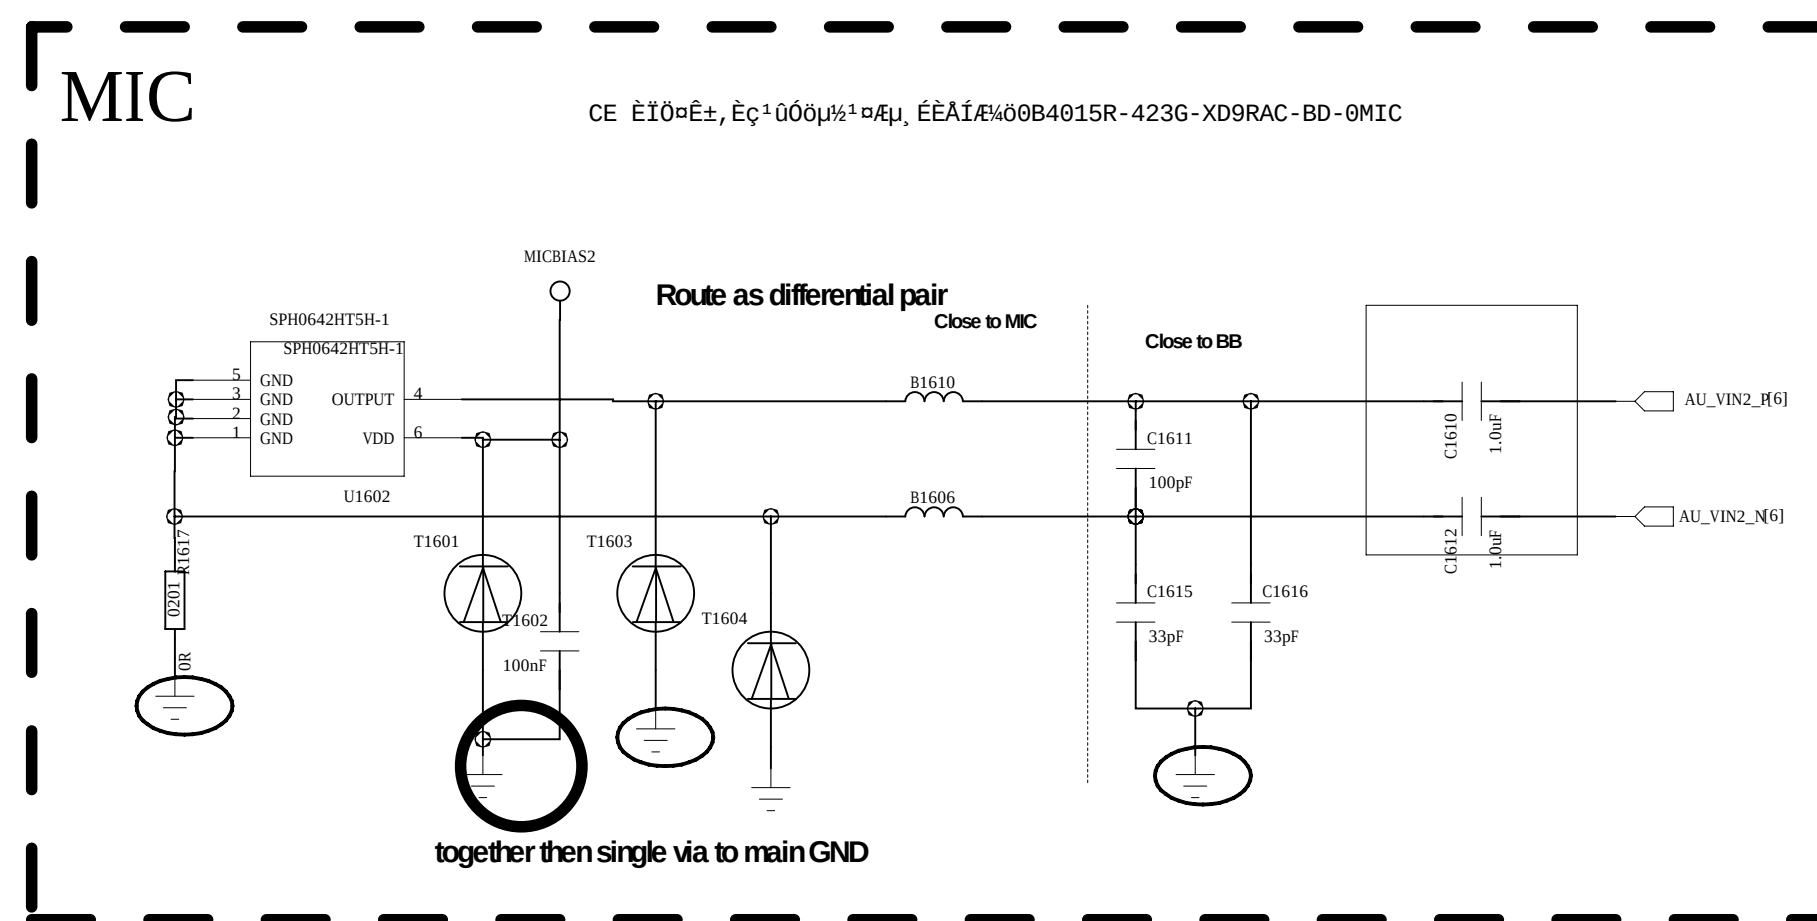


		COMPANY: LC			
		TITLE: CX880			
DRAWN: <Drawn By>	DATES: <Drawn Date>				
CHECKED: <Checked By>	DATES: <Checked Date>	CODE	SITE: A0	DRAWING NO: <Drawing Number>	REV: <Revision>
QUALITY CONTROL: <QC By>	DATES: <QC Date>	<Code>			
RELEASED: <Released By>	DATES: <Release Date>	SCALE: <Scale>			
		SHEET 16			20


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

Main Camera A


Main Camera

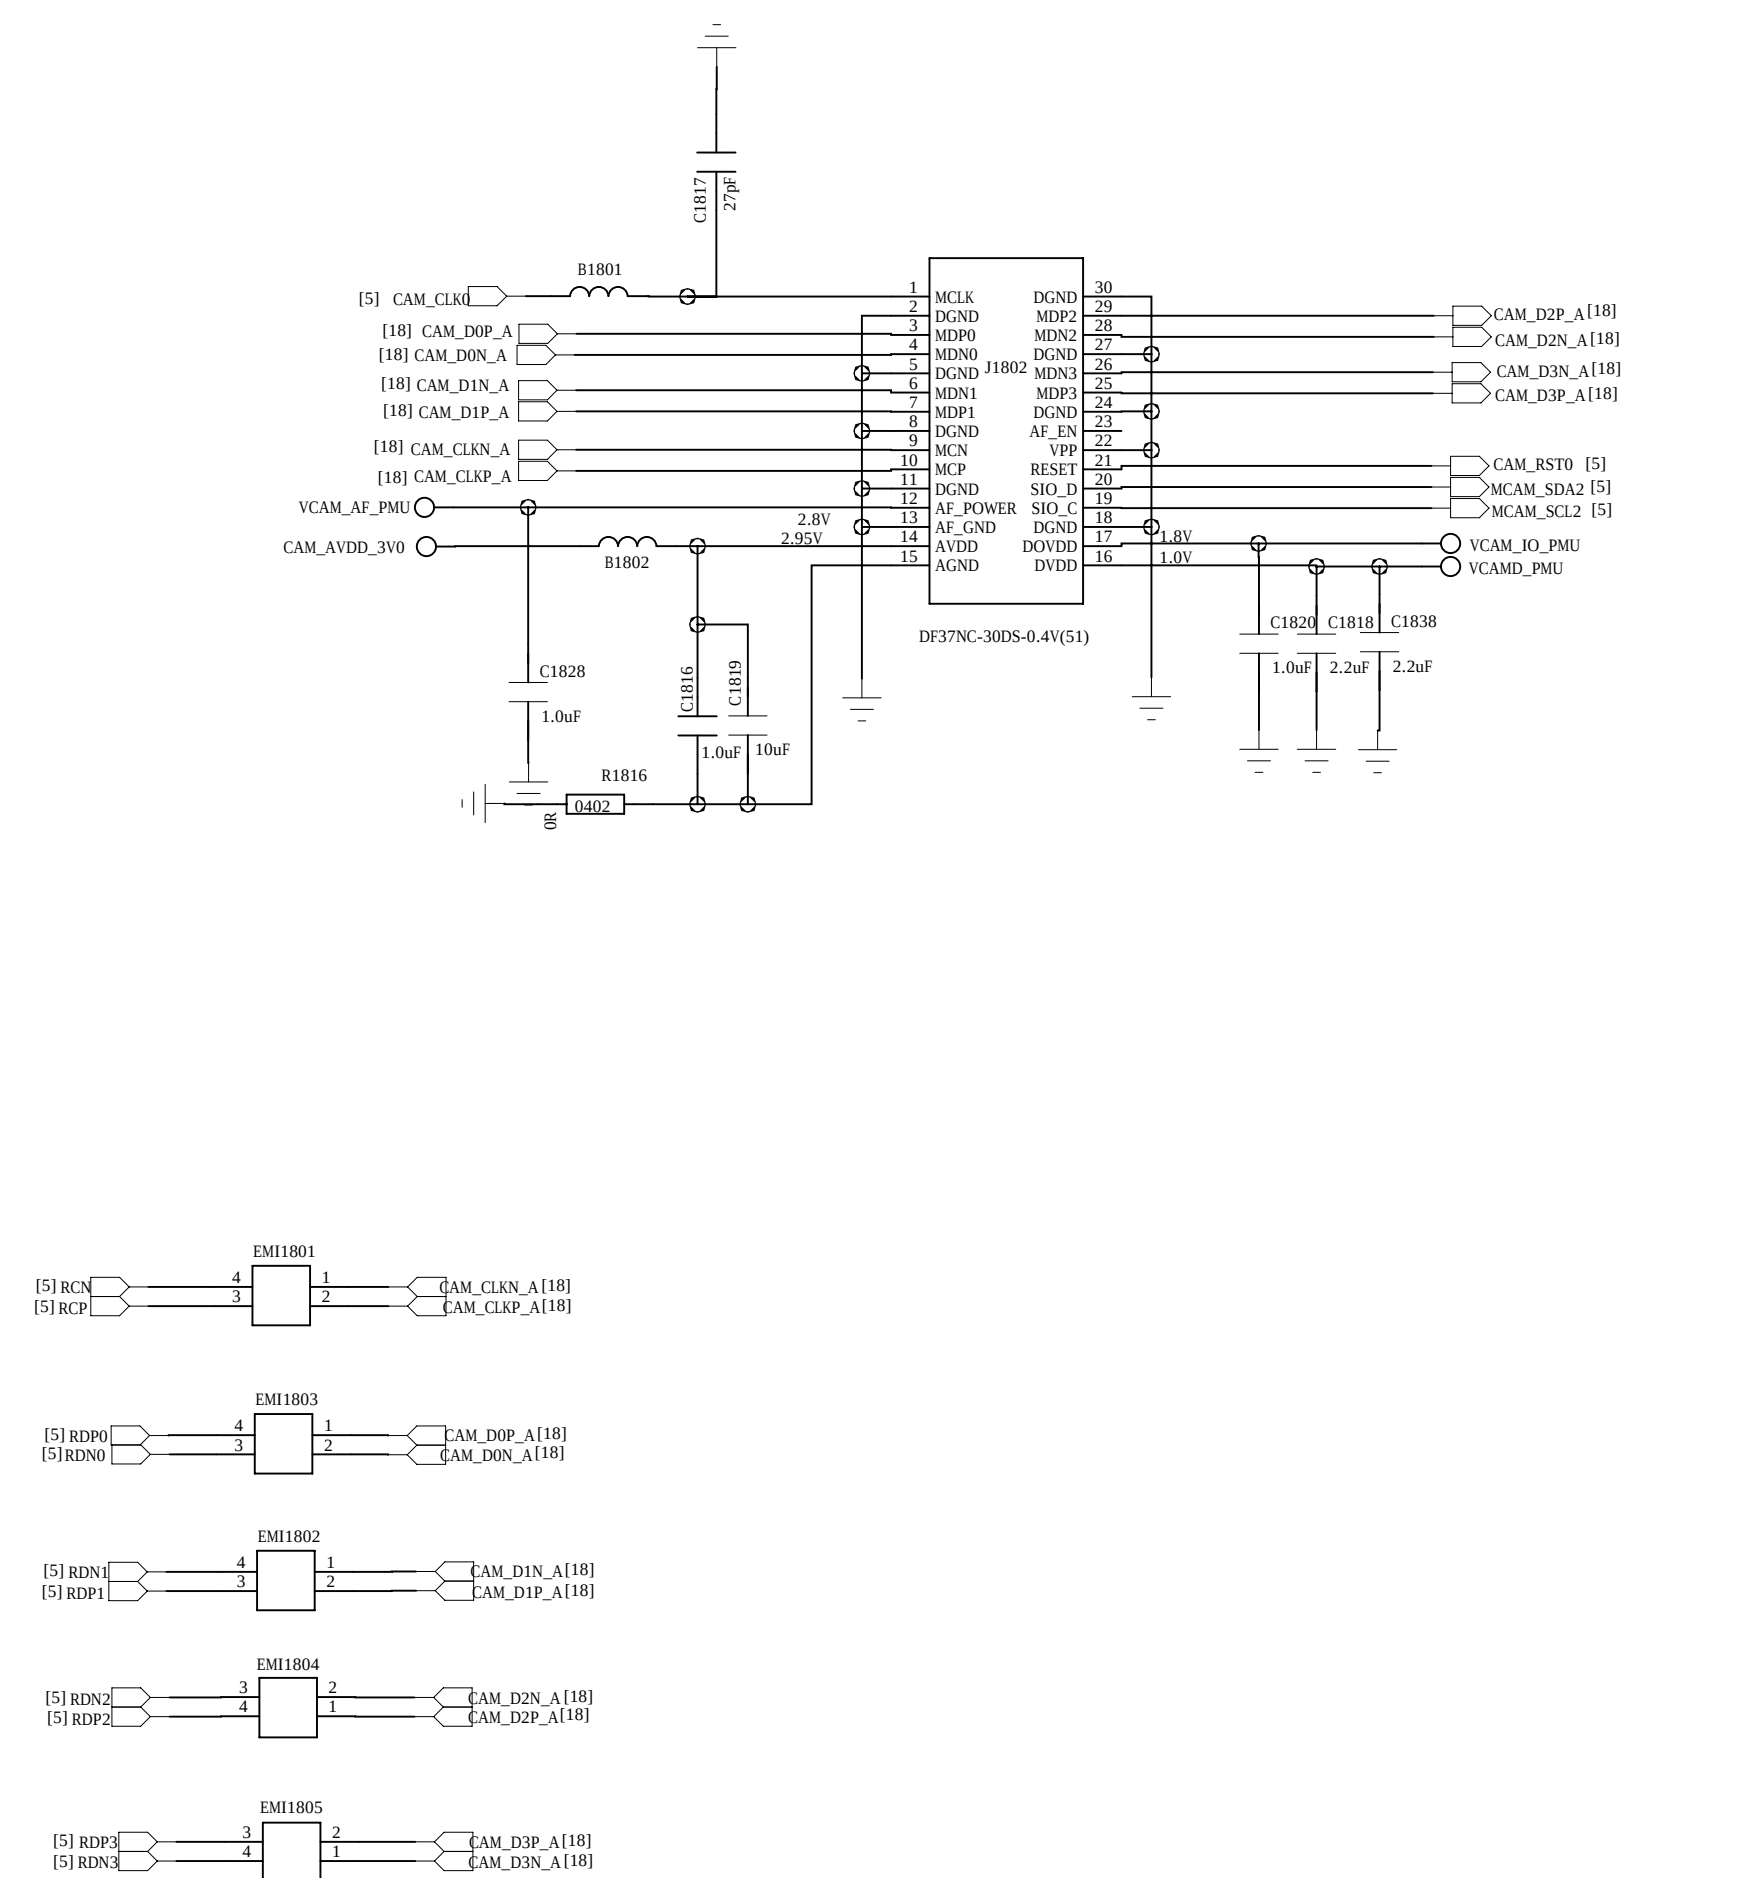


Main Camera AVDD

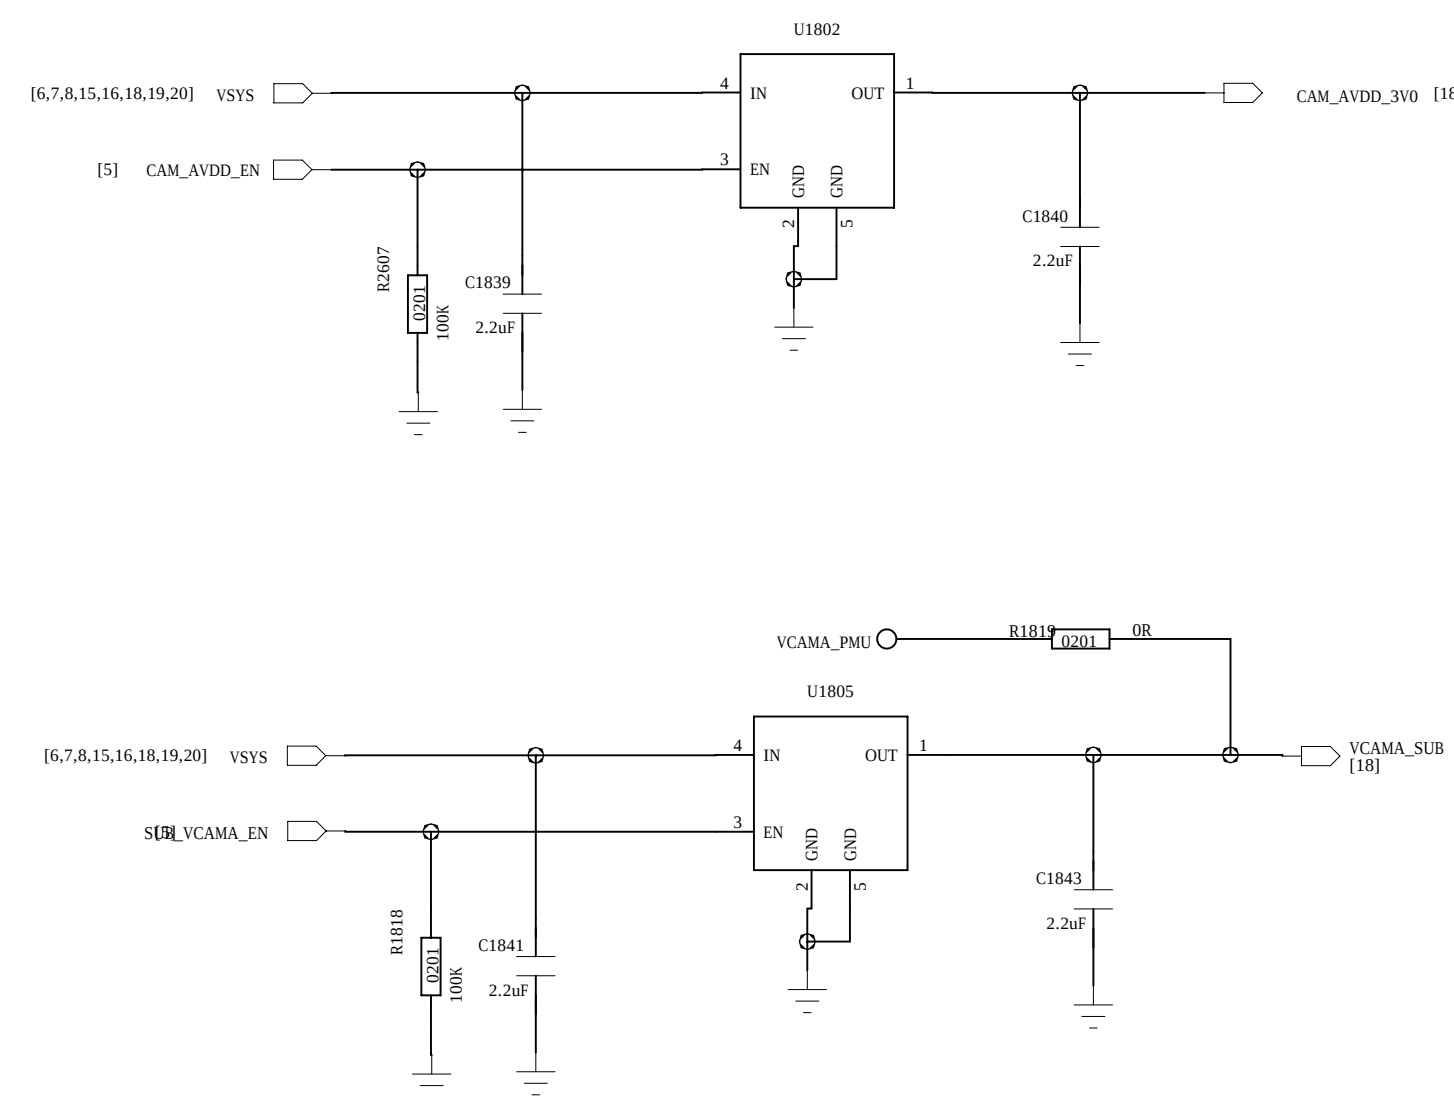


LCM

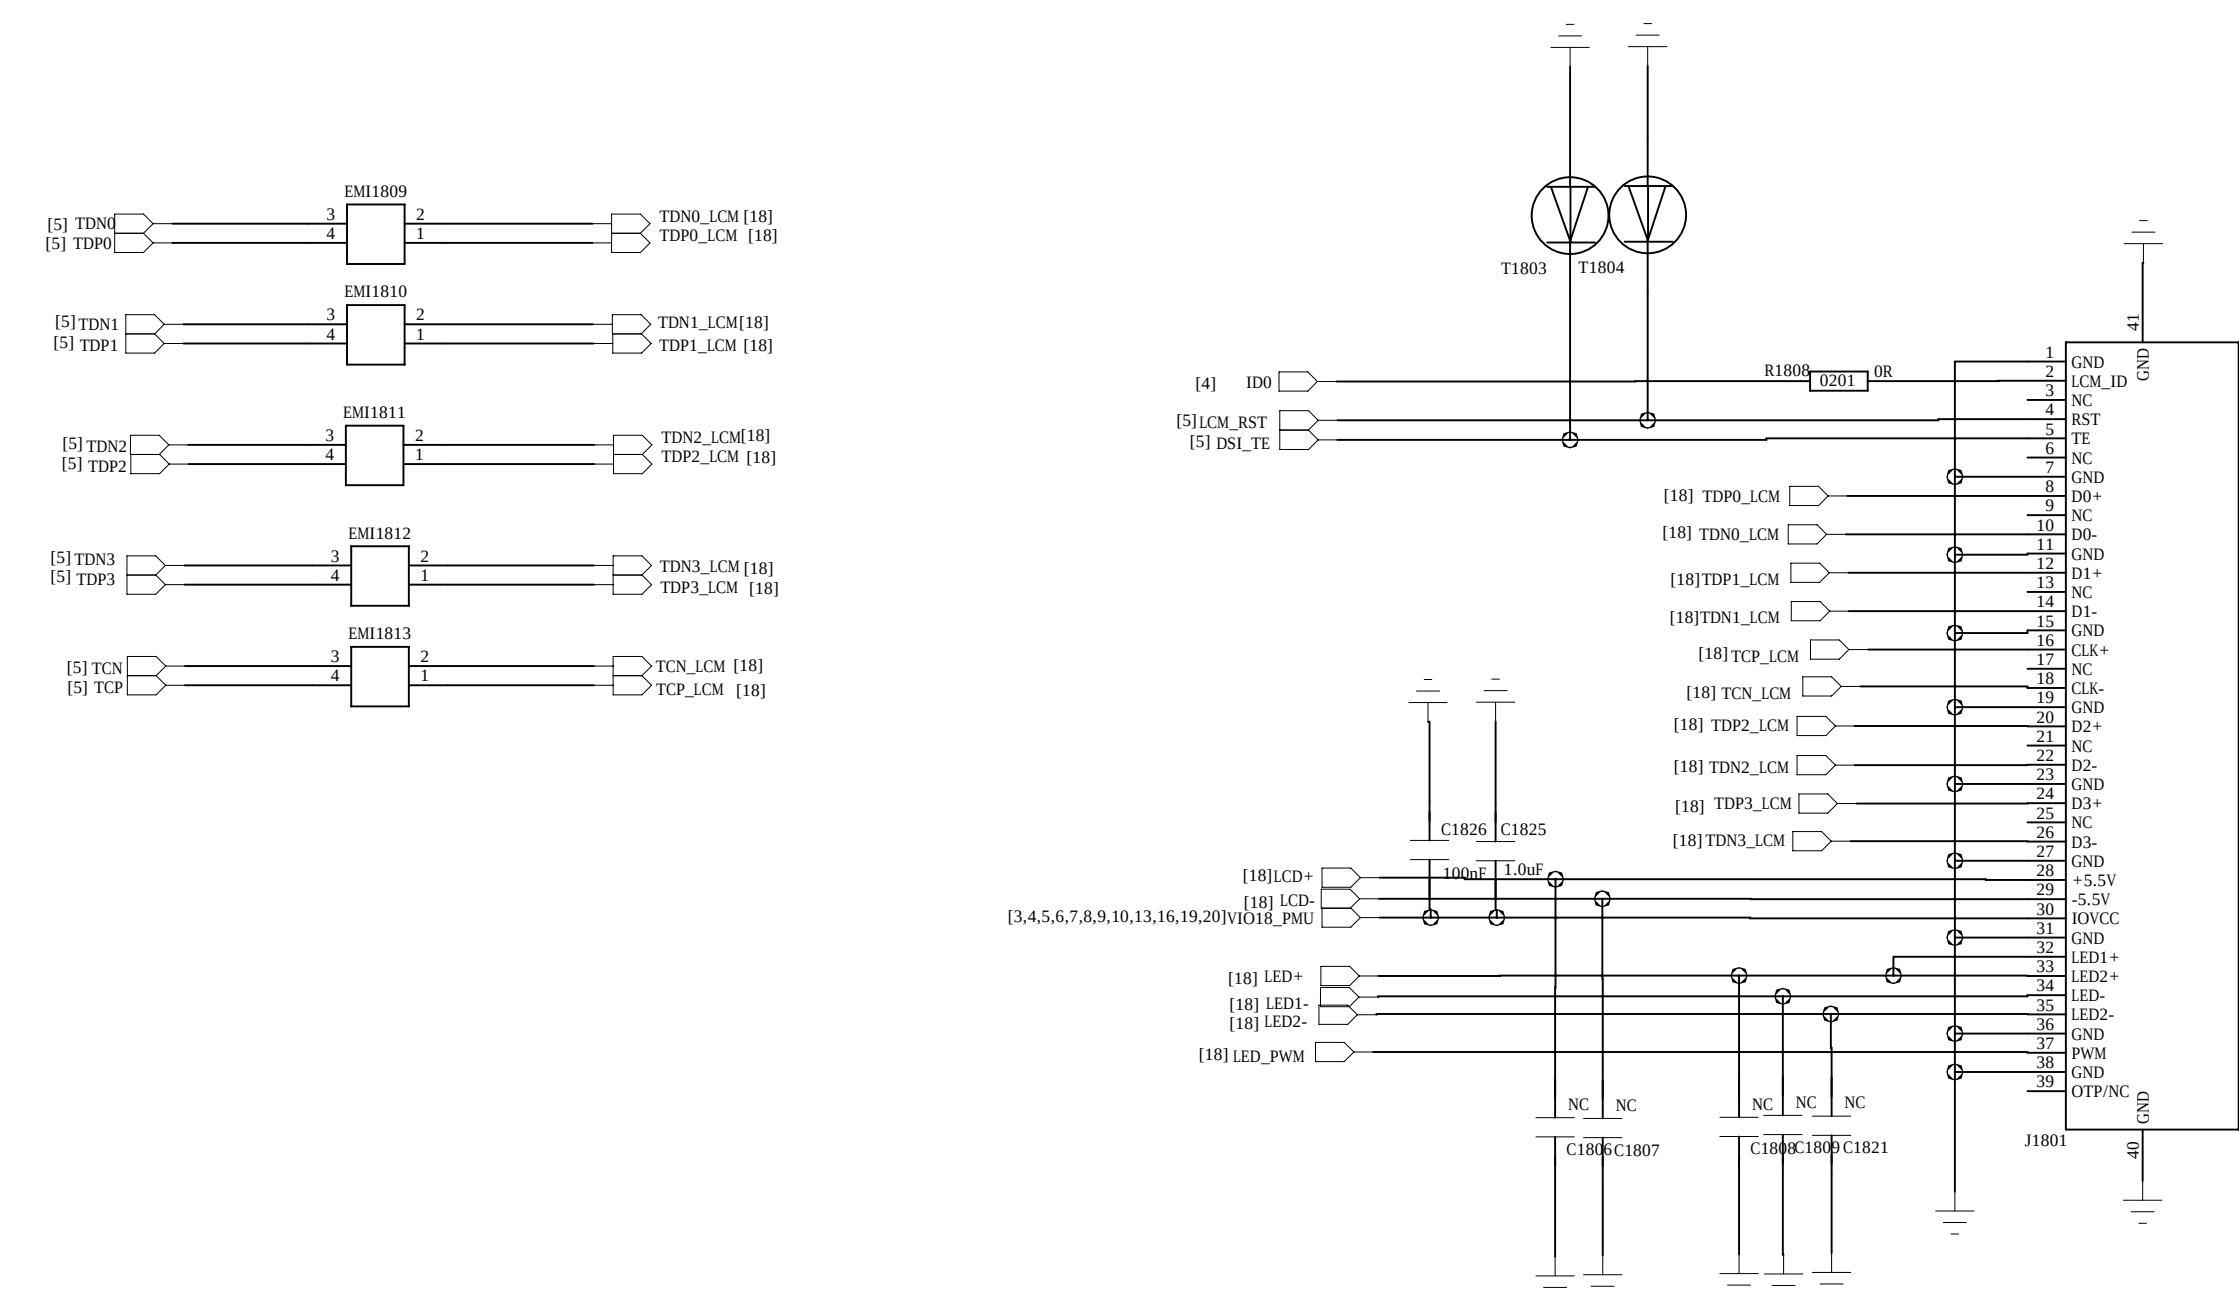


Front Camera

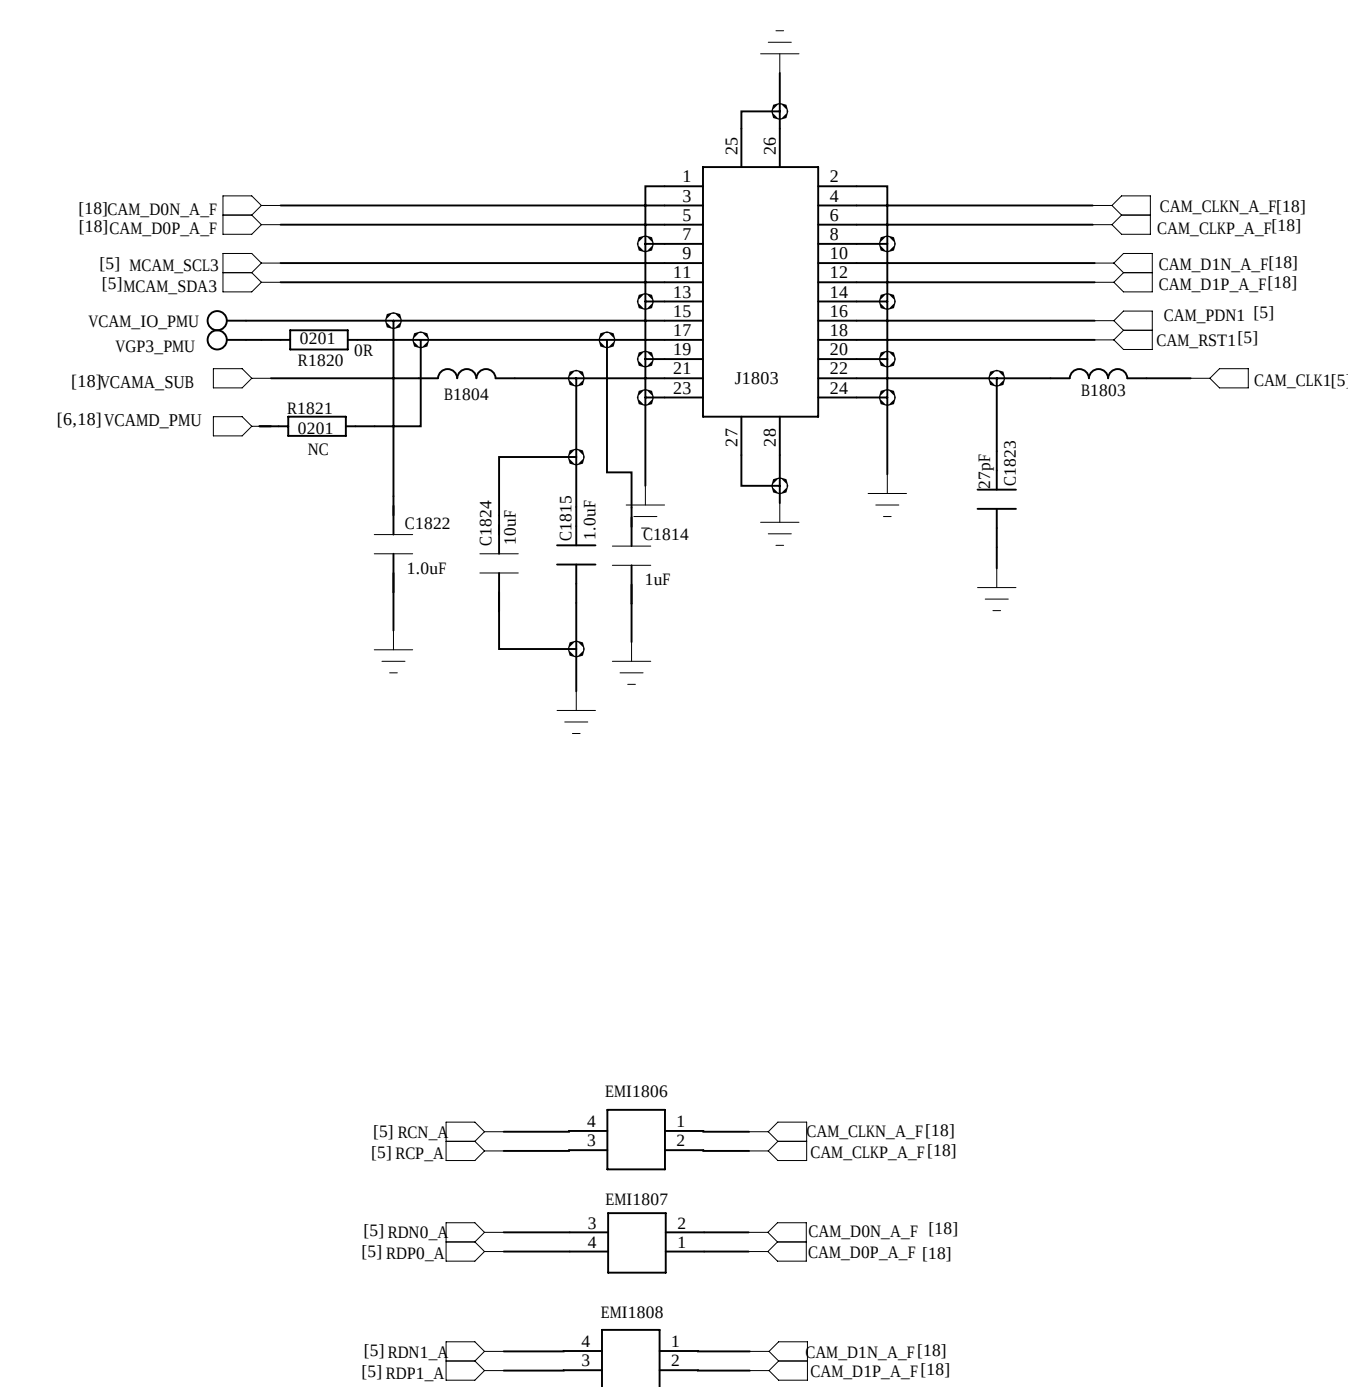

Black Light

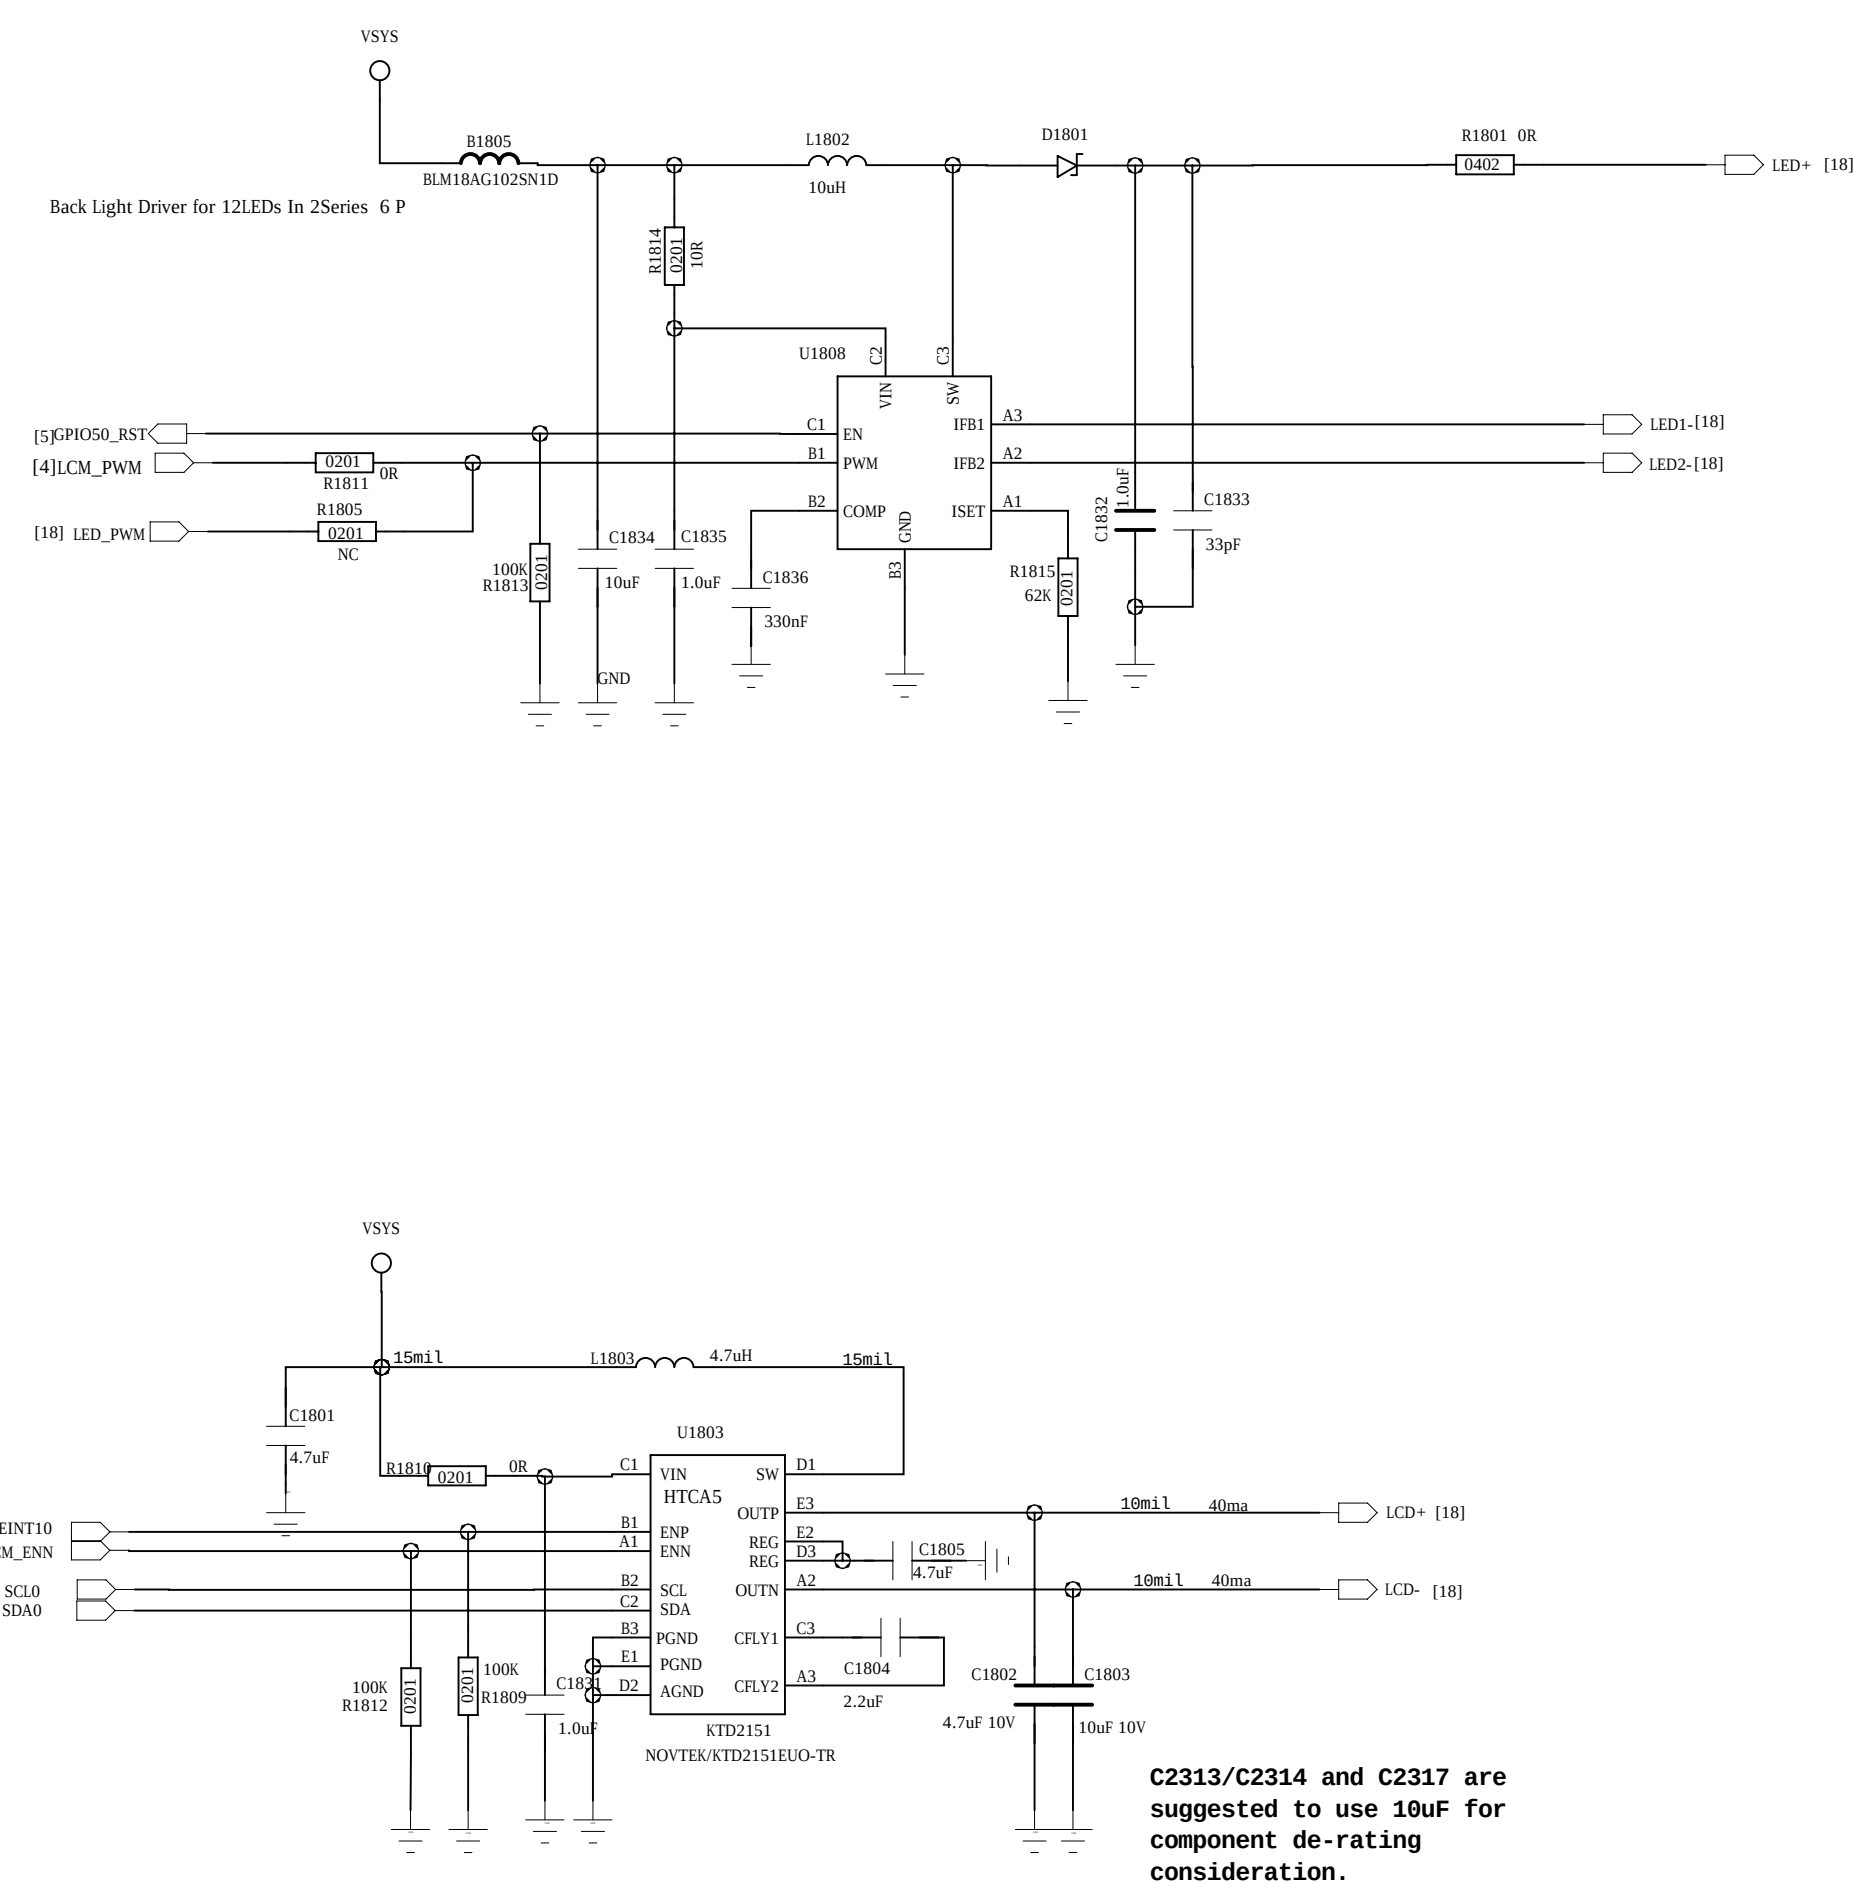

Flash

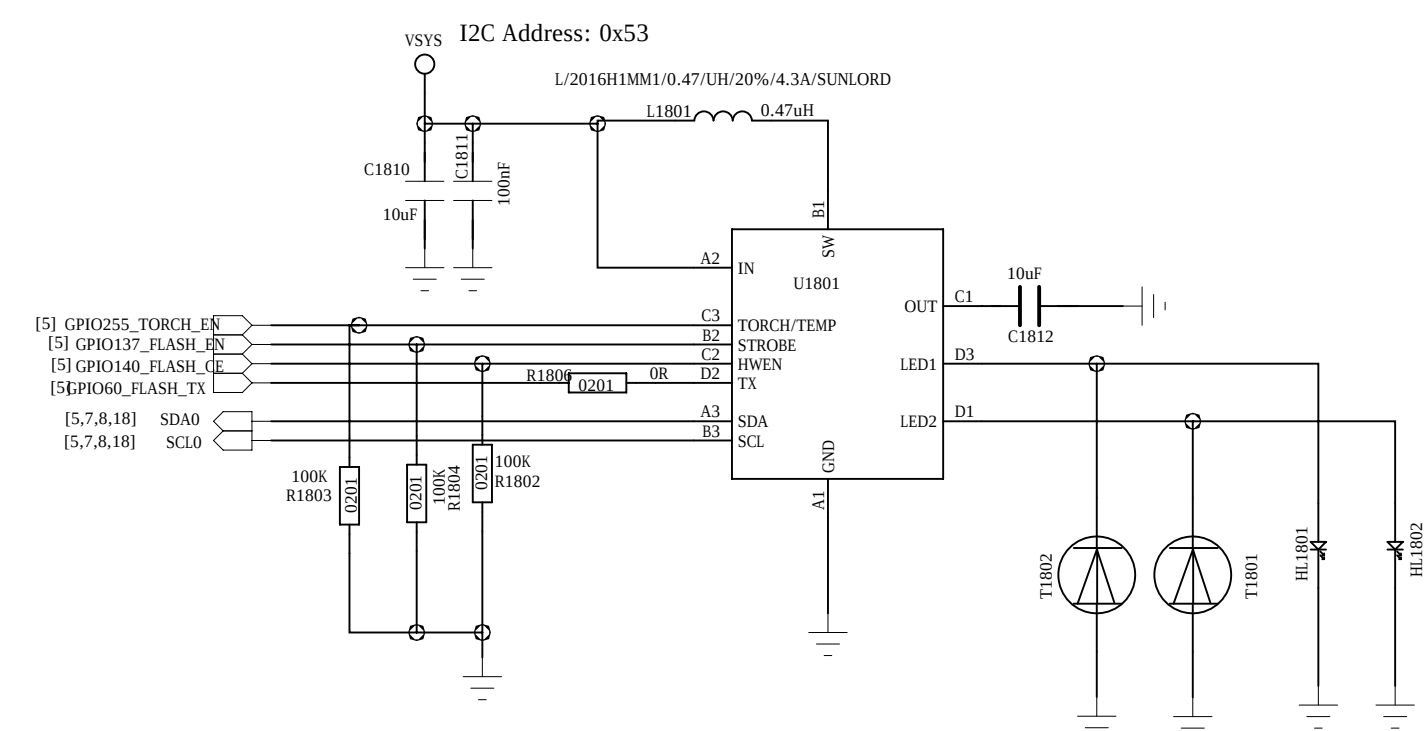

Schematic design notice of "63_PERI_CAMERA_KEYPAD" page.


Note 62-1: The VCC of I2C_0 is pulled to "VCAM_IO_PMU".

Note 62-2: I2C control interface of front camera (with AF) must be assigned to I2C-2 bus when PIP/VIV feature be supported.


Note 62-3: Reserve a capacitor (27pF) on camera's MCLK and shunt it to GND to prevent GPS de-sense.

		(COMPANY) LC			
		TITLE CX880			
DRAWS <Drawn By>	DATED <Drawn Date>				
CHECKED <Checked By>	DATED <Checked Date>	LOOSE	SIZE	DRAWING NO.	REV.
QUALITY CONTROL <QC By>	DATED <QC Date>	<Code> A0 <Drawing Number>×Revision>			
RELEASED <Released By>	DATED <Release Date>	SCALE <Scale>	SHEET: 48 20		


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

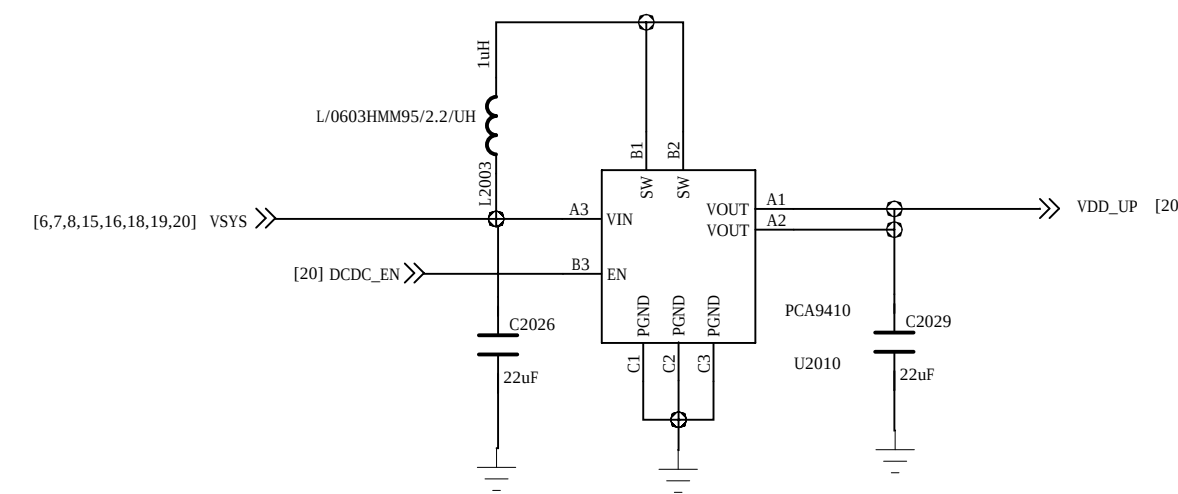

NFC power

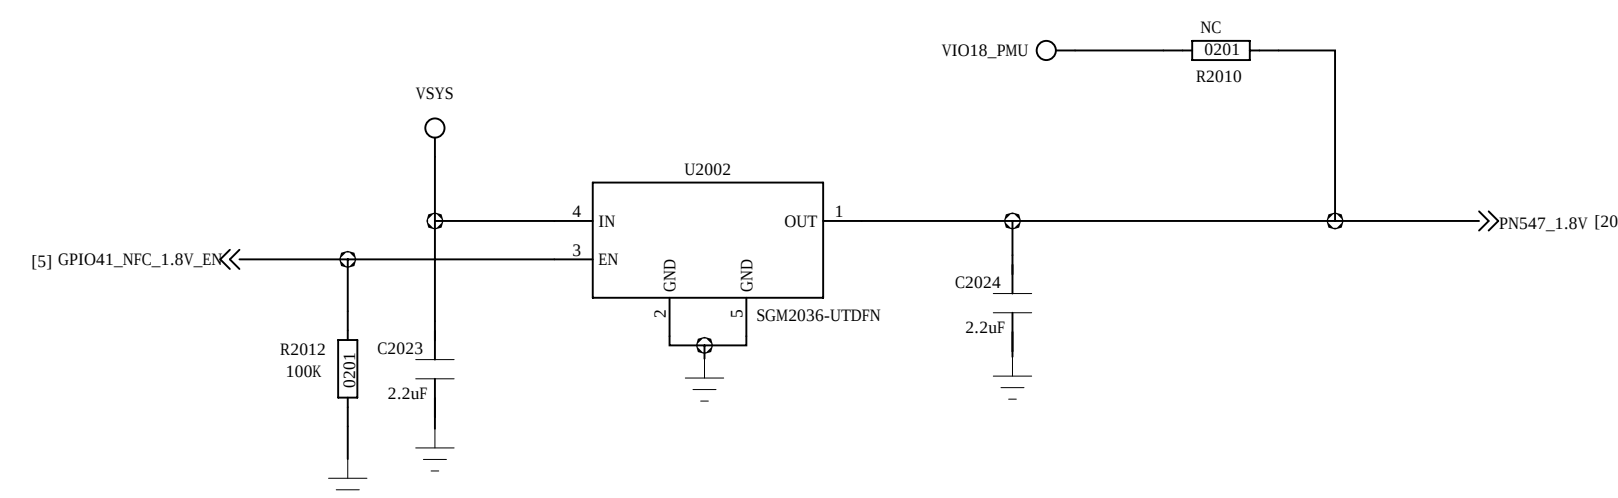

I2C_ADR1	I2C_ADR0	WRITE	READ
0	0	0X50	0X51
0	1	0X52	0X53
1	0	0X54	0X55
1	1	0X56	0X57

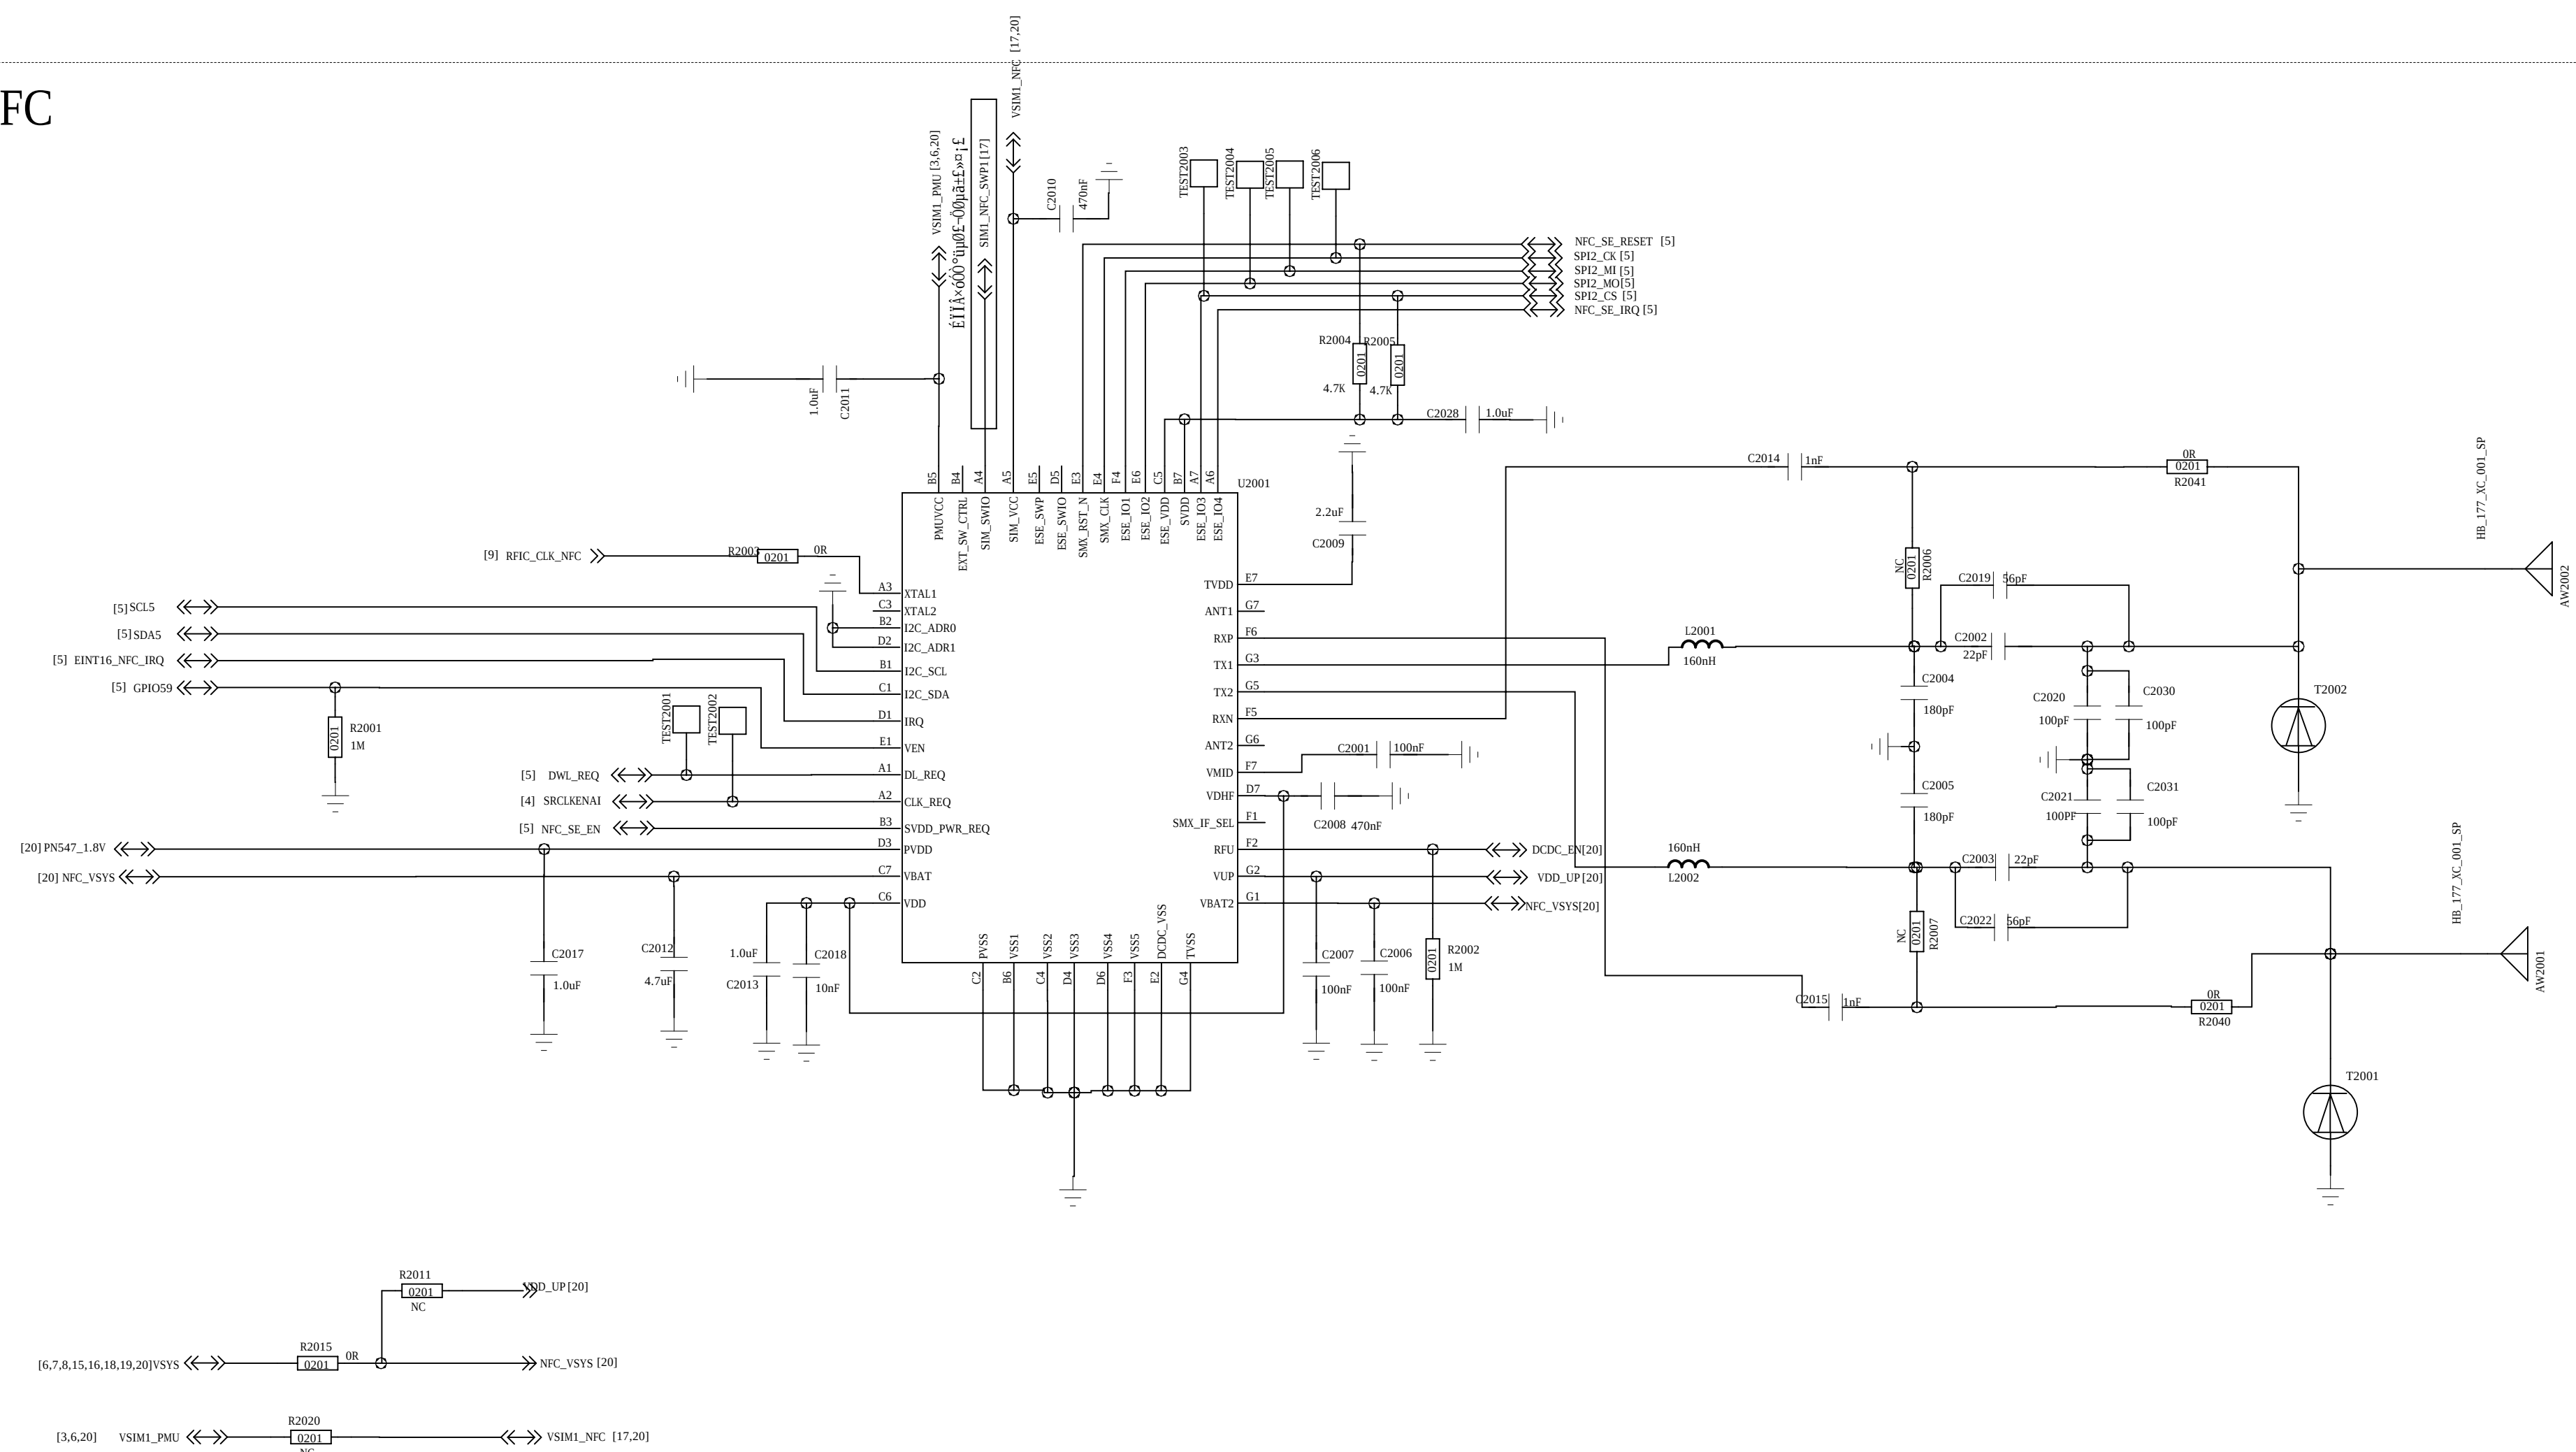

		(COMPANY):		LC	
		TITLE:		CX880	
DRAWN:	BY/DT:				
<Drawn By>	<Drawn Date>				
CHECKED:	DATE:	LOOSE:	SIZE:	DRAWING NO:	REV:
<Checked By>	<Checked Date>				
QUALITY CONTROL:	DATE:	<Code>	A0	<Drawing Number>×Revision>	
<QC By>	<QC Date>				
RELEASED:	DATE:	SCALE:			
<Released By>	<Release Date>	<Scale>			
		SHEET:		20	20