

MAIN ANT2
MHB TRX, N78/N79 DRX

MHB L-PAMiD

SUB ANT1

LMHB DRX

SUB ANT3

N78/N79 TRX

ANT1004

RFS1000

F1007

U1003

ANT1005

U1025

U1027

U1029

TRX_N78

TRX_N79


TRX_N78_PA

N79_PA (CHN Only)


Legend:

- HK: SMD
- Others: NC

TRANSCEIVER(SDR735)

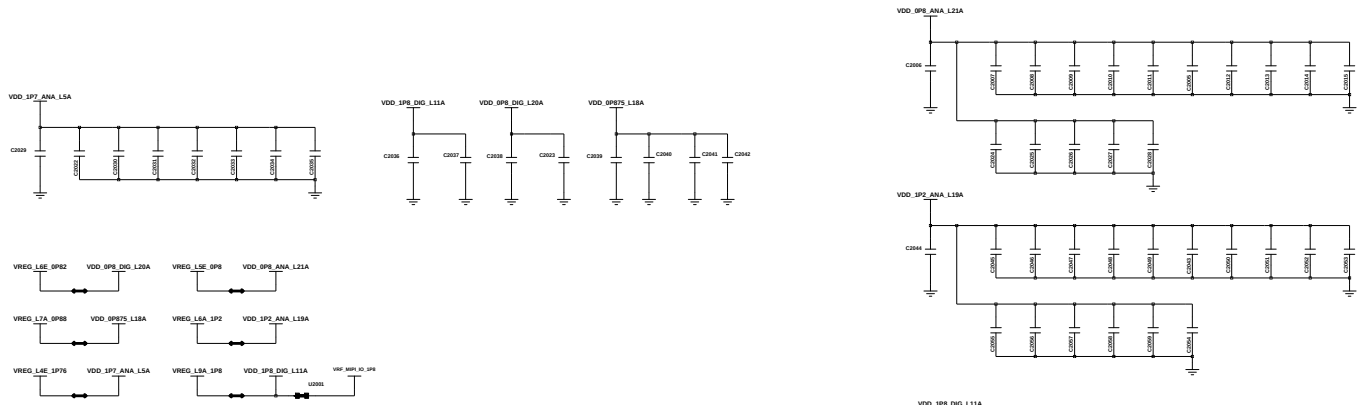

Coupling SW

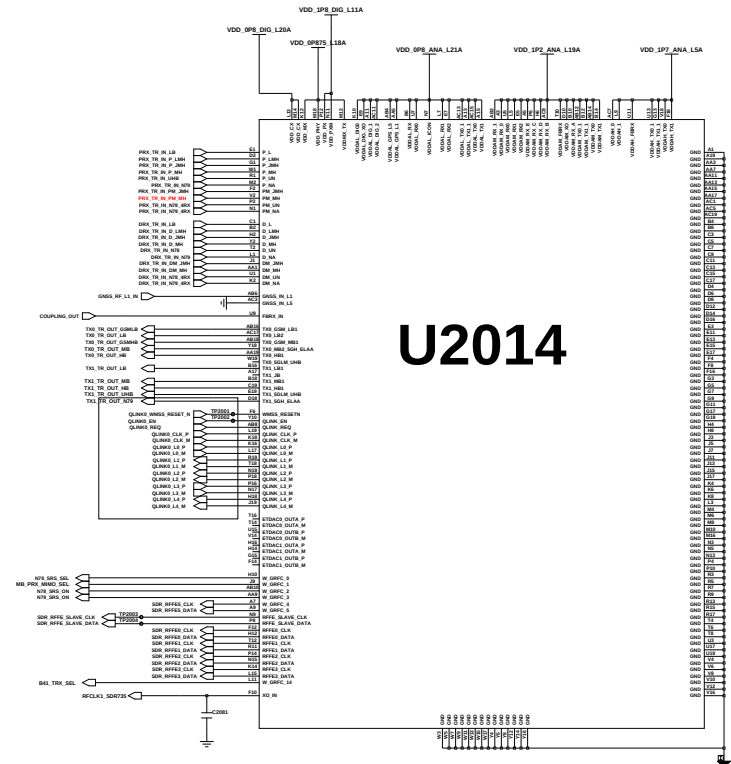


U2014

LTE	NR	LTE PA	NR PA
LB	LB	ENDC MMBB	LB L-PAMiD
LB	MB	LB L-PAMiD	ENDC MMBB
LB	HB	LB L-PAMiD	ENDC MMBB
LB	UHB	LB L-PAMiD	UHB PA

APT0


LB LPAMID / OMH LPAMID

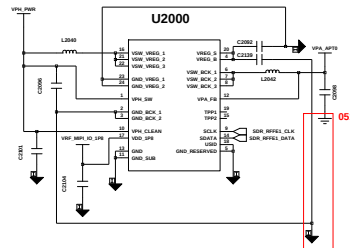

LTE	NR	LTE PA	NR PA
MB	LB	ENDC MMBB	LB L-PAMiD
MB	MB	OMH L-PAMiD	ENDC MMBB
MB	HB	OMH L-PAMiD	ENDC MMBB
MB	UHB	OMH L-PAMiD	UHB PA



APT1

ENDC MMBB / UHB LPAMIF




SUB ANT2

MB DRX MIMO, N78 PRX MIMO
GPS, WIFI

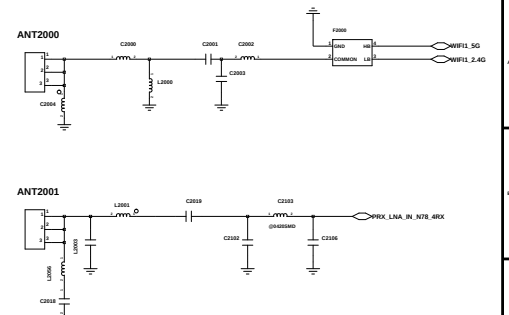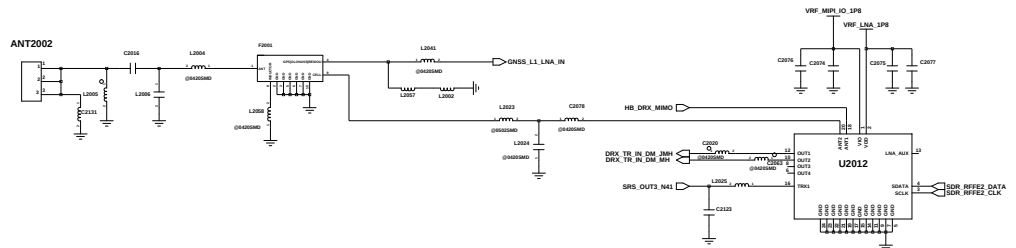


SUB ANT3

MB PRX MIMO

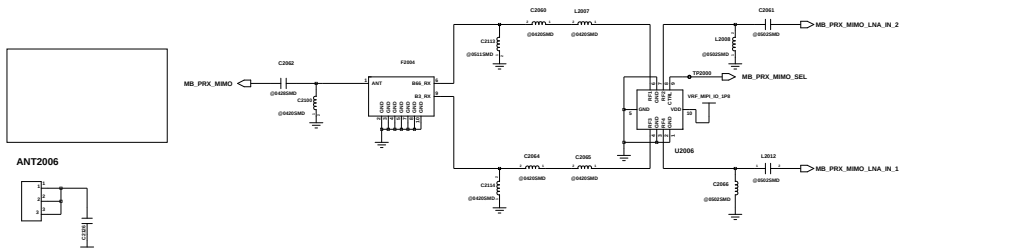


SUB ANT4


HB PRX MIMO
N79 PRX MIMO

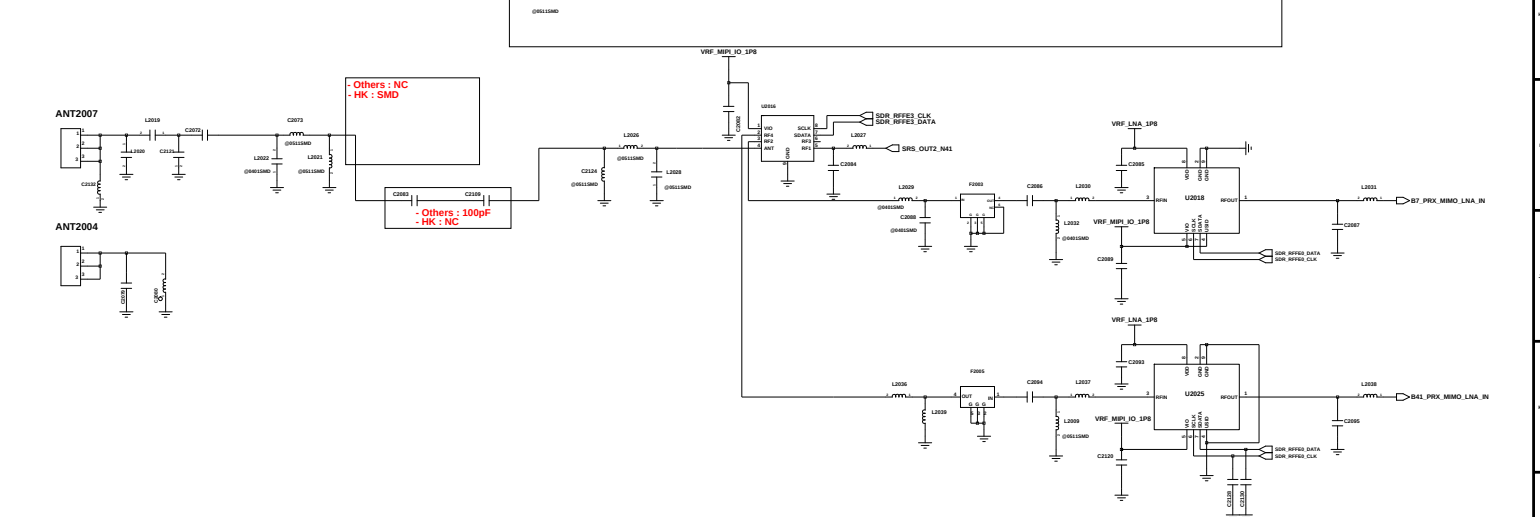

SUB ANT5


HB DRX MIMO
N78/N79 DRX MIMO

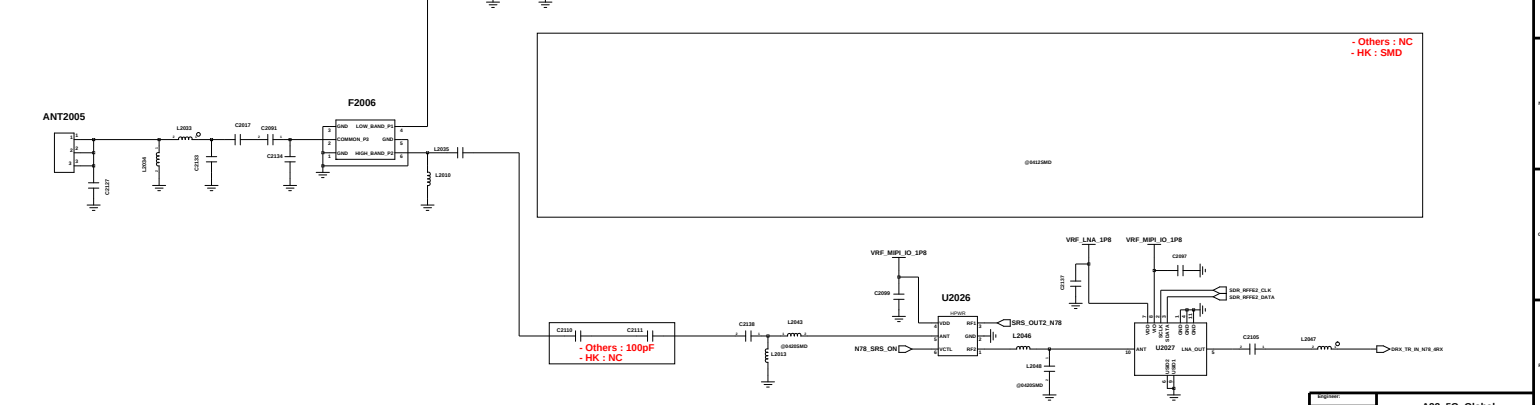






NFC

VREG_L12A_1P8 VDD_NF

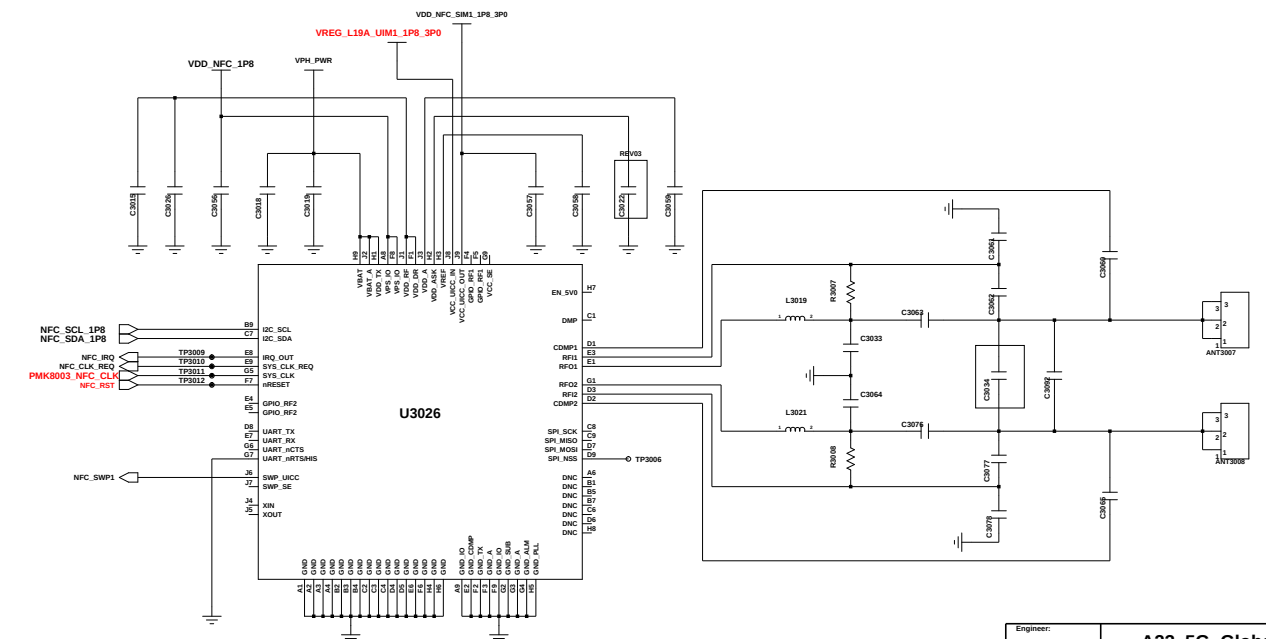


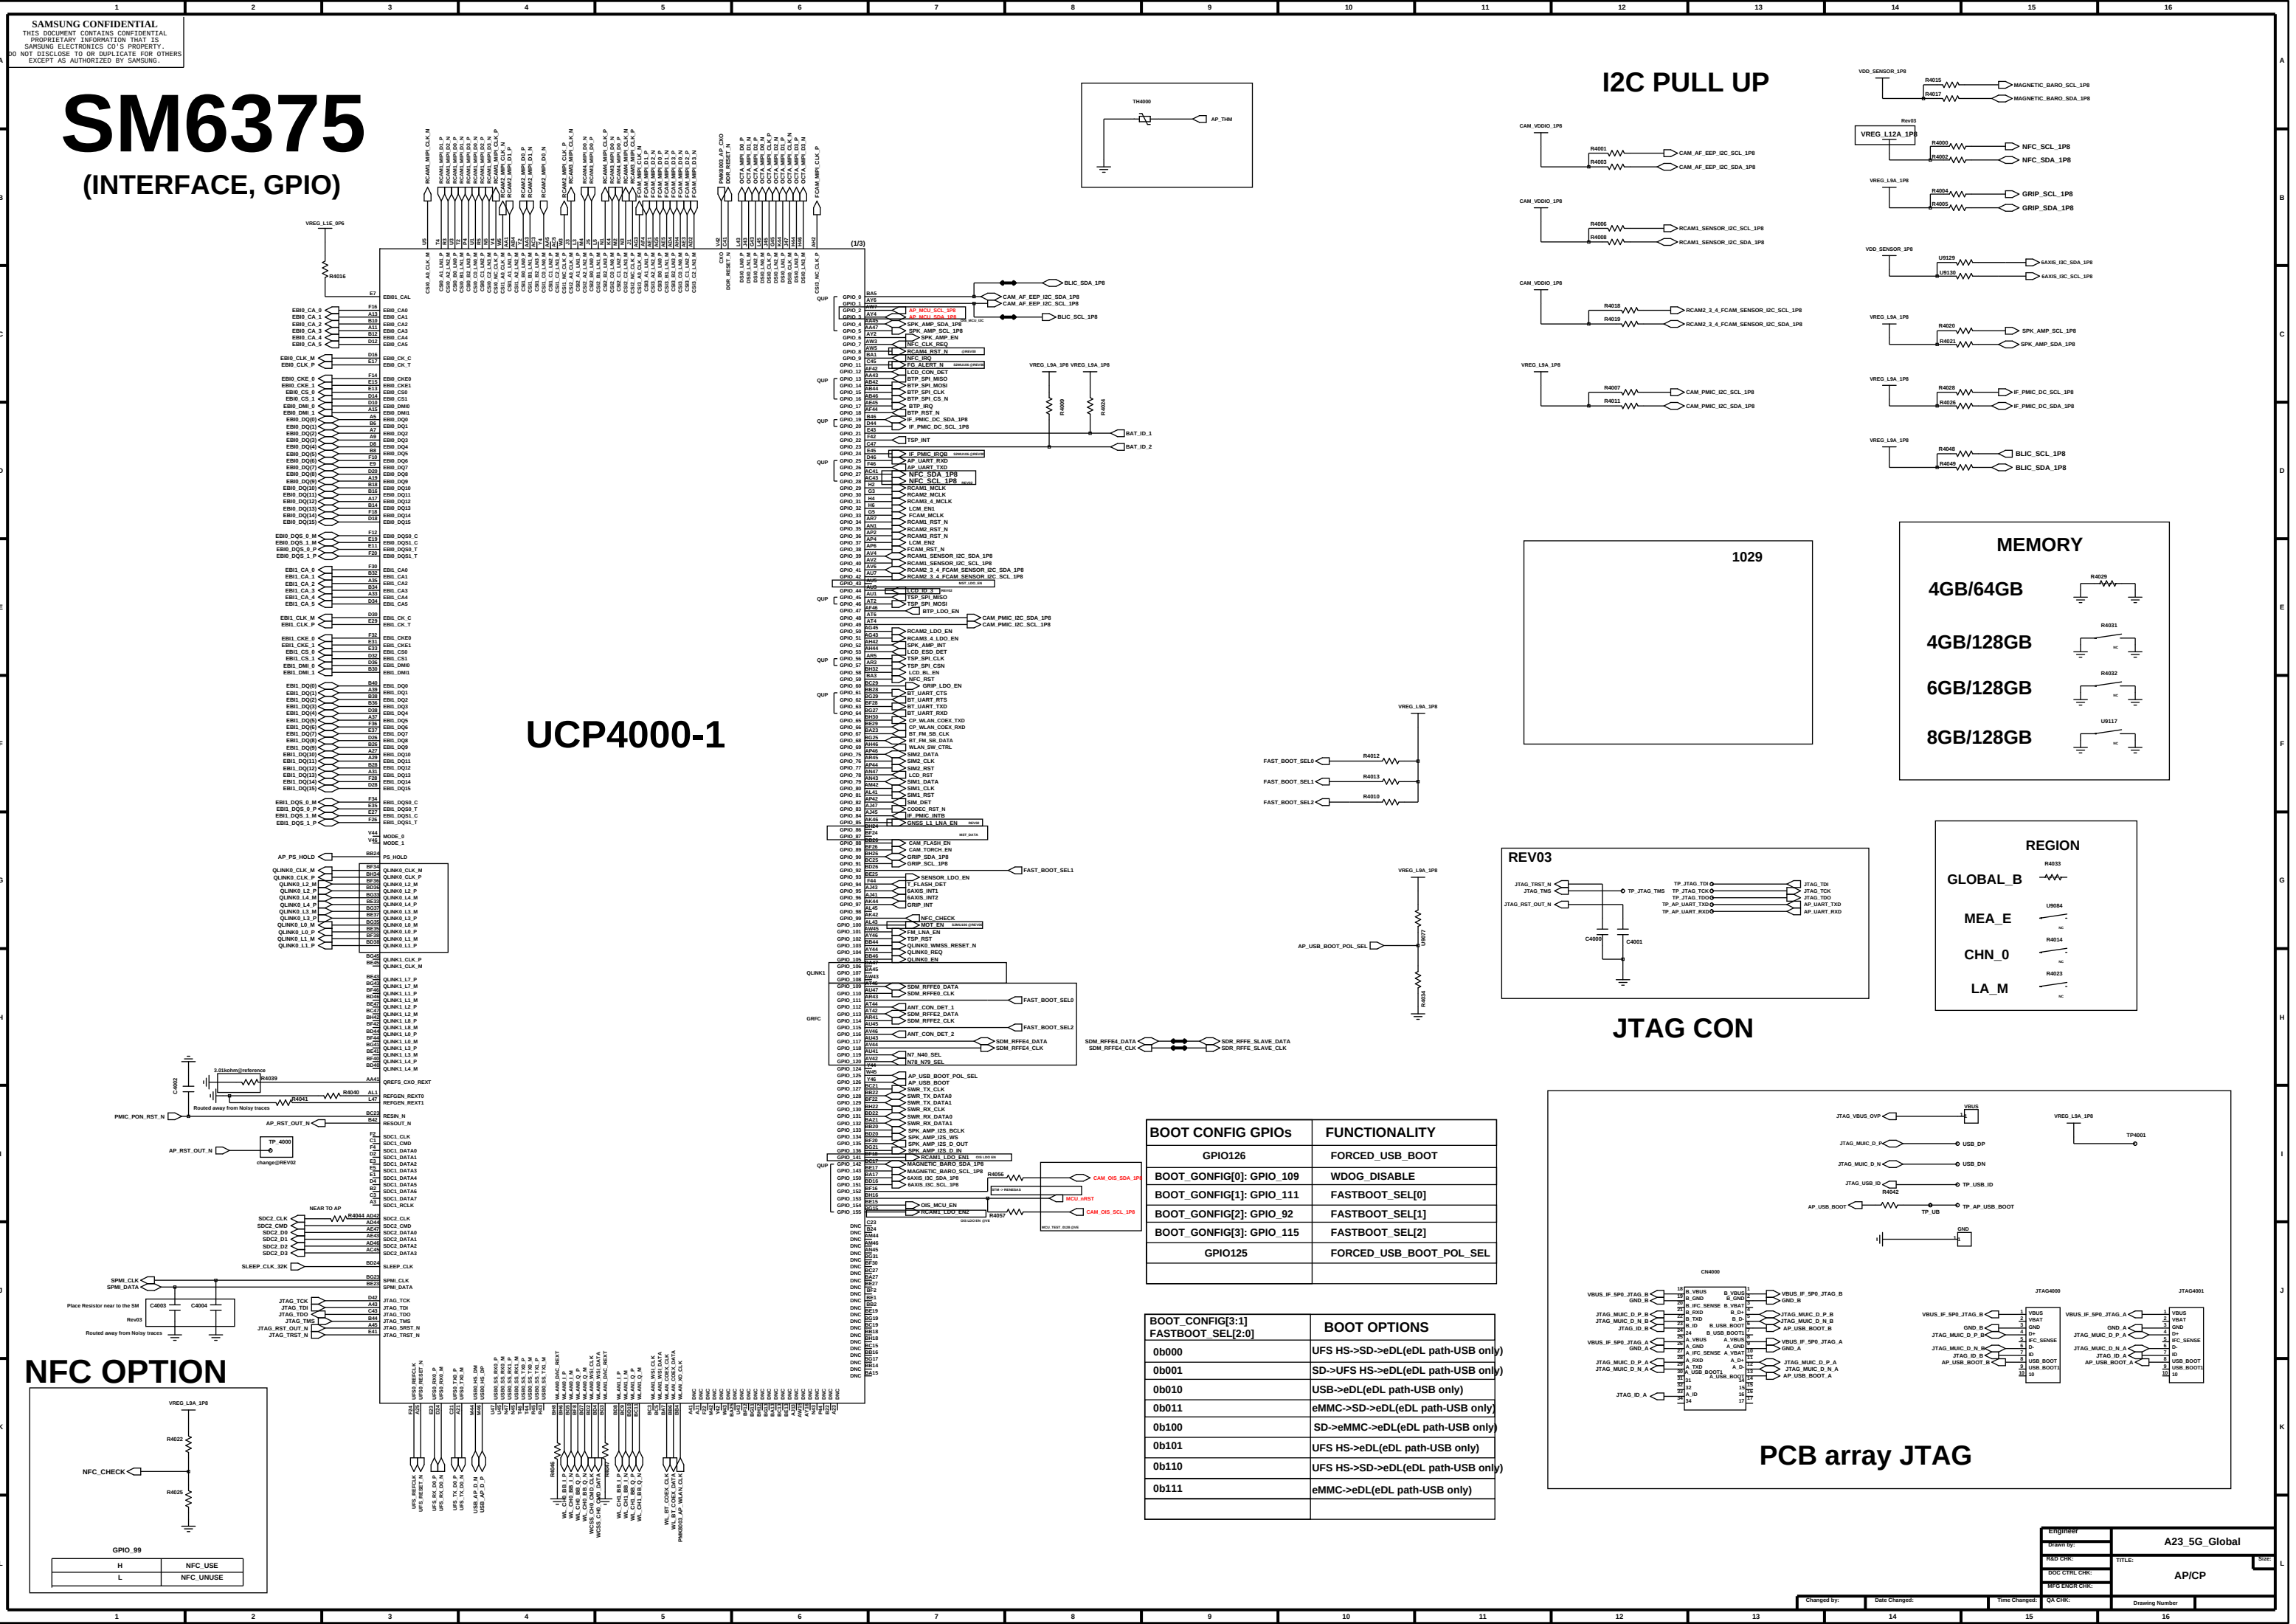

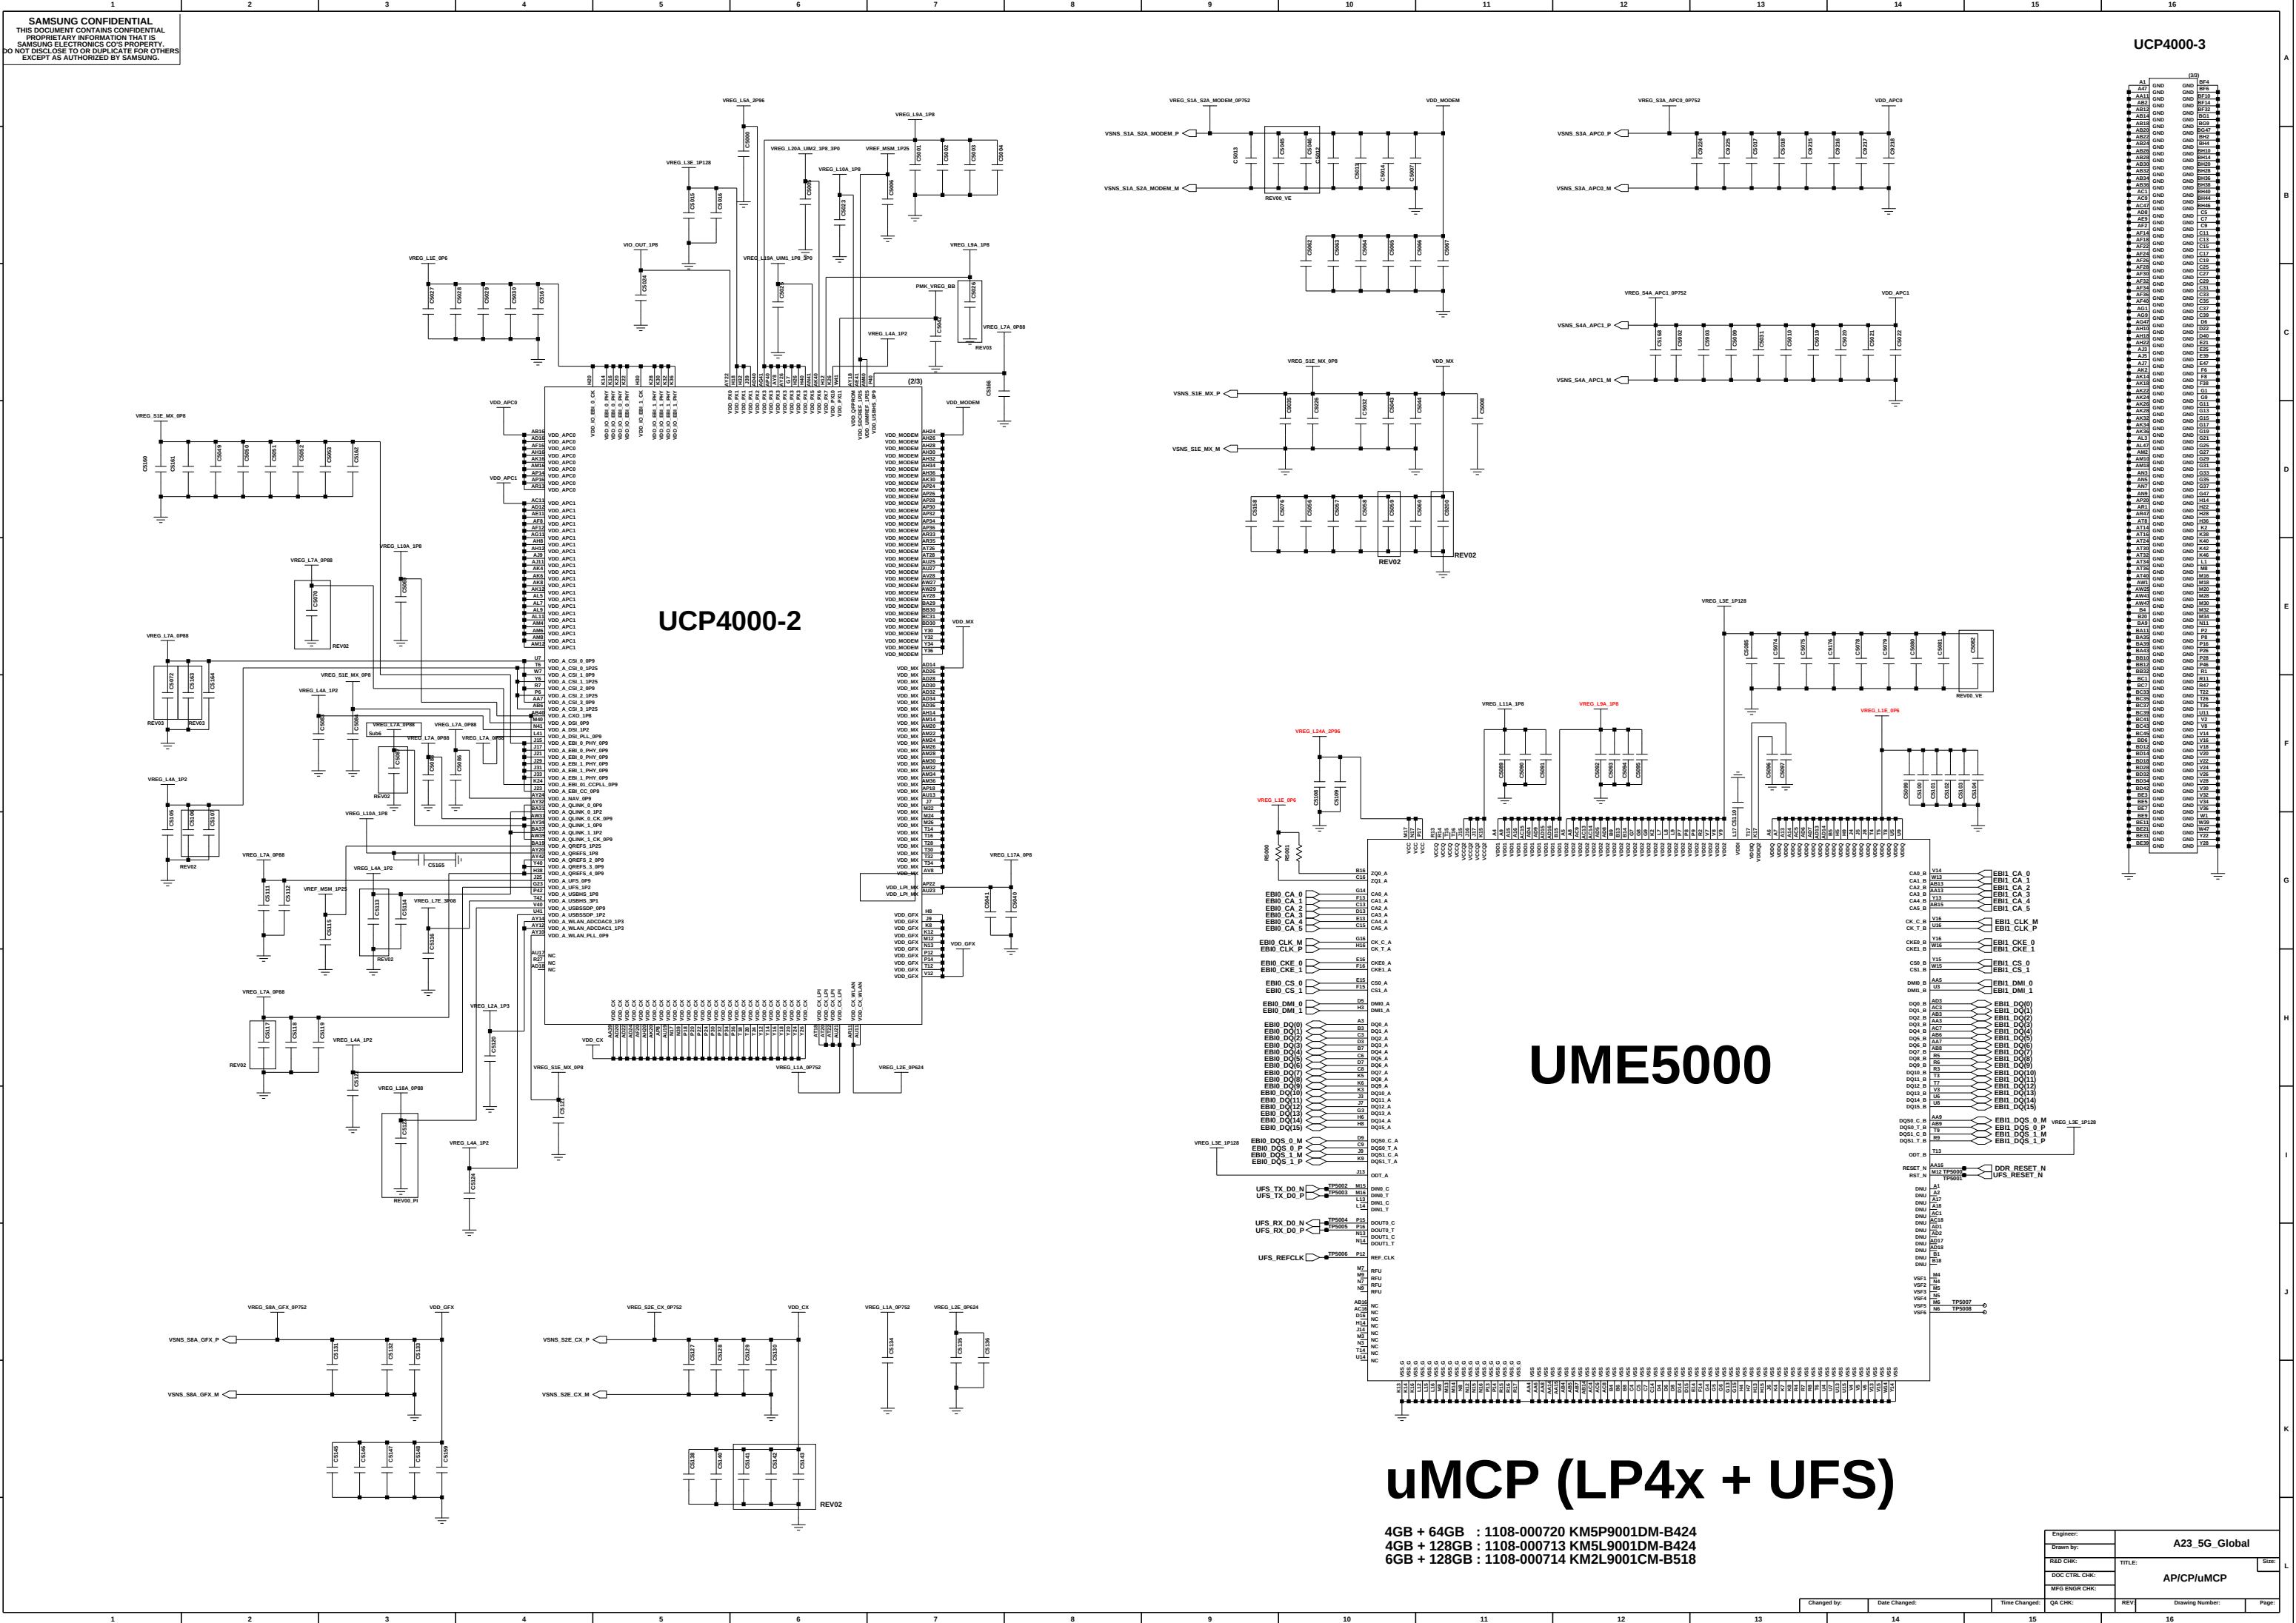

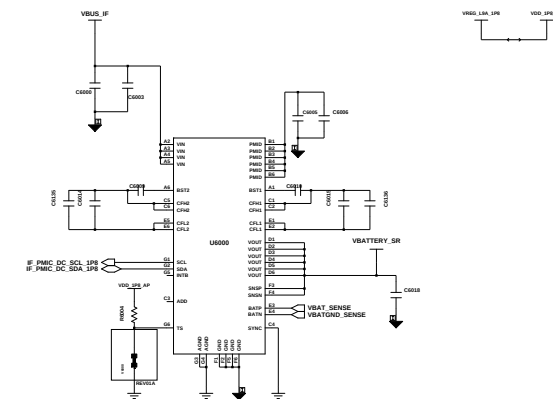


COPY FROM SM-A33

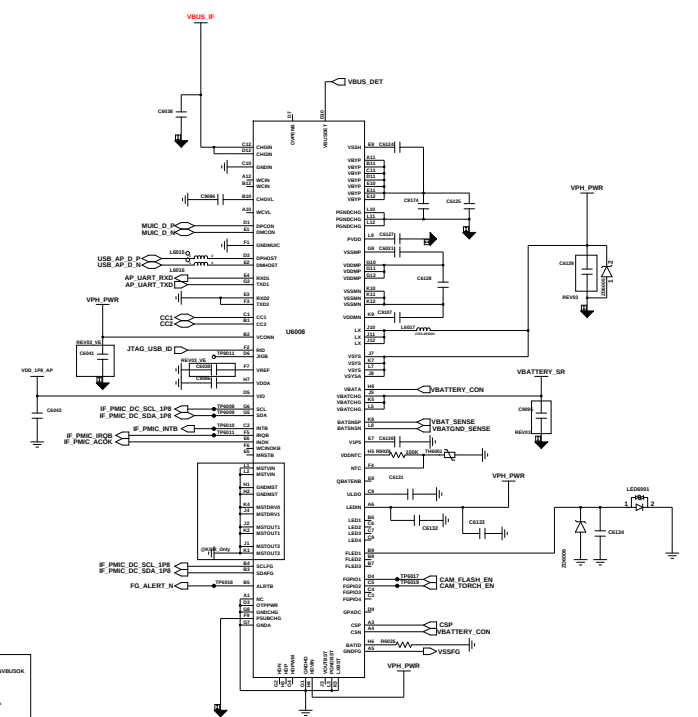


COPY FROM SM-A235F

FIG. 6-33-164. CPU overvoltage protection

COPY FROM M53

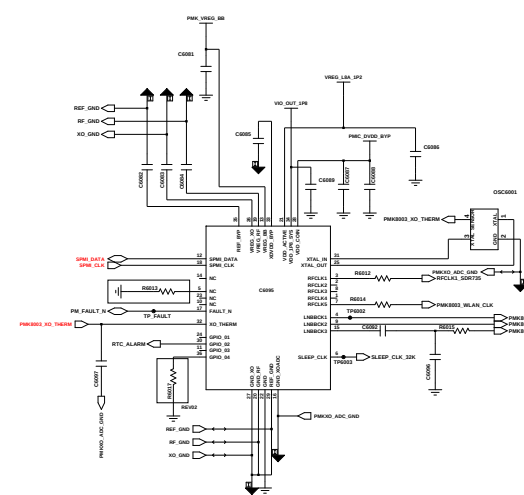



CLOCK GEN

[illegible]



VOL KEY

HW ID	REV	VALUE	COMMENT
00	Bring-up	12K	
01	Rev00	20K	PRE_PV1
02	Rev01	30K	RF_TEST
03	Rev02	51K	PRE_PV2
04	Rev02A	68K	TEST
05	Rev02B	82K	PRE_PV2_VOH
06	Rev03	100K	PV1
07	Rev03A	120K	PV1_AINT_SW
08	Rev04_00A	150K	PV2
09		200K	
10			

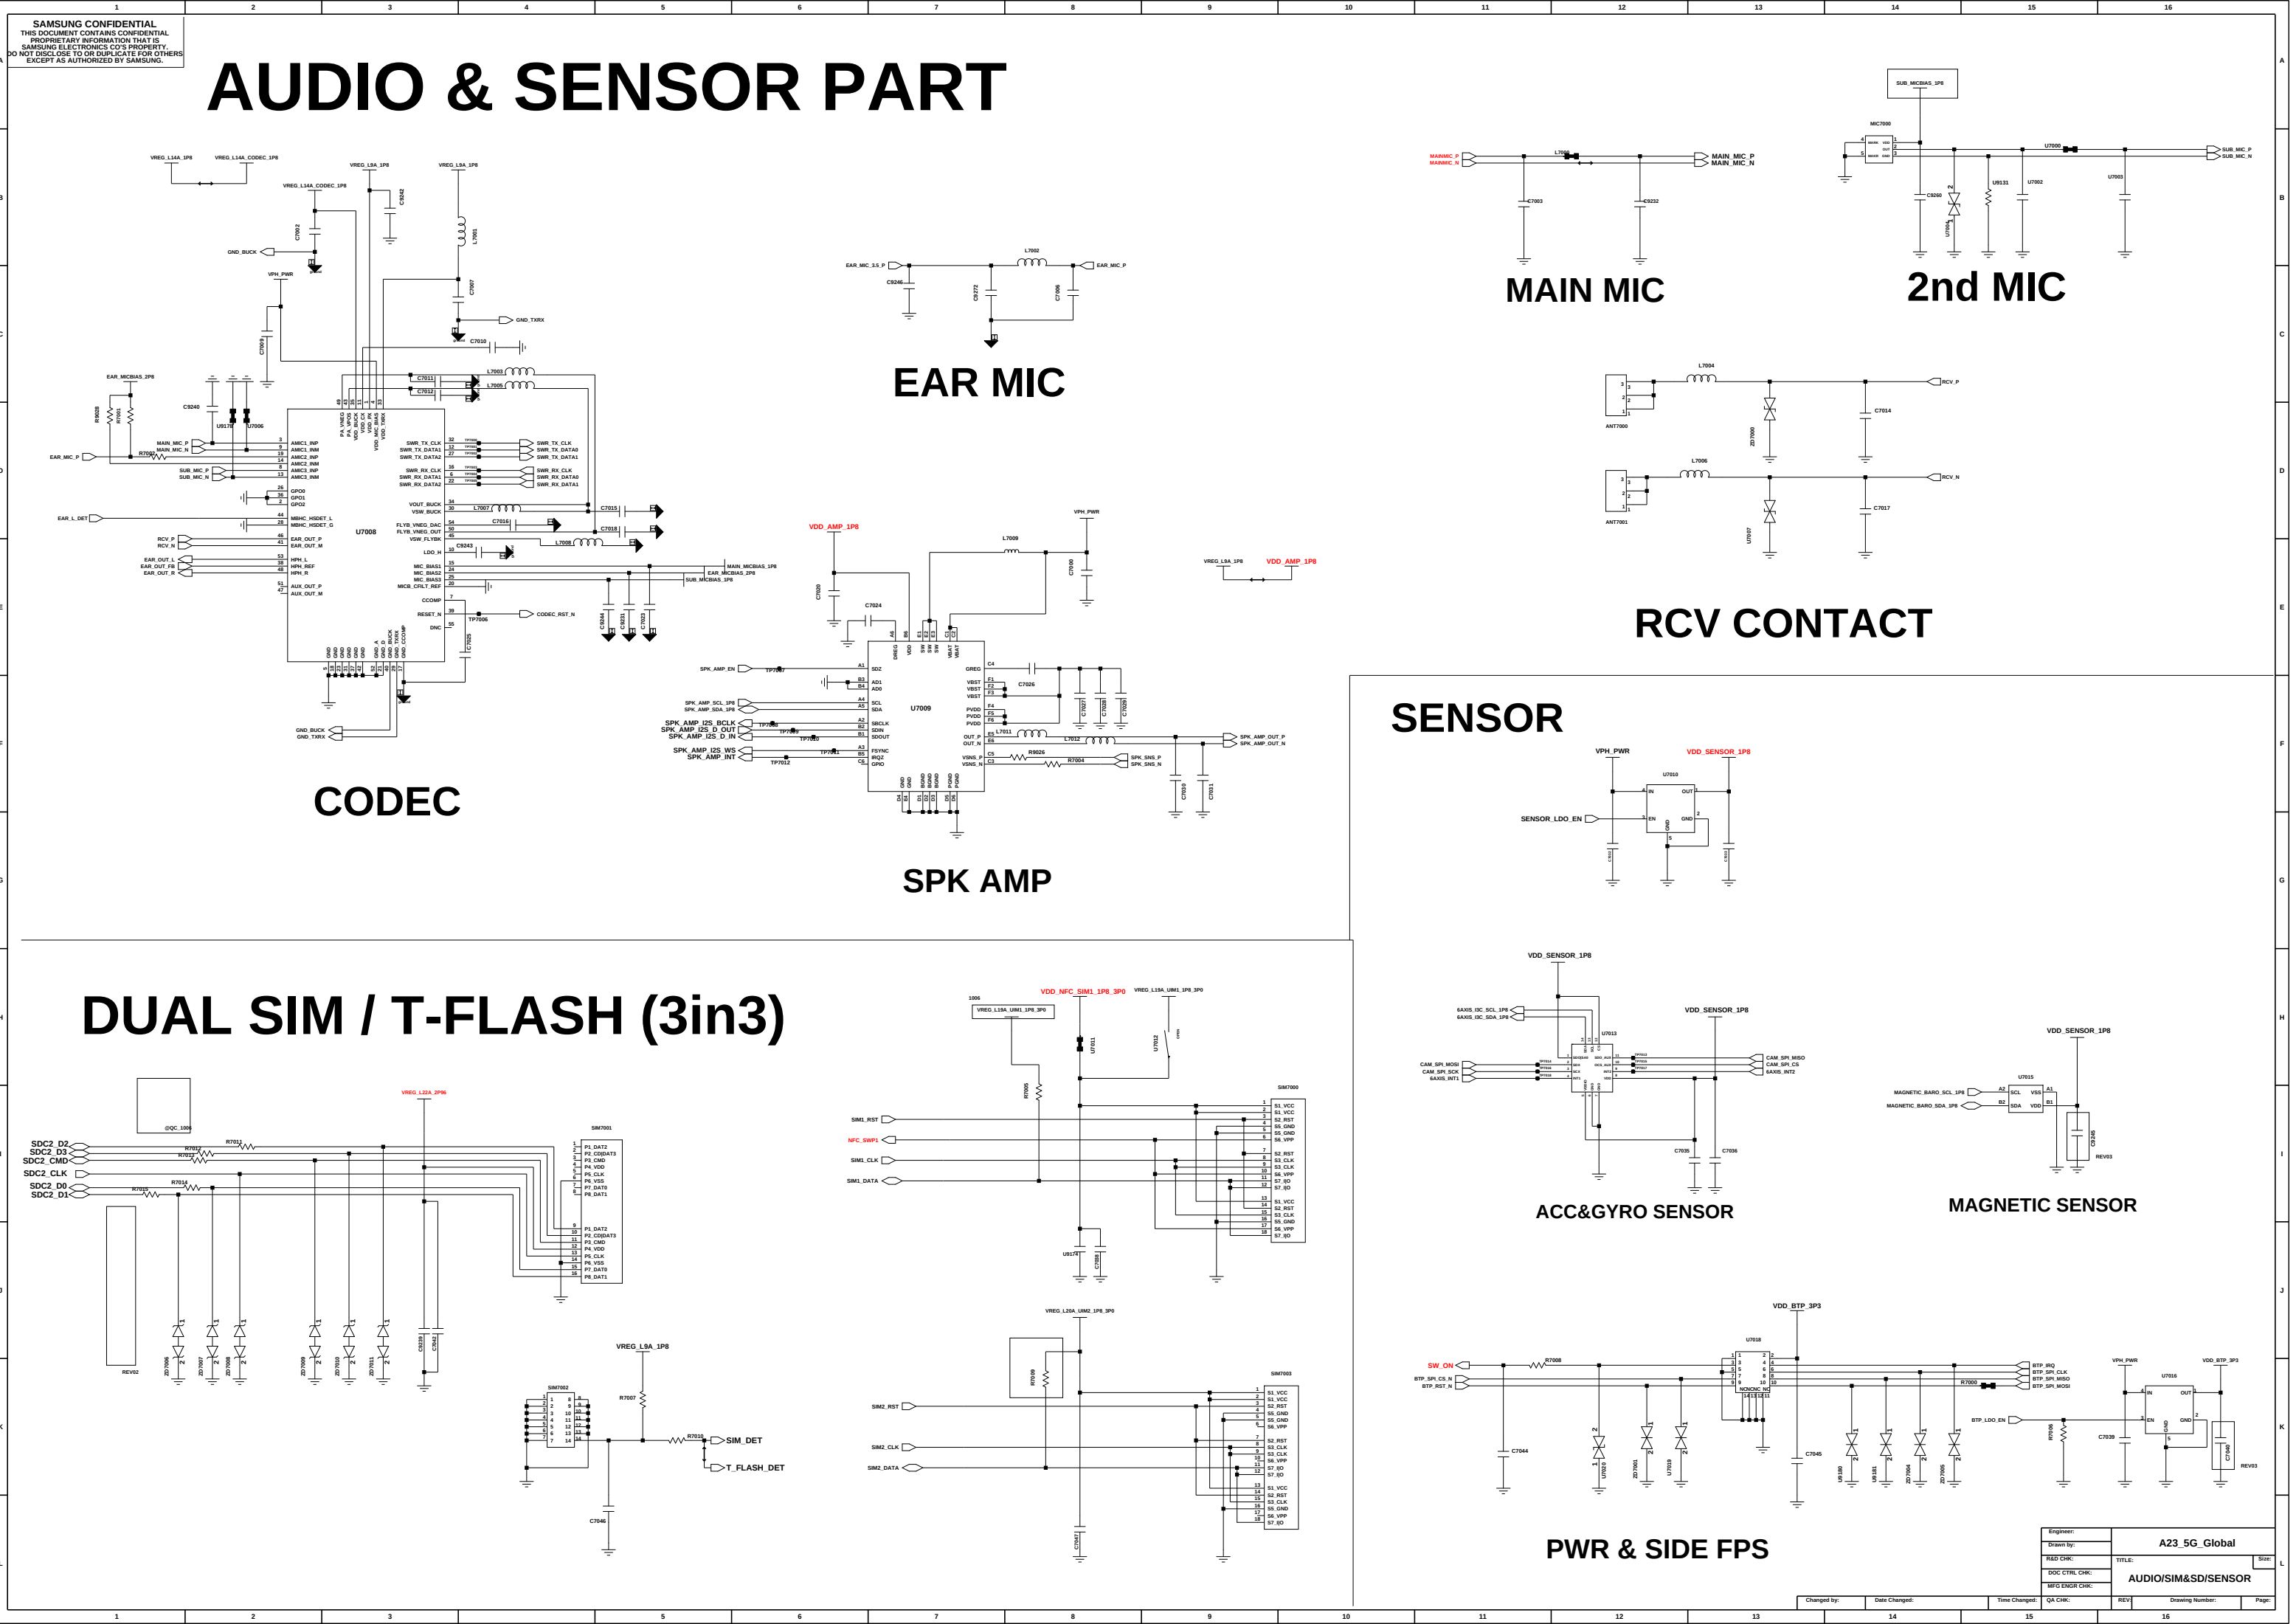





CAM PMIC



Changed by:	Date Changed:	Time Changed:	QA CHK:	REV	Drawing Number:	Page:
-------------	---------------	---------------	---------	-----	-----------------	-------



BOTH HOLE



[illegible]

ID	Region	VALUE	COMMENT
1	GLOBAL	12K	PV2 ~
2	NA	1M	PV2 ~

[illegible]

The schematic diagram shows the internal structure of the IFC1000. It features a 2N1000 transistor with its base connected to a 200K resistor and a 100K resistor. The collector is connected to a 200K resistor and a 100K resistor. The emitter is connected to ground. The output is taken from the collector. The circuit is labeled with component values and pin numbers.

The schematic shows the I2C connection between the ESP32 and the DS18B20 sensor. The ESP32's VCC pin is connected to the sensor's VCC pin and a 3.3V voltage source. The ESP32's GND pin is connected to the sensor's GND pin and the common ground of the 3.3V source. The ESP32's I2C SDA pin is connected to the sensor's SDA pin, and the ESP32's I2C SCL pin is connected to the sensor's SCL pin. The sensor's SDA and SCL pins are also connected to pull-up resistors (10kΩ) which are connected to the 3.3V source. The sensor's pinout is shown as follows:

Pin	Function
1	VCC
2	GND
3	SDA
4	SCL
5	NC
6	NC
7	NC
8	NC

The DS18B20 sensor is labeled with "DS18B20" and "1-Wire". The ESP32 is labeled with "ESP32" and "I2C". The 3.3V source is labeled with "3.3V" and "VCC". The pull-up resistors are labeled with "10kΩ".

ANT1006

50 Ohm

50 Ohm

10 Ohm

40 Ohm

SPK, OUT

ANT1007

50 Ohm

50 Ohm

10 Ohm

40 Ohm

SPK, OUT

[illegible]

REV05

R1005	R3023
R3008	R3024
OPEN	OPEN

INSIK MARK

