


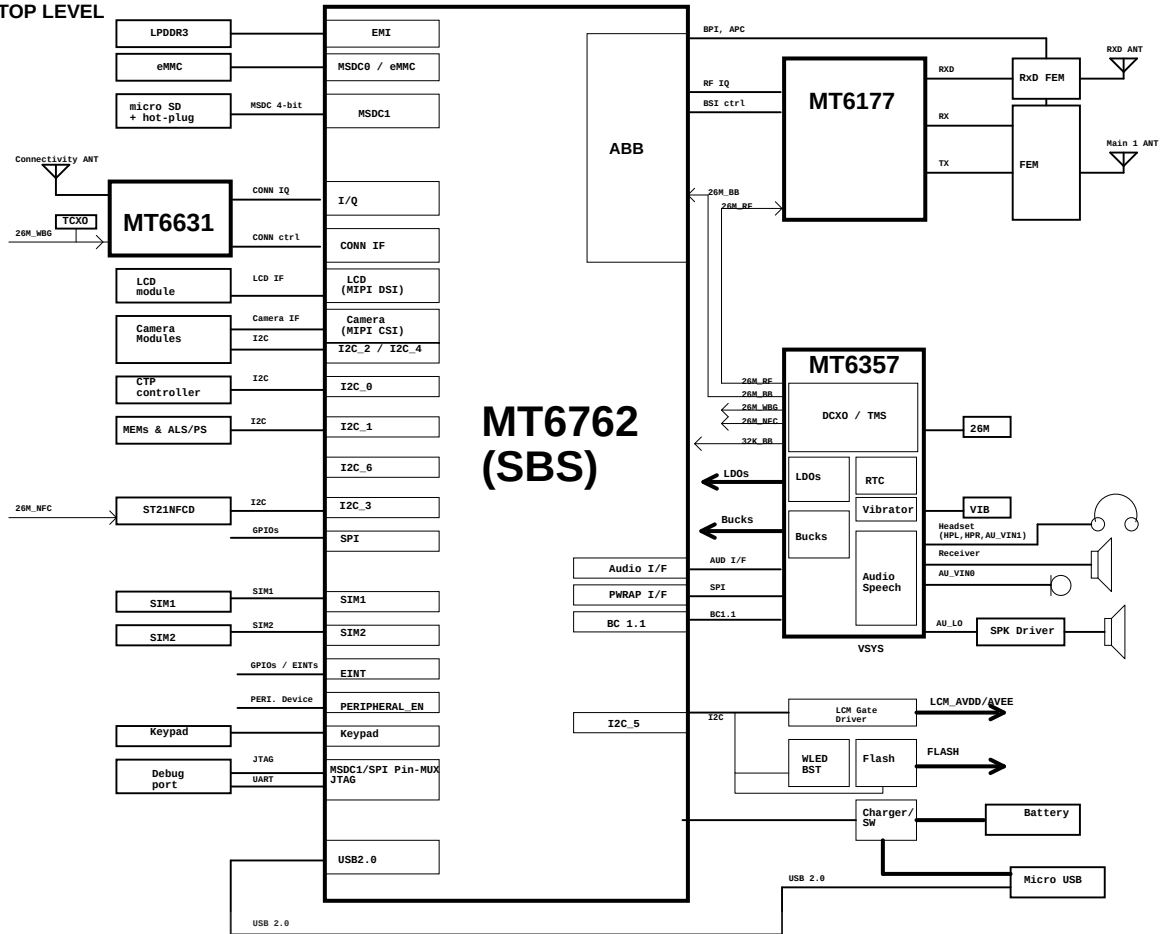


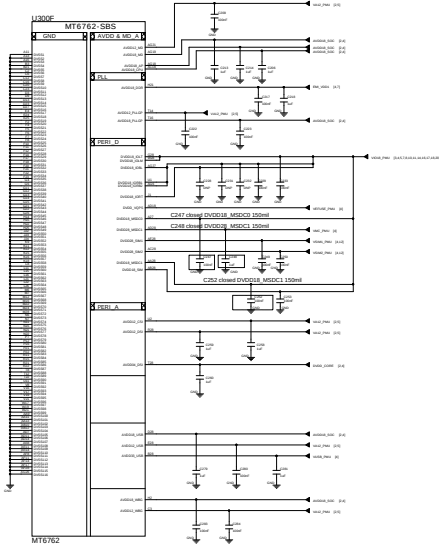

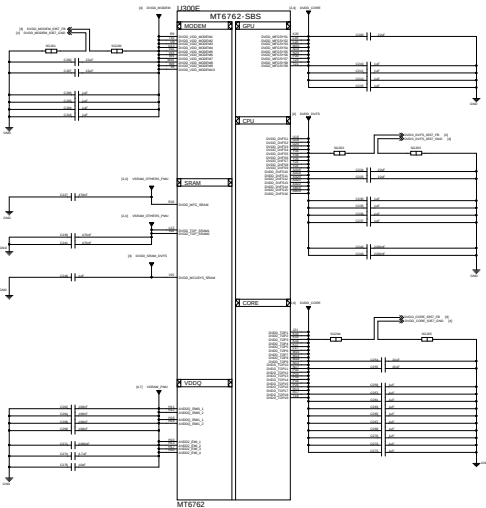

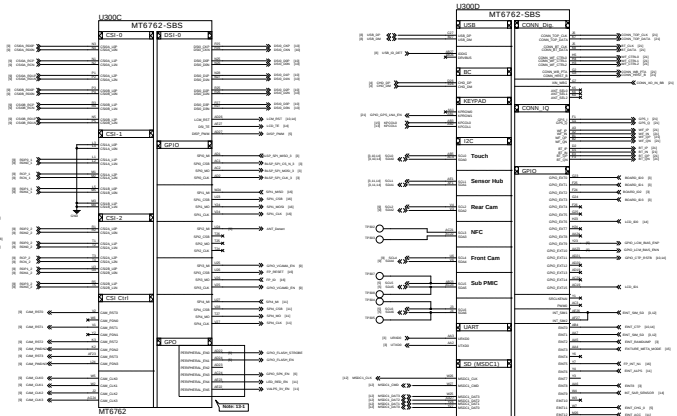



Schematic design notice of "13_BB_2" page.

Note 13-1: The enable pin of acoustic or optoelectronic devices (e.g. SPK AMP/Backlight/Charger OCP/OVP) suggest to use Peripheral_EN[0:5]
If use other GPIOs as enable pin, suggest to reserve 0201 NC to GND




Genomic map of the MT6762-SBS region on chromosome 1. The map shows a 10000 bp scale bar at the top. The MT6762-SBS region is highlighted in a box. Below the map, 28 genes are listed with their coordinates and orientations. The genes are: R000000000, R000000000. The genes are arranged in two columns, with the first column containing genes 1-14 and the second column containing genes 15-28. Each gene is represented by a horizontal line with arrows indicating the direction of transcription. The coordinates for each gene are provided in the first column, and the gene names are in the second column.


Note 14-2: Please check eMCP LP3 and eMCP LP4X pin mux

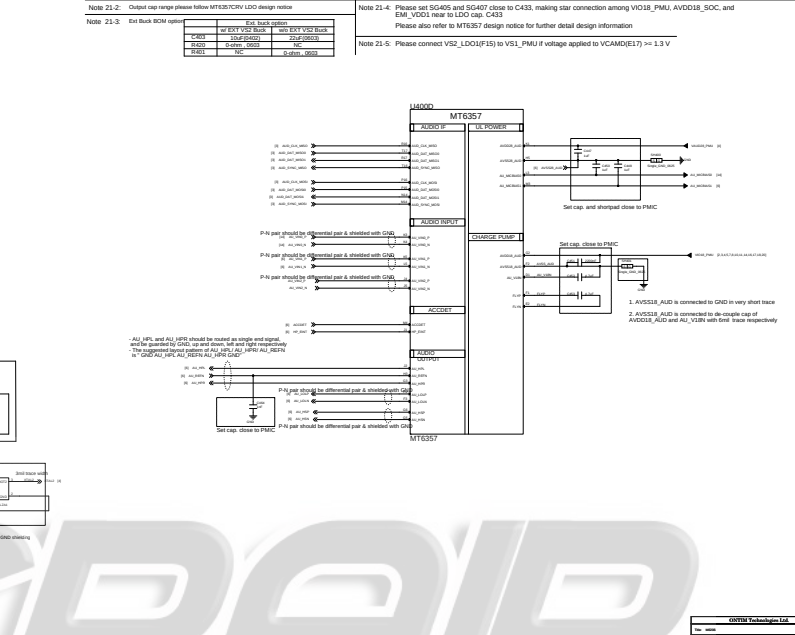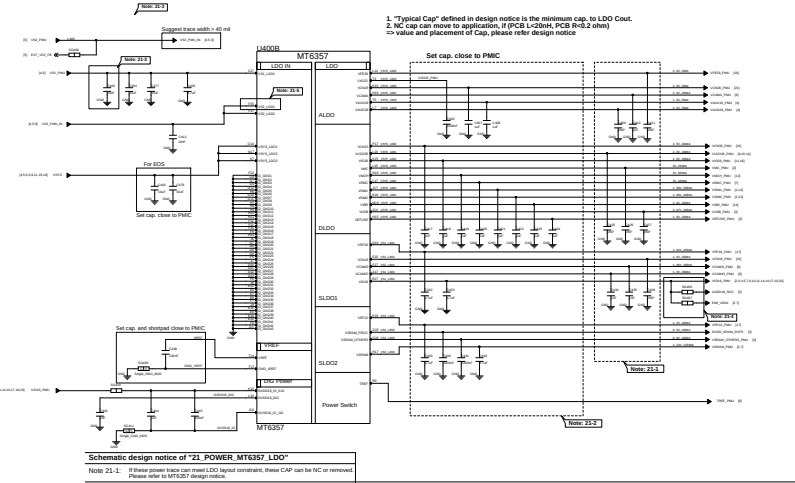


LCM Backlight LED driver

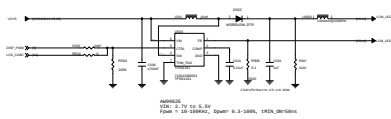


LCD Bias

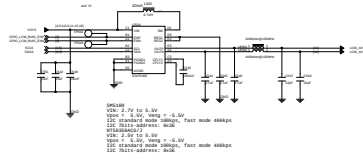


Flash LED 5V Boost

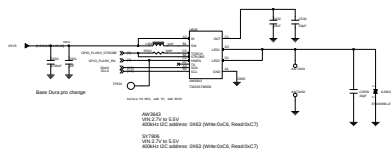


Charger

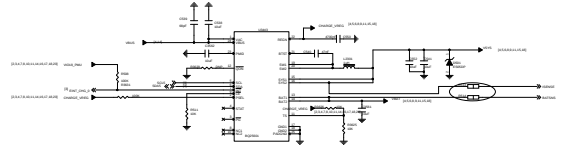

base MT6762 ref-SCH



base MT6762 ref-SCH



Schematic design notice of "28_POWER ThirdParty-Power"


Note 28-1: VA12 Layout placement please close to AP.

Note 28-2: VS2 Bulk Layout placement please close to PMIC: MT6762.


Note 28-3: VS2 LDO Layout placement please close to MT6762.

IREPAIR


Handset 2nd Microphone




SPEAKER base M3901-P 0626

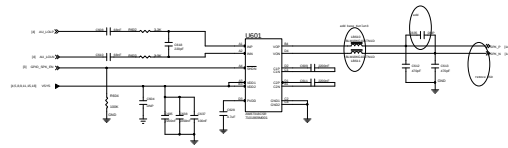


Earphone Audio base M3901-P 0626

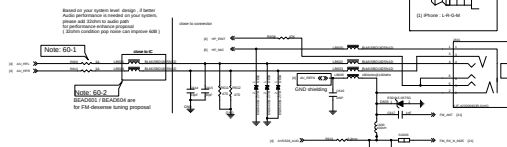


EAR PIECE






Earphone MICPHONE




iRCPAIR

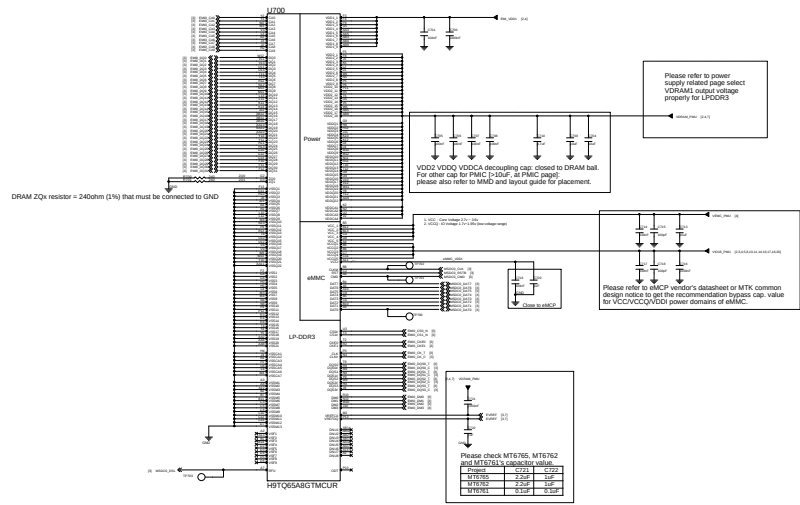

BATTERY CONNECTOR

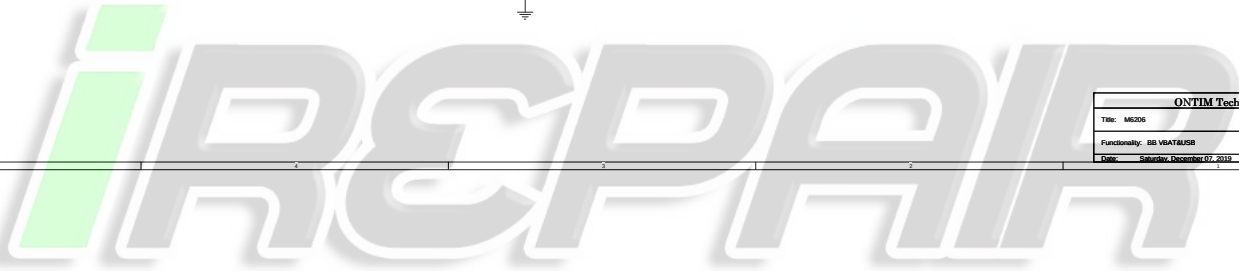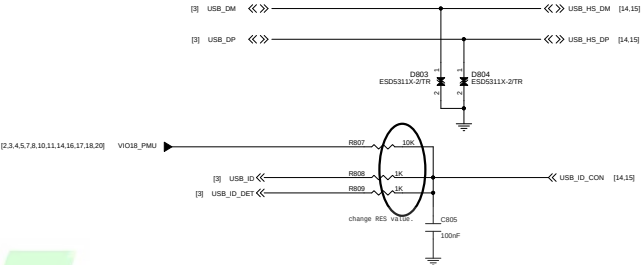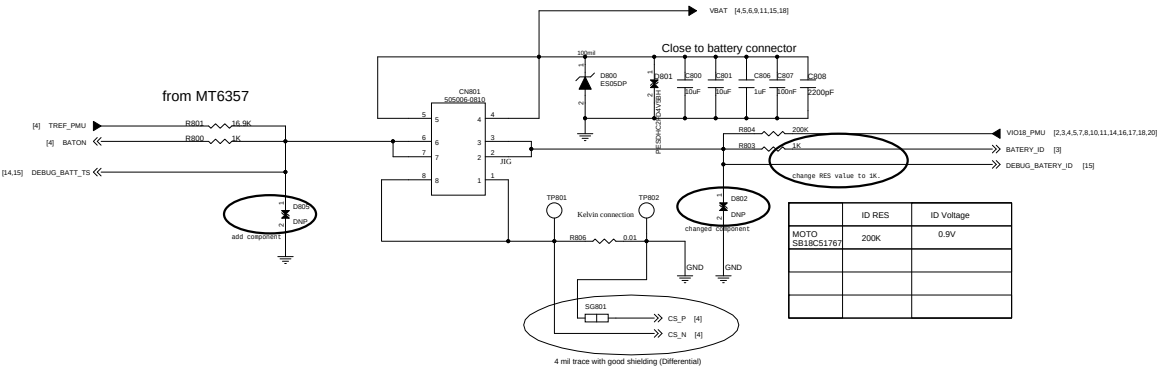


Rear-Main-AF Camera 13M

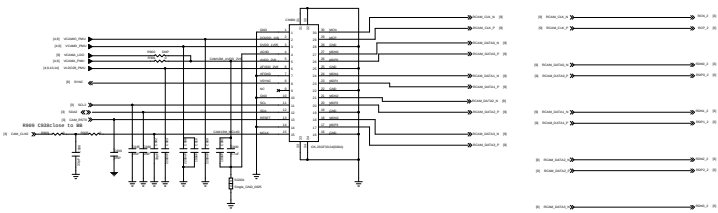

Rear Camera - 13M

Rear camera SHINETECH(SK3LXKX5) (DC address: (Write/50Z, Read/50Z))
AF driver 800Z (DC address: (Write/50Z, Read/50Z))


Rear-Slave-FF Camera 2M

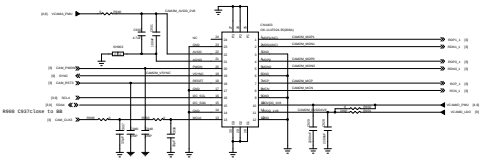

Rear Slave Camera - 2M


Rear camera SHINETECH(SK3LXKX5) (DC address: (Write/50Z, Read/50Z))

Front-FF-5M Camera Connector

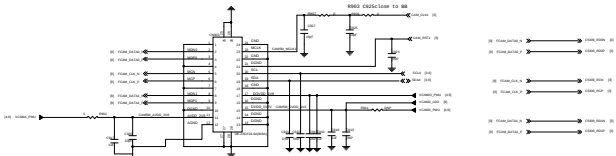


Front Camera - 5M

Front camera SHINETECH(SK3LXKX5) (DC address: (Write/50Z, Read/50Z))



Rear-Slave-AF Camera 2M

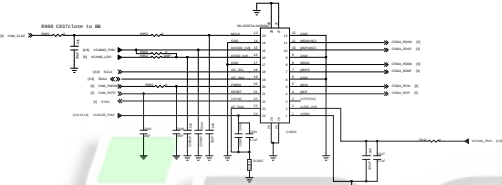


Rear Slave AF Camera - 2M





Rear camera SHINETECH(SK3LXKX5) (DC address: (Write/50Z, Read/50Z))

Camera Connector	
Pin	Signal
1	Ground
2	Power
3	Signal
4	Signal
5	Signal
6	Signal
7	Signal
8	Signal
9	Signal
10	Signal
11	Signal
12	Signal
13	Signal
14	Signal
15	Signal
16	Signal
17	Signal
18	Signal
19	Signal
20	Signal
21	Signal
22	Signal
23	Signal
24	Signal
25	Signal
26	Signal
27	Signal
28	Signal
29	Signal
30	Signal
31	Signal
32	Signal
33	Signal
34	Signal
35	Signal
36	Signal
37	Signal
38	Signal
39	Signal
40	Signal
41	Signal
42	Signal
43	Signal
44	Signal
45	Signal
46	Signal
47	Signal
48	Signal
49	Signal
50	Signal

LCM Connector

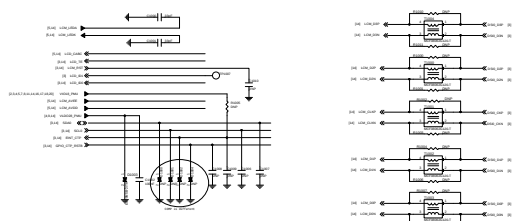


GT1151 I2C address: 0x5D (Write:0xBA, Read:0xBB)
or 0x14 (Write:0x28, Read:0x29)

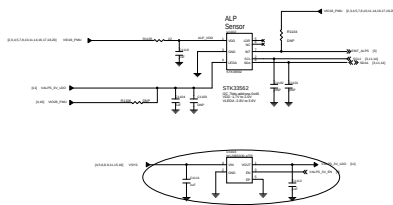


iREPAIR

SIM and TF

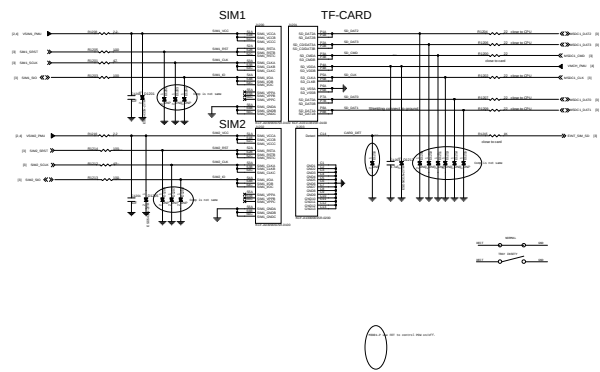

KEY base M3901-P 0626


Volume Up : HOME Key / OND
Volume Down : KPCL-LED
DO NOT put pull-up resistor on PWRKEY




iREPAIR

base M3901-P 0626

LCM Connector

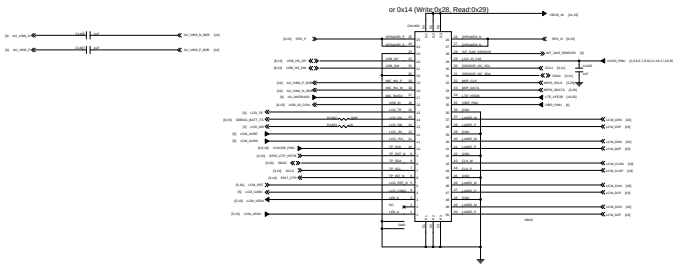


OVP





iRCPAIR

USB Test point


Now TP size is 1-2, need?





KEY Test point




BATTERY Test point




Test point

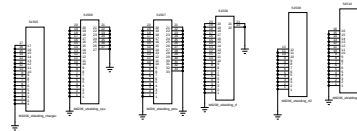



SPK Test point



iREPAIR

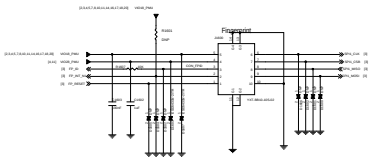


iREPAIR

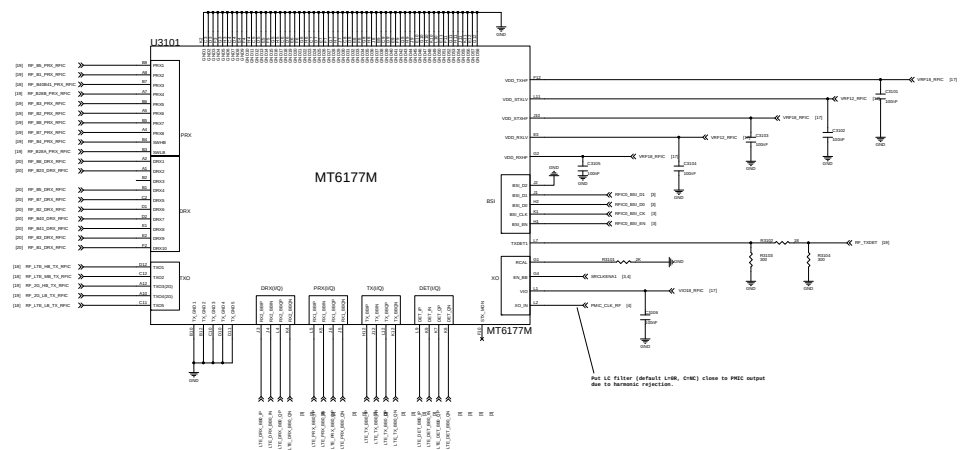


RF MT6177



iREPAIR

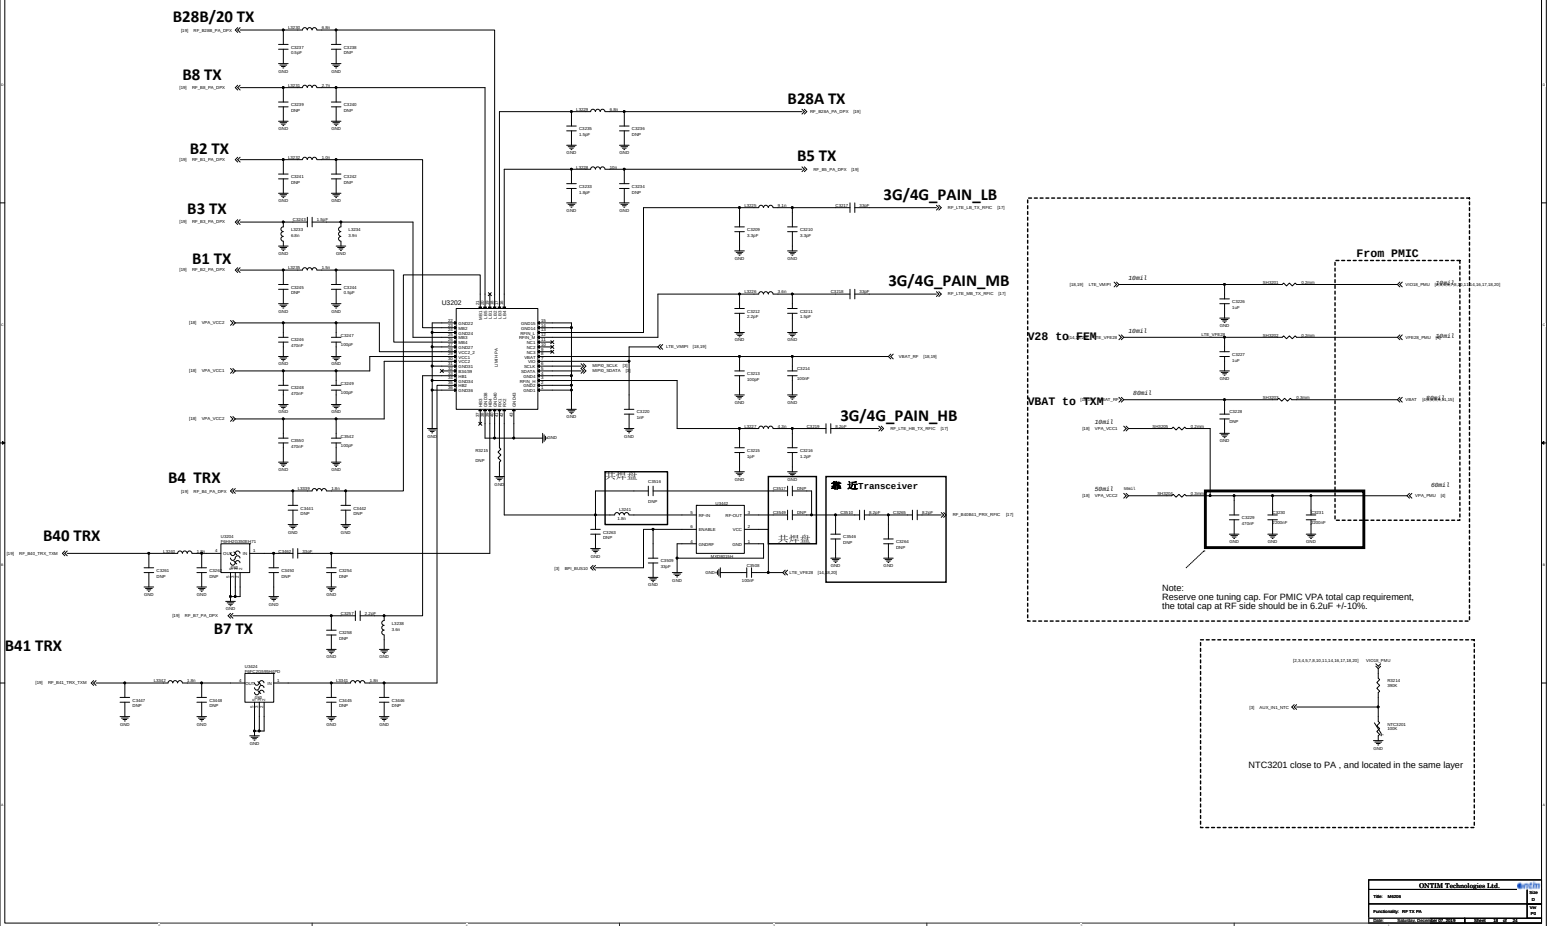

iREPAIR

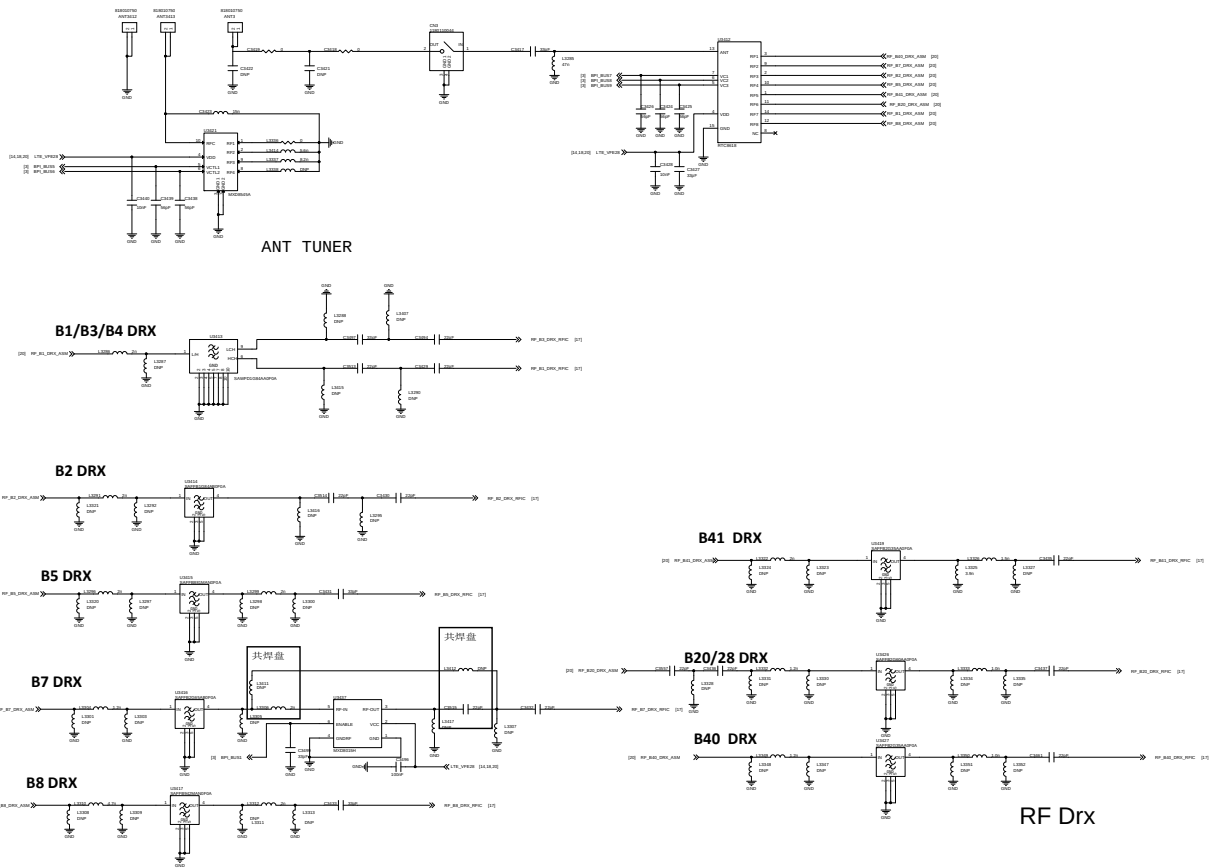

iREPAIR

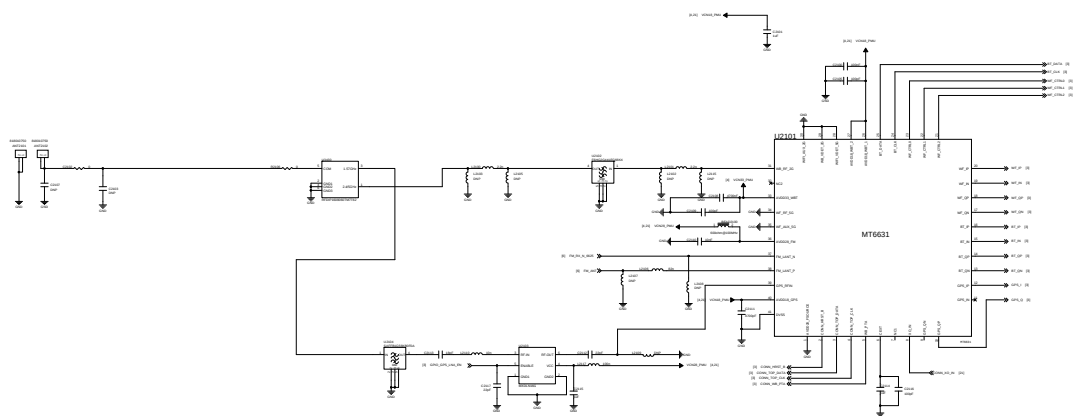

iREPAIR