


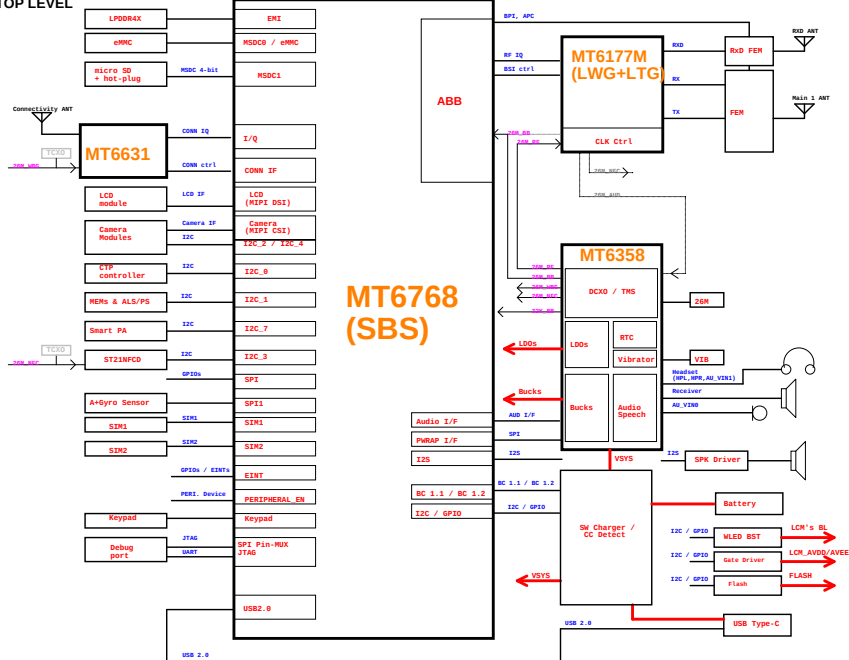

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev v1
Date: Saturday, February 15, 2020	Sheet 1 of 31	

I2C	Sub SYS	Function	Part Number	I2C Spec.	Budget Time	I2C Slave Address / Write / Read (7-bit mode)	
I2C-0	AP	Cap Touch controller	GT1151	400 Kbps	Yes.	0x0D	Write 0xBA / Read 0xBB
		LCM Gate Drive	RT4801HWSC	400 Kbps	Yes.		
		Magnetic Sensor	AK09918C	400 Kbps	Yes.	0x0C	Write 0x18 / Read 0x19
I2C-1 (3C)	AP Sensor Hub	Ambient Light Sensor	CM03558	400 Kbps	Yes.	0x01	Write 0xA2 / Read 0xA3
		Proximity Sensor					
		Pressure Sensor	BMP280	400 Kbps	Yes.	0x77	Write 0xEE / Read 0xEF
			0x0110	400 Kbps		0x1A	Write 0xA7 / Read 0xB5
I2C-2 (3C)	AP	Rear Camera	EEPROM	400 Kbps		0x50	Write 0xA7 / Read 0xA1
			AF driver	400 Kbps		0x55	Write 0x19 / Read 0x19
			EEPROM	400 Kbps		0x50	Write 0xA7 / Read 0xA8
		Dual cam (B+b) - Main1	EEPROM	400 Kbps		0x50	Write 0xA7 / Read 0xA1
			AF driver	400 Kbps		0x55	Write 0x19 / Read 0x19
I2C-3	AP	NFC	ST21NFCD	400 Kbps	Yes.	0x08	Write 0x10 / Read 0x11
		Dual cam (B+b) - Main2	EEPROM	400 Kbps		0x18	Write 0x20 / Read 0x21
			EEPROM				
			AF driver				
I2C-4 (3C)	AP	Front Camera	SSC2117	400 Kbps		0x20	Write 0xA7 / Read 0xB8
			EEPROM	400 Kbps		0x55	Write 0xA4 / Read 0xA5
I2C-5	AP	Reserved					
I2C-6	AP SSPM	Reserved					
I2C-7	AP	Audio Smart PA	MT5980	400 Kbps	Yes.	0x04	Write 0xB9 / Read 0xB9
		SW Charger	SW Charger	400 Kbps	Yes.		
		CC Detect	RT1715WSC	400 Kbps	Yes.		
		Flash LED 5V Boost	RT4505	400 Kbps	Yes.		


Note : I2C Spec : Standard mode (100 kbps) and Fast mode (400 kbps), Fast mode Plus (1 Mbps) and High-speed mode (3.4 Mbps)

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020 Sheet 2 of 31		


Date	Category	Item
2018.12.14 (V0.1)	Page 04	V0.1 Release
2019.01.11 (V0.2)	Page 12	Add CAM_PDN3(GPIO110) HW pin for Note 12-4: HW pin for DDR type feature in bootstrap Delete R1007 and R1012 ext. pull for LP4X eMCP
	Page 13	Add CAM_PDN3(GPIO110)'s Note : No ext. pull for DDR type feature in bootstrap
	Page 69	Add CAM_PDN3(GPIO110)'s Note : No ext. pull for DDR type feature in bootstrap
	Page 21	Add C2106 for VBIF28 cap
	Page 22	Delete R2202

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size C	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020		Sheet 3 of 31

Note 10-1:	Differential pair of DVD0_GPU remote sense must be close to BB's ball. Remote sense trace with GND shielding to PMIC (Differential)
Note 10-2:	Differential pair of DVD0_PROC remote sense must be close to BB's ball. Remote sense trace with GND shielding to PMIC (Differential)
Note 10-3:	Differential pair of DVD0_MODEM remote sense must be close to BB's ball. Remote sense trace with GND shielding to PMIC (Differential)
Note 10-4:	Differential pair of DVD0_CORE remote sense must be close to BB's ball. Remote sense trace with GND shielding to PMIC (Differential)

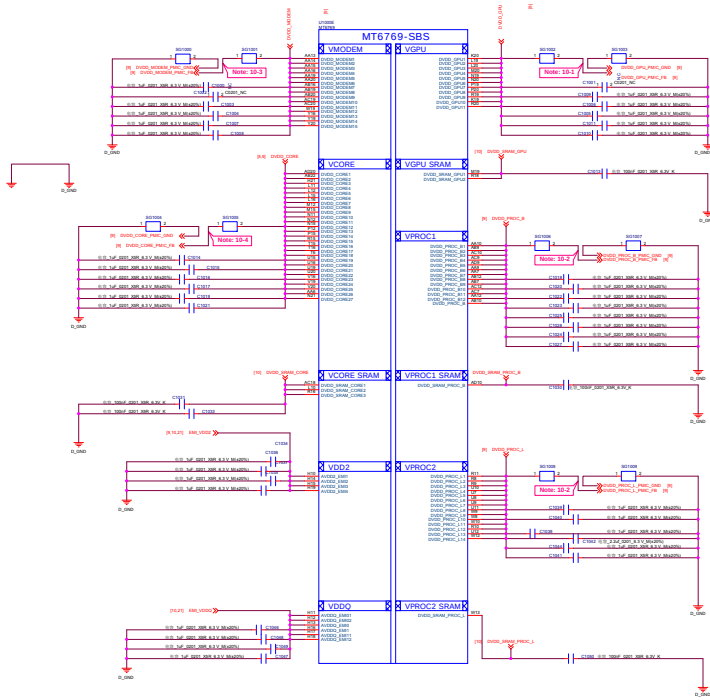

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 01_Block_Diagram			
Size D	Project J19_MB_V1		Rev v1
Date: Saturday, February 15, 2025 Sheet 4 of 31			

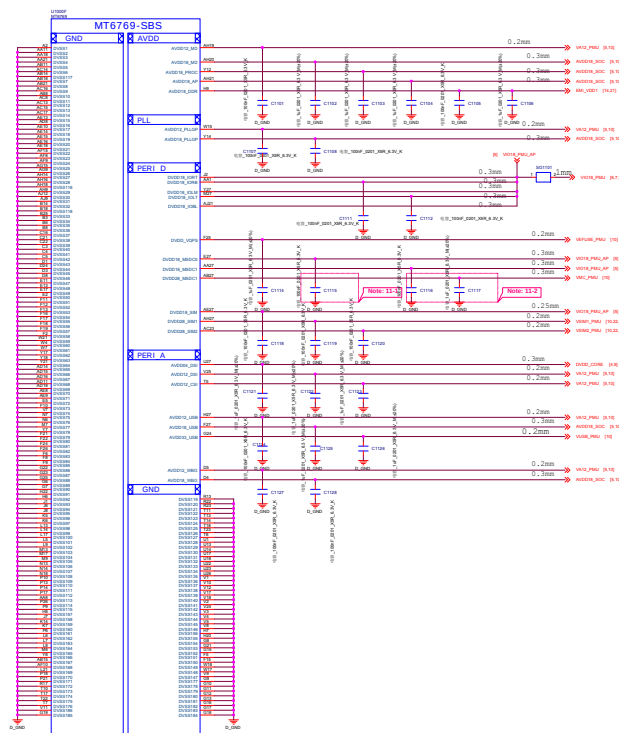


Schematic design notice of "11_BB_POWER_IO" page:

Note 11-1: C1115 closed DVDD18_MSDC0 150mil

Note 11-2: C1116 closed DVDD18_MSDC1 150mil
C1117 closed DVDD18_MSDC1 150mil

AVDD12: 单个点走8mil, 两路分支各16mil, 总路程20mil
VDD18_PWD_AP: 总路程40mil
AVDD18_SOC: 总路程20mil

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title		01_Block_Diagram	
Size	Project	J19_MB_V1	Rev
D			V1
Date:	Saturday, February 15, 2020	Sheet	5 of 31

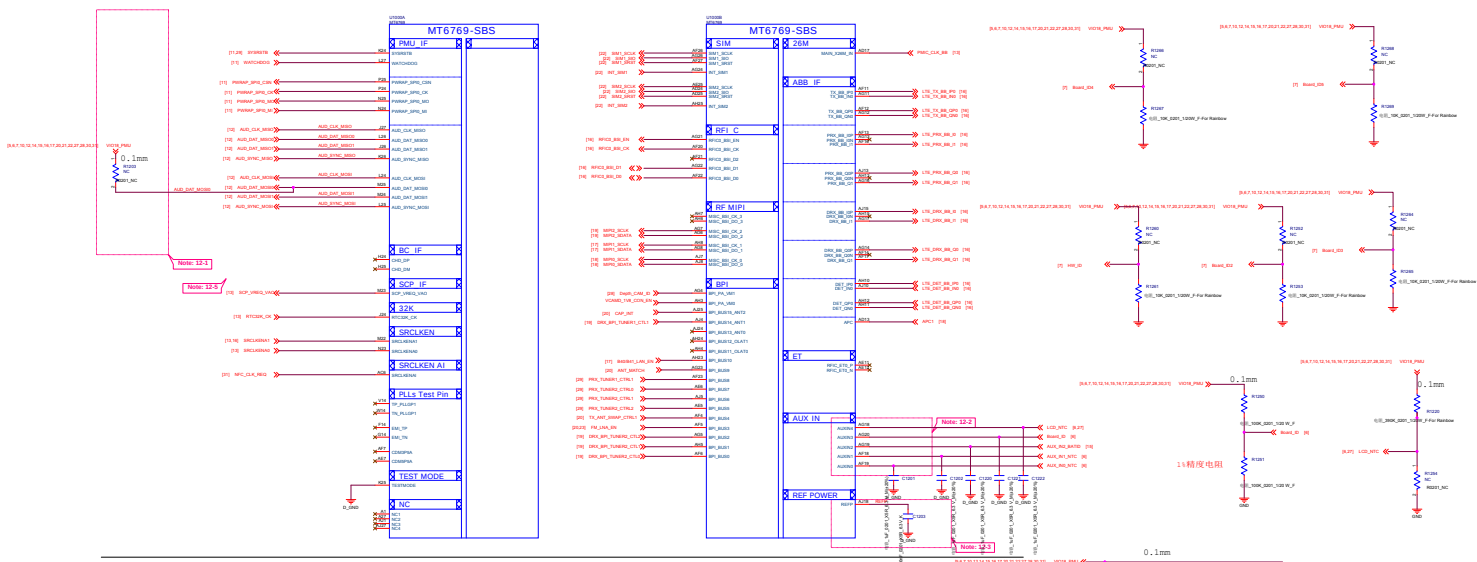

Schematic design notice of "12_BB_1" page:

Note 12-1: PWRAP_SPI0_CSN and "AUD_DAT_MOSIO" are bootstrap pins to select which interface will be the JTAG pin out

PWRAP_SPI0_CSN	AUD_DAT_MOSIO	AP JTAG	JTAG Function
HI	LO	AP JTAG	MD JTAG
LO	HI	SPI0 + EN18	SPI0 + SPI3
LO	LO	SPI0 + EN18	SPI0 + SPI3
LO	HI	SPI0 + EN18	SPI0 + SPI3

Note 12-2: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX ADC input to GND.

Note 12-3: The de-coupling cap. for REFP (AJ18 ball) have to be placed as close to BB as possible.

Note 12-4: HW pin for DDR type feature in bootstrap (refer to BB HW design Notice)

AUX_SYNC_MISO	AUX_CLK_MISO	CAM_PDN3	PMIC 6556 voltage	DDR Type
default=PD	default=PD	default=PD	VRAM1 / VRAM2	DDR
No ext. pull	No ext. pull	No ext. pull	1.25V / 0.8V	LP4X eMMC
No ext. pull	12K pull to VDD18	No ext. pull	0.8V / 1.0V	LP4X eMMC
12K pull to VDD18	No ext. pull	No ext. pull	1.25V / 0.8V	LP4X eMMC
12K pull to VDD18	12K pull to VDD18	No ext. pull	1.25V / 1.0V	LP4X eMMC

Note 12-5: Charger must have D+/D- pin for charger type USB detection.

Charger must have at least 500mA USB current for all charger type.

Thermistor to sense RF PA temperature

Thermistor to sense AP temperature



1. B120T must keep a distance about 5-6 mm between RF and AP from other thermal sensor to avoid heat transfer.
2. The distance in the thermal sensor from package edge to edge.

华勤通讯 Huaqin Telecom Technology Com., Ltd


Title 01_Block_Diagram


Size D Project J19_MB_V1 Rev v1

Date: Saturday, February 15, 2020 Sheet 6 of 31

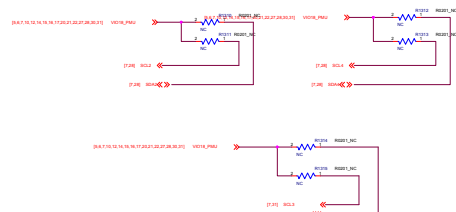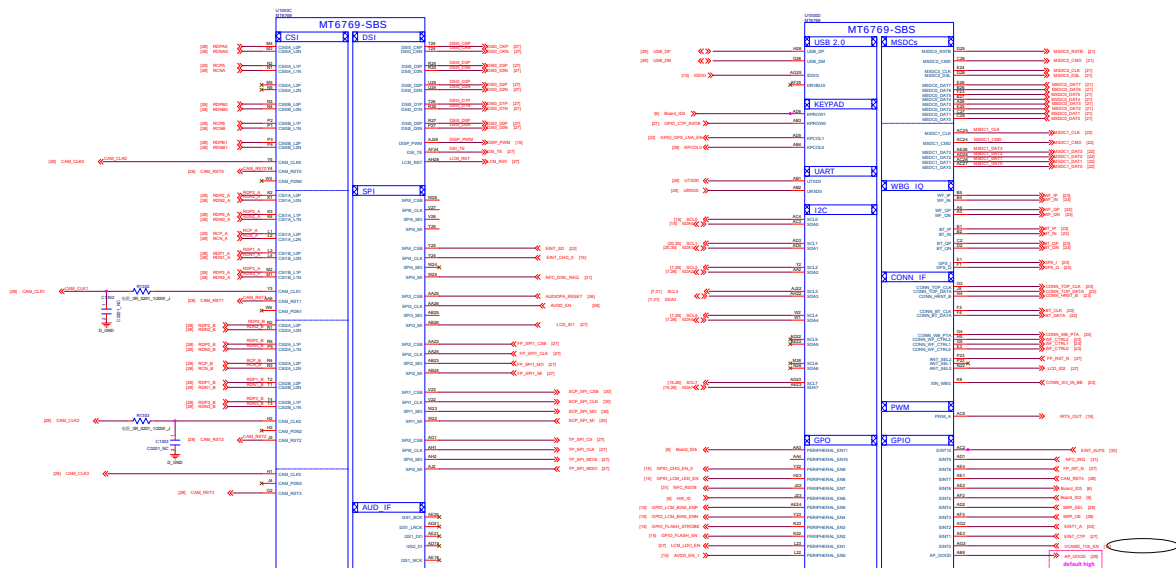


华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 01_Block_Diagram			
Size D	Project J19_MB_V1	Rev V1	
Date: Thursday, March 05, 2020	Sheet 7	of 31	



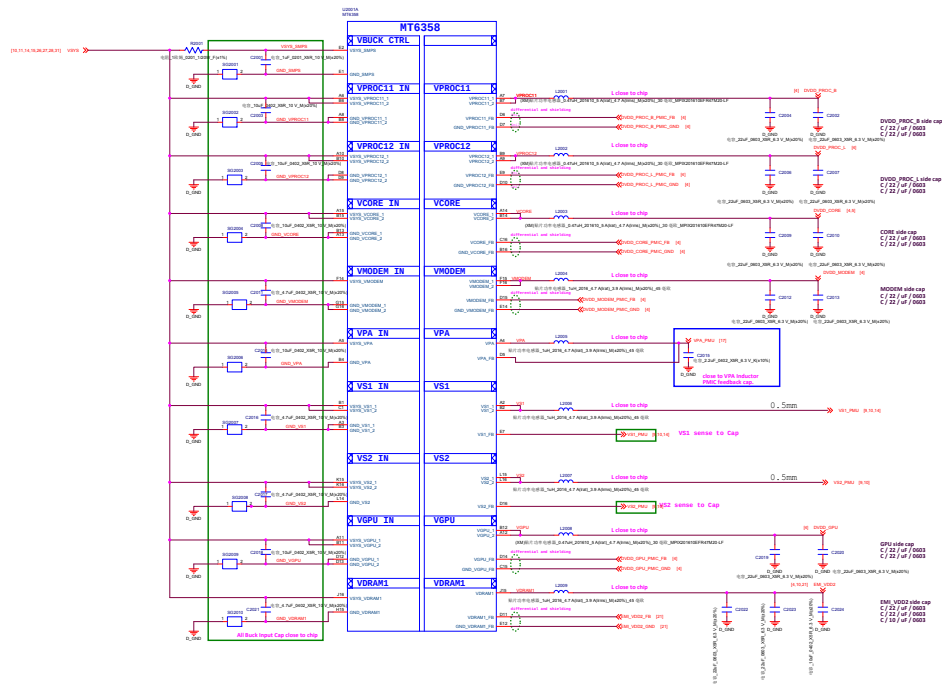

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020 Sheet 9 of 31		

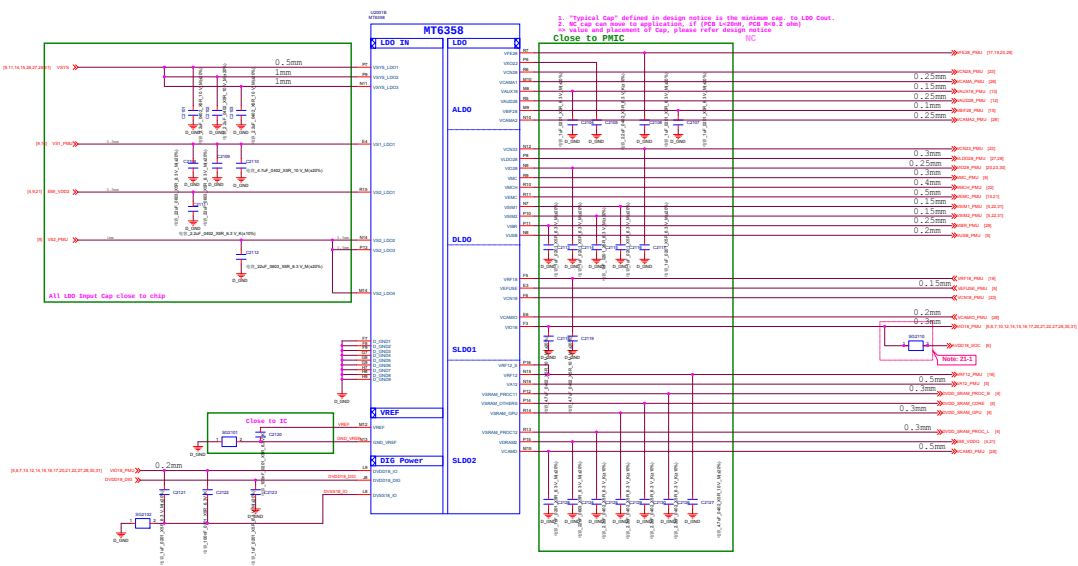


Schematic design notice of "21_POWER_MT6358-LDO" page.


Note Z1-1: Please set SQ2110 close to C2118, making star connection between VIO18_PMU and AVDD18_SOC near to LDO cap. C2118
 Please also refer to MT6358 design notice for further detail design information


Note Z1-2: If these power trace can meet LDO layout constraint, these CAP can be NC or removed.
 Please refer to MT6358 design notice.

Note Z1-3

华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020	Sheet 10 of 31	

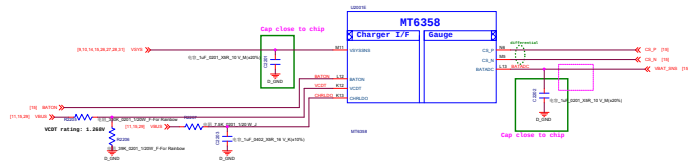


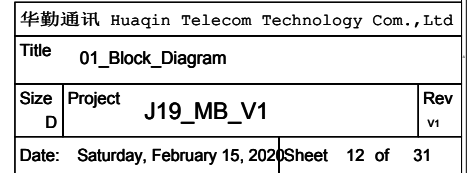

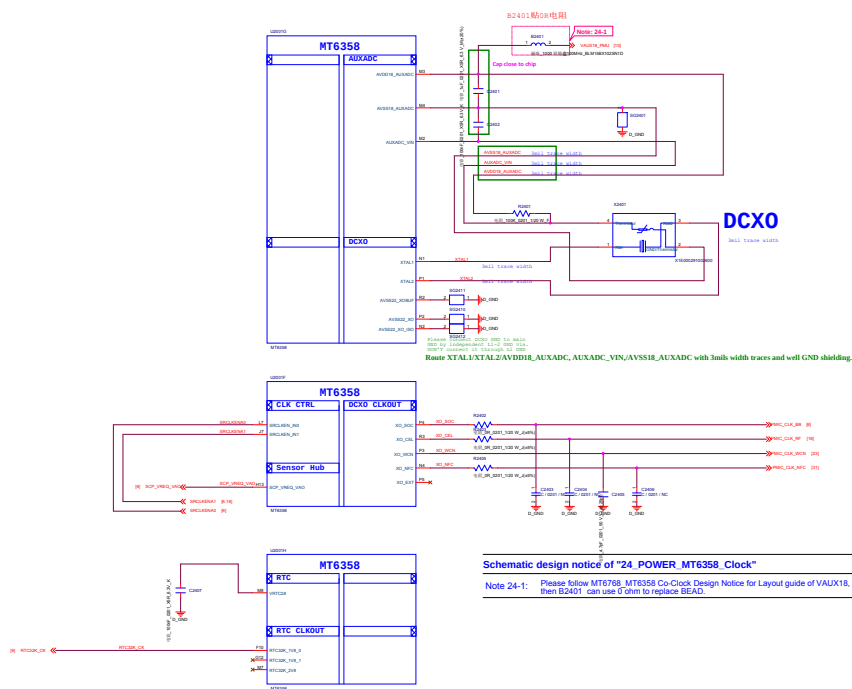


华勤通讯 Huaqin Telecom Technology Com., Ltd			
Title		01_Block_Diagram	
Size	Project	J19_MB_V1	Rev
D			V1
Date:	Saturday, February 15, 2020	Sheet 13 of 31	


LDO for Dual Camera (VCAMA_EXT) 2.8V




LDO for Depth Camera (VCAMD_EXT1) 1.58V




LDO for Dual Camera (VCAMA_EXT2) 2.8V




Ext. EMI_VDD1 for LPDDR4X VDD1




Flash LED 5V Boost

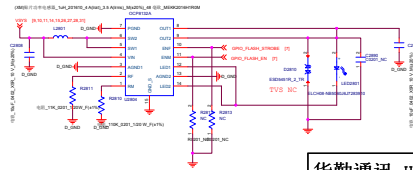

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020 Sheet 14 of 31		

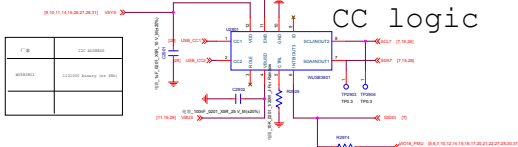


BATTERY CONNECTOR

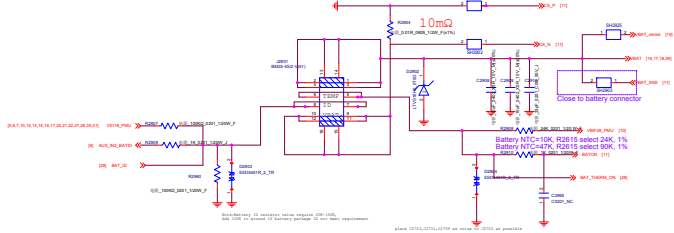


Schematic design notice of "29_EXT_WLED+DB+FL+CHG+PD" page.

Note 29-1: For better ESD or surge performance we need choose suitable device for system protection. Please refer to [Surge device selection guide V2.0] provide by MTK.


SW Charger

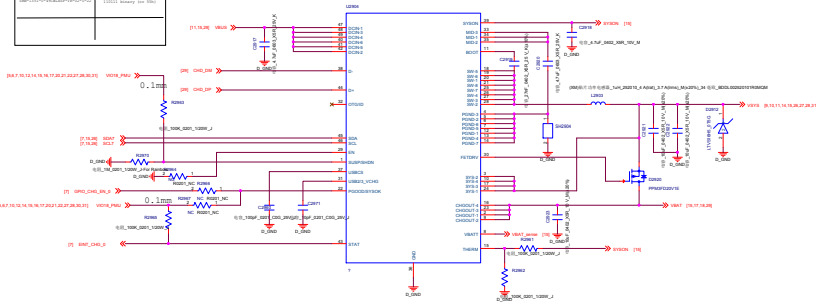

LCM Backlight LED Driver

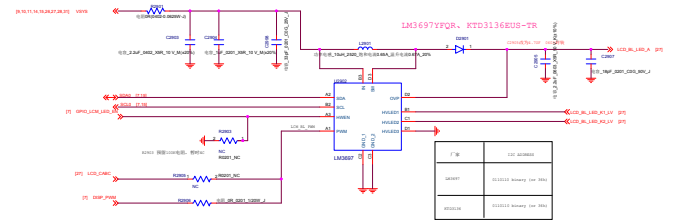

LCM Bias

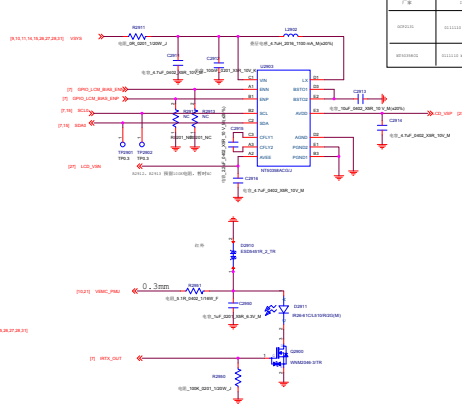

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 01_Block_Diagram


Size D Project J19_MB_V1

Rev V1


Date: Saturday, February 15, 2020 Sheet 15 of 31

Attenuator for Detector


Transceiver

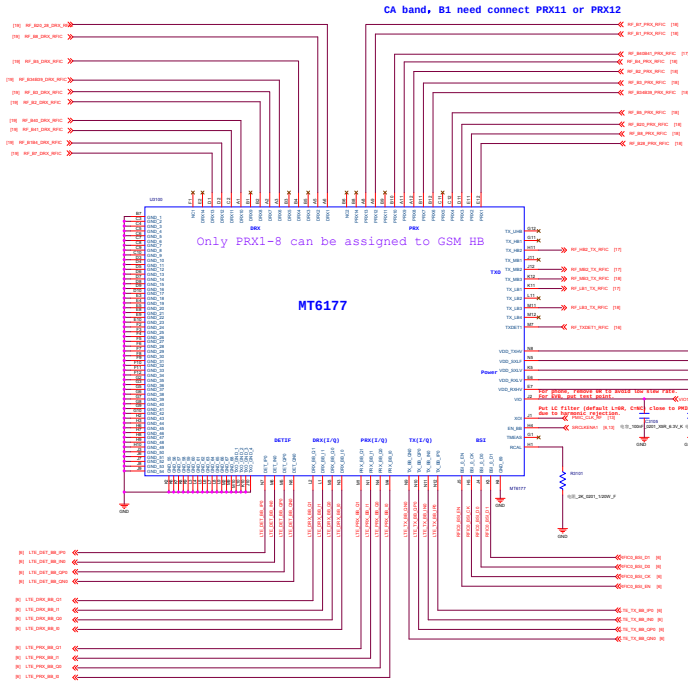


The linear detection range is 0-30dBm, coupling factor is 30-35dB.




Power For MT6177



GND




华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 31_RF_MT6177_Pin_Out		
Size D	Project J19_MB_V1	Rev v1
Date: Saturday, February 15, 2020		Sheet 16 of 31

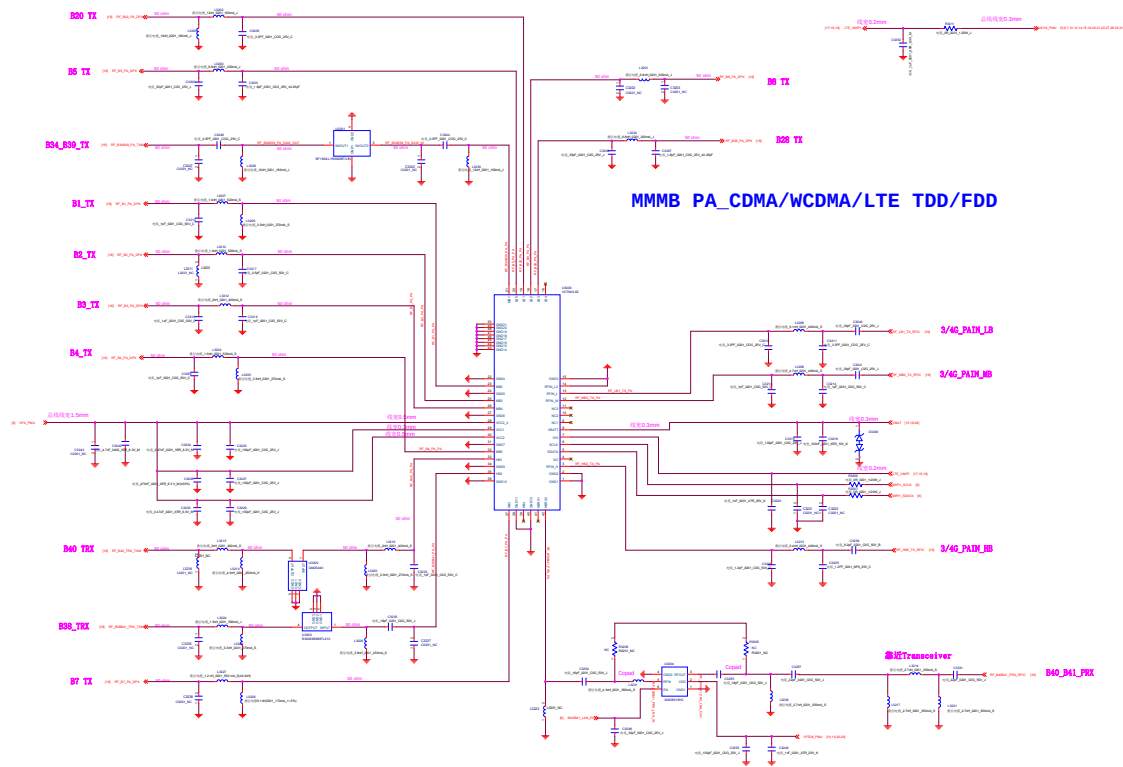





华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 32_RF_MT6177_RF_TX		
Size E	Project J19_MB_V1	Rev v1
Date: Saturday, February 15, 2020		Sheet 17 of 31

MAIN_ANT

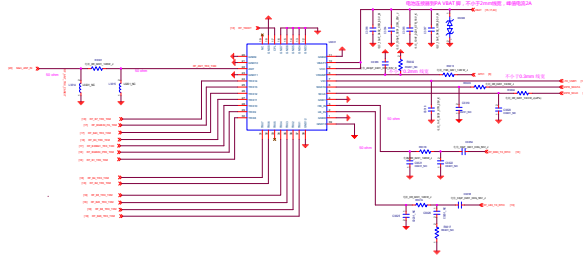


TXM_GSM





TRX_LB

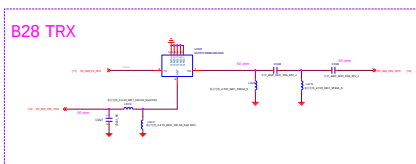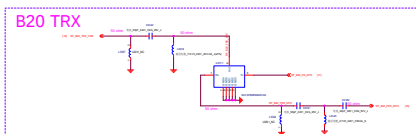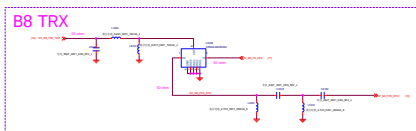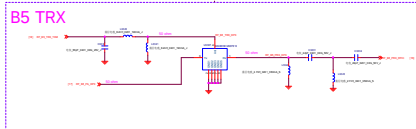

TRX_HB

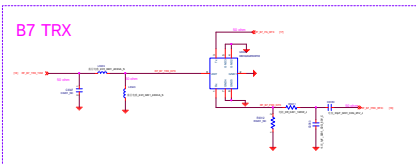


TRX_MB

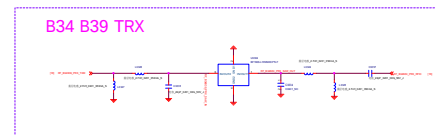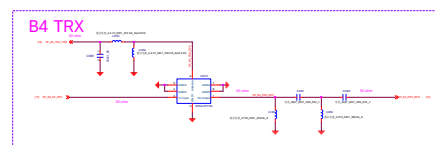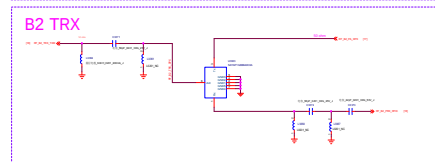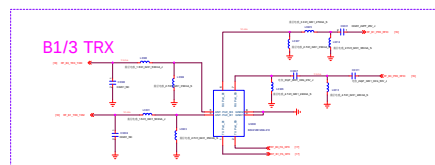


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 33_RF_MT6177_RF_PRX		
Size	Project	Rev
Custom	J19_MB_V1	V1
Date: Thursday, March 05, 2020	Sheet 18 of	31


DIV_ANT

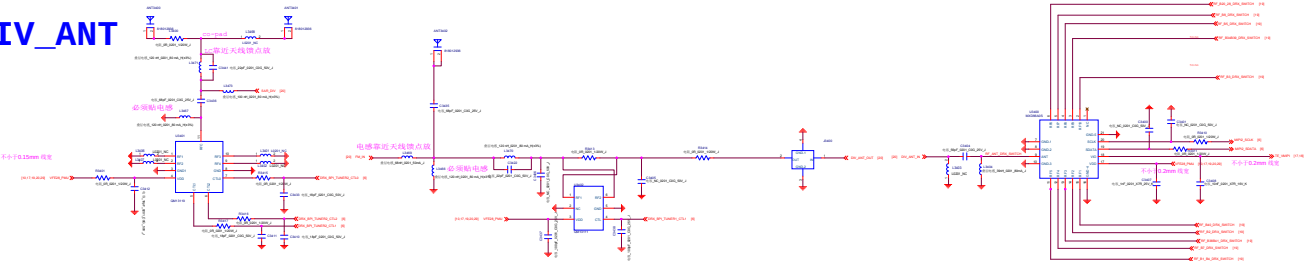


DIV_LB

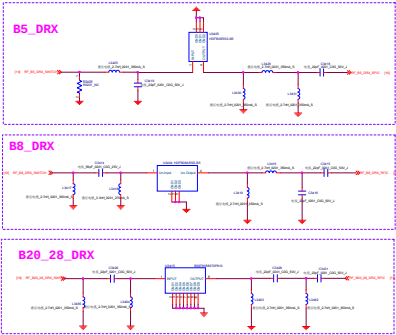

DIV_HB

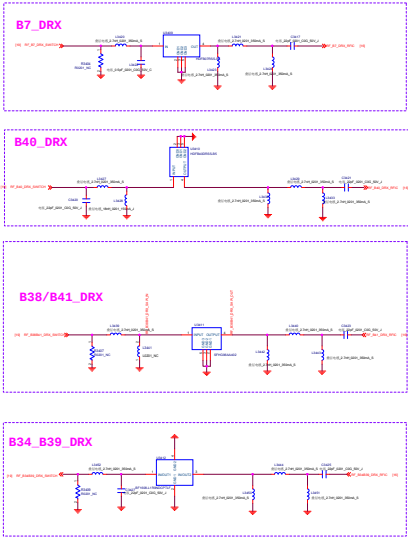


DIV_MB

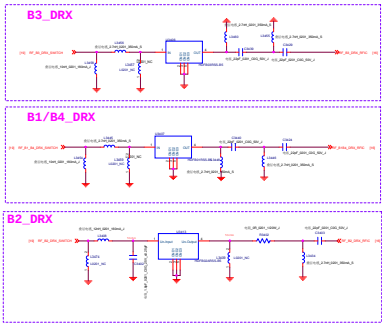


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 34_RF_MT6177_RF_DRX		
Size E	Project J19_MB_V1	Rev v1
Date: Saturday, February 15, 2025Sheet 19 of 31		


空口检测




DPDT

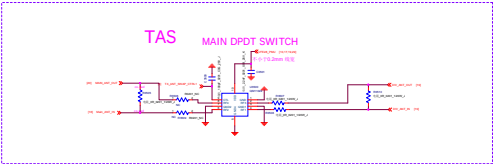


SAR Sensor

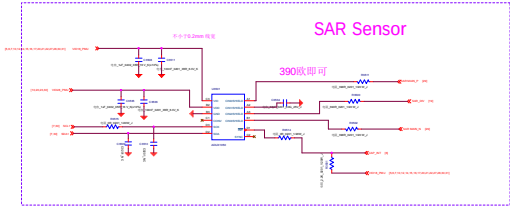


FM

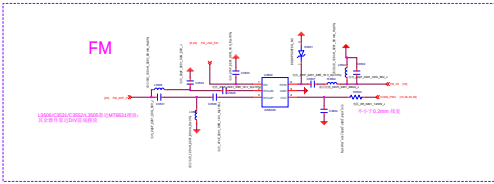

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title		35_DPDT	
Size	Project	J19_MB_V1	Rev
Ad			vi
Date: Wednesday, March 04, 2020		Sheet	20 of 31

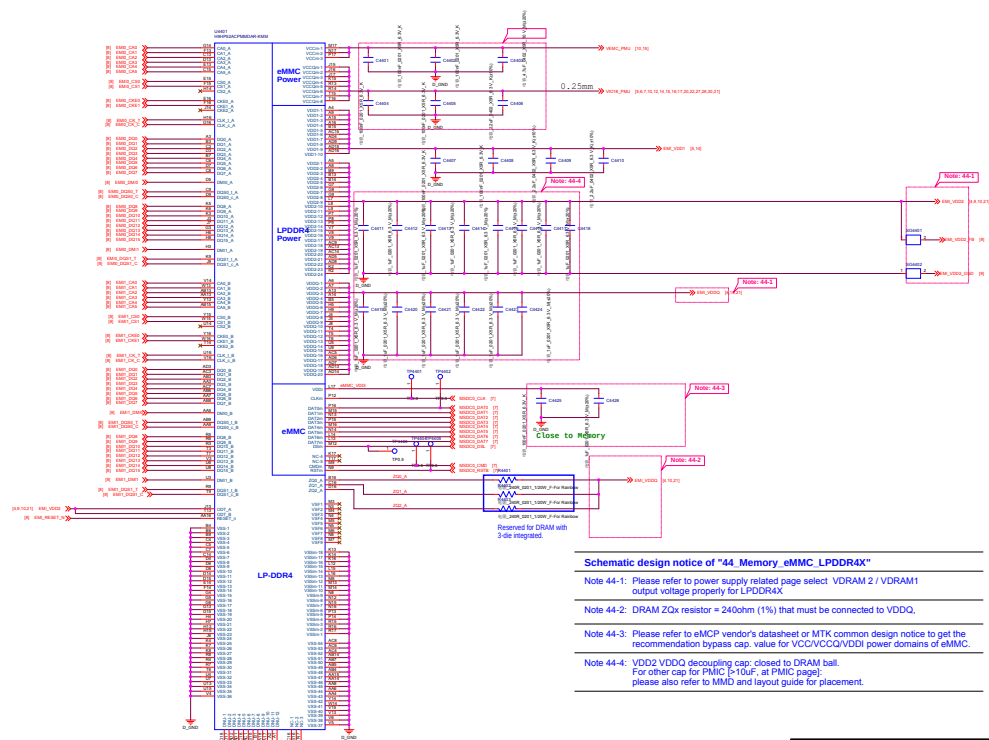

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020 Sheet 21 of 31		

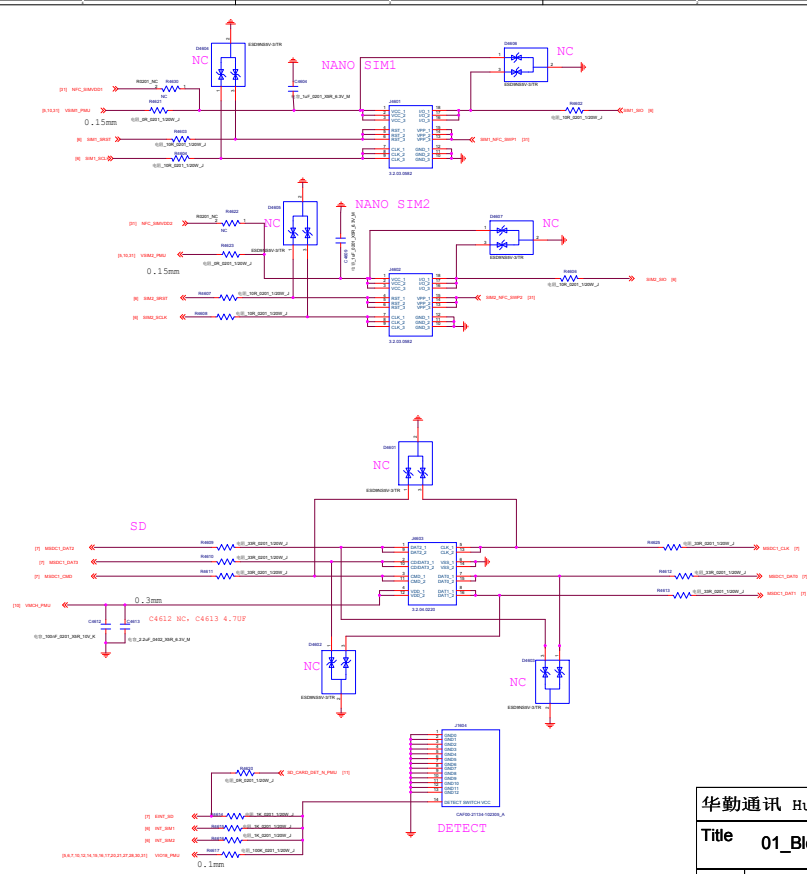


Note 46-1:

[Schematic design notice of "46_MEMORY_SD Card" page.](#)

For better ESD performance, please select suitable components for system protection.

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020		Sheet 22 of 31

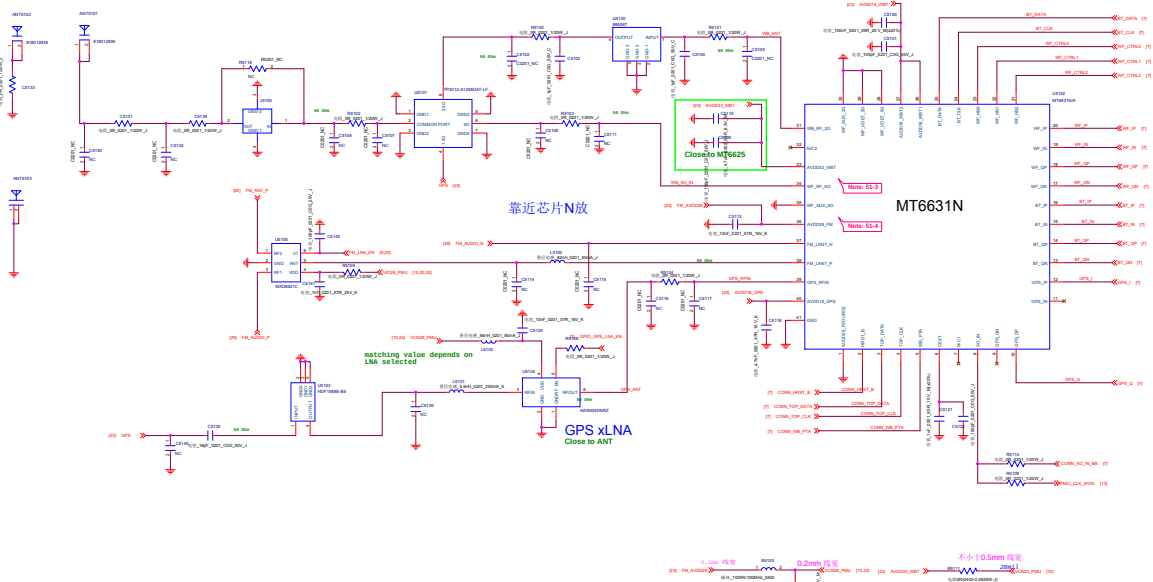


Schematic design notice of "51_CONNECTIVITY_CONSYS_MT6631"

Note 51-1: For RS015 size, please select 0402 size or larger one

Note 51-2: Please refer to MT6785 Baseband design notice for VCN33 LDO selection guide


Note 51-3: If WFI 5G not support, connect pin 34(WF_RF_SG) to GND

Note 51-4: Pin 36 (AVDD28_FM) must be connected to VCN28 even if FM not support

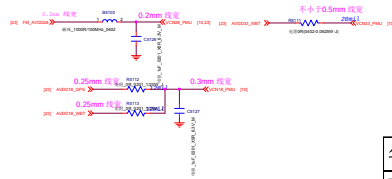

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 51_CONNECTIVITY_CONSYS_MT6631		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020	Sheet 23 of 31	

Earphone Microphone

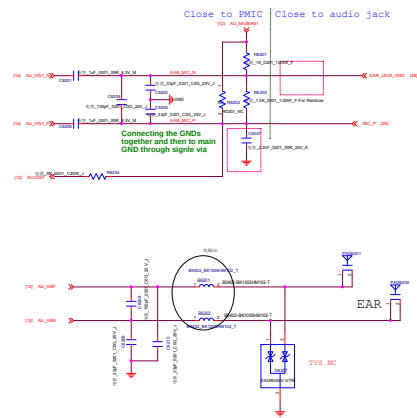

Schematic design notice of "62_PERI_AUDIO_IO" page.


Note 62-1: Part # of BEAD6202, BEAD6203, BEAD6204 and BEAD6205 needs changed to "BLM18BD102SN1" for high THD performance (-90dB) but this BOM change will results in FM RSSI 10dB degraded .

Note 62-2: Reserved Cap for CS/RS test, please double check multi-key function when used

Note 62-3:

	Employee JACK	Employee JACK
	9 Main Board	9 Sub Board
	0 adm	100hr



华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 01_Block_Diagram			
Size D	Project J19_MB_V1		Rev v1
Date: Saturday, February 15, 2020		Sheet 24 of 31	

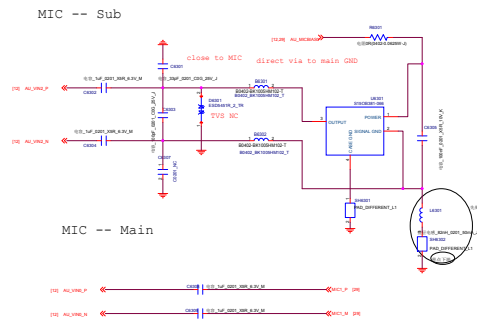


Schematic design notice of "63_PERI_AUDIO_IO" page.

Note 63-1: 1 uF for ACC mode

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020	Sheet 25 of 31	

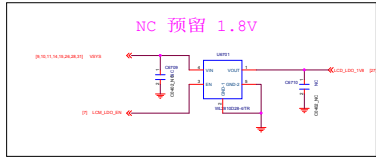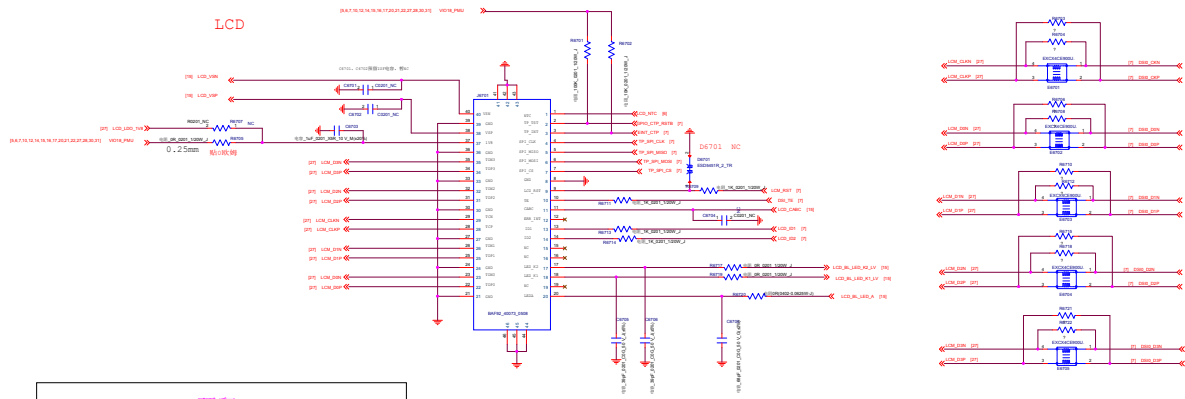

CAP tolerance above 50V!!!

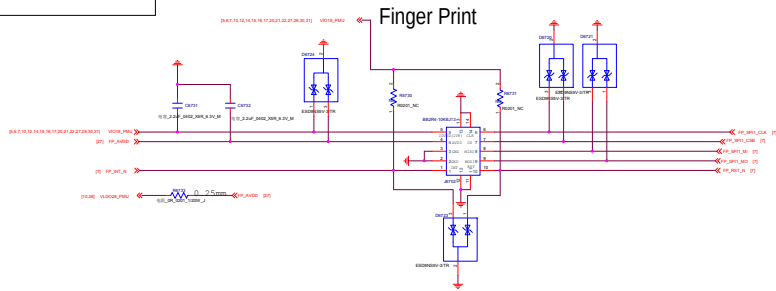

LCD-BACKLIGHT

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020 Sheet 27 of 31		

The schematic diagram illustrates the internal circuitry of the ADXL345 breakout board. The central component is the ADXL345 digital accelerometer. The board is powered by a 5V supply, which is connected to the VDDA pin (pin 1) and the GND pin (pin 2). A 10k pull-up resistor is connected between the 5V supply and the SDA (pin 14) and SCL (pin 15) pins. The I2C interface is shown with SDA (pin 14) and SCL (pin 15) connected to a 10k pull-up resistor to 5V. The board also features a 3.3V regulator, a 10k pull-up for CS, and a 10k pull-up for the I2C lines. The output pins are labeled: VDDA (pin 1), GND (pin 2), SDA (pin 14), SCL (pin 15), CS (pin 16), and VDDIO (pin 17). The board is labeled 'ADXL345' and '0.25mm'.

Inputs			Outputs	
SLA_2015	SLA_2016	WELLCH	SLA_2015	SLA_2016
1	1	0	1	1
2	2	1.5	2	2
3	3	3	3	3
4	4	4.5	4	4






[illegible]

HE	HE	Function
0	0	0: copies high impedance
0	1	1: $\text{copy}(\text{HE}) \rightarrow \text{copy}(\text{HE})$
1	0	2: $\text{copy}(\text{HE}) \rightarrow \text{copy}(\text{HE})$
1	1	3: $\text{copy}(\text{HE}) \rightarrow \text{copy}(\text{HE})$

[illegible]

DVDD 1.2V


Figure 1 is a schematic diagram of a 16-to-1 multiplexer. The diagram shows a central multiplexer block with 16 data inputs (D0-D15) and 4 select inputs (S0-S3). The inputs are connected to the multiplexer block. The outputs are labeled with their corresponding data inputs. A 0.2mm scale bar is shown at the bottom right.

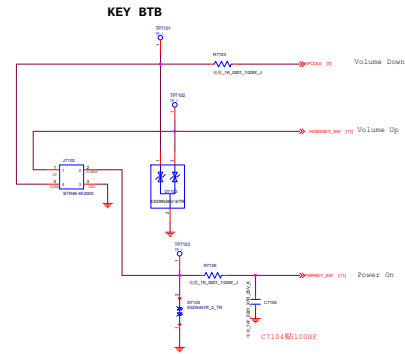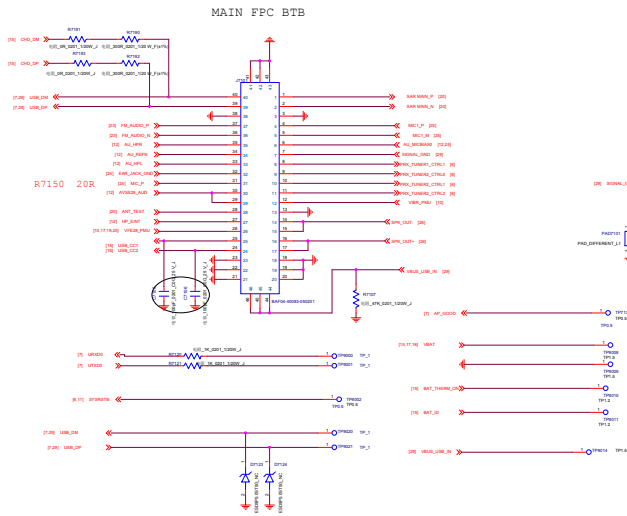

USB


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Saturday, February 15, 2020 Sheet 29 of 31		

M-Sensor

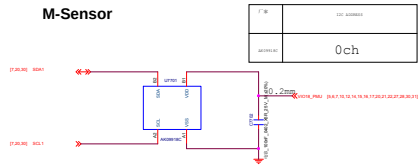


U1	LM324
U2	0ch

ALS PS STK3337-X

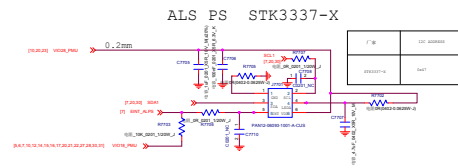

U1	LM324
U2	0ch

A sensor

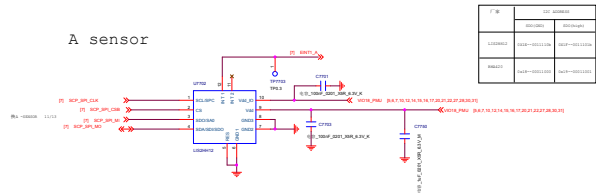

U1	LM324
U2	0ch

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J19_MB_V1	Rev V1
Date: Wednesday, March 04, 2020 Sheet 30 of 31		

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 01_Block_Diagram			
Size D	Project J19_MB_V1		Rev v1
Date: Saturday, February 15, 2025	Sheet	31 of	31