
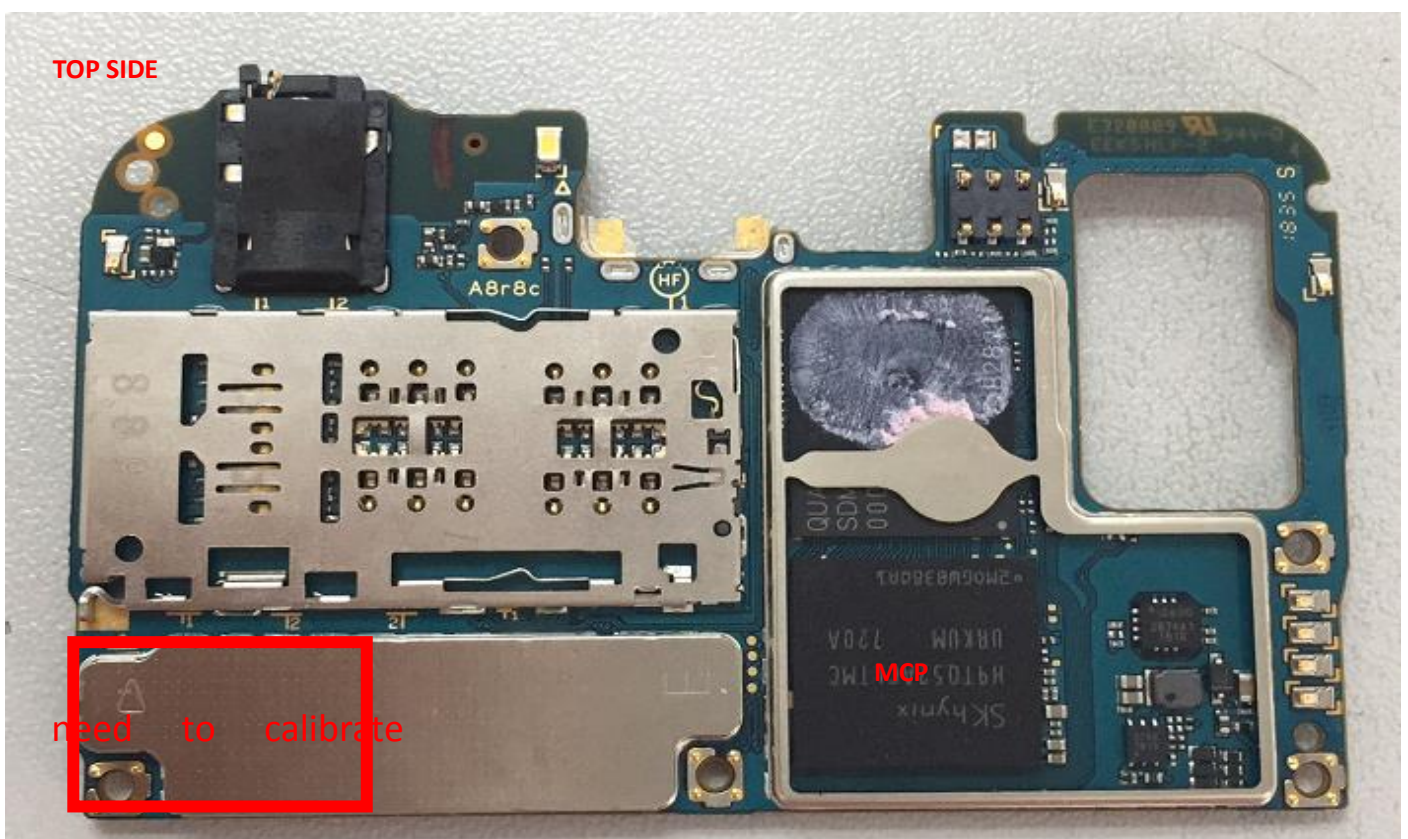


ASUS ZB633KL_RF (WW) Trouble Shooting Guide

1.RF Areas

The need to calibrate the range is as follows: “phone2G/3G/4G”、“MCP”

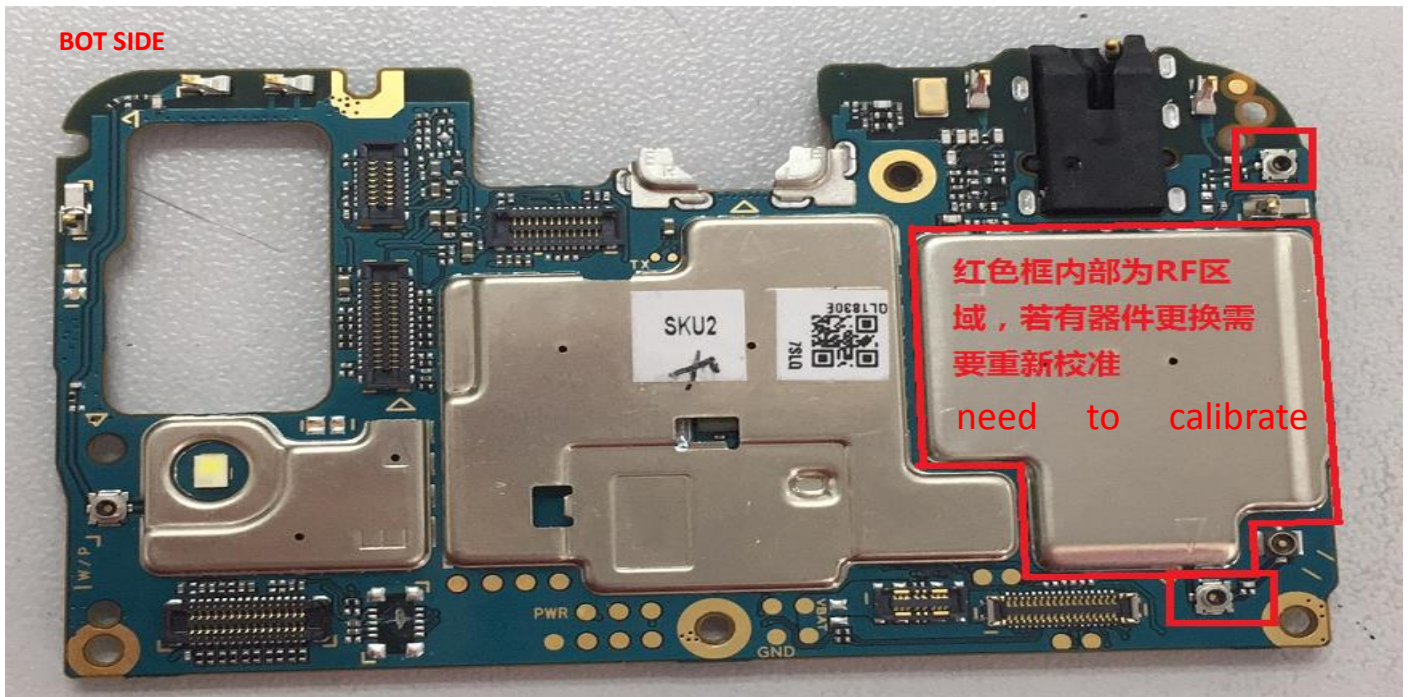

***Supported 2G/3G/4GBands for ZQL1830:**

GSM850/900/1800/1900 , WCDMA850/900/2100


TDD-LTE B40, FDD-LTE B1/3/5/7/8/20

2.GSM(2G)/WCDMA(3G)/LTE(4G) RF


2.1 Circuit diagram

Product Spec	
Processor	Snapdragon™ 600 series processor and LTE modem, 64-bit, quad high-performance cores targeting 1.8048 GHz, ARM v-8
Modem	GSM/GPRS/EDGE; WCDMA/HSPA+/DC-HSPA+; TD-SCDMA; CDMA 2000; FDD-LTE; TD-LTE
Peak Data Rate	636/660: DC-HSPA+ (DL/UL): 42/5.76 Mbps; LTE 3CA CAT12/CAT13(DL/UL): 600/150 Mbps; LTE 2CA Cat13/CAT5 (DL/UL): 400/75 Mbps (above different by SKU)
RF Band Support	TW SKU: GSM 850/900/1800/1900 WCDMA 1/2/3/5/6/8/19 FDD 1/2/3/5/7/8/18/19/28 TDD 38/39/41(2545 ~2655MHz)
	WW SKU: GSM 850/900/1800/1900 WCDMA 1/5/8 FDD 1/3/5/7/8/20 TDD 40


RF Main SET 2/3/4G:

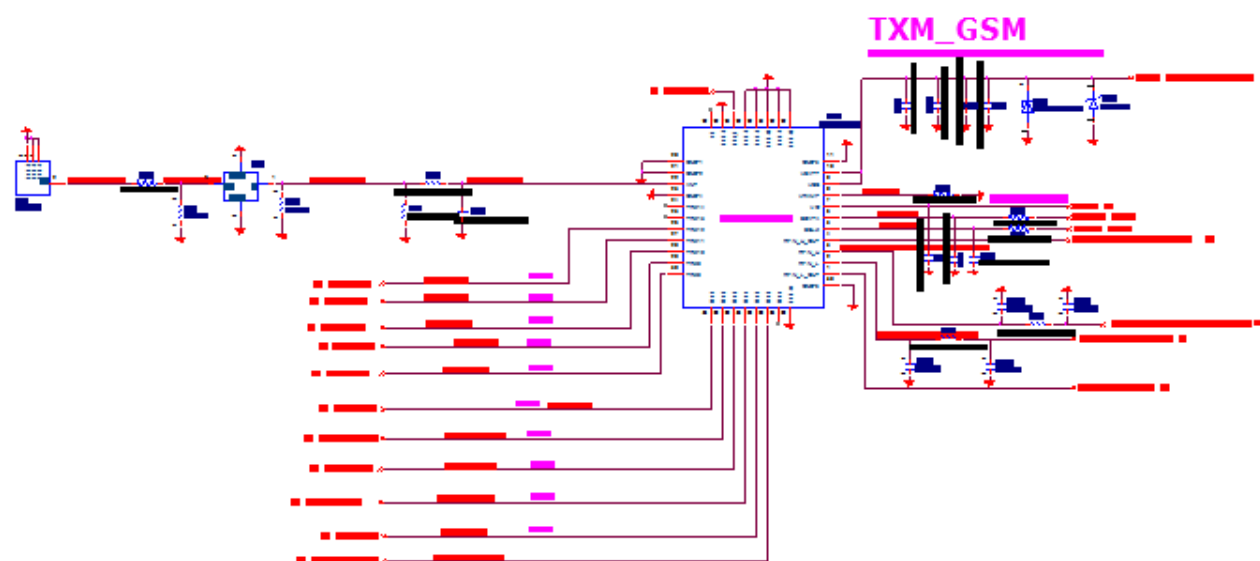


GSM:

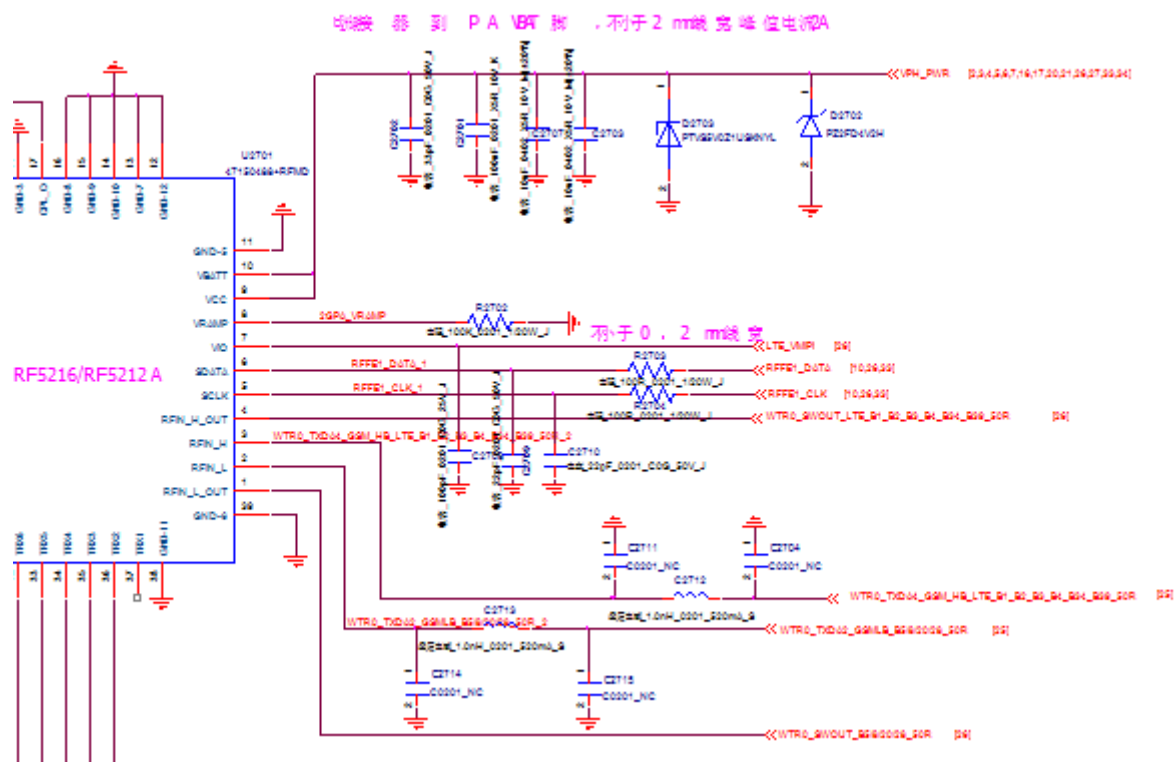


WCDMA+LTE PA:

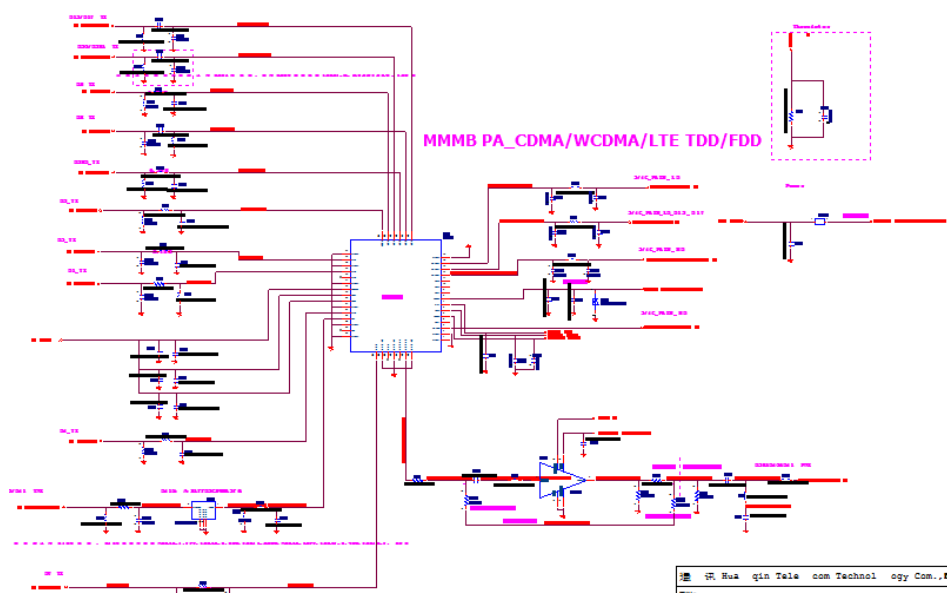

B1Duplexer:

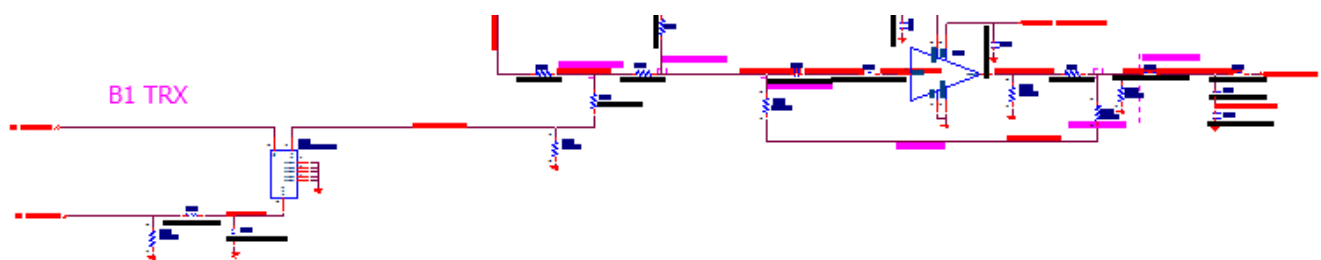


B3 Duplexer:

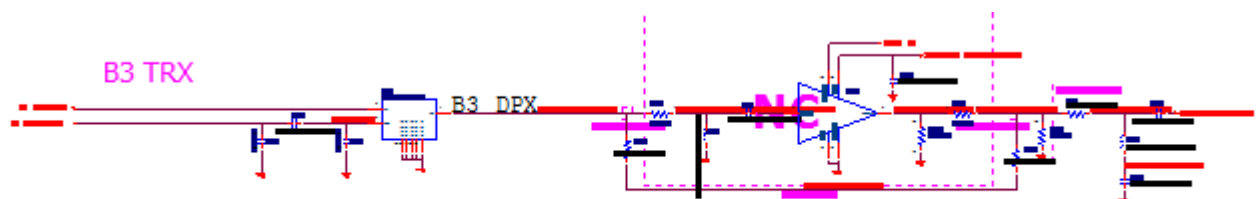


B5 Duplexer:

B5 TRX

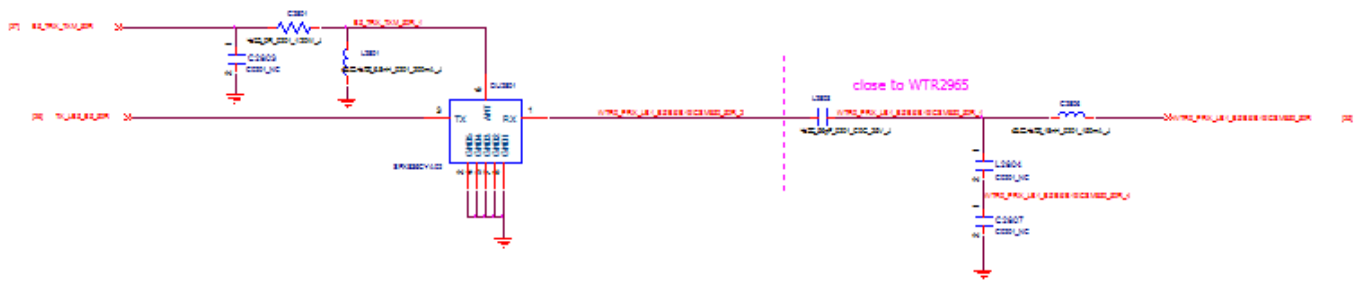

B7 Duplexer:

B7 TRX

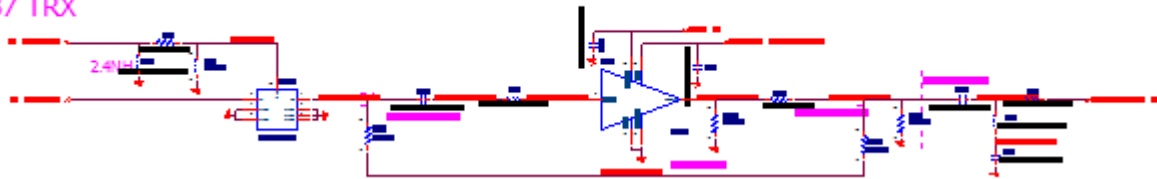


B8 Duplexer:

B8 TRX




B20 Duplexer:

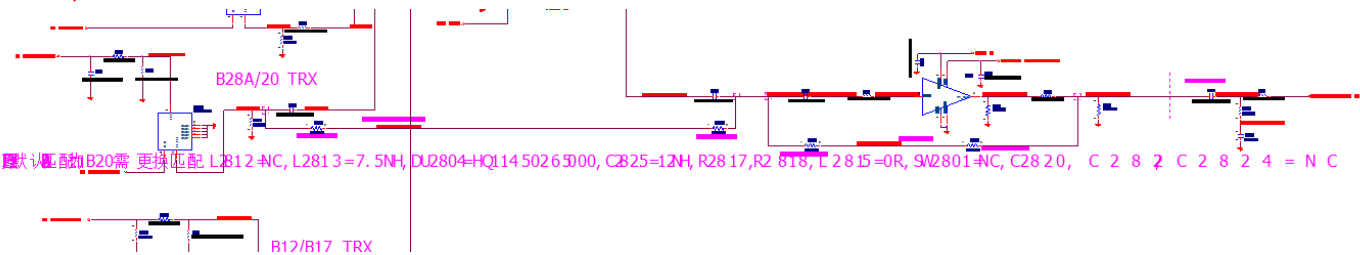


默认匹配为B20需 更换匹配 L2812=NC, L2813=7.5N1H, DU2801=HQ114 50265000, C2825=12N1H, R2817, R2818, L2815=0R, SW2801=NC, C2820, C2822, C2824=NC

B40 TRX SAW:

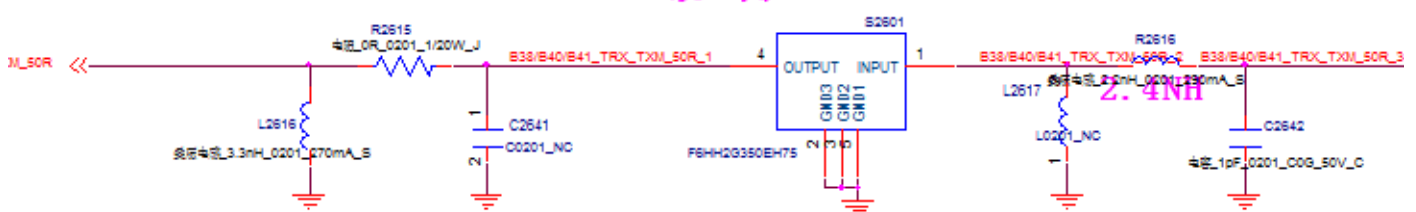


DRX RF SET:


B8 SAW:

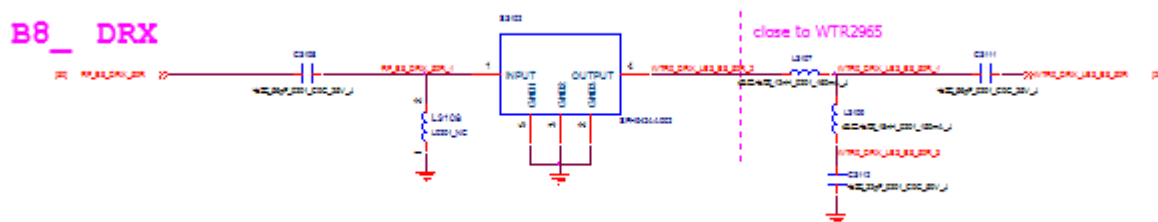


B20 SAW:

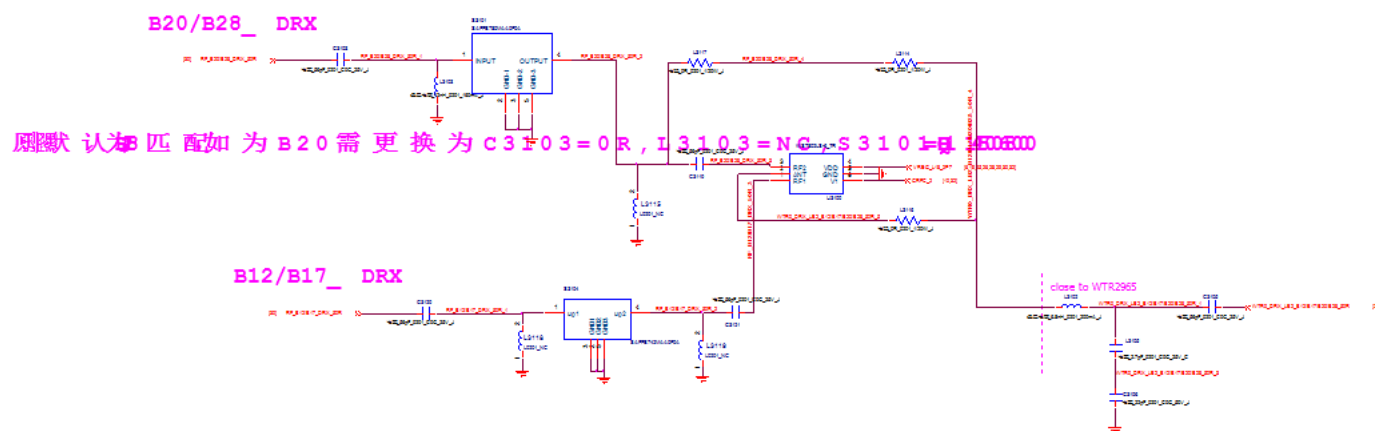

B40 SAW:

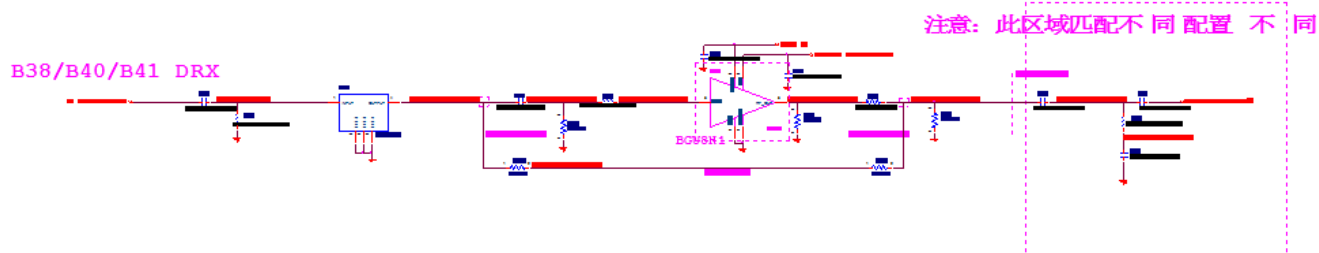


2.2RF Block Diagram:2G/3G/4G(GSM&WCDMA<E)System

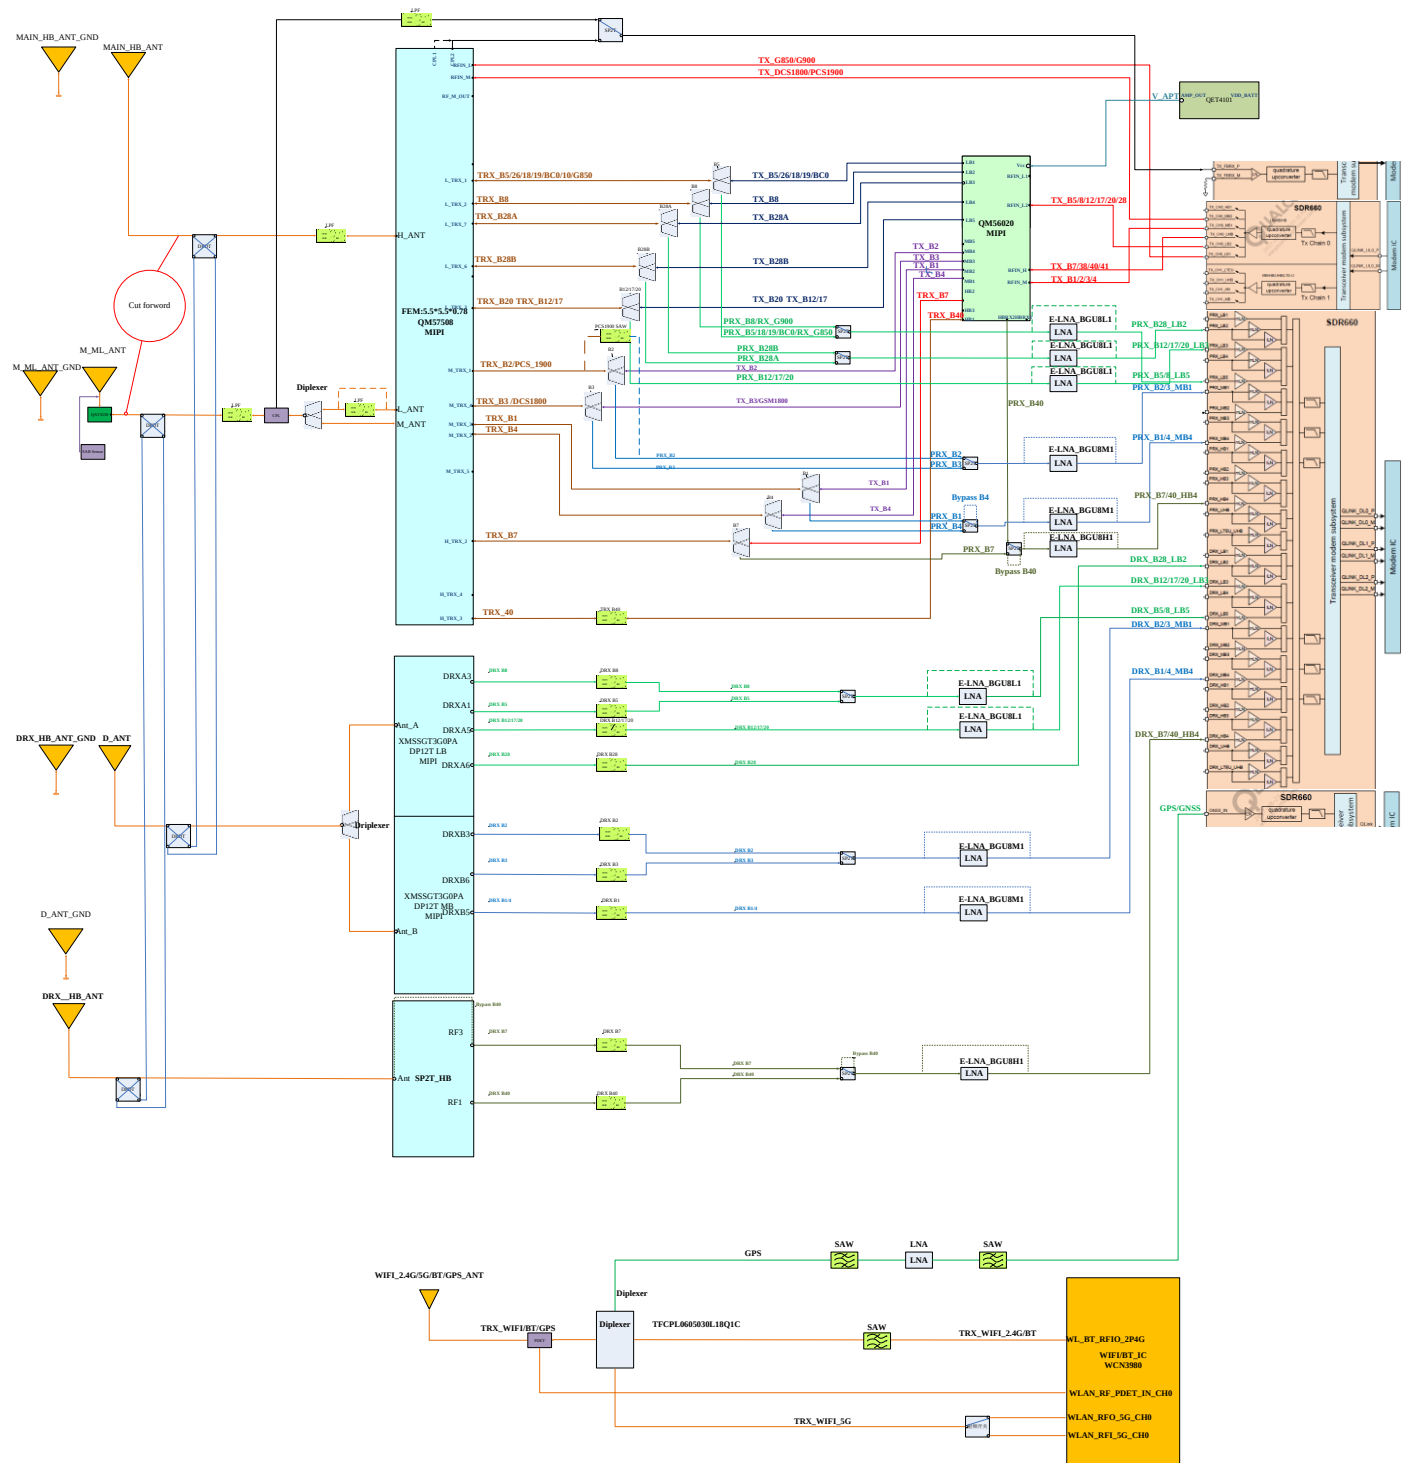


2.3 Key Components

编号	位号	物料描述
1	U2602	PA
2	U2701	FEM
3	S2903	B1 双工器

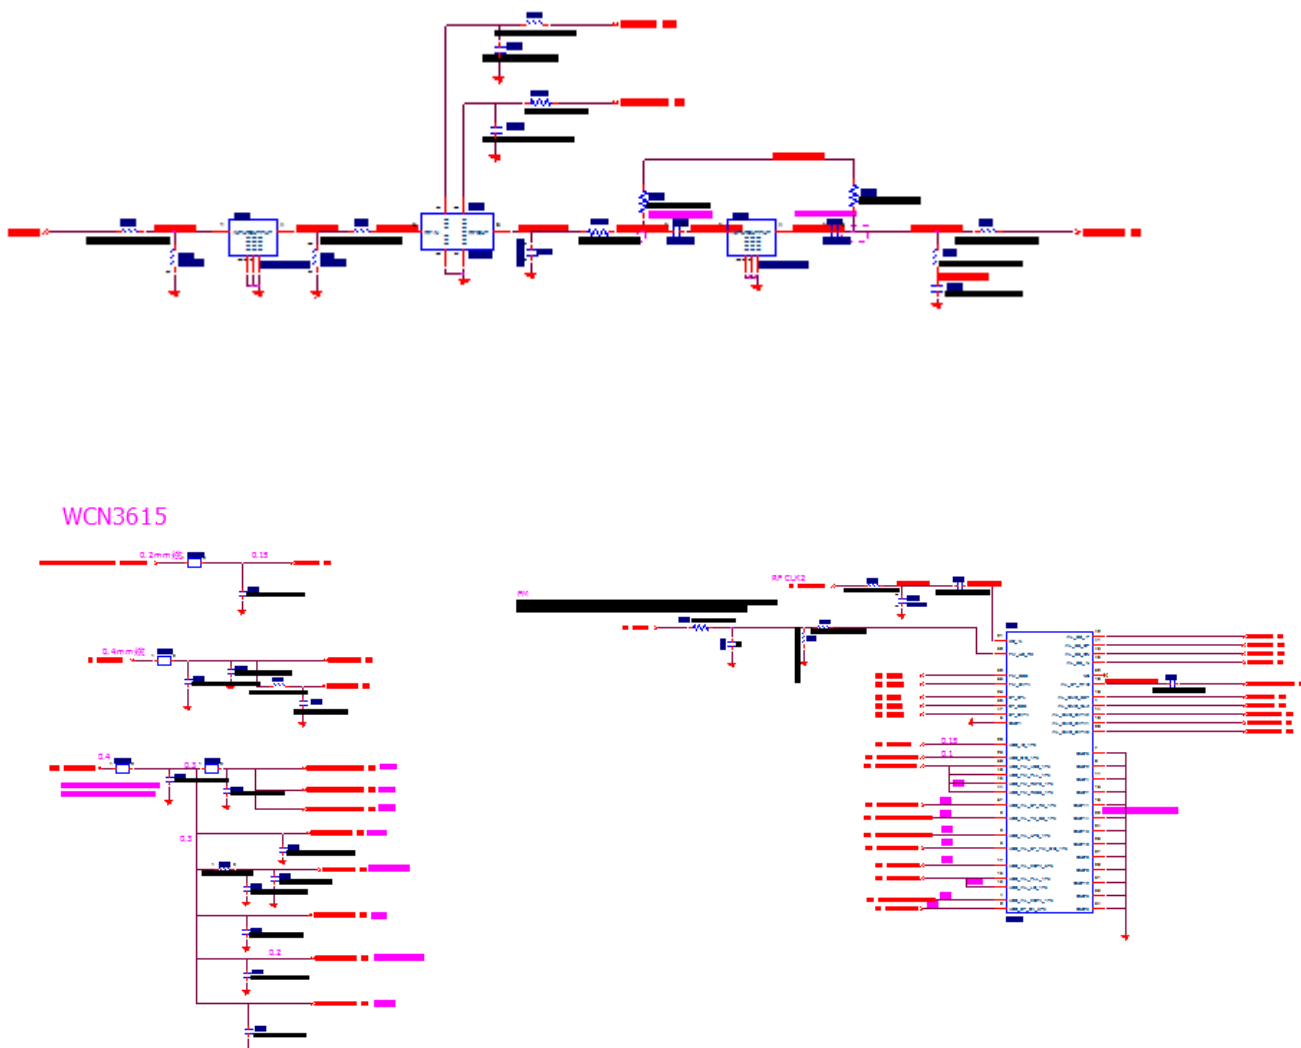

3.2 RF Block Diagram :WIFI/GPS/BT System

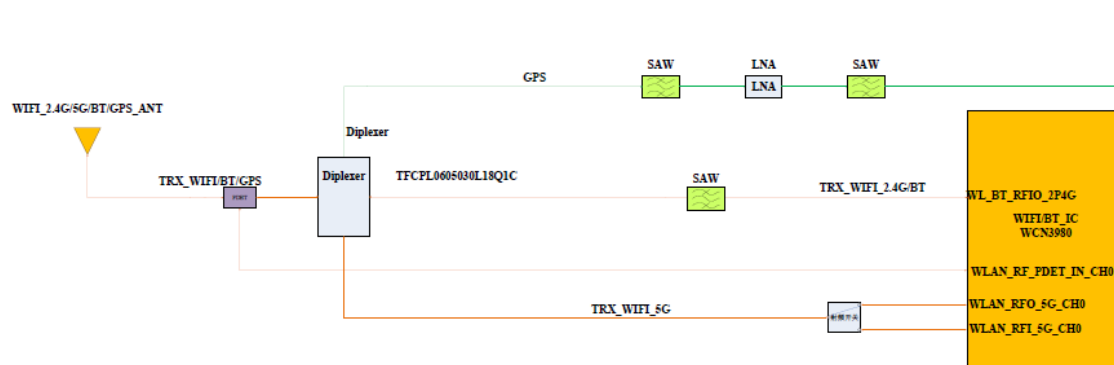

3.3Key Components

1	S3603	SAW_GPS BEIDOU_RX1109
2	U3601	射频 LNA_1575MHz(GPS)

3	S3602	电磁干扰双向阻带滤波器 _1.575GHz/2.4GHz/5GHz_Triplexer
4	S3601	LPF_2402.5-2481.5MHz_1109
5	U3501	WCN IC

