


SAMSUNG CONFIDENTIAL THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO.'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG. SM-A526B REV04 2020.11.20 Sheet01 : GSM / WCDMA / LTE / NR(N41) RF Sheet02 : TRANSCEIVER, SUB ANT Sheet03 : CONNECTIVITY(BT/WIFI/FM), NFC Sheet04 : AP(SM6350-INTERFACE,GPIO) Sheet05 : AP(POWER), MEM(uMCP) Sheet06 : PMIC(PM6350,PM6150A), IF PMIC Sheet07 : AUDIO Codec, SENSOR, SIM, SD Sheet08 : CAMERA Sheet09 : DISPLAY PMIC, C2C																A
																B
																C
																D
																E
																F
																G
																H
																I
																J
																K
Engineer: Drawn by: RED CHK: DOC CTRL CHK: MFG ENGR CHK: SM-A526B TITLE: Size: Changed by: Date Changed: Time Changed: QA CHK: REV: Drawing Number: Page:																L
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	

RF PART 1


MAIN ANT1

LB

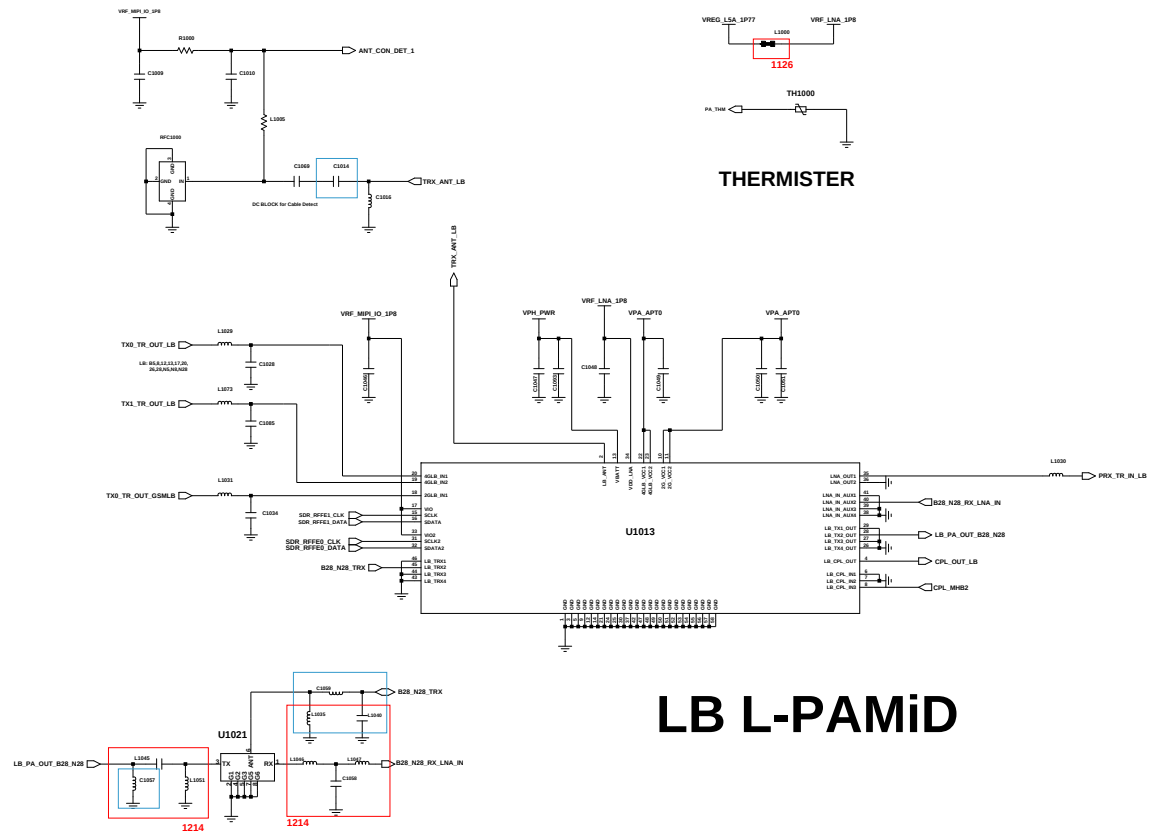


SUB ANT1

LB DRX, B1/3 DRX MIMO

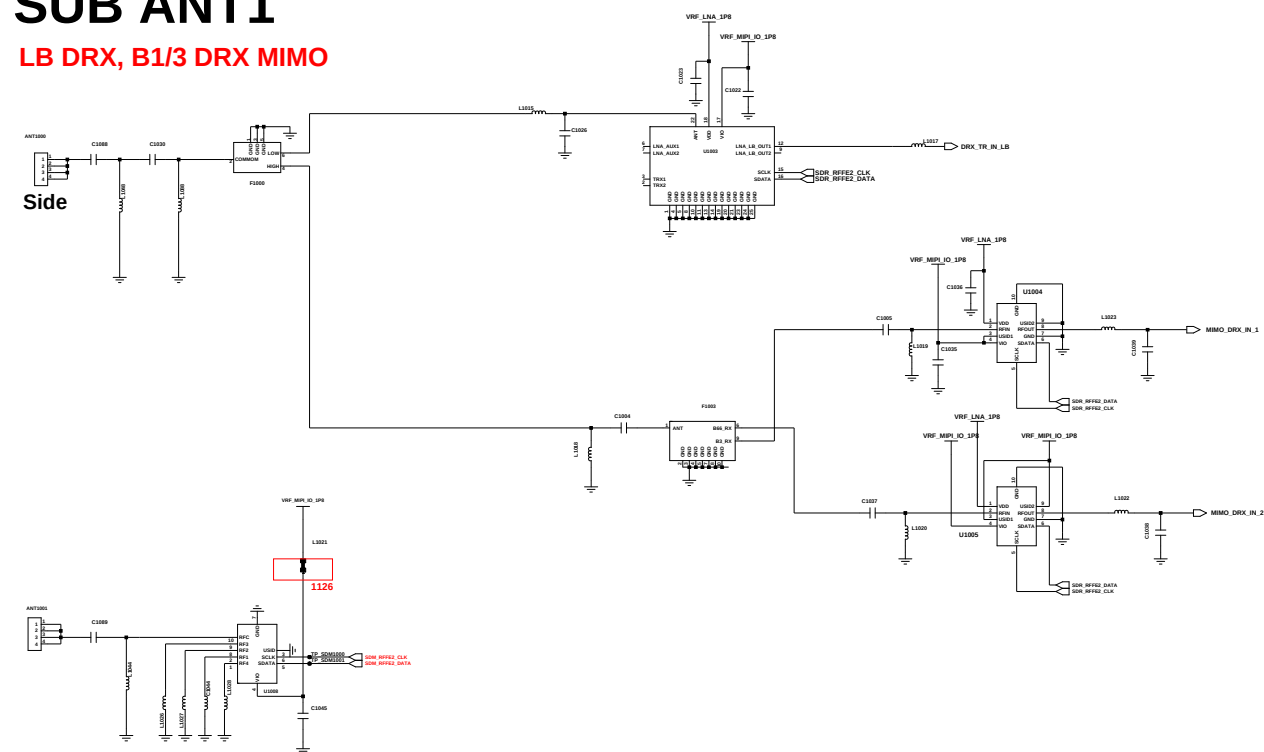


MAIN ANT2

MHB, n41_n78_n79 DRX

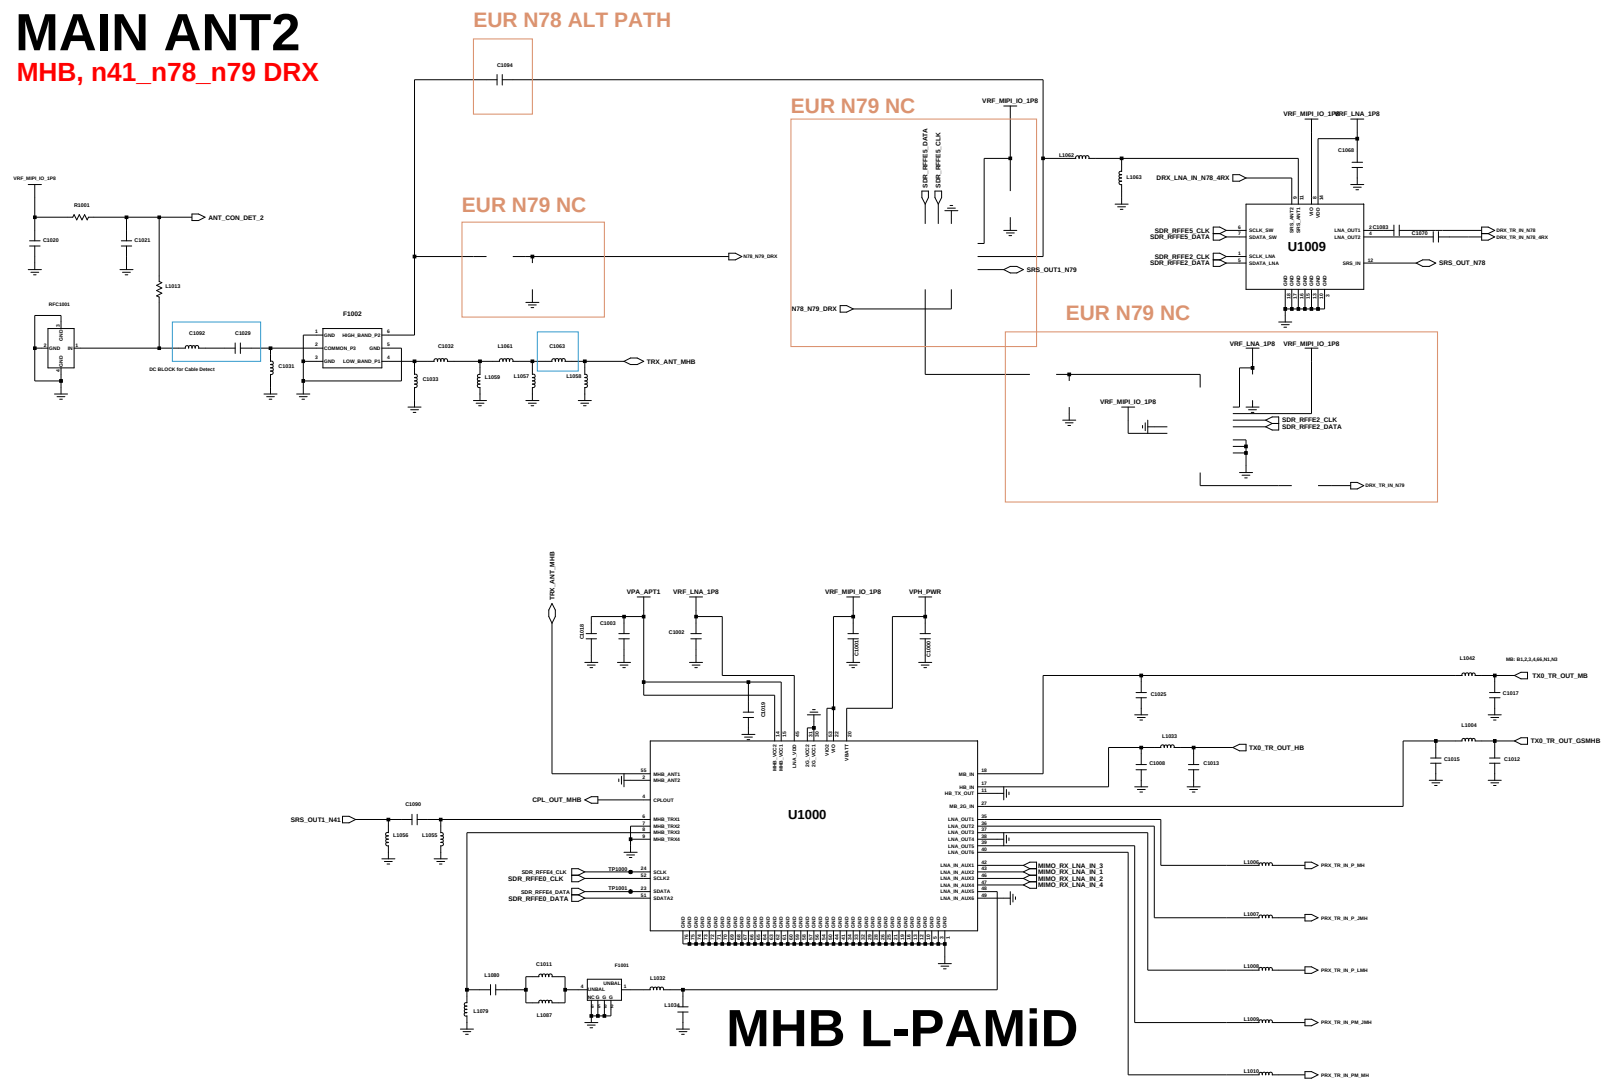

SUB ANT2

GPS, MHB DRX
N7/41 TRX
N1/3 TRX FOR MM/MH ENDC
WIFI 2.4G

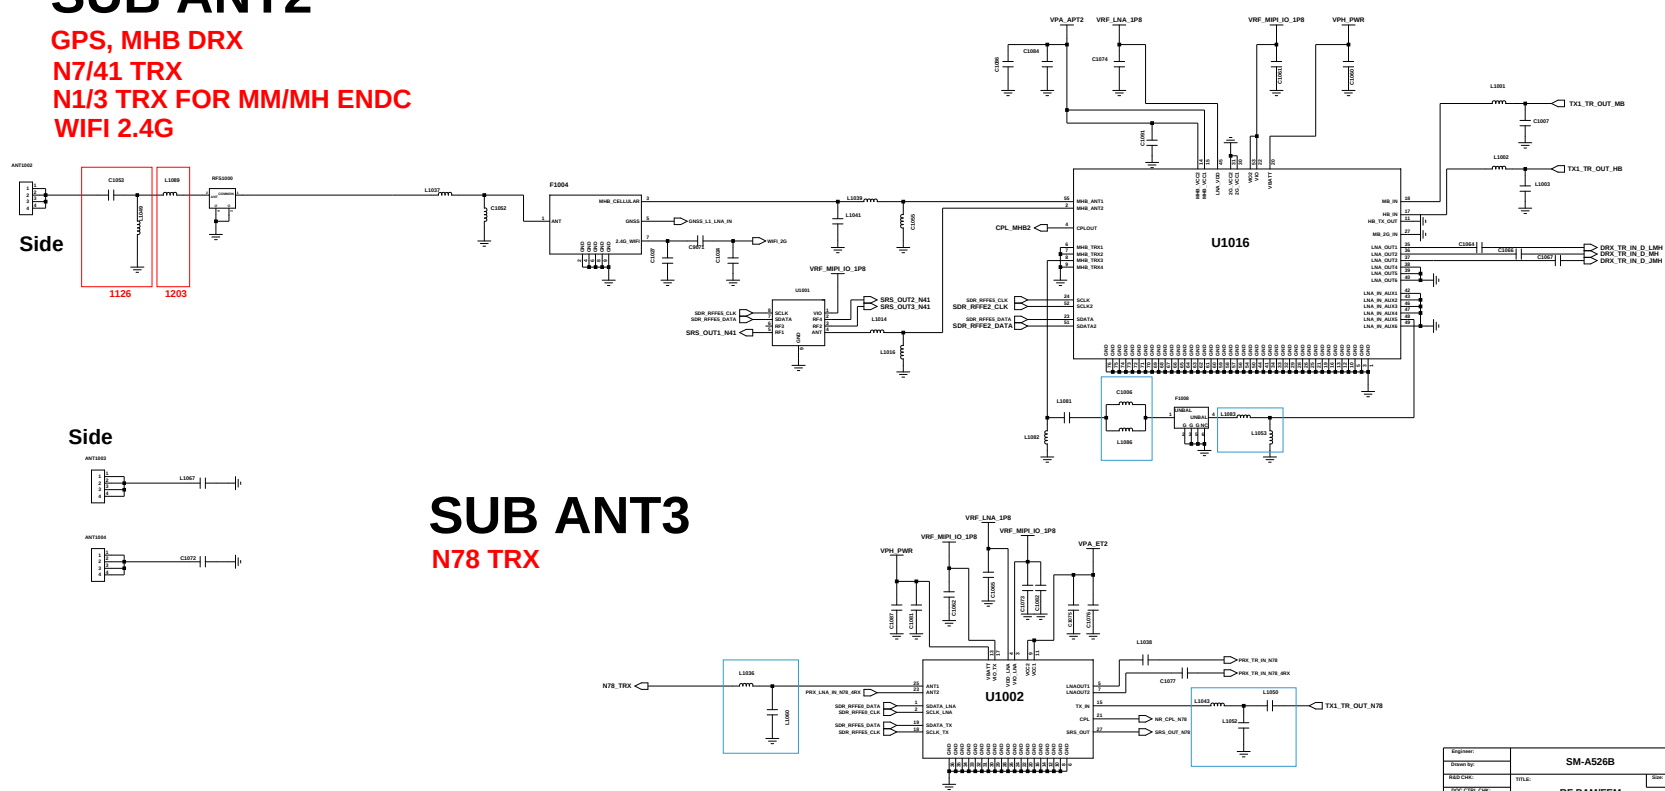


SUB ANT3


N78 TRX

Engineer:	SM-A526B		
Drawn by:			
Read Check:	TITLE:	Issue	
DOC. CTRL. CHK:	RF PAM/FEM		
WFO ISSUE CHK:			
QA CHK:	REV:	Drawing Number:	


TRANSCEIVER(SDR735)

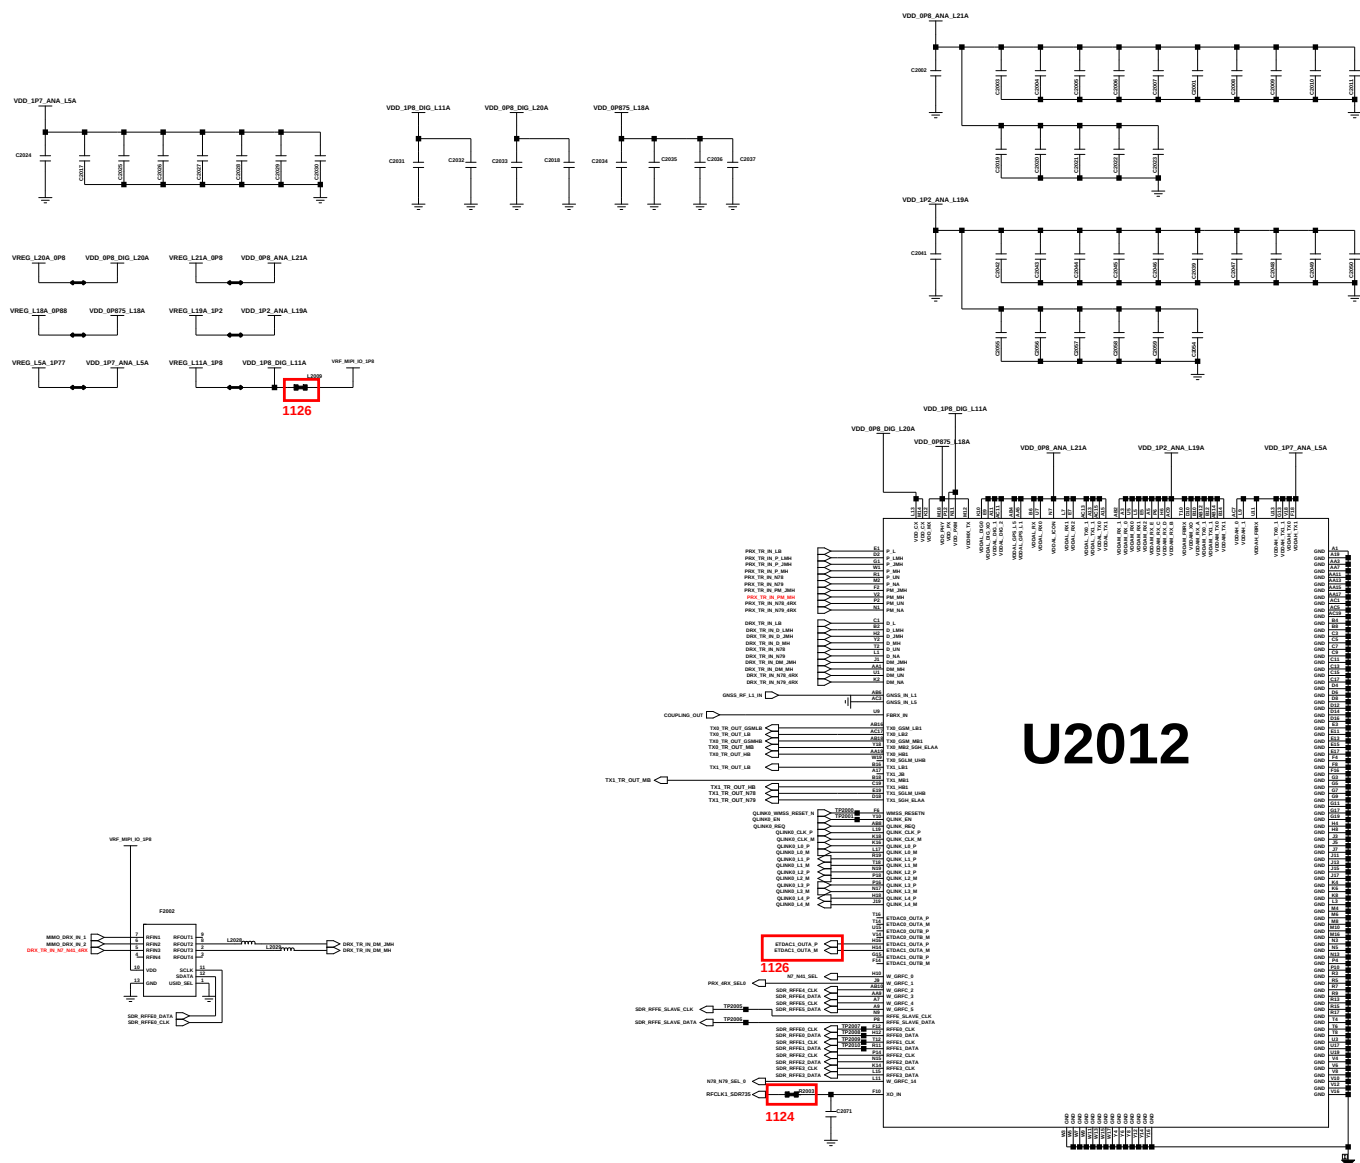


APT0




APT2

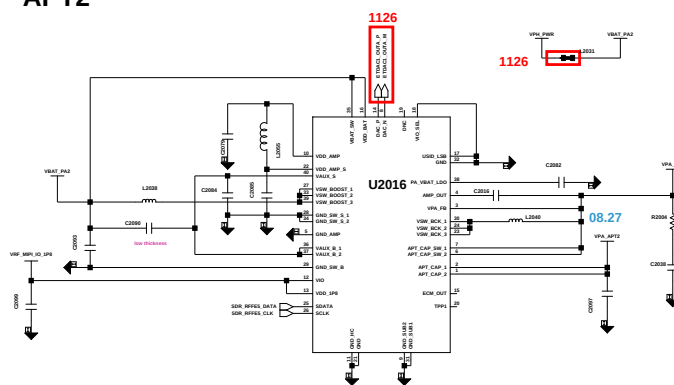


APT1




Coupling SW

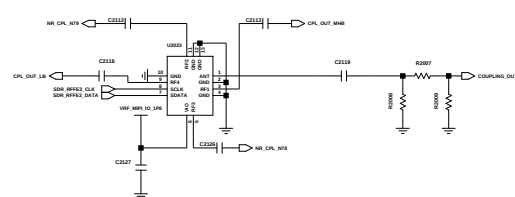


SUB ANT4 N79 TRX

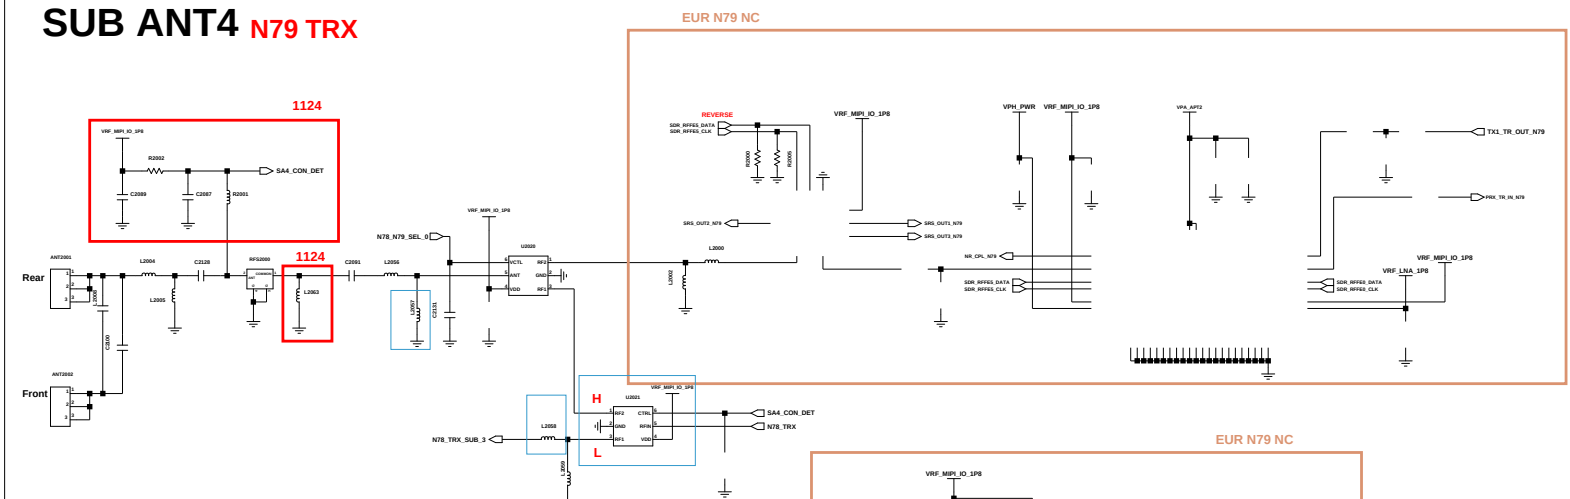


SUB ANT5 N7/79 PRX MIMO, N41 DRX MIMO

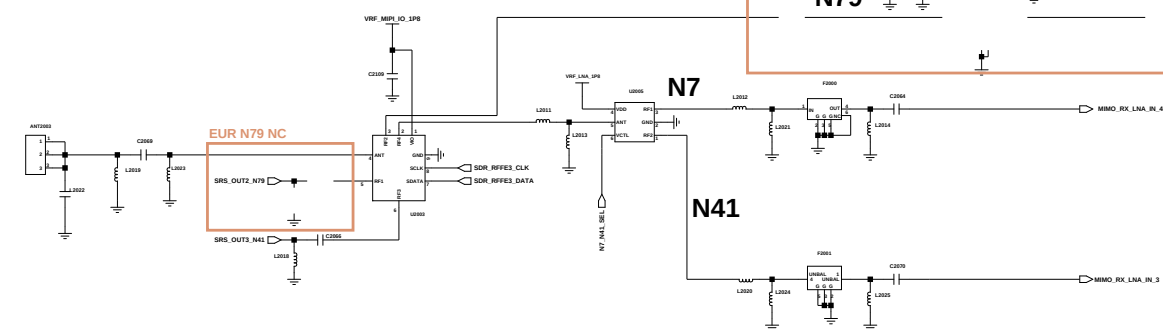

SUB ANT6 N78 PRX MIMO, B1/B3 PRX MIMO

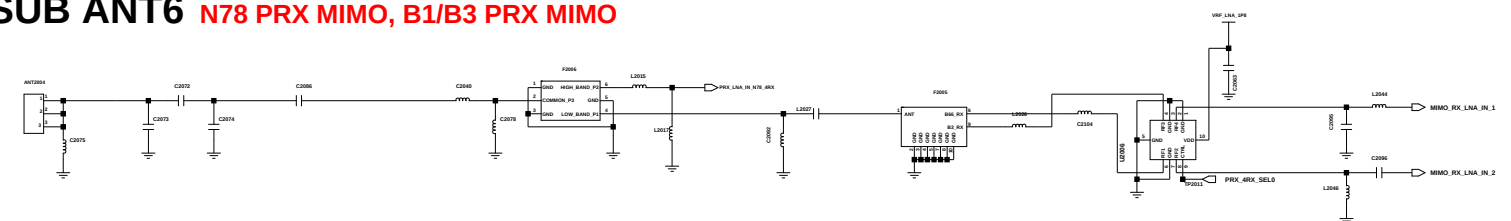

SUB ANT7 N7/78/79 DRX MIMO, N41 PRX MIMO

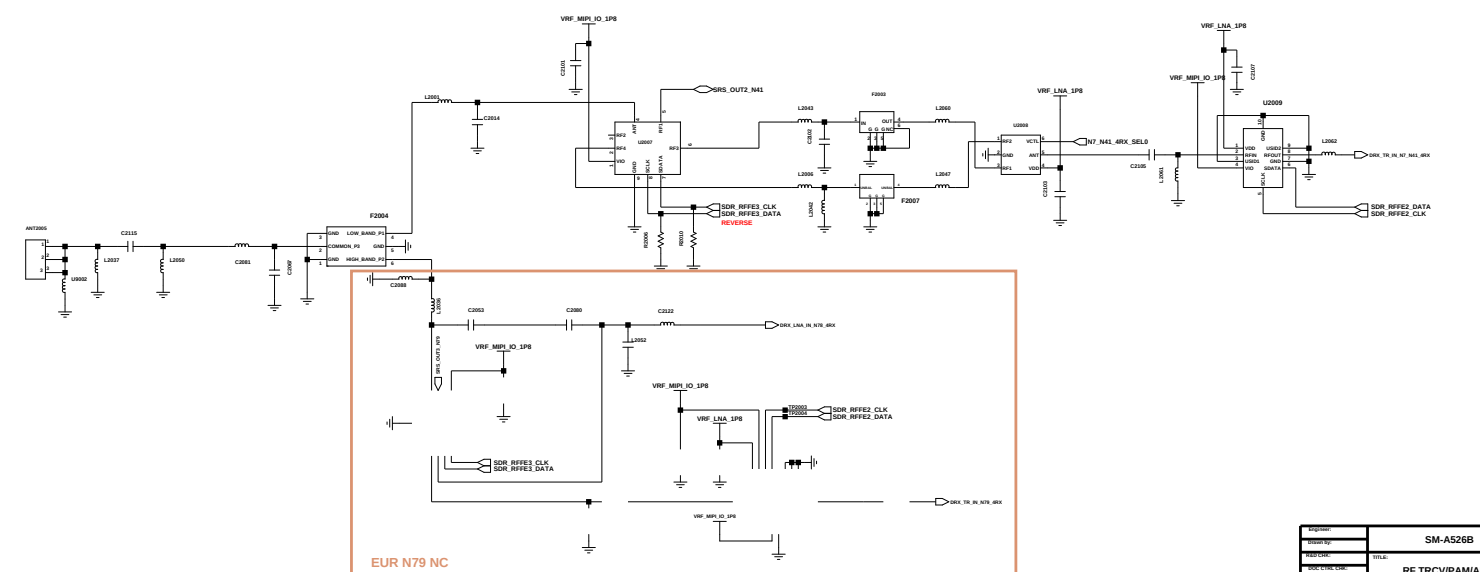

front

1 2 3

1 2 3

ANT3001

1 2 3

1 2 3

ANT3000

Rear

1 2 3

1 2 3

ANT3001

1 2 3

ANT3000

C3000

C3007

L3004

1203

C3060

L3005

NTR_TRX_SUB_3

F3004

LOW

COM

HIGH

L3021

F3000

IN

OUT

L3001

WIFI_SW_CTL_CH0

C3002

1126

U3000

6 VCTL

5 ANT

4 VDD

3 RST

2 RST

1 RST

WIFI_5G_CH0

WIFI_5G_CH0

C3012


WIFI_2G


WIFI_BT_RFID_2G_CH0

SUB ANT3

The schematic diagram illustrates the electrical connections for two components, U3002 and U3001. Component U3002 is a 12-pin device. Its pins 1, 2, and 3 are connected to the ANT3002 antenna. Pins 4, 5, and 6 are connected to the ANT3003 antenna. Pins 7 and 8 are connected to VDD_MST. Pins 9 and 10 are connected to VDD_MST_3P0. Pins 11 and 12 are connected to VDD_MST. Component U3001 is a 6-pin device. Its pins 1, 2, and 3 are connected to VPH_PWR. Pins 4, 5, and 6 are connected to VDD_MST_3P0. Pins 7, 8, and 9 are connected to VDD_MST. Pins 10, 11, and 12 are connected to VDD_MST. The diagram also shows various capacitors (C3000, C3001, C3002, C3003, C3004, C3005, C3006, C3007, C3008, C3009, C3010, C3011) and resistors (R3000, R3001, R3002, R3003, R3004, R3005, R3006, R3007, R3008, R3009, R3010, R3011) connected to the components.


[illegible]

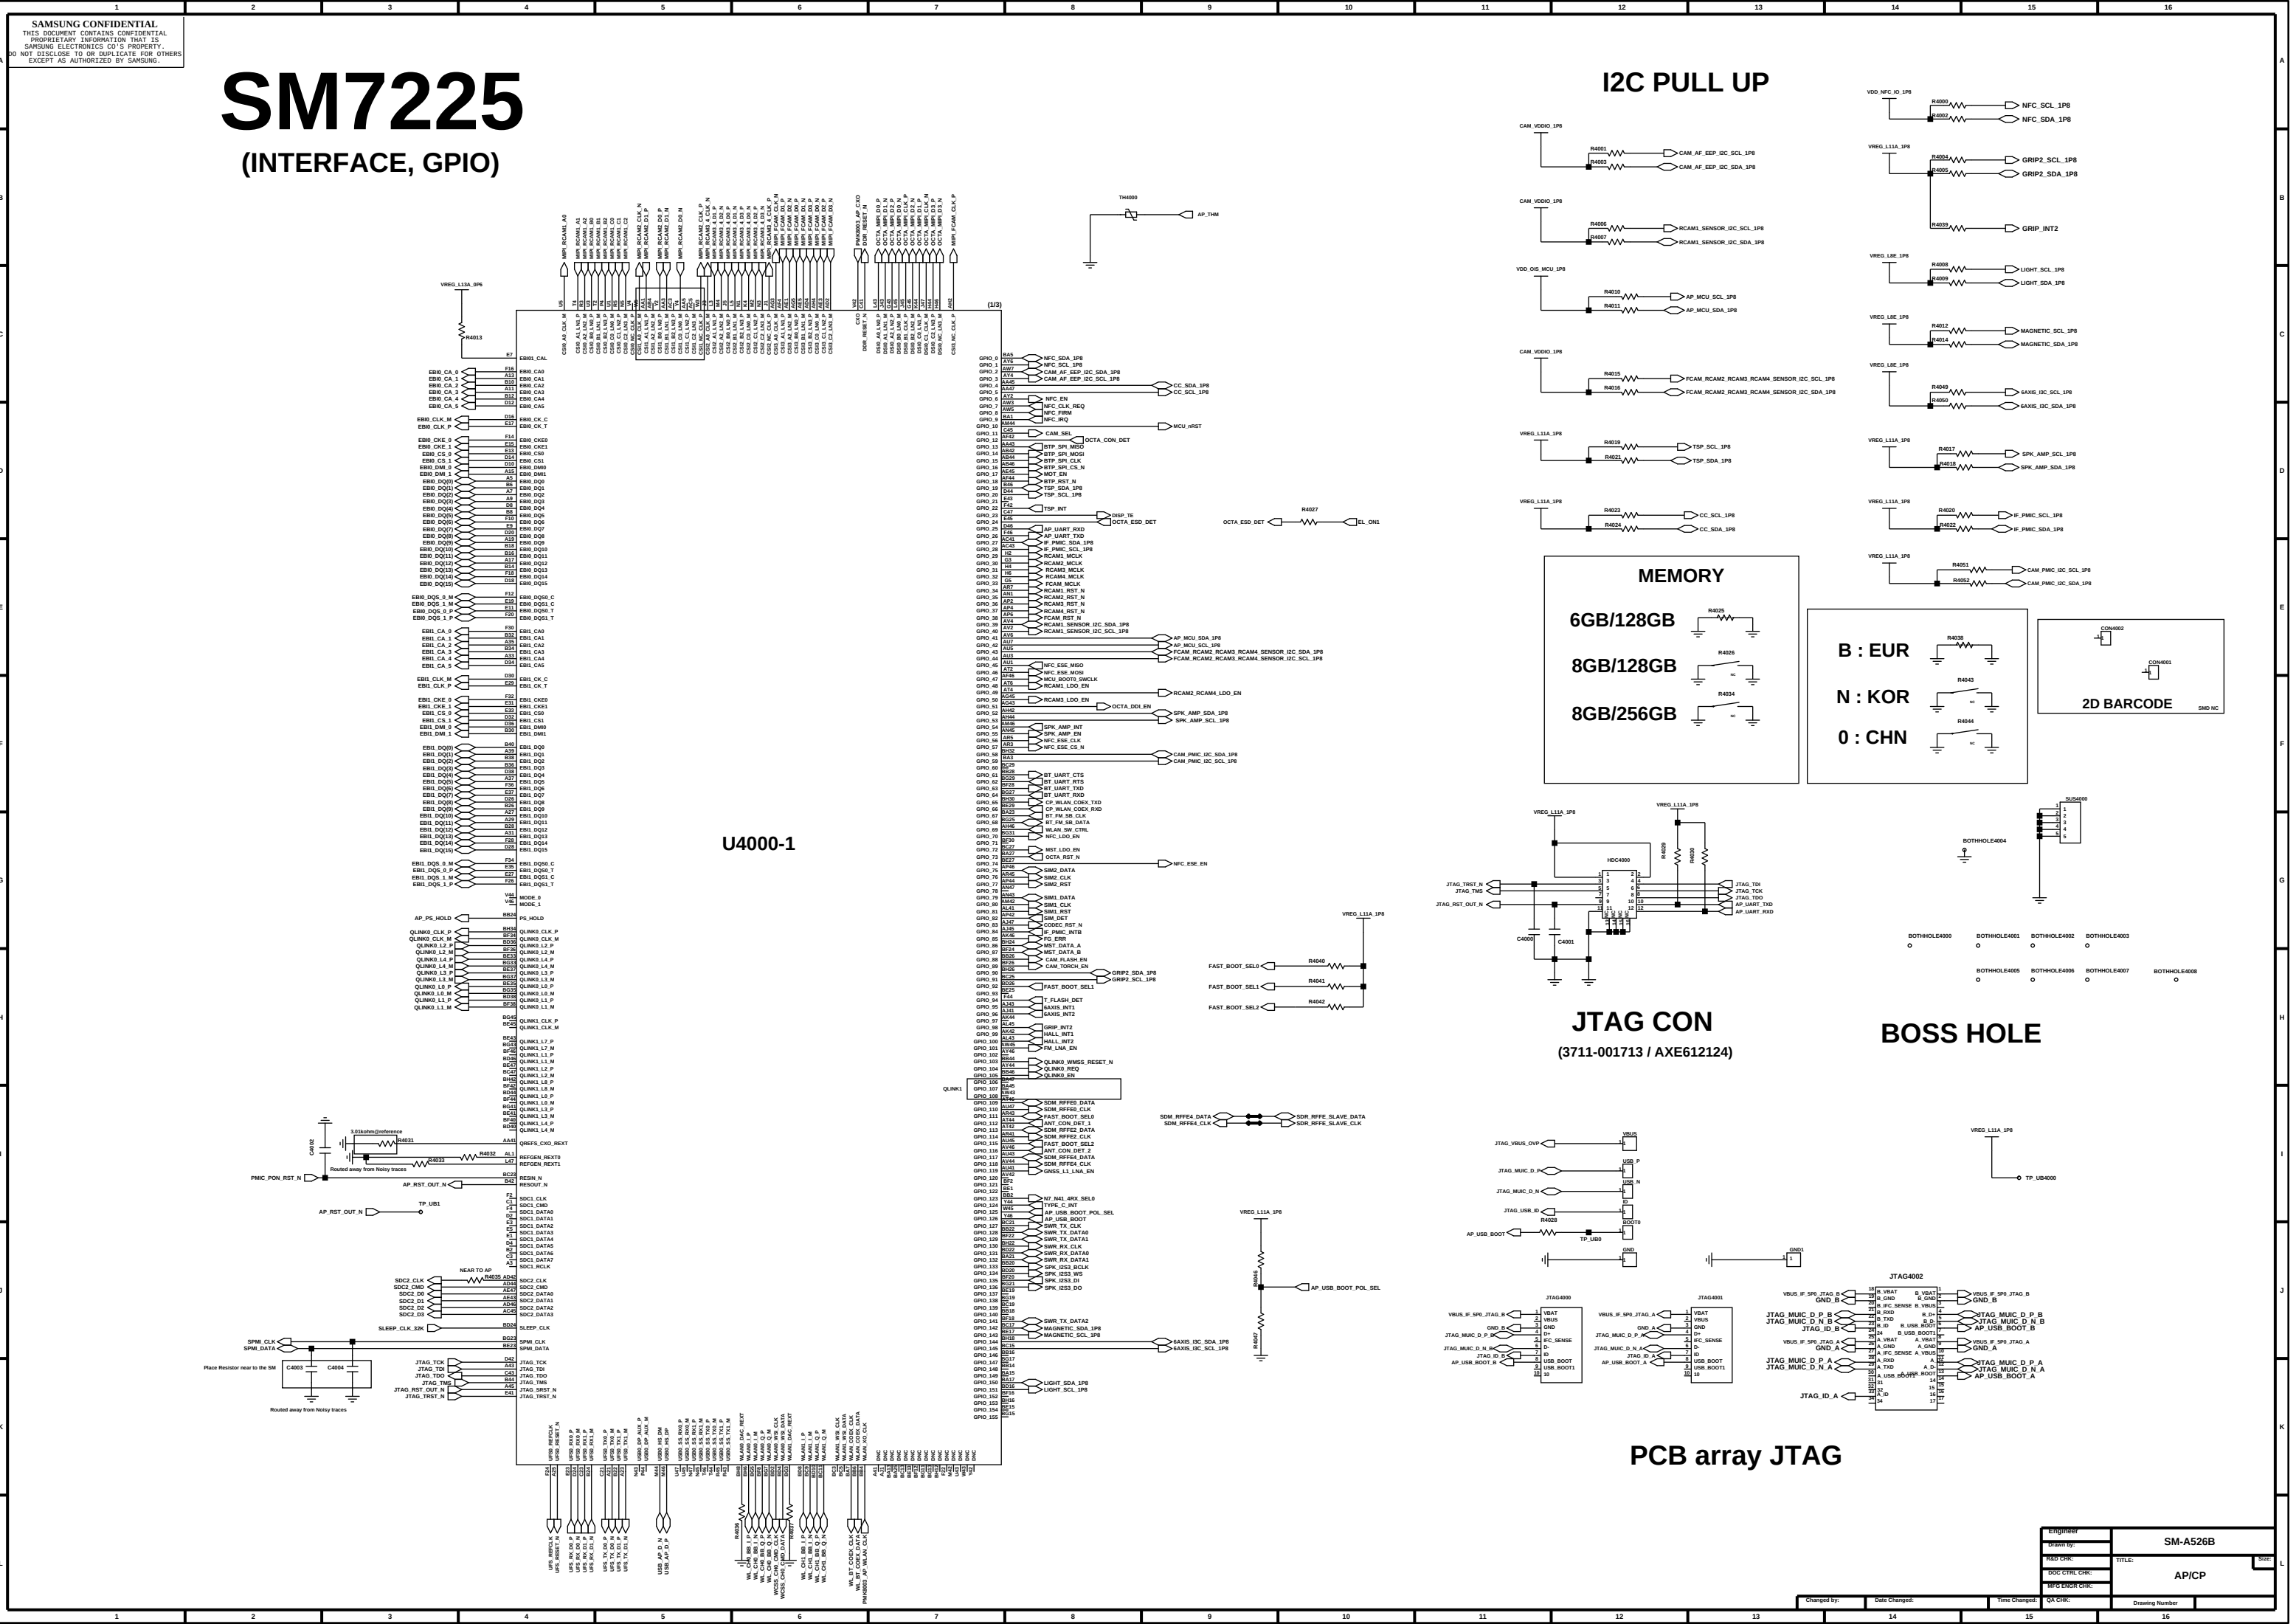




CLOCK GEN




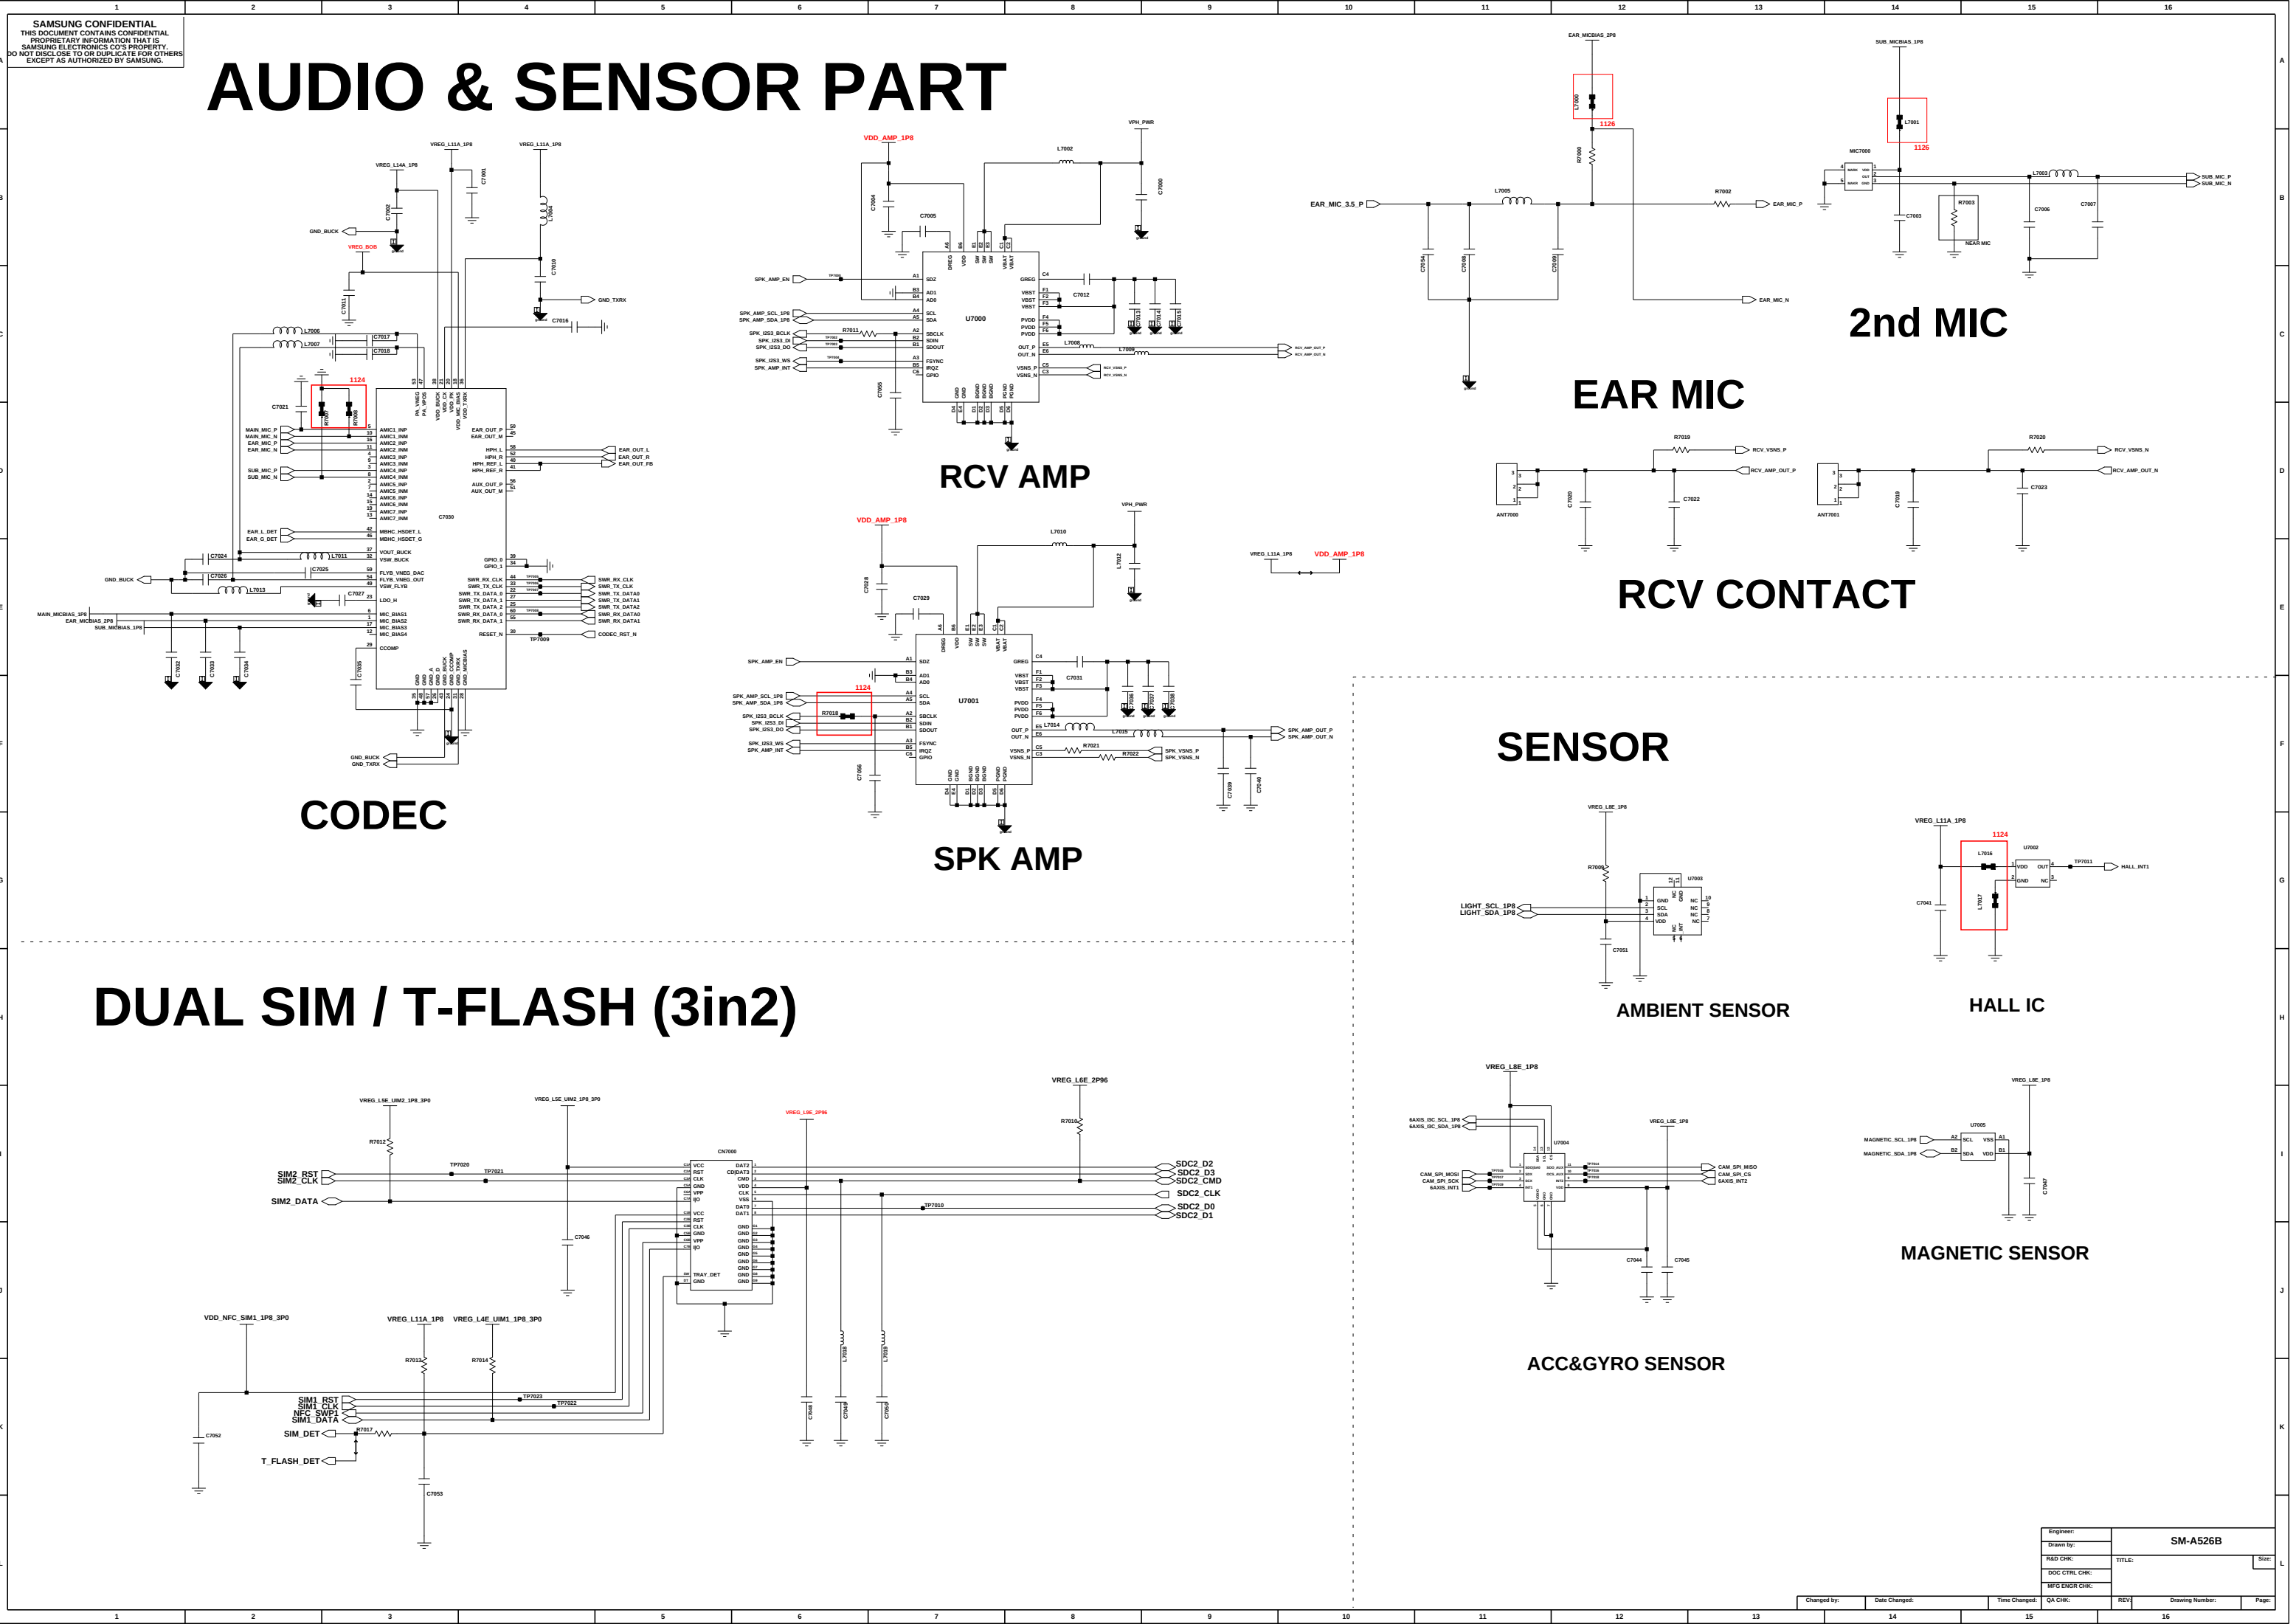


DUAL SIM / T-FLASH (3in2)

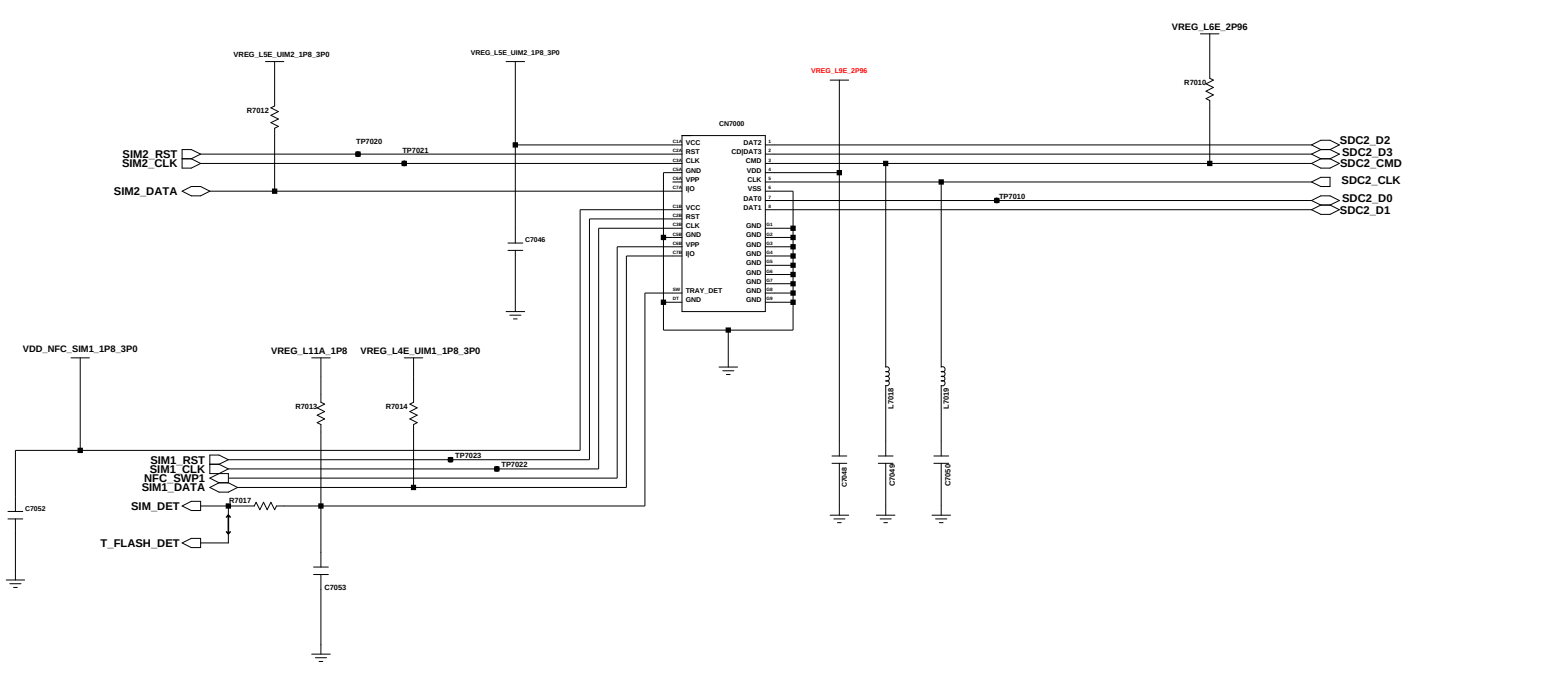


SENSOR

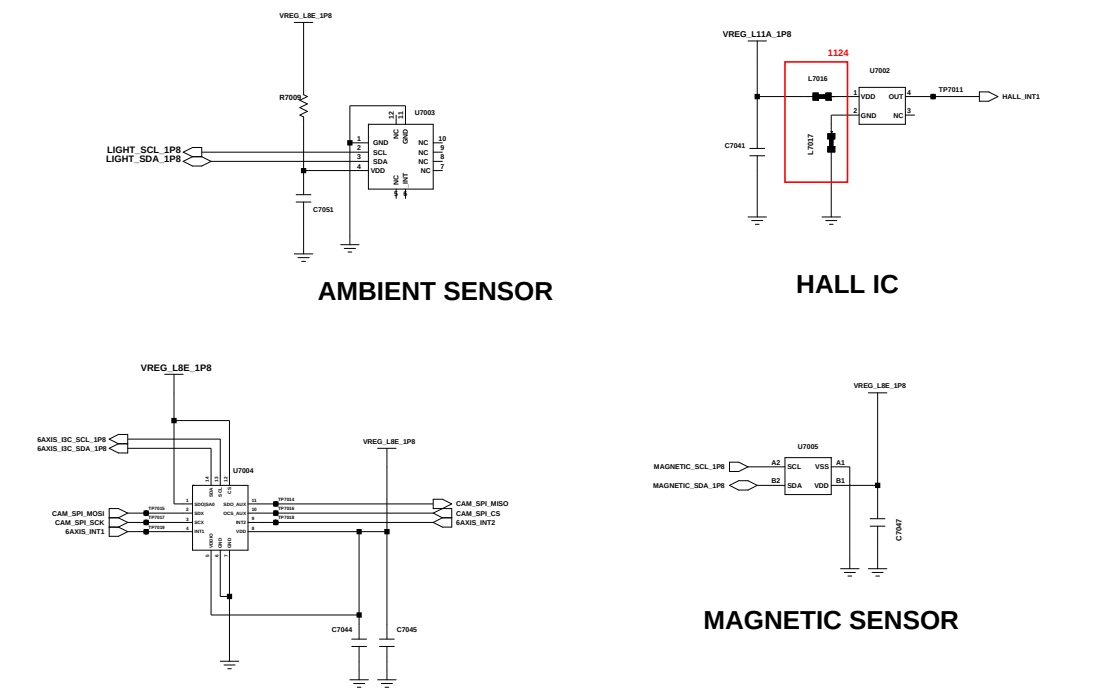


ACC&GYRO SENSOR

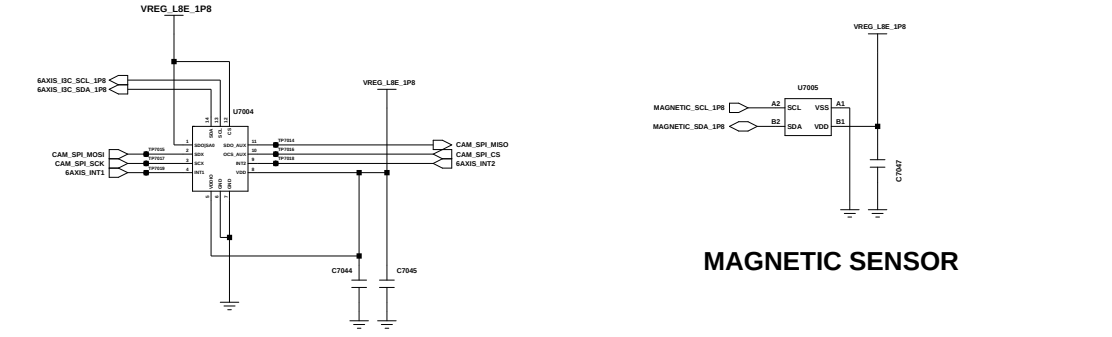

MAGNETIC SENSOR

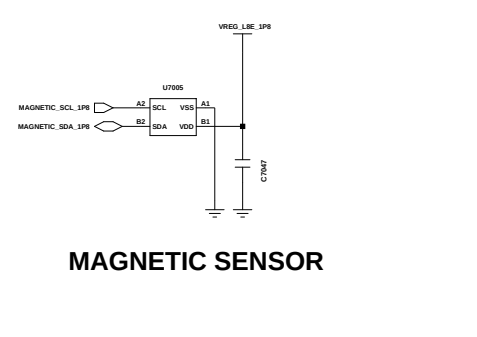


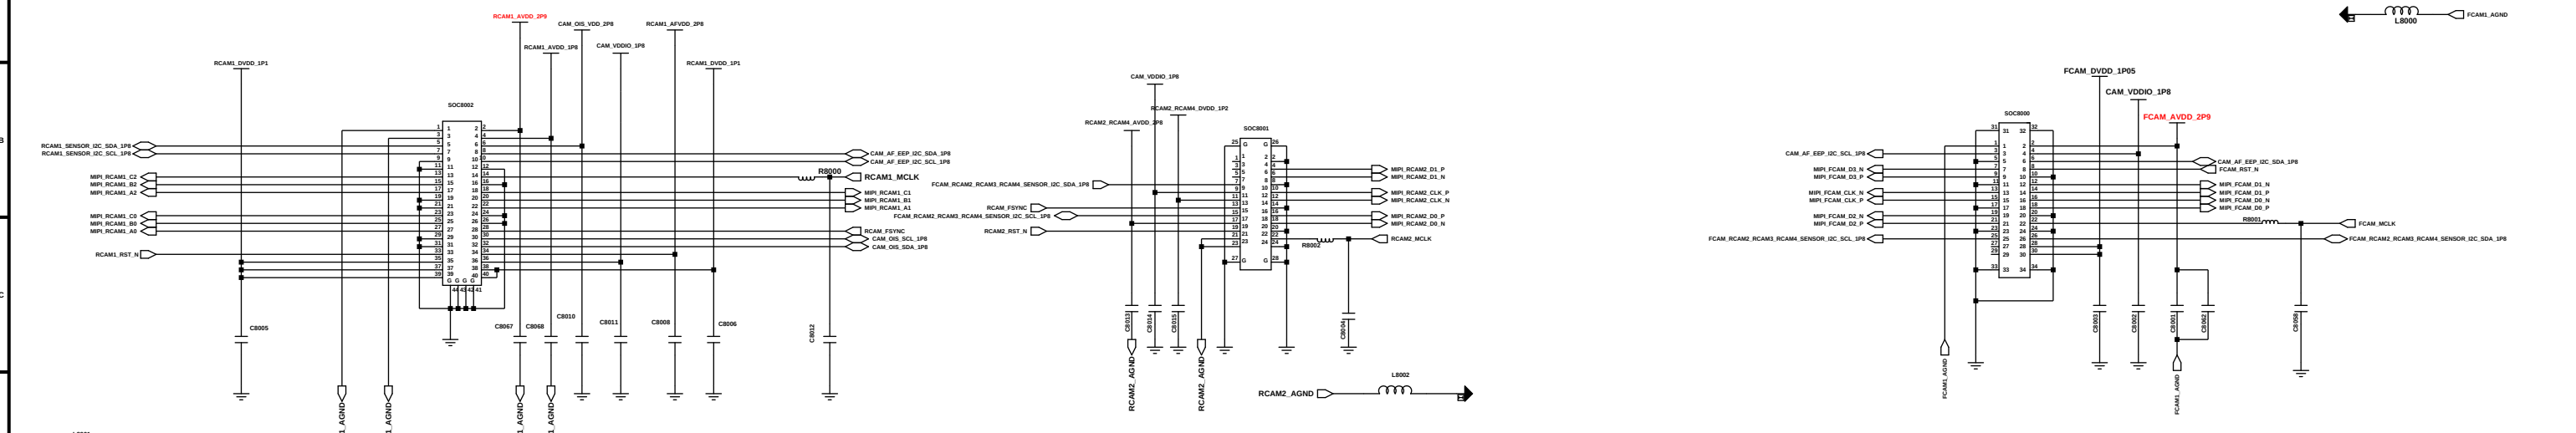

RCAM1_64M OIS(40PIN)

RCAM2_5M_BOKEH_CAMERA(24PIN)

FRONT_32M CAMERA (30PIN)

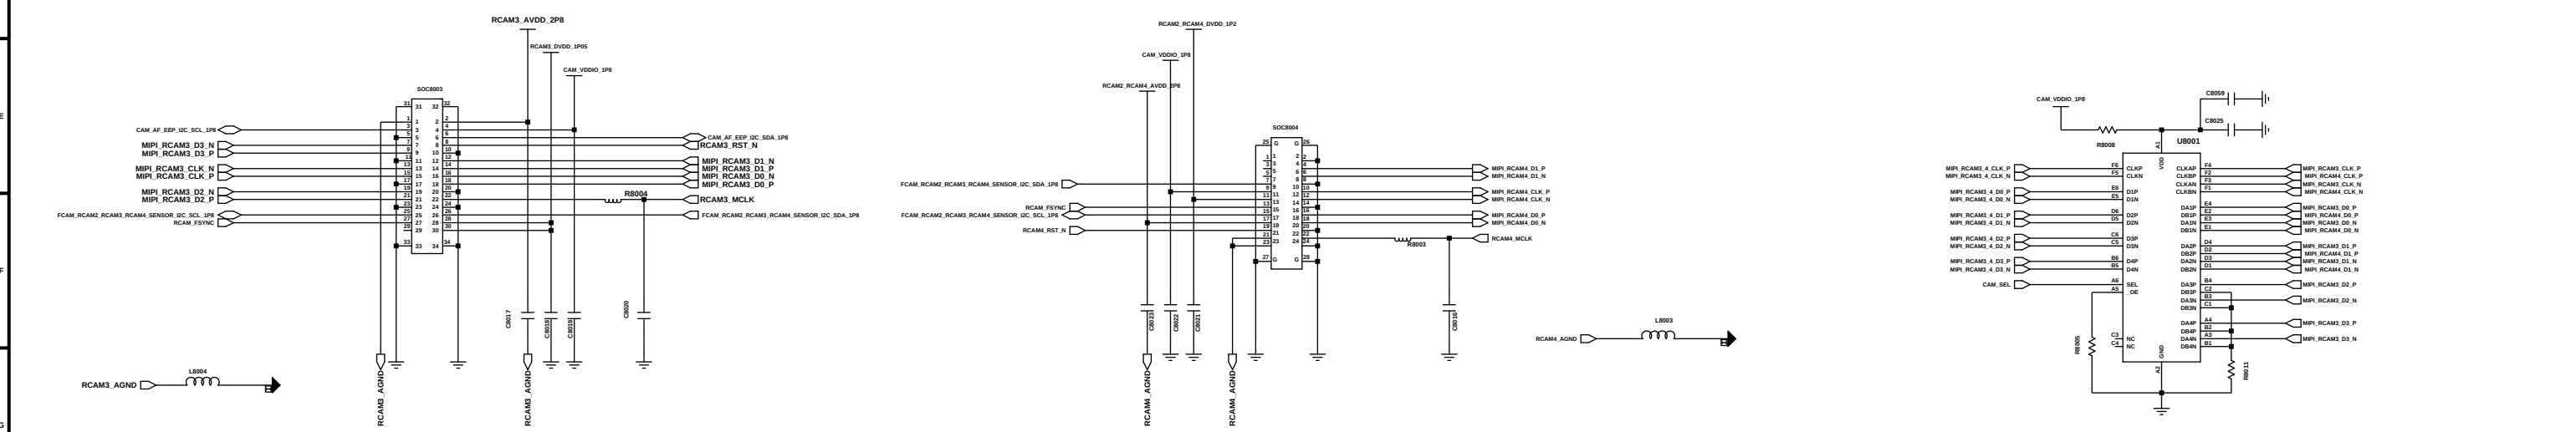


RCAM3_SUPER WIDE_8M CAMERA(30pin)

RCAM4_5M_MACRO_CAMERA(24PIN)

MIPI SWITCH (RCAM3,RCAM4)


CAM PMIC

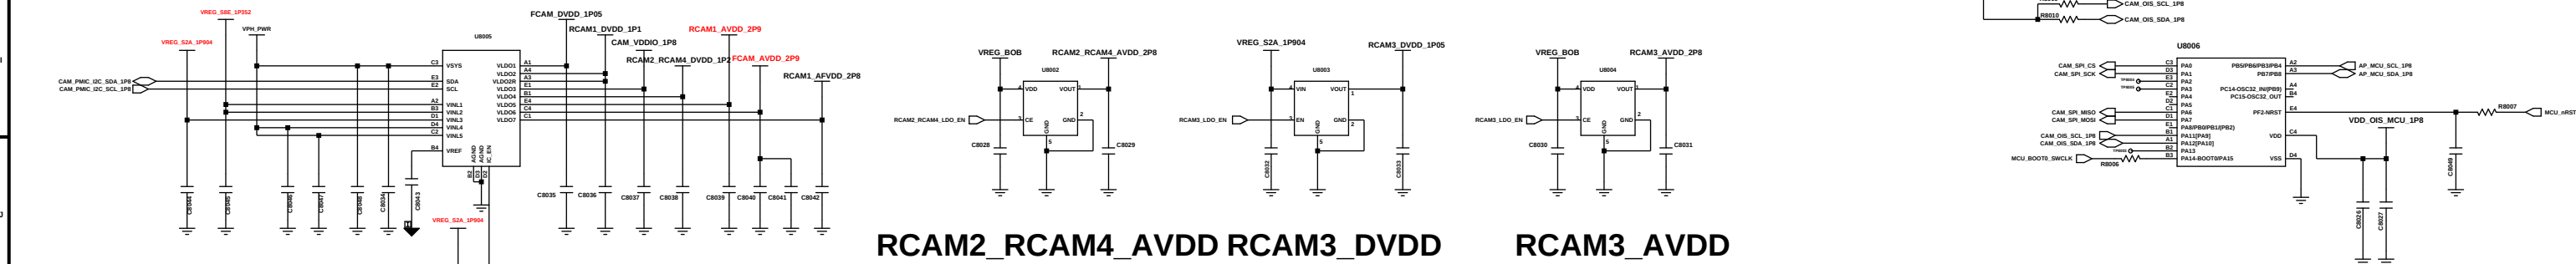

RCAM2_RCAM4_AVDD

RCAM3_AVDD

CAM MCU

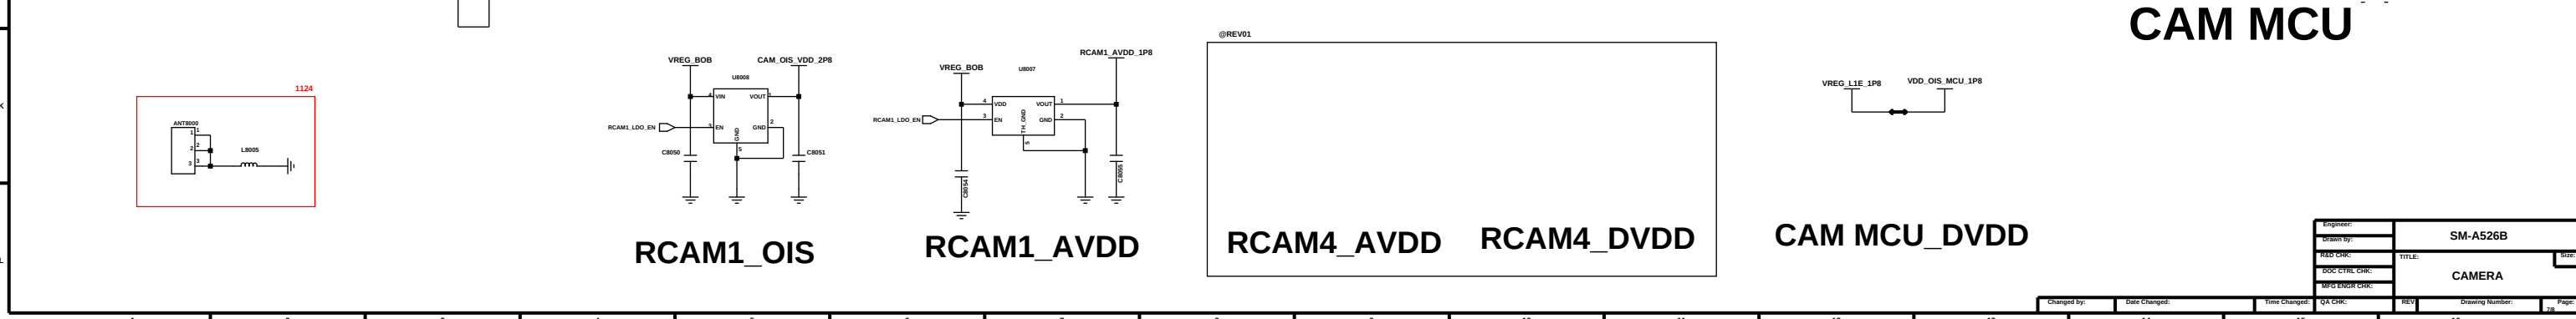


RCAM1_OIS

RCAM1_AVDD

RCAM4_AVDD

RCAM4_DVDD

CAM MCU_DVDD



CN7000

SC9001

SOC8003

SOC8002

SM-A516B

U4000

UME5000

SC9002

U1013

U7003

SUS4008

C204001

U1001

U1002

U1003

U1004

U1005

U1006

U1007

U1008

U1009

U1010

U1011

U1012

U1013

U1014

U1015

U1016

U1017

U1018

U1019

U1020

U1021

U1022

U1023

U1024

U1025

U1026

U1027

U1028

U1029

U1030

U1031

U1032

U1033

U1034

U1035

U1036

U1037

U1038

U1039

U1040

U1041

U1042

U1043

U1044

U1045

U1046

U1047

U1048

U1049

U1050

U1051

U1052

U1053

U1054

U1055

U1056

U1057

U1058

U1059

U1060

U1061

U1062

U1063

U1064

U1065

U1066

U1067

U1068

U1069

U1070

U1071

U1072

U1073

U1074

U1075

U1076

U1077

U1078

U1079

U1080

U1081

U1082

U1083

U1084

U1085

U1086

U1087

U1088

U1089

U1090

U1091

U1092

U1093

U1094

U1095

U1096

U1097

U1098

U1099

U1100

U1101

U1102

U1103

U1104

U1105

U1106

U1107

U1108

U1109

U1110

U1111

U1112

U1113

U1114

U1115

U1116

U1117

U1118

U1119

U1120

U1121

U1122

U1123

U1124

U1125

U1126

U1127

U1128

U1129

U1130

U1131

U1132

U1133

U1134

U1135

U1136

U1137

U1138

U1139

U1140

U1141

U1142

U1143

U1144

U1145

U1146

U1147

U1148

U1149

U1150

U1151

U1152

U1153

U1154

U1155

U1156

U1157

U1158

U1159

U1160

U1161

U1162

U1163

U1164

U1165

U1166

U1167

U1168

U1169

U1170

U1171

U1172

U1173

U1174

U1175

U1176

U1177

U1178

U1179

U1180

U1181

U1182

U1183

U1184

U1185

U1186

U1187

U1188

U1189

U1190

U1191

U1192

U1193

U1194

U1195

U1196

U1197

U1198

U1199

U1200

U1201

U1202

U1203

U1204

U1205

U1206

U1207

U1208

U1209

U1210

U1211

U1212

U1213

U1214

U1215

U1216

U1217

U1218

U1219

U1220

U1221

U1222

U1223

U1224

U1225

U1226

U1227

U1228

U1229

U1230

U1231

U1232

U1233

U1234

U1235

U1236

U1237

U1238

U1239

U1240

U1241

U1242

U1243

U1244

U1245

U1246

U1247

U1248

U1249

U1250

U1251

U1252

U1253

U1254

U1255

U1256

U1257

U1258

U1259

U1260

U1261

U1262

U1263

U1264

U1265

U1266

U1267

U1268

U1269

U1270

U1271

U1272

U1273

U1274

U1275

U1276

U1277

U1278

U1279

U1280

U1281

U1282

U1283

U1284

U1285

U1286

U1287

U1288

U1289

U1290

U1291

U1292

U1293

U1294

U1295


U1296

U1297

U1298

U1299

U1300

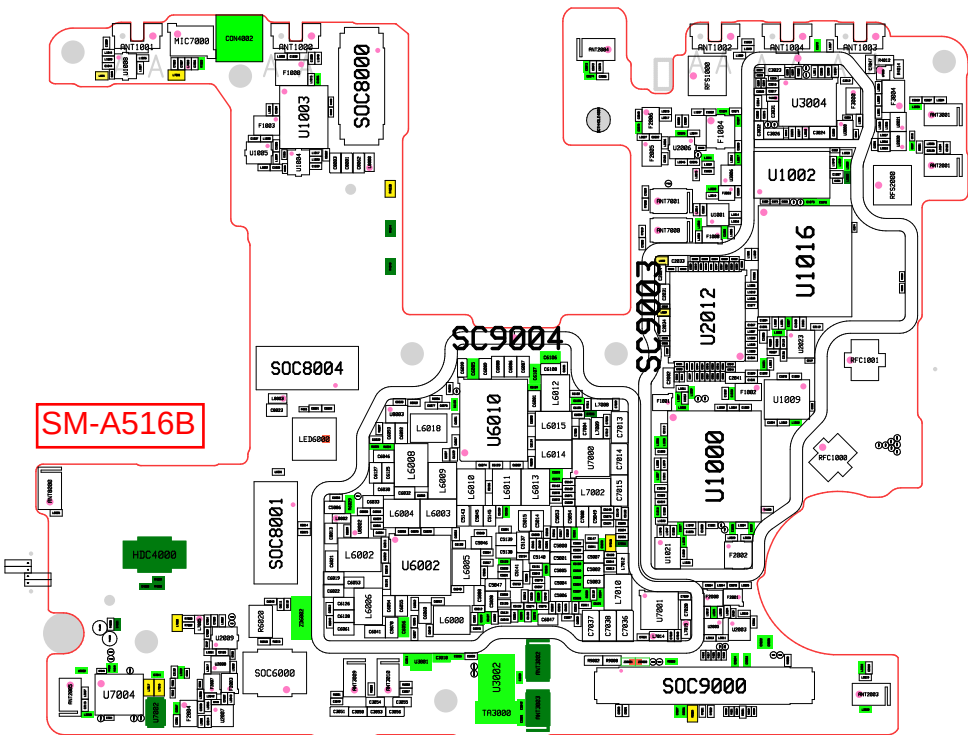

SM-A5260 REV04 1208SMD

2020.12.01

Sheet01 : GSM / WCDMA / LTE / NR(N41) RF

Sheet02 : TRANSCEIVER, SUB ANT

Sheet03 : CONNECTIVITY(BT/WIFI/FM), NFC

Sheet04 : AP(SM6350-INTERFACE,GPIO)

Sheet05 : AP(POWER), MEM(uMCP)

Sheet06 : PMIC(PM6350,PM6150A), IF PMIC

Sheet07 : AUDIO Codec, SENSOR, SIM, SD

Sheet08 : CAMERA

Sheet09 : DISPLAY PMIC, C2C


Engineer:			
Drawn by:			
R&D CHK:	TITLE:	SIZE:	
DOC CTRL CHK:	A52		
MFG ENGR CHK:			
QA CHK:	REV	Drawing Number:	Page:
			0

16

RF PART 1


MAIN ANT1

LB

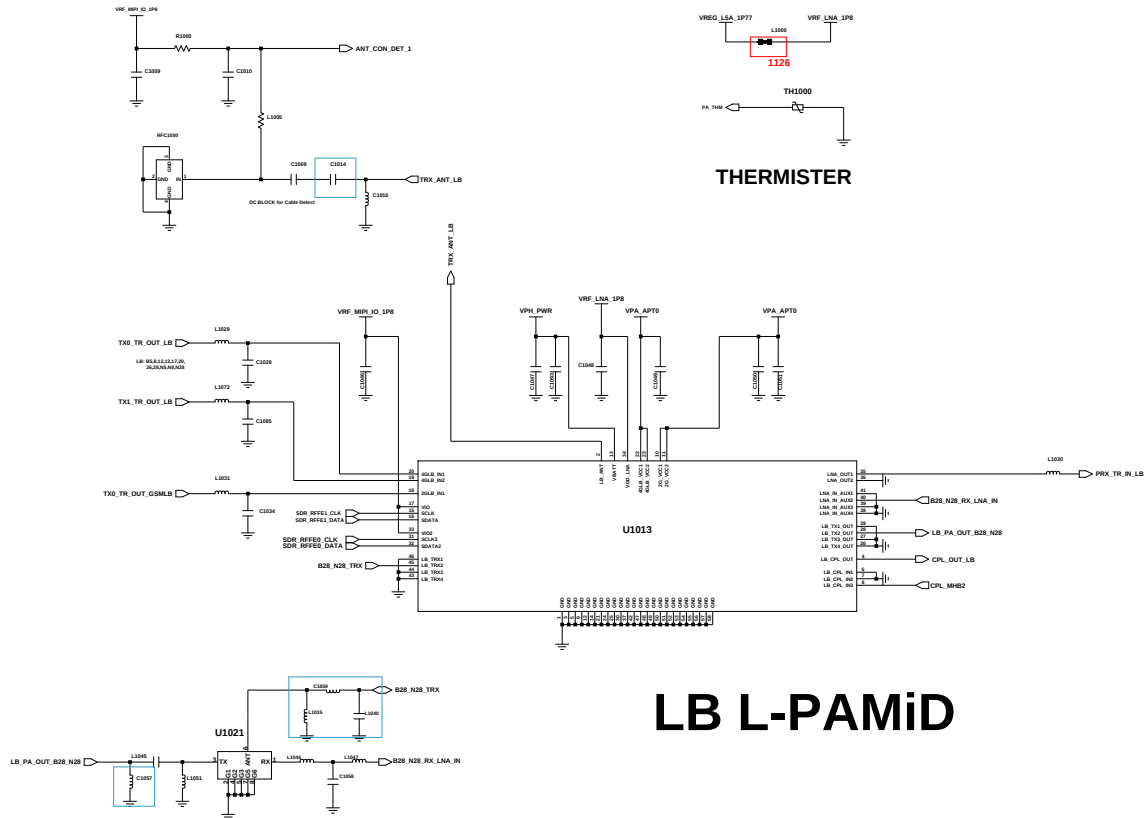


SUB ANT1

LB DRX, B1/3 DRX MIMO

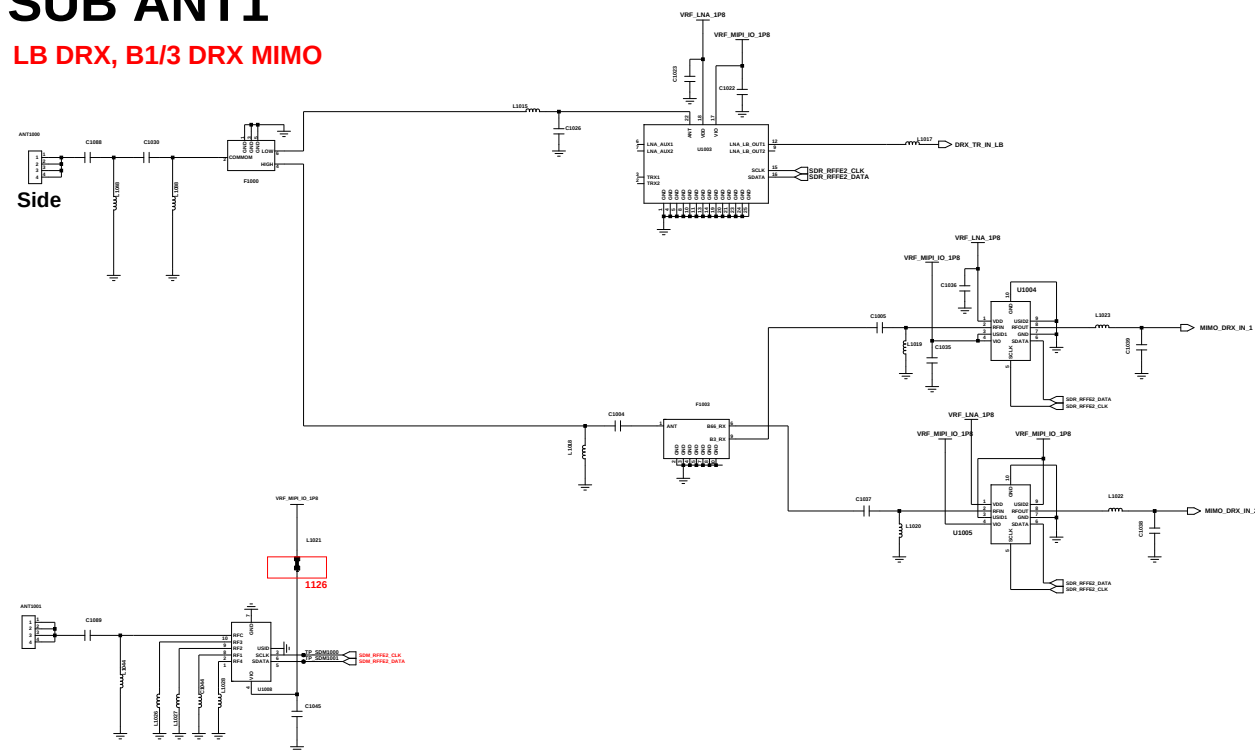


MAIN ANT2

MHB, n41_n78_n79 DRX

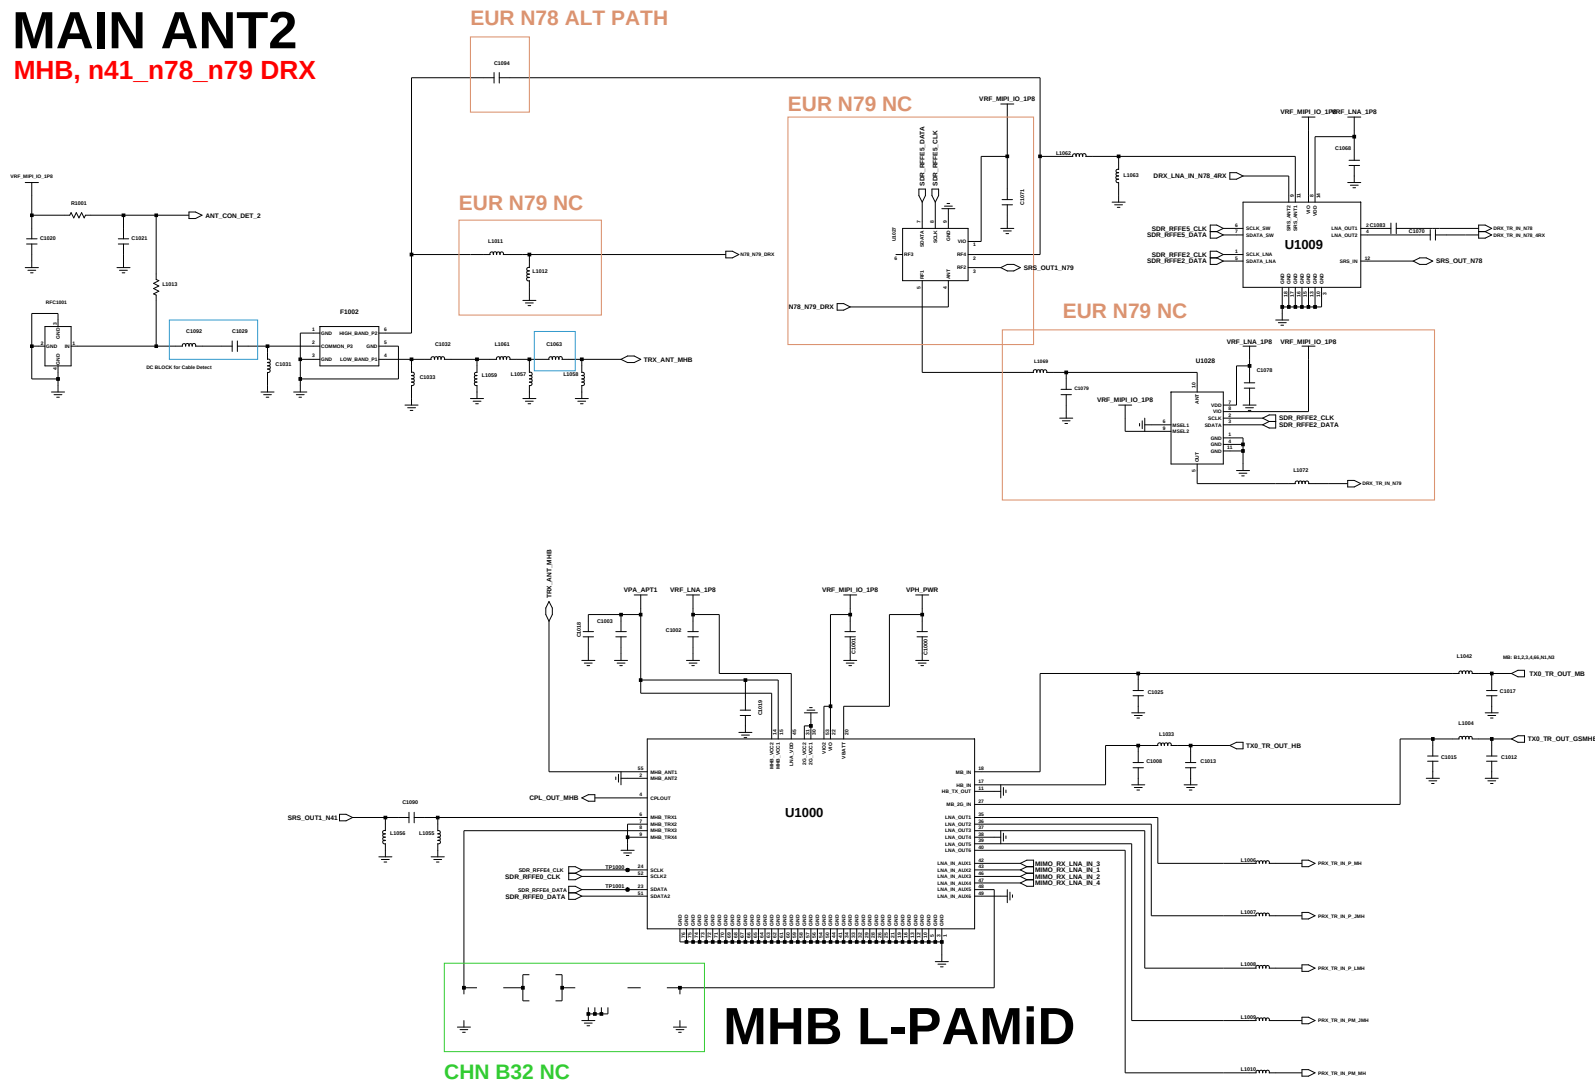

SUB ANT2





GPS, MHB DRX
N7/41 TRX
N1/3 TRX FOR MM/MH ENDC
WIFI 2.4G

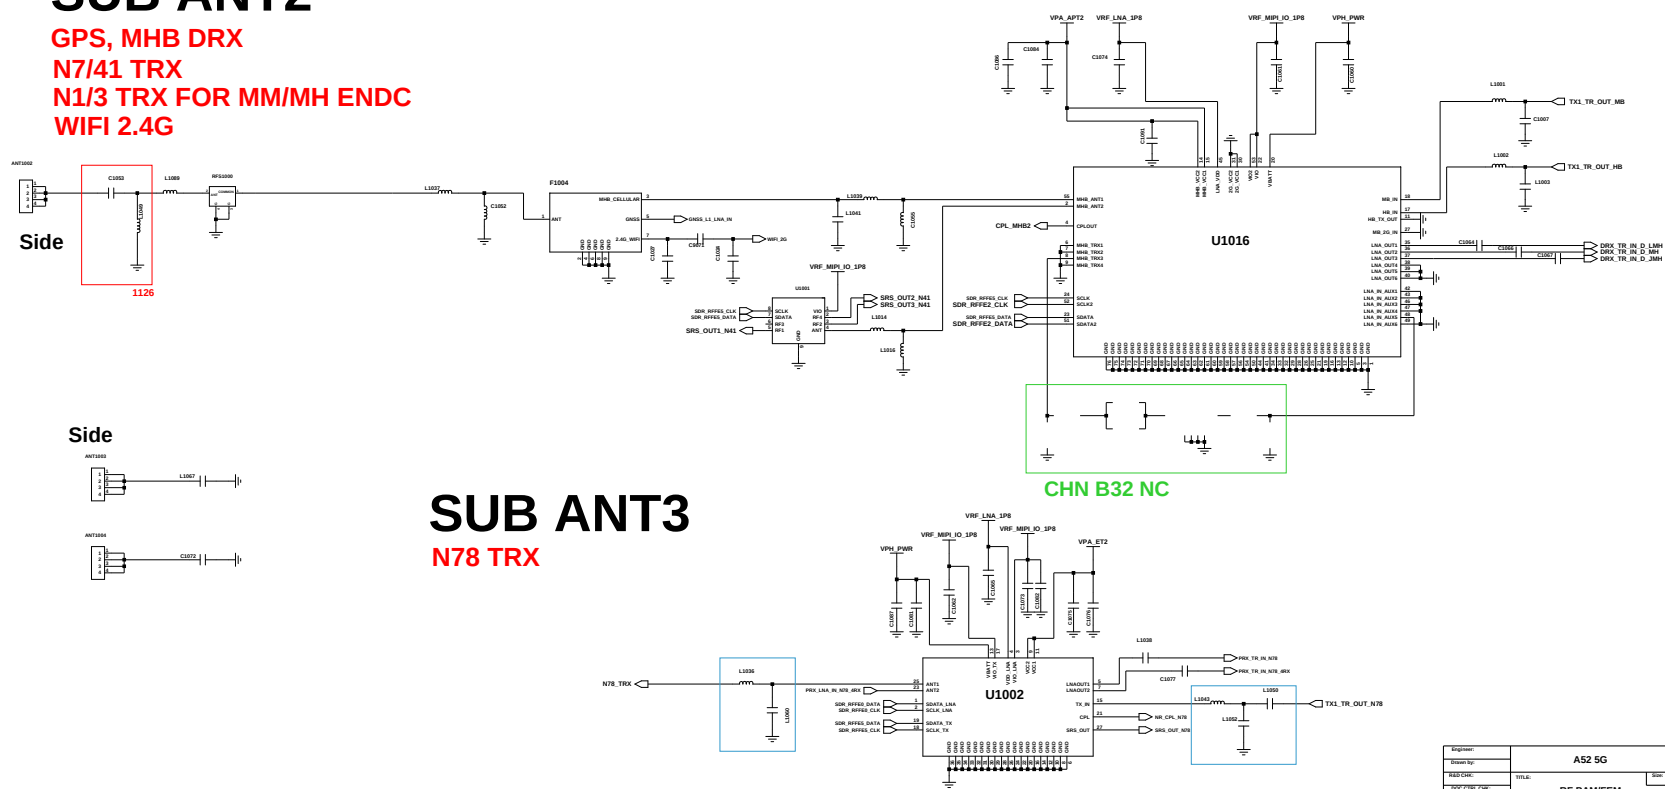


SUB ANT3

N78 TRX


Engineer:	A52 5G		
Drawn by:			
RED CHK:	TITLE:	Rev:	
DOC CTRL CHK:	RF PAM/FEM		
WFO MGR/AT CHK:			
QA CHK:	REV:	Drawing Number:	

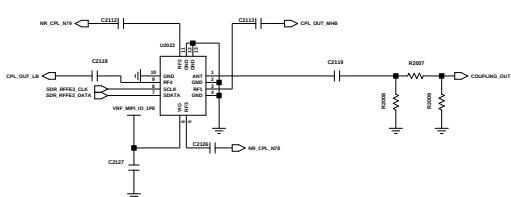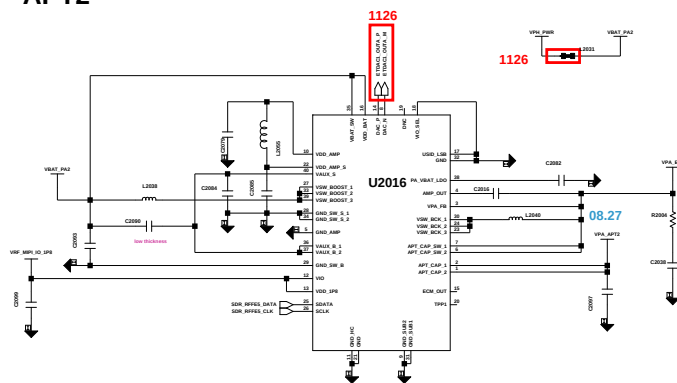

MST

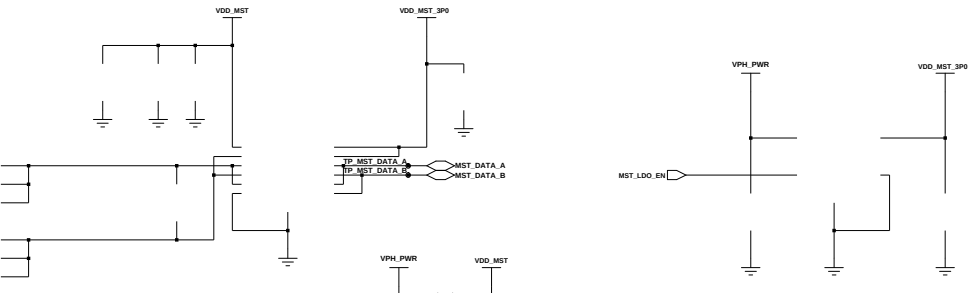



GND CCP



The figure contains two circuit diagrams for the NFC module. Both diagrams show a power supply section with VREG_S2A and SP9064 connected to VDD_NFC_IO_1P8. The input of the U3005 chip is connected to this supply. The output of U3005 is connected to a signal line. In the left diagram, the signal line is connected to C3037, which is connected to GND. The input of U3005 is also connected to C3036, which is connected to GND. The input of U3005 is also connected to NFC_LDO_EN. In the right diagram, the signal line is connected to C3040, which is connected to GND. The input of U3005 is also connected to C3039, which is connected to GND. The input of U3005 is also connected to NFC_ESE_EN.

The schematic diagram illustrates the electrical connections for the U9087 module. It includes several power supply rails at the top: VPH_PWR, VDD NFC_ESE_1P8, VDD NFC_SM1_1P8_3P6, and VDD NFC_IO_1P8. These are connected to various capacitors (C3M05, C3M03, C3M04, C3M06, C3M07, C3M08) and inductors (L3012, L3013). The U9087 chip has multiple pins for power, ground, and signals. Key signal pins include NFC_SCL_1P8, NFC_SDA_1P8, TP_NFC_FIRM, TP_NFC_IRQ, TP_NFC_CLK_REQ, TP_NFC_SWO, TP_TCK, TP_SWIO0, NFC_SWP1, NFC_SWO2, EXGPIO, IFTX0, IFTX1, TXI, RXIN, RXOUT, SPS_MOSI, SPS_CSIN, SPS_SCK, SPS_MISO, ISO7B16_RST, ISO7B16_CLK, and ISO7B16_SIO. The right side of the diagram shows external components like capacitors C3049, C3050, C3051, C3055, C3053, C3054, C3056, and resistors R3001, R3002, R3003, along with antenna connectors ANT300 and ANT301.





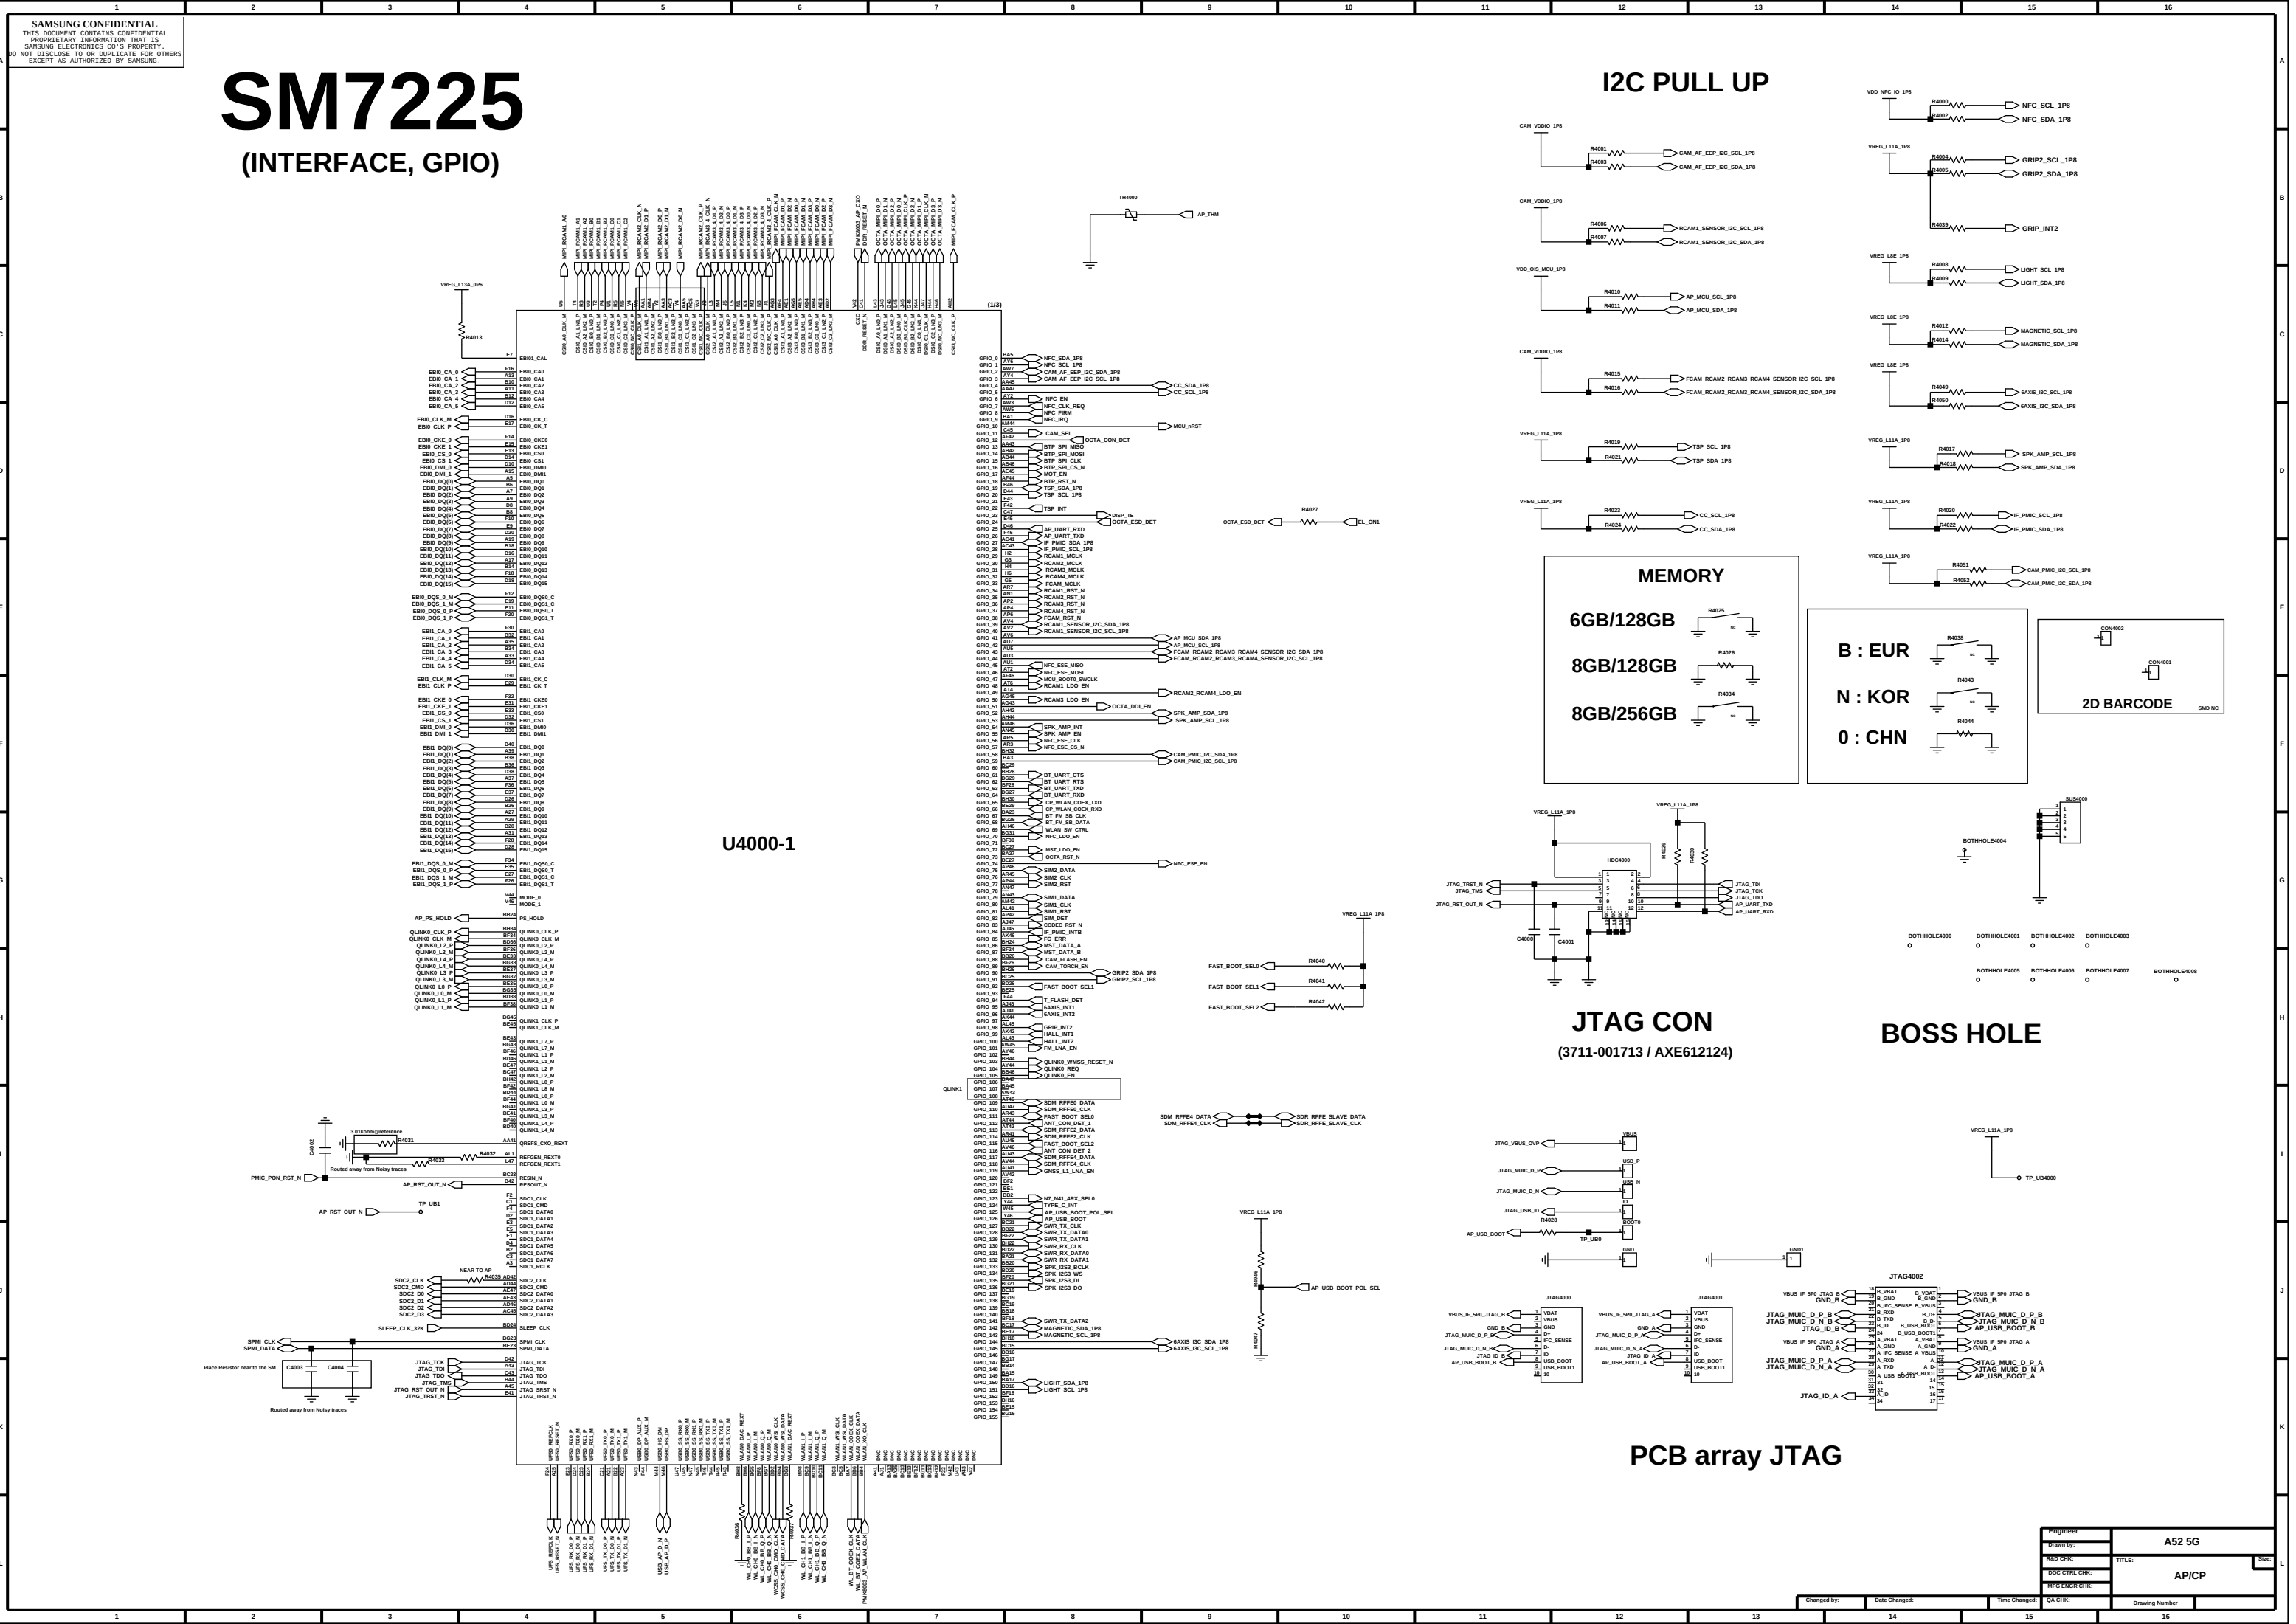



Engineer:	A52 5G	
Drawn by:		
R&D CHK:	TITLE:	Size:
DOC CTRL CHK:	AP/CP/uMCP	
MFG ENGR CHK:		


PMIC (PM6350/PM6150A)

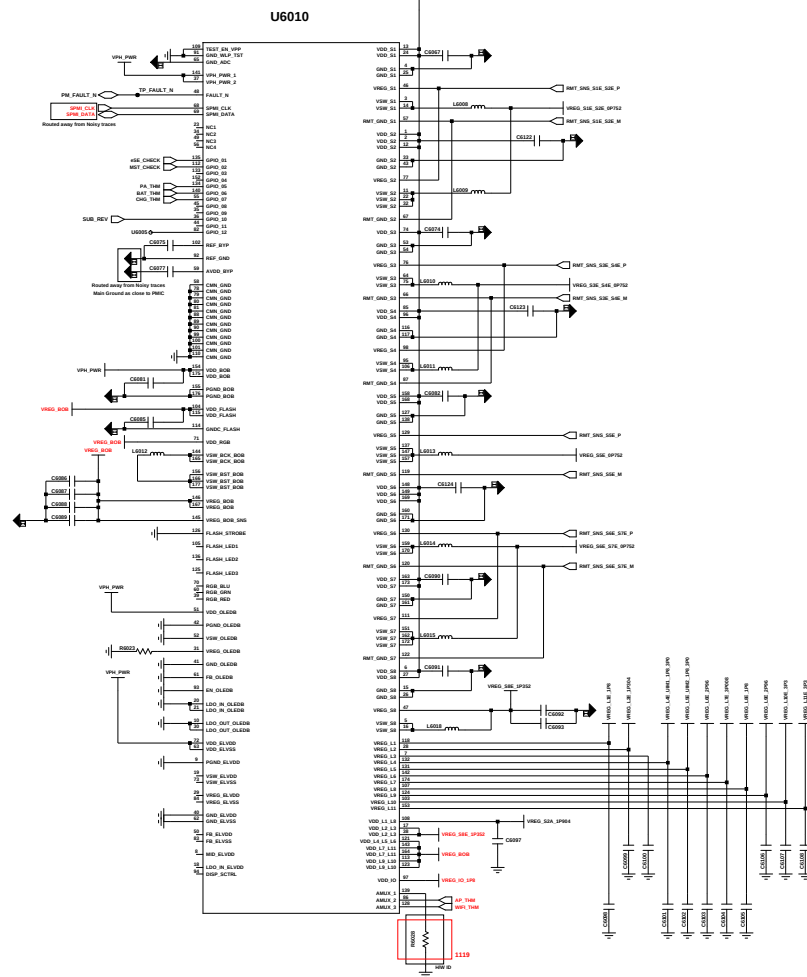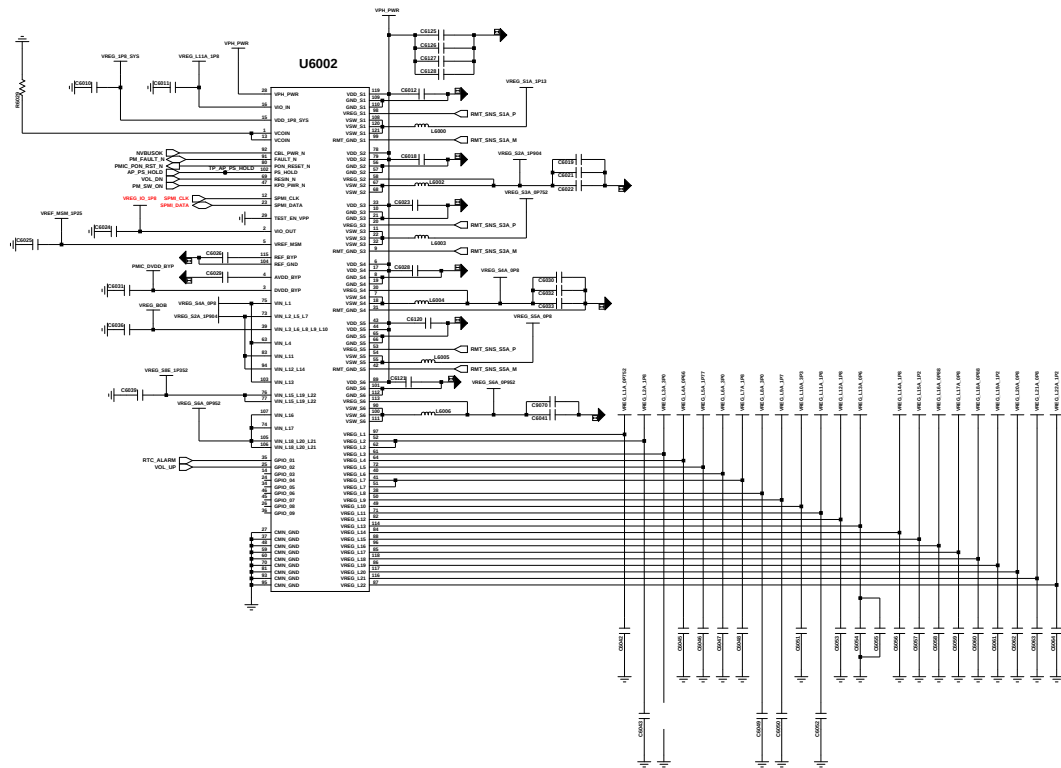

HW ID TABLE


HW ID	REV	VALUE	COMMENT
00	REV00	12K	
01	REV01	20K	
02	REV02	30K	
03	REV03	51K	
04	REV04	68K	
05		82K	
06		100K	
07		120K	
08		150K	
09		200K	

DIRECT CHARGER

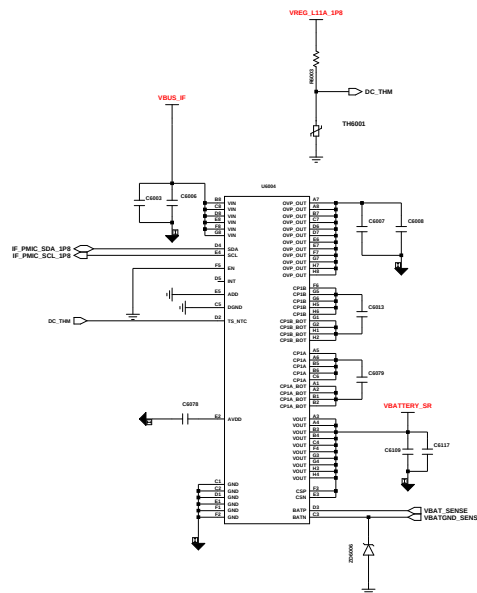


@REV02


IF PMIC

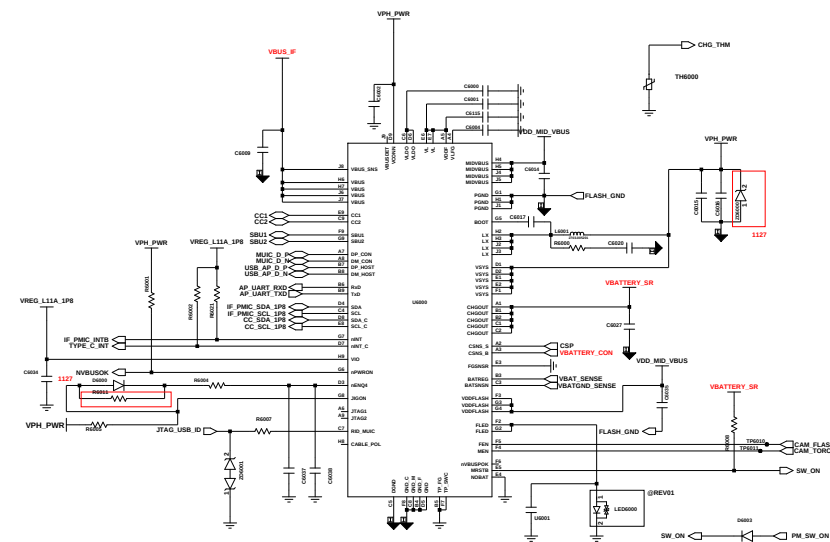

OVP

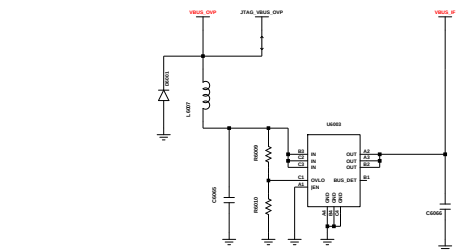


MOTOR

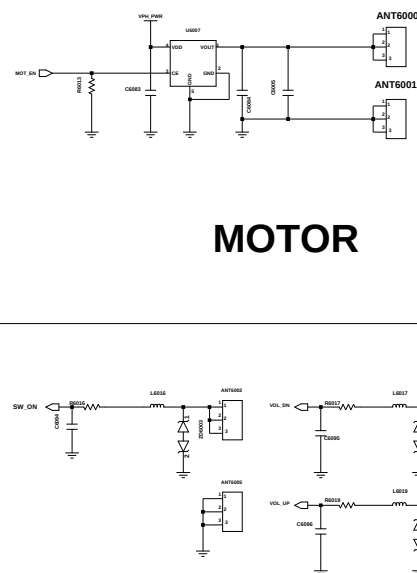



POWER & VOL KEY

CLOCK GEN

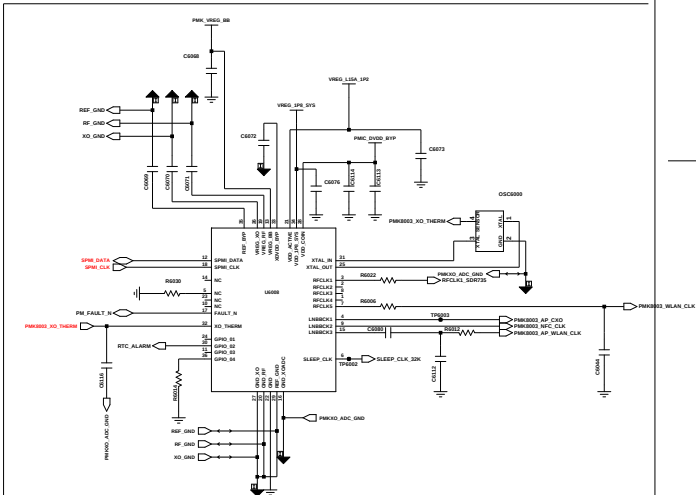



BATTERY CON

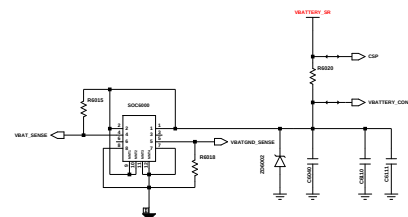

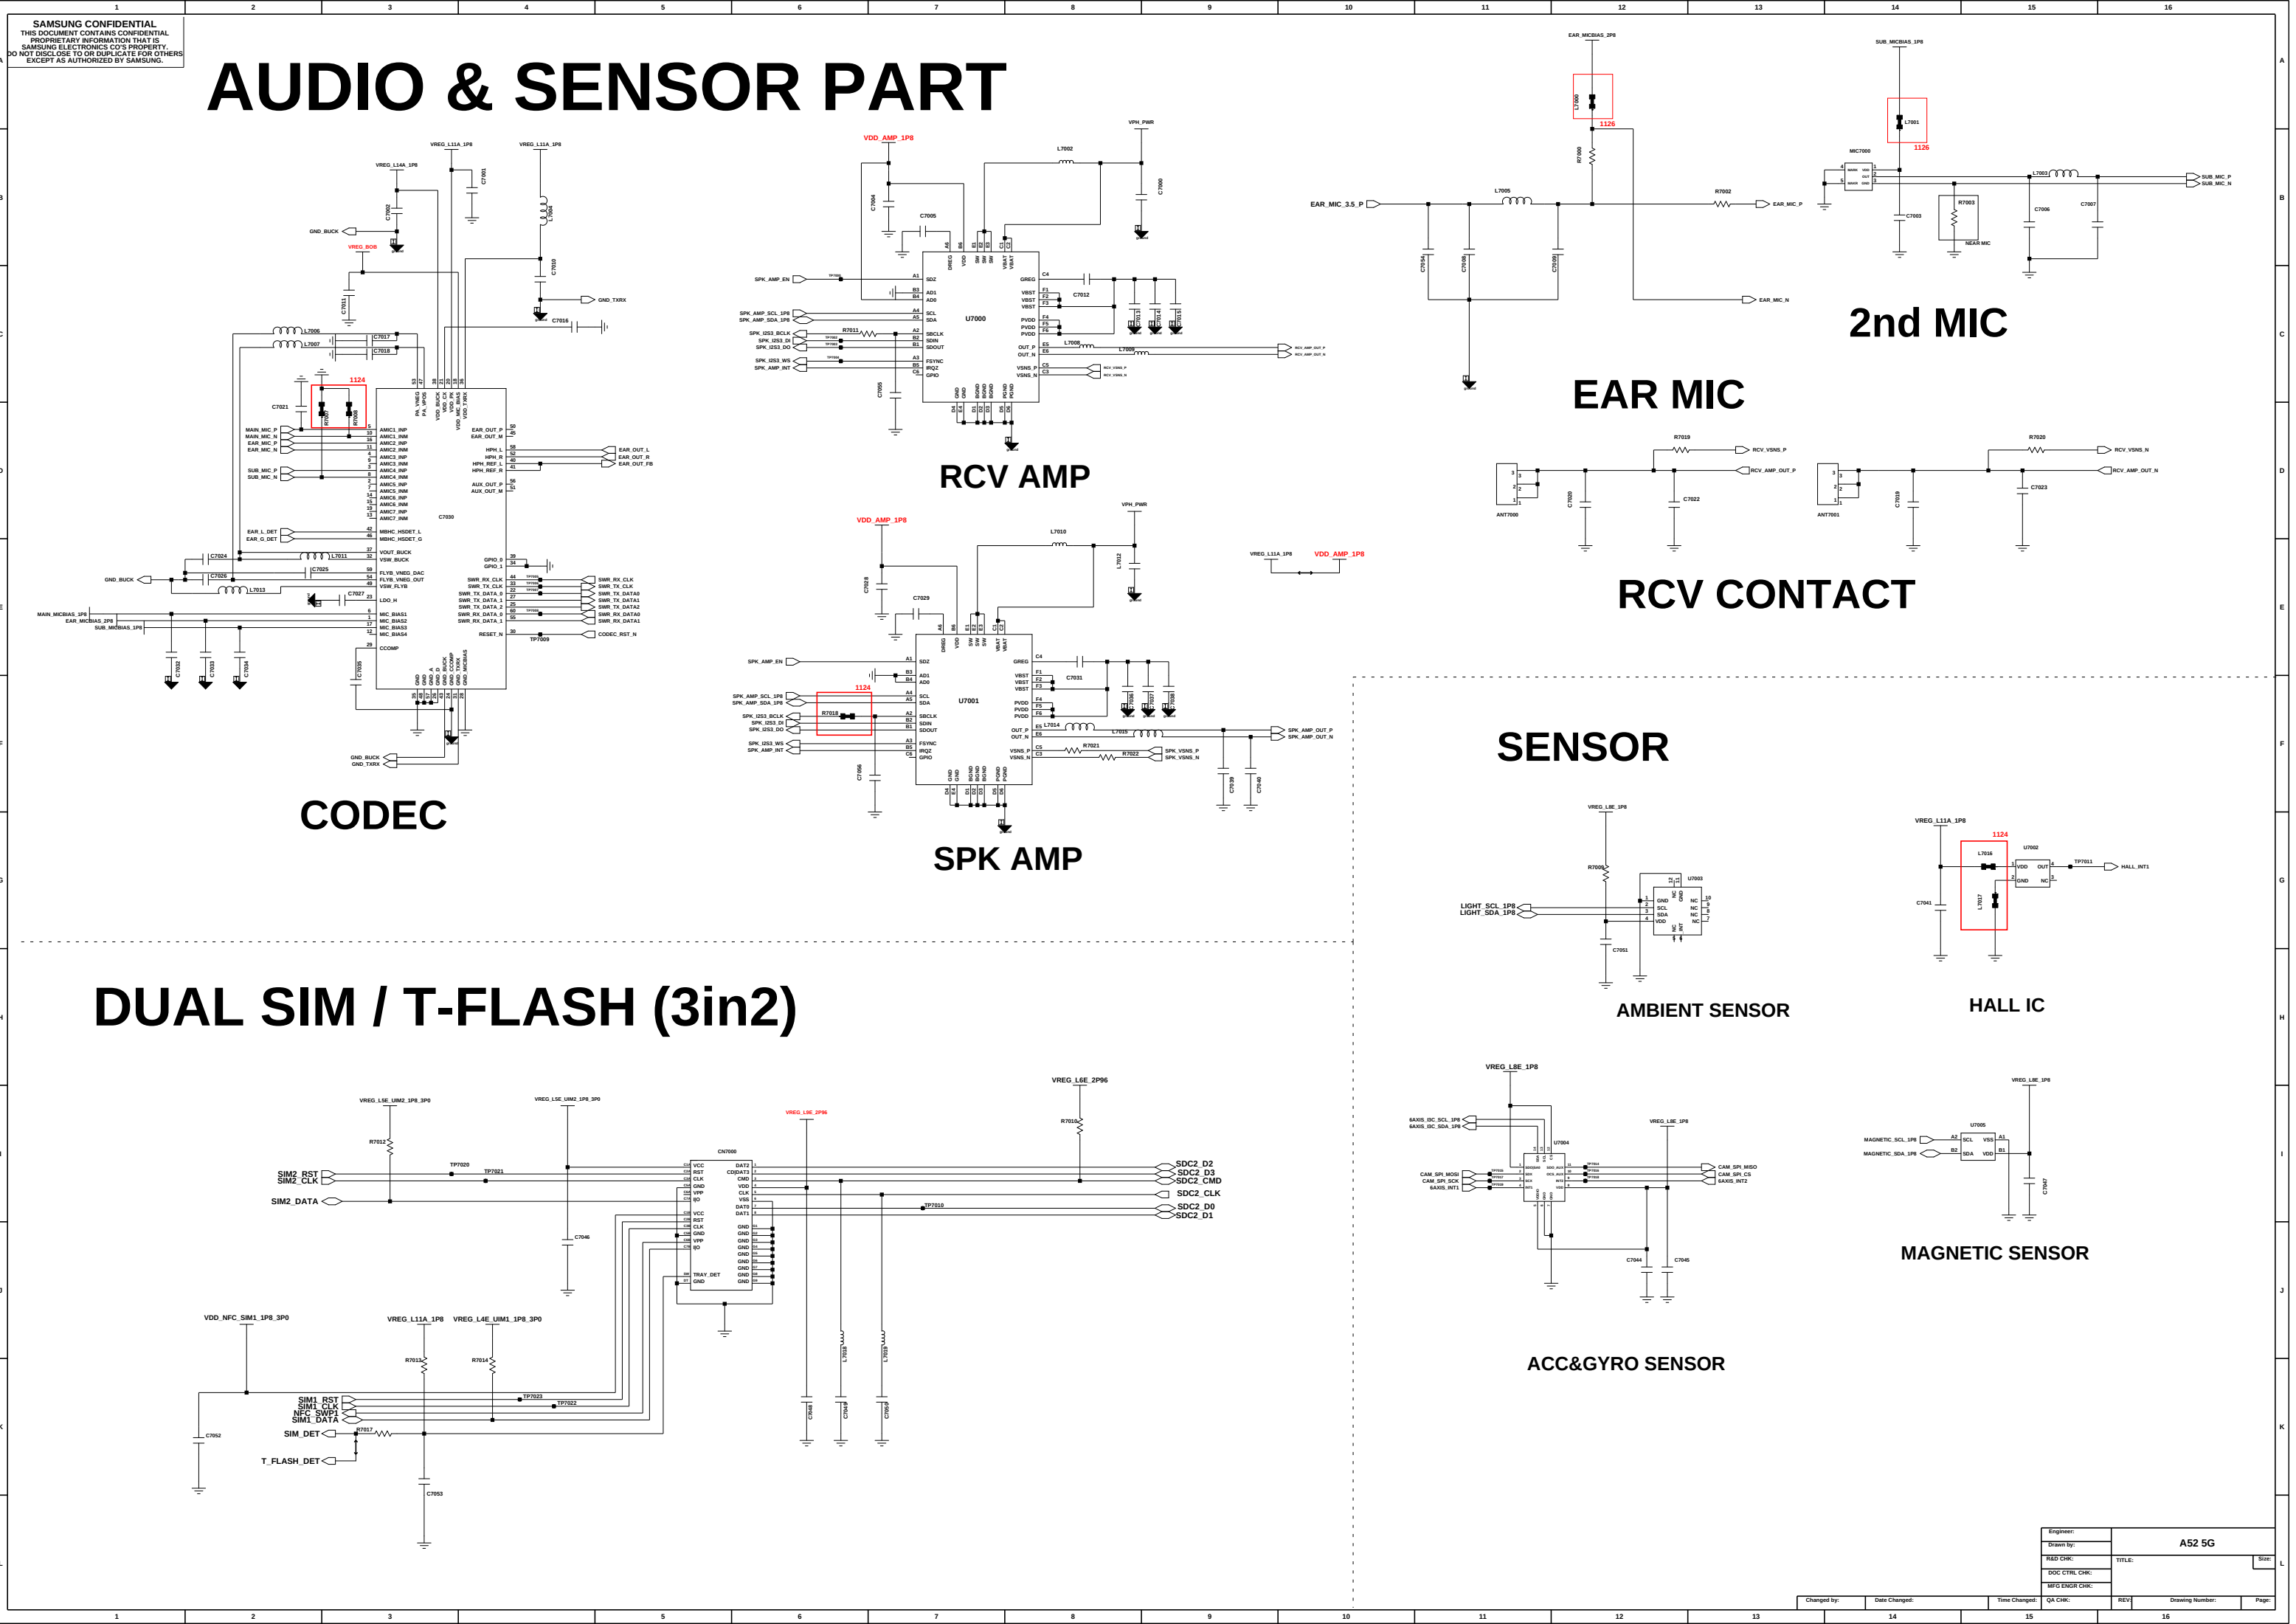

DUAL SIM / T-FLASH (3in2)

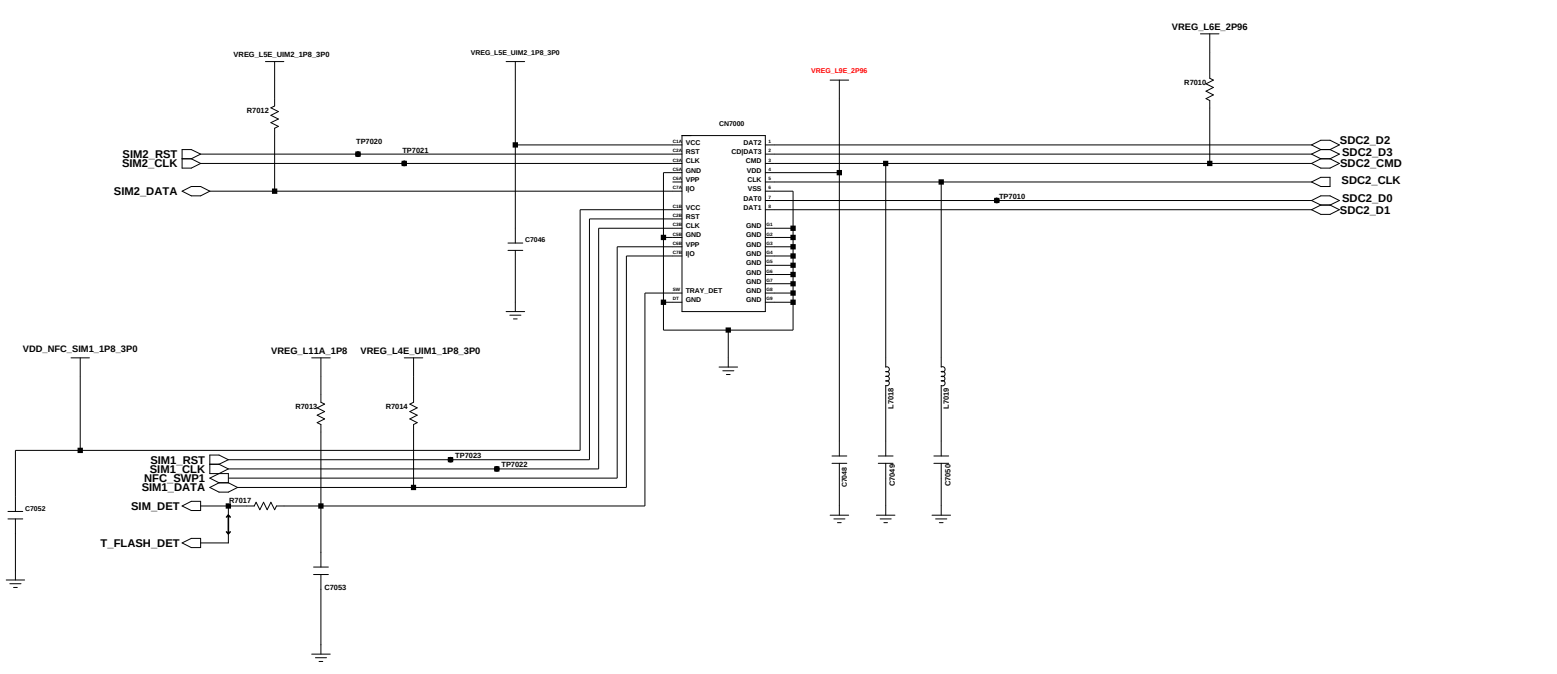



RCAM1_04M_01S(40PIN)



RCAM3_SUPER WIDE_8M CAMERA(30pin)	MIPI SWITCH (RCAM3,RCAM4)
-----------------------------------	---------------------------



						CAMERA	
						DOC CTRL CHK:	
						INFO ENDR CHK:	
						QA CHK:	
						REV:	
						Drawing Number:	
						78	

