

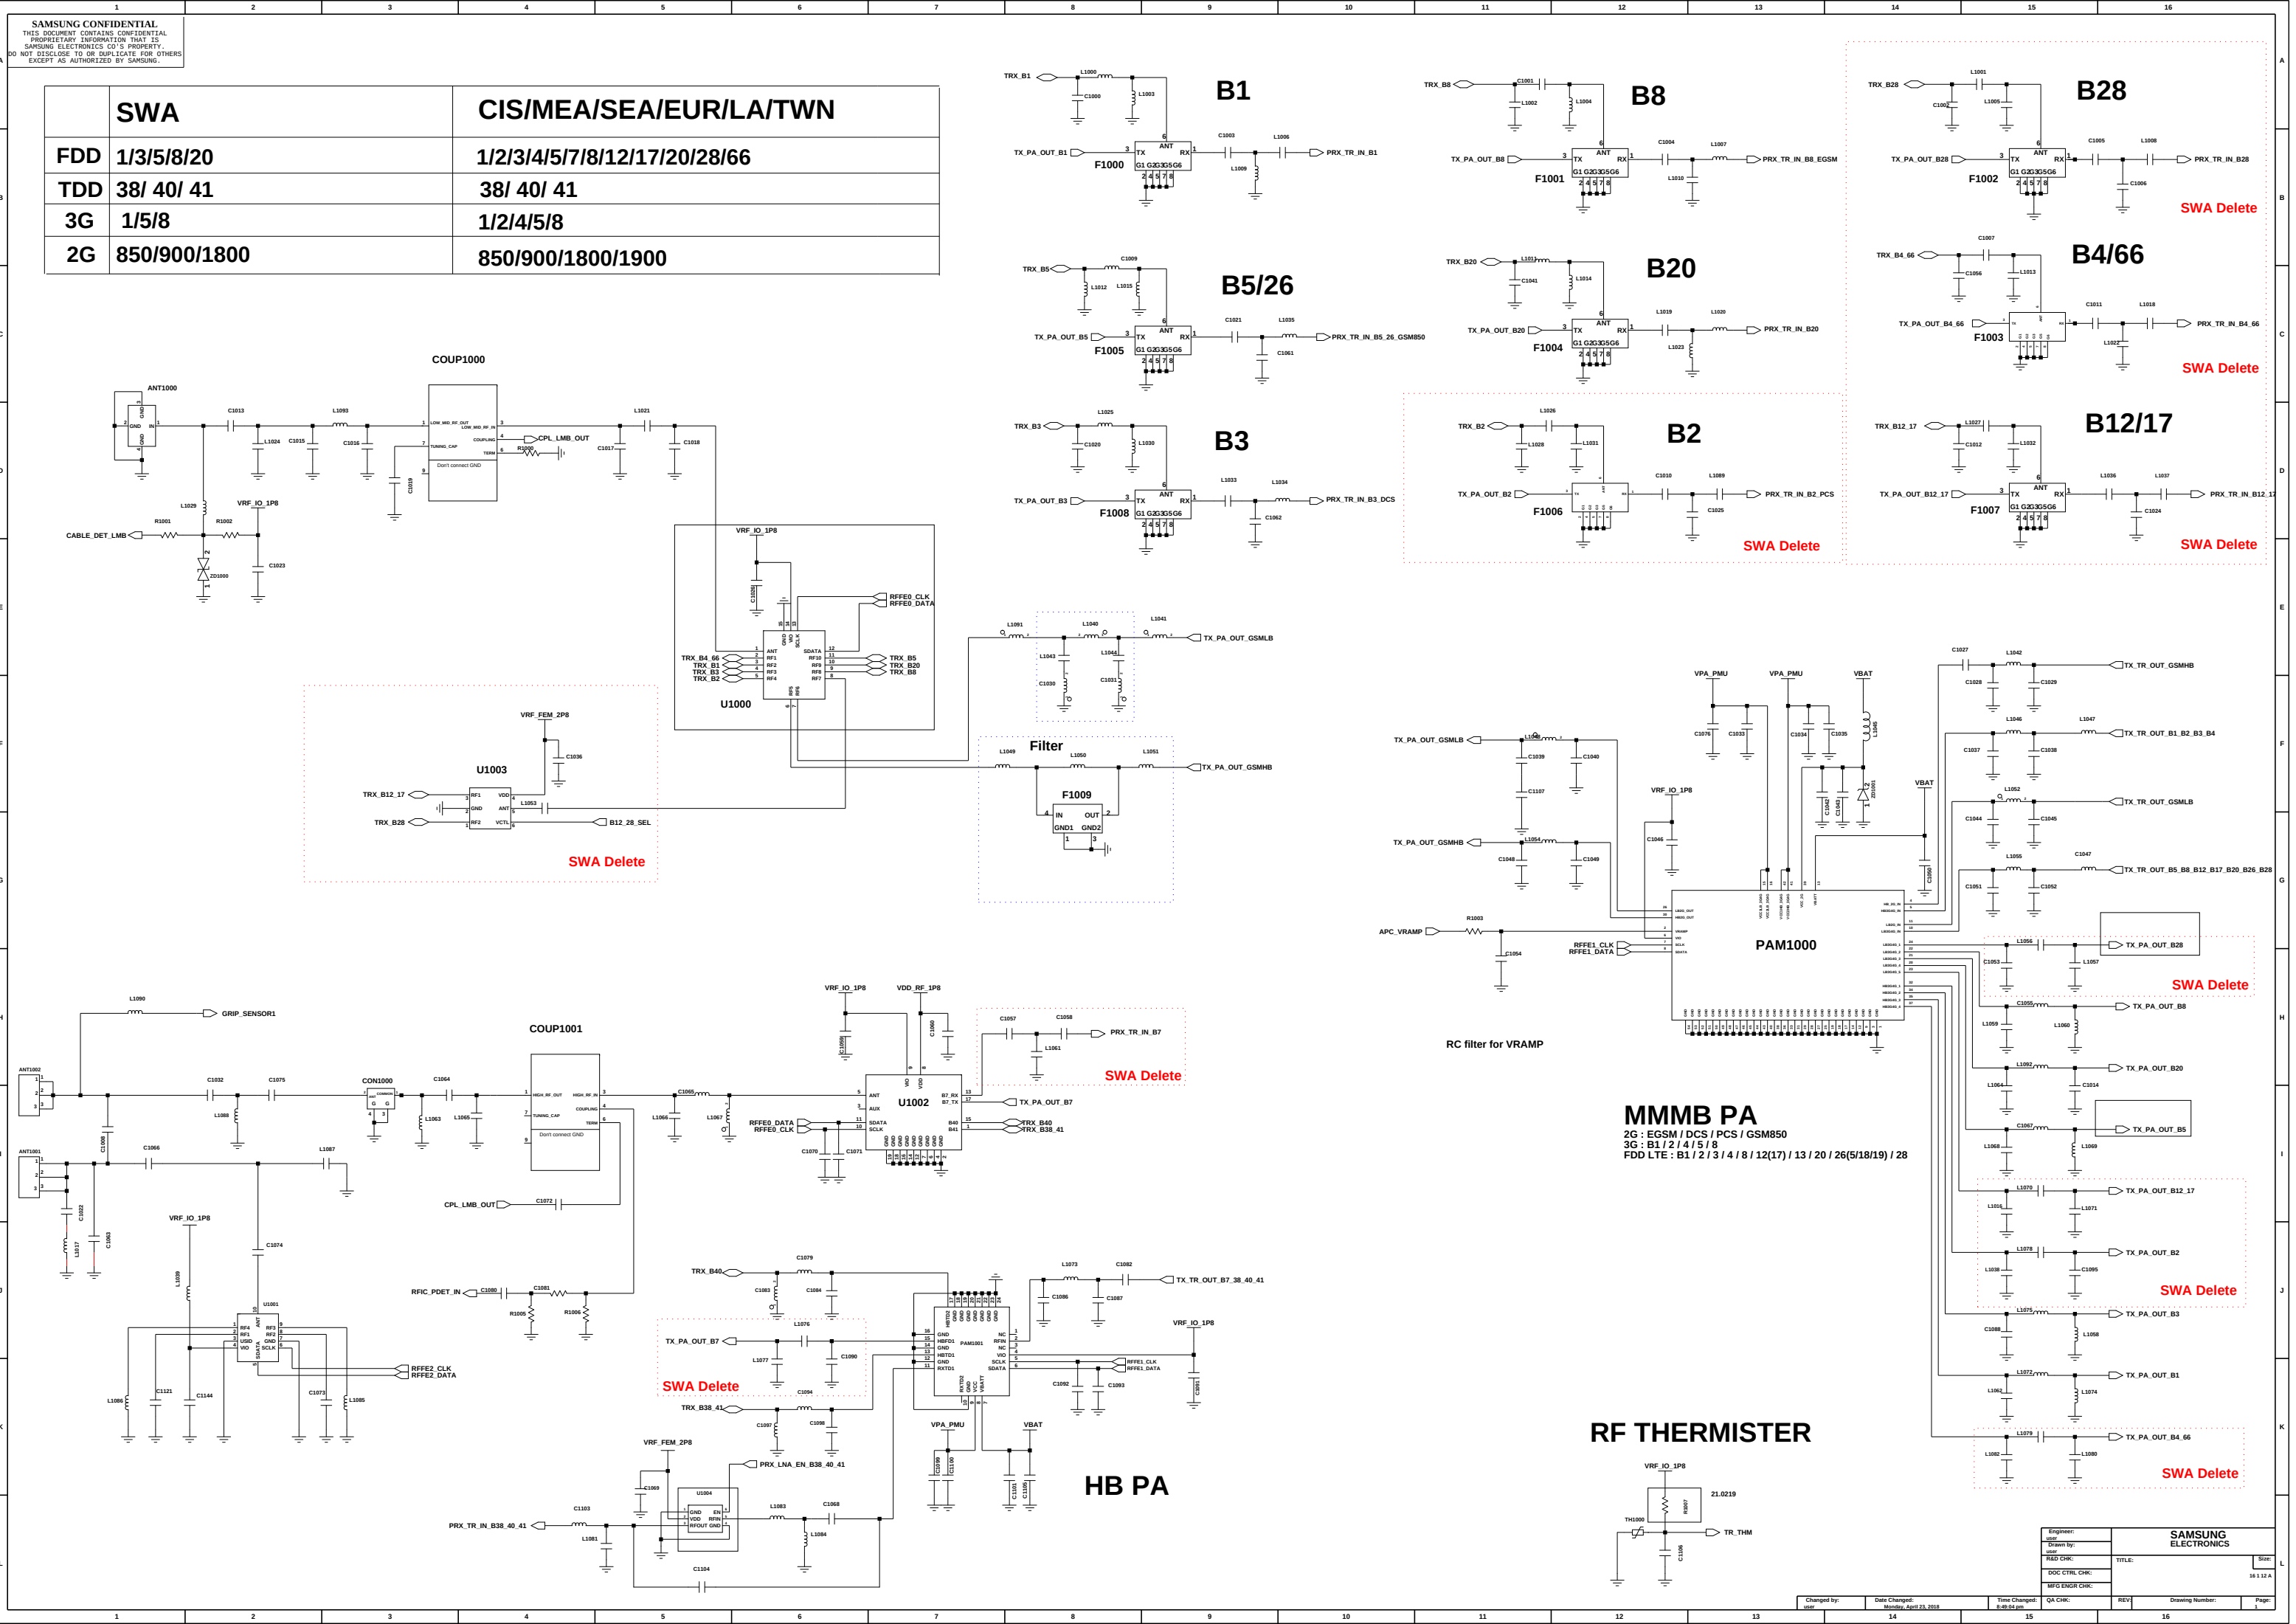

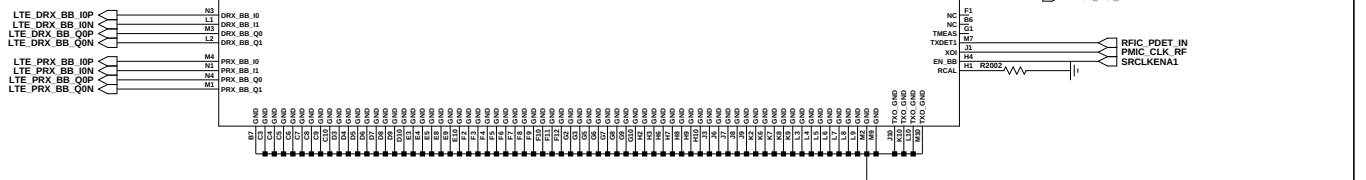
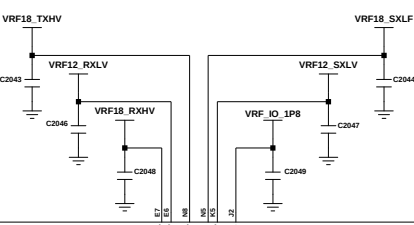

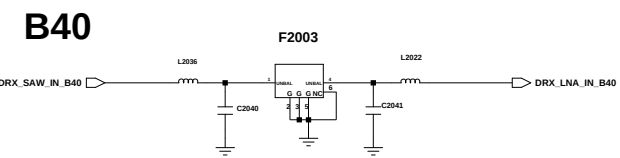
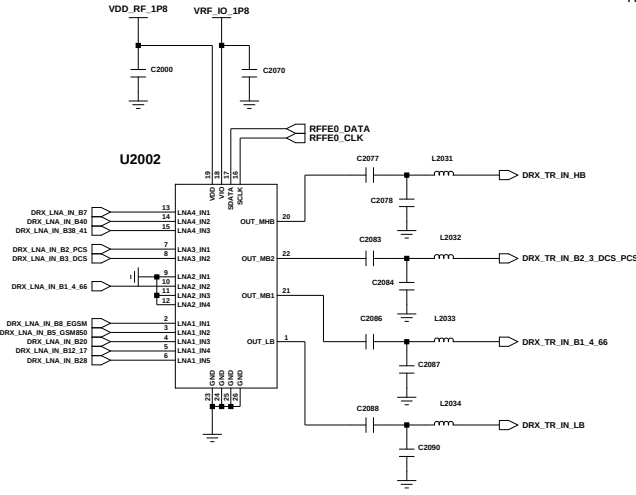





SN-E325F/E225F_REV02



1	2	3	4	5	6	7	8	9	14	15	16
---	---	---	---	---	---	---	---	---	----	----	----

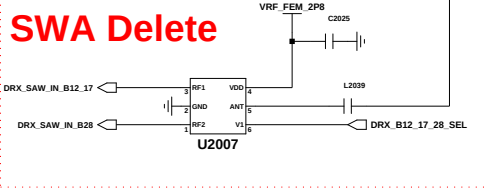


The schematic shows two ground symbols, each consisting of three horizontal lines of decreasing width from top to bottom. A single horizontal line connects the top of both symbols.




Changed by: user93	Date Changed:	Time Changed:	QA CHK:	REV:	Drawing Number:	Page: 3/7
	14	15	16			

AP_(MTK_MT6769V_11*11.8)


UCP4000-1

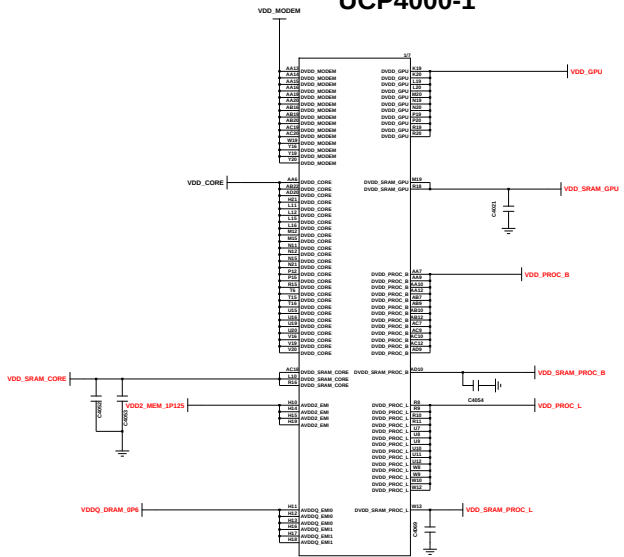


UCP4000-2

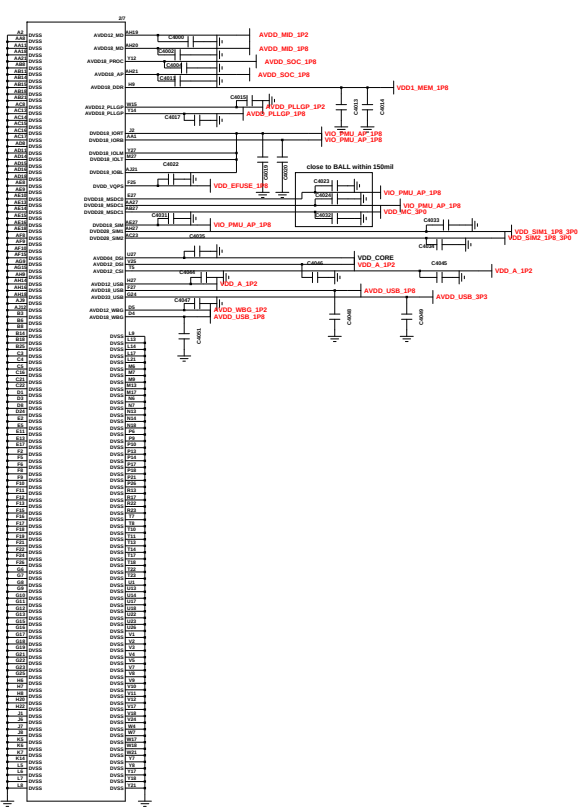


UCP4000-3

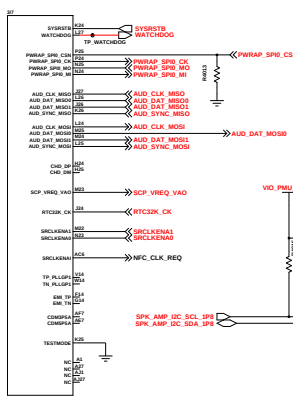


UCP4000-4

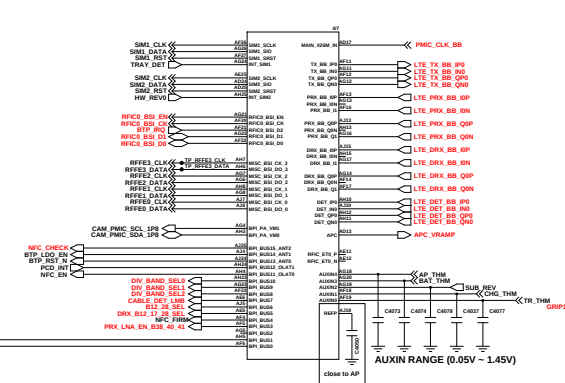


UCP4000-5

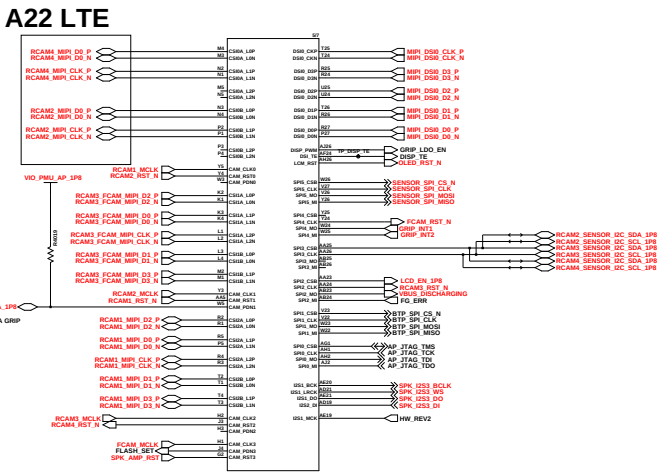



UCP4000-6

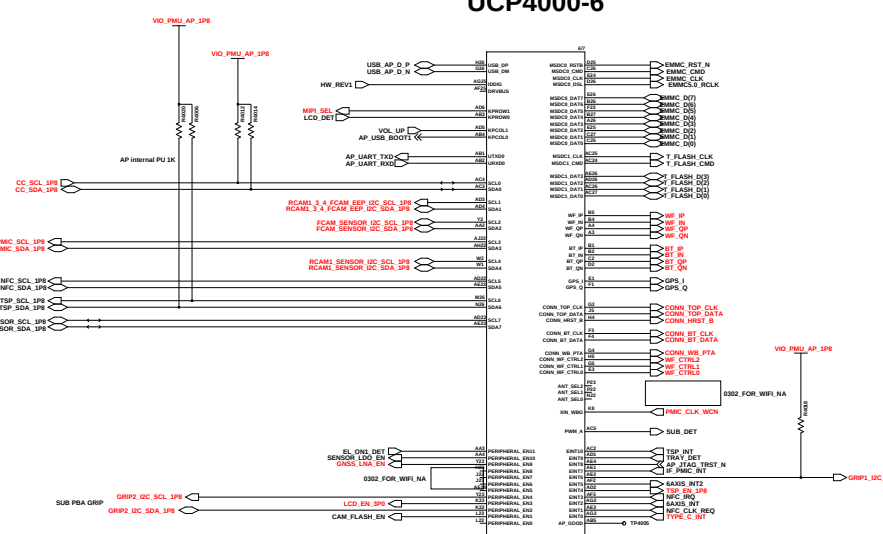

UCP4000-7

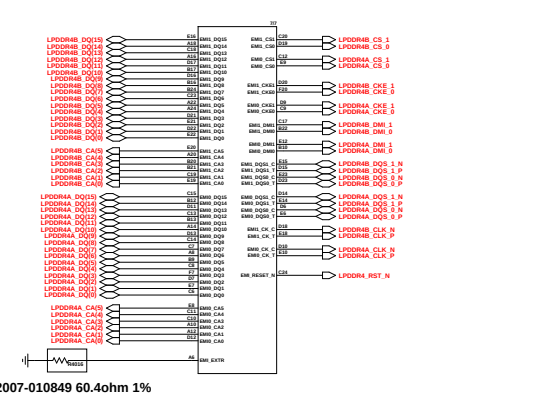


I2C Pull-up Register

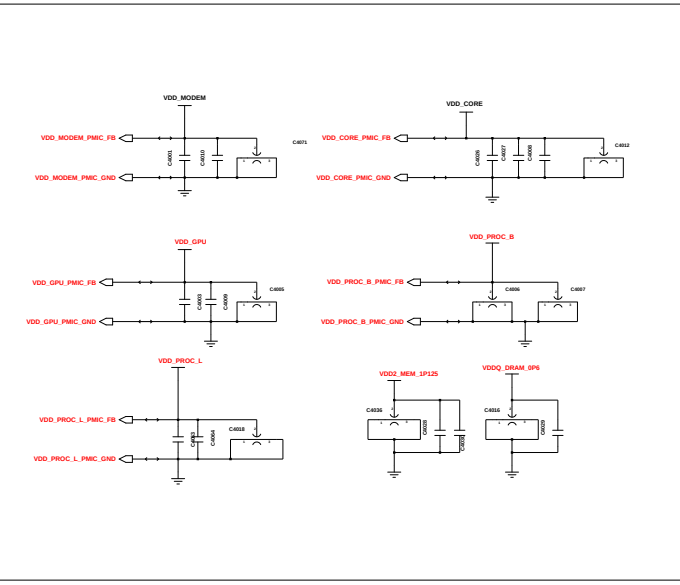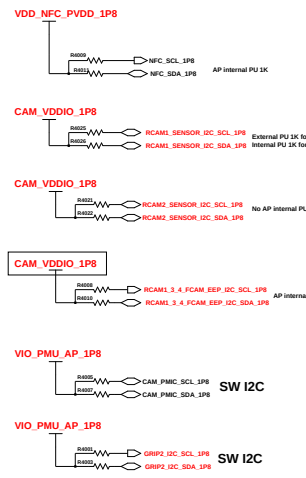



PCB JTAG

AP JTAG

Thermister







NFC OPTION

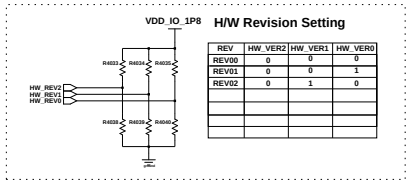

REV	HW	VER2	HW	VER1	HW	VER0
REV01	0	0	0	0	0	0
REV02	0	0	1	0	0	0




Engineer:	PMIC/IF PMIC/eMMC				
Drawn by:					
RAD CHK:				TITLE:	Scale:
DOC CTRL CHK:					
INFO ENGGR CHK:					
QA CHK:	REV:	Drawing Number:	Page: 5/2		

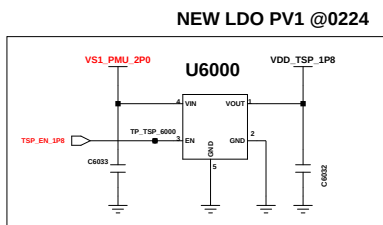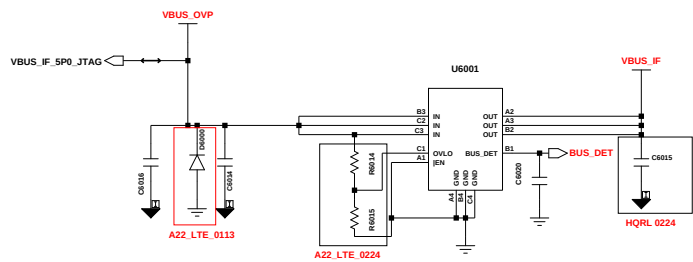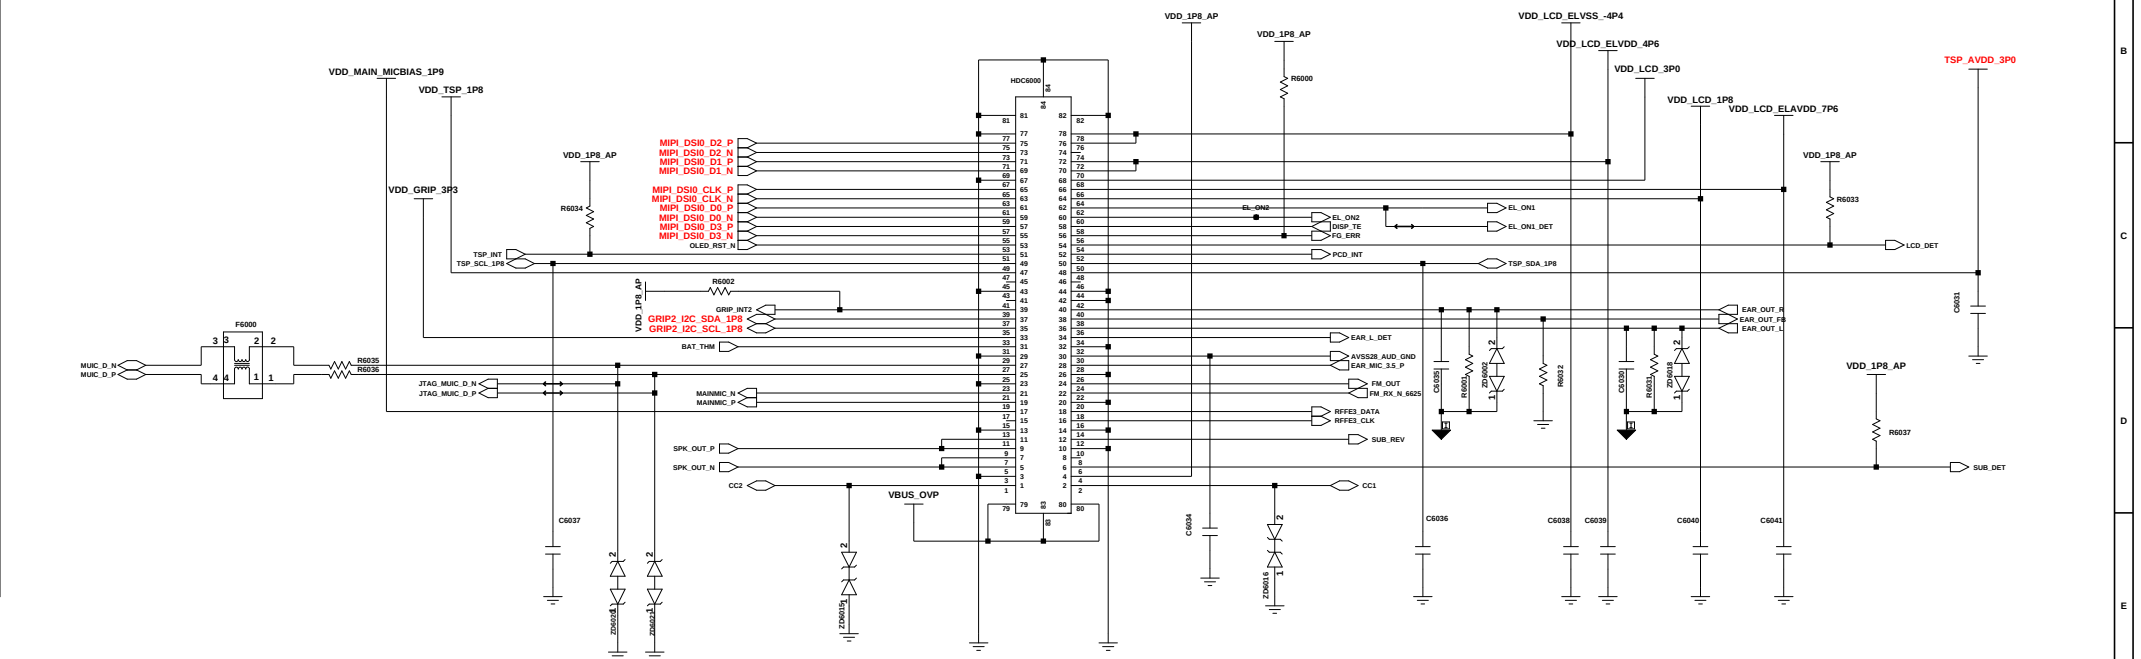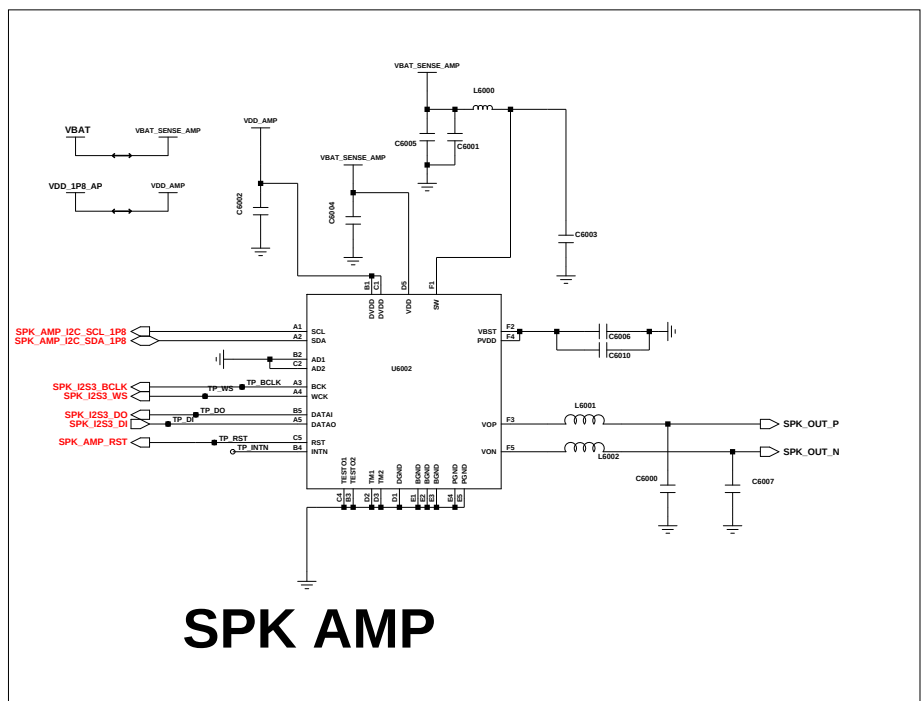


MAIN FPCB(78PIN) DISPLAY(6.4" HD+) & SUB PBA


AUDIO

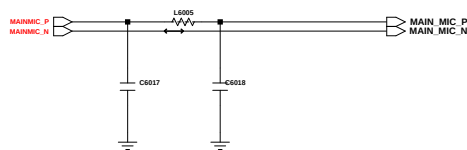


MAIN MIC

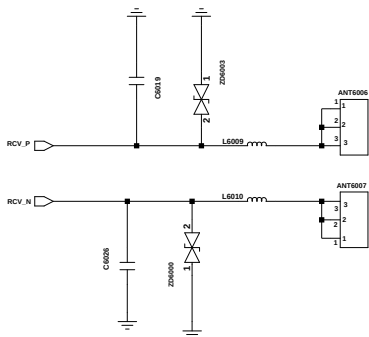

RCV CONTACT

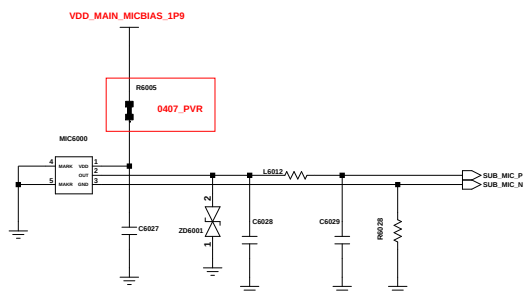

Sub MIC

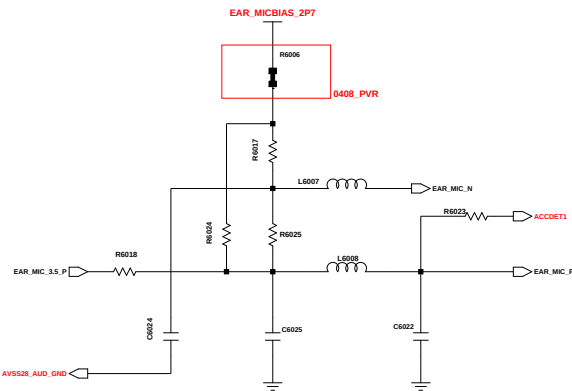

EAR MIC

Engineer:	AUDIO, SIM/SD, SHIELD CAN				
Drawn by:					
R&D CHK:				TITLE:	Size:
DOC CTRL CHK:					
MFG ENGR CHK:					
QA CHK:	REV:	Drawing Number:	Page: 6/7		





2D BARCODE



SM-M325F/FV/M225F/FV
REV02


	SWA	CIS/MEA/SEA/EUR/LA/TWN
FDD	1/ 3/ 5/ 8/ 20	1/ 2/ 3/ 4/ 5/ 7/ 8/ 12/ 17/ 20/ 26/ 28/ 66
TDD	38/ 40/ 41	38/ 40/ 41
3G	1/ 5/ 8	1/ 2/ 4/ 5/ 8
2G	850/ 900/ 1800	850/ 900/ 1800/ 1900

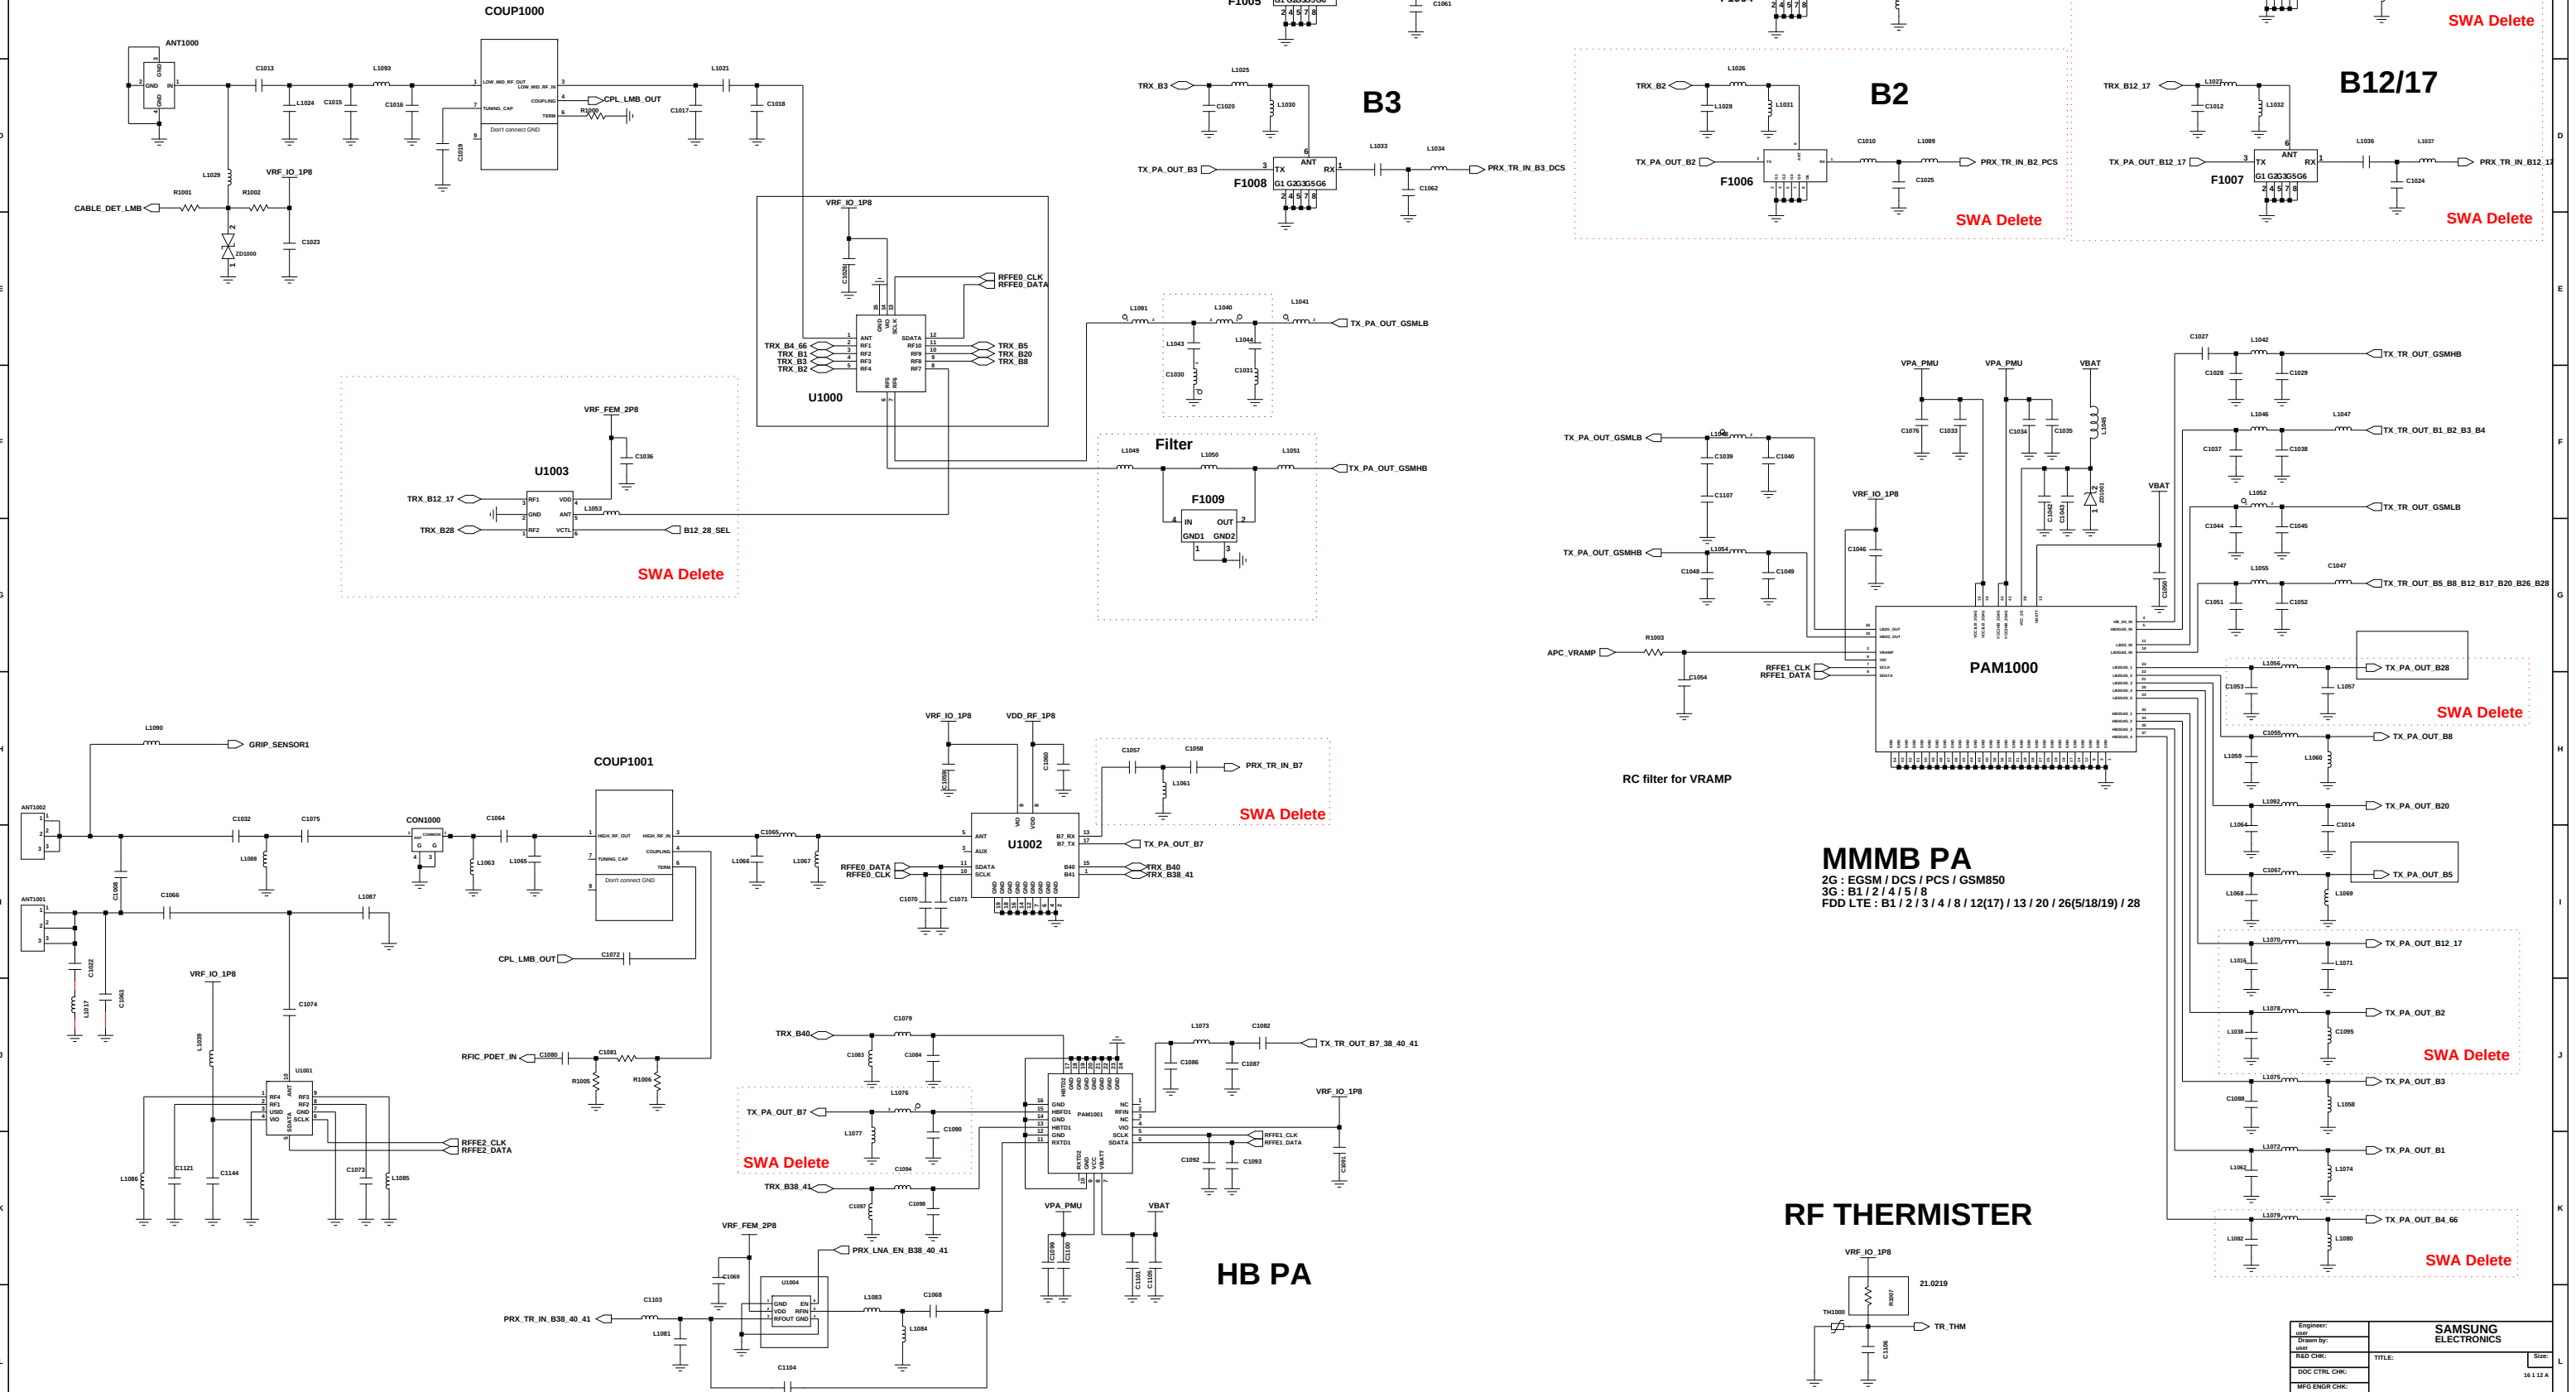

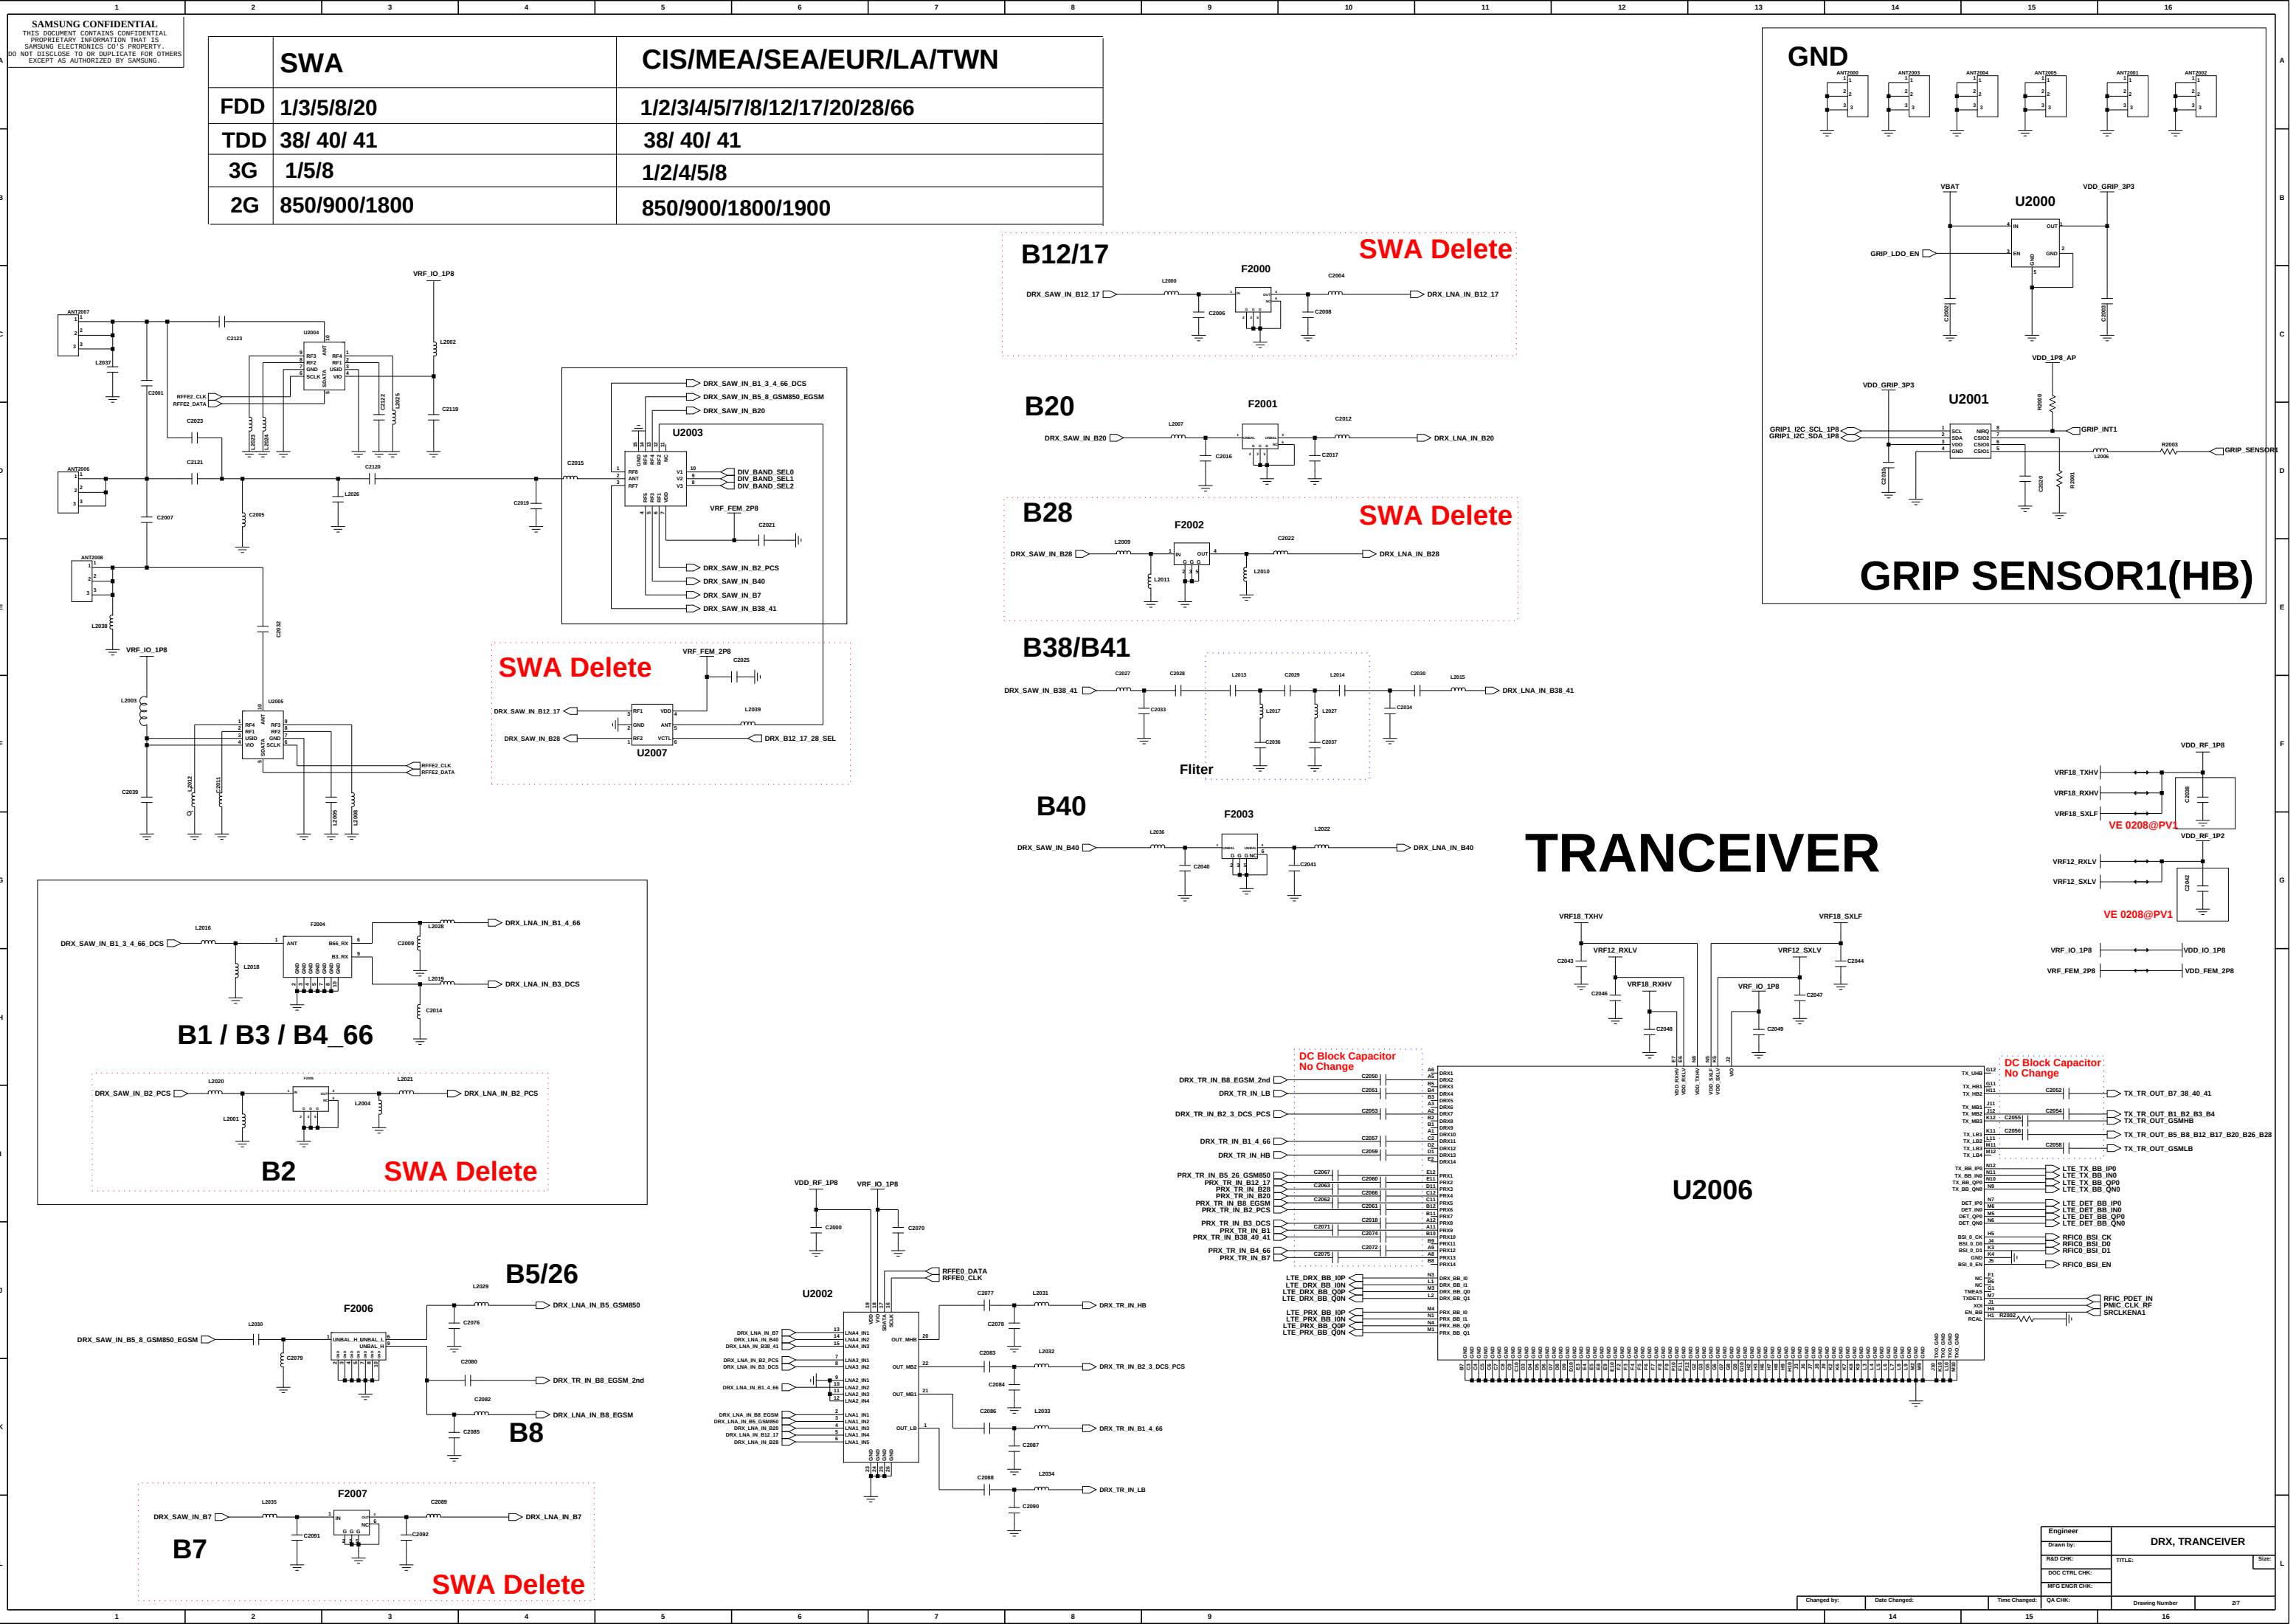


AP_(MTK_MT6769V_11*11.8)


UCP4000-1

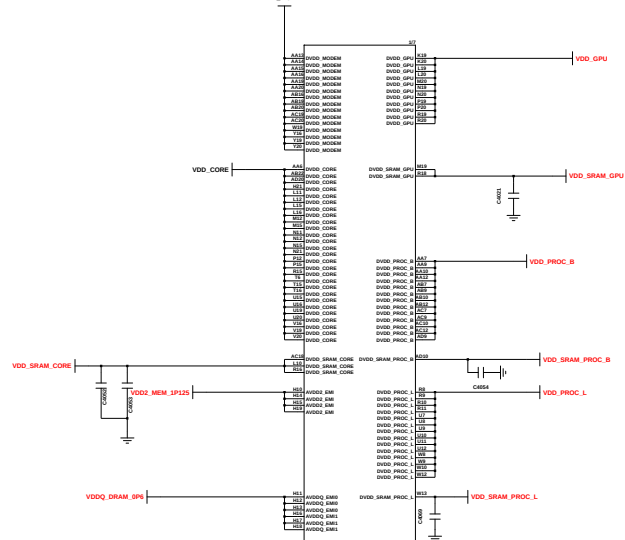


UCP4000-2

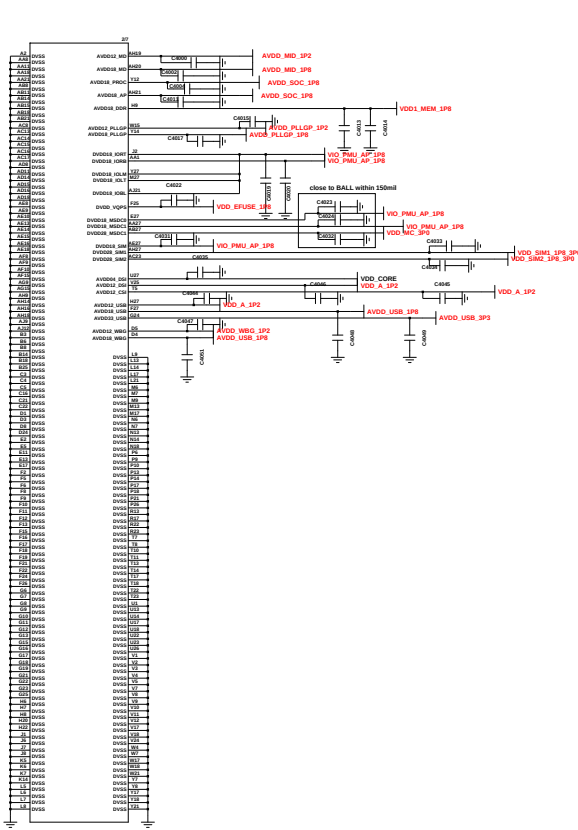


UCP4000-3

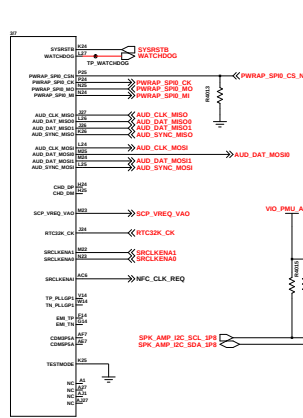


UCP4000-4

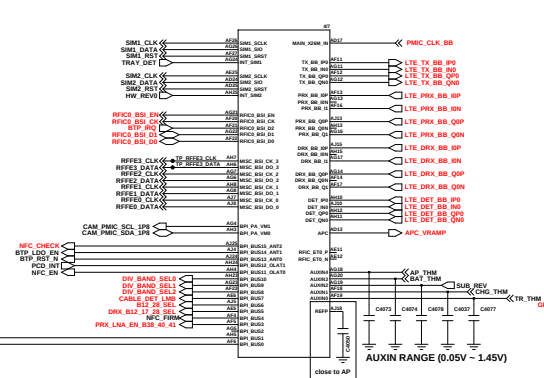


UCP4000-5

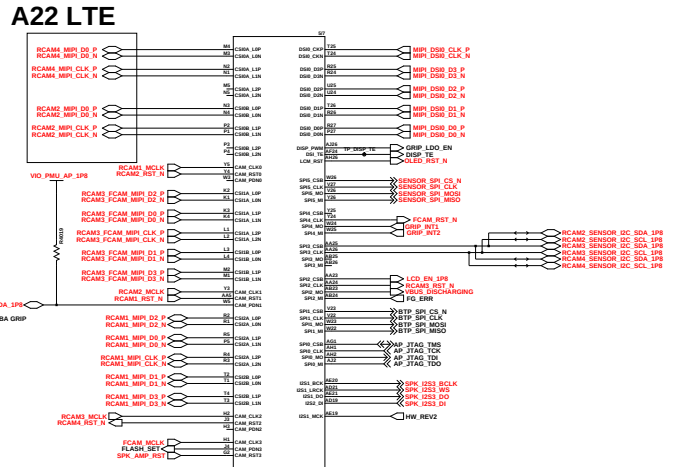



UCP4000-6

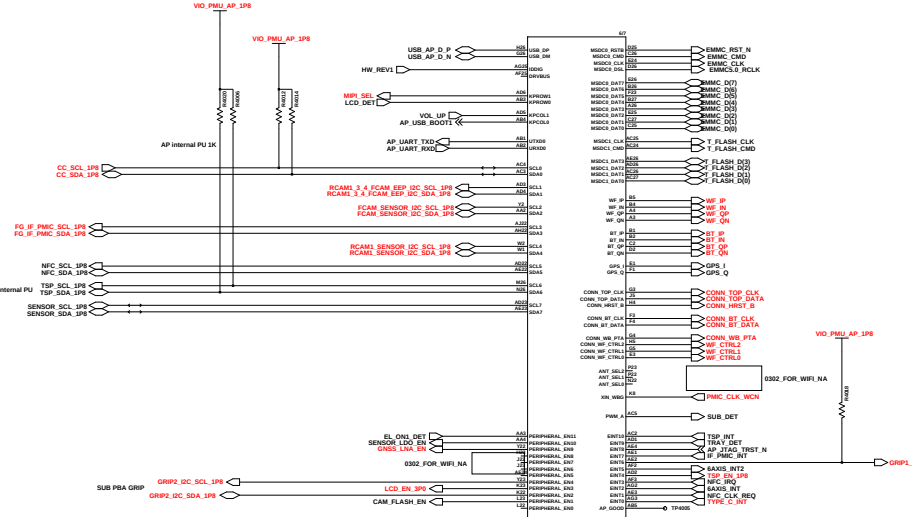


UCP4000-7

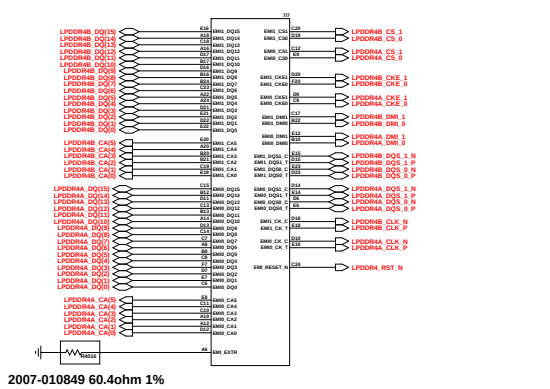

I2C Pull-up Register

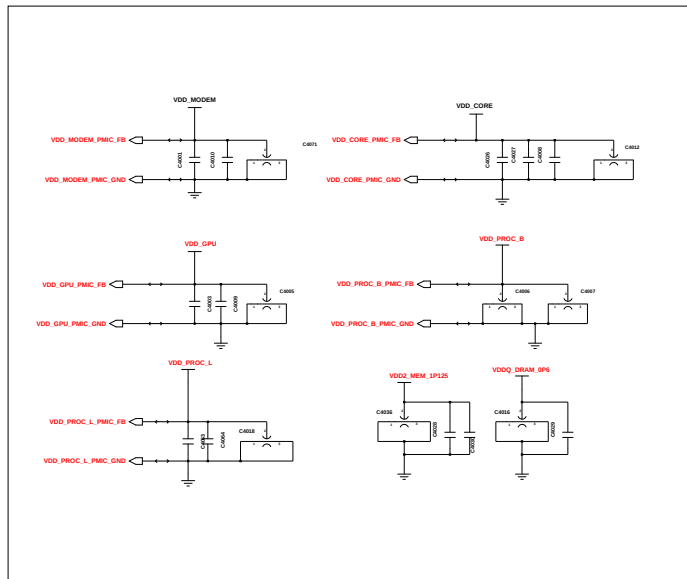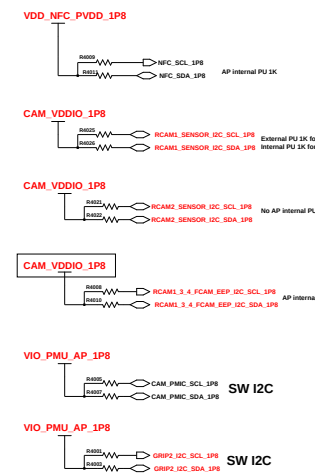


PCB JTAG


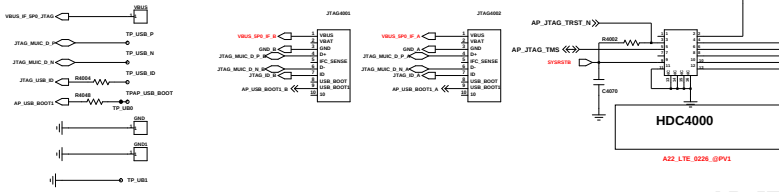


AP JTAG

Thermister






NFC OPTION

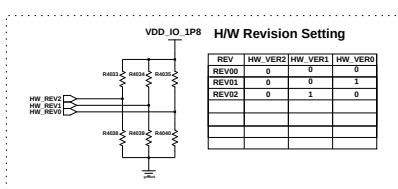




Changed by:	Date Changed:	Time Changed:	QA CHK:	REV:	Drawing Number:	Page: 47
-------------	---------------	---------------	---------	------	-----------------	----------

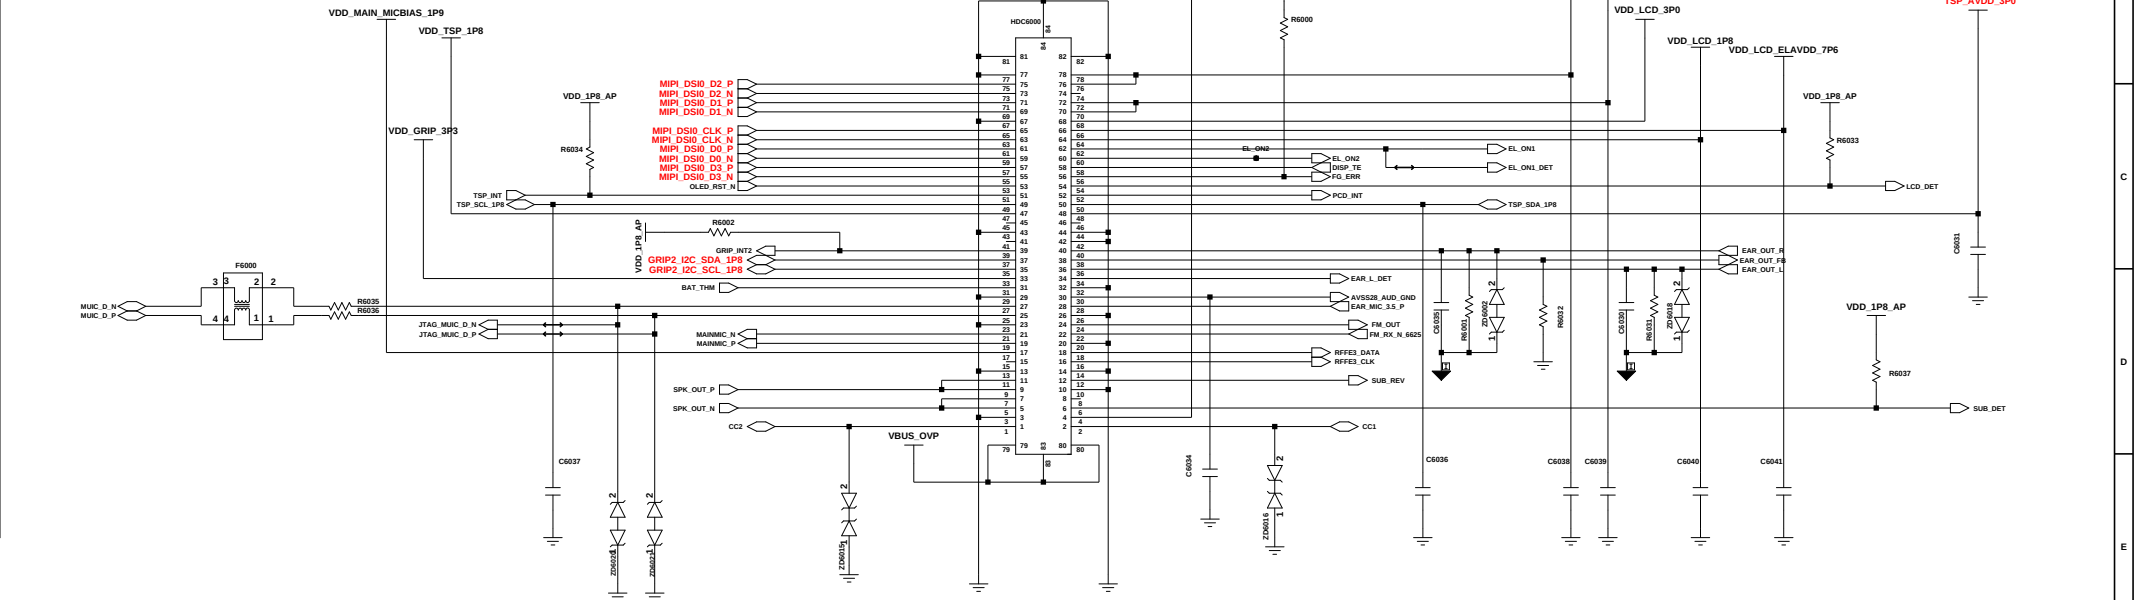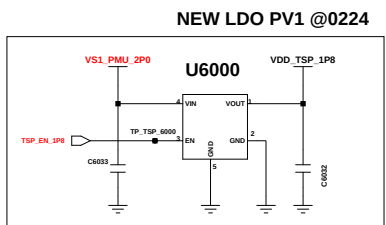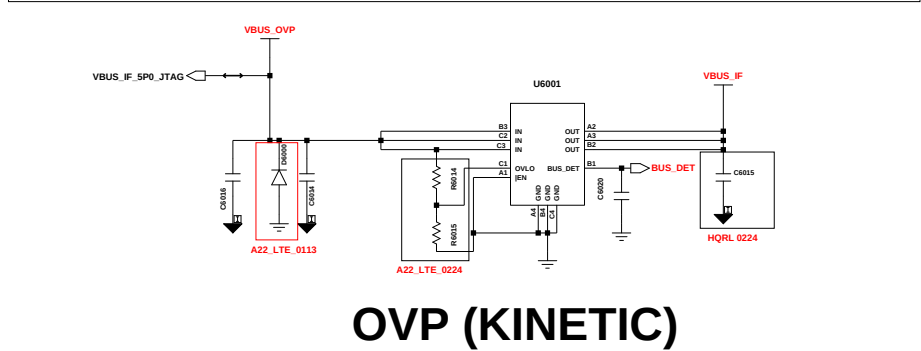


MAIN FPCB(78PIN) DISPLAY(6.4" HD+) & SUB PBA


AUDIO

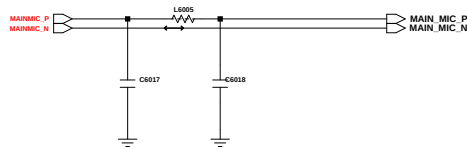


MAIN MIC

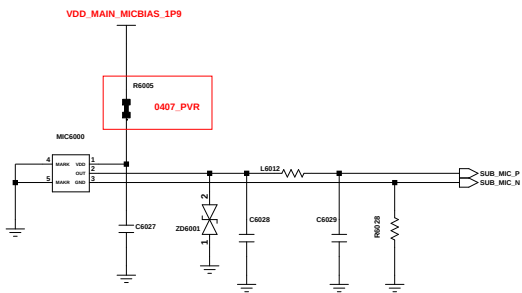

Sub MIC

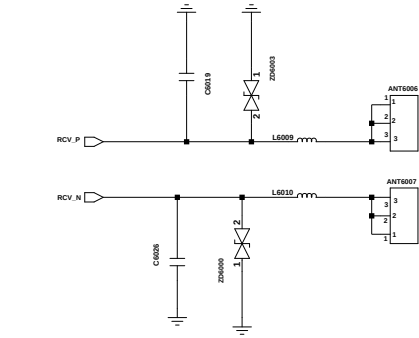

RCV CONTACT

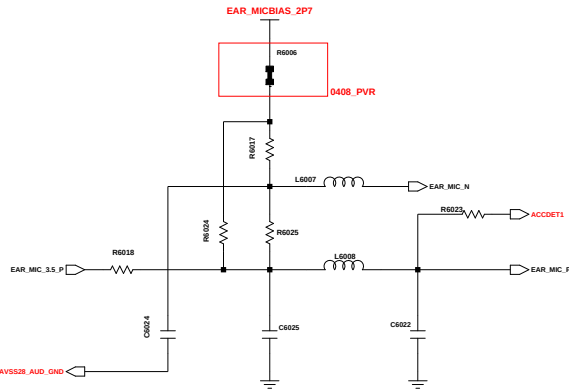

EAR MIC

Engineer:	AUDIO, SIM/SD, SHIELD CAN				
Drawn by:					
R&D CHK:				TITLE:	Size:
DOC CTRL CHK:					
MFG ENGR CHK:					
QA CHK:	REV:	Drawing Number:	Page:6/7		



2D BARCODE



SM-E225F/M225FV
Common