


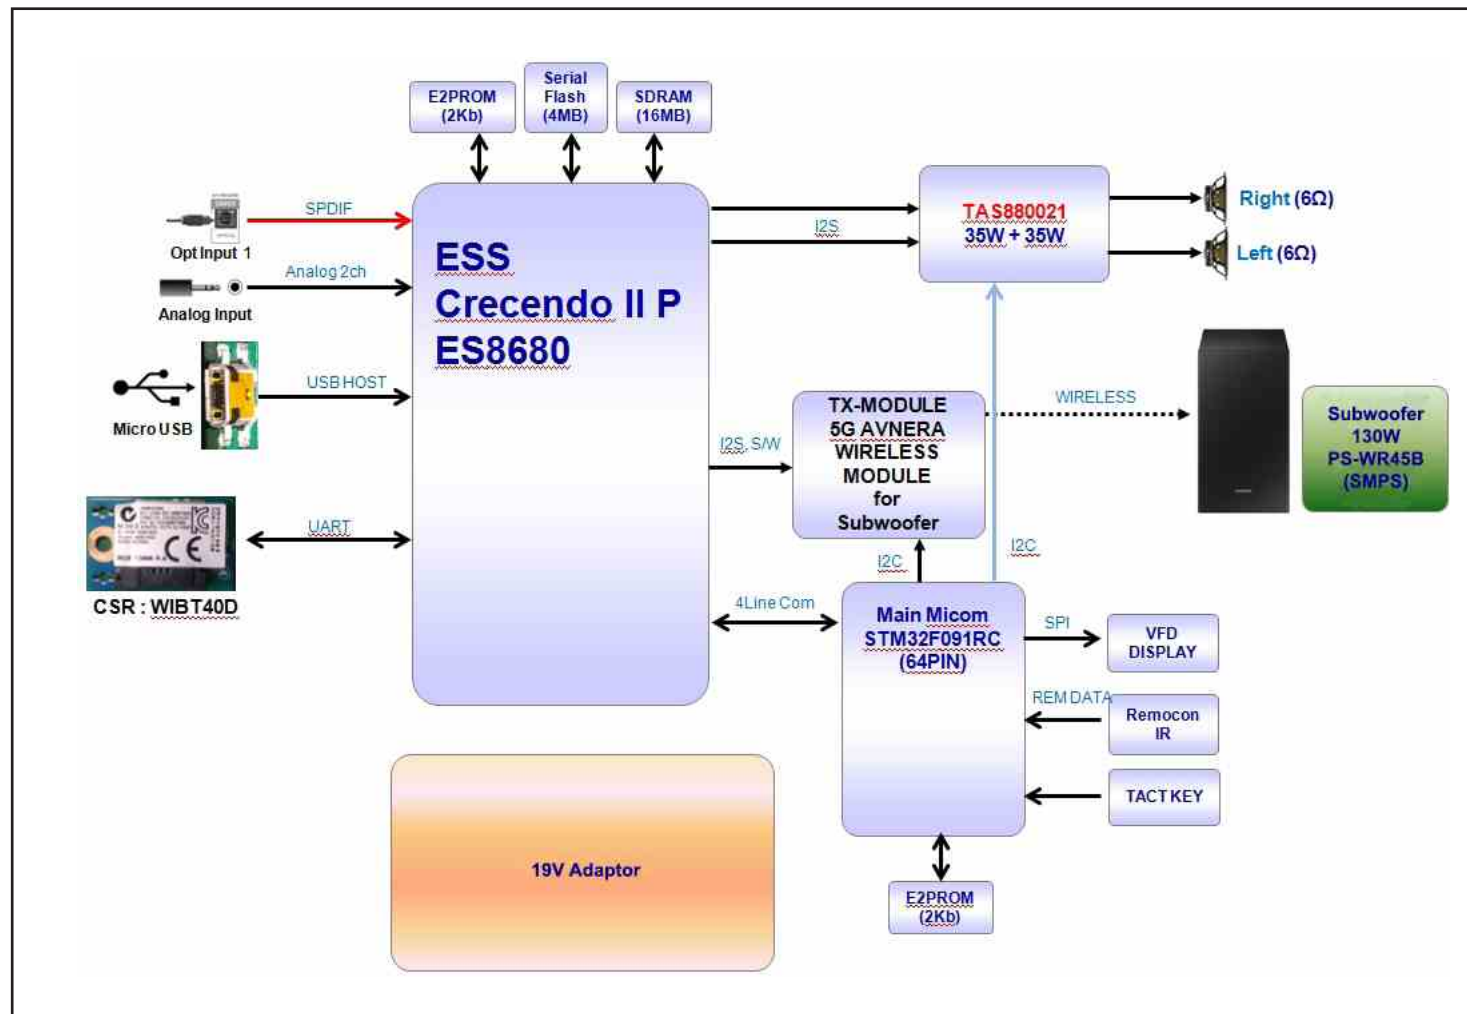
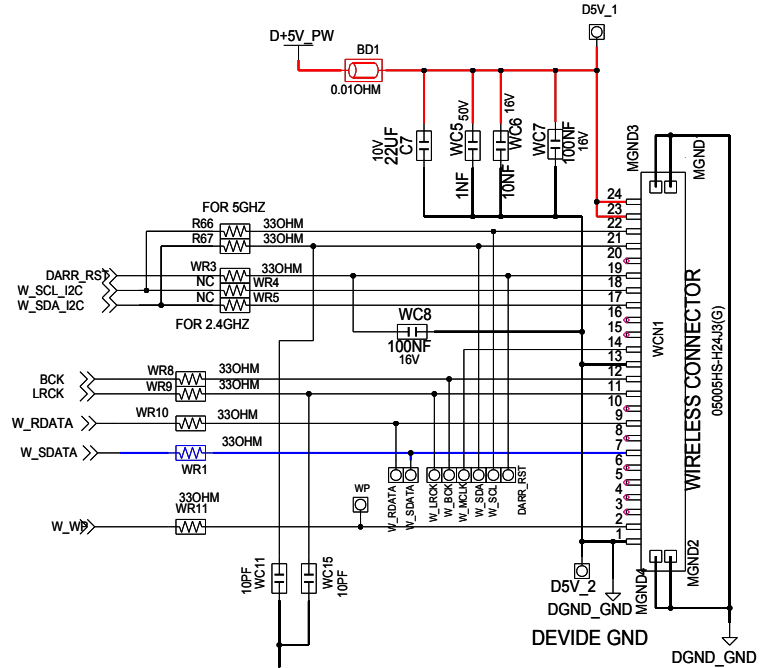
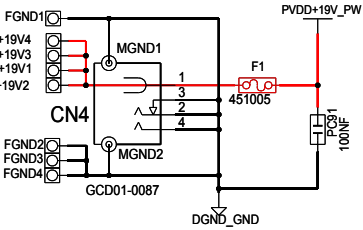
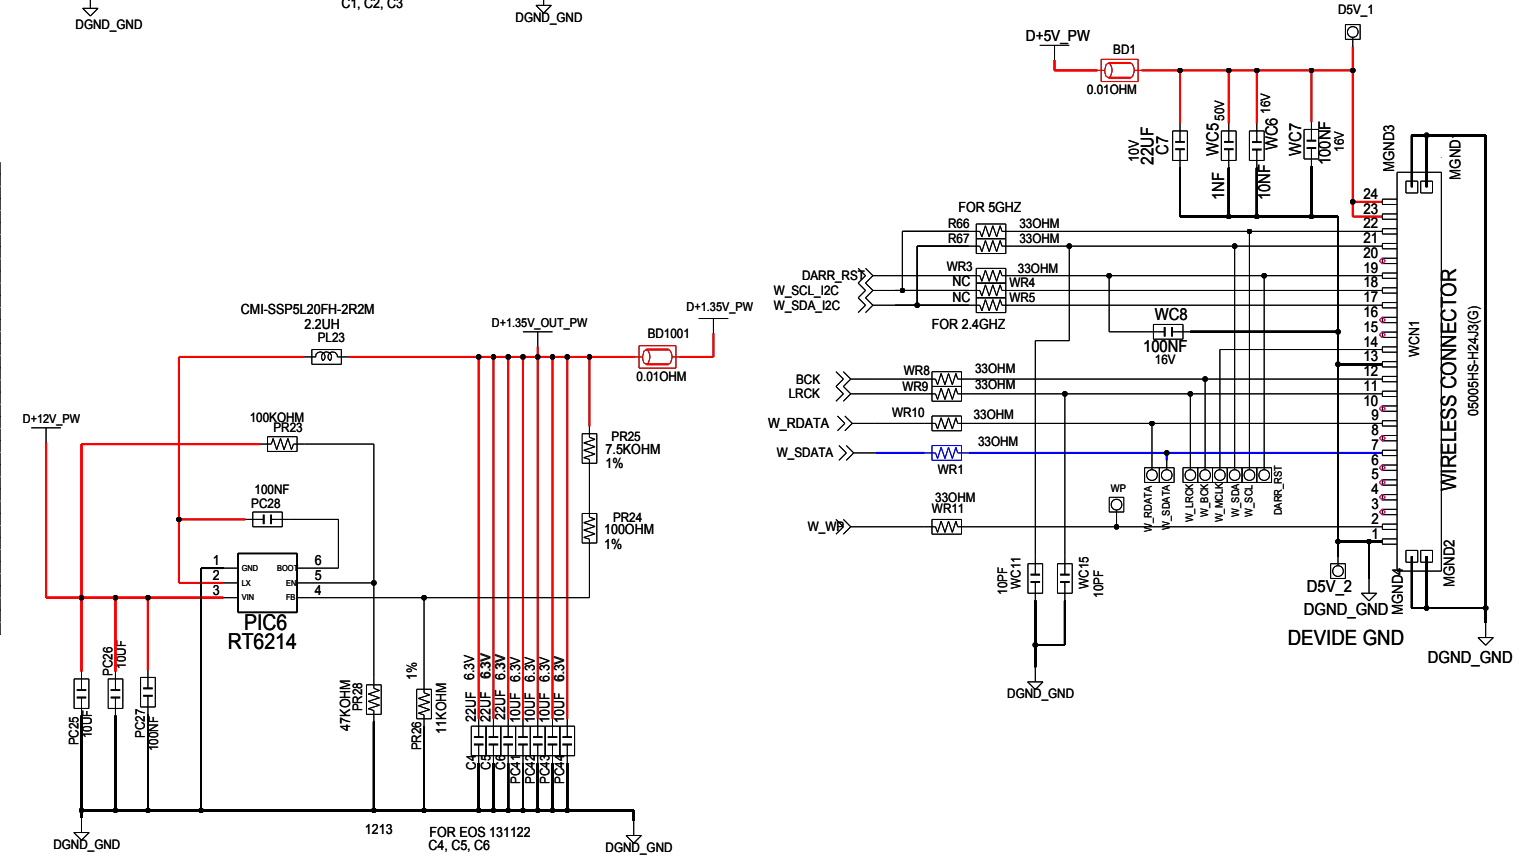
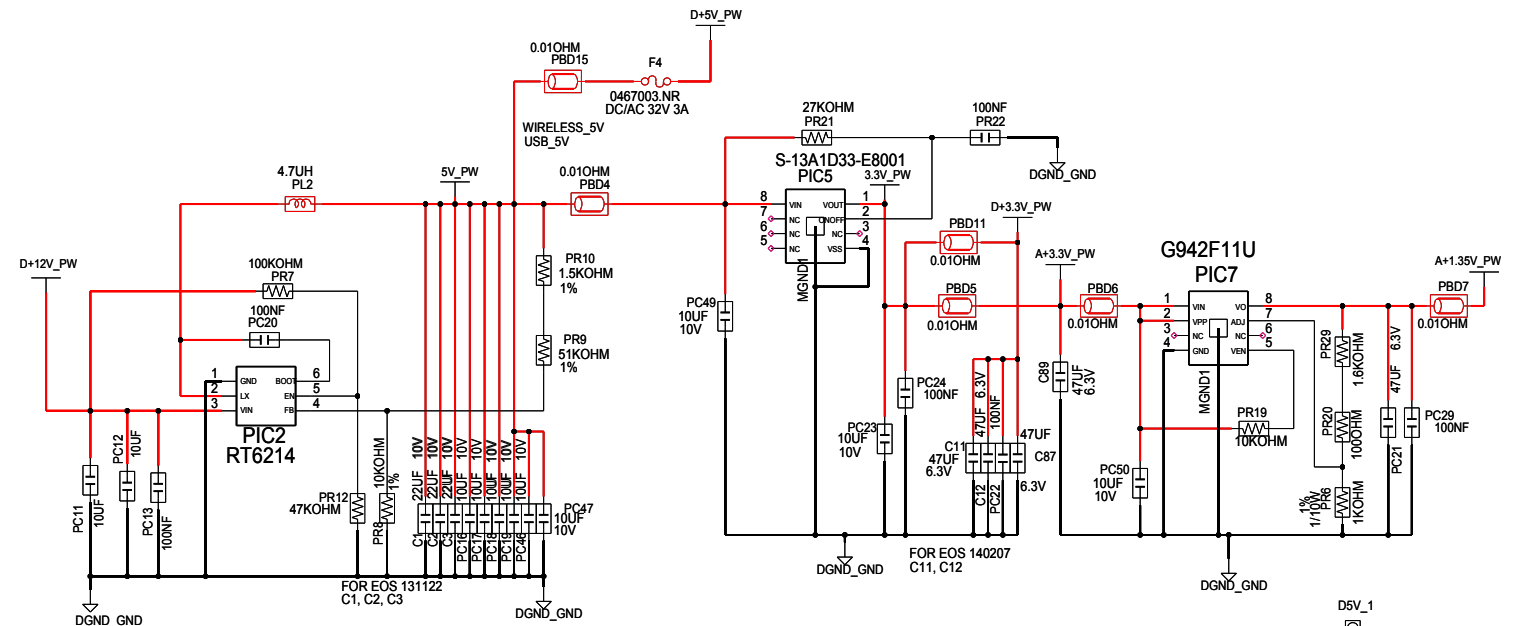
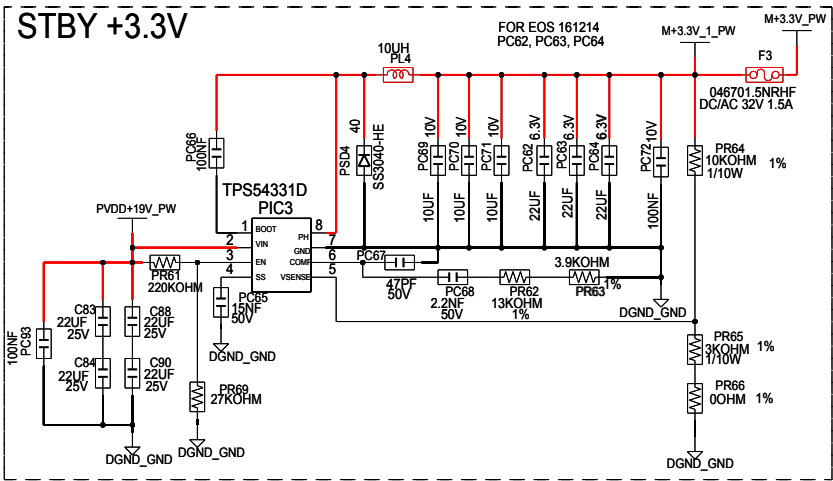
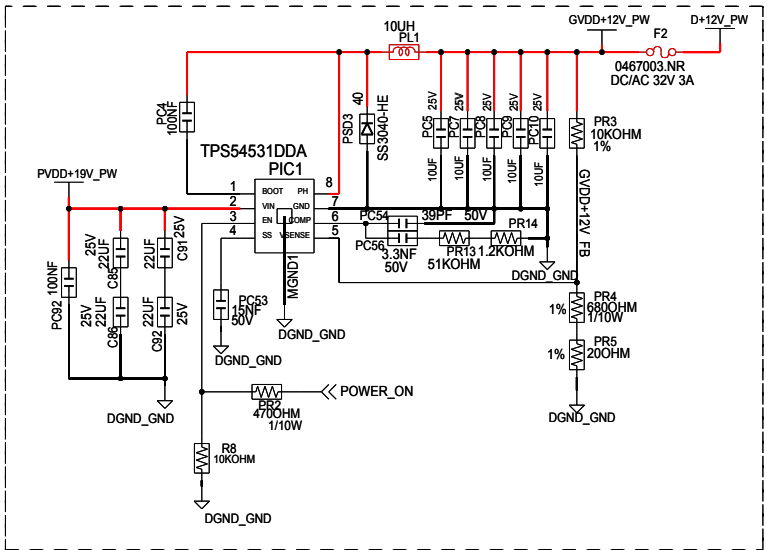

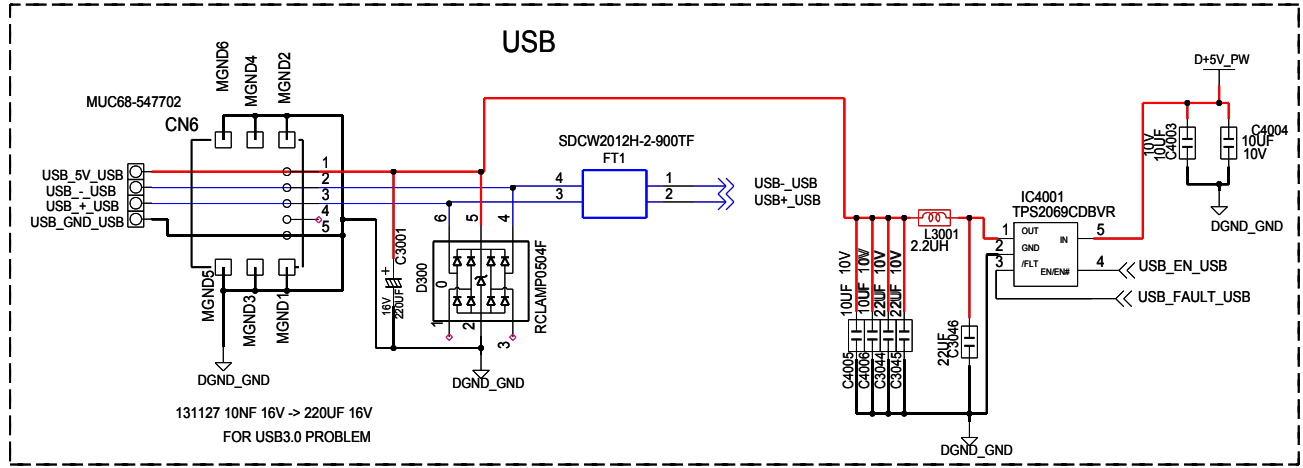
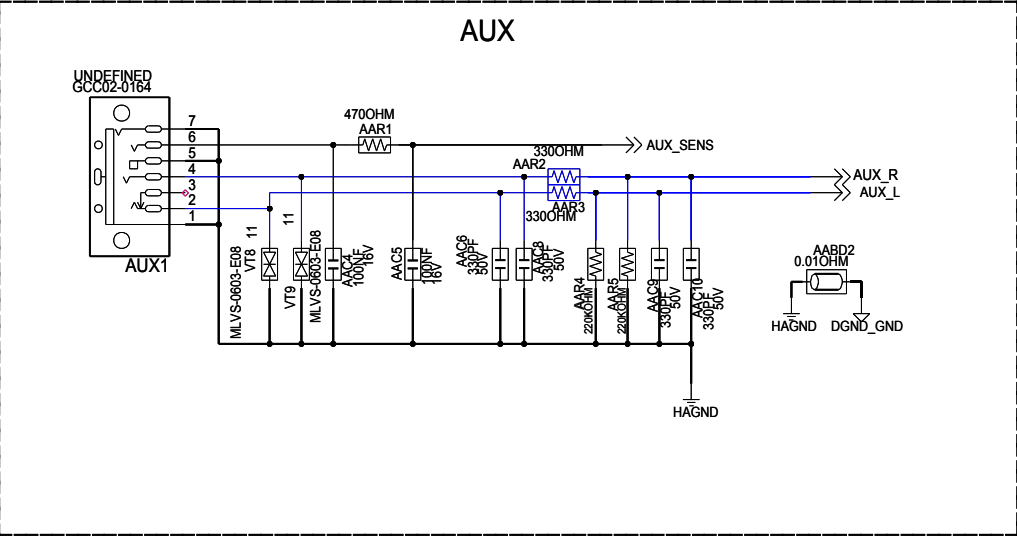


6. Schematic Diagram

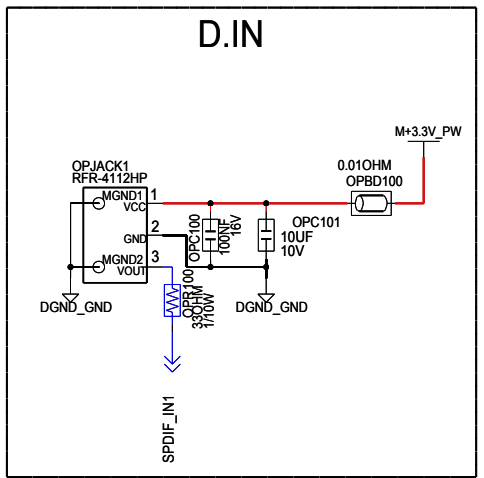


- Main System Digital Signal Processor which is ESS (ES8680D).
- All display is registered by VFD.
- Serial Interface between I2C is operated with various protocol over the whole system.
- DSP(SDP1207) implement DSP AUDIO DECODING function by I2S.
- Power On/Off by Micom port is possible.
- Function and sound field can be controlled by remote controller and keys.
- The active subwoofer operate with wireless system.

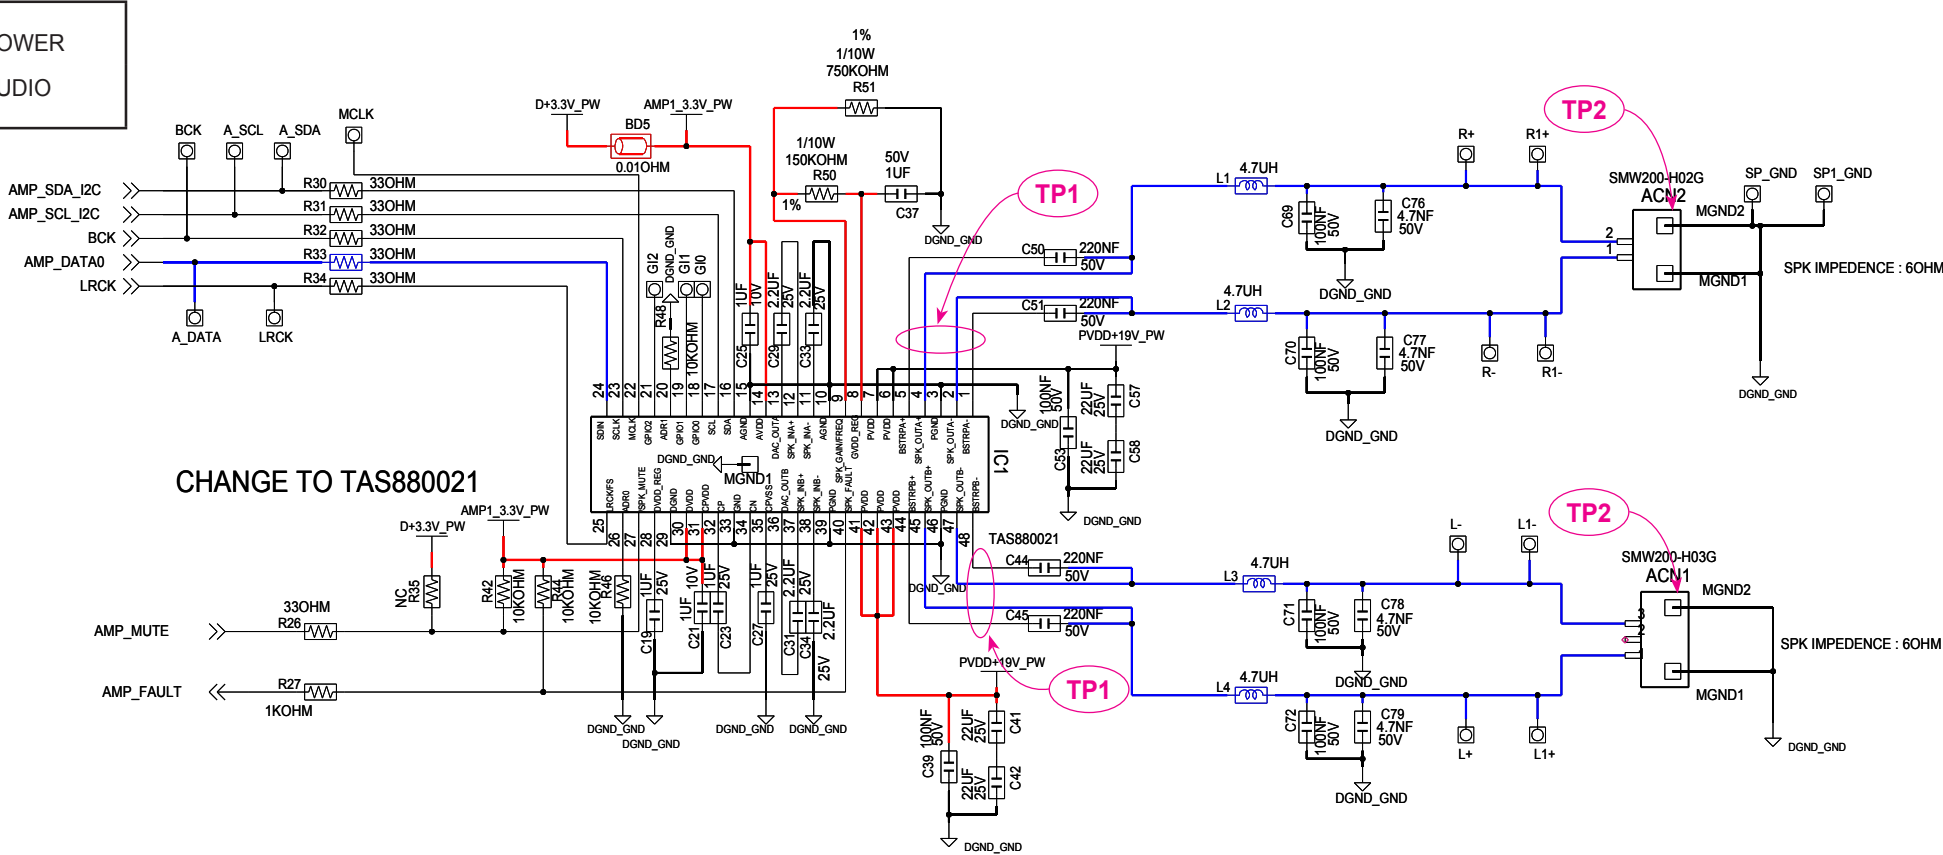





TP1

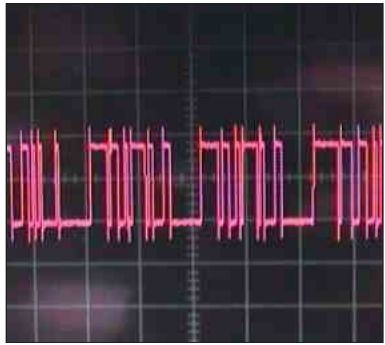




TP2




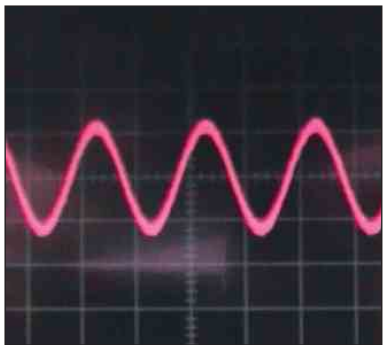


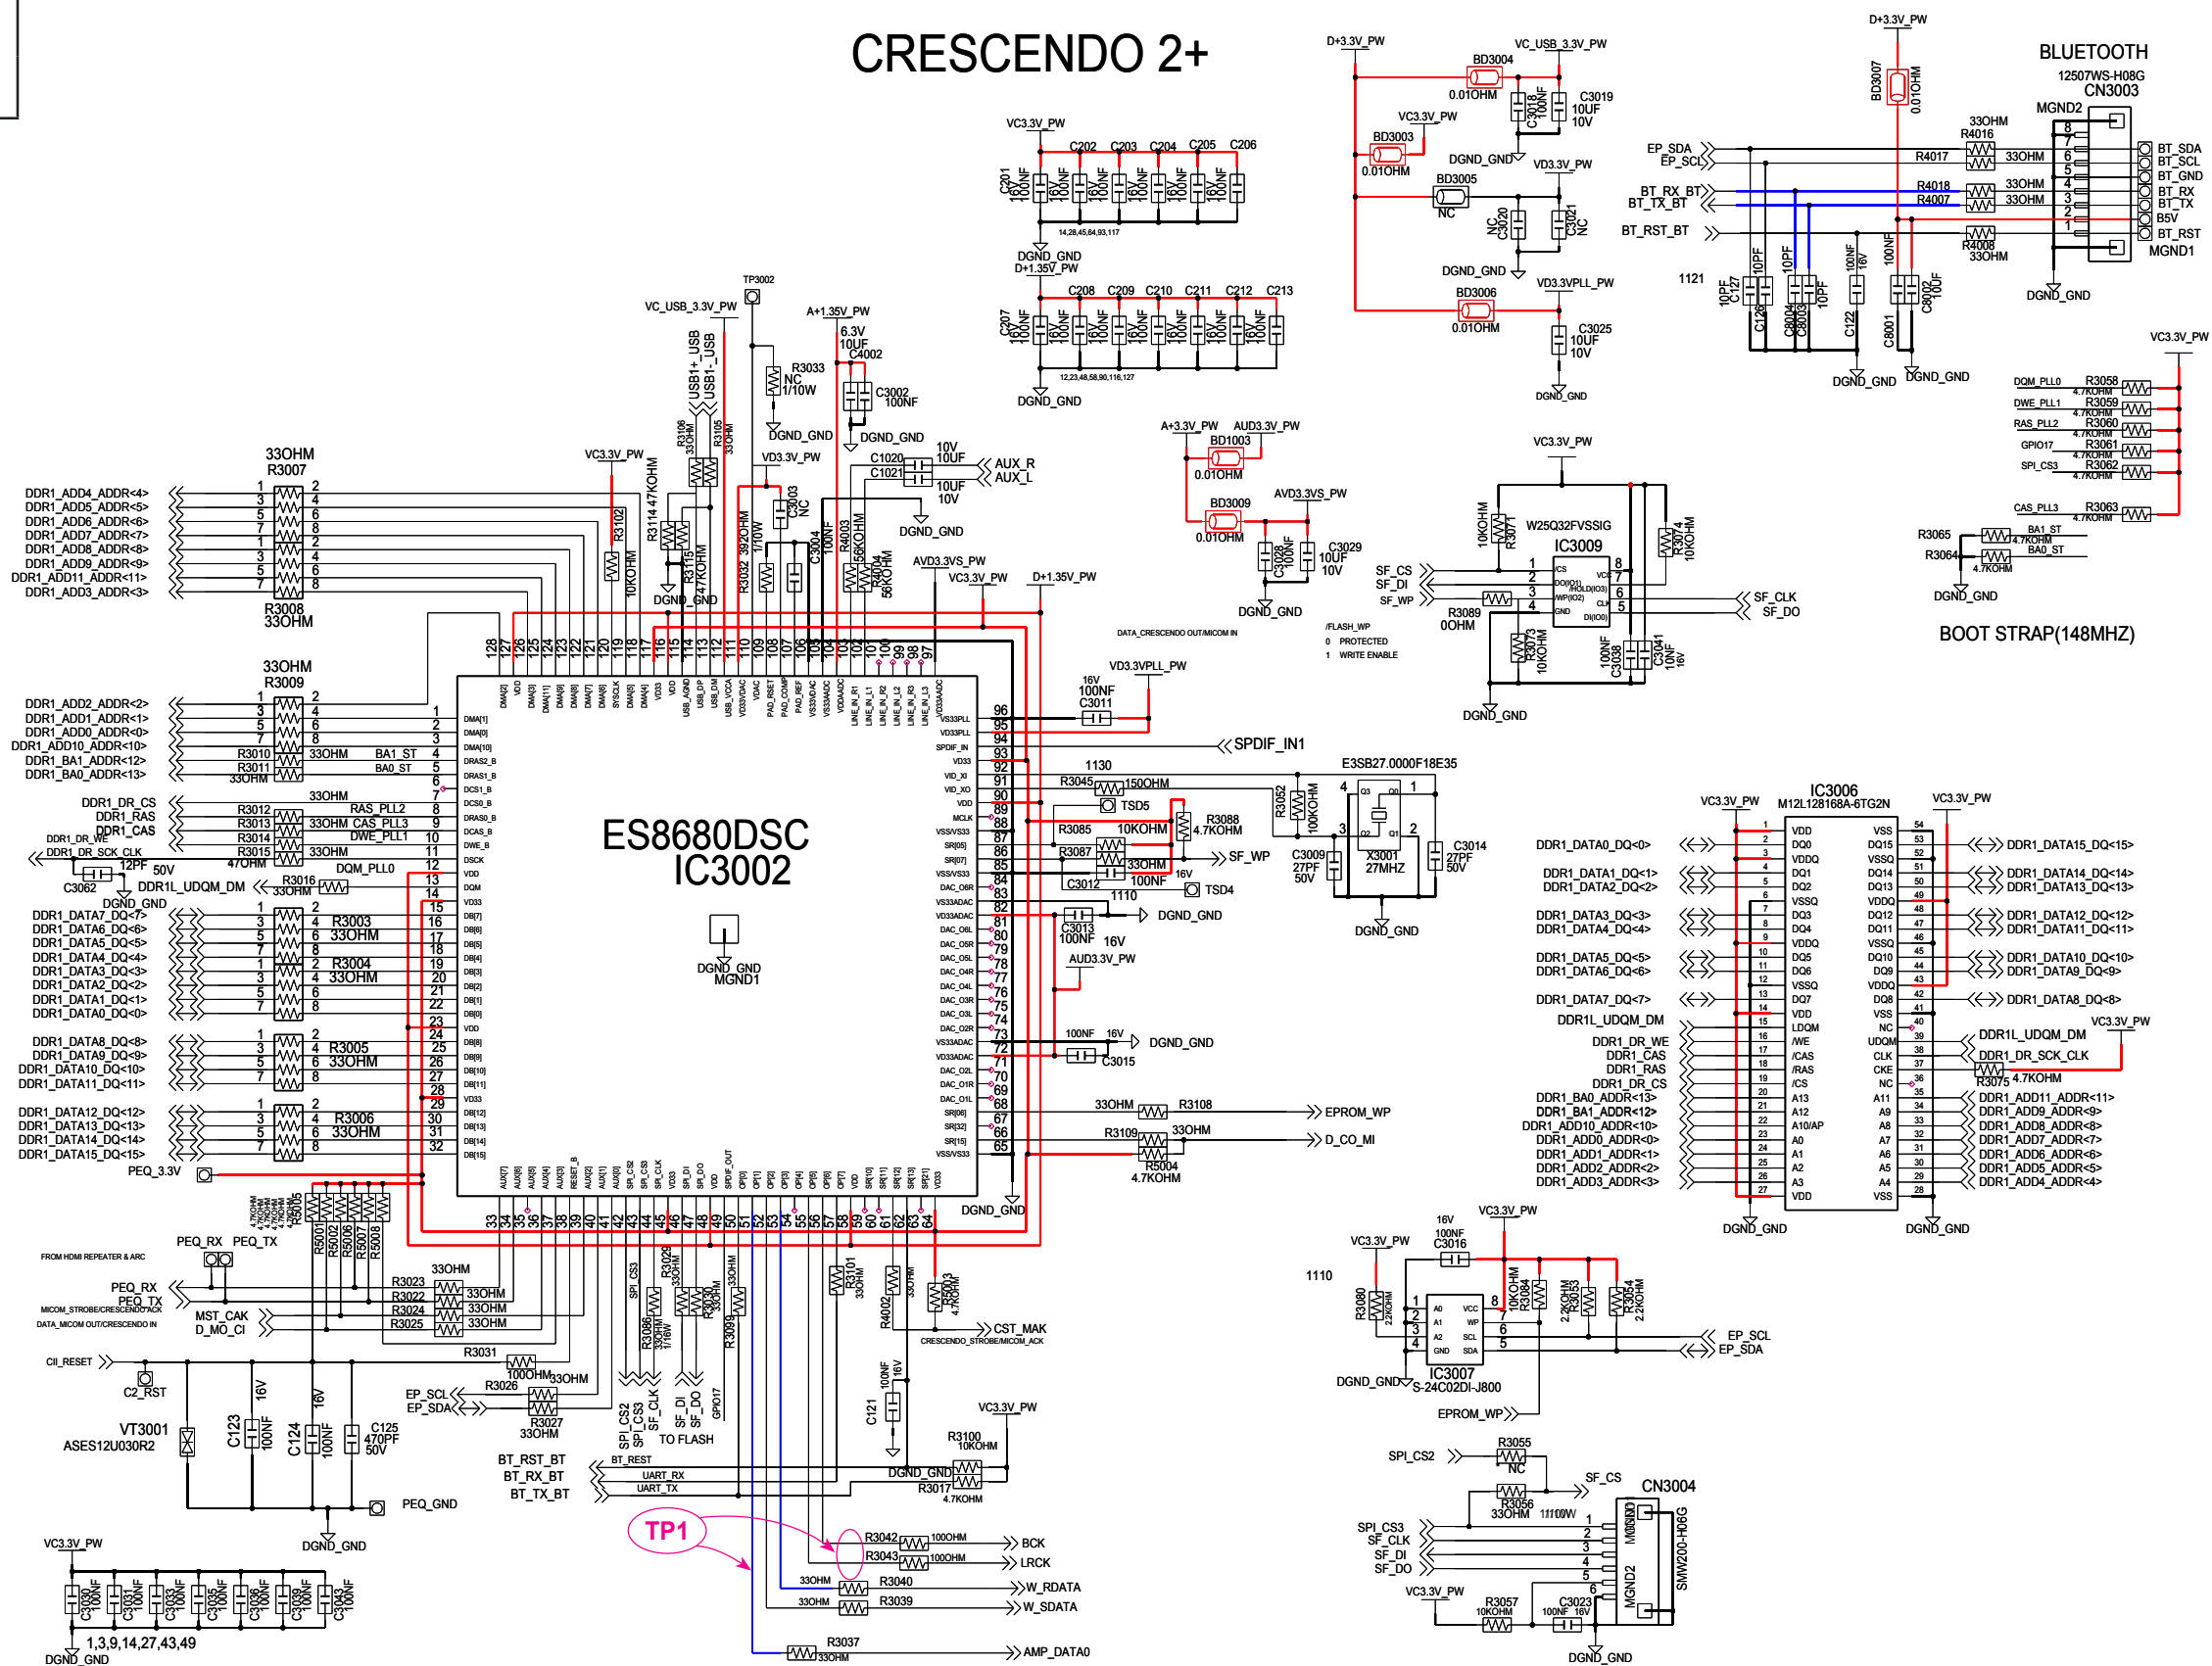

TP1

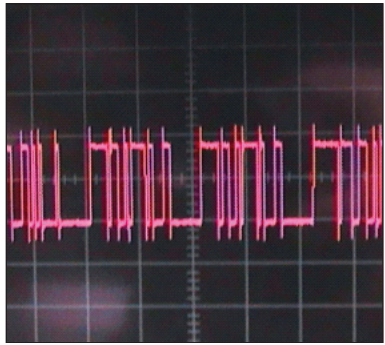



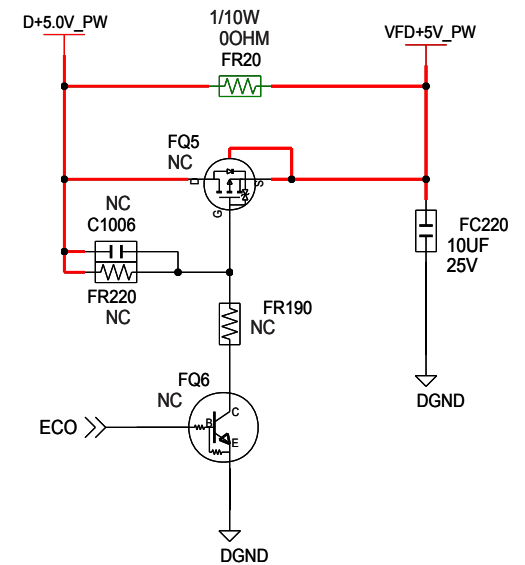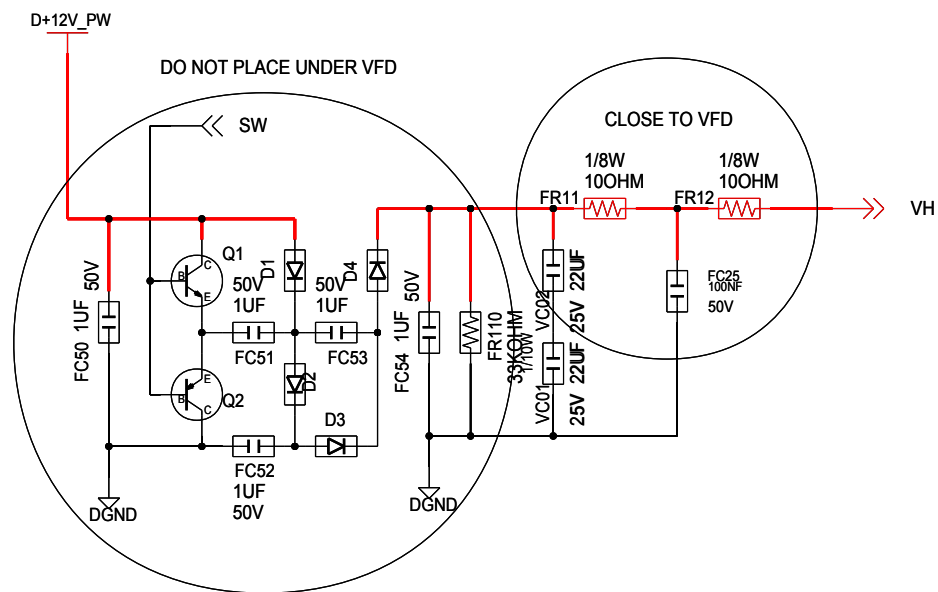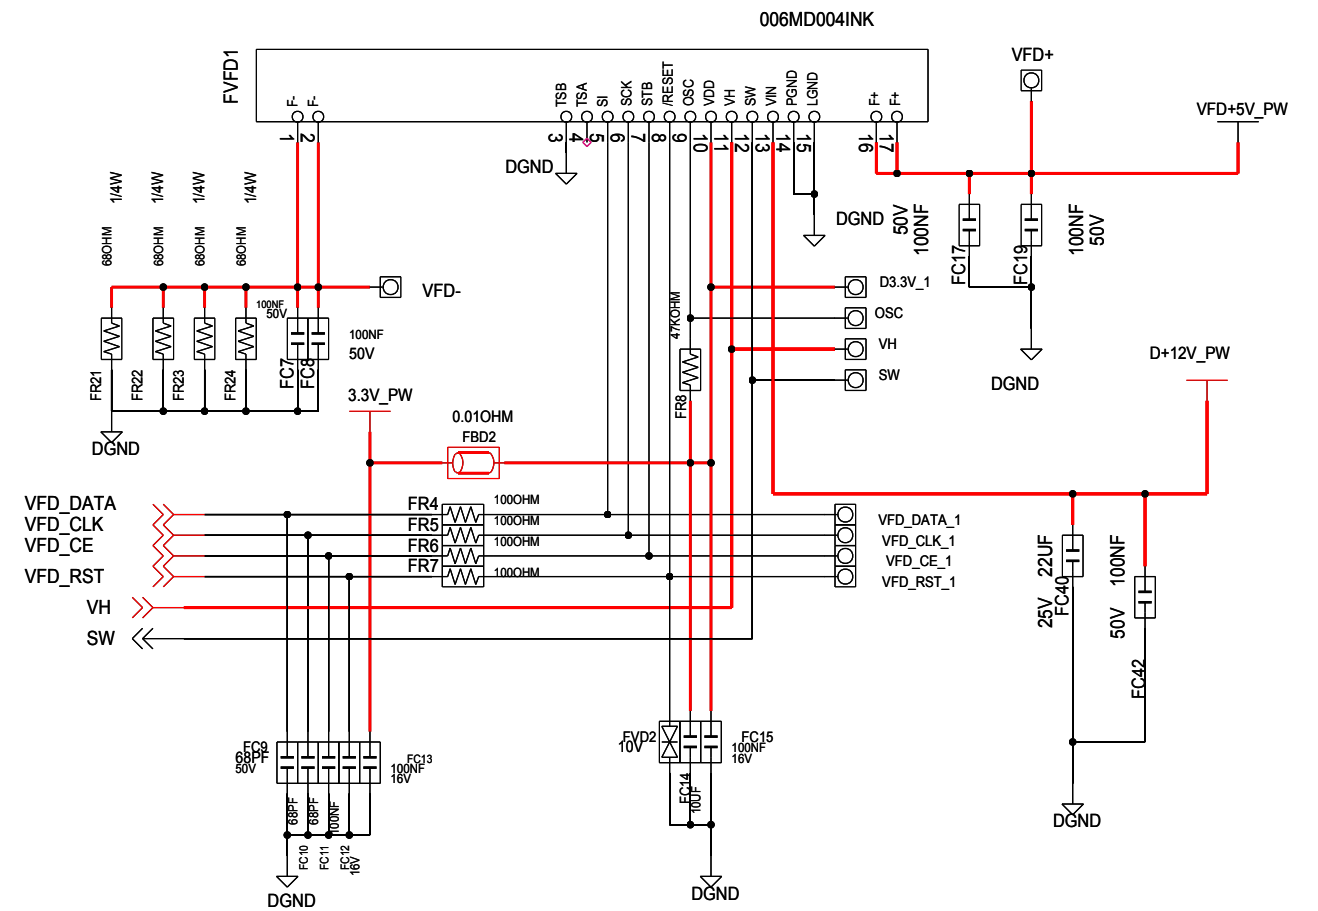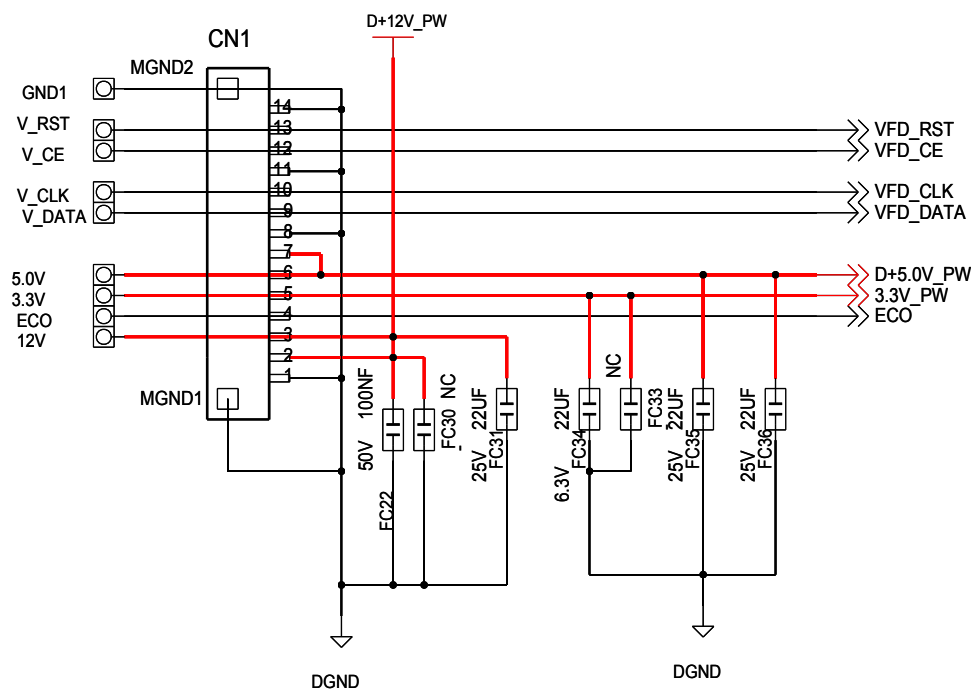

ashakaas