

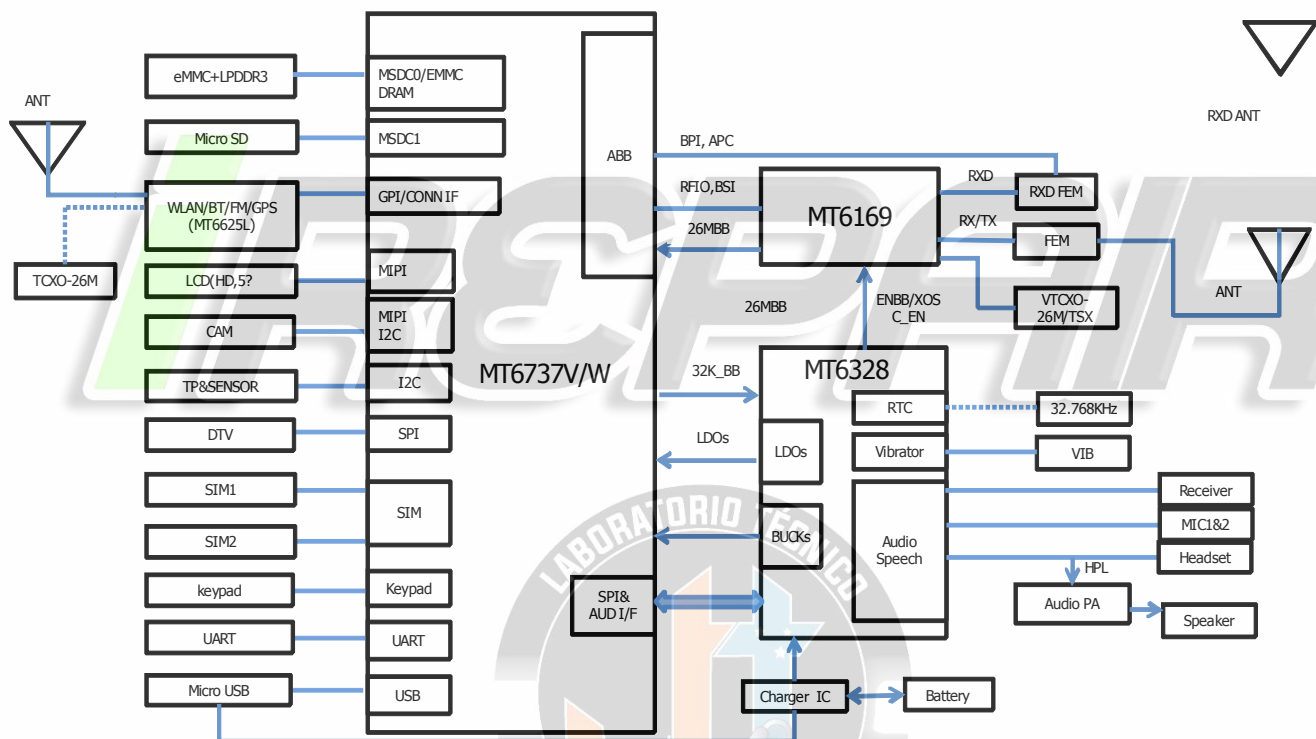
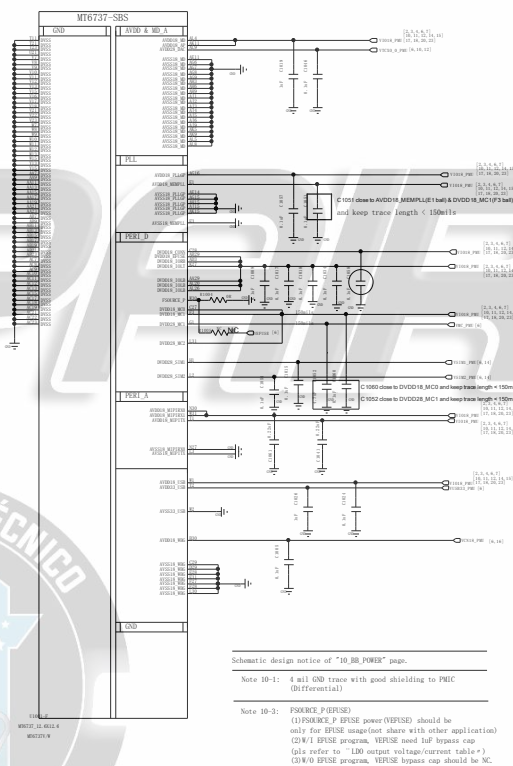


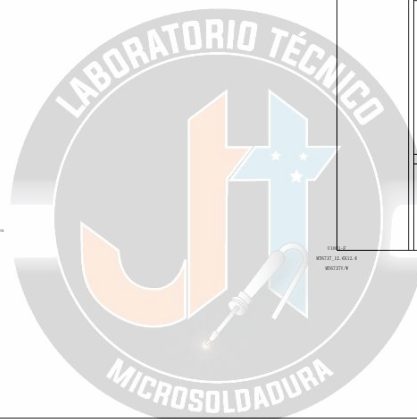

Title	01_BLOCK_DIAGRAM		
Size	D	Yude Confidential	
Data	Sep 14, 2016	Sheet	11 of 99

C1014 should be 47uF
for MT6753 and MT6753T

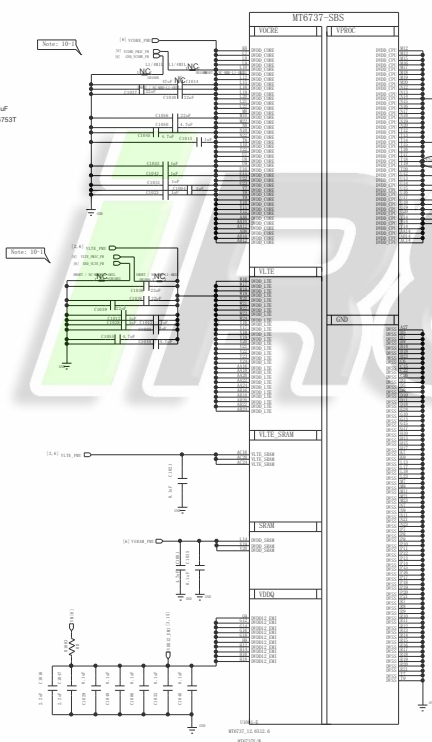


Schematic design notice of "10_BB_POWER" page.


Note 10-1: 4 mil GND trace with good shielding to PHEC (Differential).

Note 10-3: FUSE P (FUSE)
(1) FUSE P (FUSE power (VERISE)) should be only for FUSE usage (not share with other application)
(2) W/ FUSE program, FUSE need bypass cap (also refer to "100 output voltage/current table")
(3) W/O FUSE program, FUSE bypass cap should be NC.

Title			10_BB_POWER
Size			D Yude Confidential
Data			Sep 14, 2016 Sheet 10 of 99

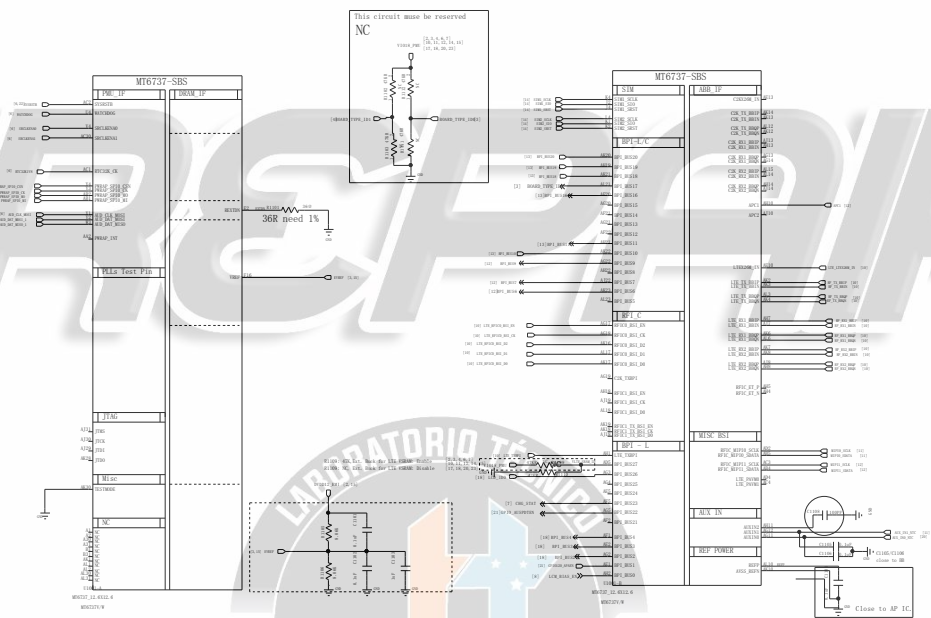


Title	11_BB_1
Size	D
Data	Sep 14, 2016
Sheet	11 of 99
	Yude Confidential

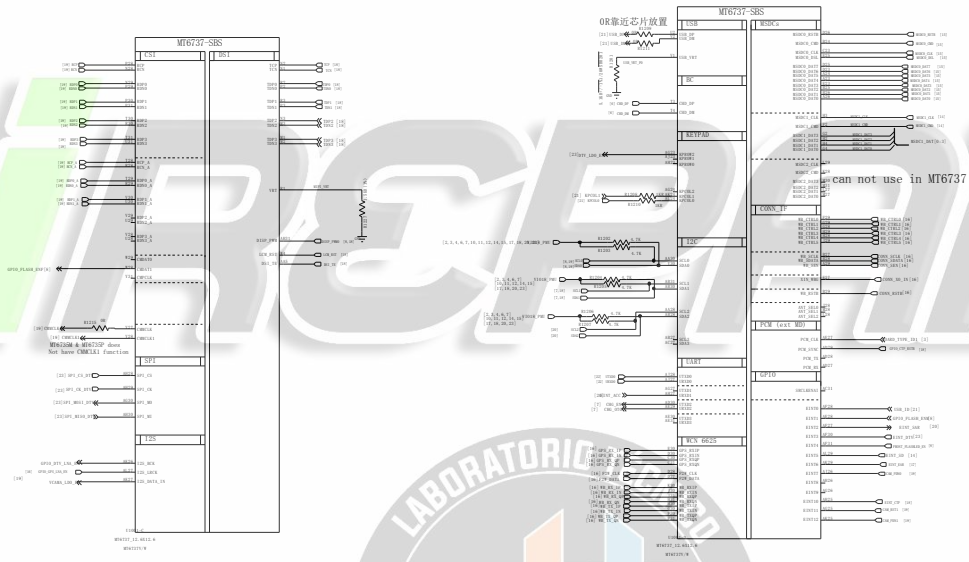

Schematic design notice of "12_BB_2" page.
 Note 12-1: M6K2 Pin should be NC (No Connection) for MT6737M.
 Note 12-2: MT6737M does Not have CMCLK2 function.
 Please refer to MT6737M Design Notice for details


Title	12_BB_2
Size	D Yude Confidential
Date	Sep 14, 2016
Sheet	11 of 99




iR&PAIR






Title			13_BB_3		
Size			D Yude Confidential		
Data			Sep 14, 2016	Sheet 11 of 99	

iR&P&R

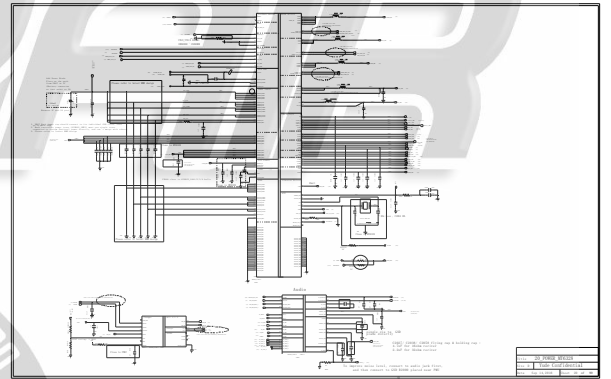


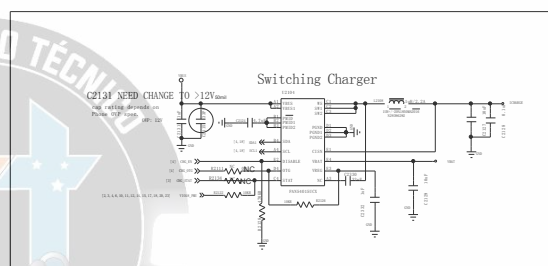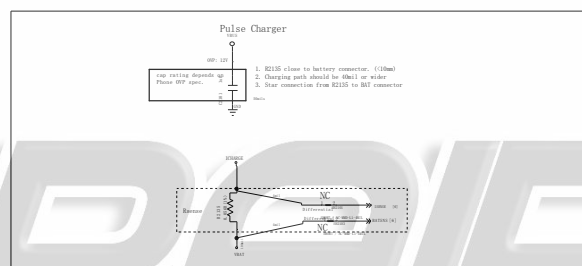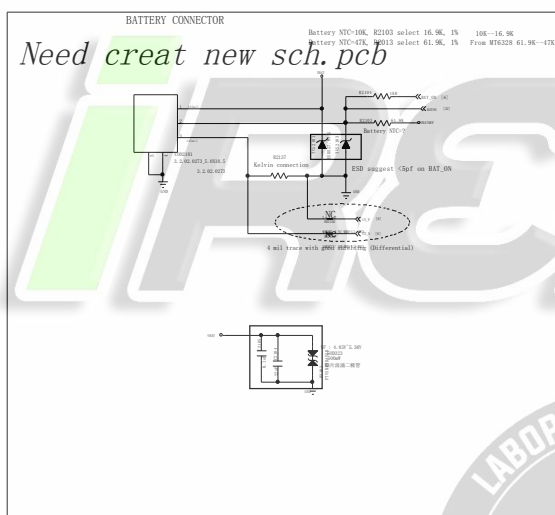

漏电保护删除注意VBAT网络

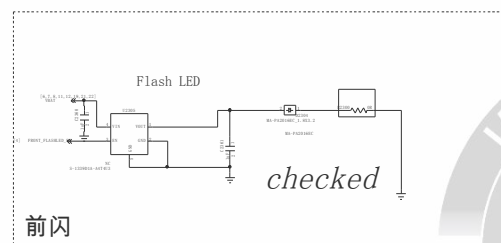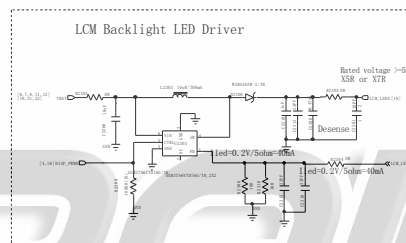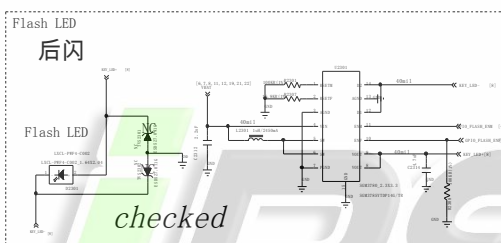

LCM Gate Drive
LCM Gate Driver I2C address: 0X3E (Write=0x7C, Read=0x7D)

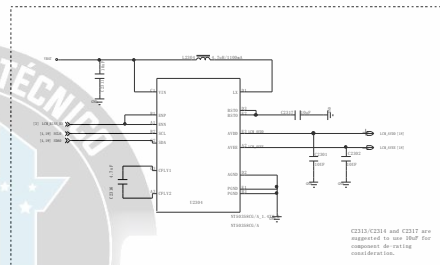

have checked

Title	23_POWER_FLASH_LCM BL
Size	D
Yude Confidential	
Data	Sep 14, 2016
Sheet	11 of 99

External Buck for DRAM


iREPAIR

If using external buck for DRAM application, please refer to "MT8735_53 DRAM External Buck Design Notice":
1. Please add one more 1uF capacitor on PMIC VM output side (Must)
2. Please turn off Fast Transient Function of PMIC VM LDO (Must)




Title		24_NONE	
Size	D	Yude Confidential	
Date	Sep 14, 2016	Sheet	11 of 99

Power trace	PCB line width	MAX current
VREF18_0_PWE	0.4mm	
VIO18_PWE	0.35mm	
VTCX0_0_PWE	0.2mm	

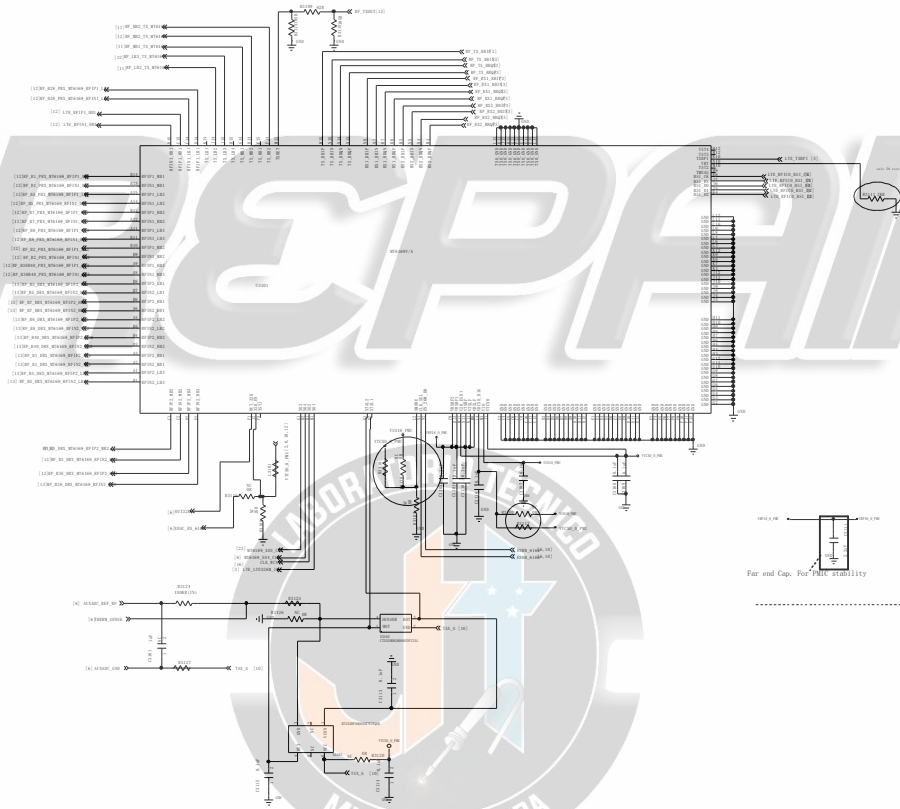

Title	31_RF_MT6169_PIN_OUT
Size D	Yude Confidential
Data	April 5, 2015
Sheet	31 of 99

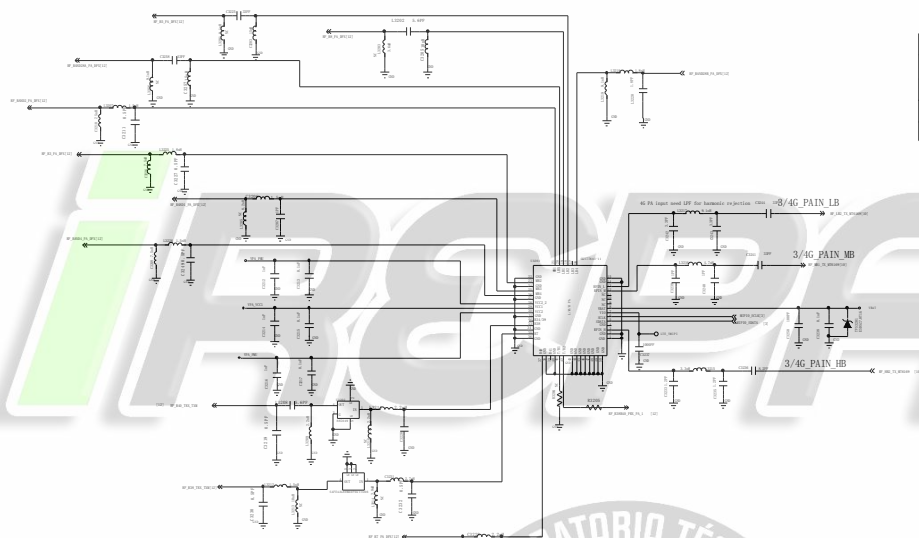

Power trace	PCB line width	MAX current
VPA_PME	1.1mm	
VPA_NCC1	0.5mm	
VBAT	0.15mm	
LTE_VMDPI	0.15mm	




Thermistor / To sense board level temperature
Far end Cap. For PMIC stability

Thermistor / To sense board level temperature













Title	32_RF_MT6169_RF_TX
Size	0 Yude Confidential
Date	April 5, 2015
Sheet	32 of 99

Power trace	PCB line width	MAX current
VDDT	2.5mm (Min 2.0mm)	
LTE_VDDP1	0.15mm	

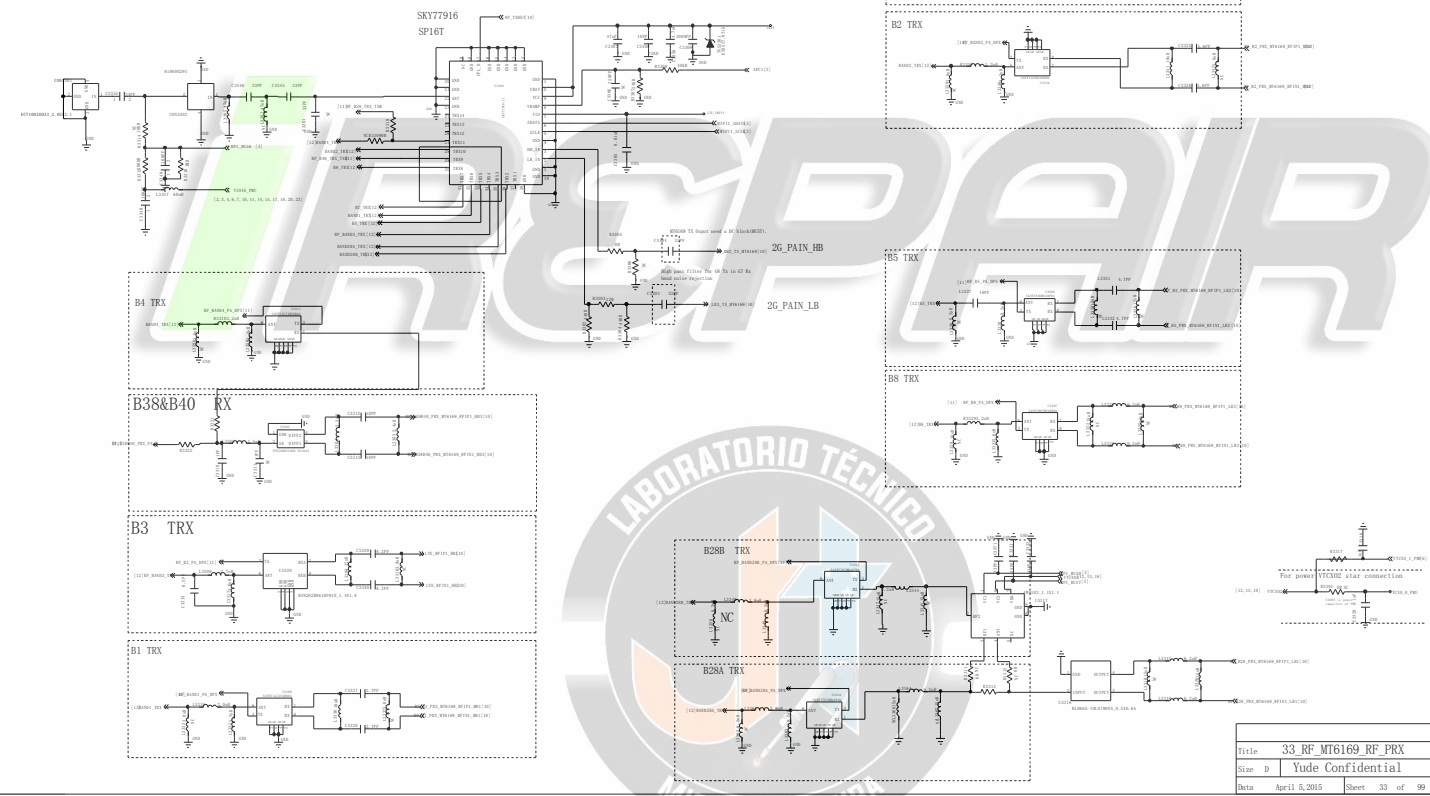

Title	33 RF MT6169 RF PRX
Size	Yude Confidential
Date	April 5, 2015
Sheet	33 of 99

Power trace	PCB line width	MAX current
VTC002	0.15mm	50uA

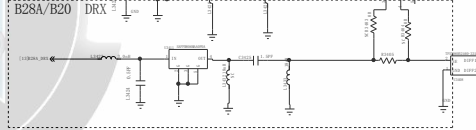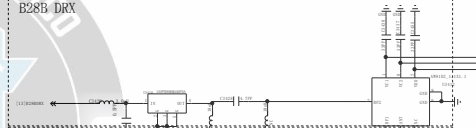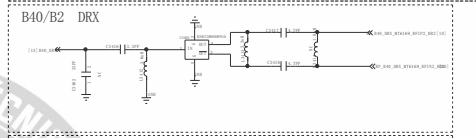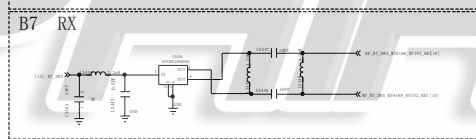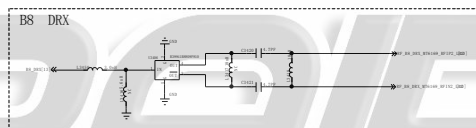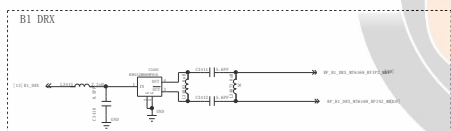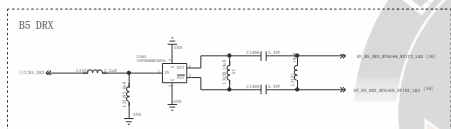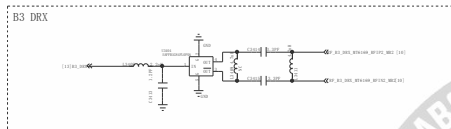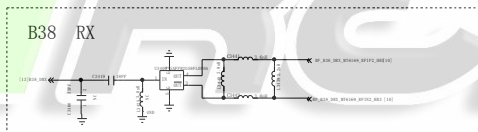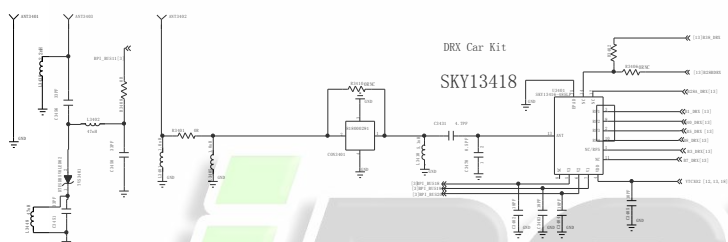


Title	34_RF_MT6169_RF_DRX
Size	D
Data	Nov 6, 2015
Sheet	34 of 99

SIM1_sclk & SIM2_sclk sheilding by GND


SIM1

SIM2


TF card

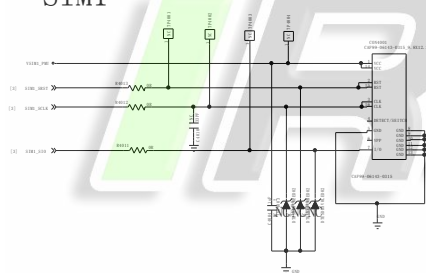

checked




checked

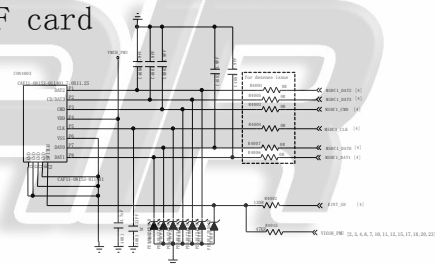

checked



Title 40 MEMORY SD CARD SIMCARD		
Size D	Yude Confidential	
Data	Sep 14, 2016	Sheet 40 of 99

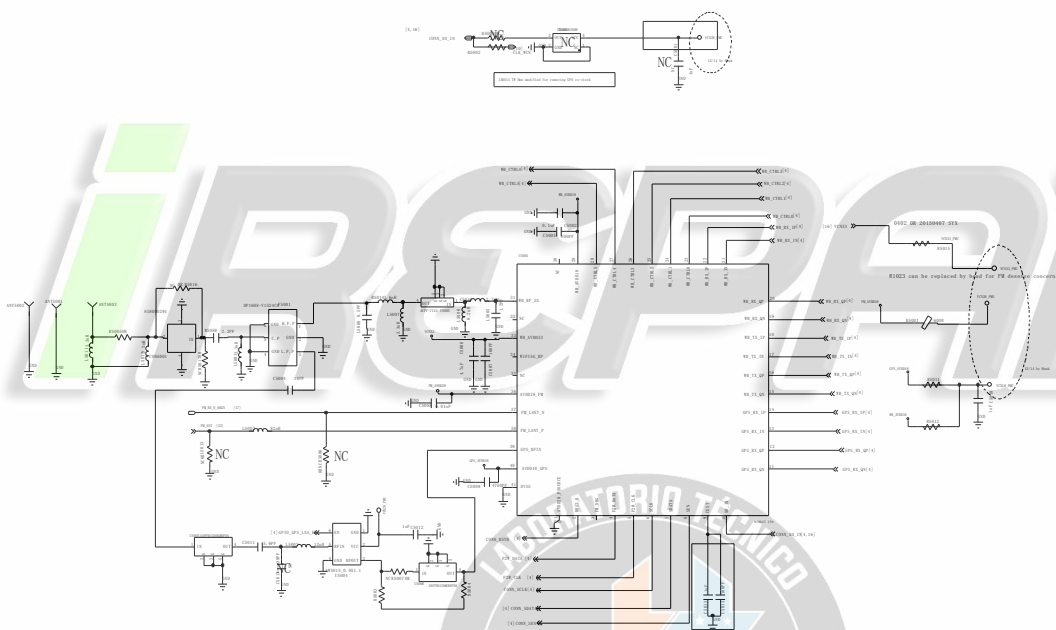

50 CONNECTIVITY M16685L
MTK Confidential

Speaker NC

Handset Microphone 1

Close to IC

Described for MIC mode

Based on your system level design, if better audio performance is needed on your system, please reserve for AC mode

[illegible][illegible]

Earphone MICPHONE

Close to MIC

Close to MIC

Close to CDR6001

Reserved for MIC mode

Reserved for MIC mode


tie together and single via to GND plane

tie together and single via to GND plane


100k

100nF



[illegible]

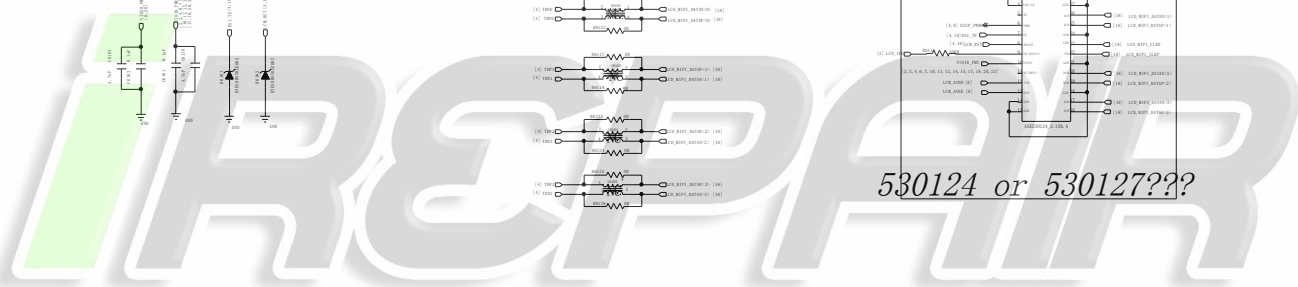


屏连接器



530124 or 530127???

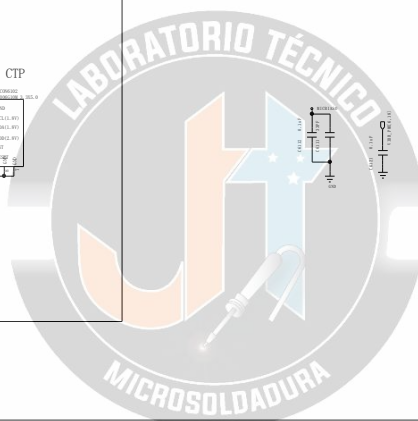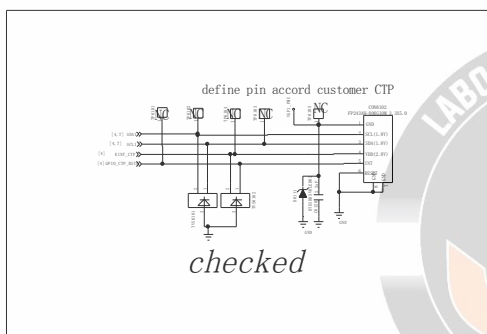


25PIN大小板连接器ZIF

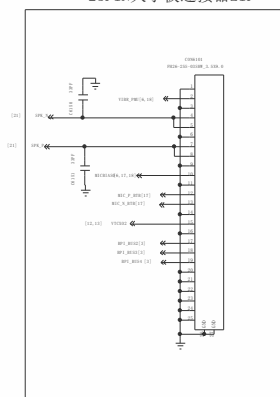


Title 61_PERI_LCD_CTP		
Size	D	Yude Confidential
Data	Sep 14, 2016	Sheet 61 of 99

camera需要参考最新的部件

MAIN_CAMERA

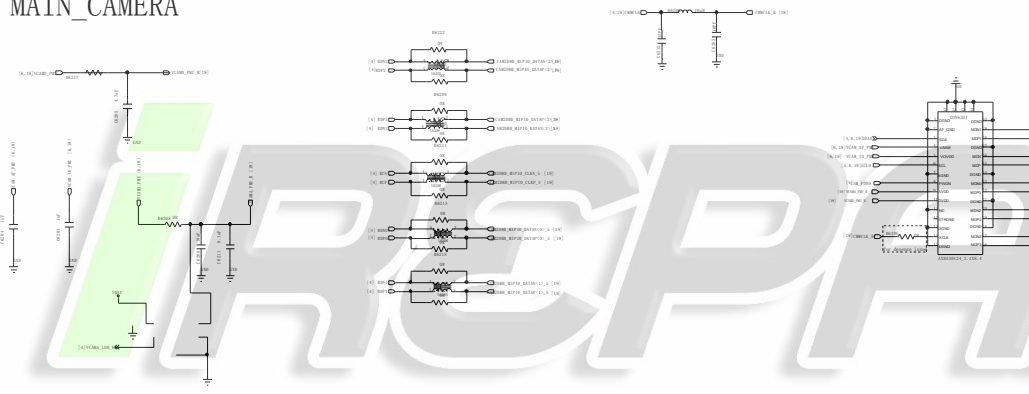


SUB_CAMERA

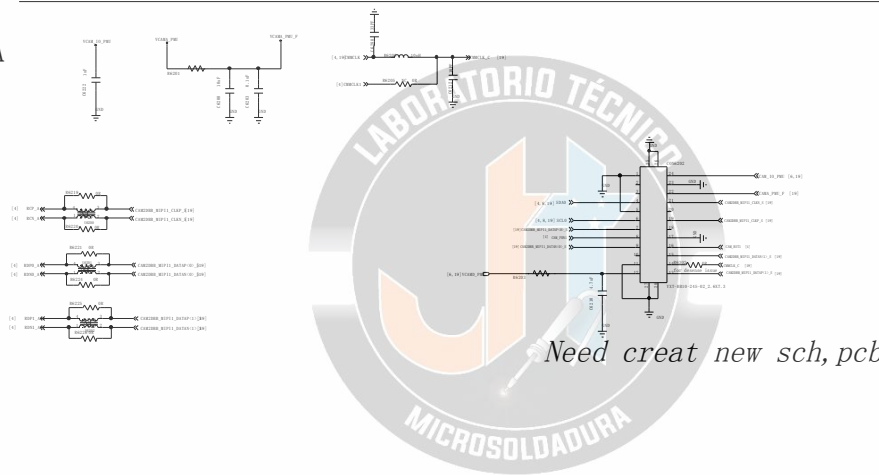

Need creat new sch, pcb

Title		62_PERI_CAMERA	
Size		Yude Confidential	
Data		Sep 14, 2016	Sheet 11 of 99

G Sensor-3X





CS=1: IIC
 LIS3DHTR : SA0=0; IIC ADDRESS is 0x18H
 KXCJK-1113 : SA0=0; IIC ADDRESS is 0x1BH
 power down (communicating), I = 0.5uA

Configuration VS Chip

Fuction	U3001	C3004	C3005	C3006	R3003
G-Sensor	LIS3DHTR	NC	NC	NC	0
G-Sensor	KXCJK-1113	NC	NC	NC	0




Default LIS3DHTR

SAR Sensor

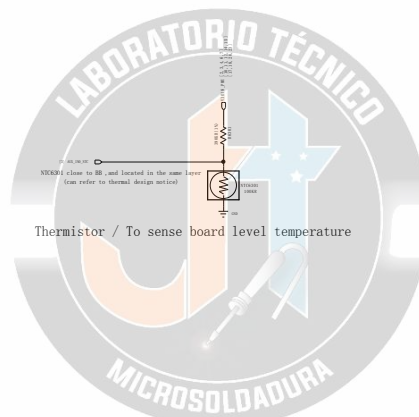
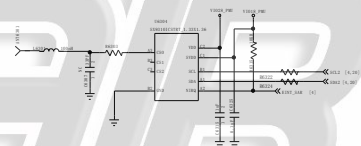


have checked

Title	63_PERI_SENSORS
Size	D
Size	Yude Confidential
Date	Sep 14, 2016
Sheet	11 of 99

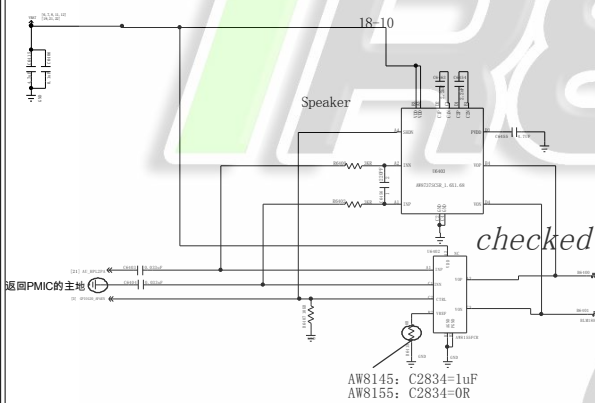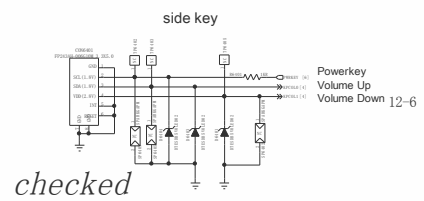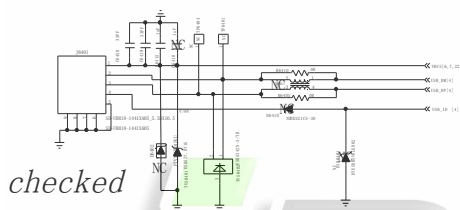


AU_HPL to headset or audio PA.

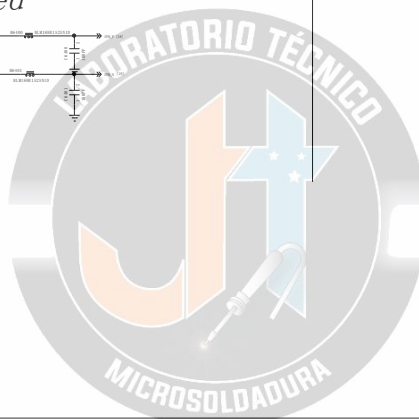



Title	64_PERI_USB_KEYPAD		
Size	D	Yude Confidential	
Data	Sep 14, 2016	Sheet	11 of 99

UART只是测试不按照生产要求
开关机键电源键，USB按照生产要求摆放2.5mm

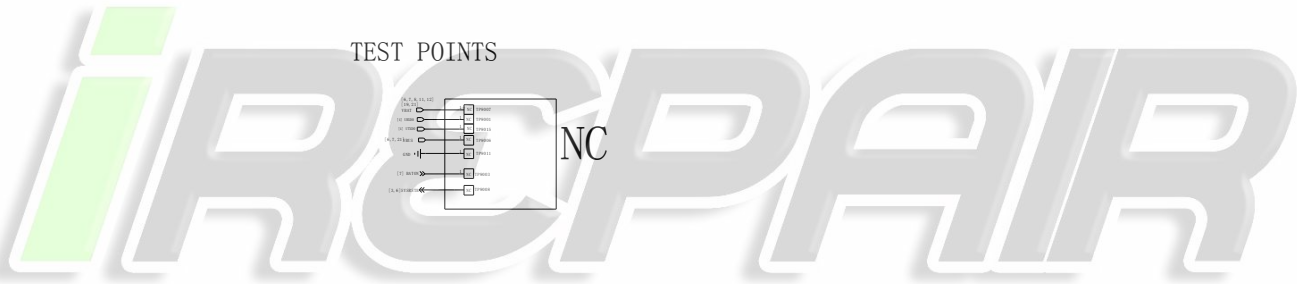



接地弹片改818000376

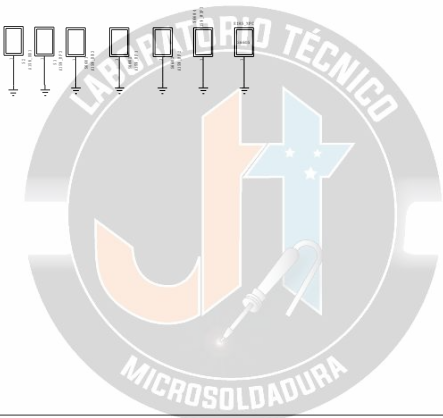

have checked

Title		65_TEST POINT
Size	D	Yude Confidential
Date	Sep 14, 2016	Sheet 11 of 99

iPCPAIR

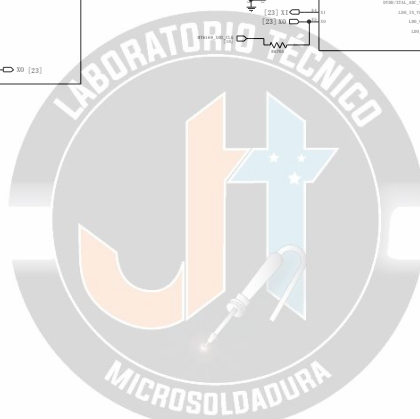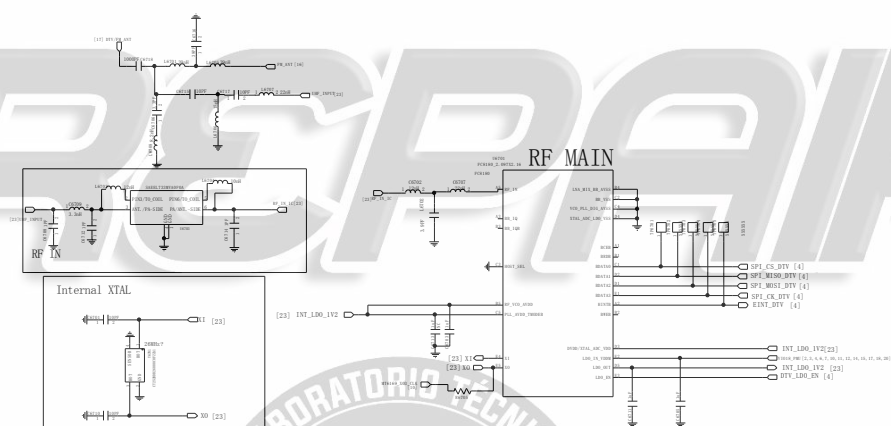

Title 67_DTV		
Size	D	Yude Confidential
Date	Sep 14, 2016	Sheet 67 of 99