



	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	SAMSUNG CONFIDENTIAL THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO.'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.															
B																
C																
D																
E																
F																
G																
H																
I																
J																
K																
L																
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

SM-A 426N REV03A

- Sheet01 : GSM / WCDMA / LTE / NR(N41) RF
- Sheet02 : TRANSCEIVER, SUB ANT
- Sheet03 : CONNECTIVITY(BT/WIFI/FM), NFC
- Sheet04 : AP(SM6350-INTERFACE,GPIO)
- Sheet05 : AP(POWER), MEM(uMCP)
- Sheet06 : PMIC(PM6350,PM6150A), IF PMIC
- Sheet07 : AUDIO Codec, SENSOR, SIM, SD
- Sheet08 : CAMERA, DISPLAY PMIC
- Sheet09 : DISPLAY, C2C

Engineer:			
Drawn by:			
RED CHK:	TITLE:	Size:	
DOC CTRL CHK:			
MFG ENGR CHK:			
QA CHK:	REV:	Drawing Number:	Page:




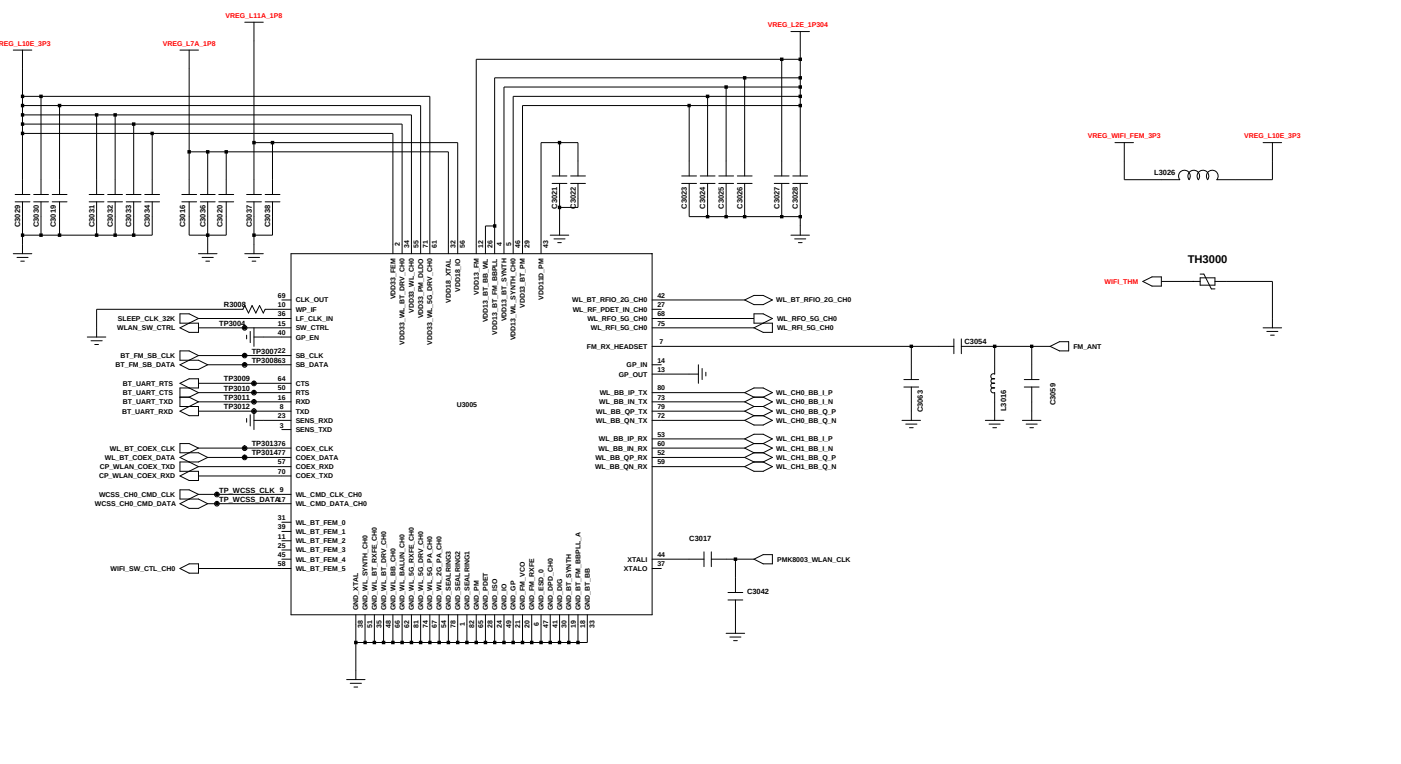


GPS L1 / GNSS/BEIDOU

GND CCP

[illegible]

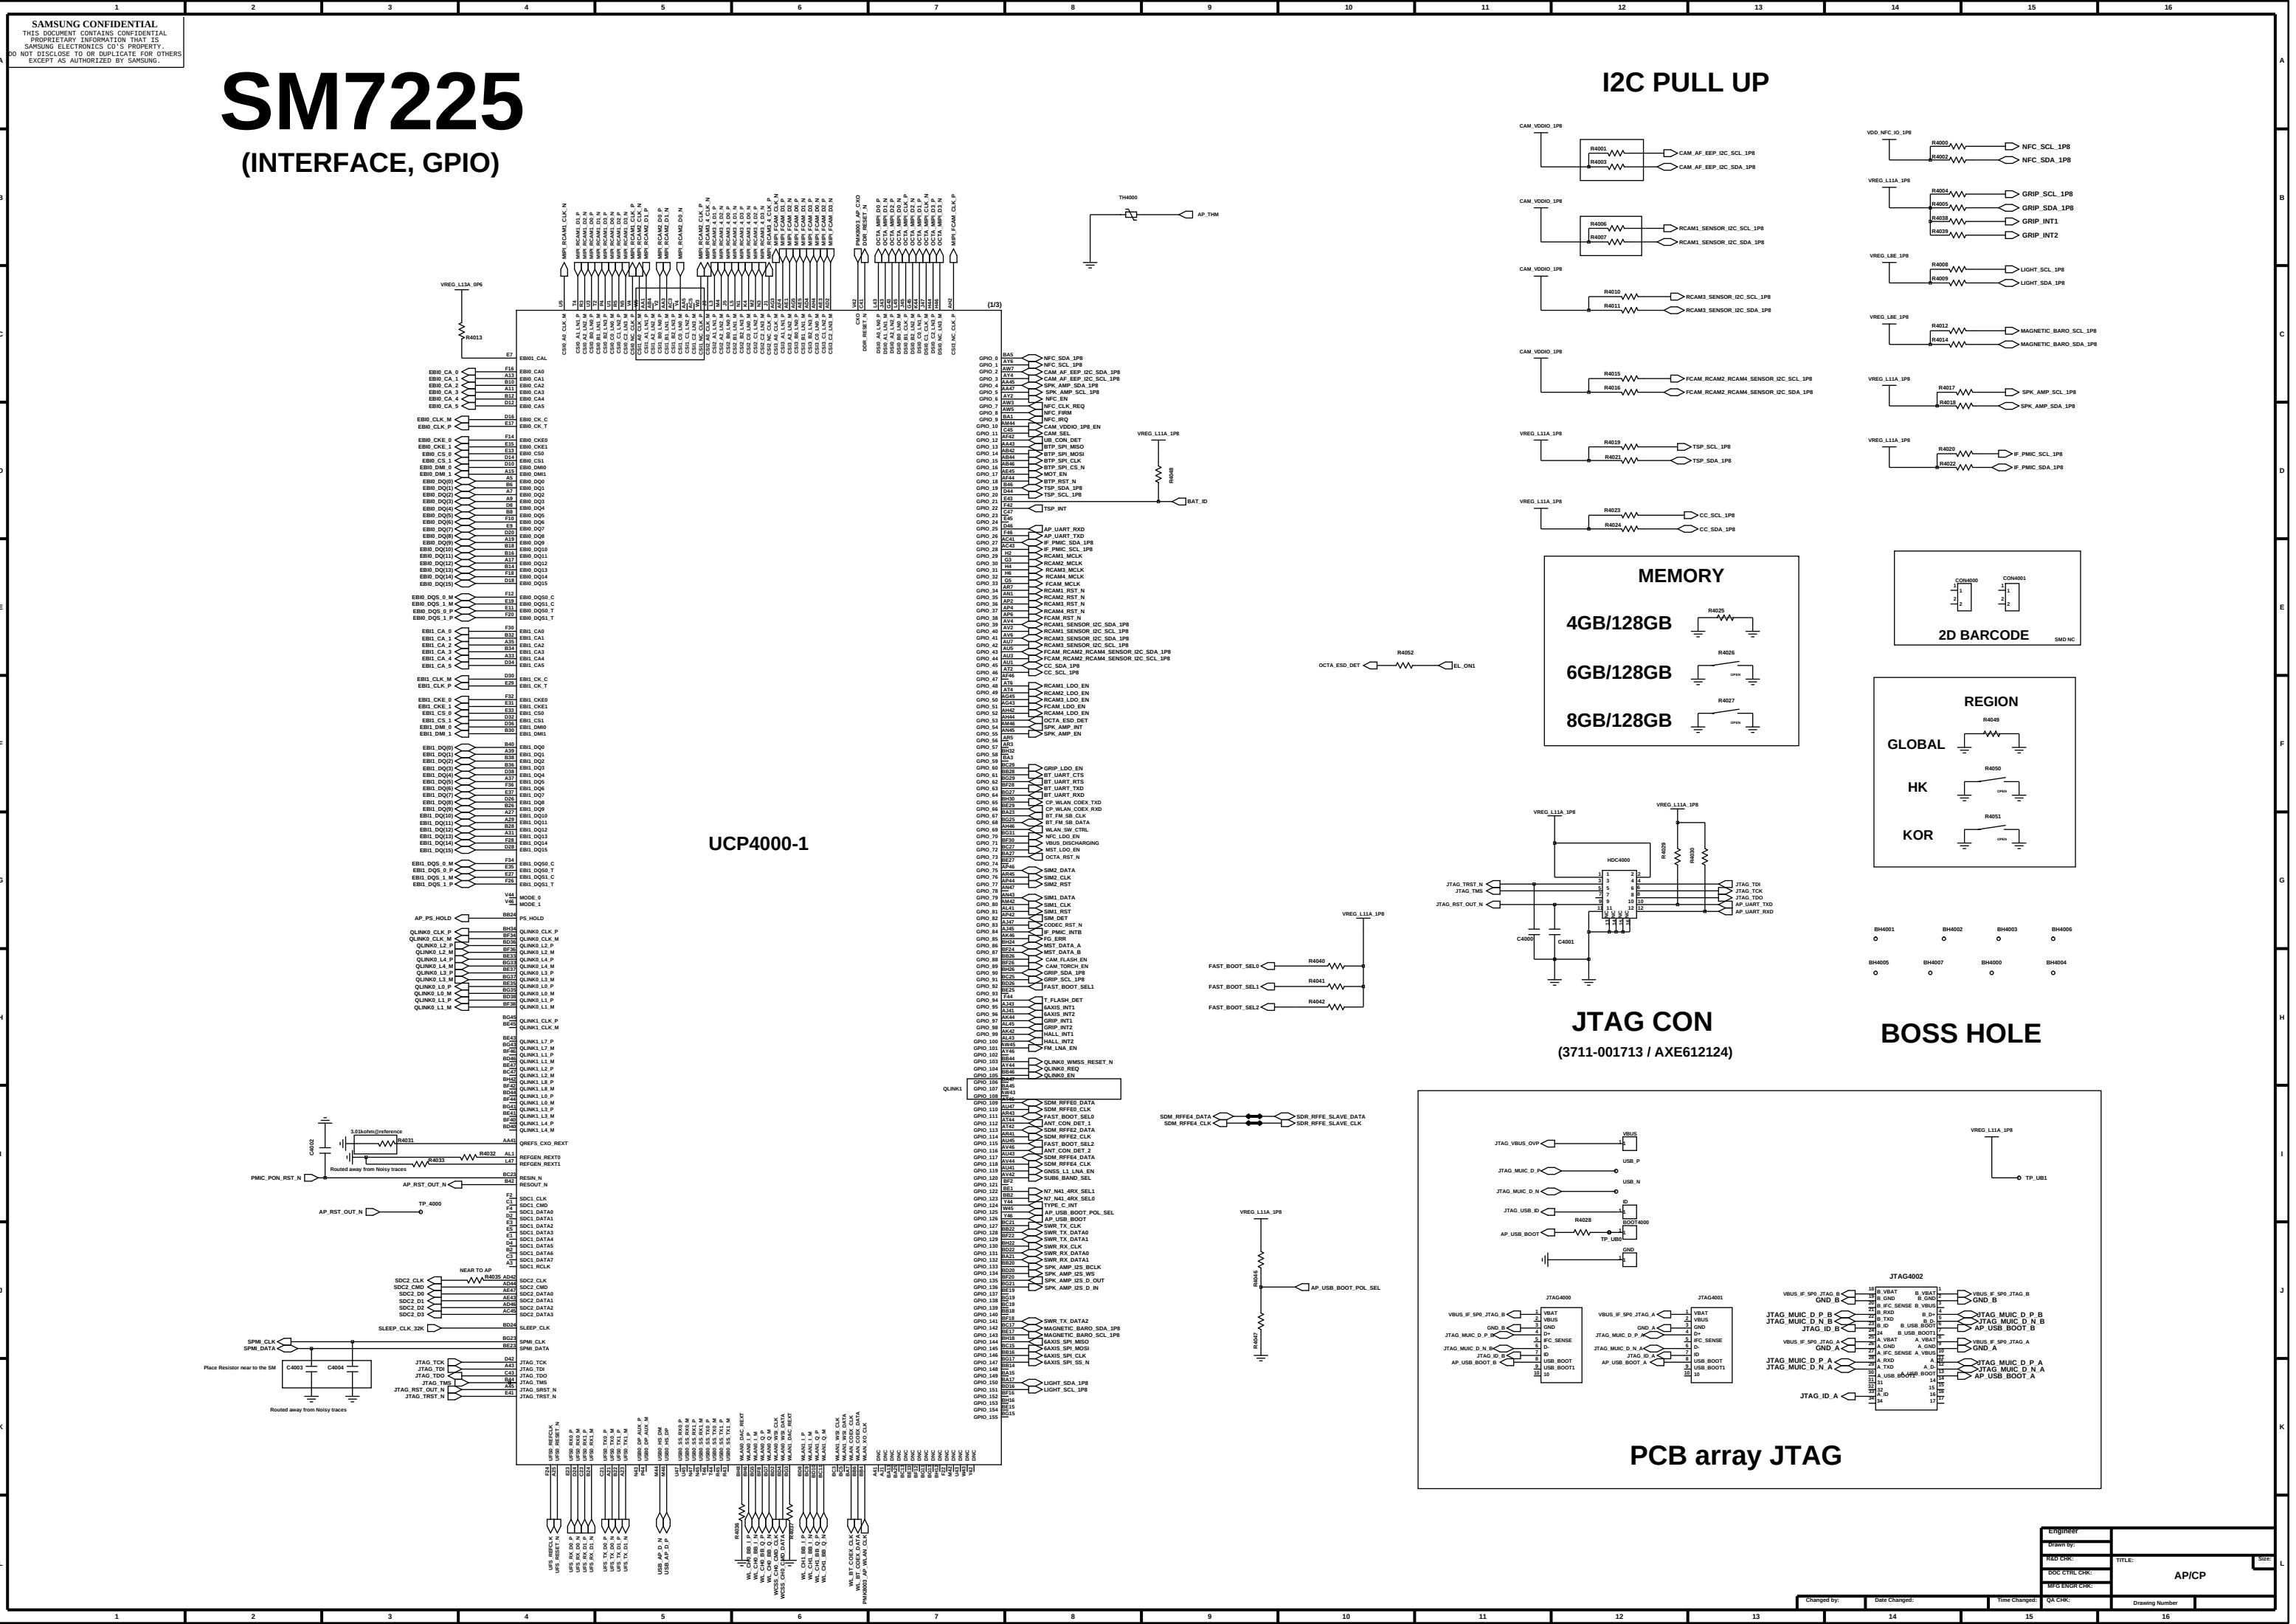


UCP4000-3

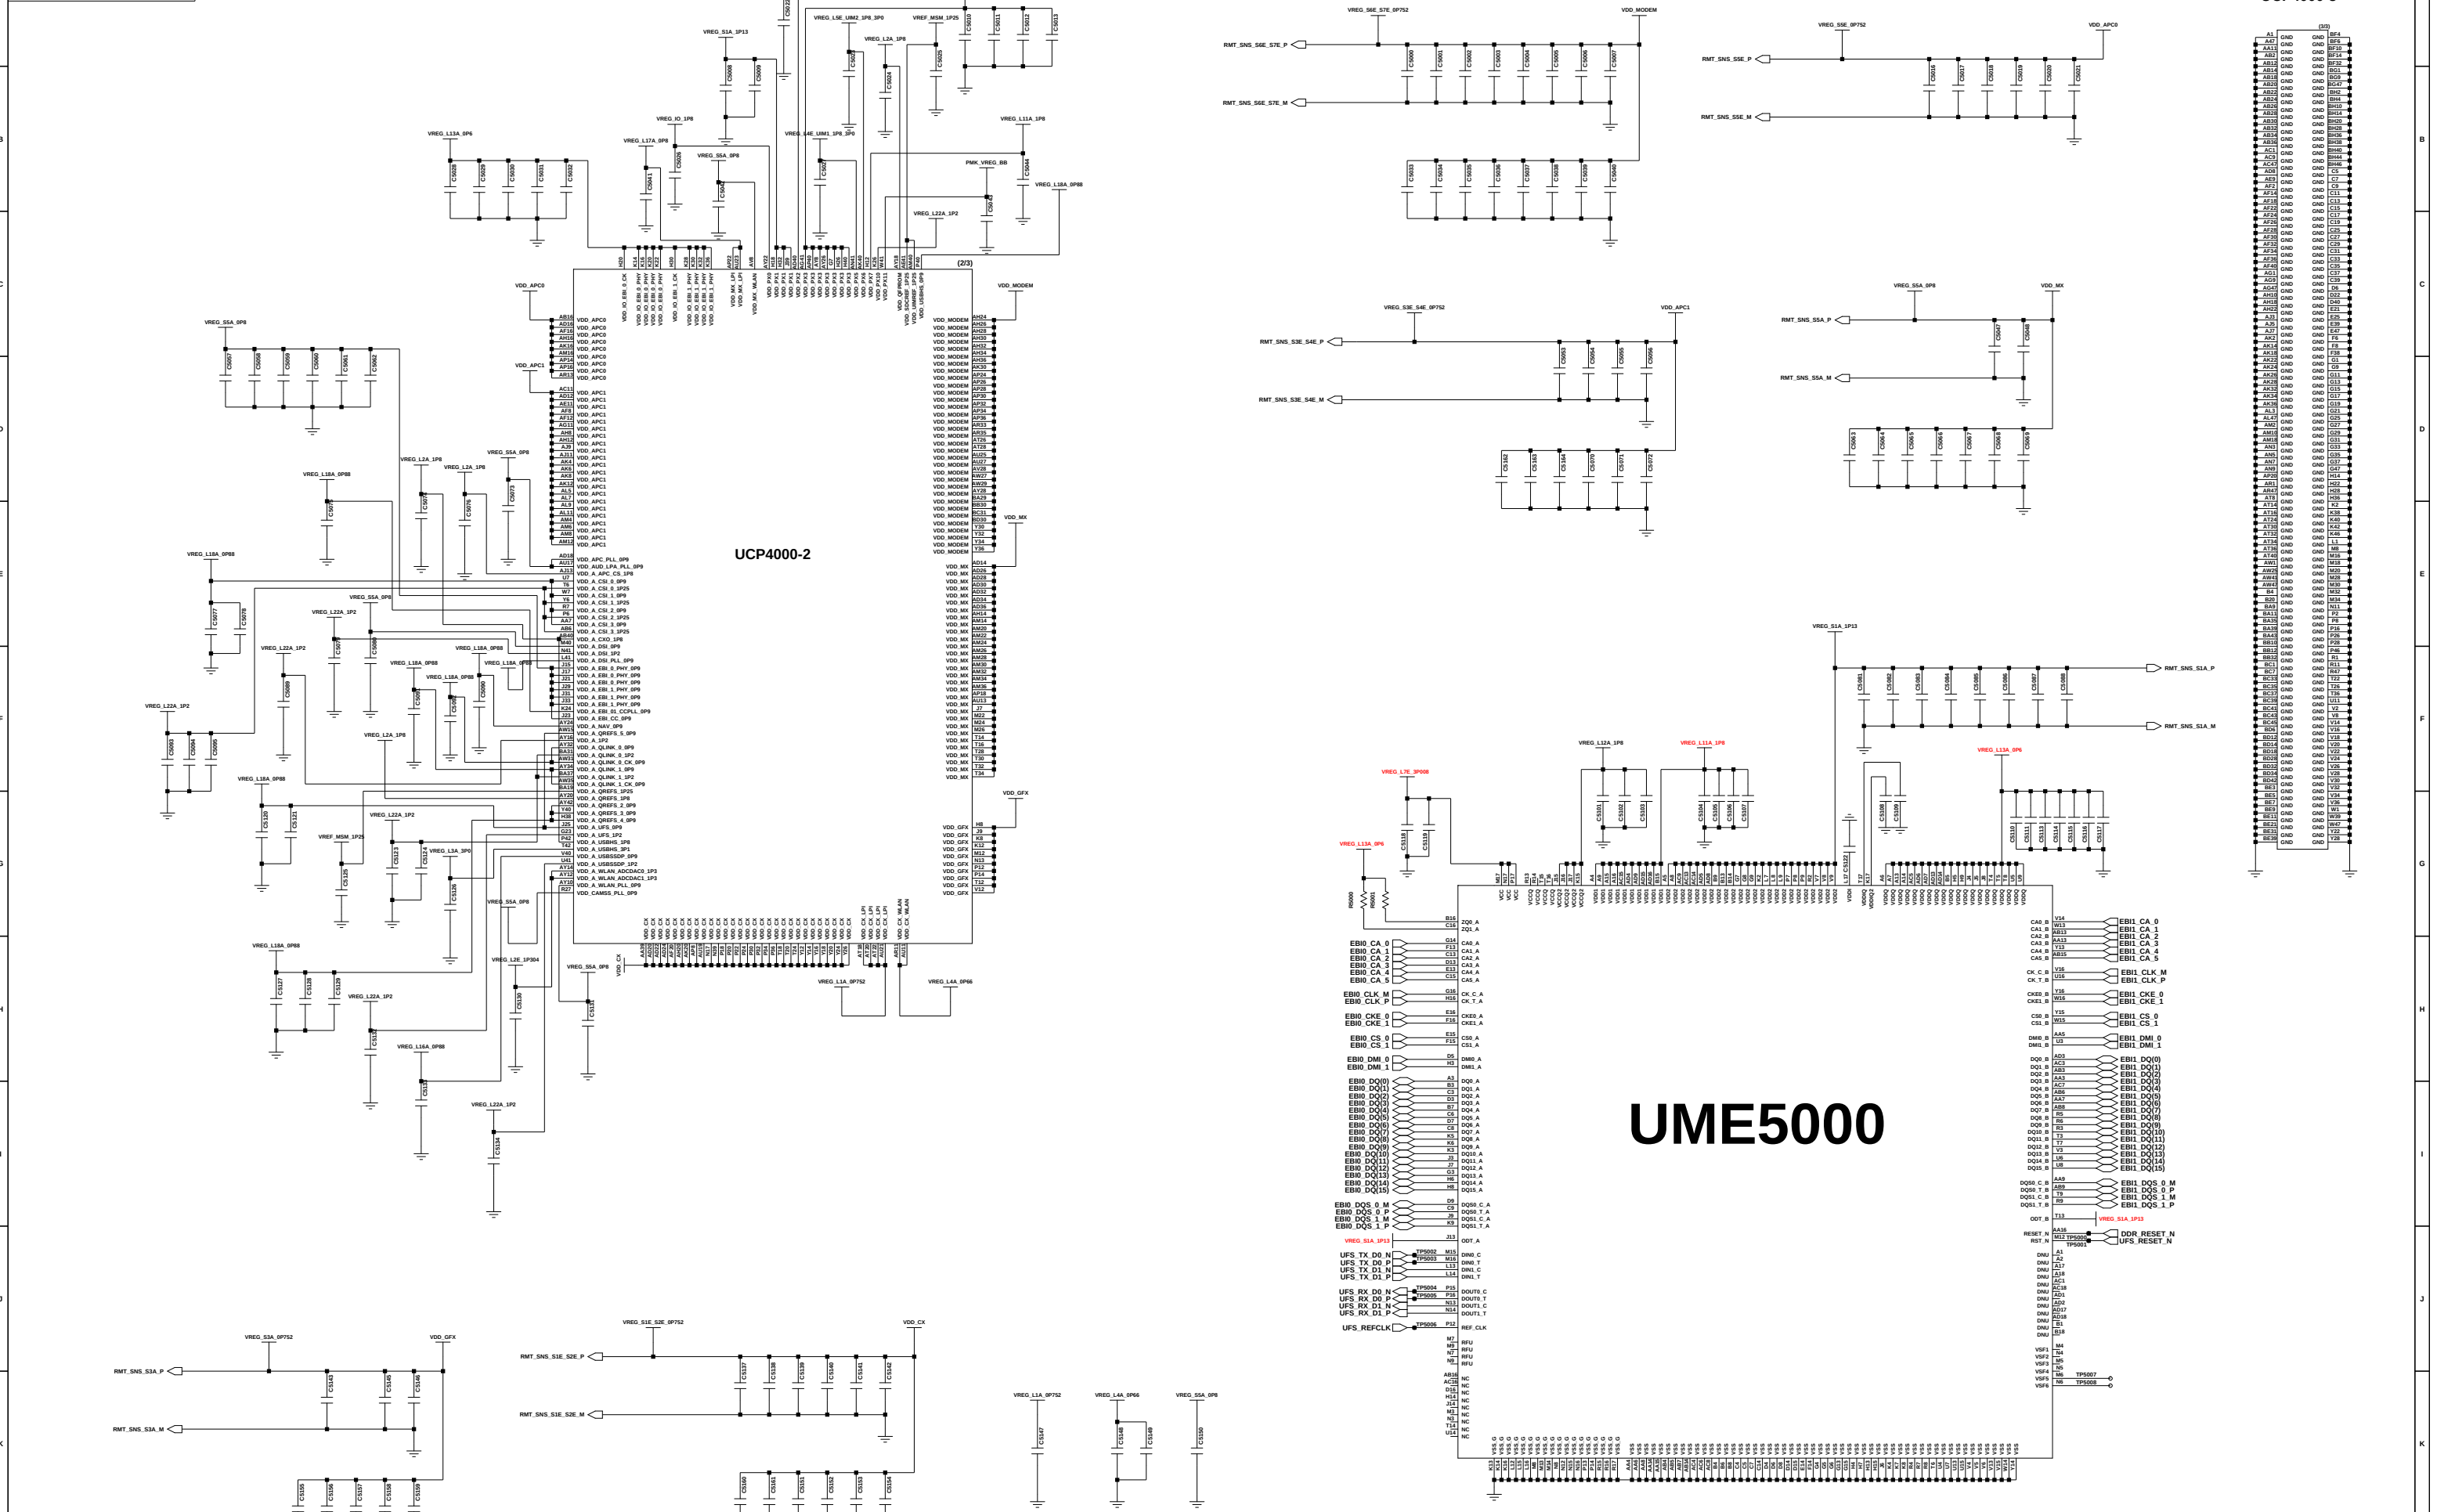

4GB + 128GB uMCP



Engineer:				L		
Drawn by:						
R&D CHK:					TITLE:	Size:
DOC CTRL CHK:					AP/CP/uMCP	
MFG ENGR CHK:						
QA CHK:	REV:	Drawing Number:	Page:			

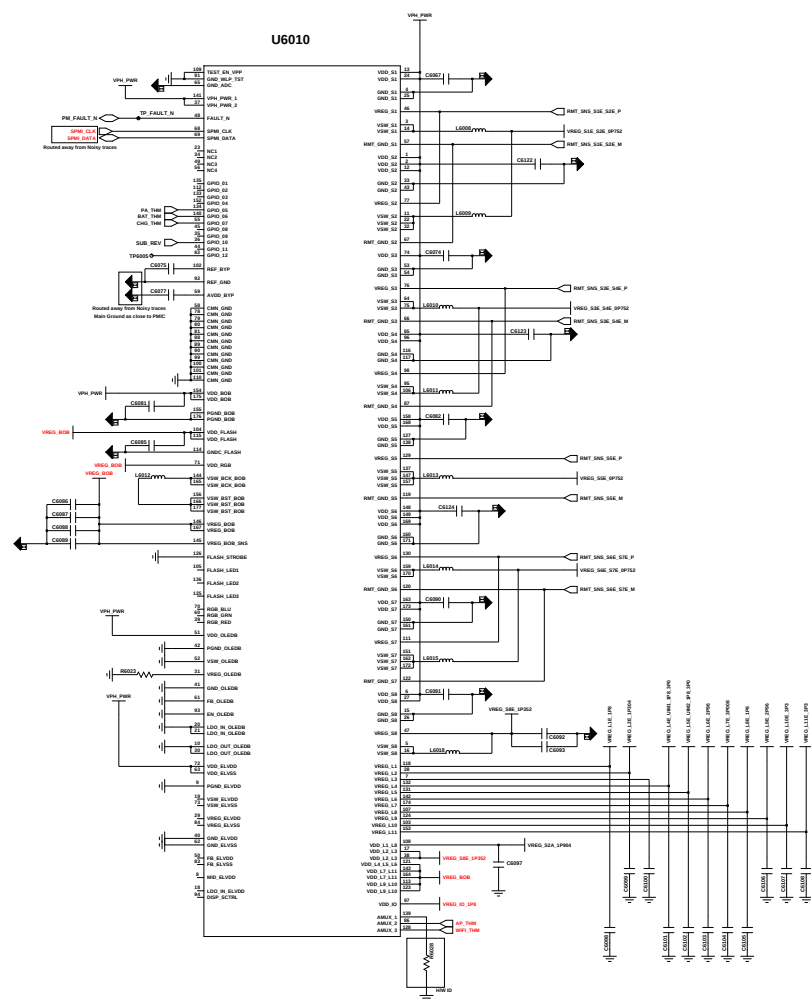


HW ID	REV	VALUE	COMMENT
00	Bring-up	12K	
01	1.V	20K	
02	REV00	30K	DV1
03	REV01	51K	DV2
04	REV01A	68K	RF TEST
05	REV02	82K	PV1
06	REV03	100K	
07		120K	
08		150K	
09		200K	
10			

2007-007590
2007-009157


IF PMIC

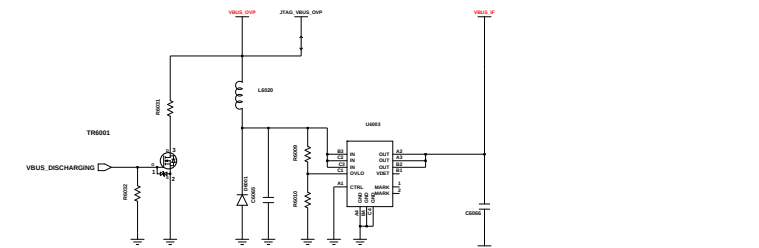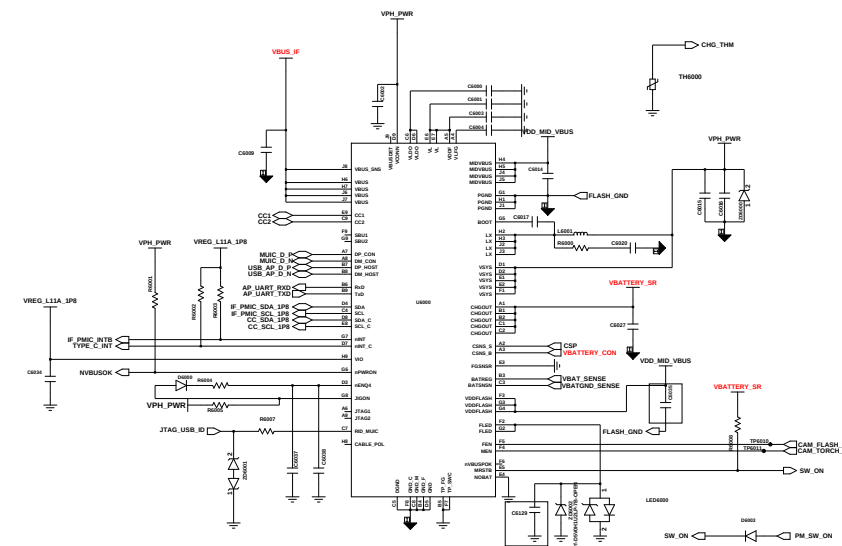


OVP

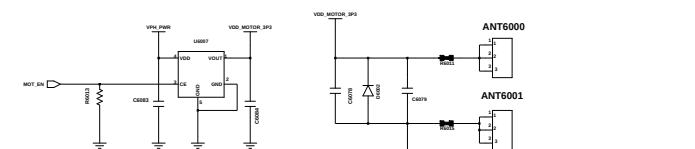


MOTOR

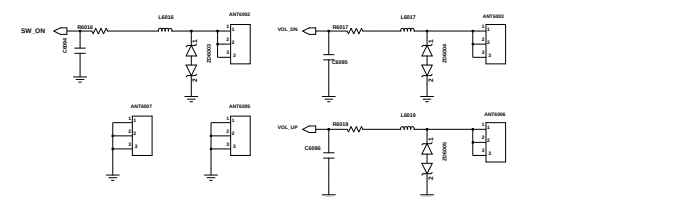


POWER & VOL KEY

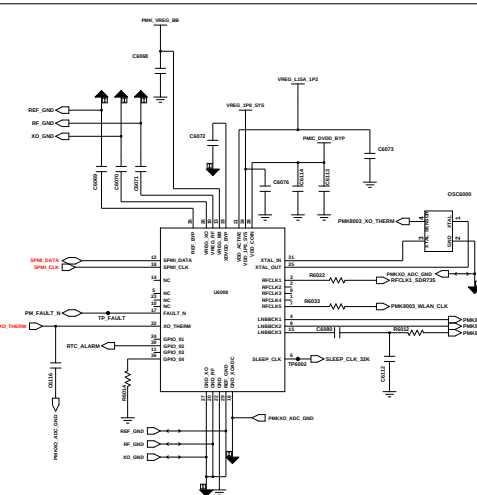


CLOCK GEN


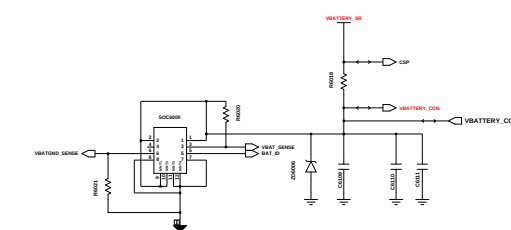


BATTERY CON

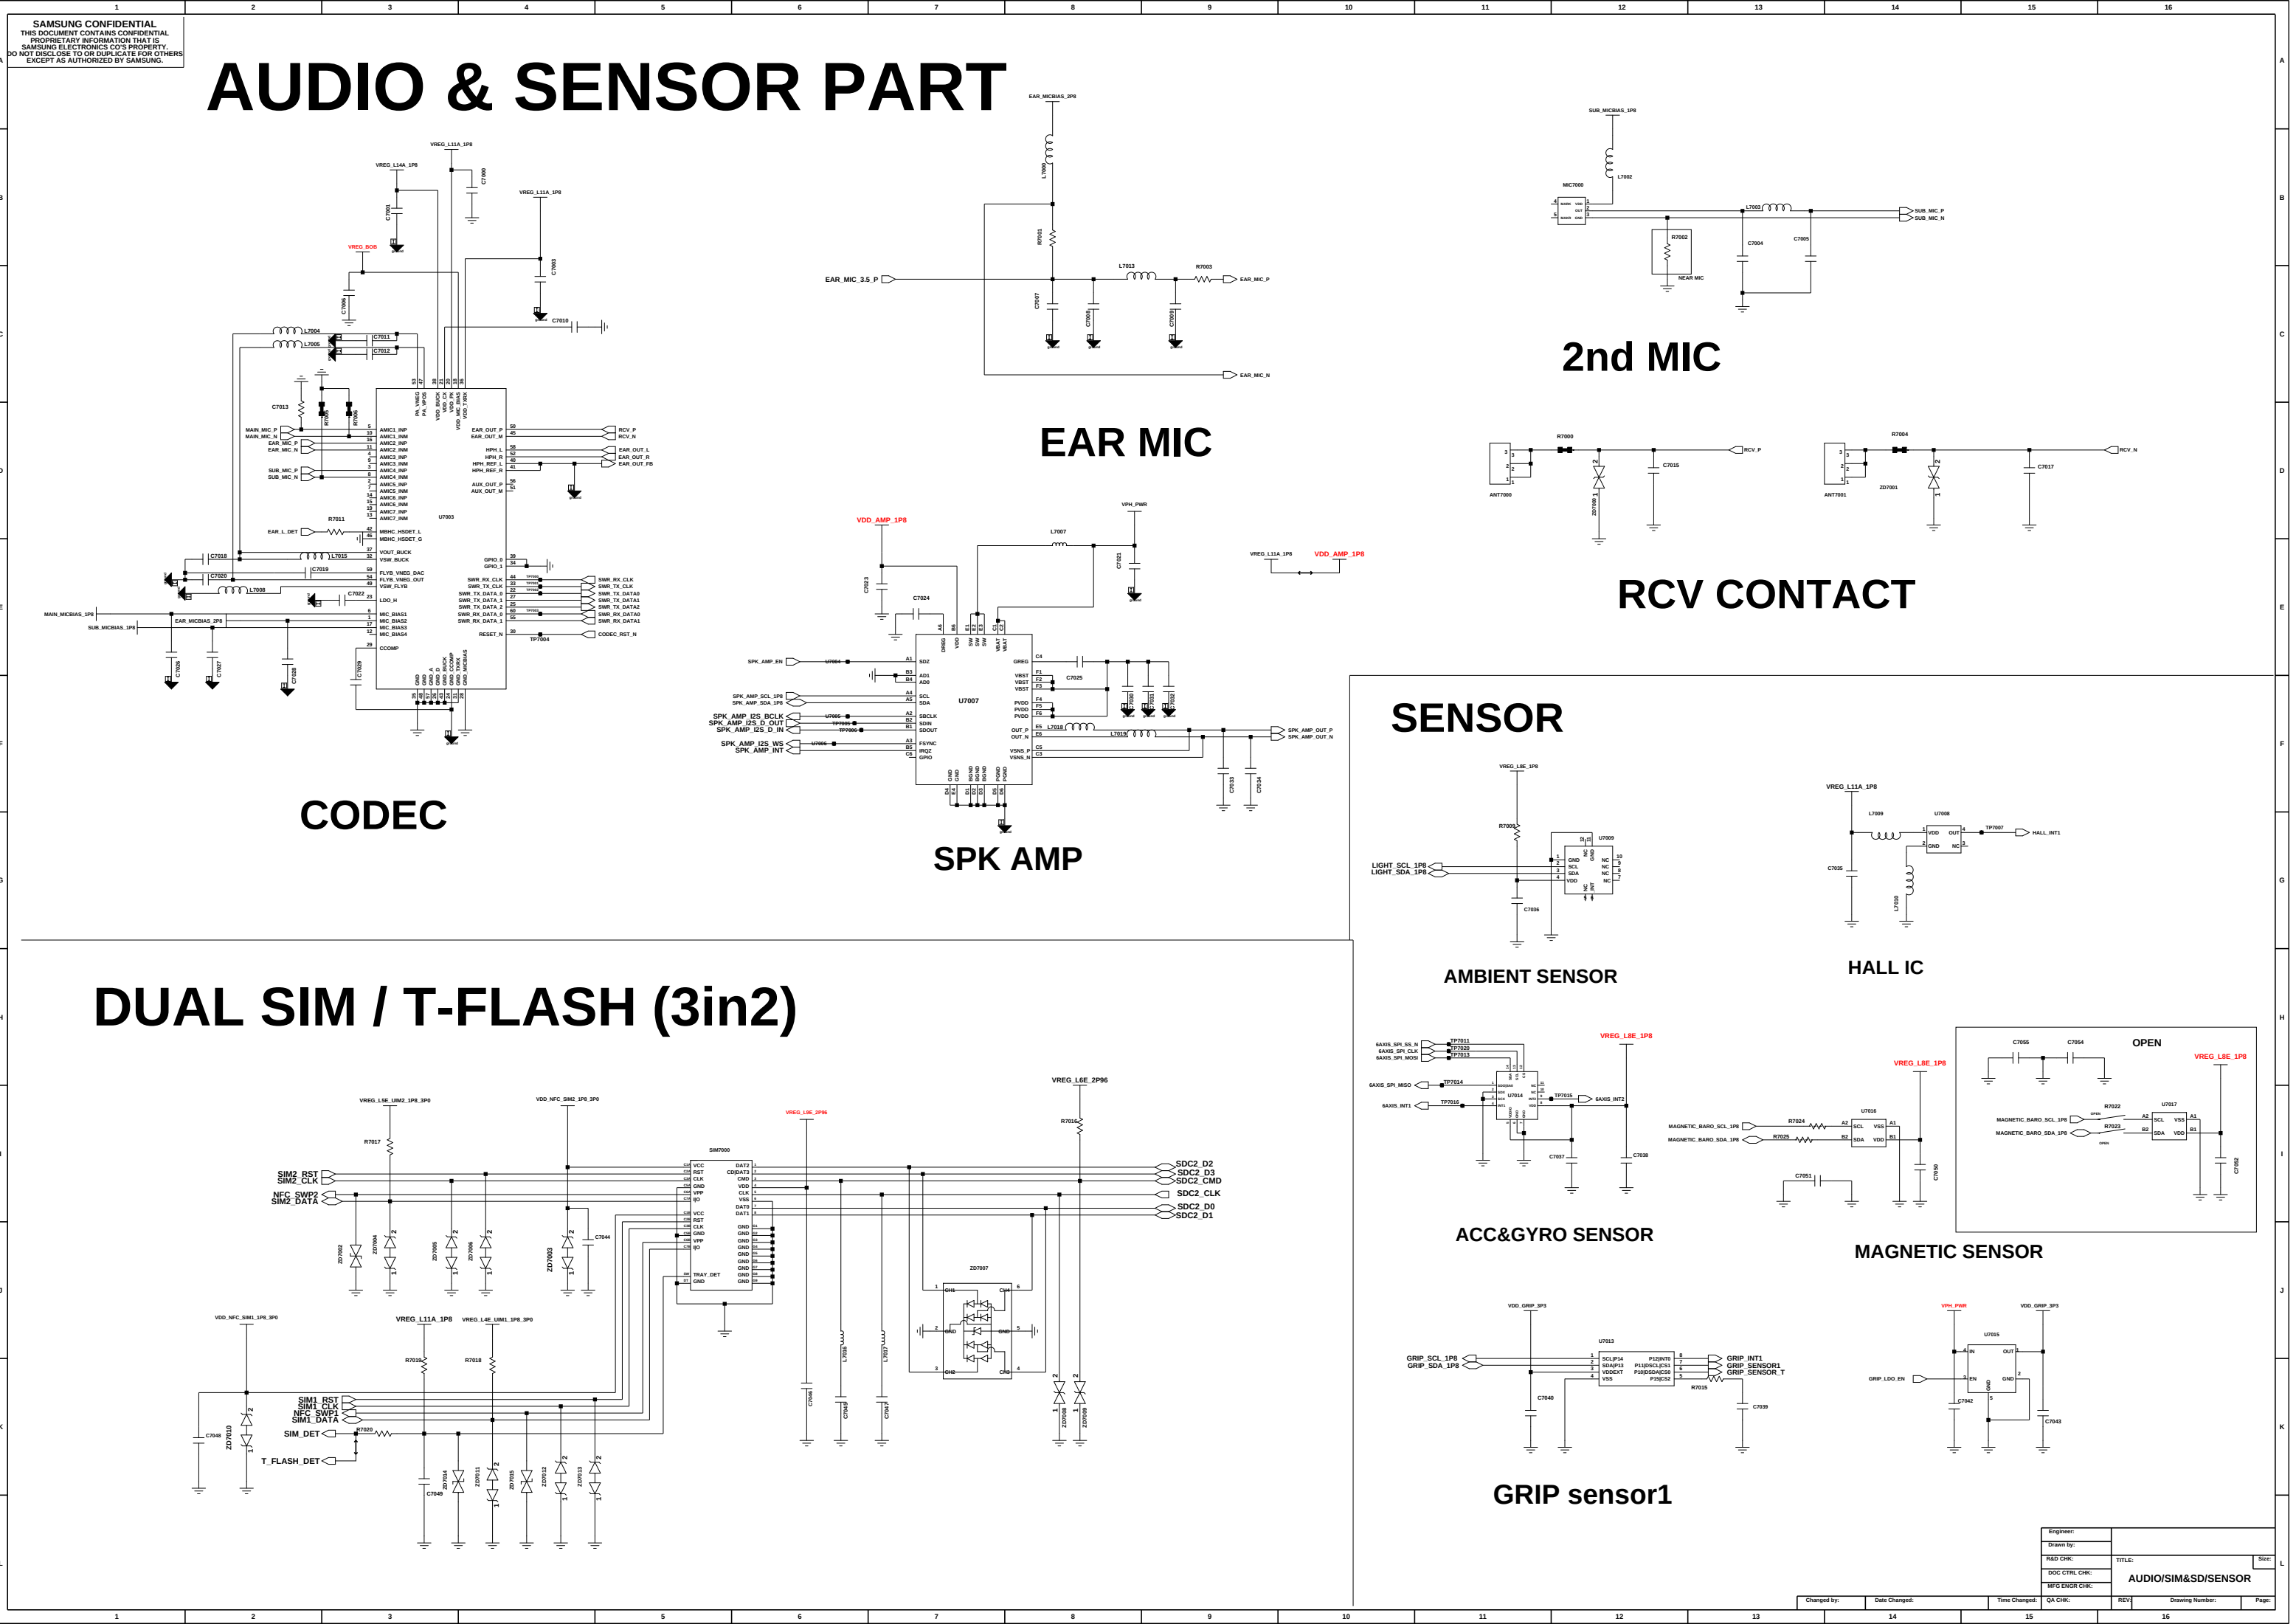



CAM PMIC



Changed by:	Date Changed:	Time Changed:	QA CHK:	REV	Drawing Number:	Page:
-------------	---------------	---------------	---------	-----	-----------------	-------




Diagram showing the pin headers for the AP, PMIC, RF3, RF_N78_PAM, and WIFI_TOP components. Each header is labeled with its component name and a connector ID (SC9003, SC9002, SC9004, SC9009, SC9001).

- AP (SC9003):** A 32-pin header with pins numbered 1 to 32. Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, and 32 are shown.
- PMIC (SC9002):** A 16-pin header with pins numbered 1 to 16. Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, and 16 are shown.
- RF3 (SC9004):** A 19-pin header with pins numbered 1 to 19. Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, and 19 are shown.
- RF_N78_PAM (SC9009):** A 10-pin header with pins numbered 1 to 10. Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, and 10 are shown.
- WIFI_TOP (SC9001):** A 9-pin header with pins numbered 1 to 9. Pins 1, 2, 3, 4, 5, 6, 7, 8, and 9 are shown.

Changed by: user20	Date Changed: Thursday, June 18, 2015	Time Changed: 10:18:28 am	QA CHK:	REV	Drawing Number:	Page: 1
14		15		16		

Charge :	
Contact :	
Date :	
Routing :	
Resin :	

Created date of PCB data : 2020/9/23 10:53:42

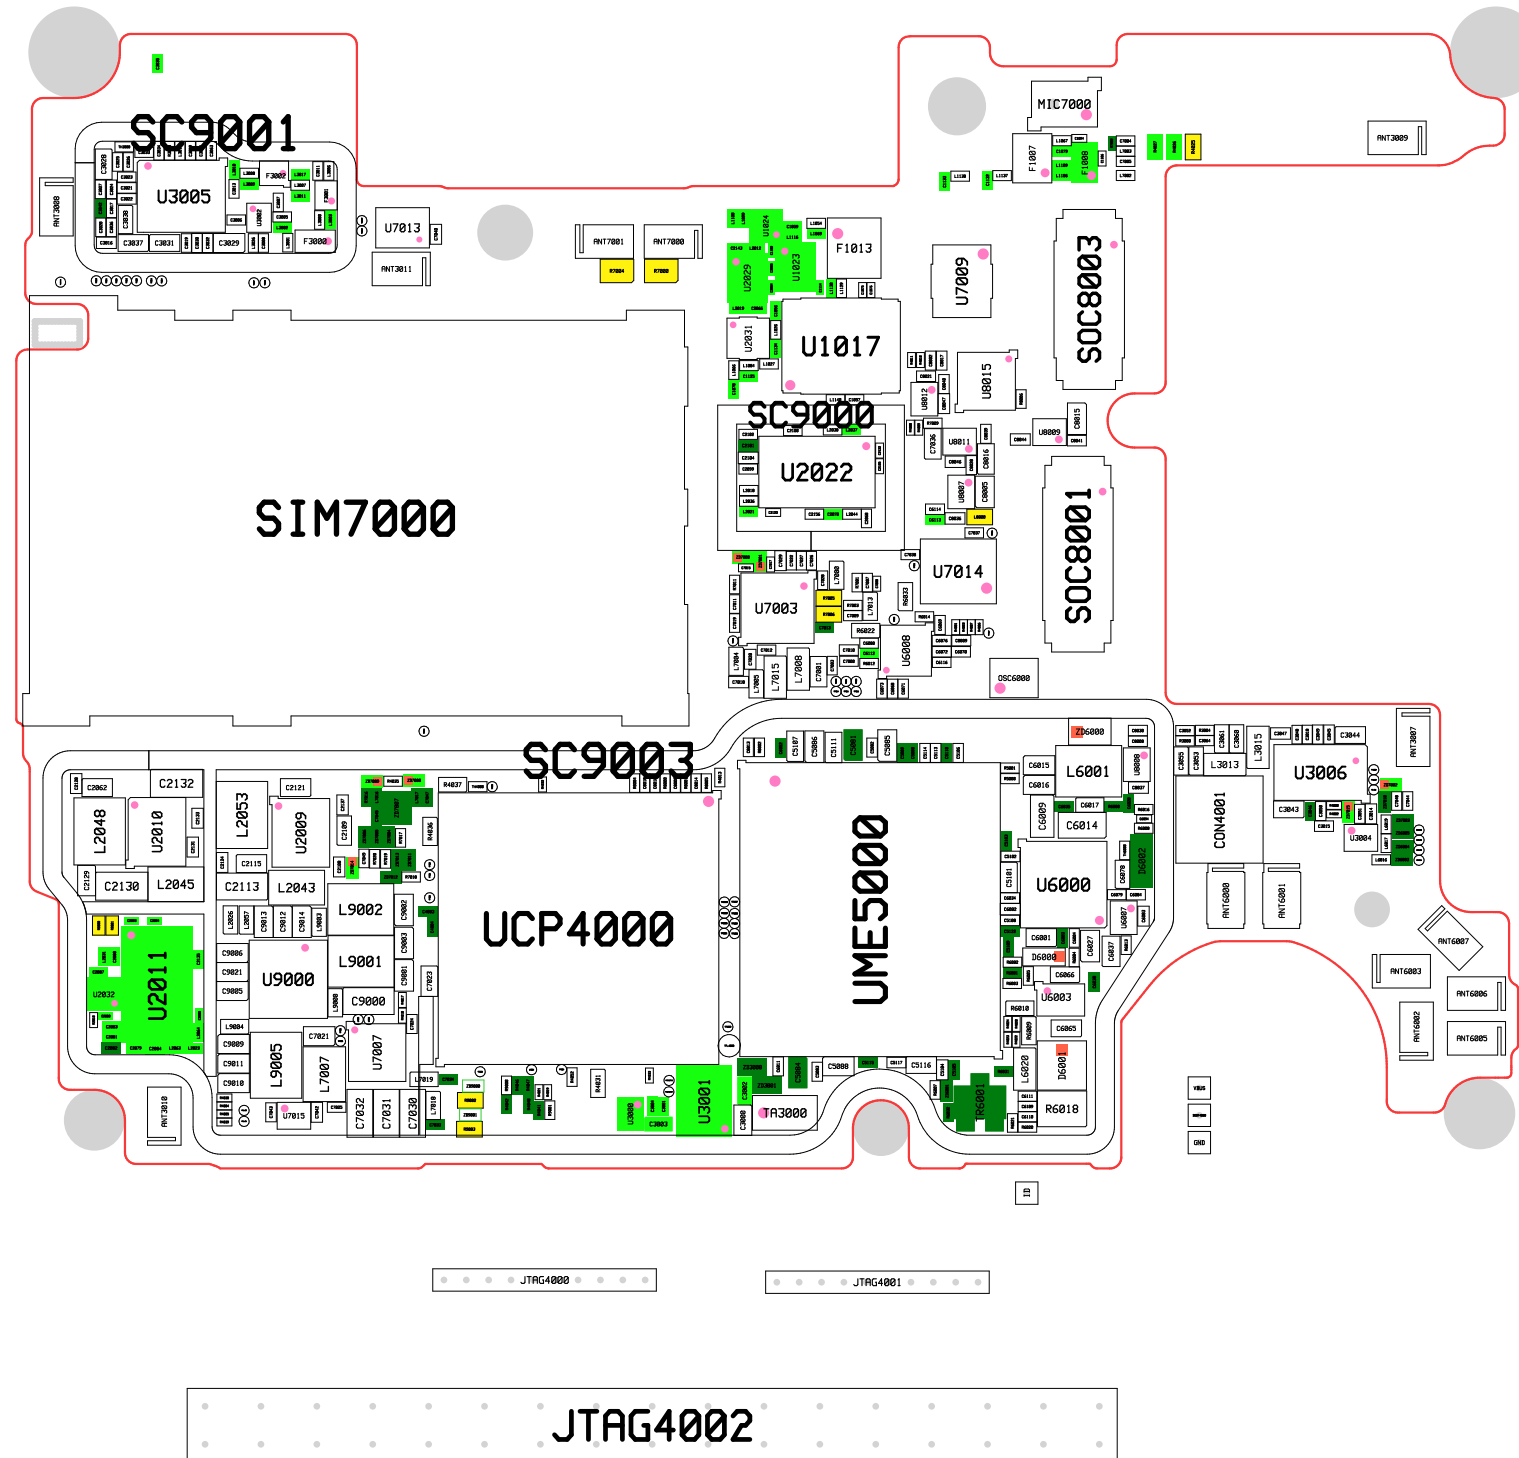

Model :
Revision :
Manufacture Count :
Charge :
Contact :
Date :
Routing :
Resin :

VX_SETUP(2020-06-20)_HHP

Created date of PCB data : 2020/9/23 10:53:42

