


REVISION RECORD			
ITER	ECO NO.	APPROVED	DATE


B1/B2/B3/B5/B8/B28/ B7 / B34 / B39 / B38 / B40/ B41PA

CMCC 3M: 11523031 4M:11523032

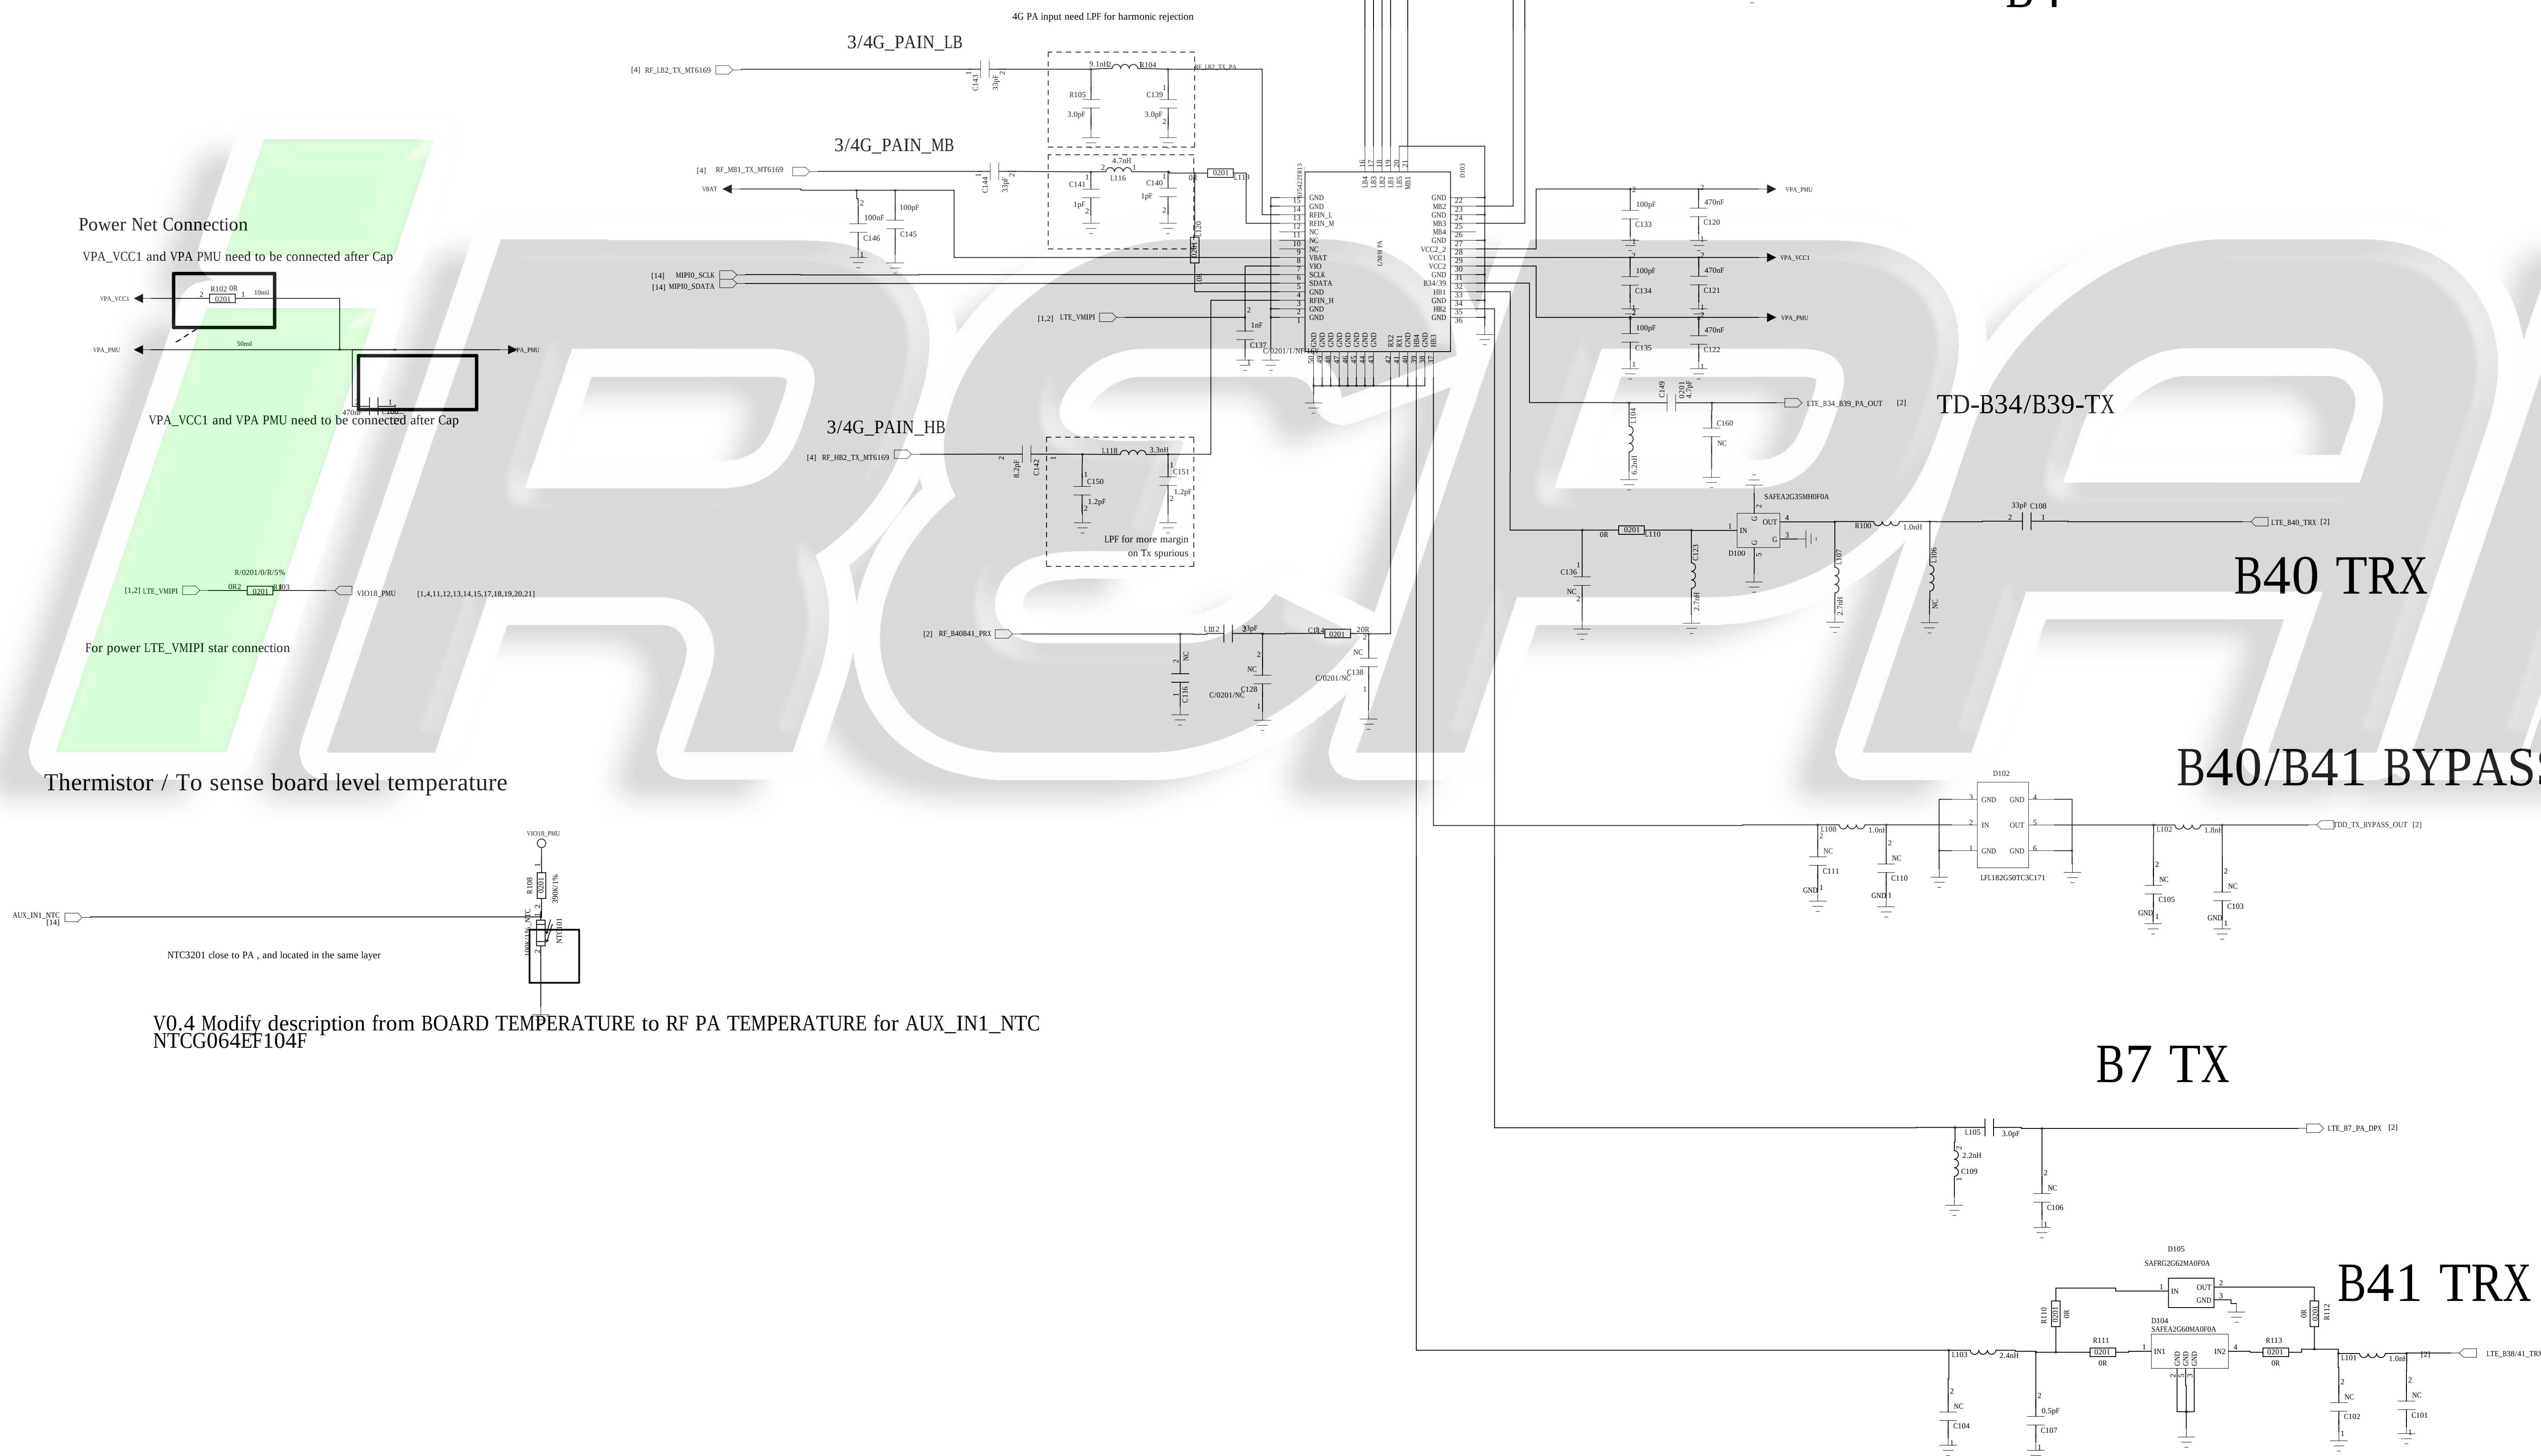

Power Net Connection

VPA_VCC1 and VPA PMU need to be connected after Cap

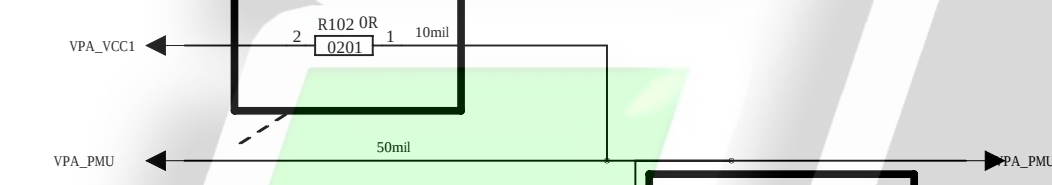


VPA_VCC1 and VPA PMU need to be connected after Cap



For power LTE_VMIPI star connection




Thermistor / To sense board level temperature

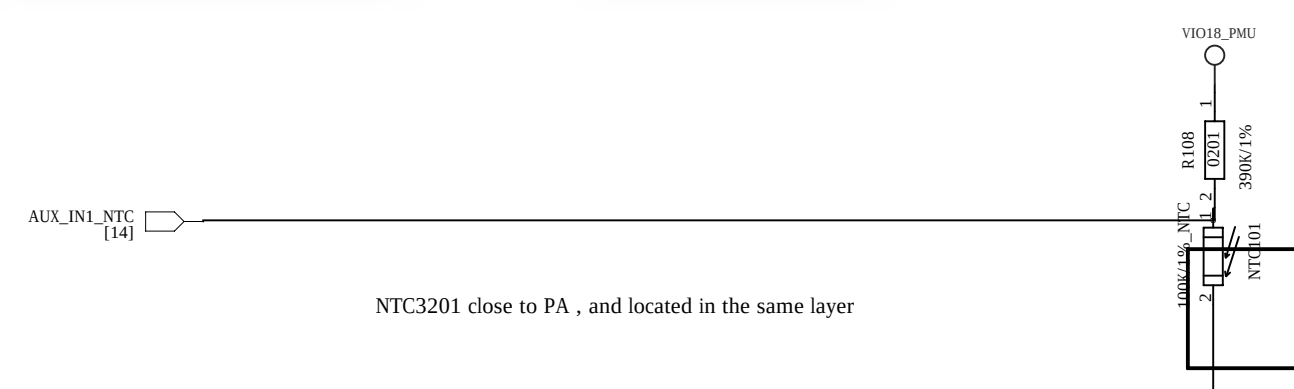


V0.4 Modify description from BOARD TEMPERATURE to RF PA TEMPERATURE for AUX_IN1_NTC
NTCG064EF104F

COMPANY: Shanghai Longcheer			
TITLE: Annzo2			
DRAWN: <Drawn By>	DATED: <Drawn Date>	CODE: <Code>	SIZE: A0
CHECKED: <Checked By>	DATED: <Checked Date>	QC: <QC Date>	REVISION: <Revision Number>
QUALITY CONTROL: <QC By>	DATED: <QC Date>	SCALE: <Scale>	SHEET: 23
RELEASED: <Released By>	DATED: <Release Date>		


CMCC 3M:11522176 4M:11522178

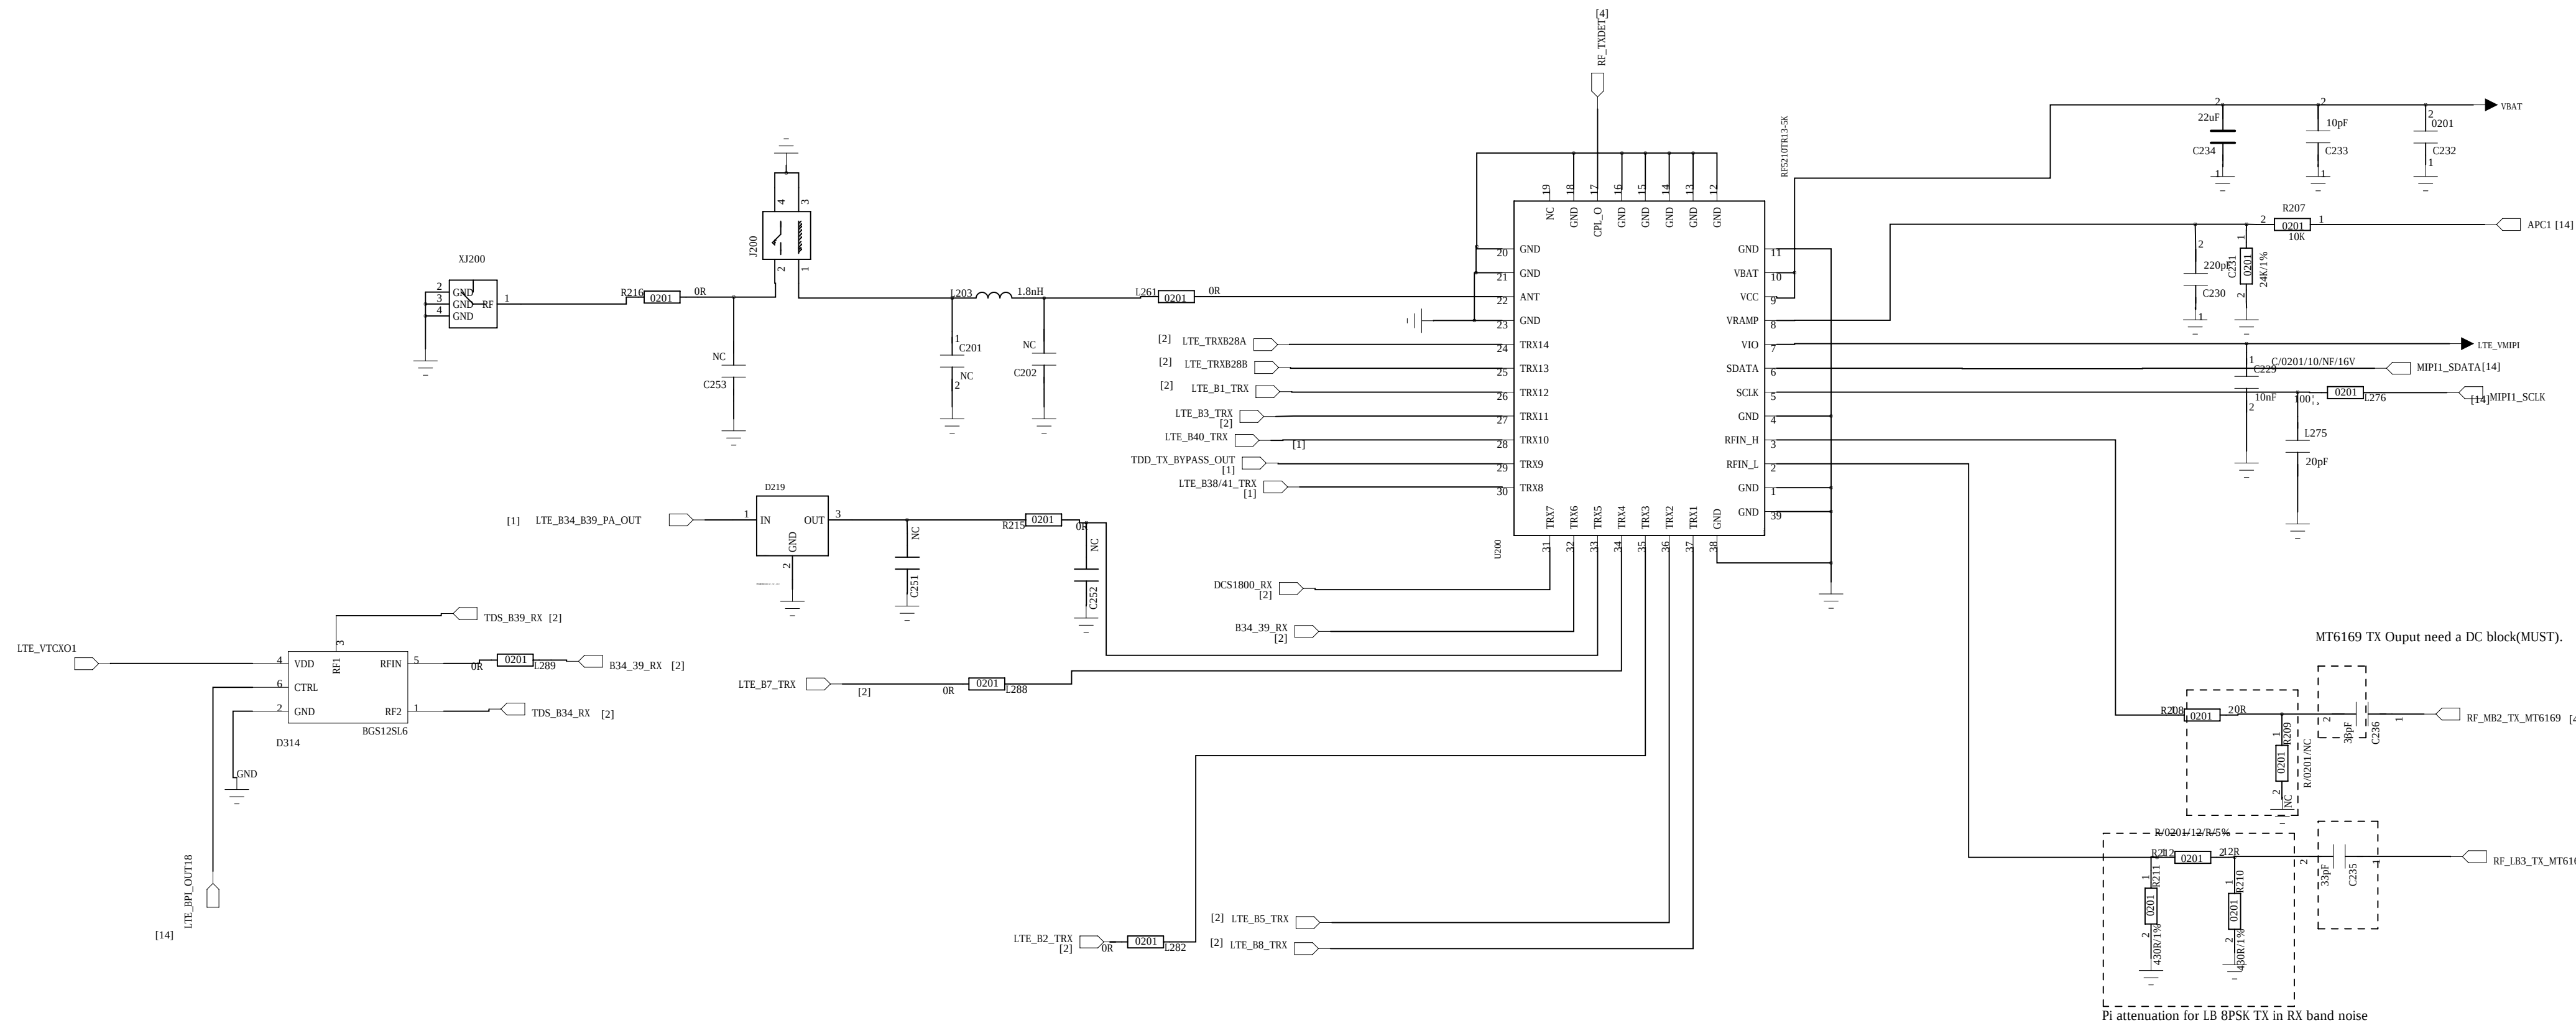


B5/B8 PRX_SWITCH

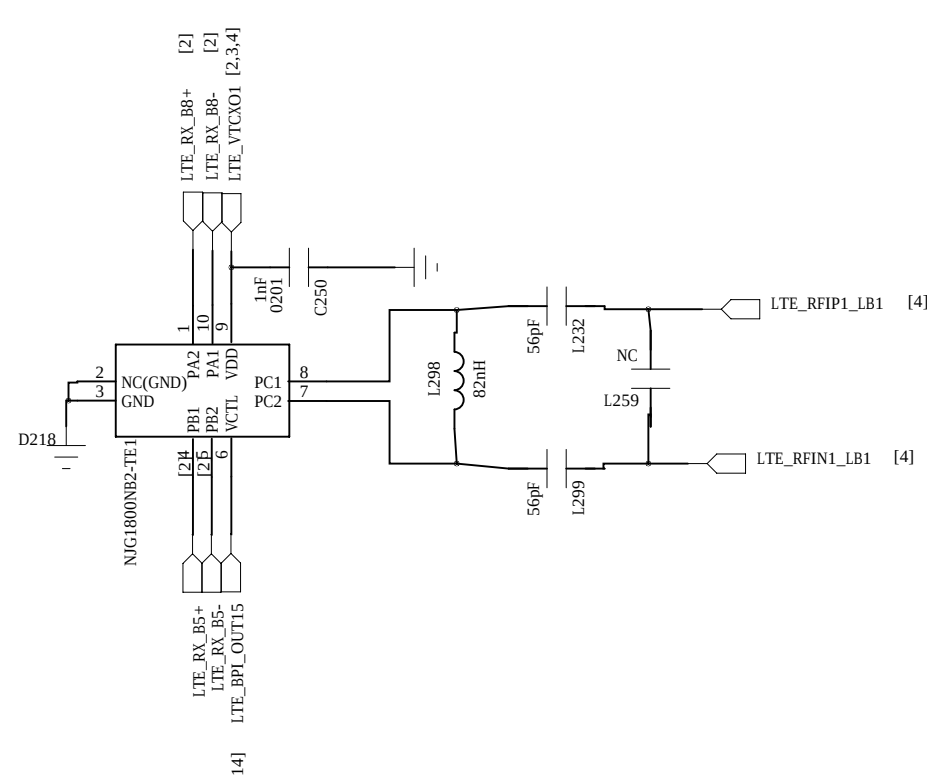


B28 PRX_SWITCH

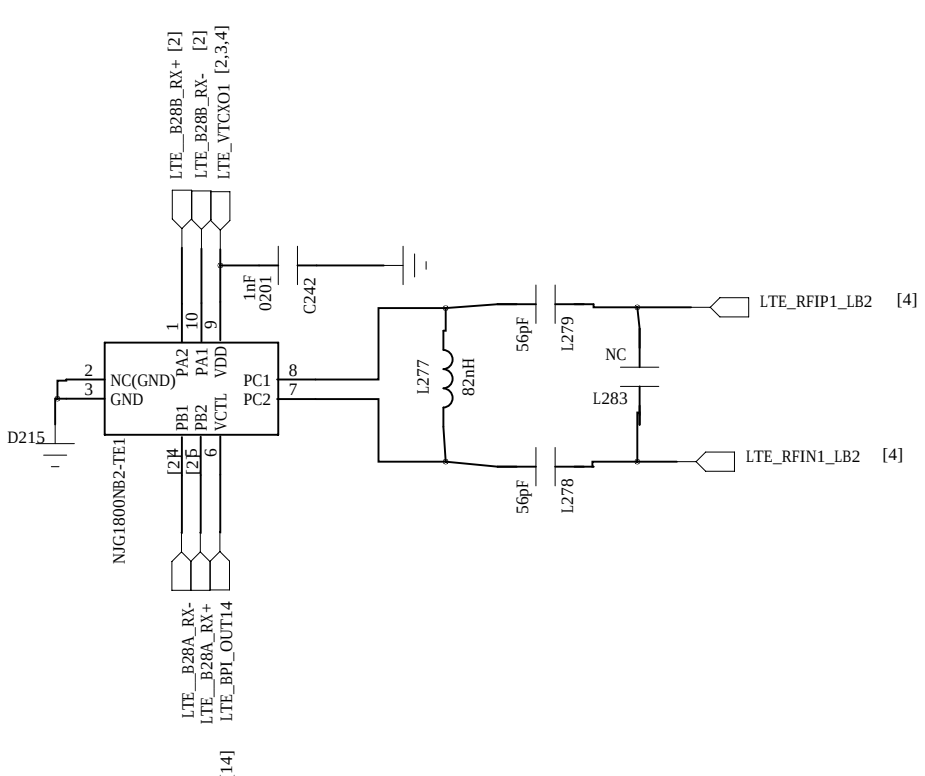


B1 TRX

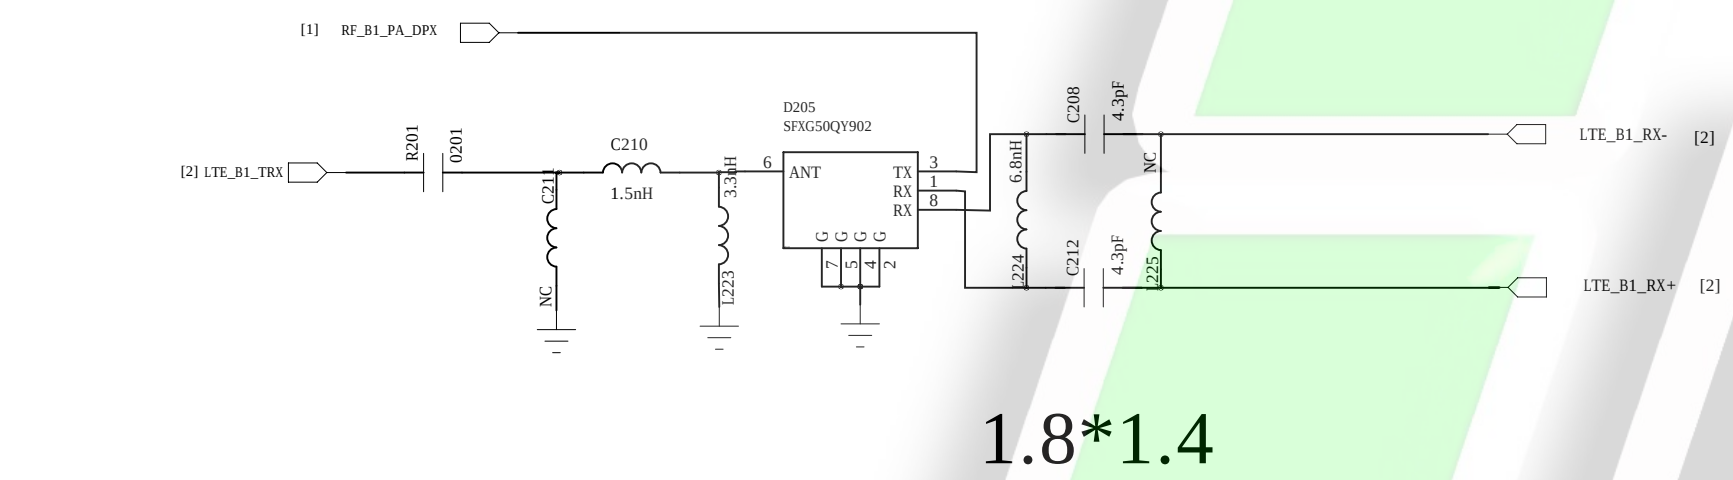


B5 TRX

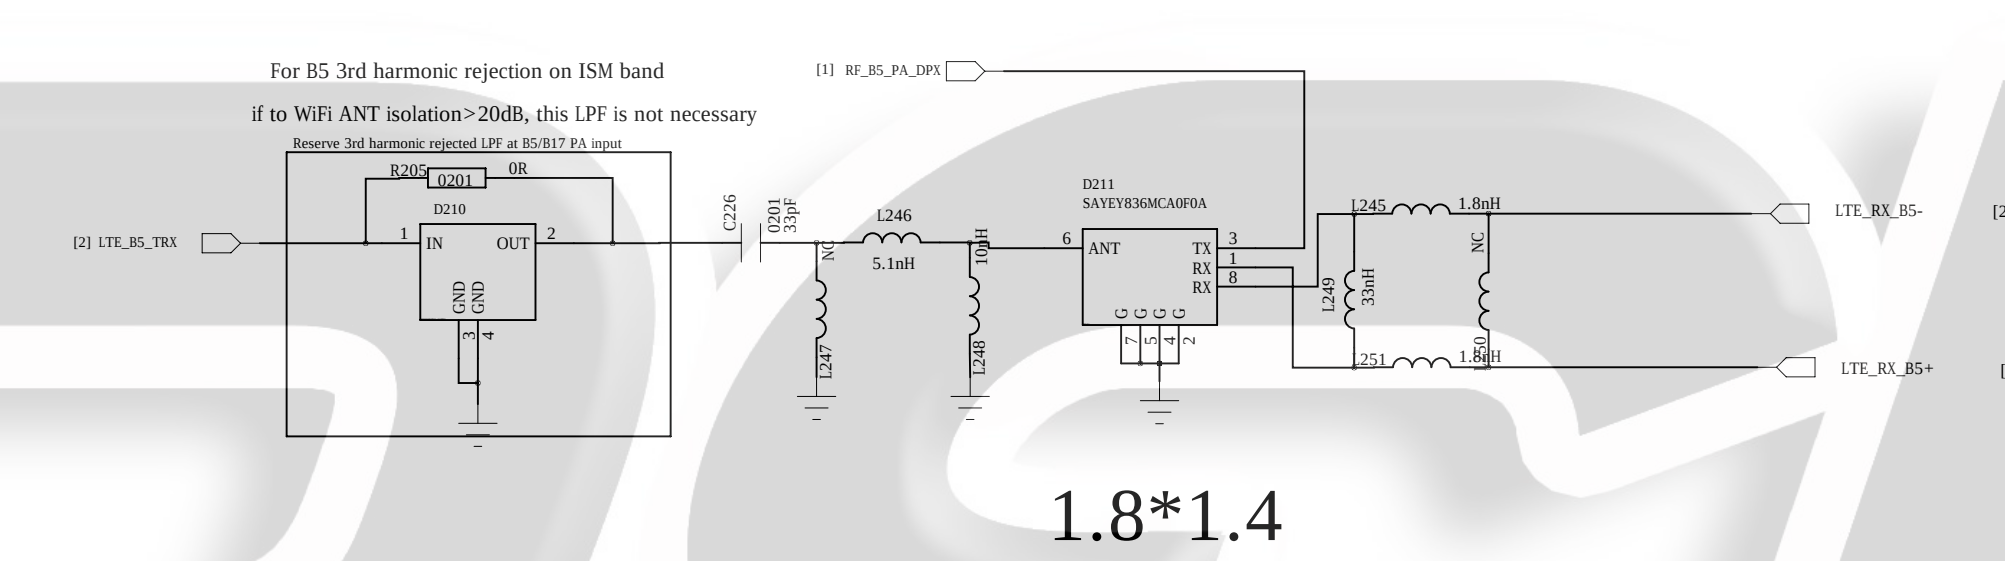


B2/B7 PRX_SWITCH

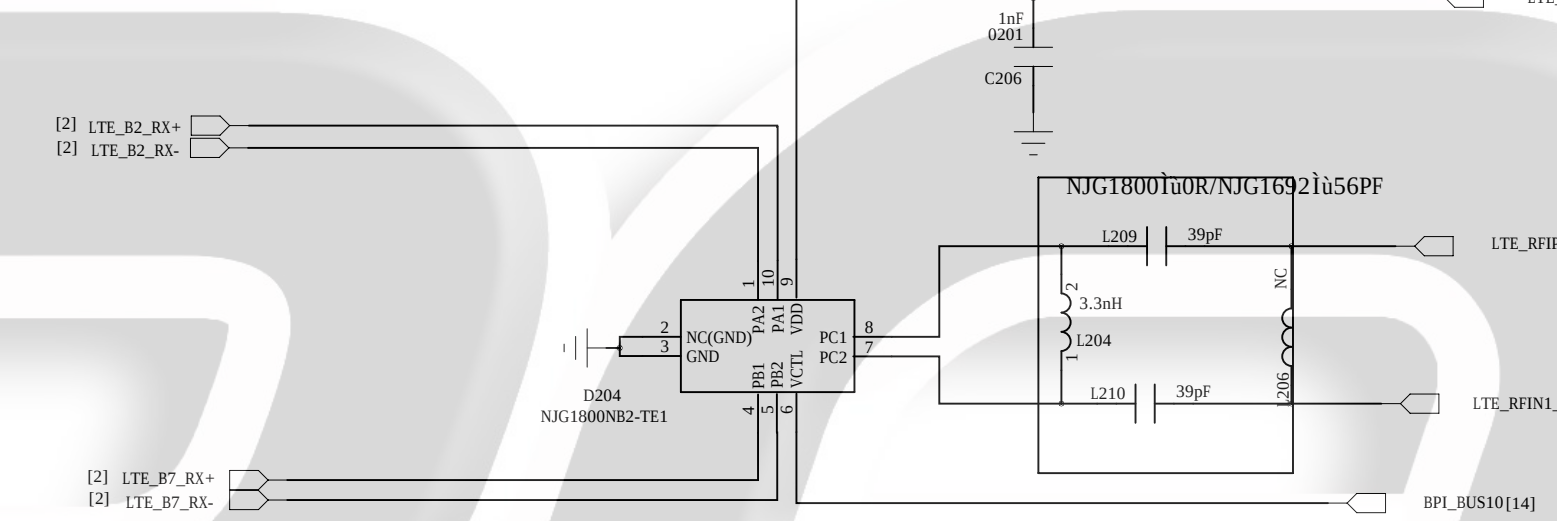


B1/B3 PRX_SWITCH

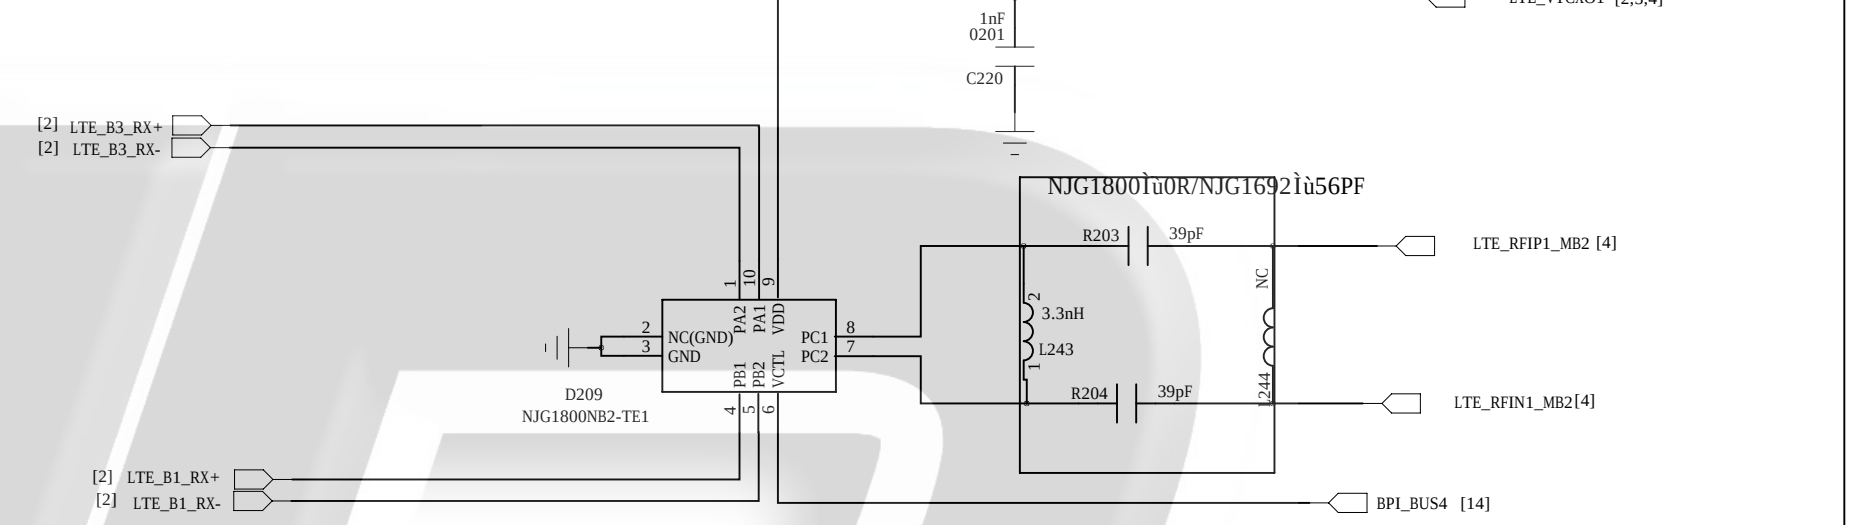


B2 TRX

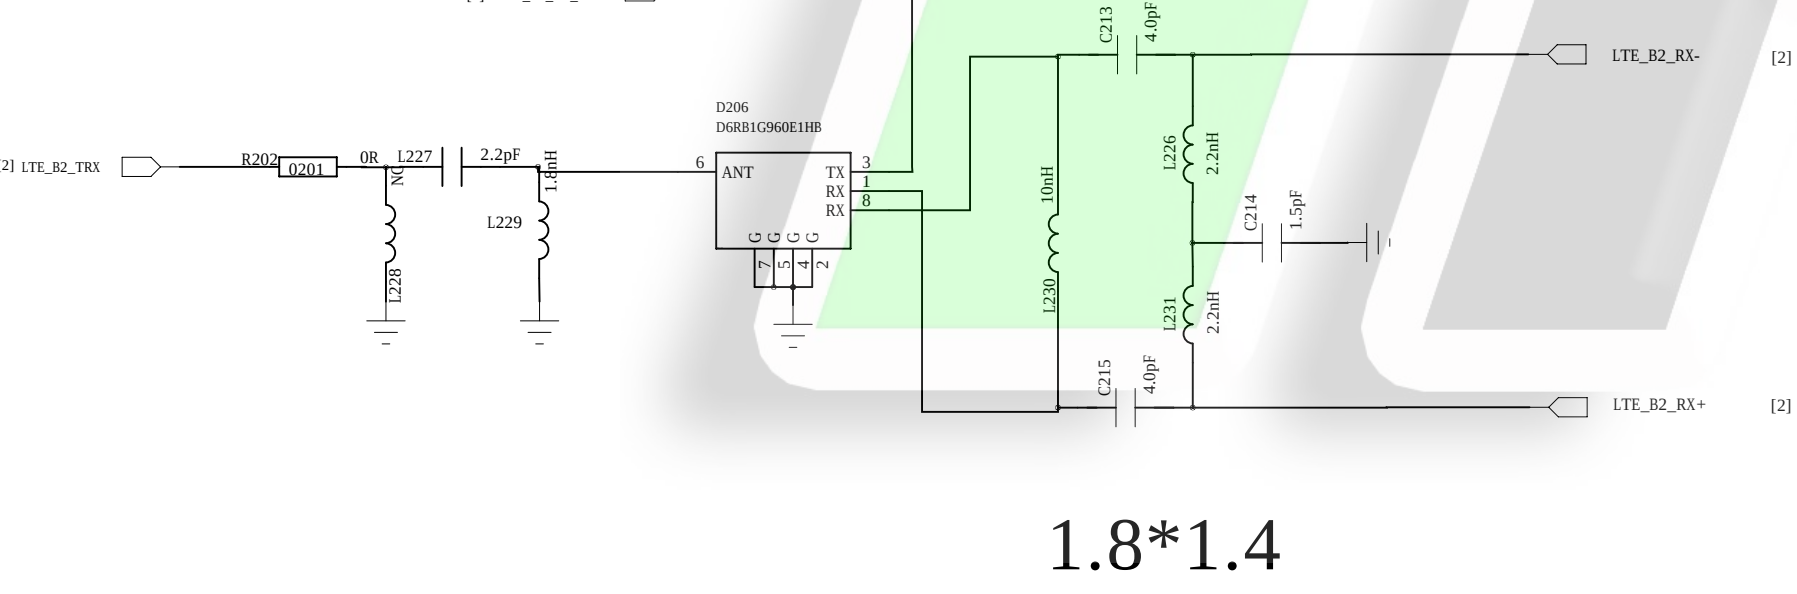


B28A TRX

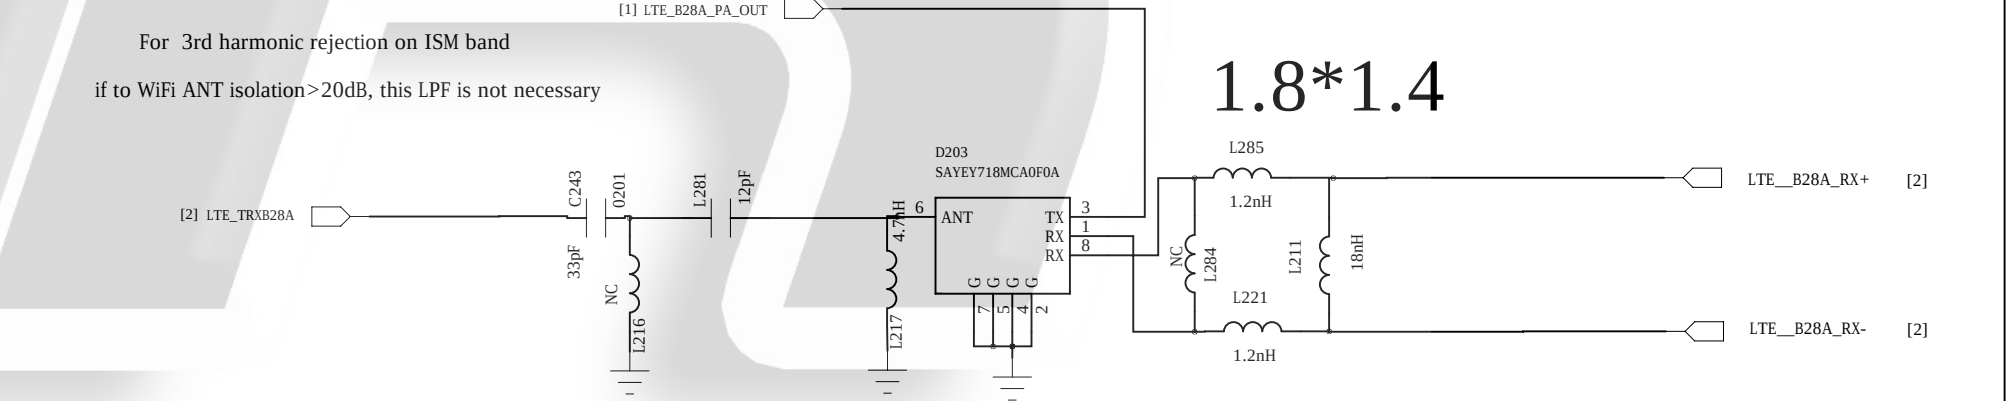


B3 TRX B3:27159914 B4:SAYEY1G73CA0F0A

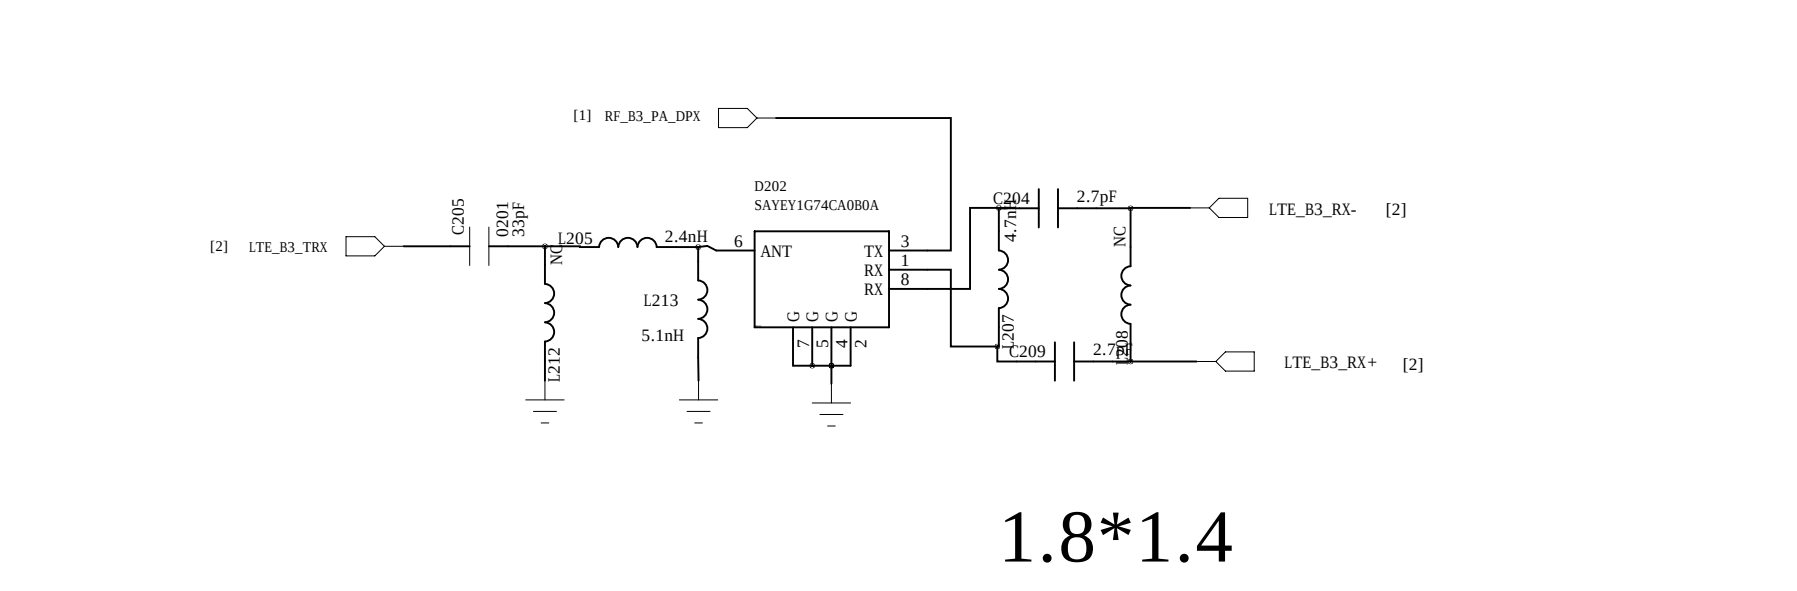


2G_RX

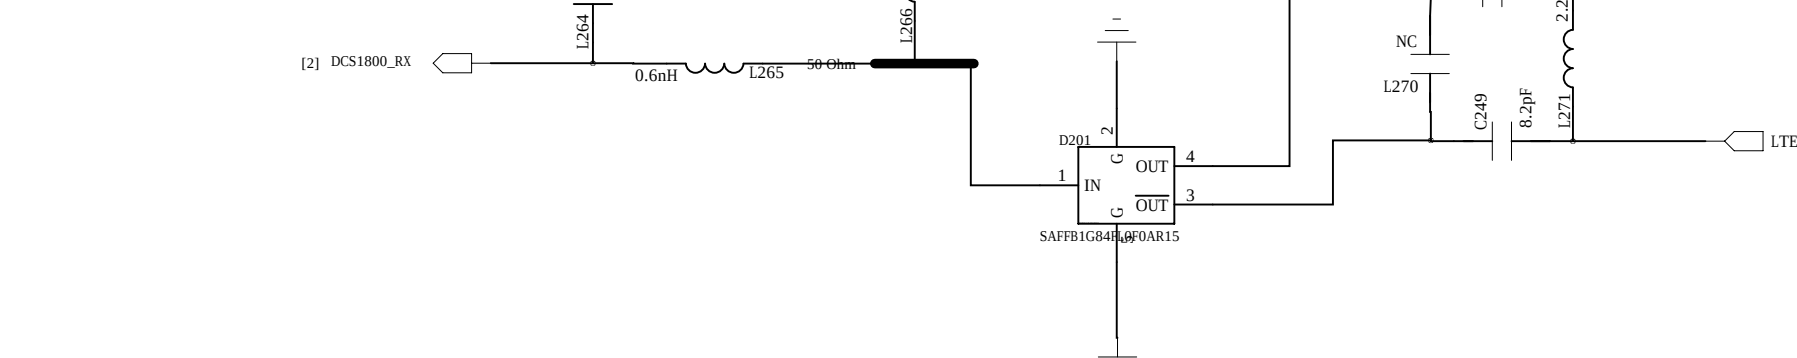

B8 TRX

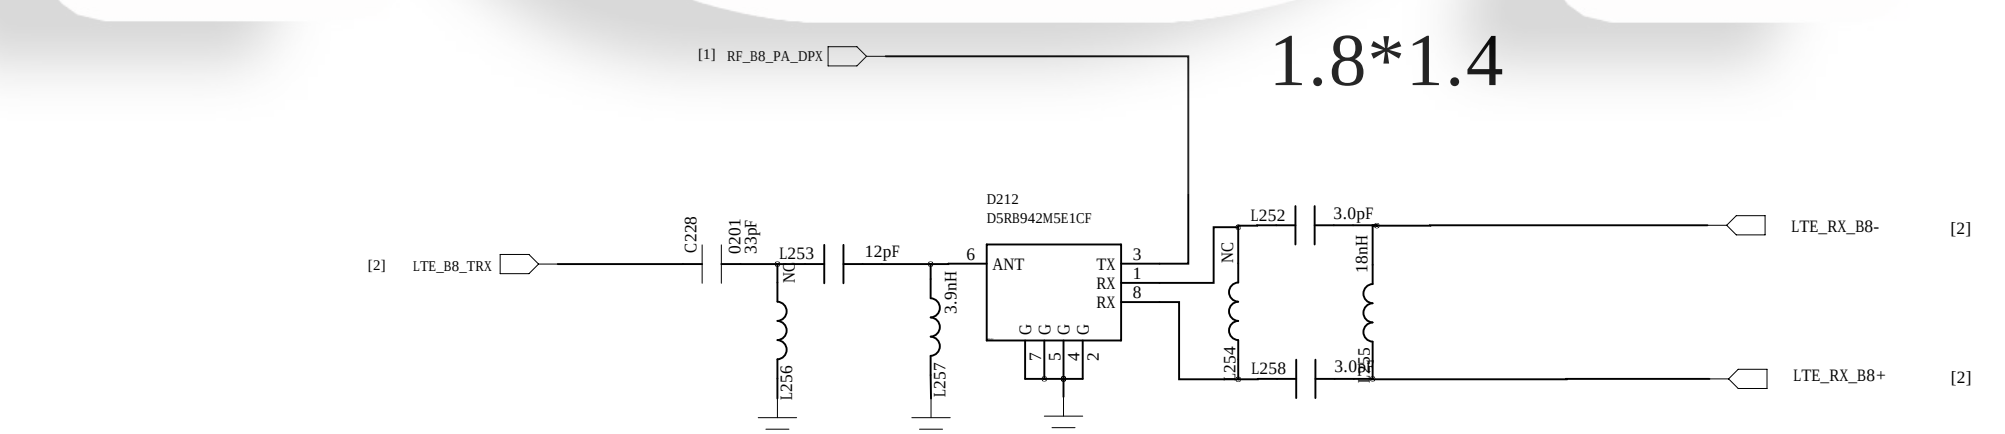


B34 & B39 PRX LTE Band39 TD-SCDMA:Band34/Band39

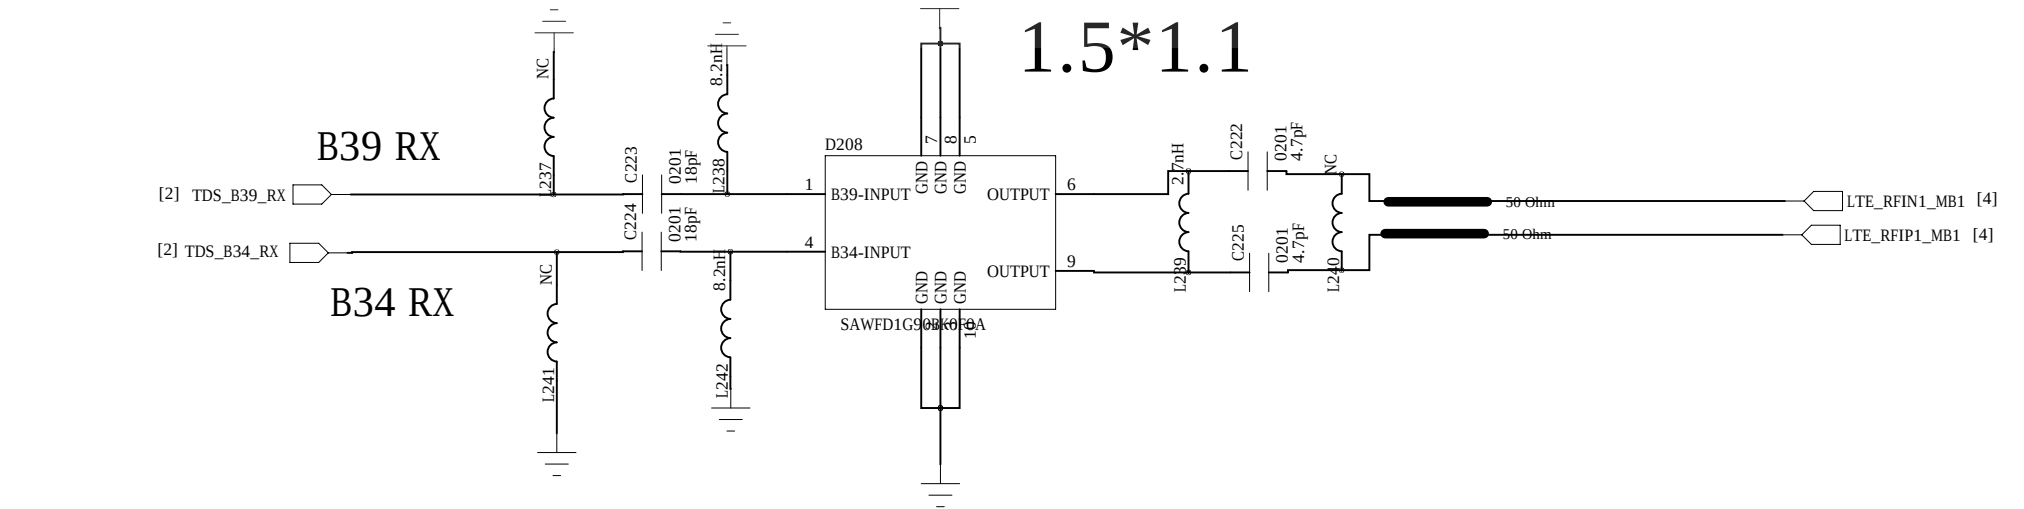


B28B_B20 TRX


B28B:27159358 B20:27159345

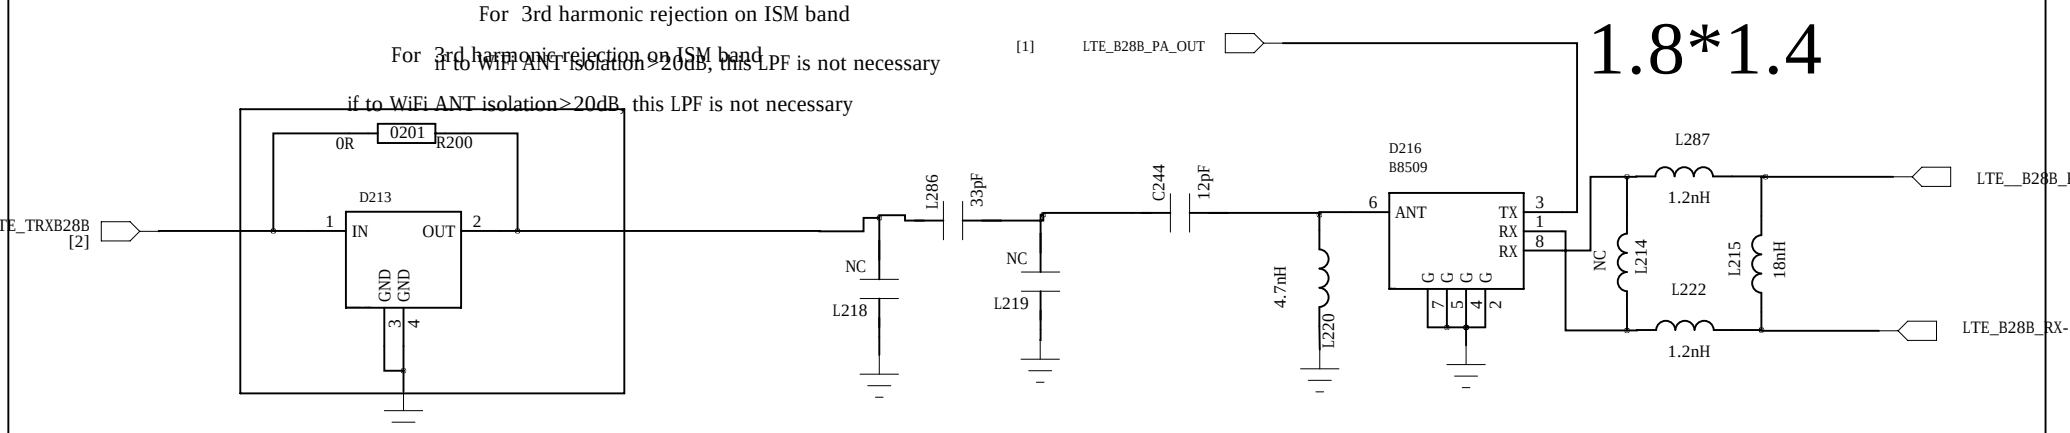

B7 TRX

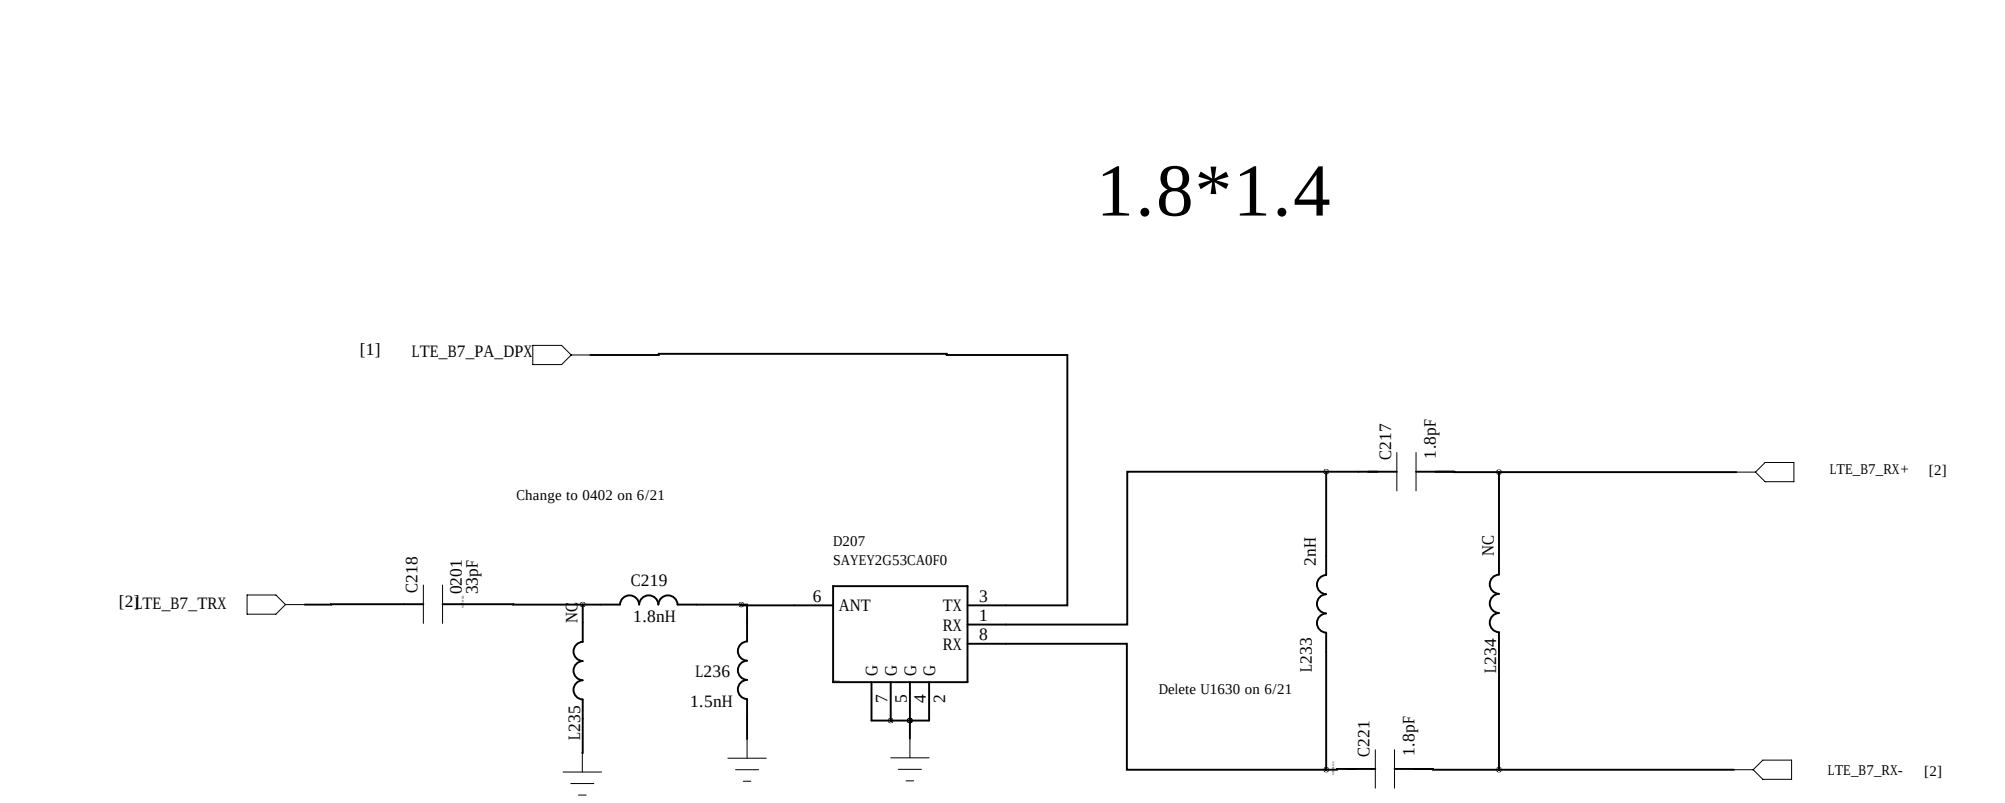


B41 & B40 PRX

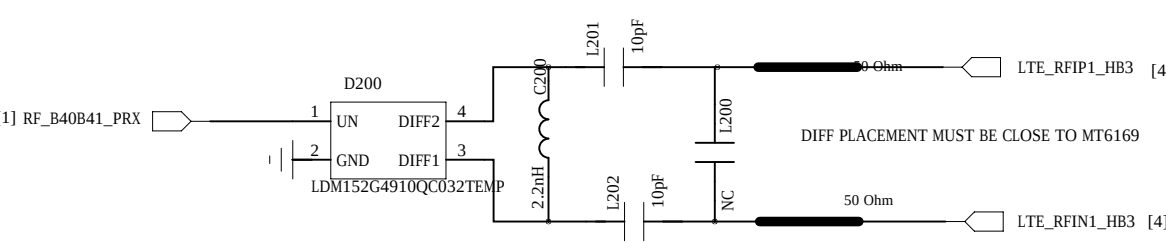


COMPANY: Shanghai Longcheer			
TITLE: Annzo2			
DRAWN: <Drawn By>	DESIGN: <Drawn Date>	CODE: <Code>	SIZE: A0 <Drawing Number>
CHECKED: <Checked By>	DATED: <Checked Date>	SCALE: <Scale>	REV: A1
QUALITY CONTROL: <QC By>	DATED: <QC Date>		
RELEASED: <Released By>	DATED: <Release Date>		

REVISION RECORD			
LTB	REV NO	APPROVED	DATE

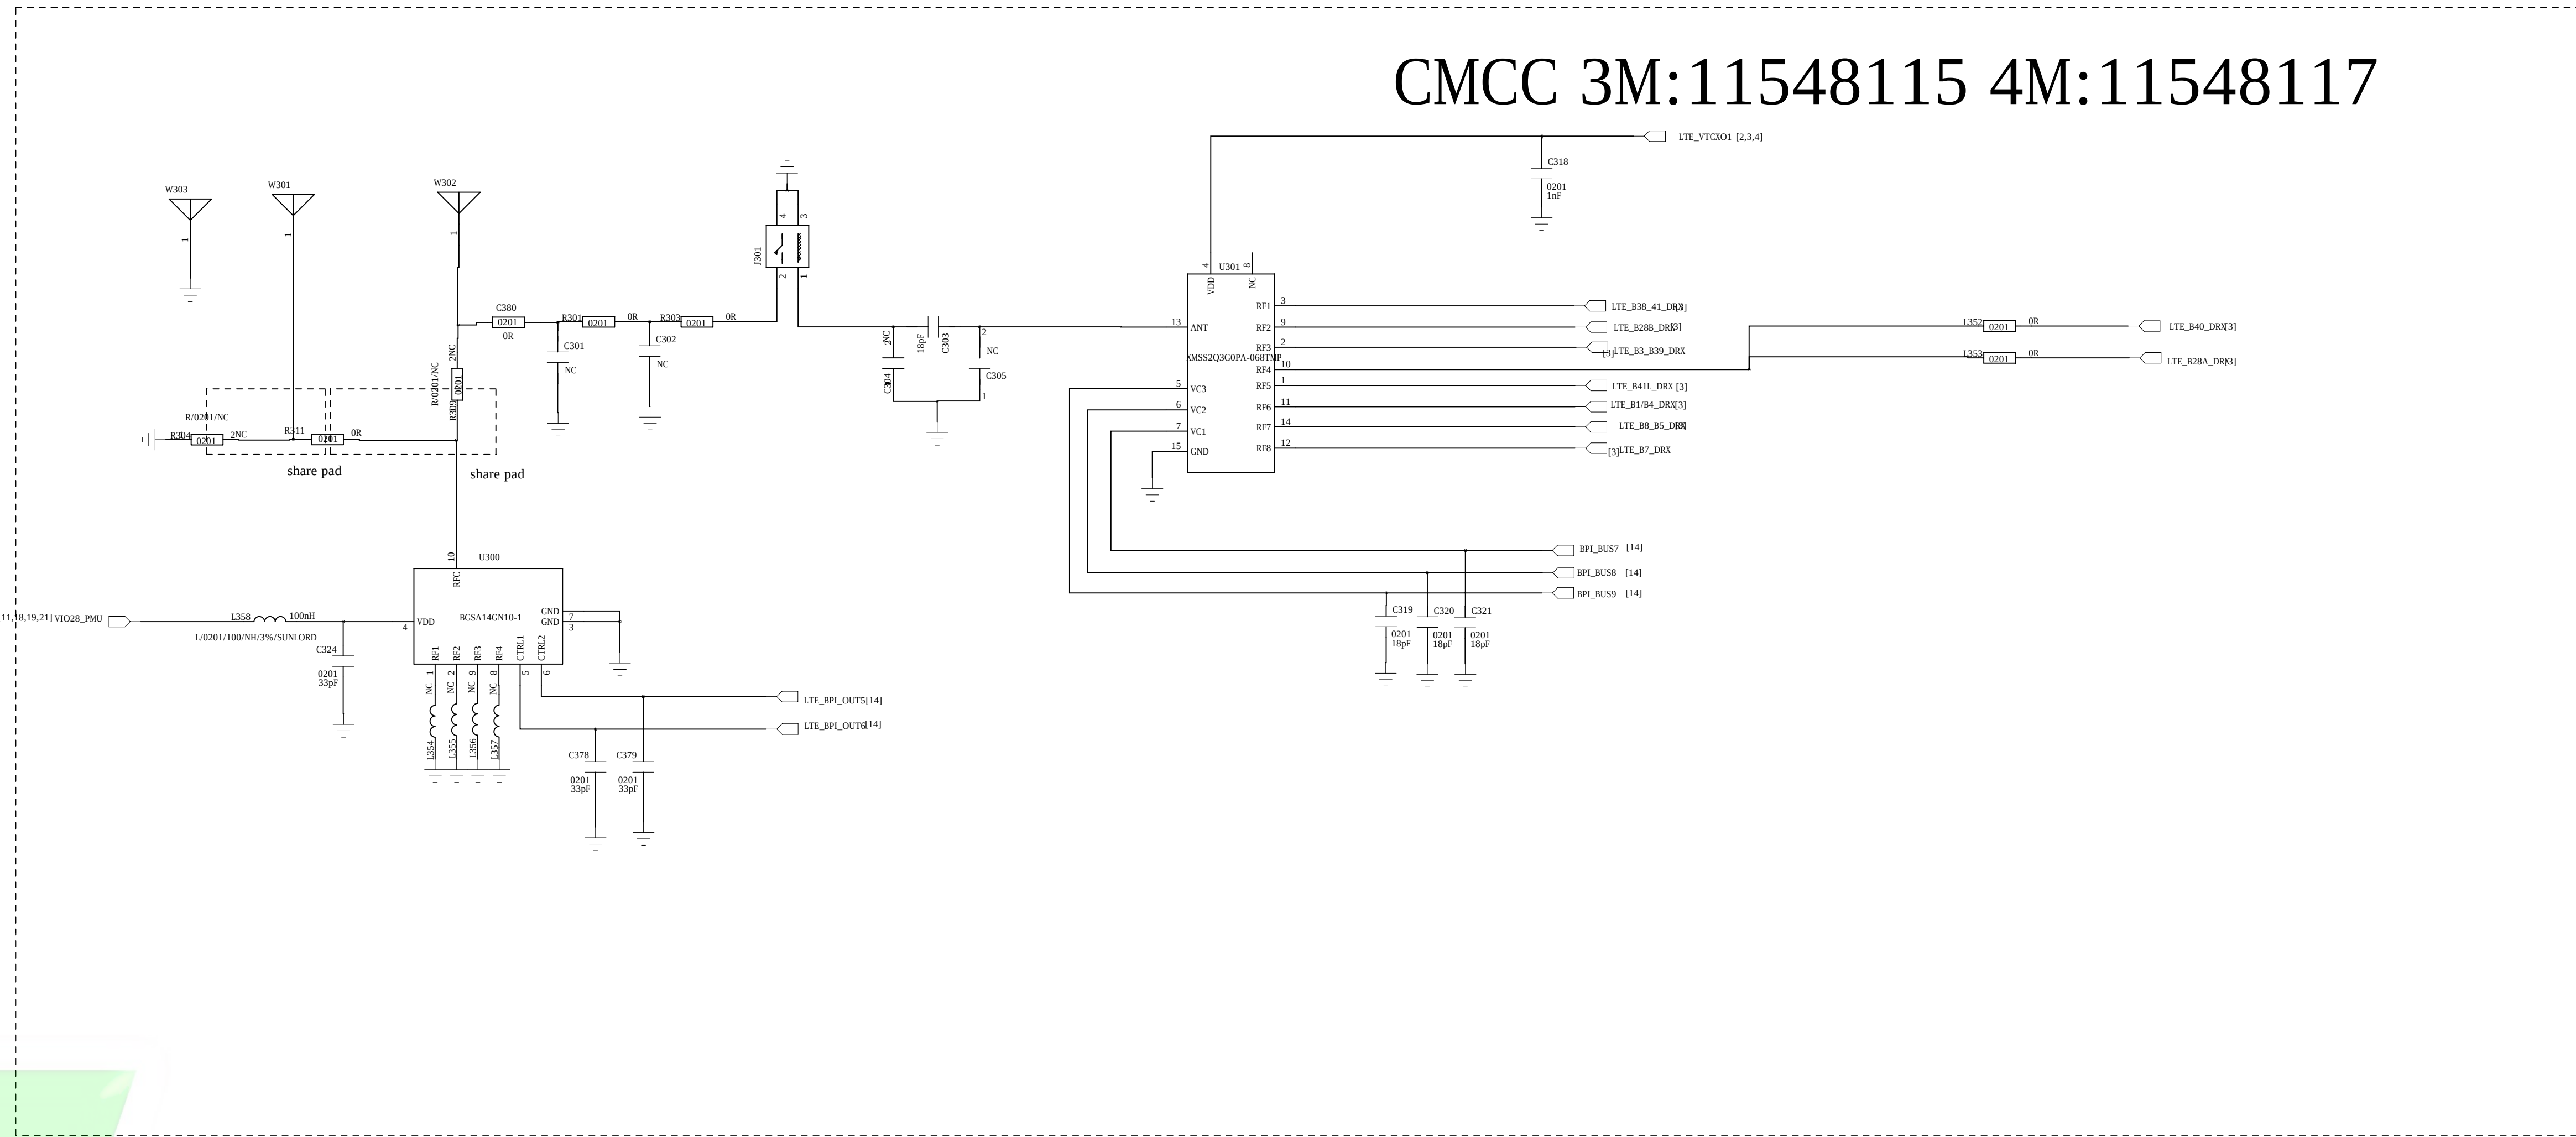


FDD

B1/B4 DRX

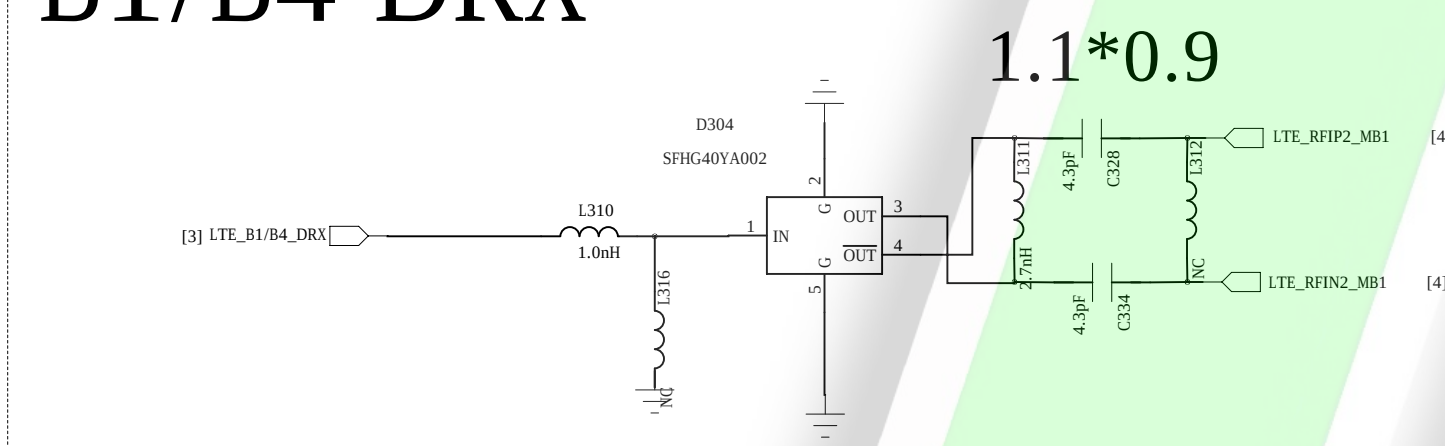


B39:27150213 B3:27151101


B3_B39 DRX

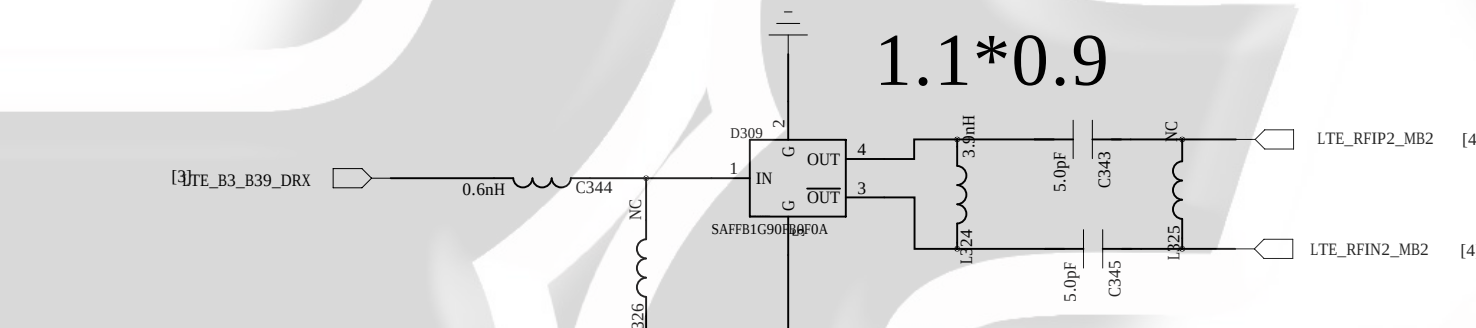


B7 DRX

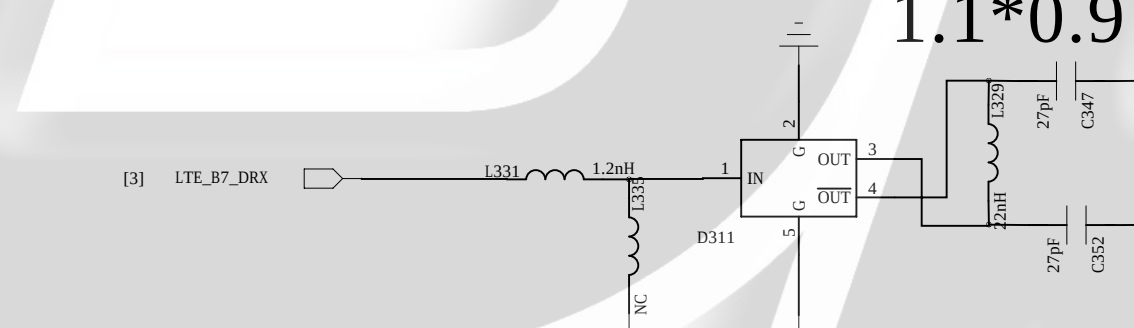

B41L/B7 DRX_SWITCH

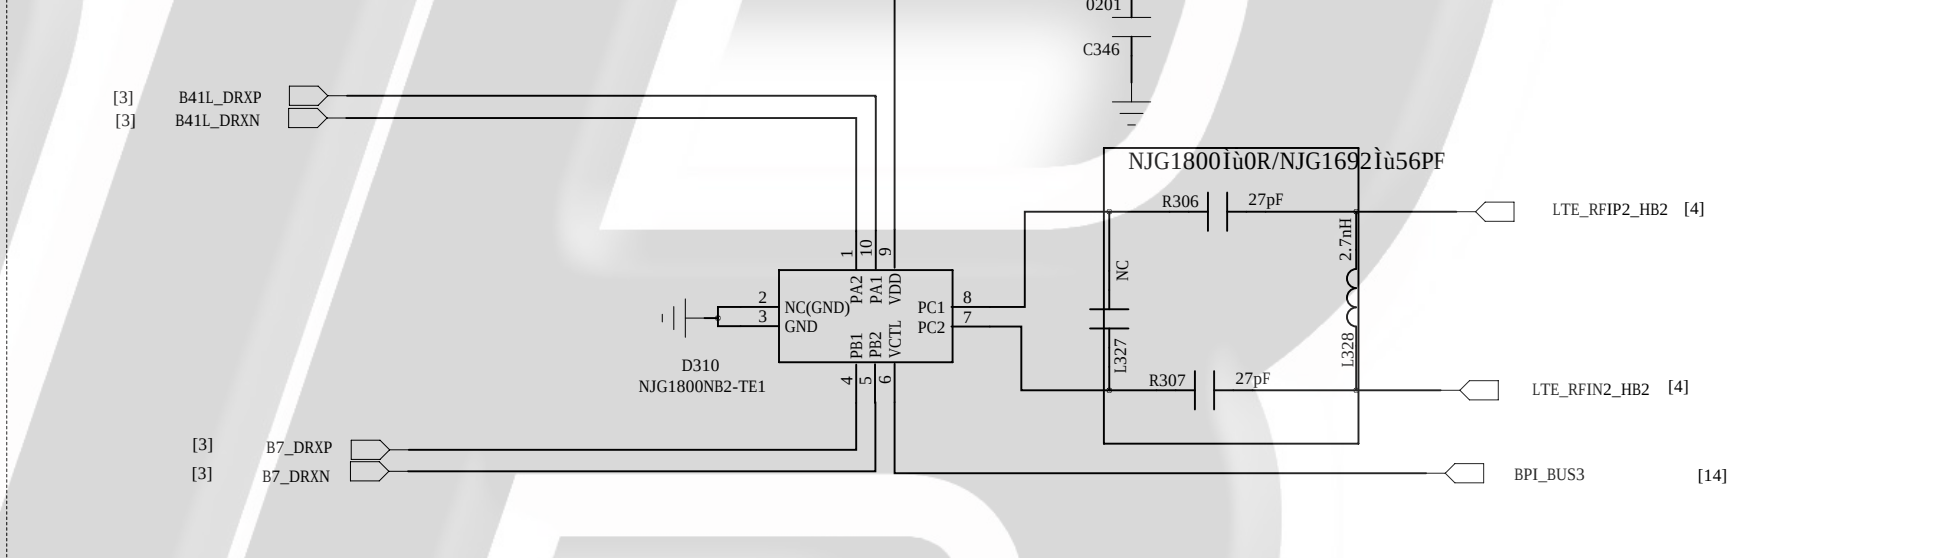


B41L DRX

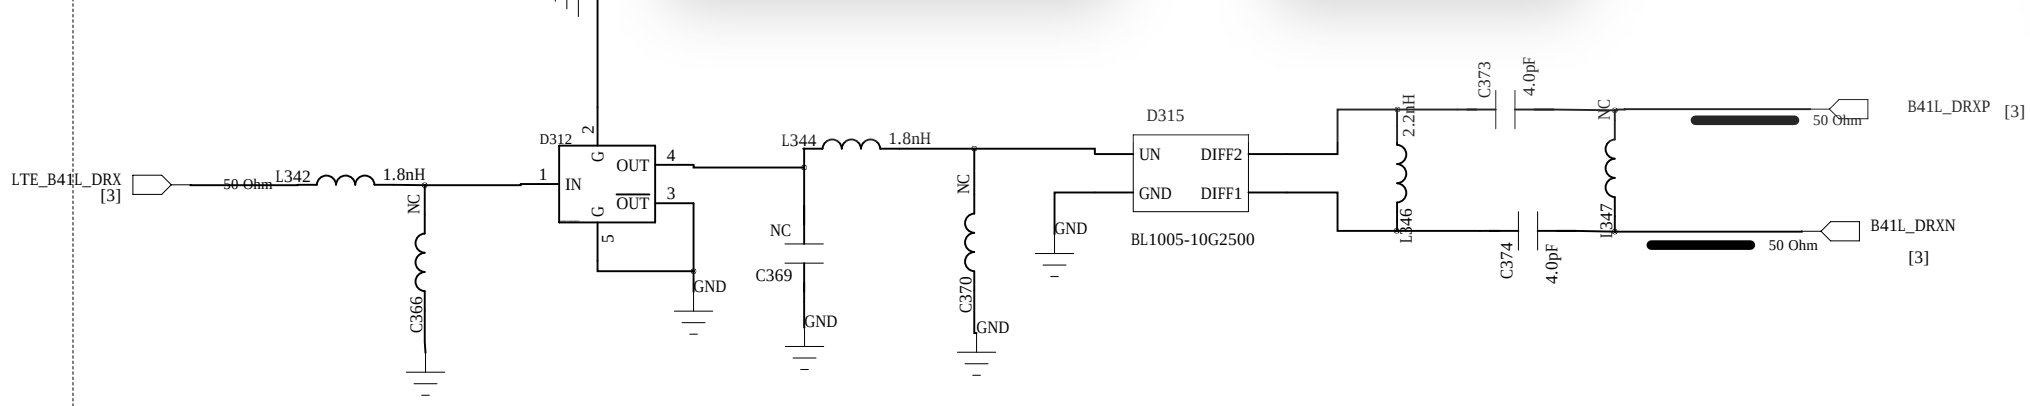


B38/41:27150705 B2:27151059


LTE_B38/41_B2_DRX

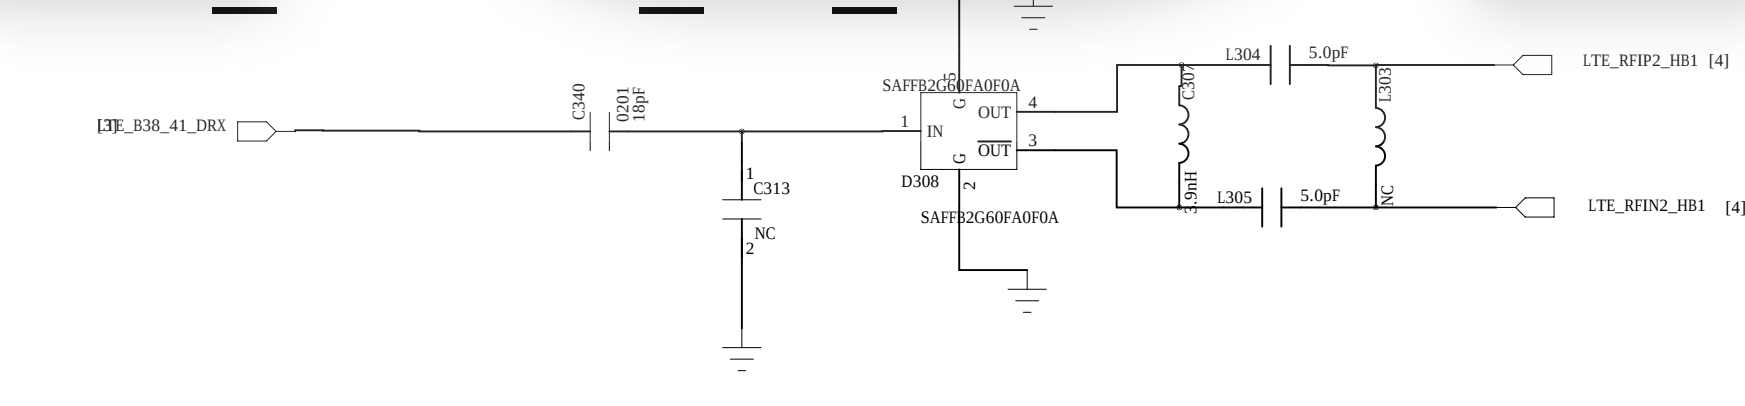


B40 DRX

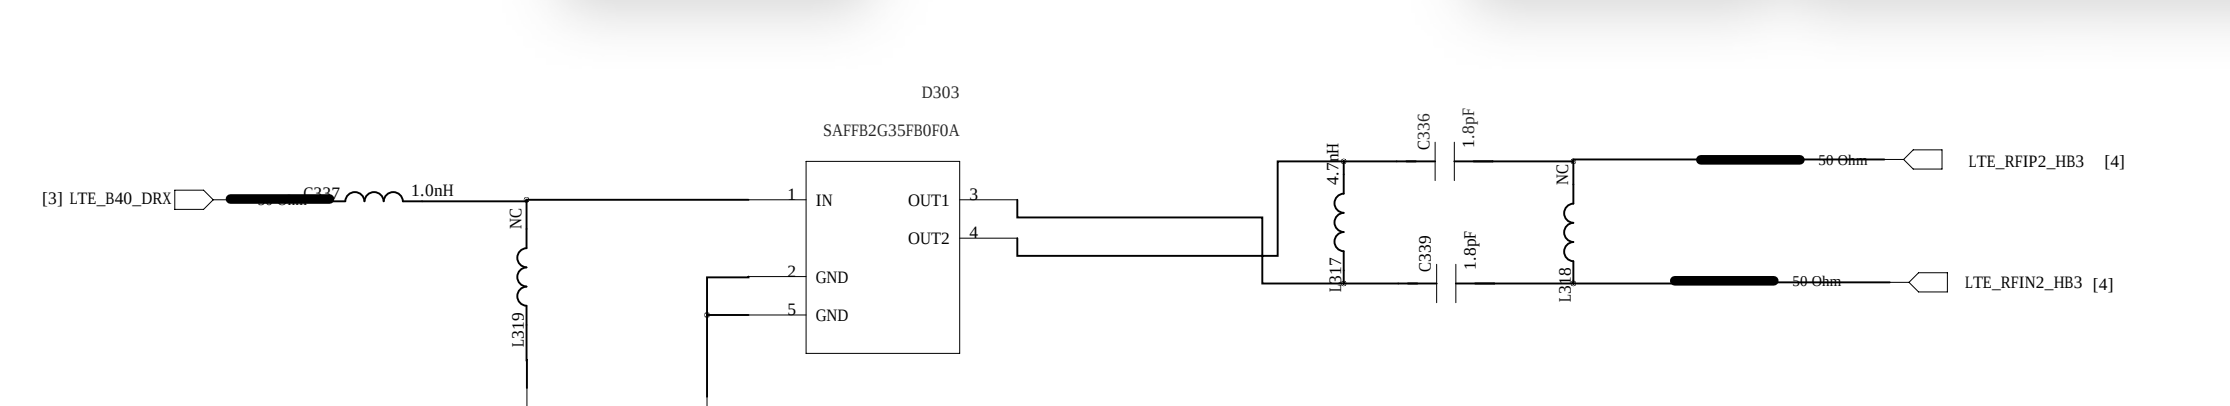


LTE_B8_DRX

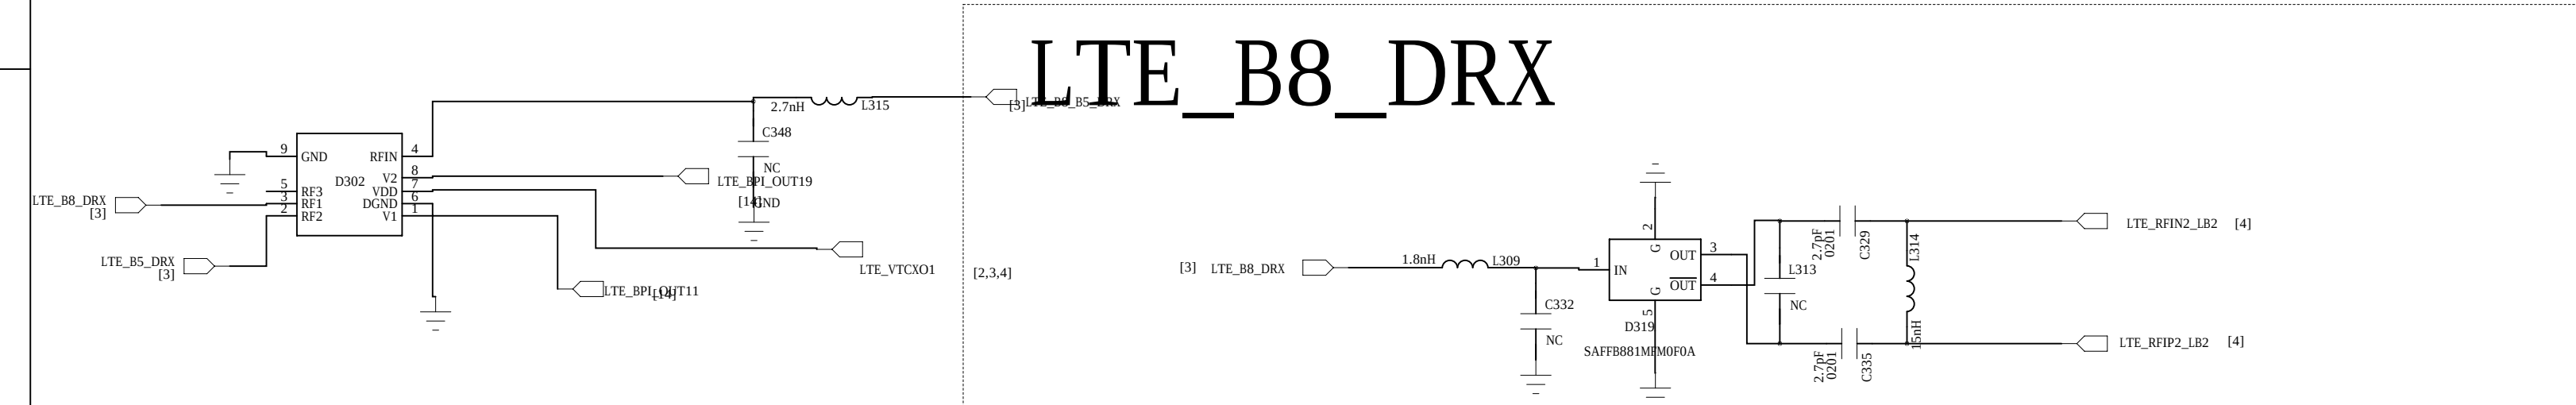

LTE_B5_DRX

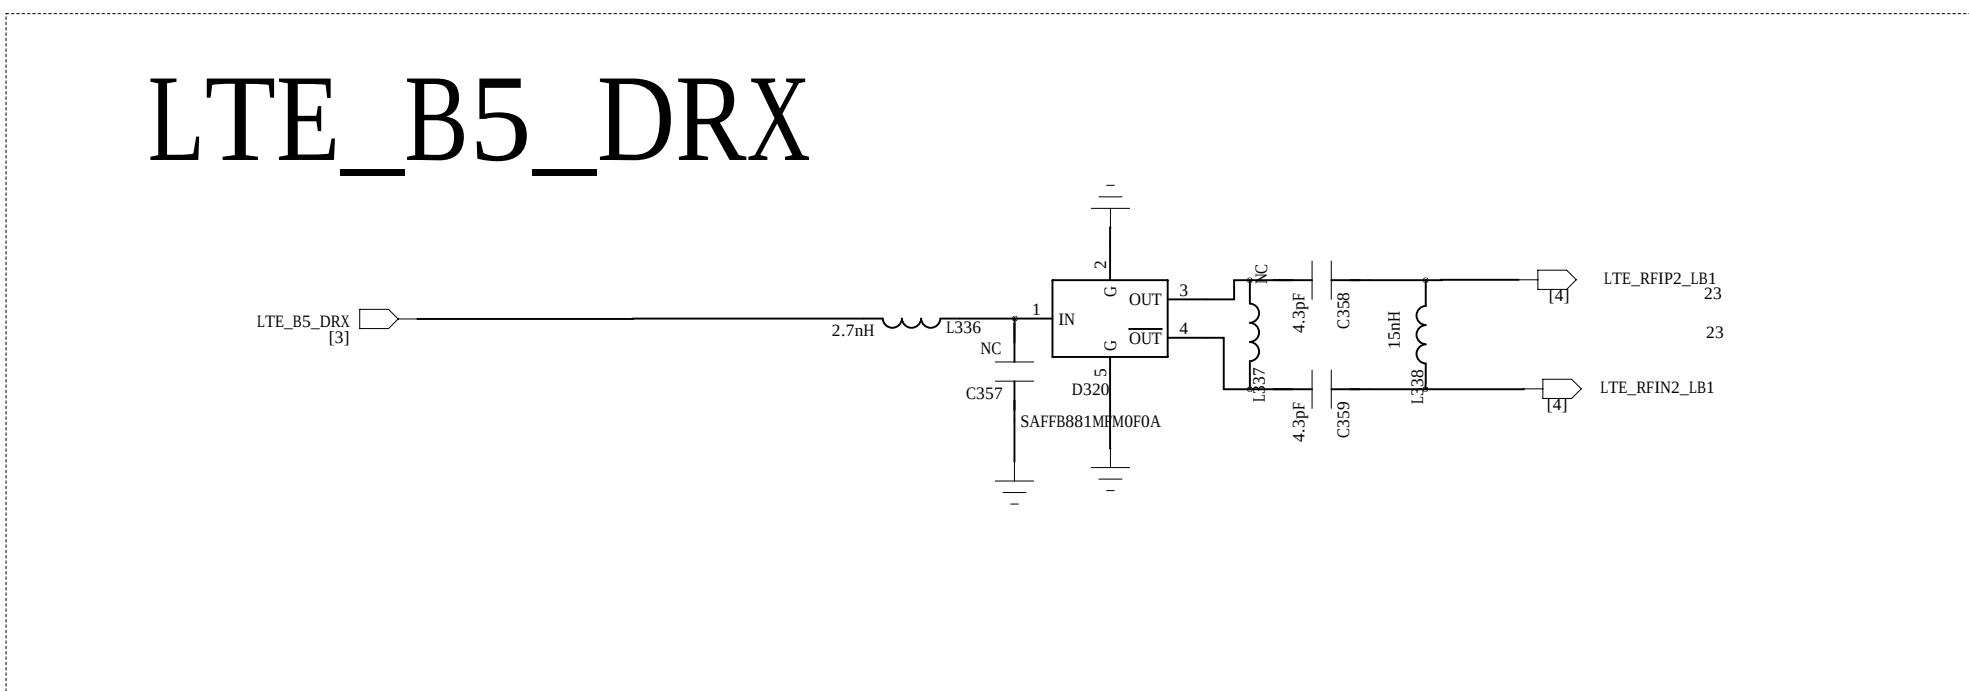

LTE_B28A_DRX

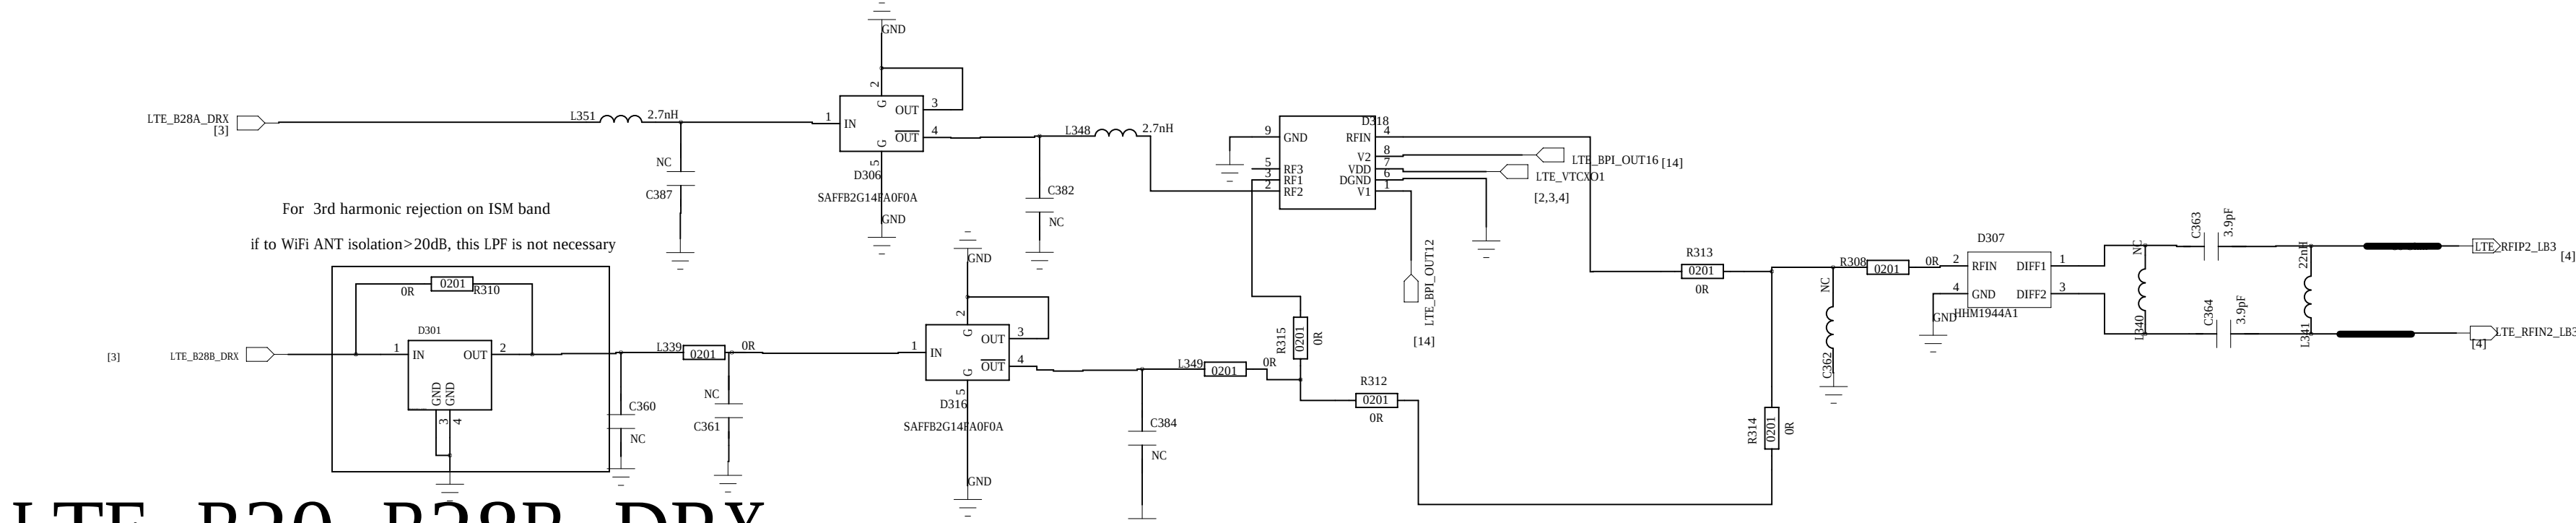


LTE_B20_B28B_DRX

B20: 27151014 B28B:27151214

COMPANY: Shanghai Longcheer			
TITLE: Annzo2			
CODE: <Code>	SIZE: A0	DRAWING NO: <Drawing Number>	REV: A1
SCALE: <Scale>	SHEET: 23		

DRAWN: <Drawn By>	DATE: <Drawn Date>
CHECKED: <Checked By>	DATE: <Checked Date>
QUALITY CONTROL: <QC By>	DATE: <QC Date>
RELEASED: <Released By>	DATE: <Release Date>

MT6169

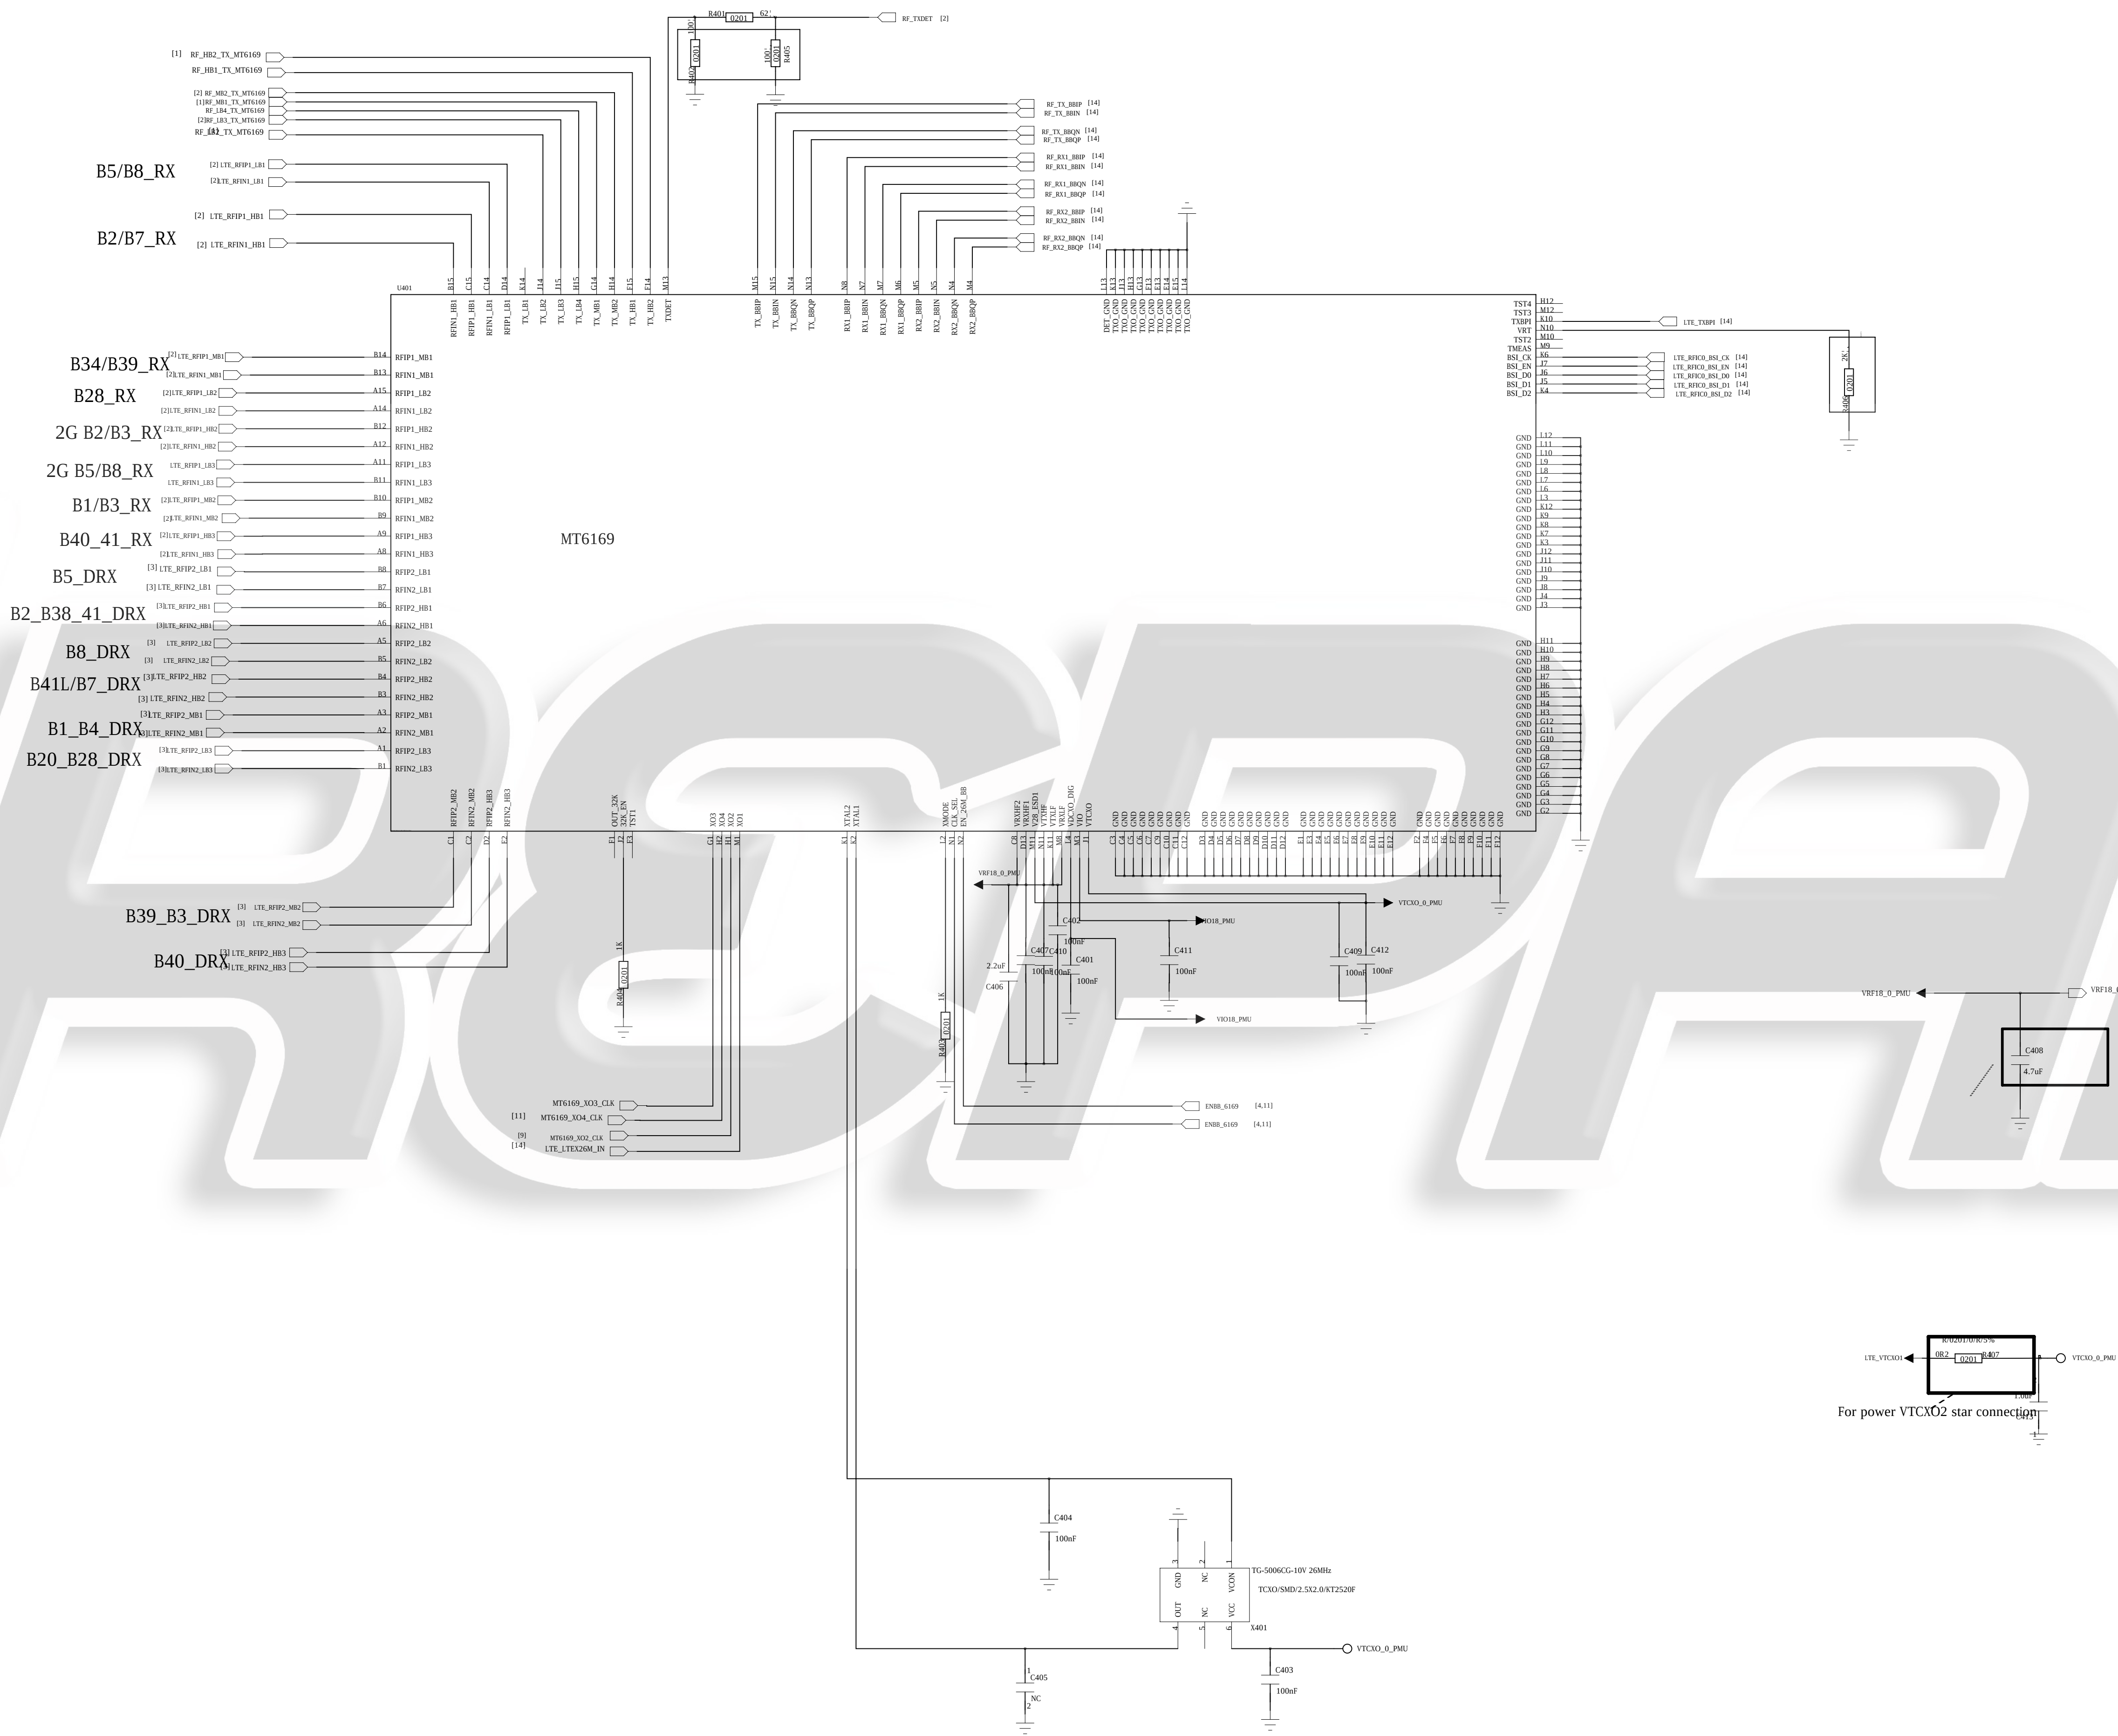

iRCPAIR



REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE

		COMPANY: Shanghai Longcheer				
		TITLE: Annzo2				
DRAWN: <Drawn By>		DATE: <Drawn Date>				
CHECKED: <Checked By>		DATE: <Checked Date>				
QUALITY CONTROL: <QC By>		CODE: <Code>		SIZE: A0	DRAWING NO: <Drawing Number>	REV: A1
RELEASED: <Released By>		DATE: <Release Date>				
		SCALE: <Scale>			SHEET: 6f 23	



REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE

		COMPANY			
		Shanghai Longcheer			
		TITLE:			
		Anno2			
DRAWN:	<Drawn By>	DATED:	<Drawn Date>		
CHECKED:	<Checked By>	DATED:	<Checked Date>		
QUALITY CONTROL:	<QC By>	DATED:	<QC Date>		
RELEASED:	<Released By>	DATED:	<Release Date>		
		CODE:	SIZE:	DRAWING NO:	REV:
		<Code>	A0	<Drawing Number>	A1
		SCALE: <Scale>			SHEET 23

COMPANY: Shanghai Longcheer

TITLE: Annzo2




REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE

		COMPANY			
		Shanghai Longcheer			
		TITLE:			
		Anno2			
DRAWN:	<Drawn By>	DATE:	<Drawn Date>		
CHECKED:	<Checked By>	DATE:	<Checked Date>		
QUALITY CONTROL:	<QC By>	DATE:	<QC Date>		
RELEASED:	<Released By>	DATE:	<Release Date>		
		CODE:	SIZE:	DRAWING NO:	REV:
		<Code>	A0	<Drawing Number>	A1
		SCALE: <Scale>			SHEET 8F 23

COMPANY: Shanghai Longcheer

TITLE: Annzo2

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE

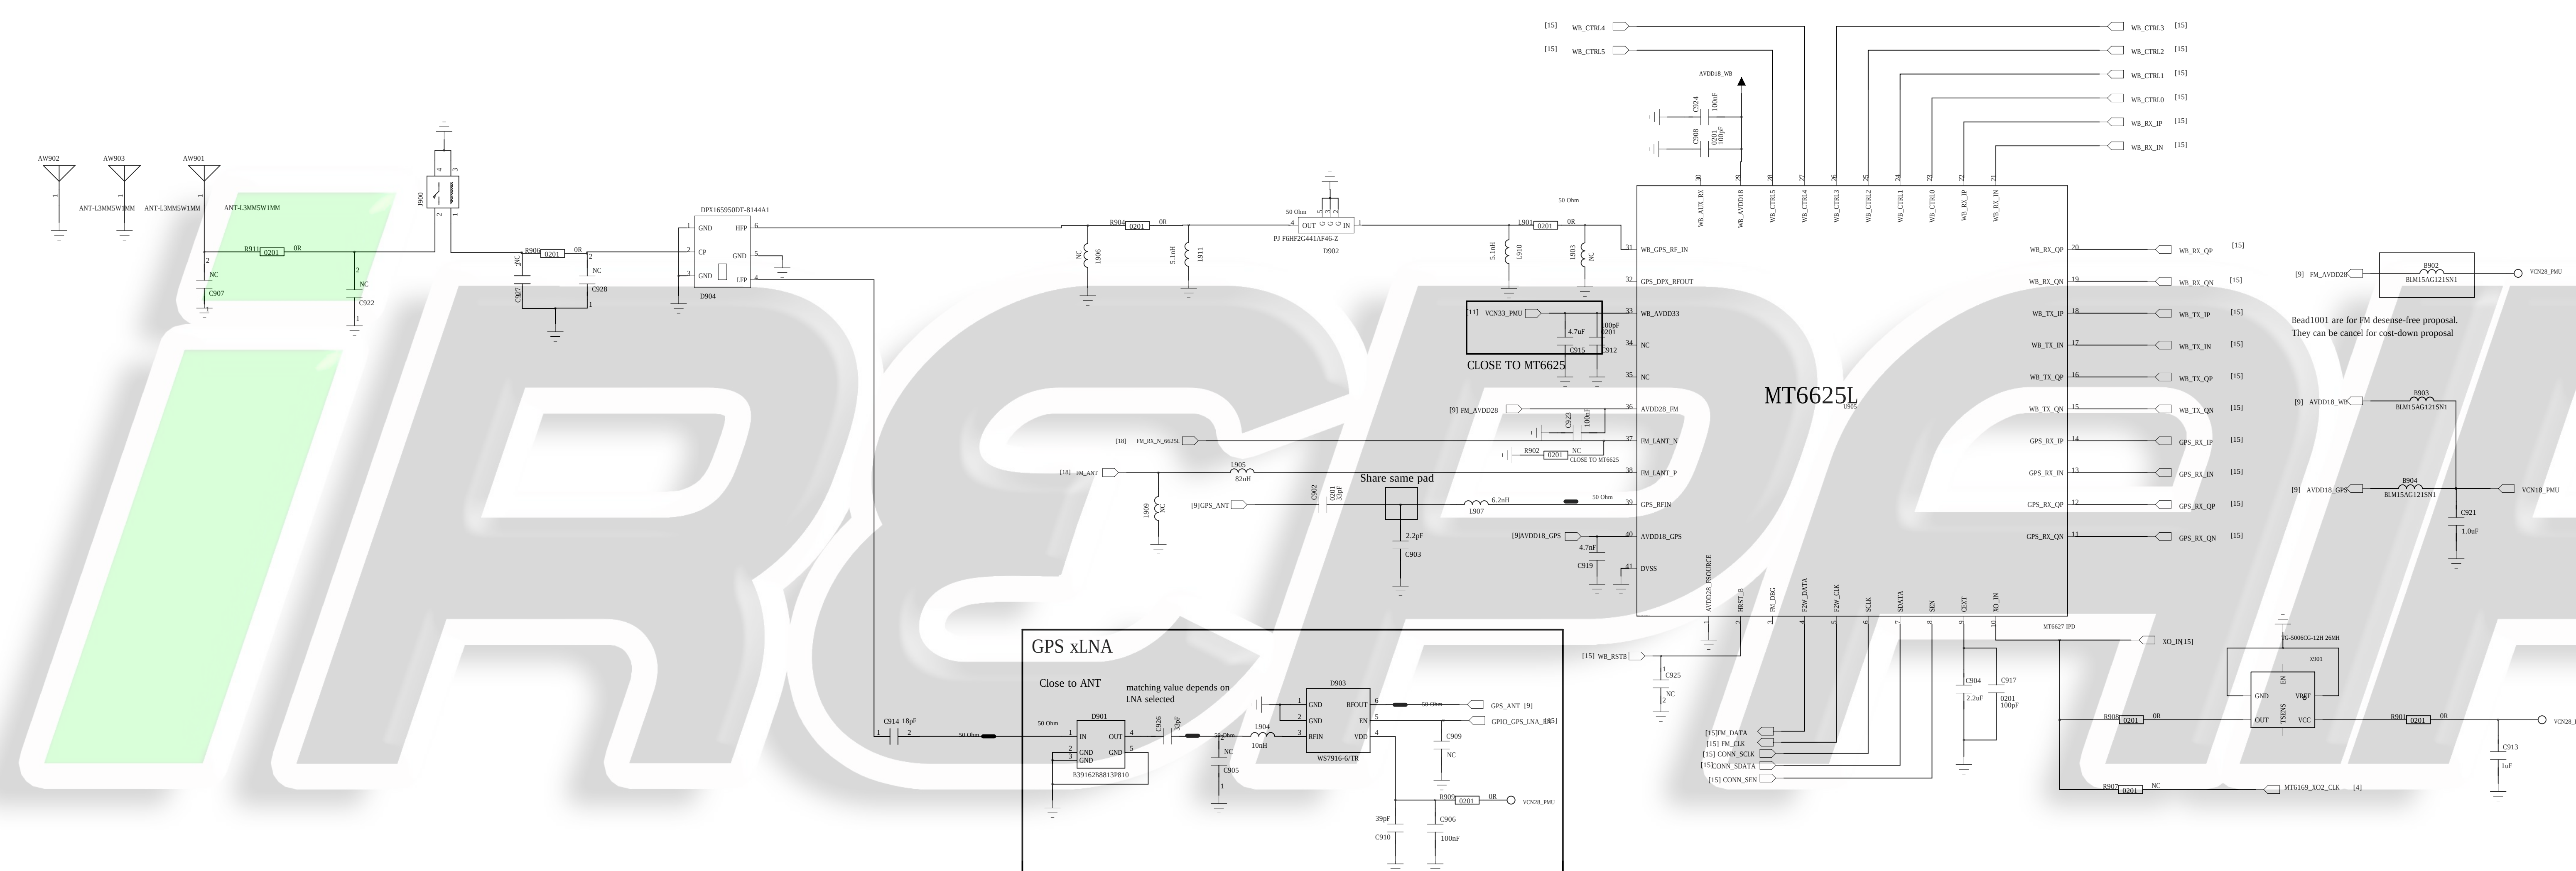

COMPANY: Shanghai Longcheer			
TITLE: Annzo2			
DRAWN: <Drawn By>	DATE: <Drawn Date>	CODE: <Code>	
CHECKED: <Checked By>	DATE: <Checked Date>	SIZE: A0	DRAWING NO: <Drawing Number>
QUALITY CONTROL: <QC By>	DATE: <QC Date>	SCALE: <Scale>	REV: A1
RELEASED: <Released By>	DATE: <Release Date>	SHEET: 23	



REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE


DRAWN: <Drawn By>				DATED: <Drawn Date>			
CHECKED: <Checked By>				DATED: <Checked Date>			
QUALITY CONTROL: <QC By>				DATED: <QC Date>			
RELEASED: <Released By>				DATED: <Release Date>			
CODE: <Code>				SIZE: A0		DRAWING NO: <Drawing Number>	
SCALE: <Scale>				SHEET: 60		23	

COMPANY: Shanghai Longcheer	
TITLE: Annzo2	


REVISION RECORD			
LTB	REV NO	APPROVED	DATE

Place input cap. as close to PMICs as
VPROC>VCORE>VLTE>VSY5>VPA


Output net name	Trace Width (mils)
VBAT_VPROC	≥50
VBAT_VCORE	≥36
VBAT_VLTE	≥26
VBAT_VSYS	≥44
VBAT_VPA	≥30

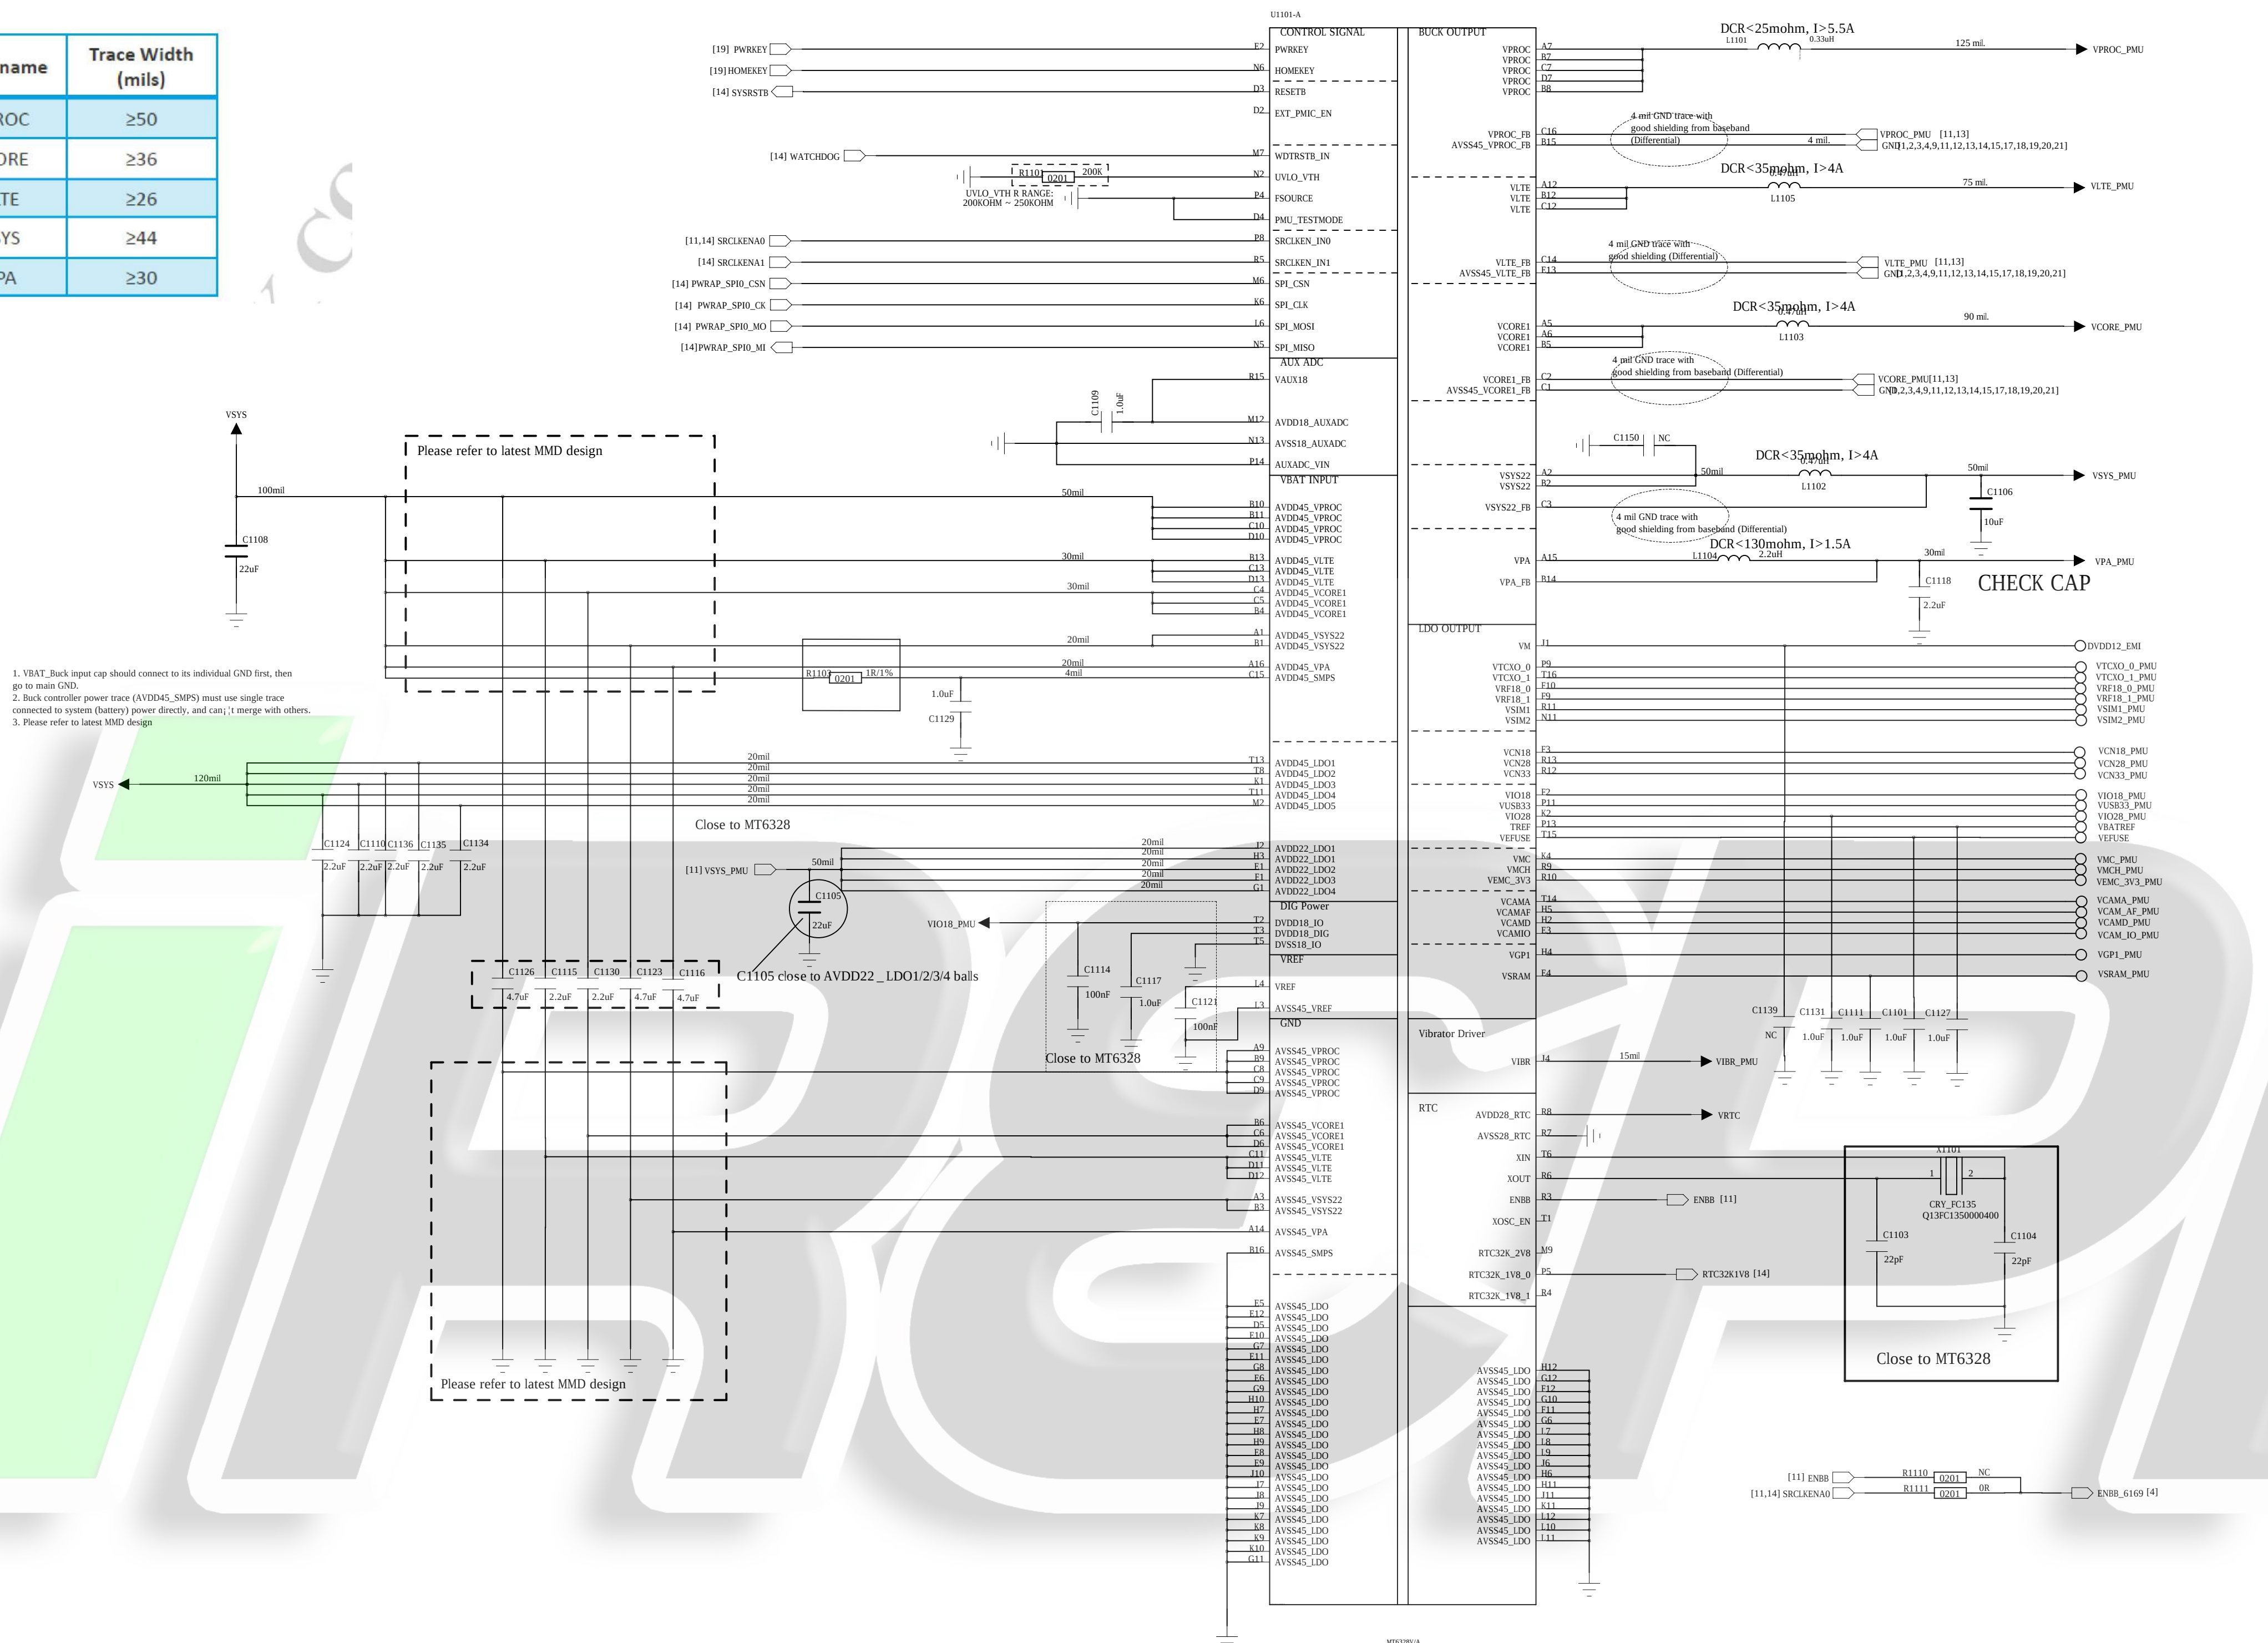

IF ISENSE need a 1uF cap?

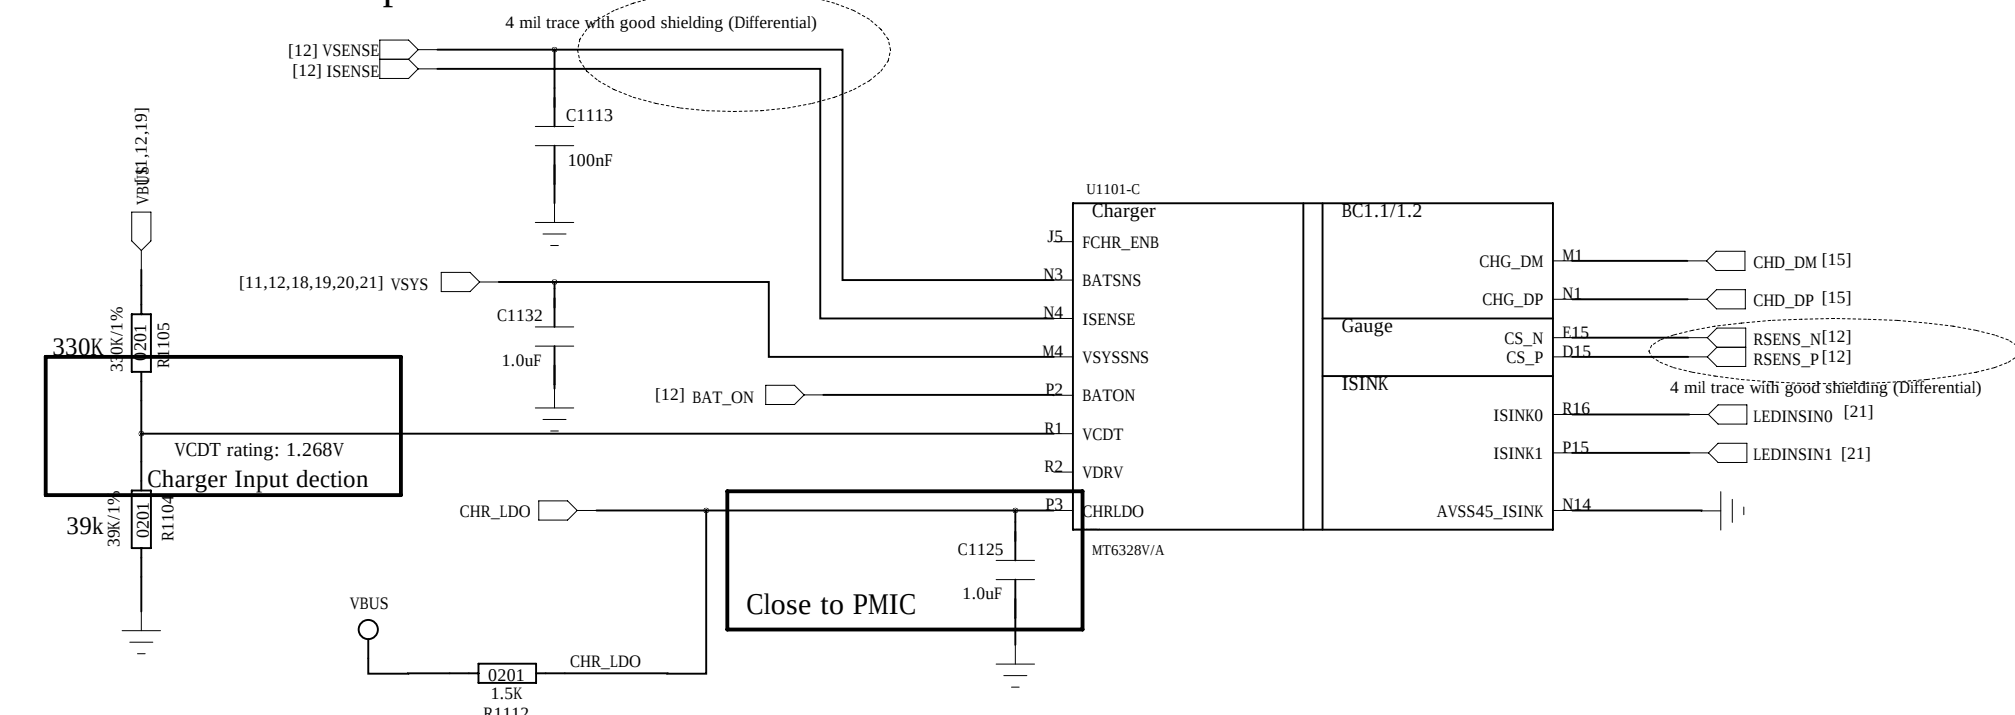

Audio

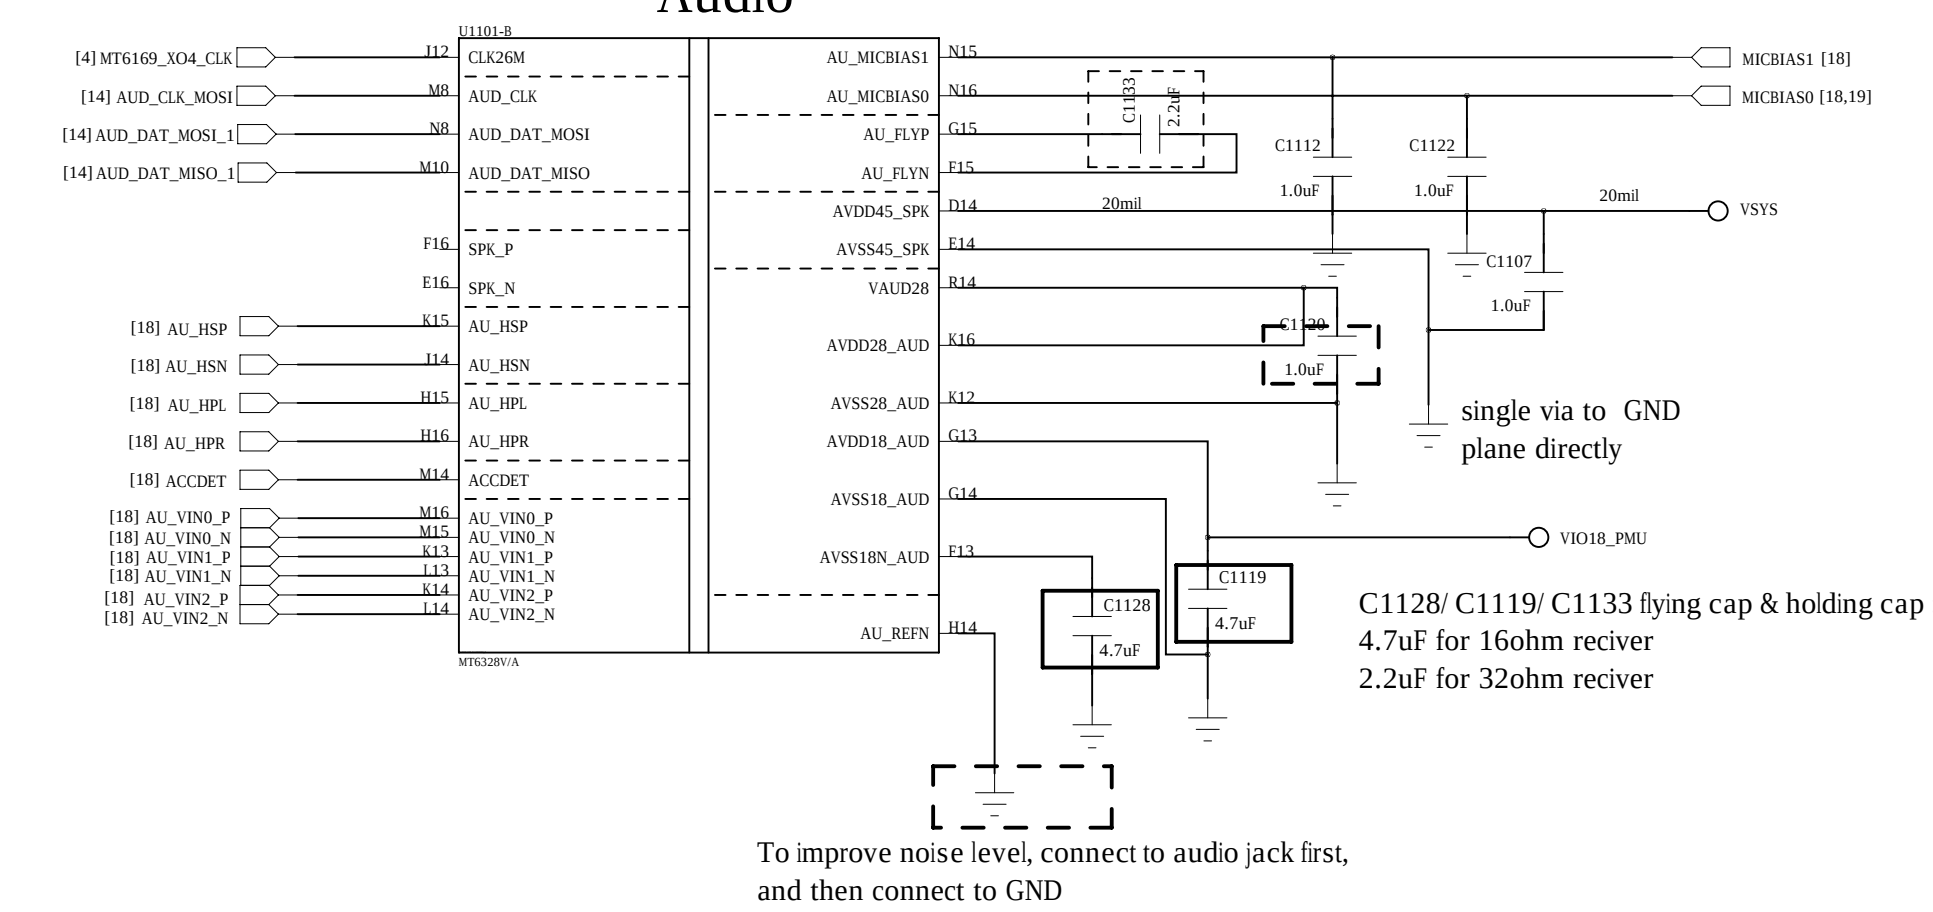


DRAWN: <Drawn By>		DATE: <Drawn Date>		CODE: <Code>		SIZE: A0		DRAWING NO: <Drawing Number>		REV: A1	
CHECKED: <Checked By>		DATE: <Checked Date>		CODE: <Code>		SIZE: A0		DRAWING NO: <Drawing Number>		REV: A1	
QUALITY CONTROL: <QC By>		DATE: <QC Date>		CODE: <Code>		SIZE: A0		DRAWING NO: <Drawing Number>		REV: A1	
RELEASED: <Released By>		DATE: <Release Date>		CODE: <Code>		SIZE: A0		DRAWING NO: <Drawing Number>		REV: A1	

COMPANY: Shanghai Longcheer	
TITLE: Annzo2	
SCALE: <Scale>	
SHEET: 44 23	

REVISION RECORD			
LIB	ECO NO.	APPROVED	DATE

External Buck for DRAM



[Optional] for Low Power enhancement

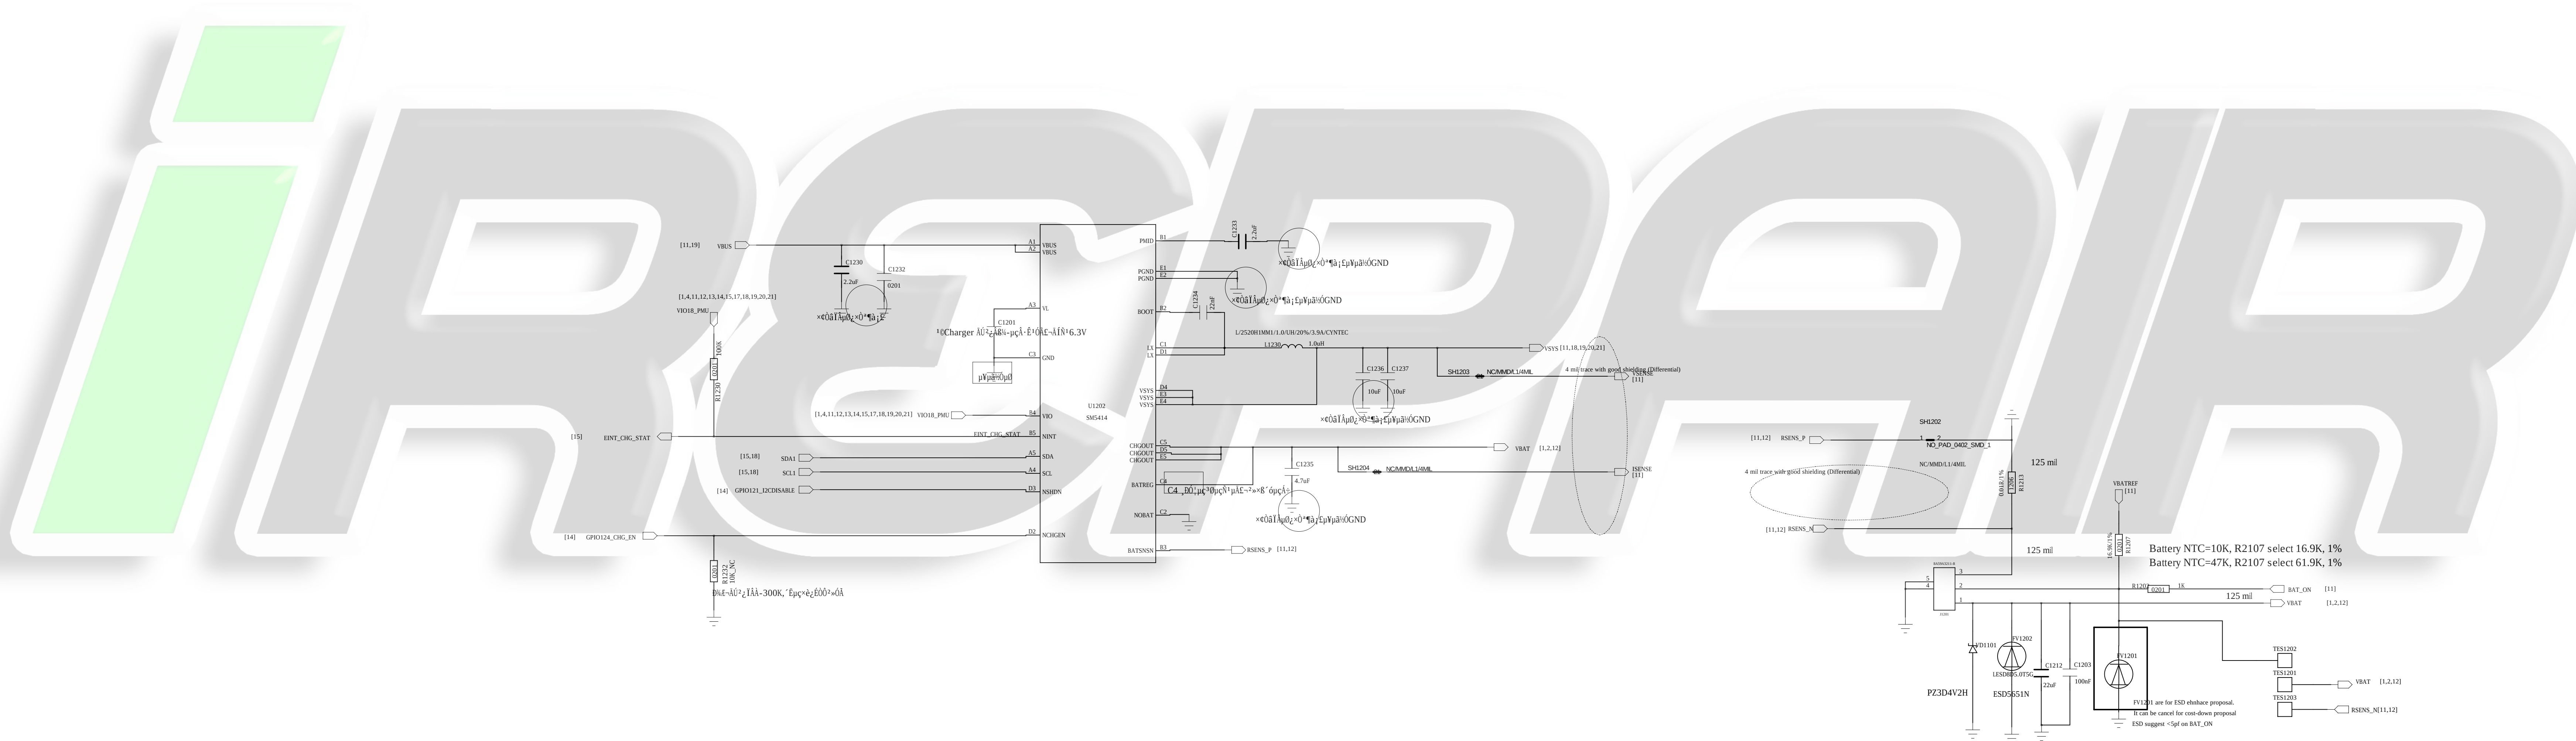

DRAWN				DATE			
<Drawn By>				<Drawn Date>			
CHECKED				DATE			
<Checked By>				<Checked Date>			
QUALITY CONTROL				DATE			
<QC By>				<QC Date>			
RELEASED				DATE			
<Released By>				<Release Date>			

COMPANY			
Shanghai Longcheer			
TITLE			
Annzo2			
CODE	SIZE	DRAWING NO.	REV.
<Code>	A0	<Drawing Number>	A1
SCALE: <Scale>			
SHEET 23			

REVISION RECORD			
LTN	REV NO.	APPROVED	DATE

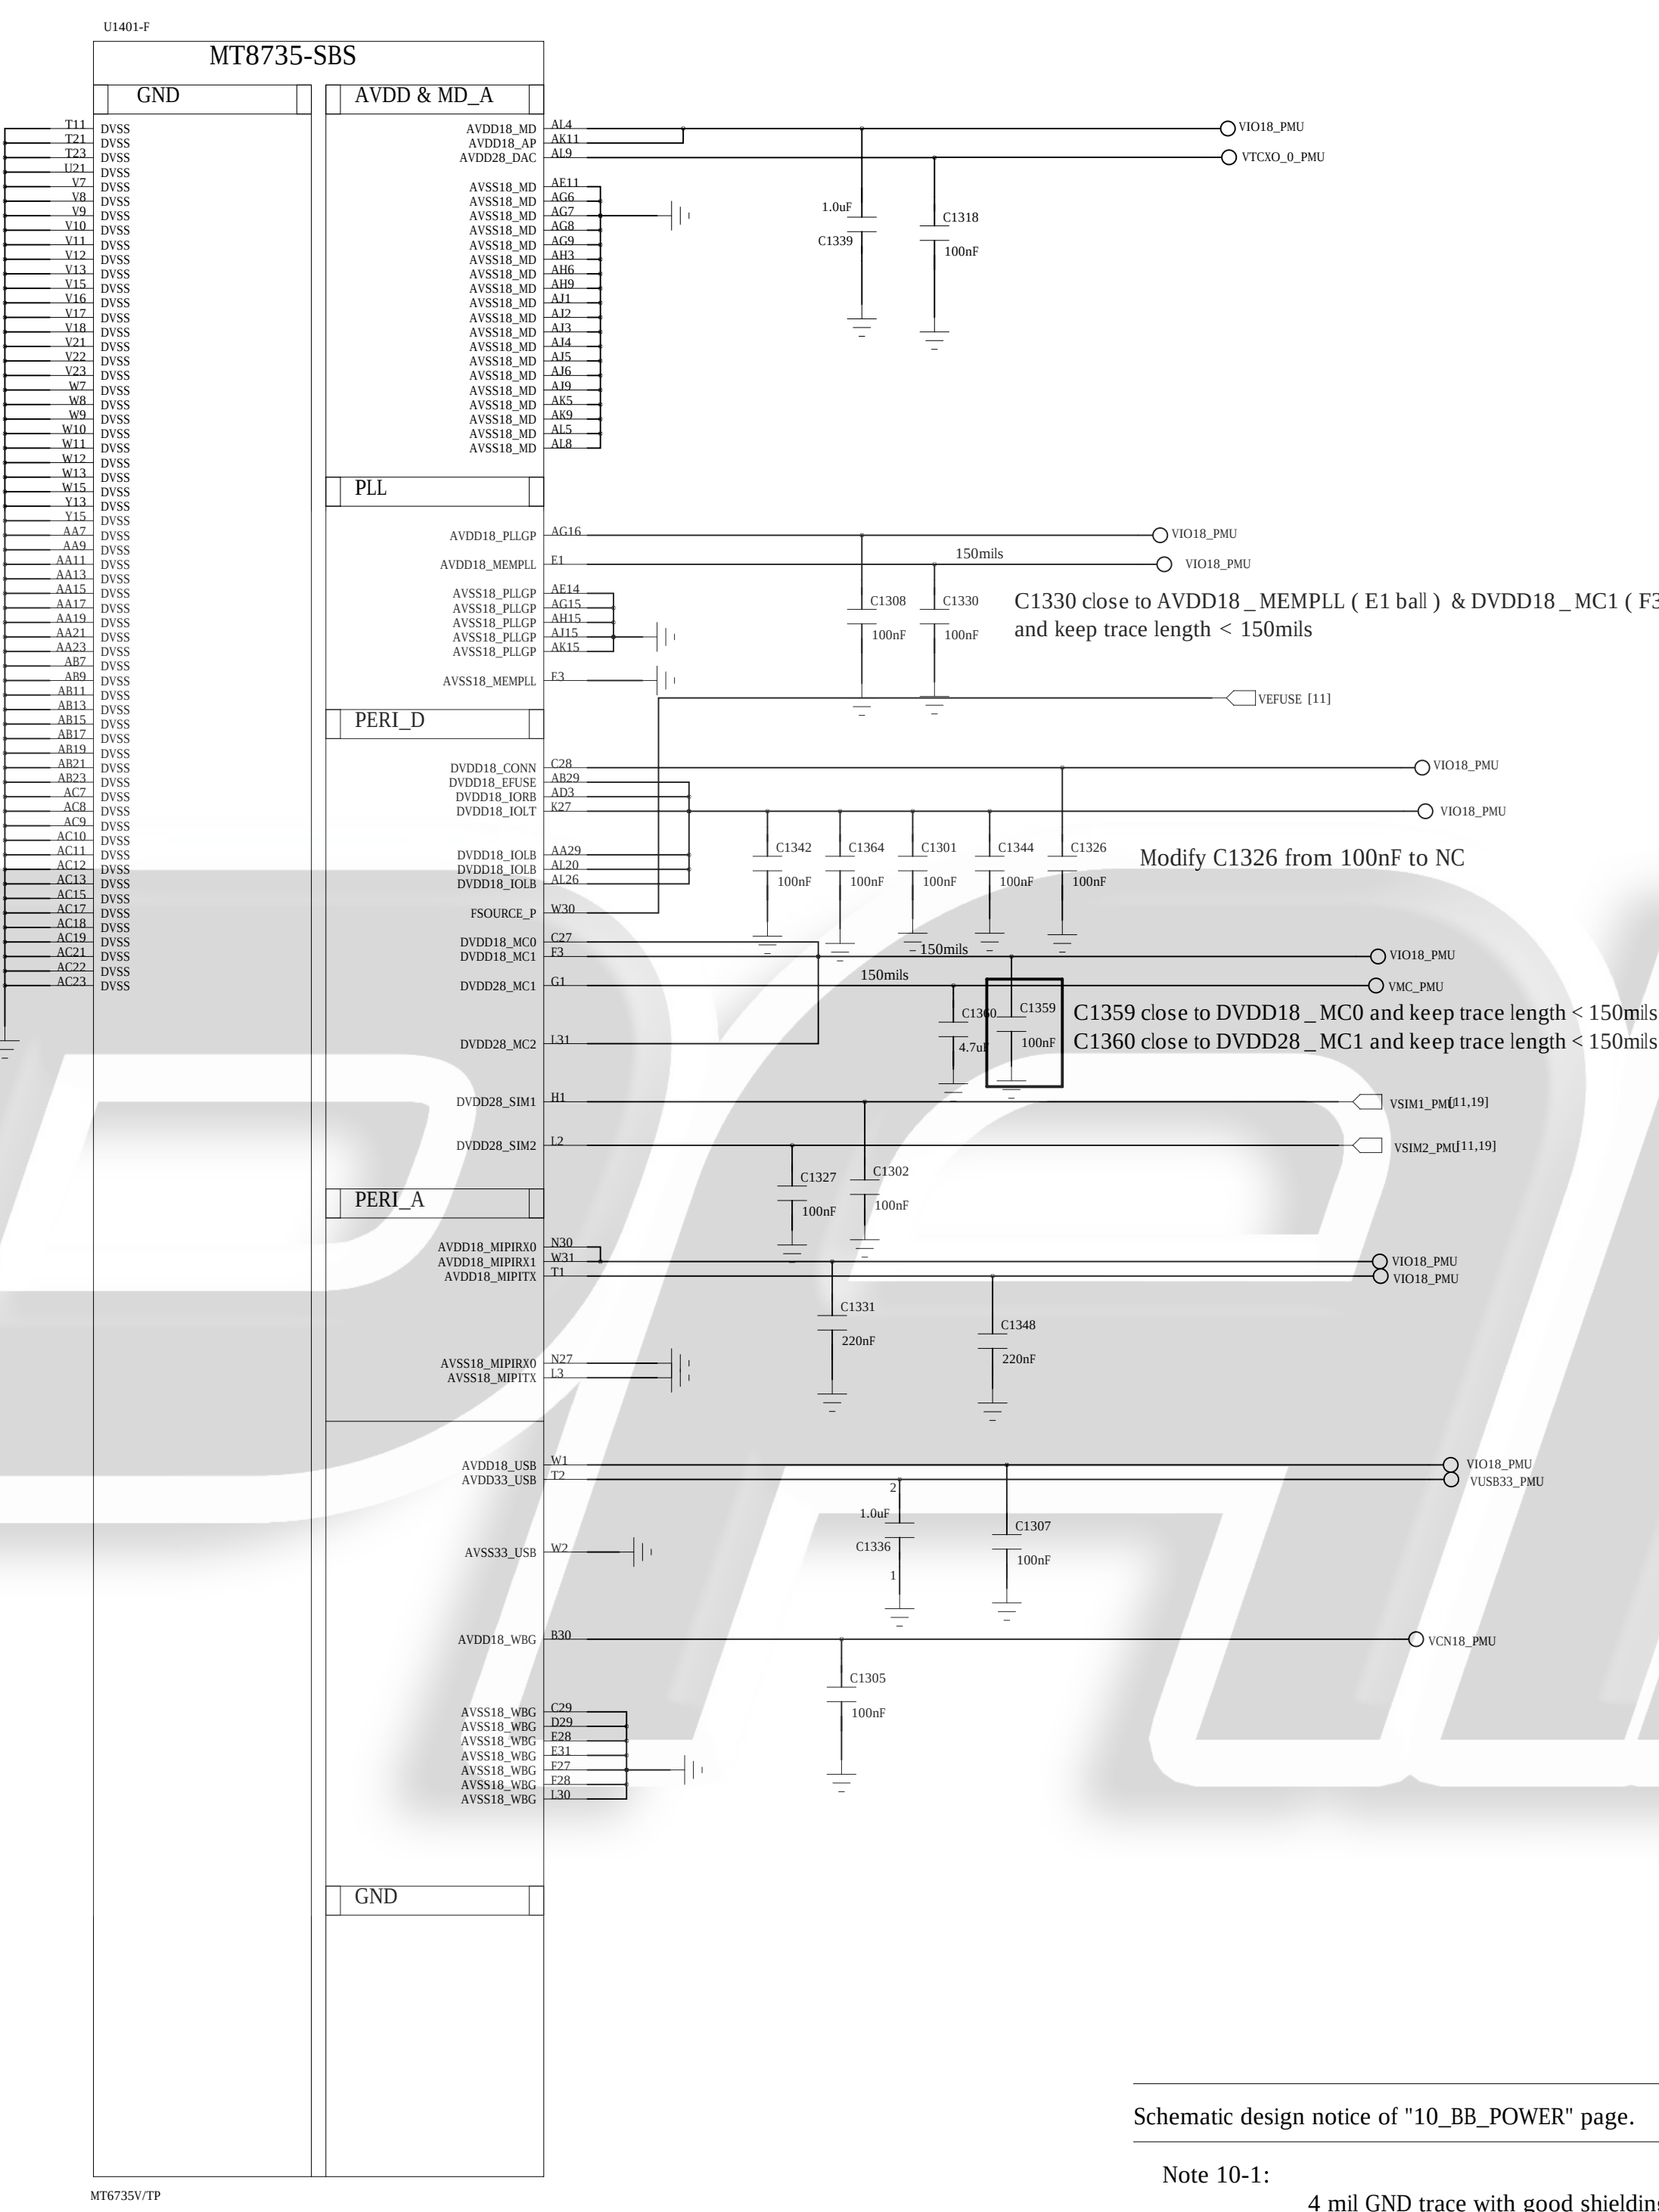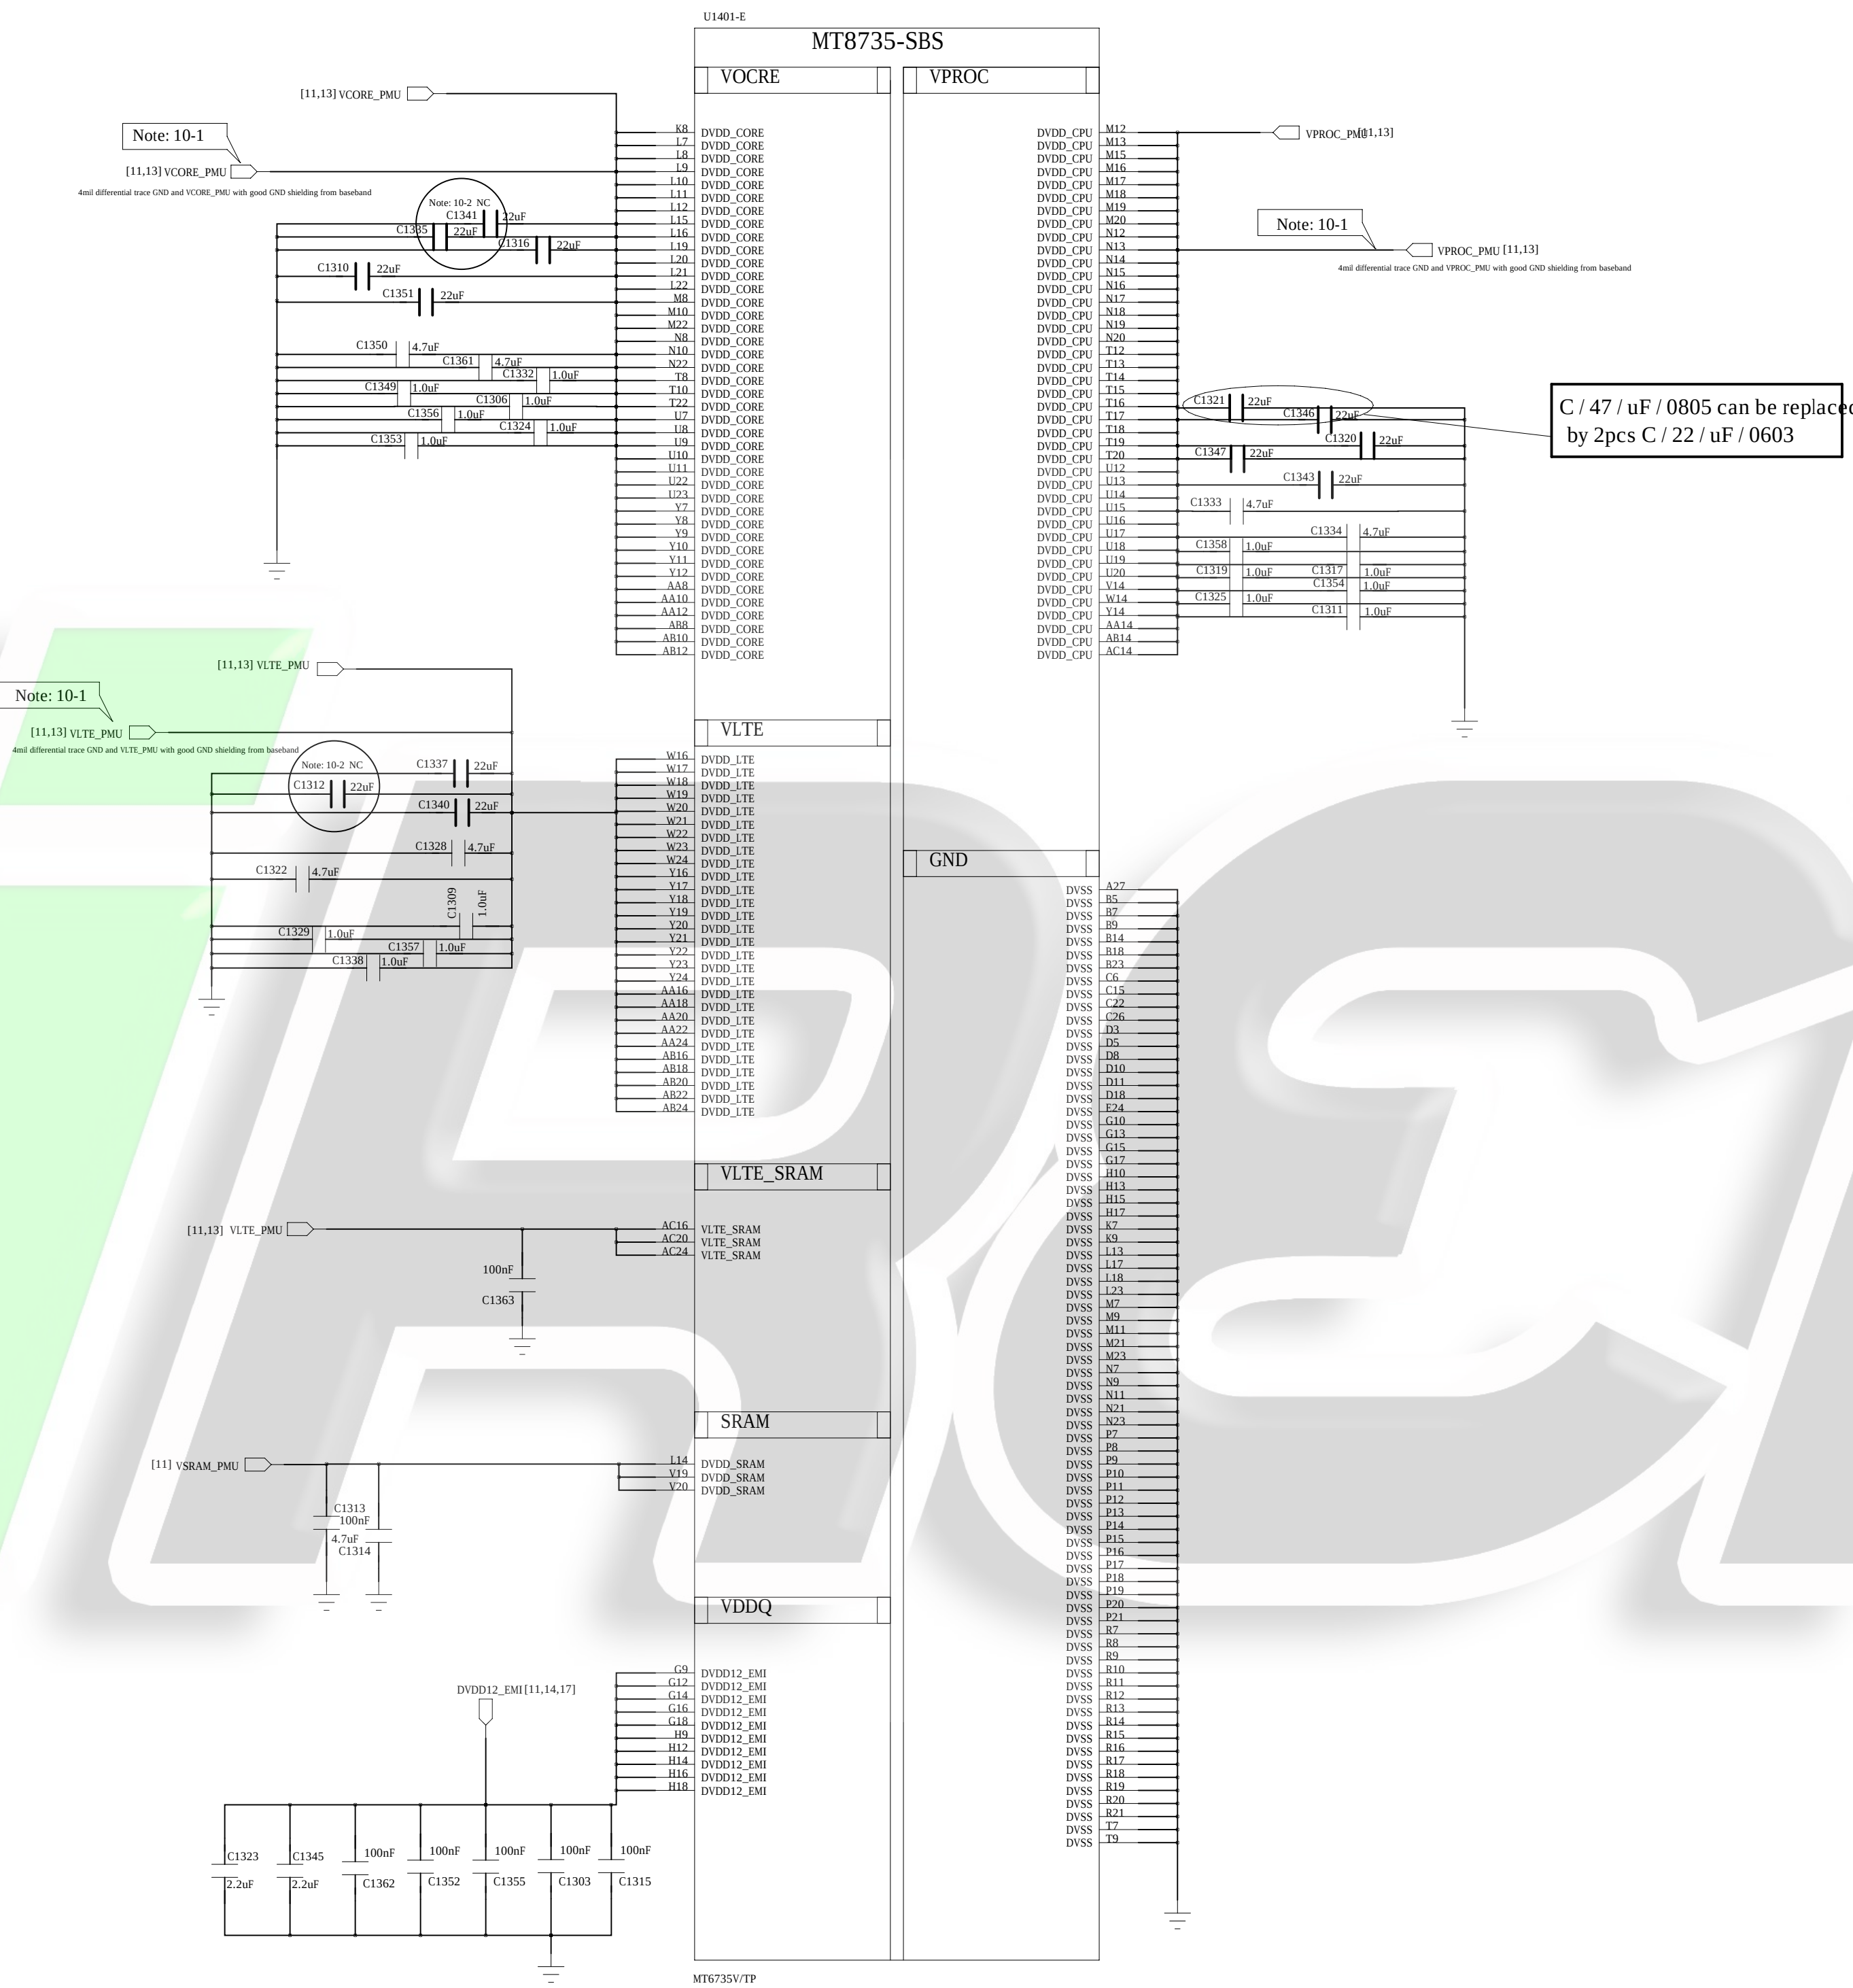


Schematic design notice of "10_BB_POWER" page.


Note 10-1: 4 mil GND trace with good shielding to PMIC (Differential)

Note 10-3:

FSOURCE_P(EFUSE)
(1)FSOURCE_P EFUSE power(VEFUSE) should be only for EFUSE usage(not share with other application)
(2)W/I EFUSE program, VEFUSE need 1uF bypass cap (pls refer to j8LDO output voltage/current table;")
(3)W/O EFUSE program, VEFUSE bypass cap should be NC.

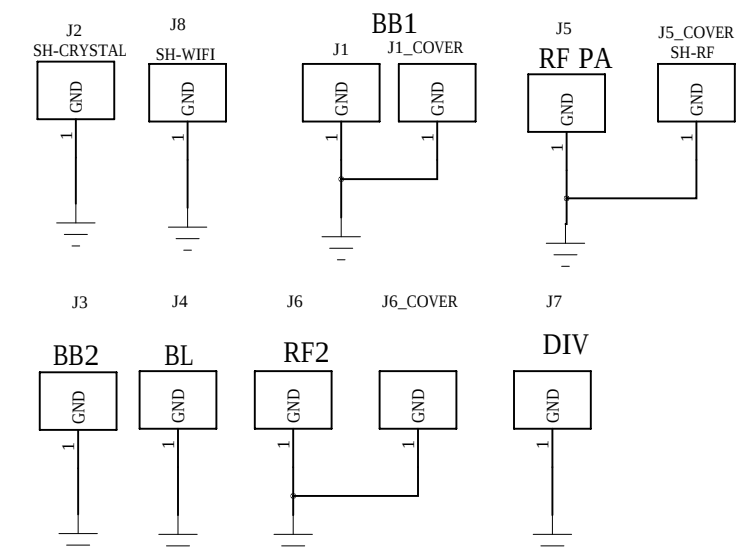


MARK POINT



COMPANY: Shanghai Longcheer			
TITLE: Annzo2			
DESIGN: <Drawn By>	DATE: <Drawn Date>	CODE: A0	SIZE: <Drawing Number>
CHECKED: <Checked By>	DATE: <Checked Date>	CODE: A1	SIZE: <Drawing Number>
QUALITY CONTROL: <QC By>	DATE: <QC Date>	CODE: A1	SIZE: <Drawing Number>
RELEASED: <Released By>	DATE: <Release Date>	SCALE: <Scale>	SHEET: 23

REVISION RECORD			
VER	ECO NO.	APPROVED	DATE

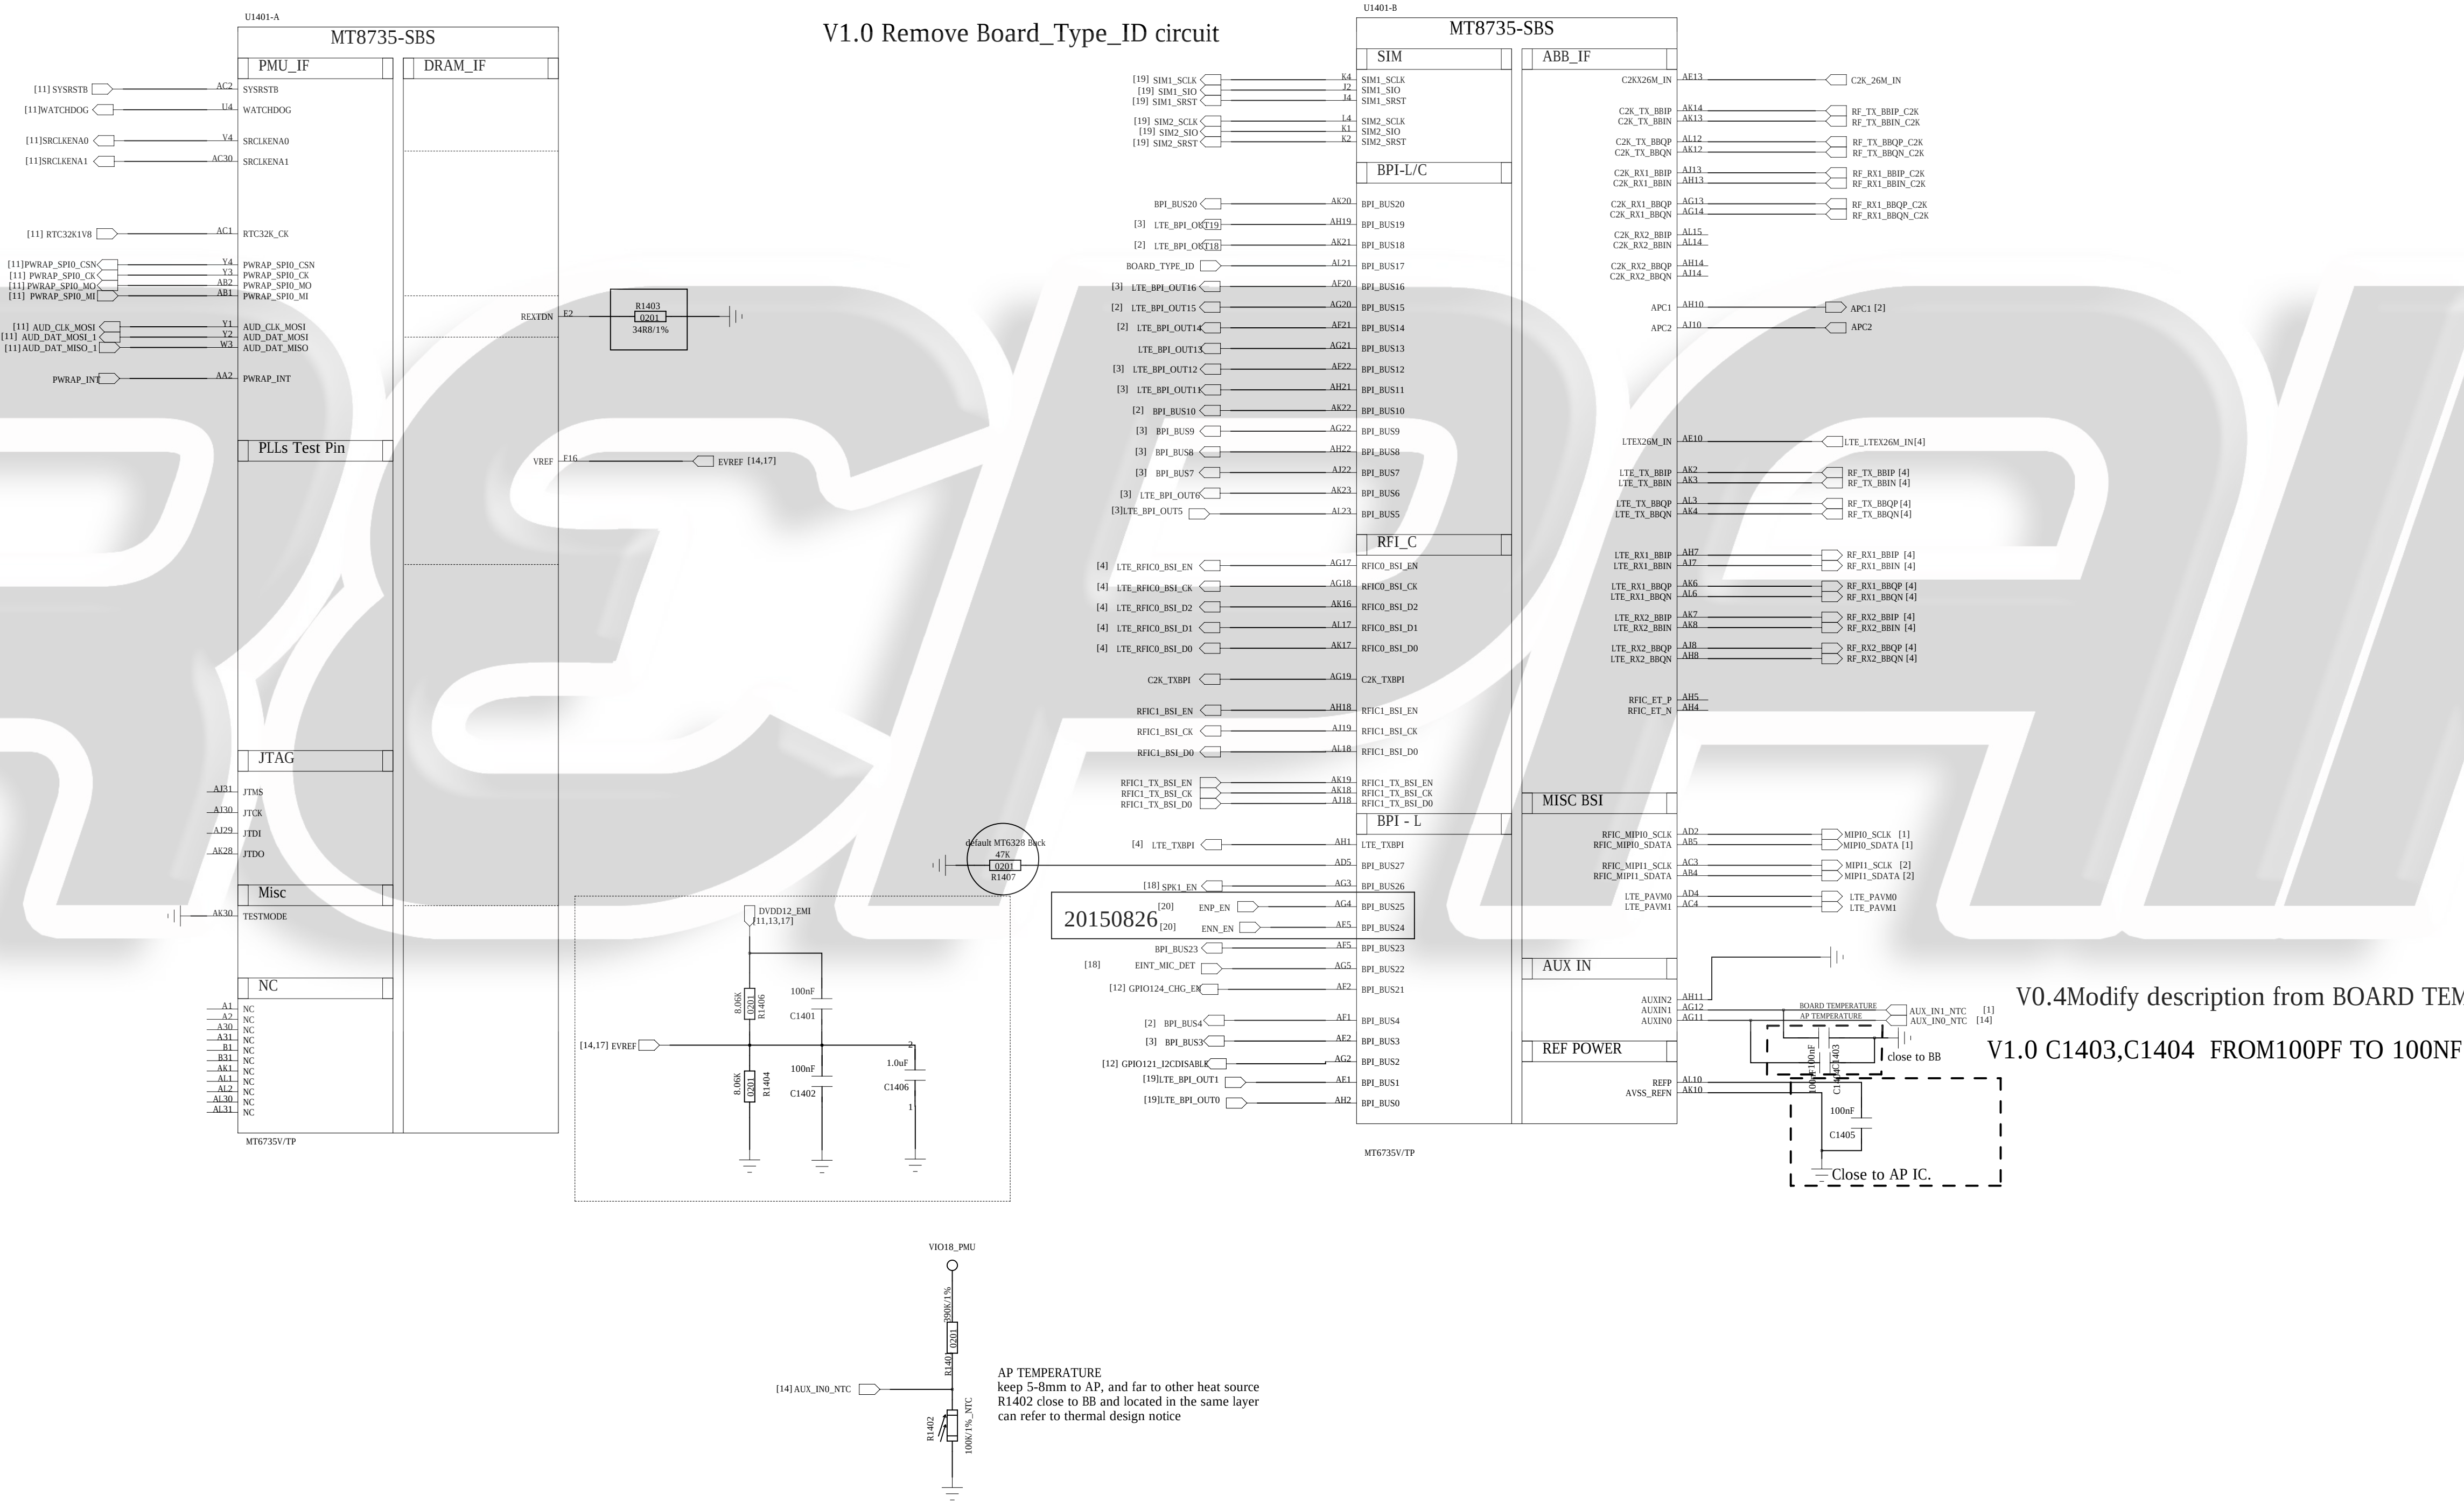

COMPANY: Shanghai Longcheer			
TITLE: Annzo2			
DRAWN: <Drawn By>	DESIGN: <Drawn Date>	CODE: <Code>	SIZE: A0
CHECKED: <Checked By>	DATE: <Checked Date>	DATE: <Drawing Number>	REV: A1
QUALITY CONTROL: <QC By>	DATE: <QC Date>	DATE: <Drawing Number>	REV: A1
RELEASED: <Released By>	DATE: <Release Date>	SCALE: <Scale>	SHEET: 14 23


REVISION RECORD			
VER	ECO NO.	APPROVED	DATE

Lenovo CMCC	16GB eMMC + 16Gb LPDDR3	89300104 // KMR820001M-B609
Lenovo ROW + Moto ROW	8GB eMMC + 8Gb LPDDR3	89300101 // KMQ72000SM-B316
Moto CMCC	16GB eMMC + 8Gb LPDDR3	new // KMR7X0001M_B511

Connect to AP	
DQ0_31	DQ0_31
CA0_9	CA0_9
CS0_N	CS0_N
CS1_N	CS1_N
CKE	CKE
DQM0	DQM0
DQM1	DQM1
DQM2	DQM2
DQM3	DQM3
DQS0_C	DQS0_C
DQS1_C	DQS1_C
DQS2_C	DQS2_C
DQS3_C	DQS3_C
DQS0_T	DQS0_T
DQS1_T	DQS1_T
DQS2_T	DQS2_T
DQS3_T	DQS3_T
CLK0_T	CLK0_T
CLK_C	CLK_C
VREF_CA	VREF_CA
VREF_DQ	VREF_DQ
MSDC0_RSTB	MSDC0_RSTB
MSDC0_CMD	MSDC0_CMD
MSDC0_CLK	MSDC0_CLK
MSDC0_DSL	MSDC0_DSL
MSDC0_DAT0	MSDC0_DAT0
MSDC0_DAT1	MSDC0_DAT1
MSDC0_DAT2	MSDC0_DAT2
MSDC0_DAT3	MSDC0_DAT3
MSDC0_DAT4	MSDC0_DAT4
MSDC0_DAT5	MSDC0_DAT5
MSDC0_DAT6	MSDC0_DAT6
MSDC0_DAT7	MSDC0_DAT7

Power I/F	
VIO18_PMU	VIO18_PMU
VEMC_3V3_PMU	VEMC_3V3_PMU
DVDD12_EMI	DVDD12_EMI

8GB eMMC + 8Gb LPDDR3
Hynix/H9TQ64A8GTMCUR-KUM

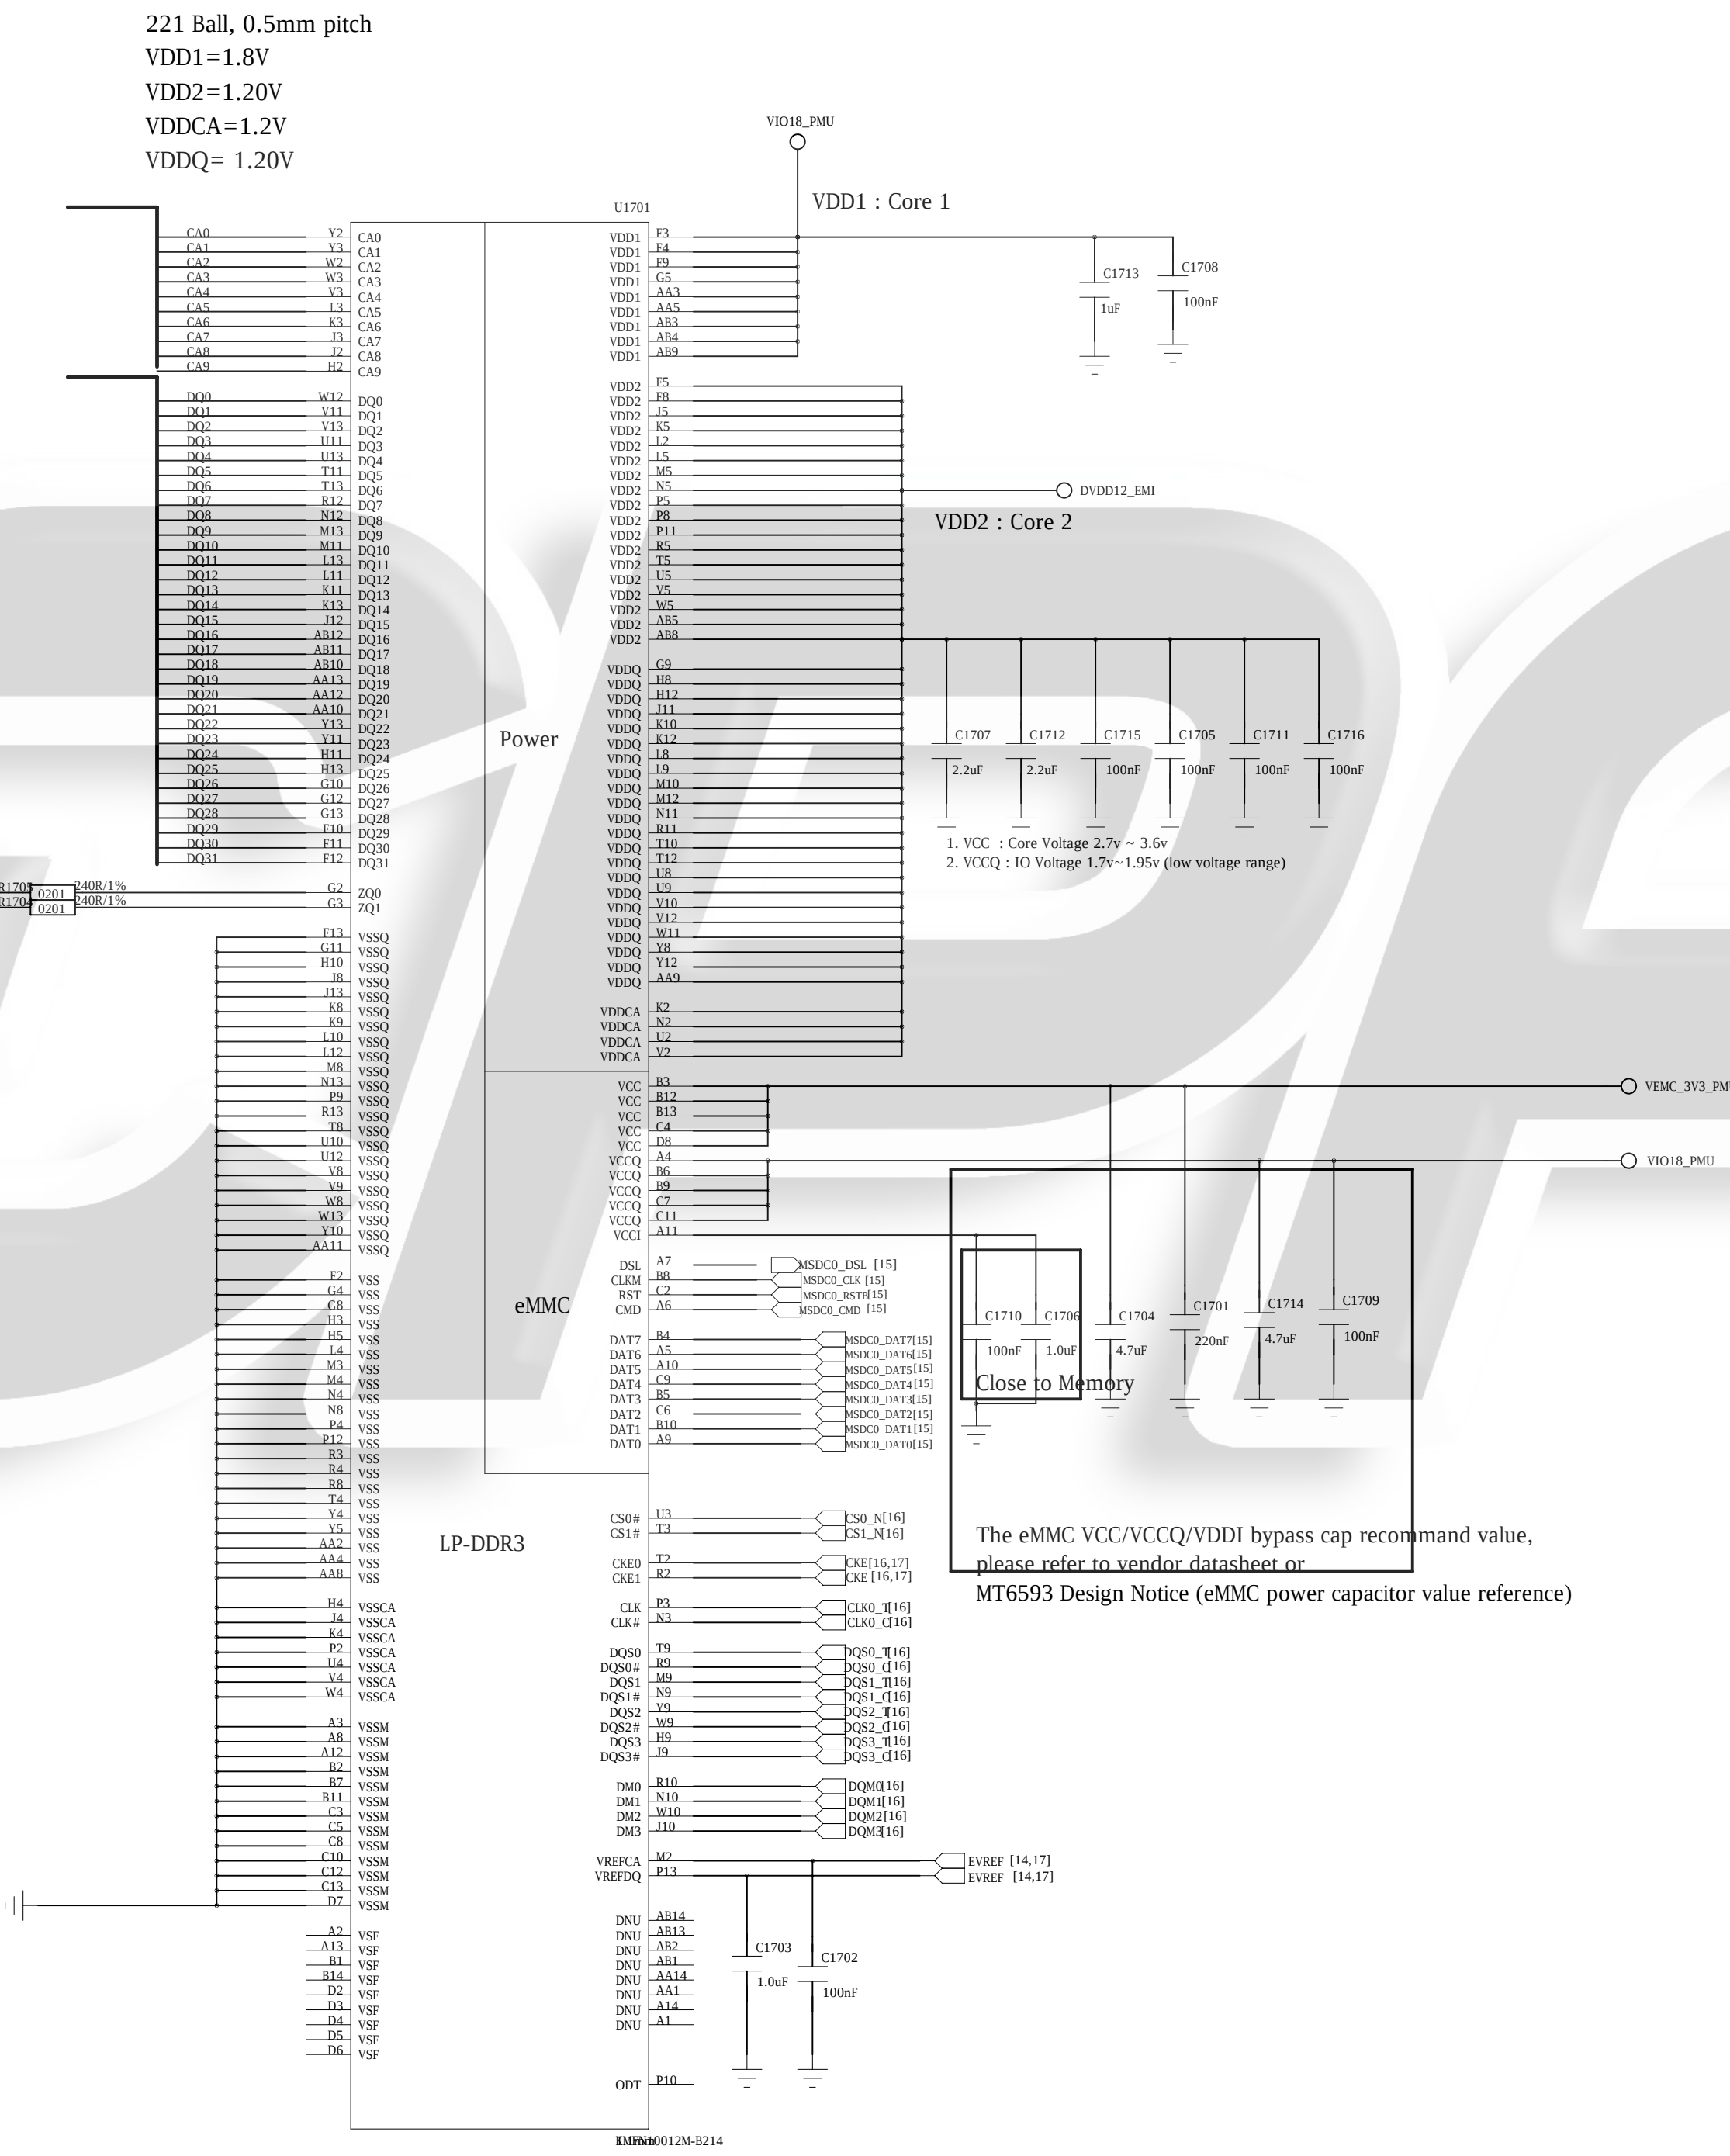

COMPANY: Shanghai Longcheer



TITLE: Annzo2

DRAWN	DATE	CODE	SIZE	DRAWING NO.	REV.
<Drawn By>	<Drawn Date>				
CHECKED	DATE				
<Checked By>	<Checked Date>				
QUALITY CONTROL	DATE				
<QC By>	<QC Date>				
RELEASED	DATE				
<Released By>	<Release Date>				


SCALE: <Scale> SHEET: 17 23

REVISION RECORD			
LTB	ECO NO.	APPROVED	DATE


MIC CIRCUIT

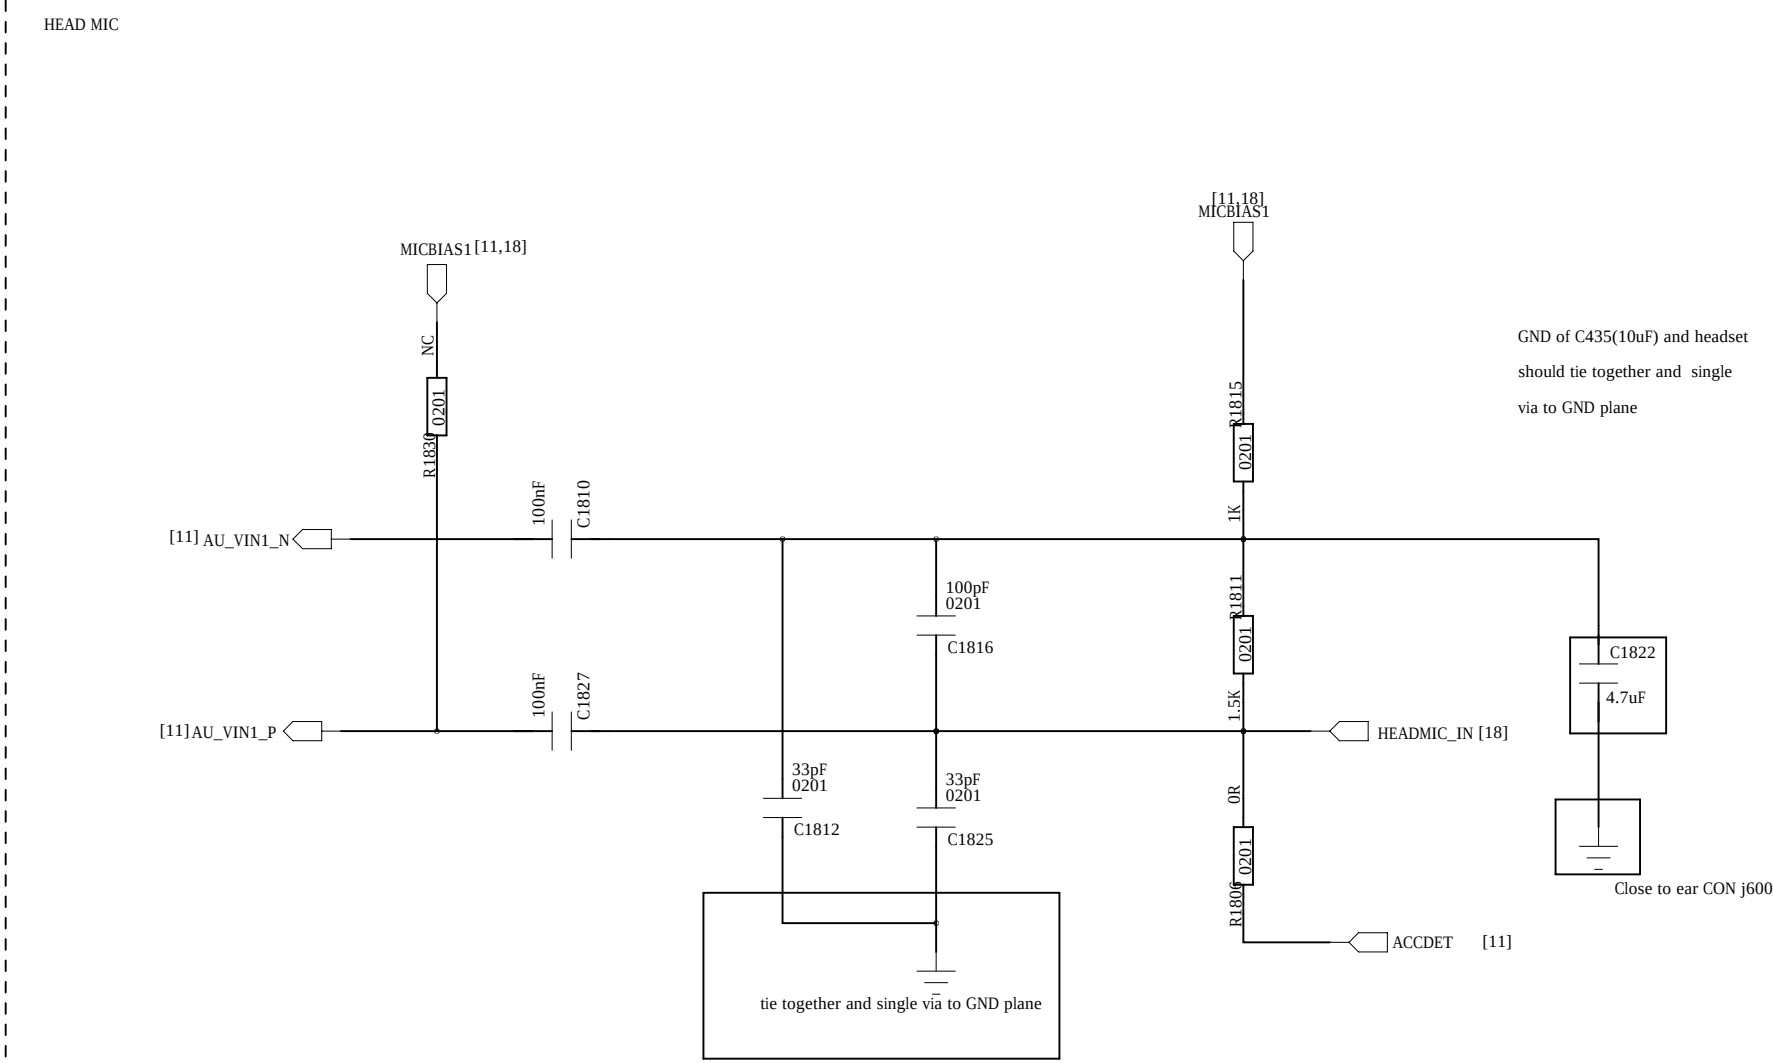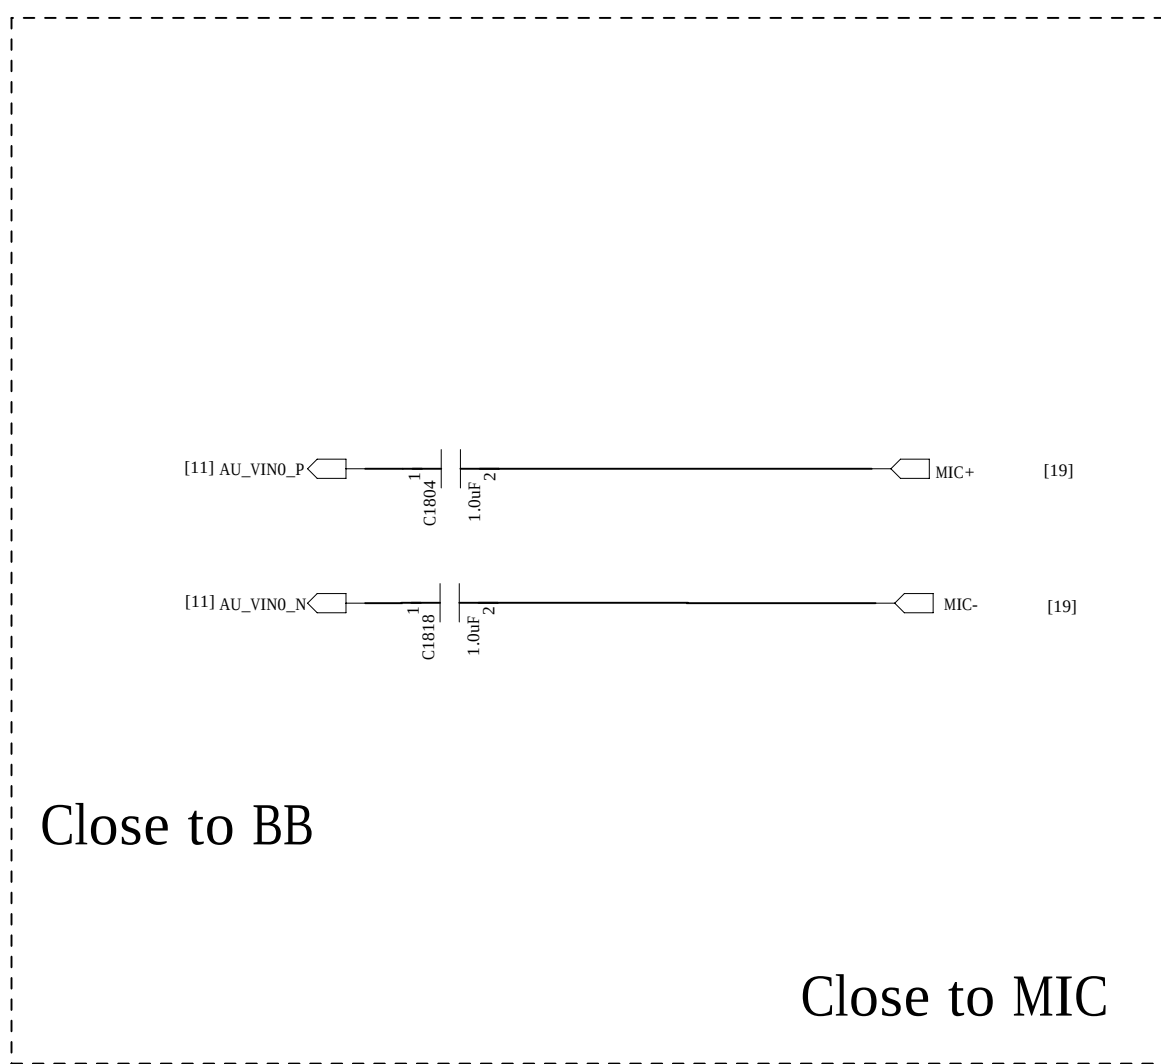


Audio Smart PA

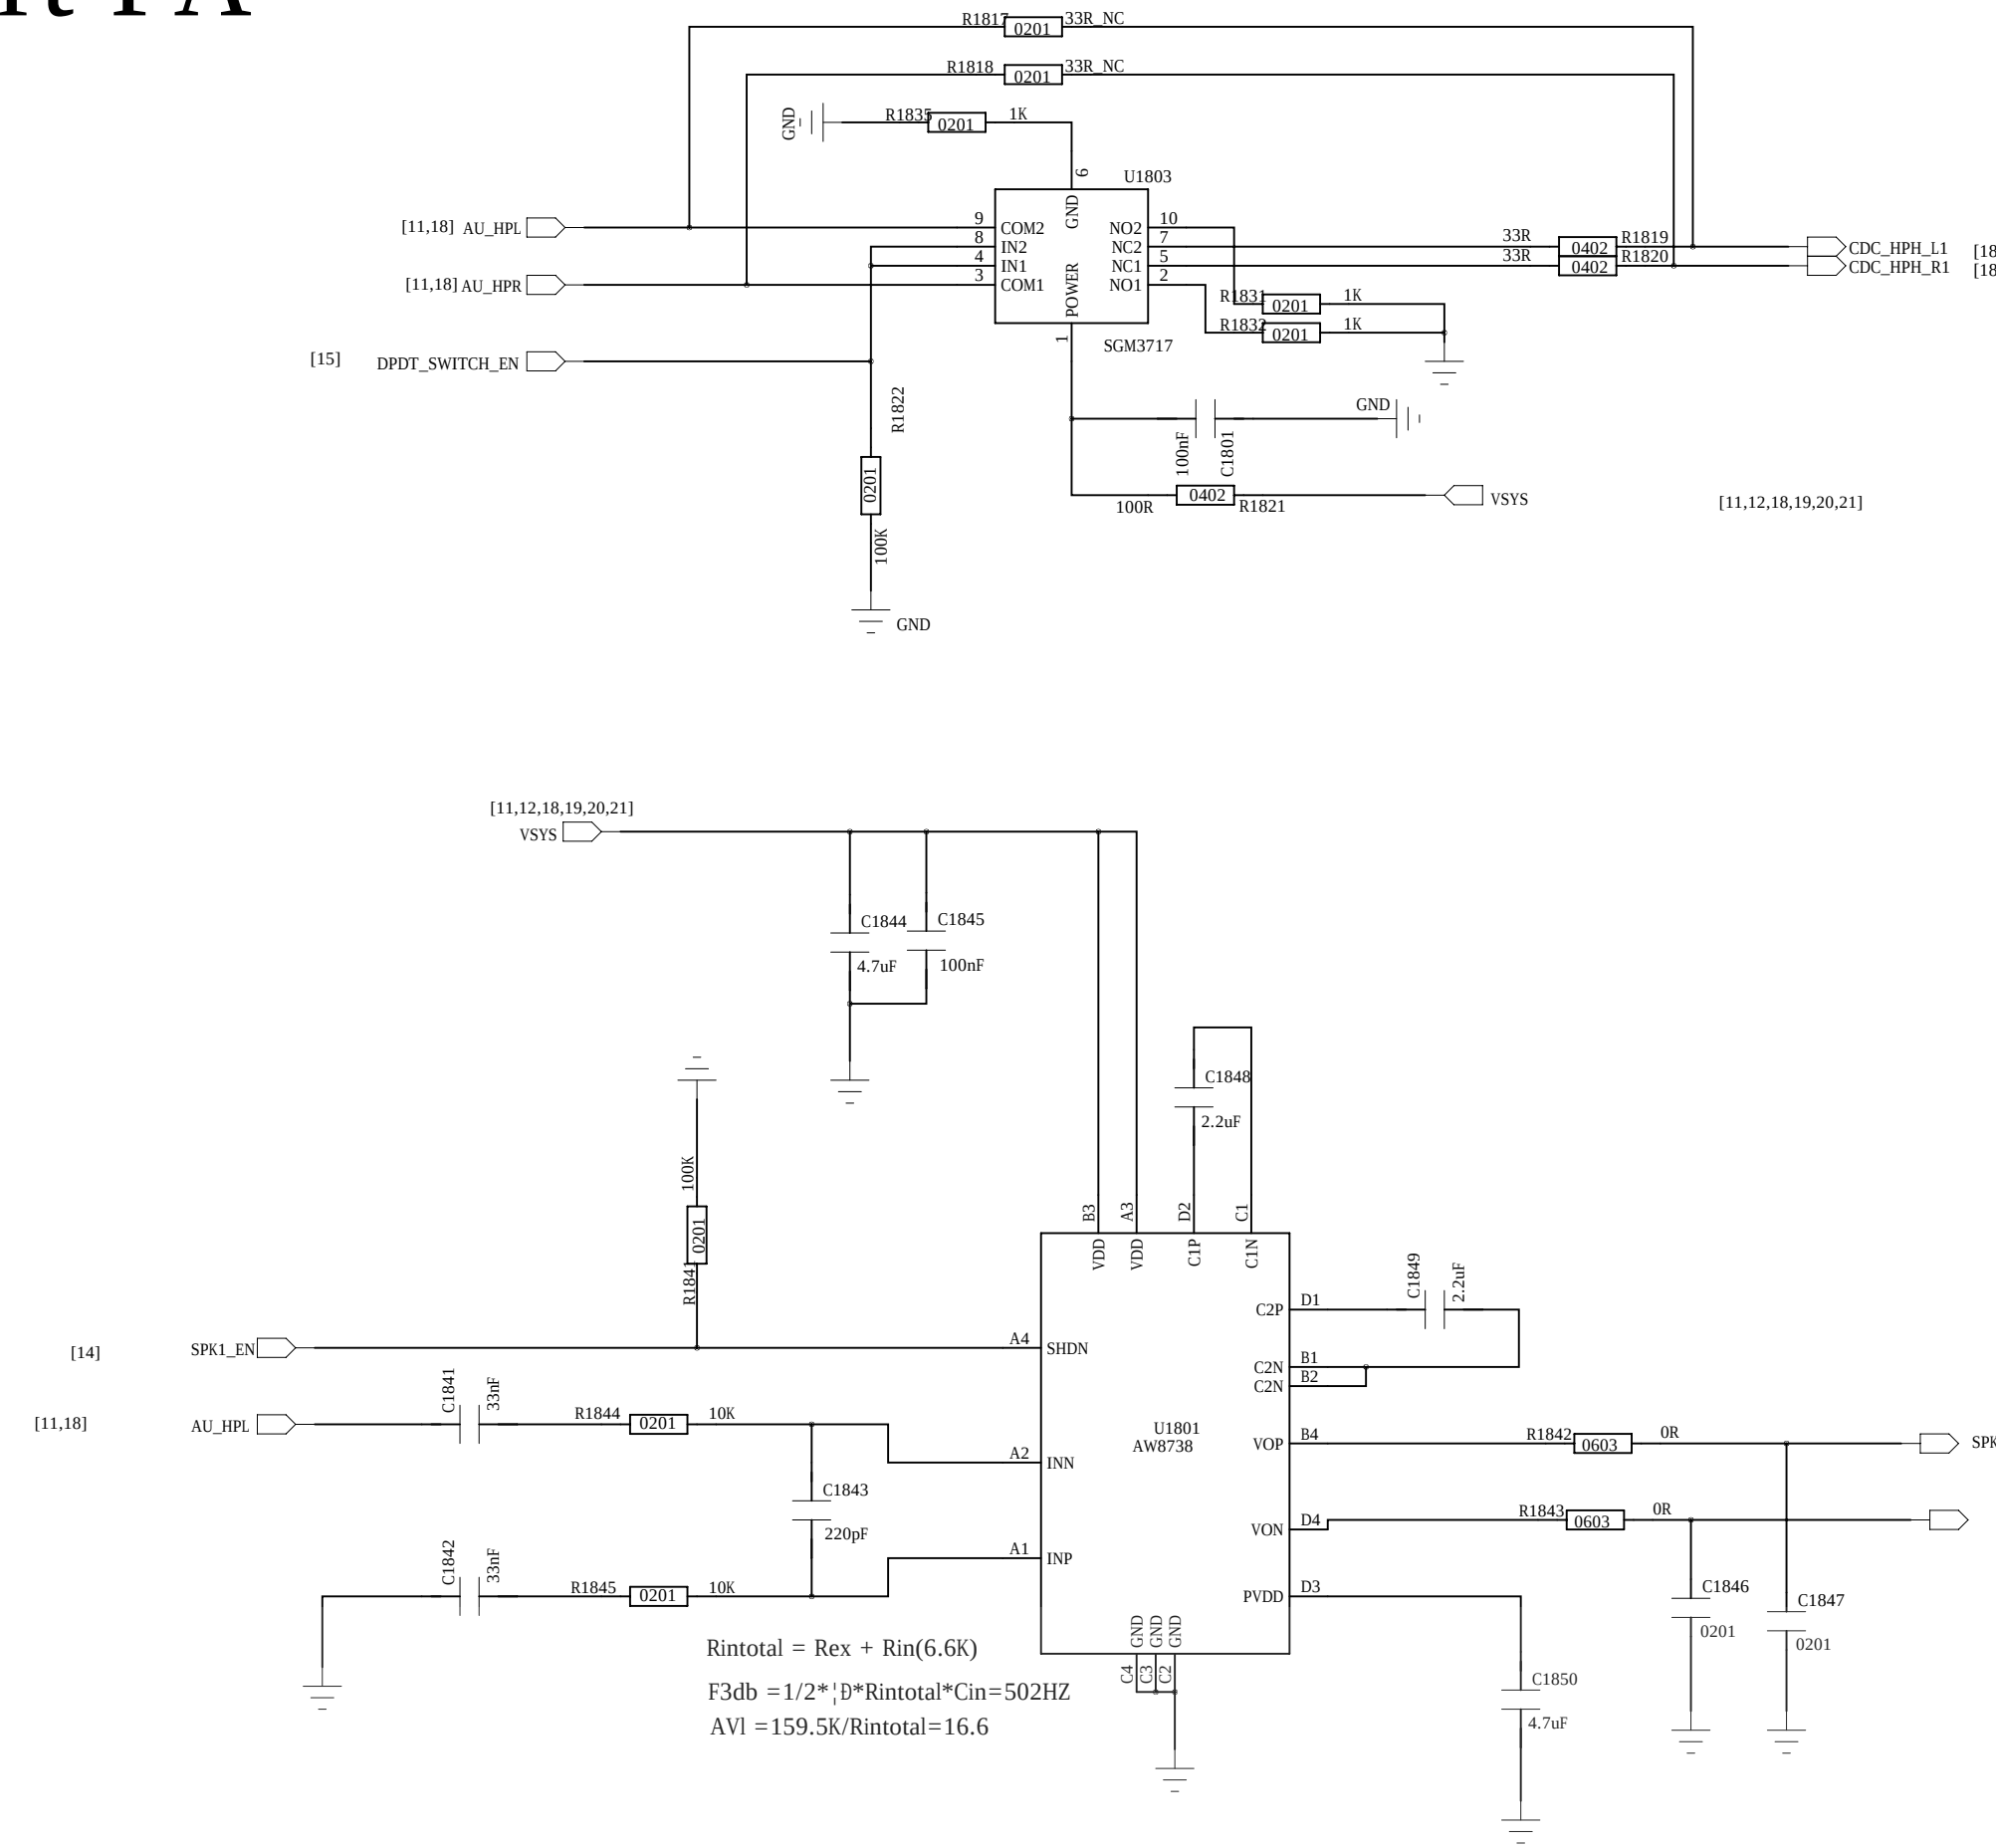


Handset Microphone 2-1 (Rear - DMNR)

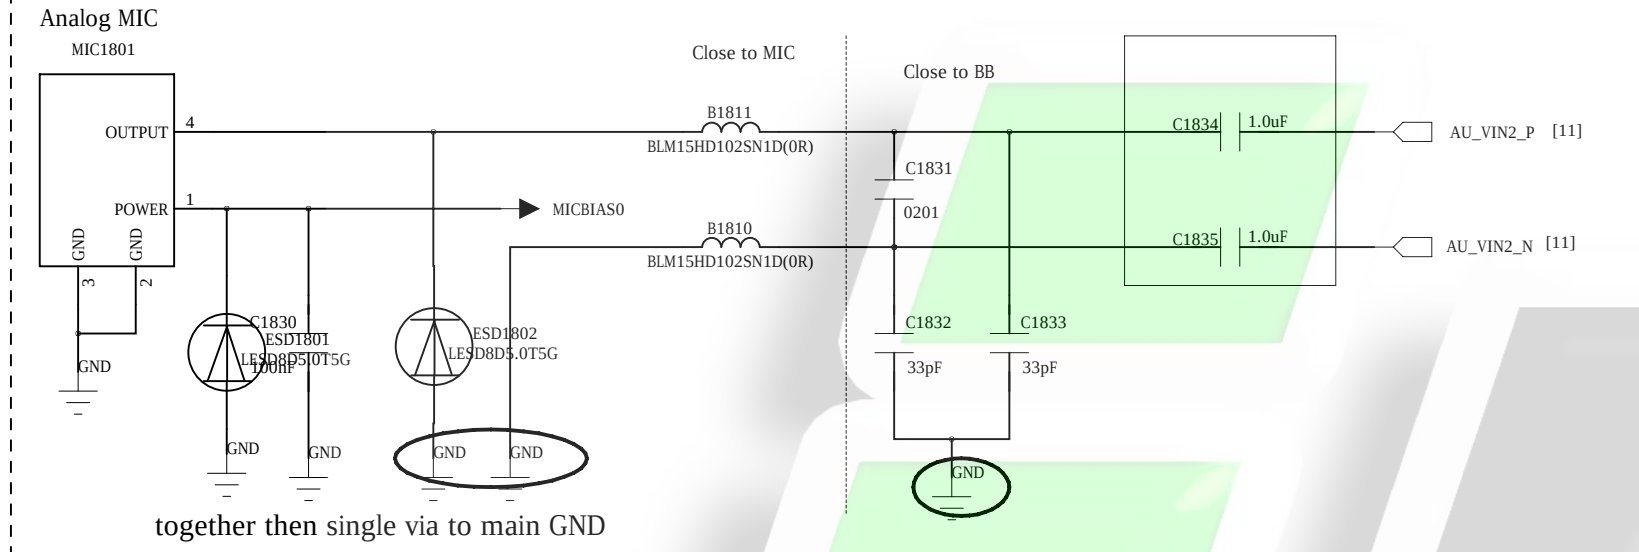

Earphone Audio

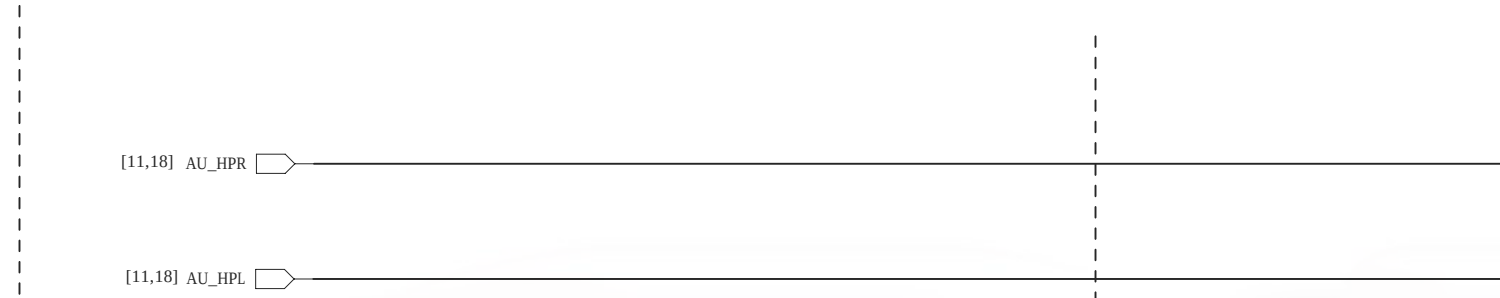


3.5mm Headphone Jack

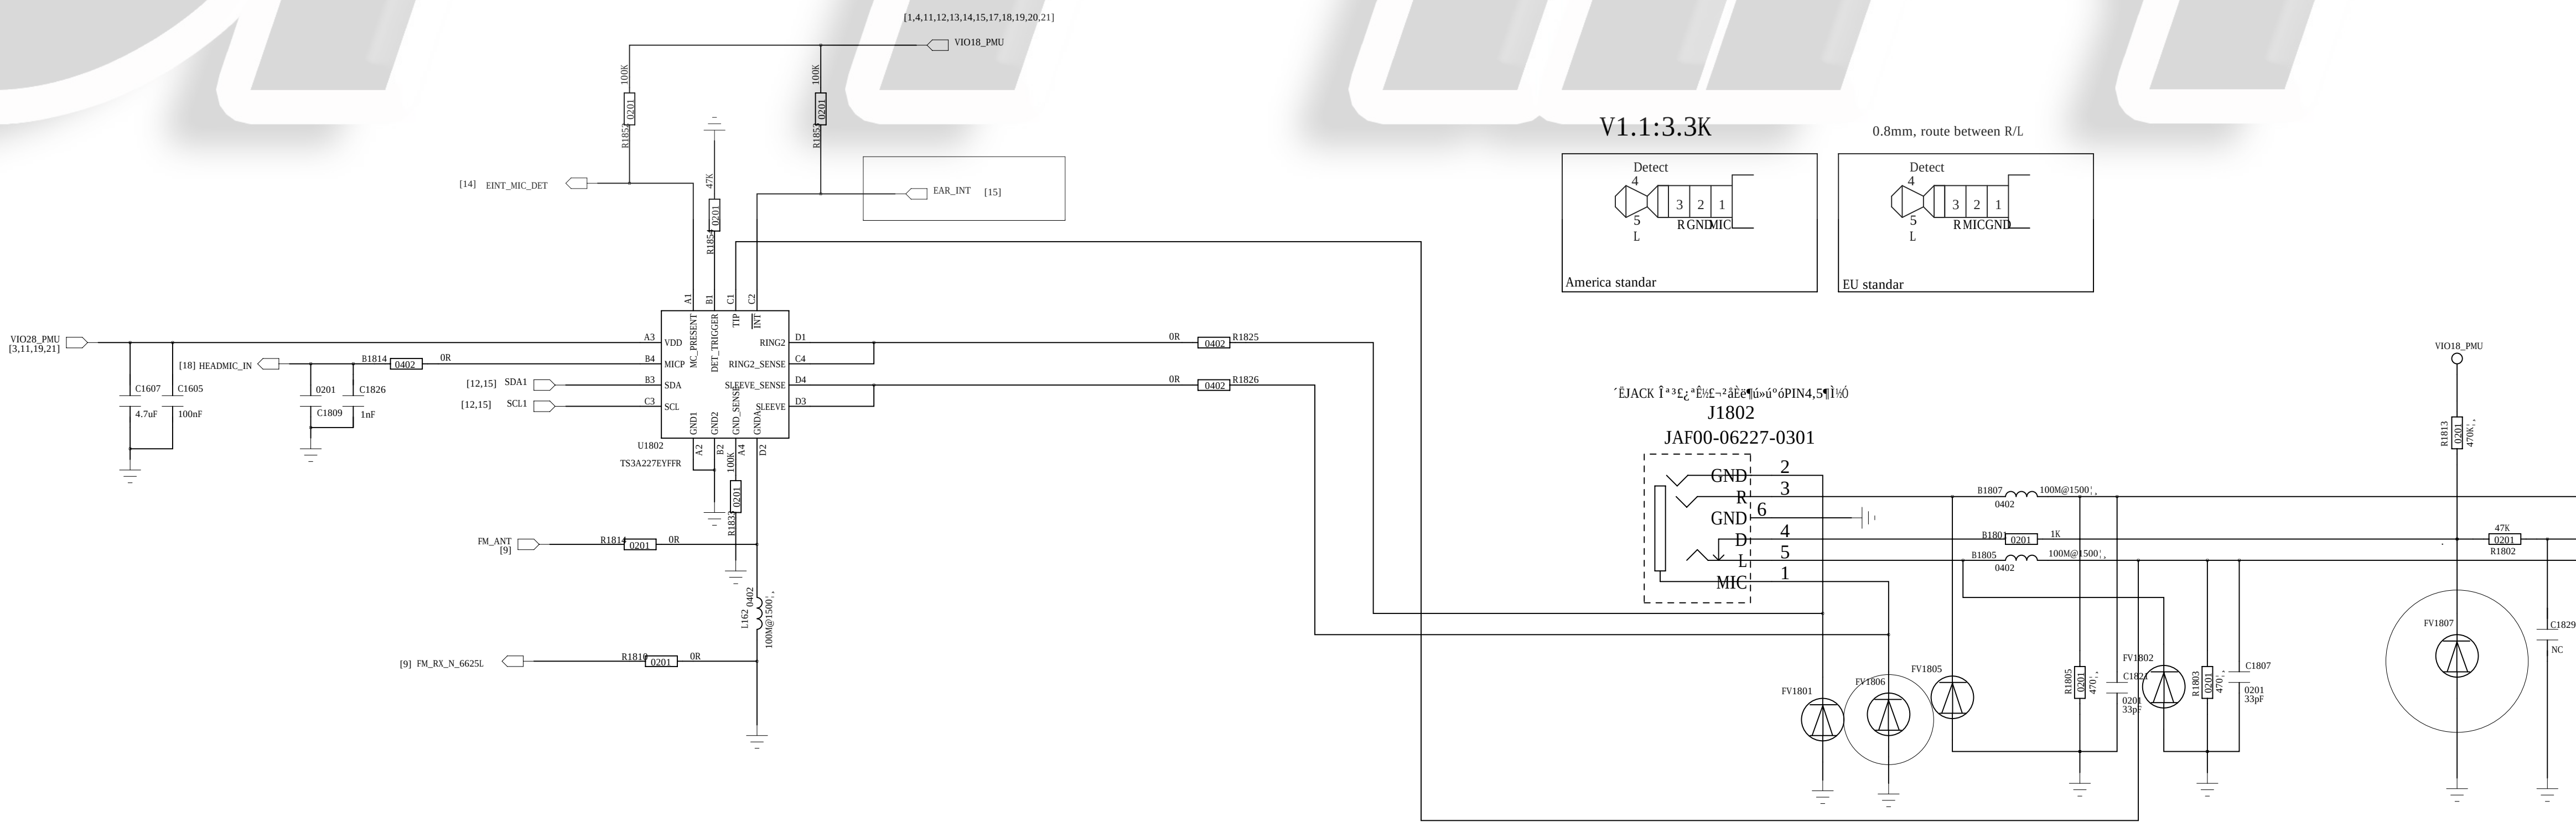



COMPANY			
Shanghai Longcheer			
TITLE			
Annzo2			
DRAWN: <Drawn By>	DATED: <Drawn Date>	CODE:	SIZE:
CHECKED: <Checked By>	DATED: <Checked Date>	DRIVING NO.:	REV:
QUALITY CONTROL: <QC By>	DATED: <QC Date>	<Code> A0 <Drawing Number> A1	
RELEASED: <Released By>	DATED: <Released Date>	SCALE: <Scale>	SHEET: 23

REVISION RECORD			
LTB	ECO NO.	APPROVED	DATE


Touch LENS CON

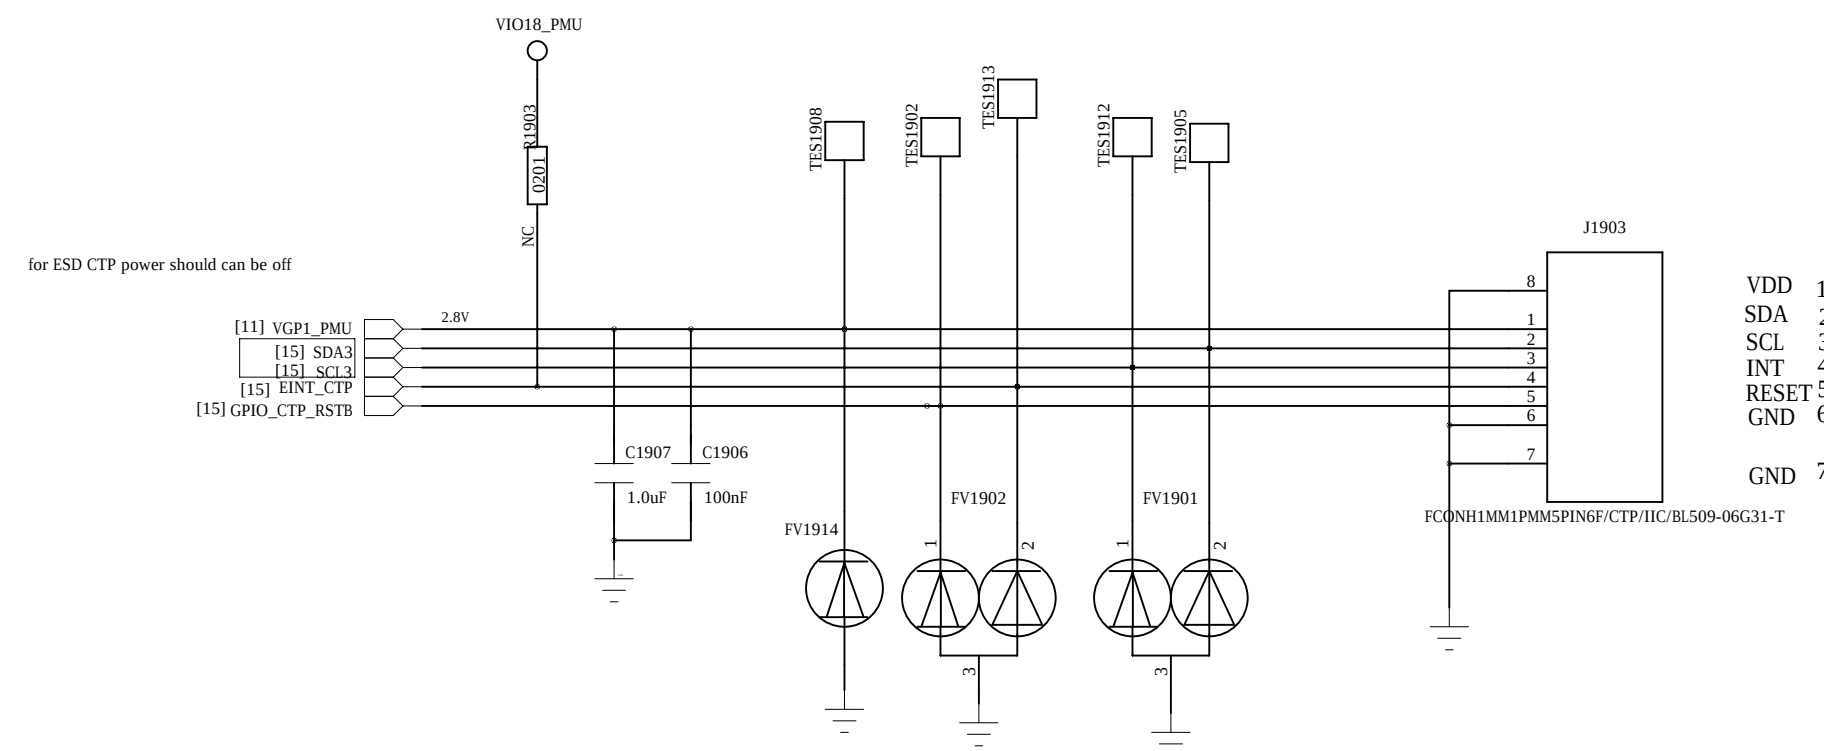

SIM CARD

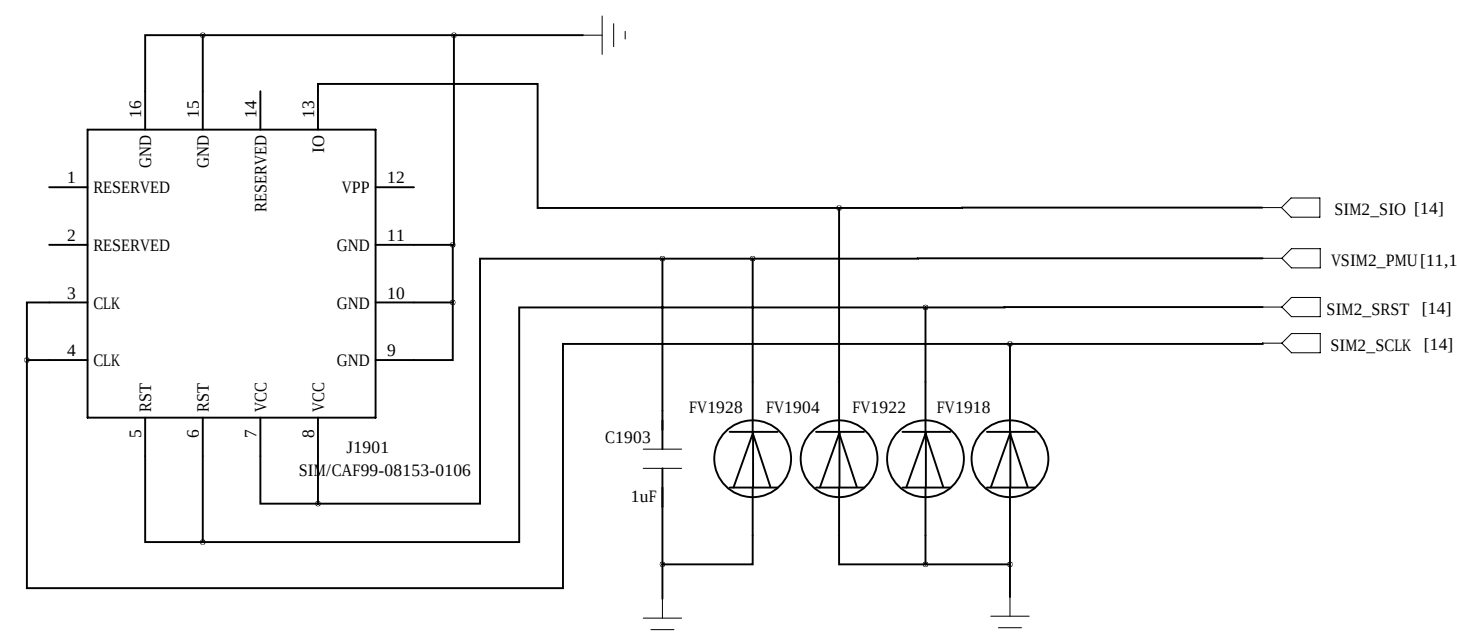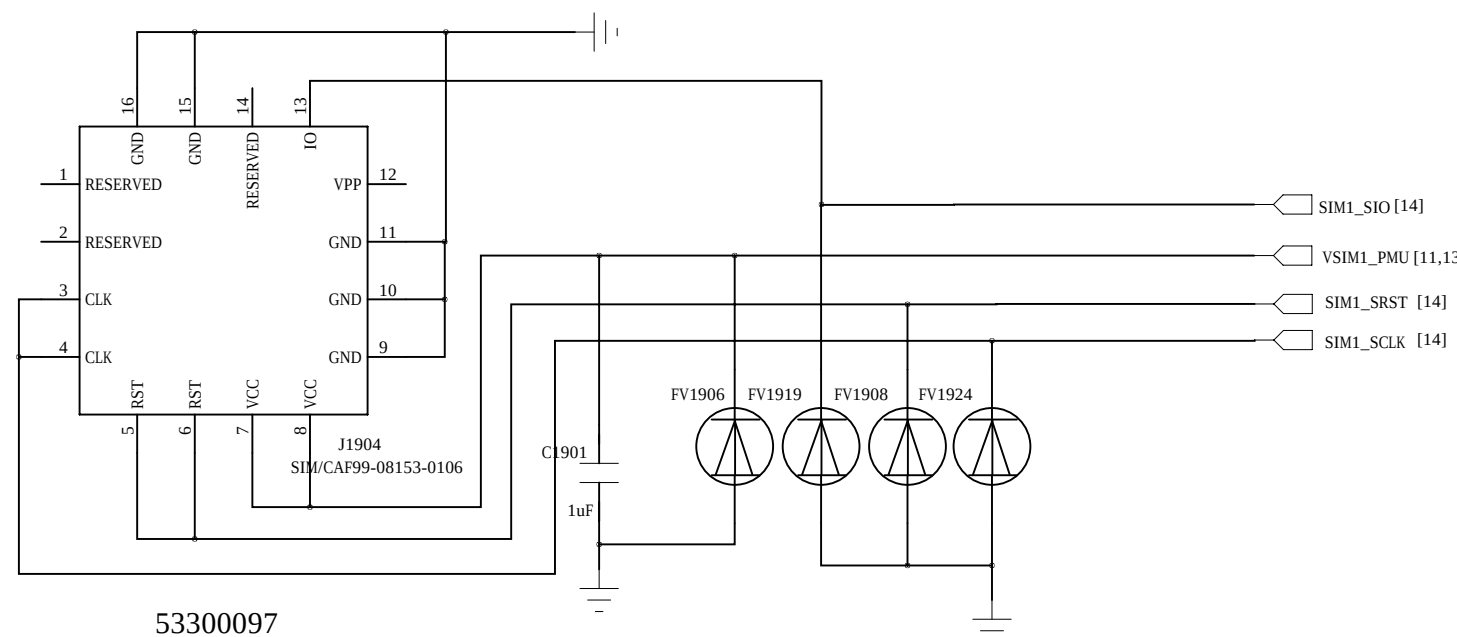


Sub Connector

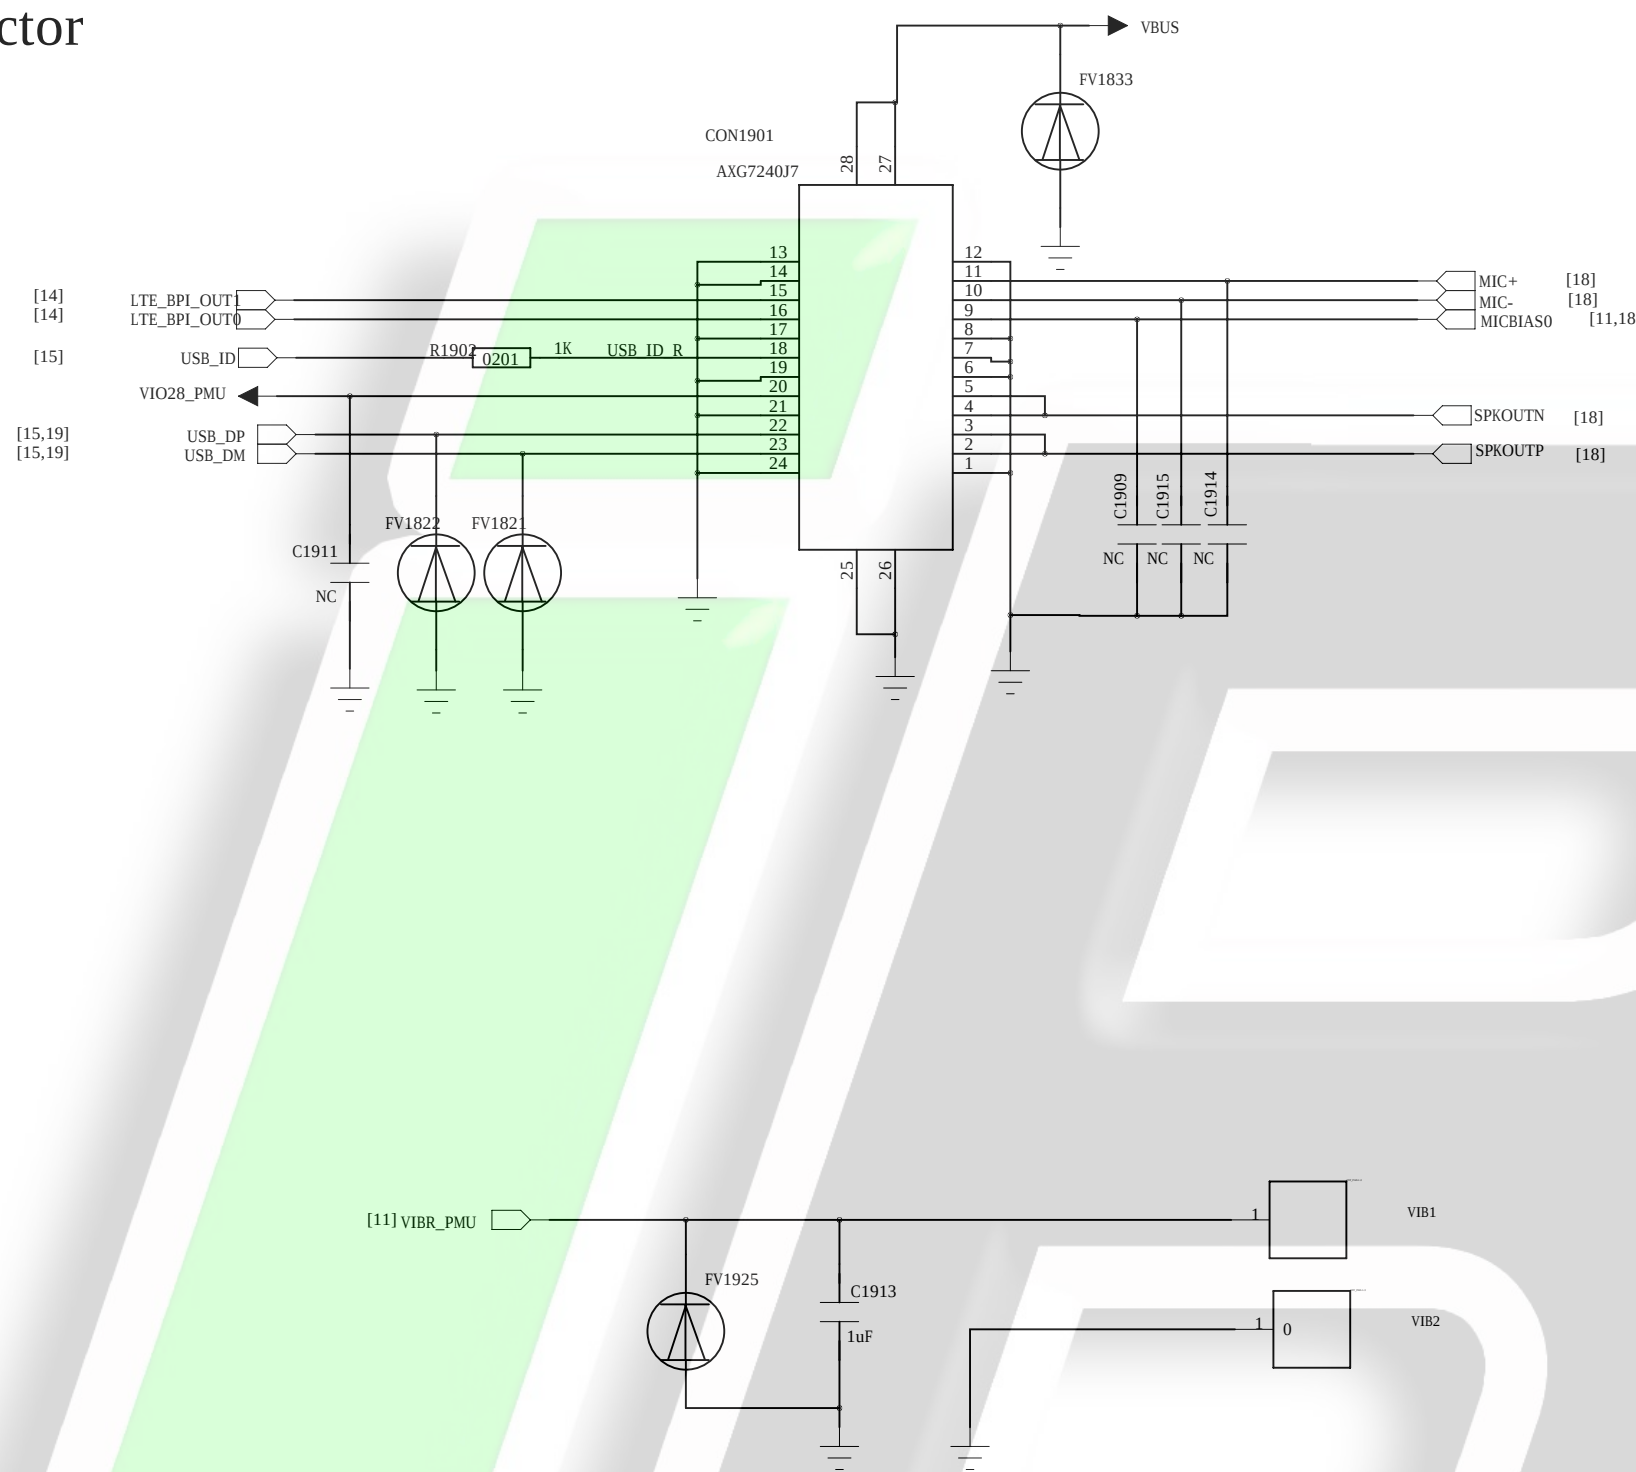


EN updated 20150828 and add C1905 for VMCH_PMU

TF CARD

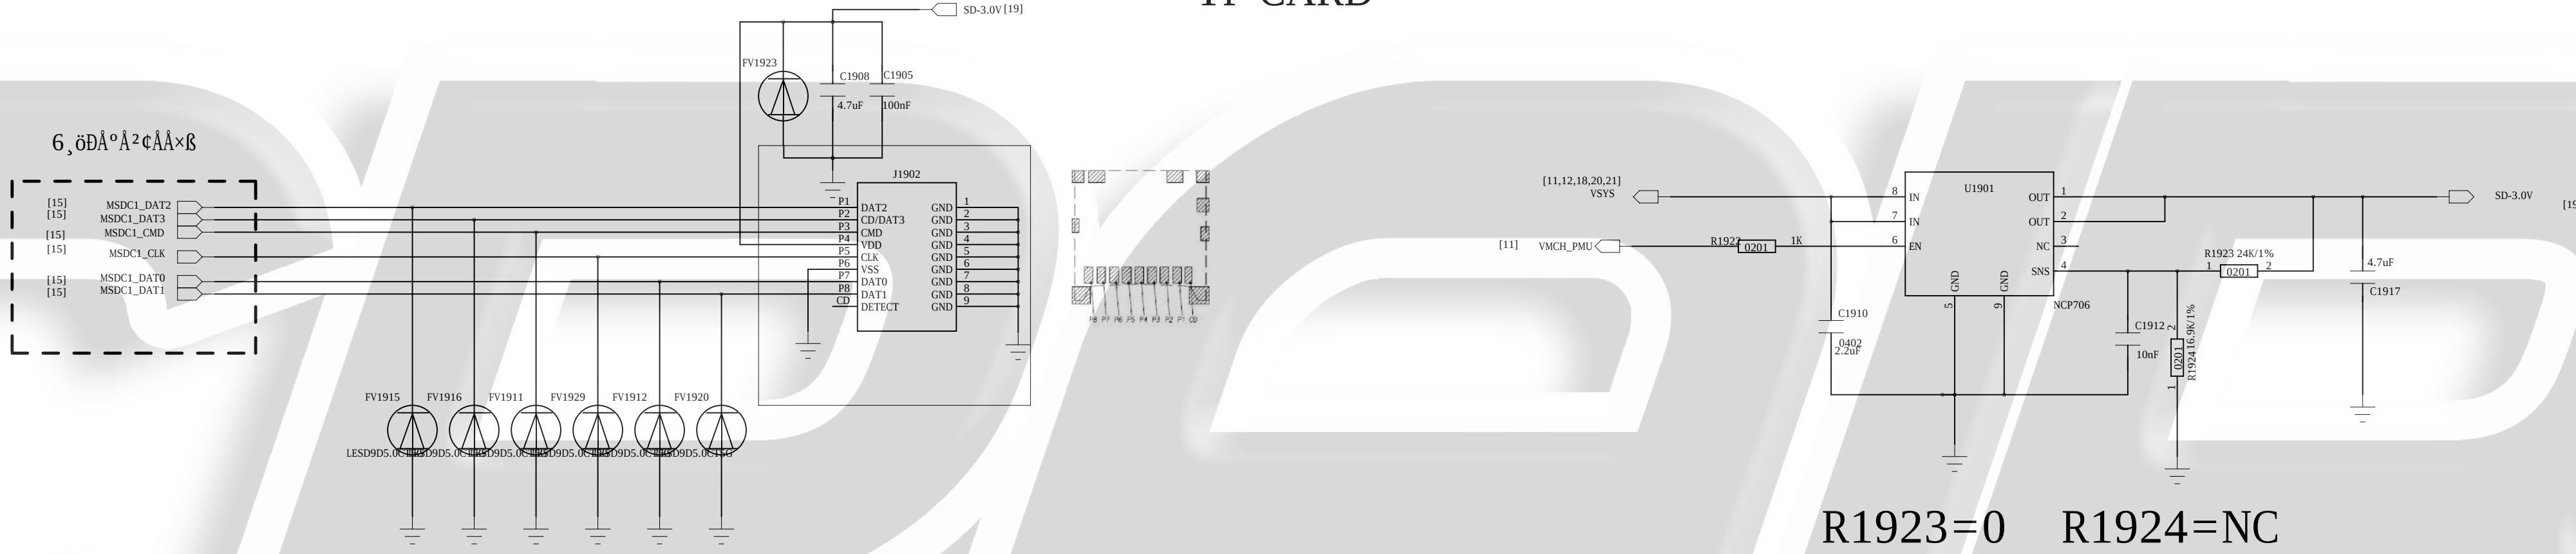


R1923=0 R1924=NC

USB TEST POINT

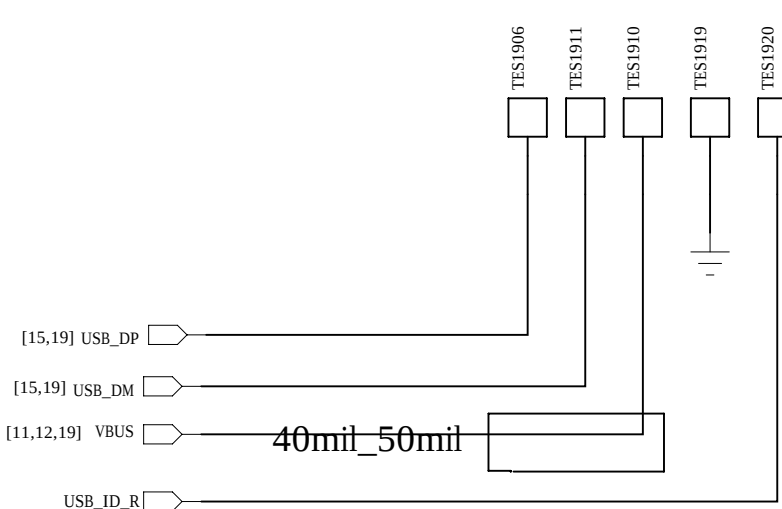

SideKey+PowerKey

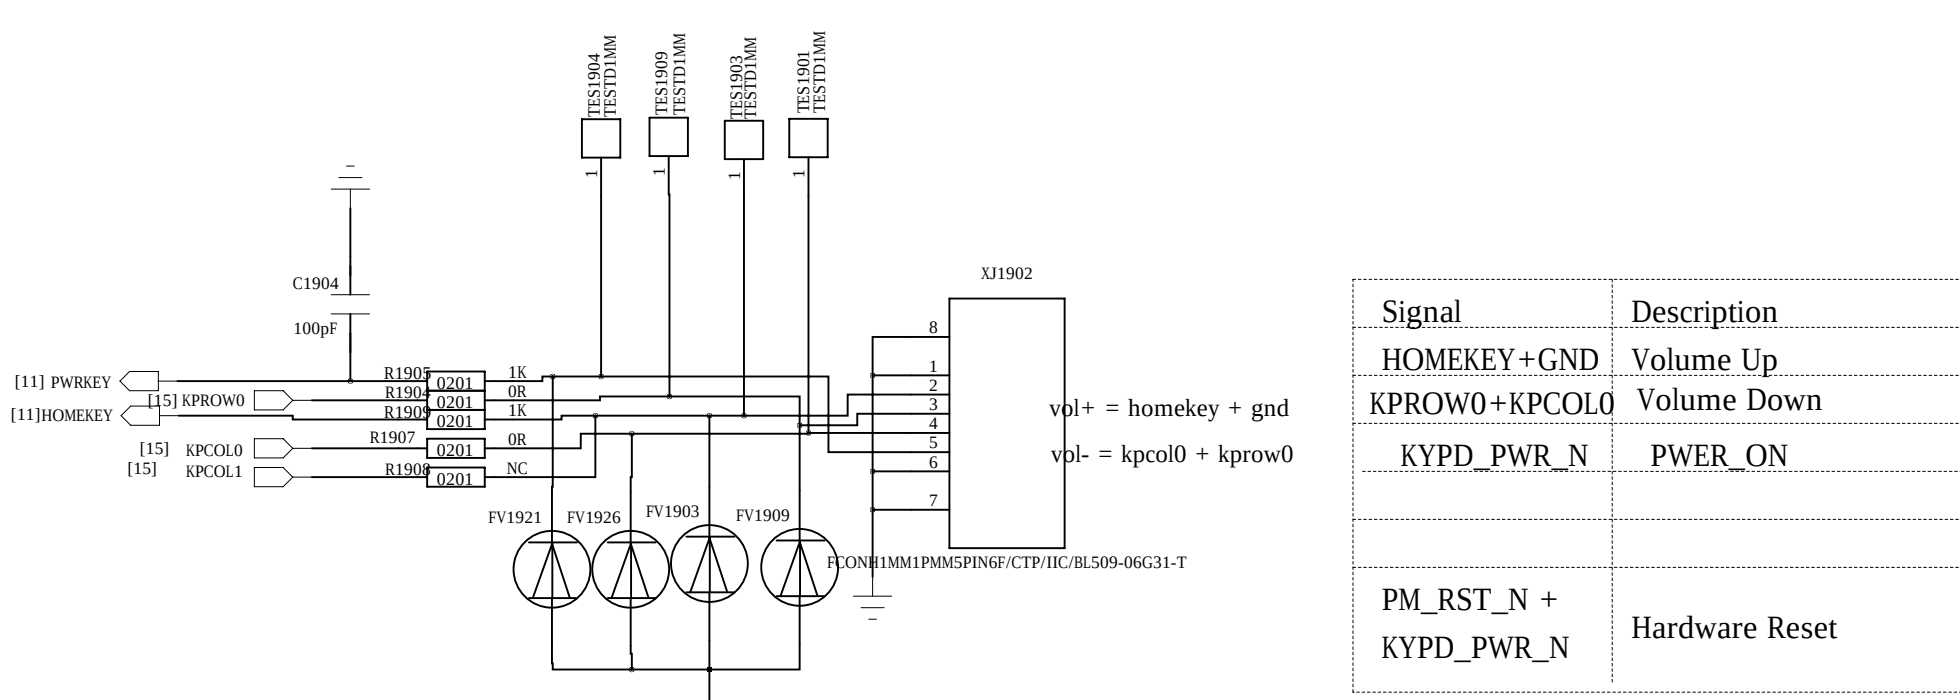

Signal	Description
HOMEKEY + GND	Volume Up
KPDW0 + KPDW1	Volume Down
KYPD_PWR_N	POWER_ON
PM_RST_N + KYPD_PWR_N	Hardware Reset


Shanghai Longcheer

Annzo2


DATE	BY	DATE	BY	DATE	BY	DATE	BY

REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE


Accelerometer Sensor
8bit(BMA223) compatible 12bit(BMA253)
ADDR 0011000b(0x18) SDO=0

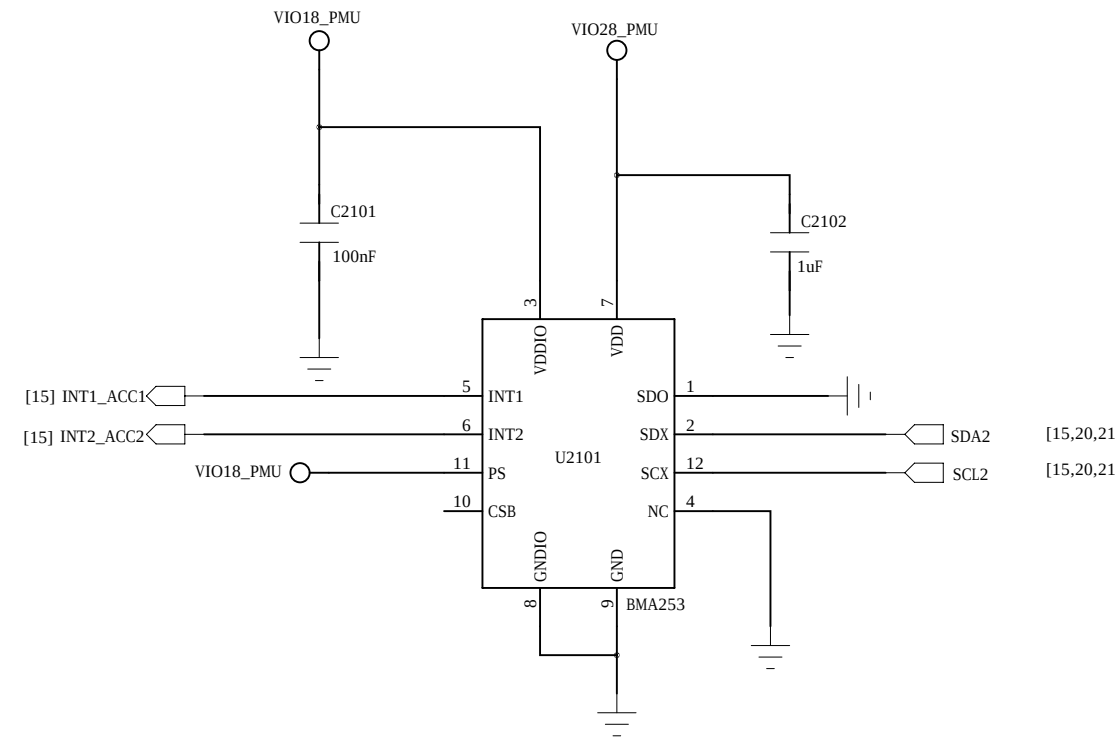


RG LED

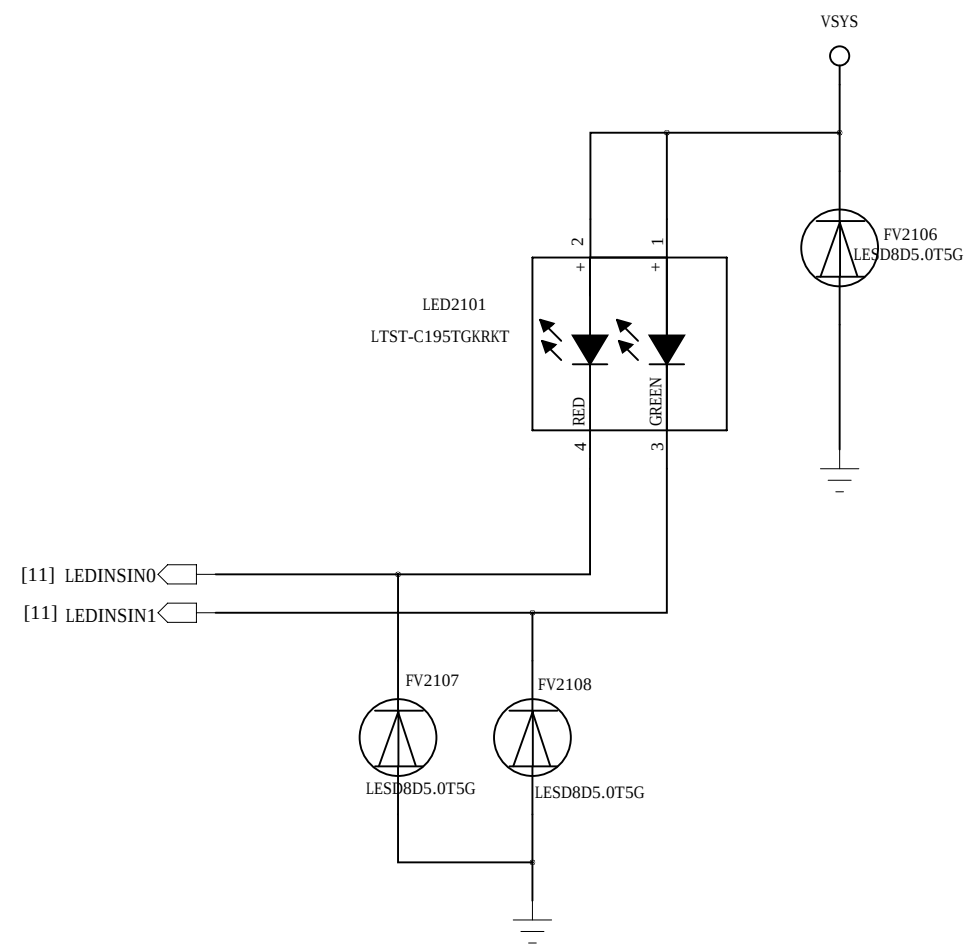

PS Sensor
EPL25905KCWJP
I2C address: 1001001b (0x49)

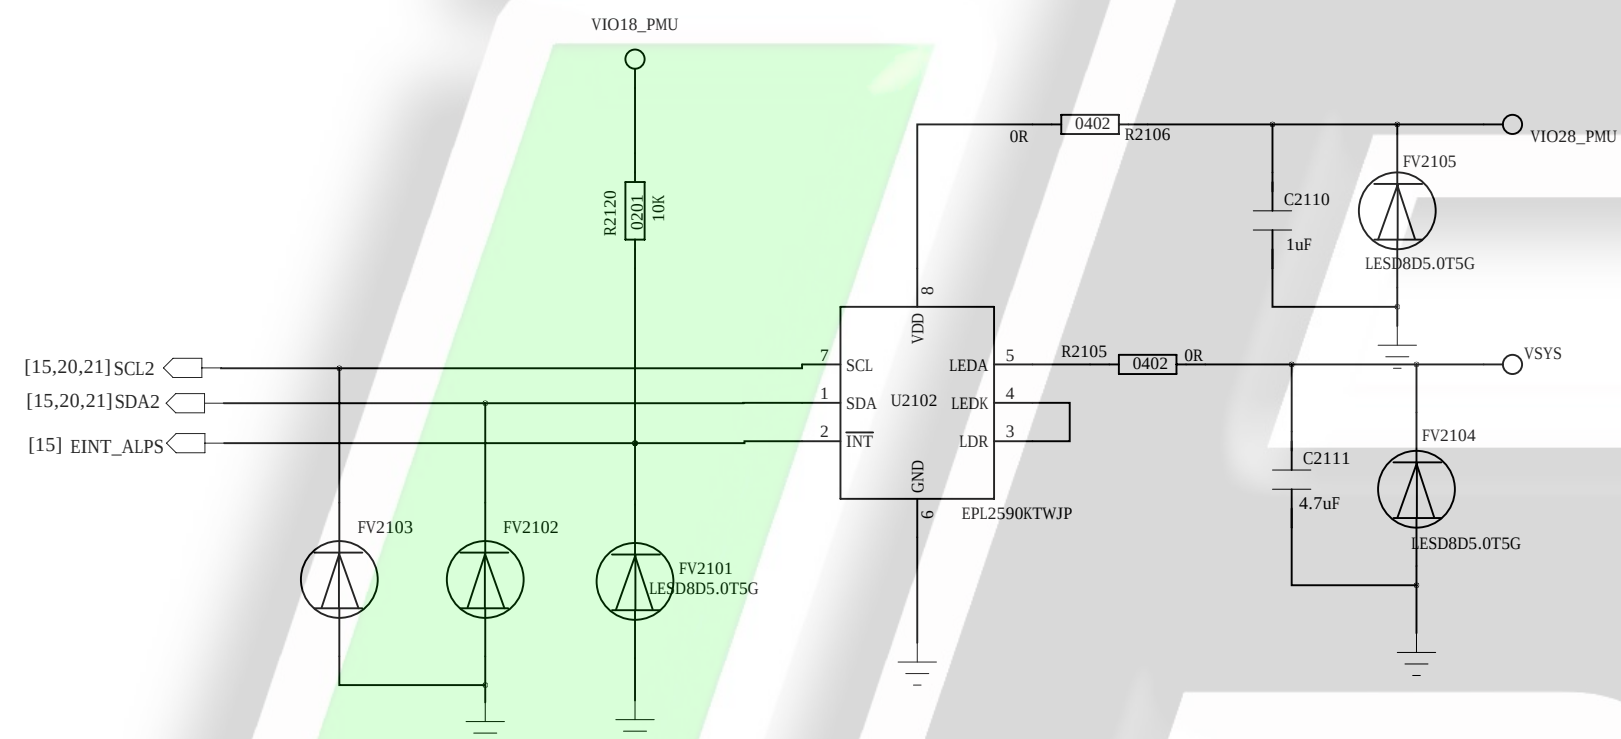

BORAD ID

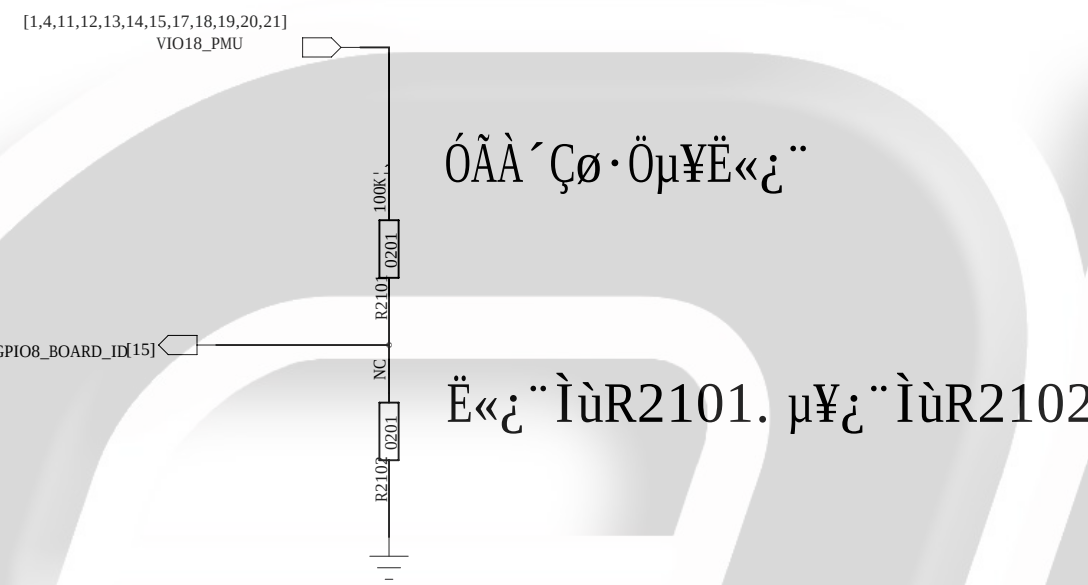

		COMPANY			
		Shanghai Longcheer			
		TITLE			
		Anno2			
DRAWN	DATE	CHECKED	SIZE	DRAWING NO.	REV
<Drawn By>	<Drawn Date>	<Checked By>	<Code>	A0	<Drawing Number>
QUALITY CONTROL	DATE				
<QC By>	<QC Date>				
RELEASED	DATE	SCALE		SHEET	
<Released By>	<Release Date>	<Scale>		a1 23	

