


	SPOT_SEL	ANTO_SW_SEL0	ANTO_SW_SEL1	ANTO_SW_SEL2	ANTO_SW_SEL3	PAO_R0	PAO_R1
LB_HPM	L	L	H	L	L	L	L
LB_MPM	L	L	H	L	L	L	H
LB_LPM	L	L	H	L	L	H	L
LB_ULPM	L	L	H	L	L	H	H
HB_HPM	L	H	L	L	L	L	L
HB_MPM	L	H	L	L	L	L	H
HB_LPM	L	H	L	L	L	H	L
HB_ULPM	L	H	L	L	L	H	H
TRX1	H	L	L	L	L	~	~
TRX2	H	L	H	L	L	~	~
TRX3	H	L	H	L	L	~	~
TRX4	H	L	H	L	L	~	~
RX1	H	H	H	H	L	~	~
RX2	H	H	H	H	H	~	~

Rev 0.4

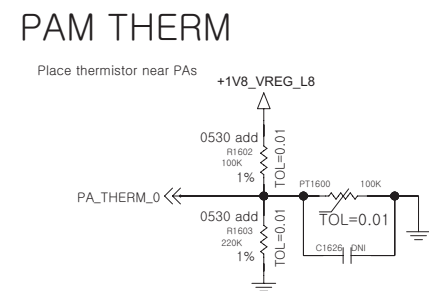


< 1-1-3-1_RFIC_WTR2605 >

Rev_0.6


CAUTION: YOU MUST CHECK & MODIFY RF PORT AND GPIO ON YOUR SCHEMATICS.

WCDMA							
WTR2605	B2, B4, B5	B1, B2, B5	B1, B2, B8	B1, B5, B8	B2, B5	B1, B5	B1, B8
TX1_OUT	GSM	GSM	GSM	GSM	GSM	GSM	GSM
TX2_OUT	B4	B1	B1	B5			
TX3_OUT	B2, B5	B2, B5	B2, B8	B1, B8	B2, B5	B1, B5	B1, B8
RX_LB1_IN	B5(G850)	B5(G850)	B8(G900)	B8(G900)	B5(G850)	B5(G850)	B8(G900)
RX_LB2_IN	G900	G900	G850	B5(G850)	G900	G900	G850
RX_MB1_IN	B4	B1	B1	B1			B1
RX_MB2_IN	B2	B2	B2		B2	B2	
RX_MB3_IN	G1800,G1900	G1800,G1900	G1800,G1900	G1800,G1900	G1800,G1900	G1800,G1900	G1800,G1900


CDMA			
WTR2605	VZW	SPCS	Metro PCS
TX1_OUT			
TX2_OUT	BC0(BC10)	BC0(BC10)	BC0(BC10),BC15
TX3_OUT	BC1	BC1	BC1
RX_LB1_IN	BC0(BC10)	BC0(BC10)	BC0(BC10)
RX_LB2_IN			
RX_MB1_IN			BC15
RX_MB2_IN	BC1	BC1	BC1
RX_MB3_IN			

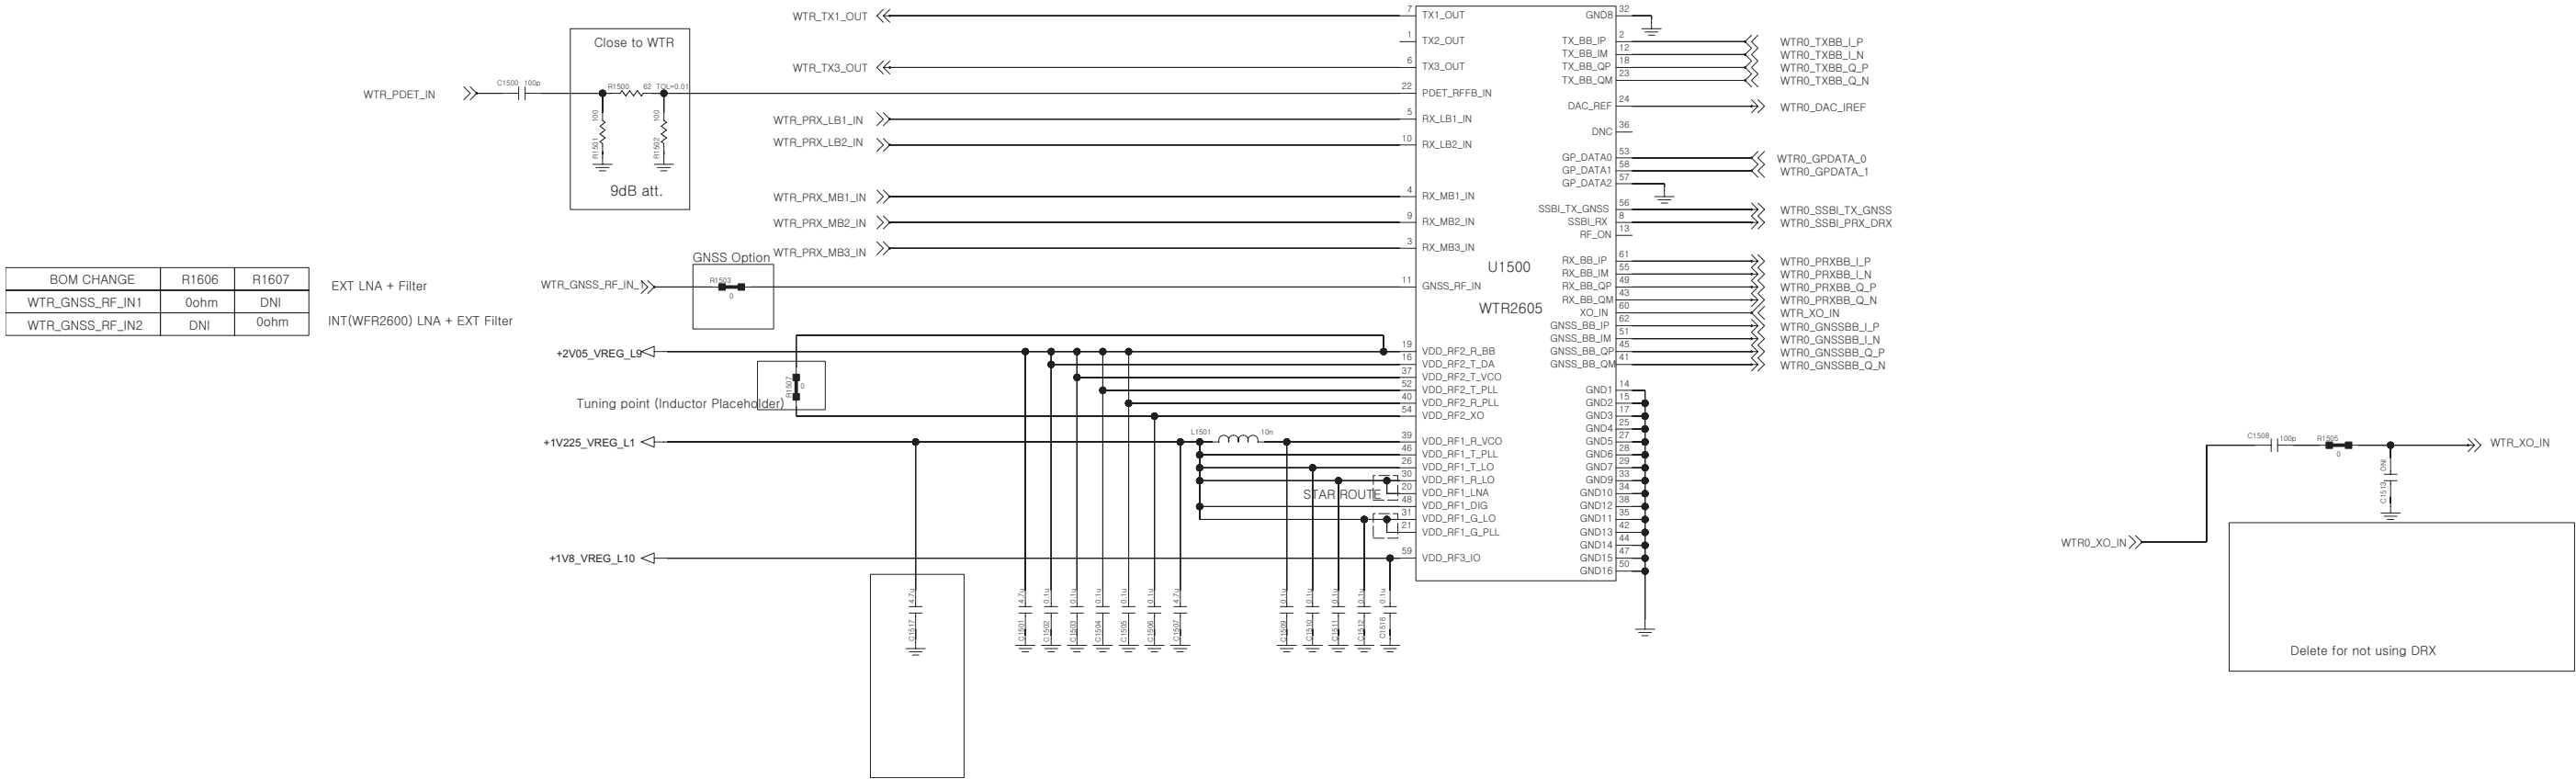


<2-1-6-1-1_MSM8212-0-28_CONTROL>REV.0.3

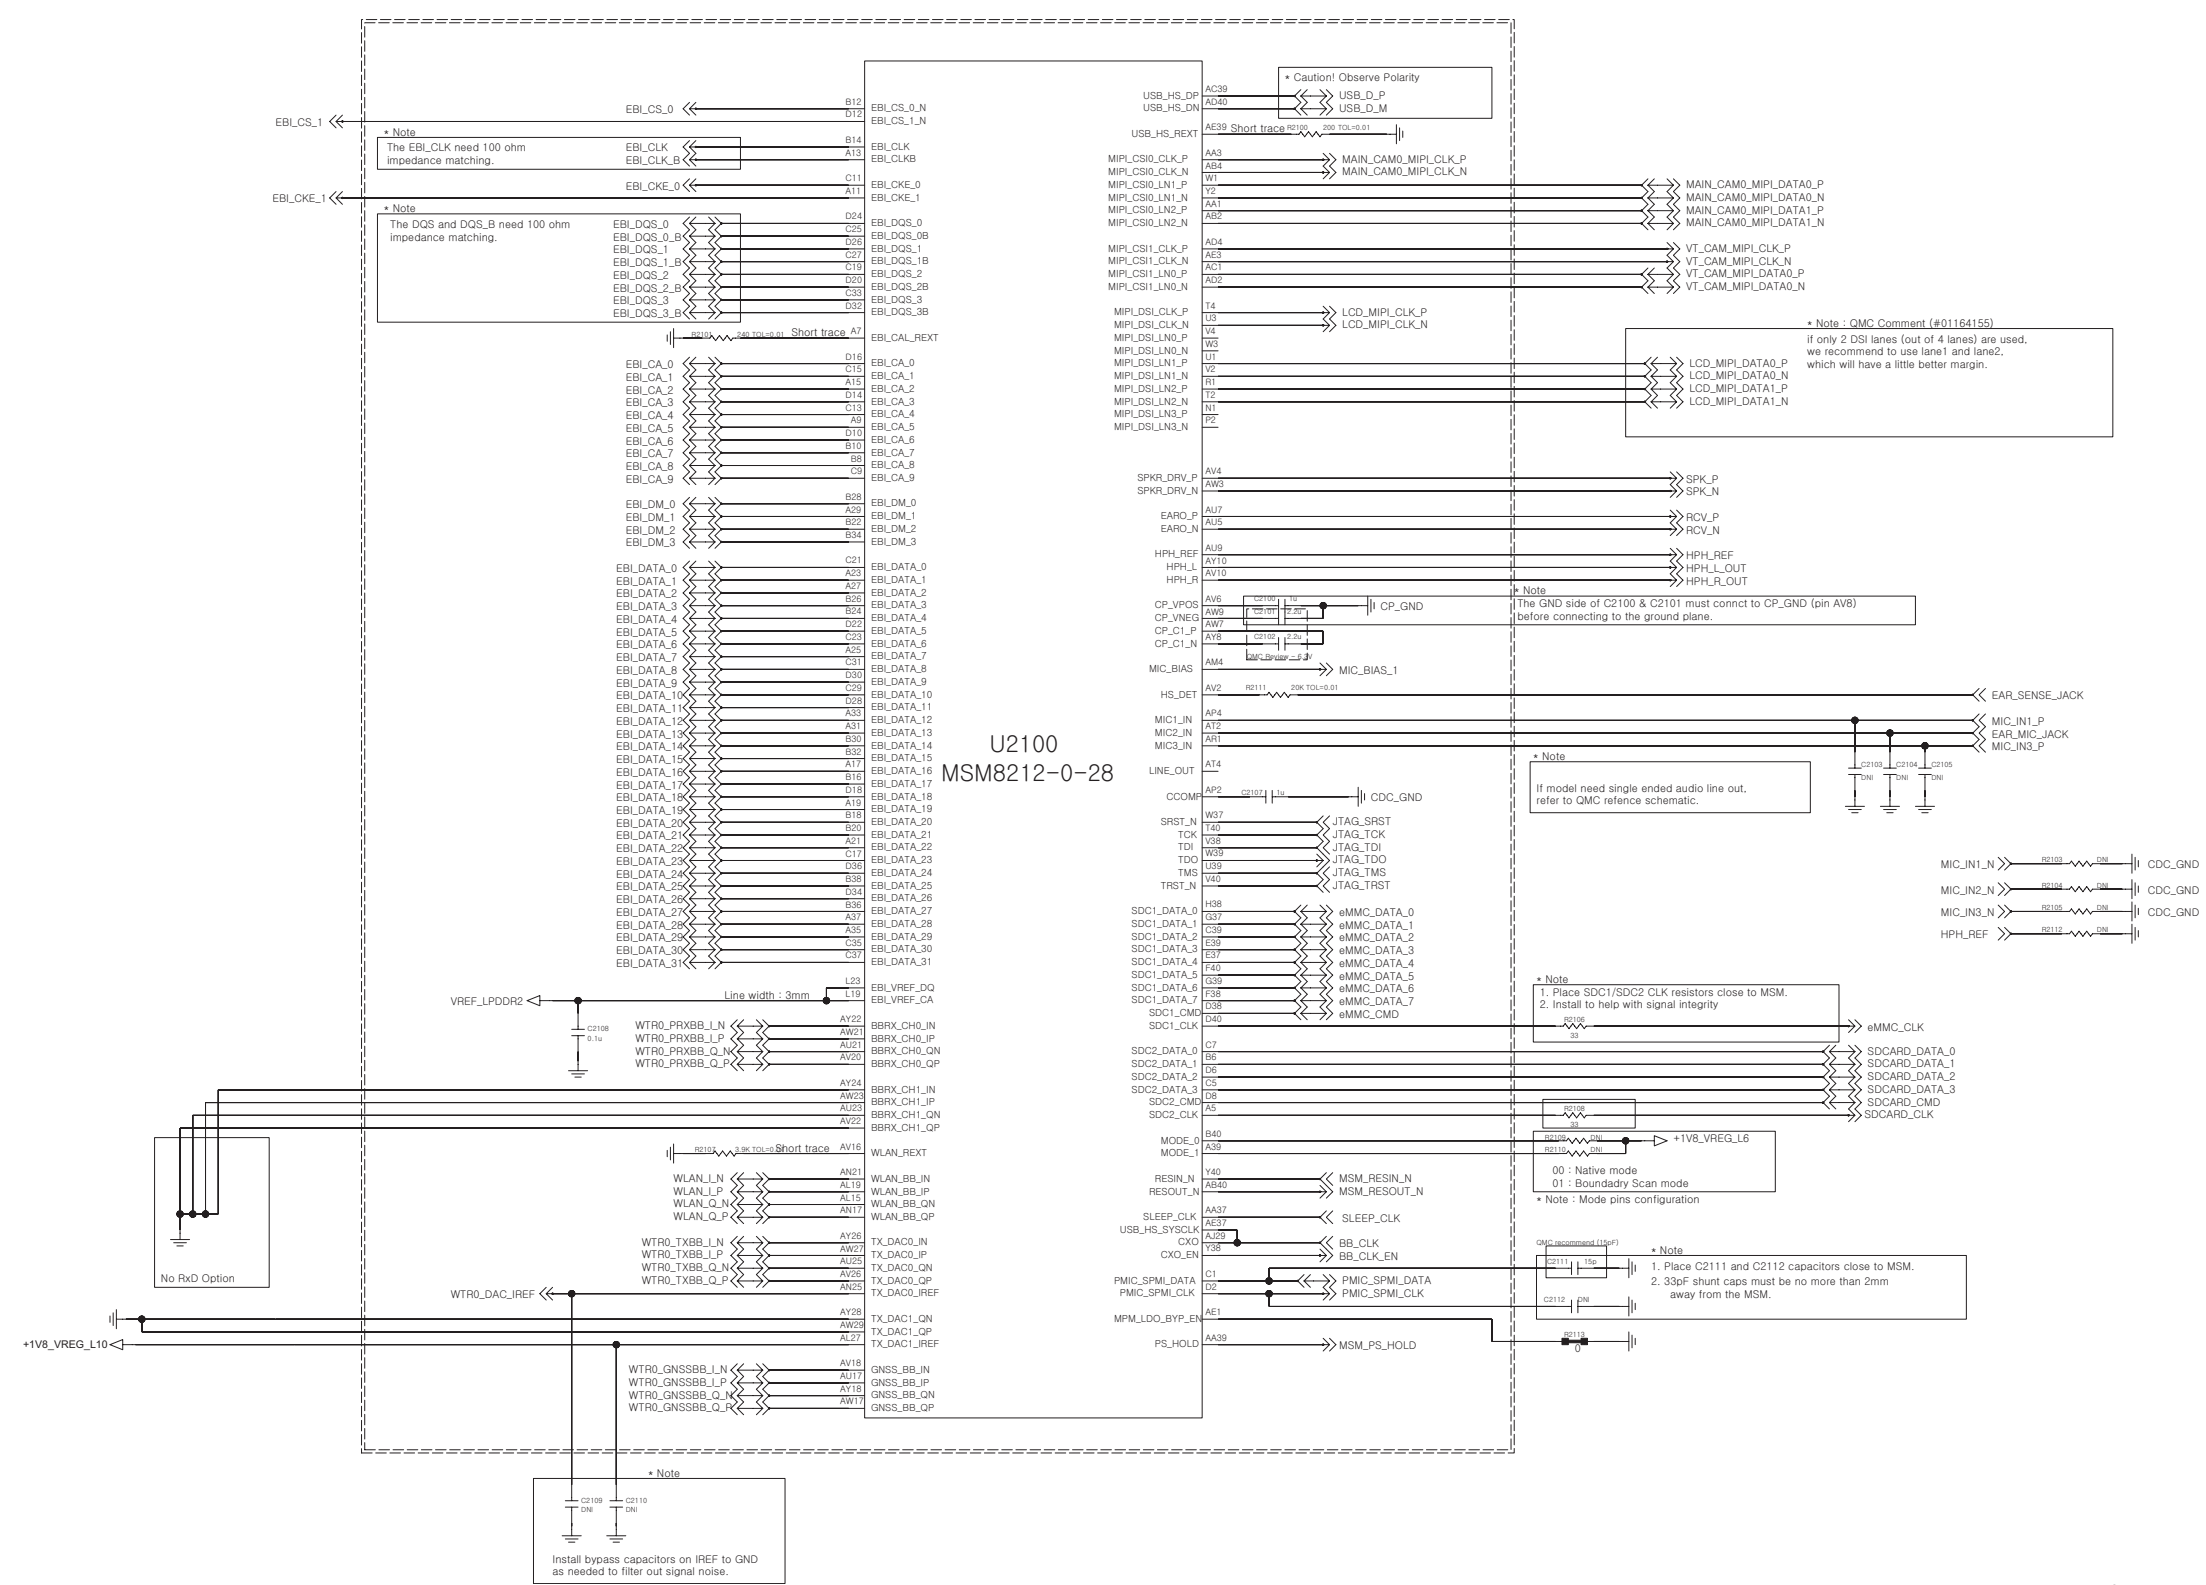


<2-1-6-1-2_MSM8212-0-28_GPIO> REV.0.3

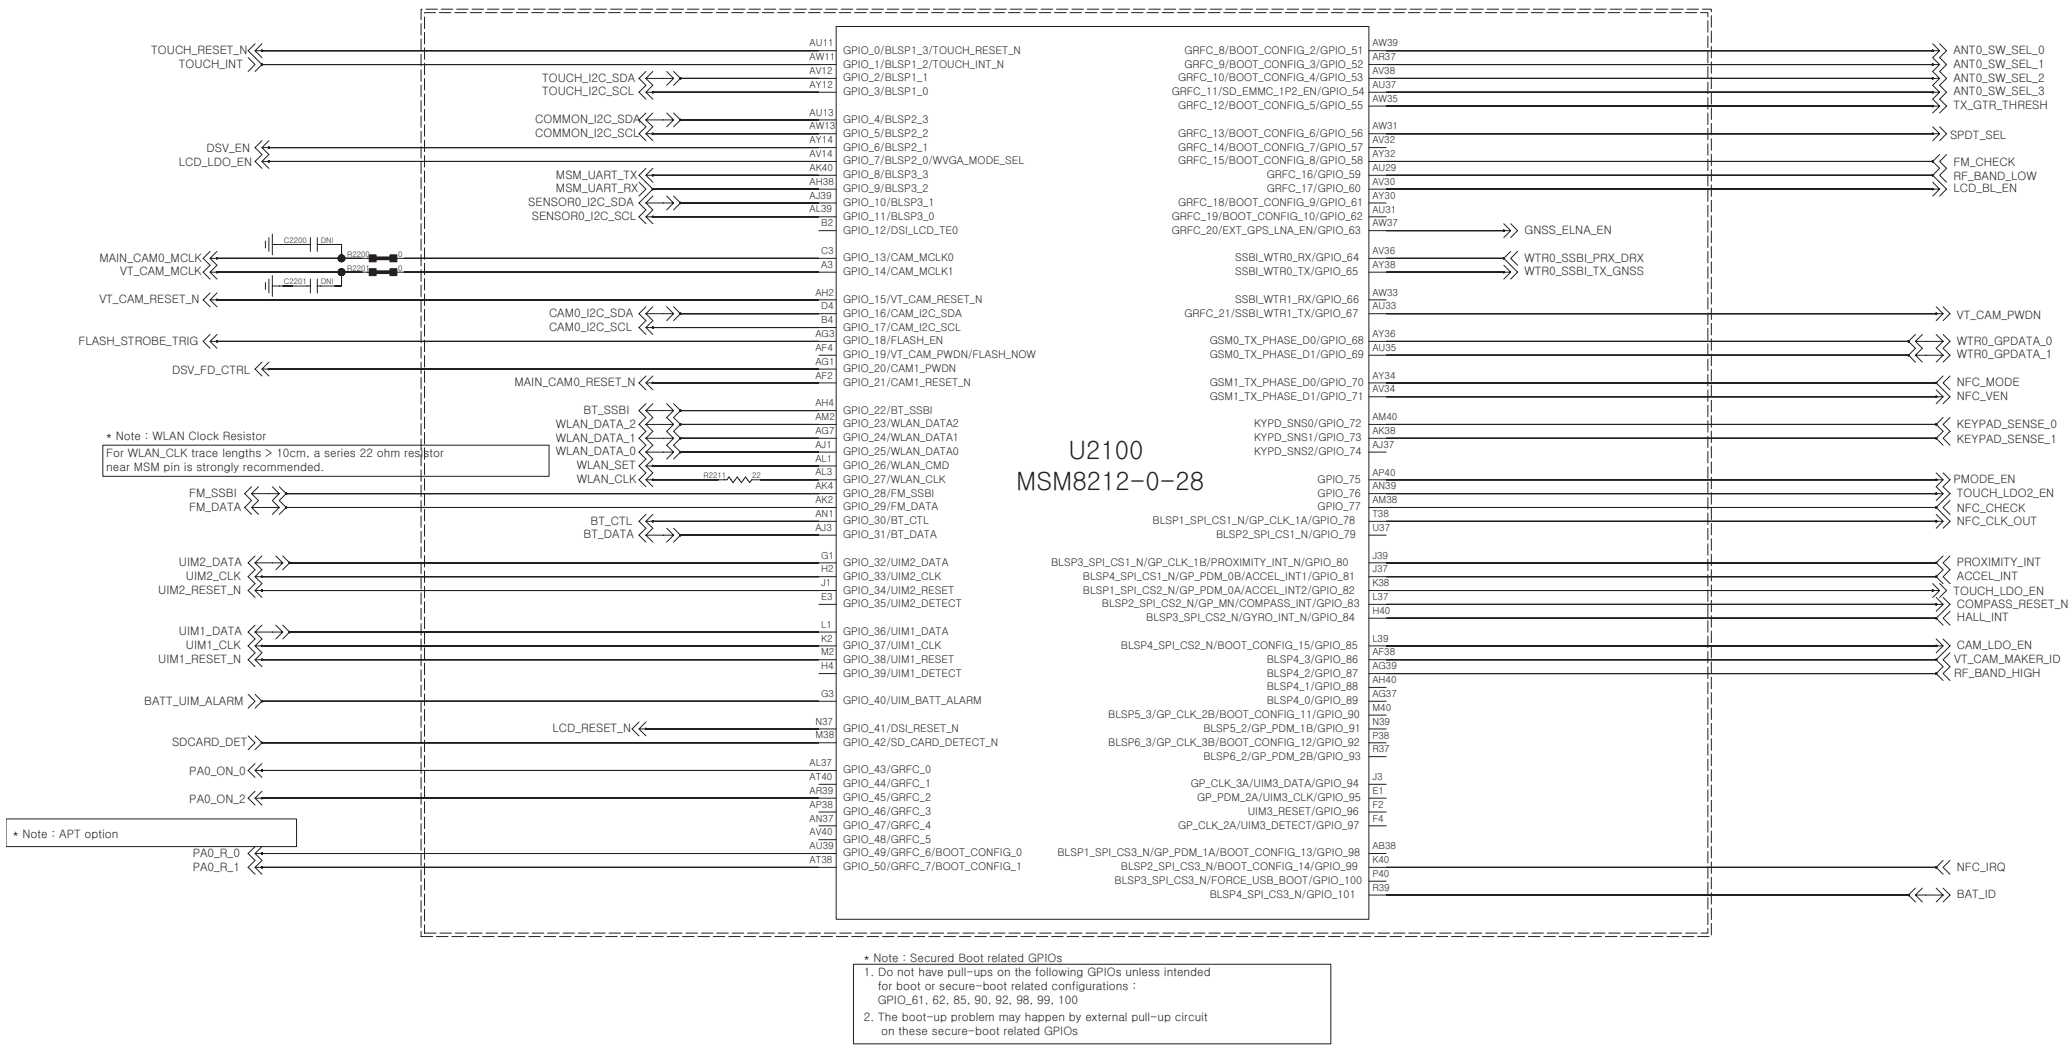

I2C Pull-up

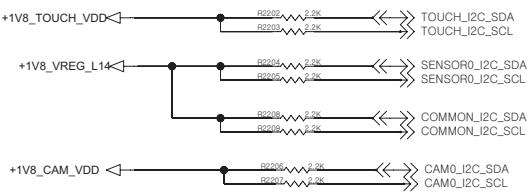



RF BAND Check

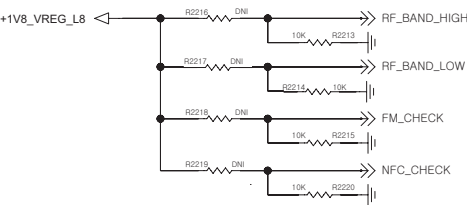

	LOW	HIGH	FM	NFC
GPIO	59	87	58	77
EU_1_8	L	L	L	L
F_1_5	H	L	L	L
G_2_5	H	H	L	L
J_2_8	L	H	L	L
FM	L	L	H	L
NFC	L	L	L	H

<2-1-6-1-4_MSM8212-0-28_GND/NC>
REV.0.3

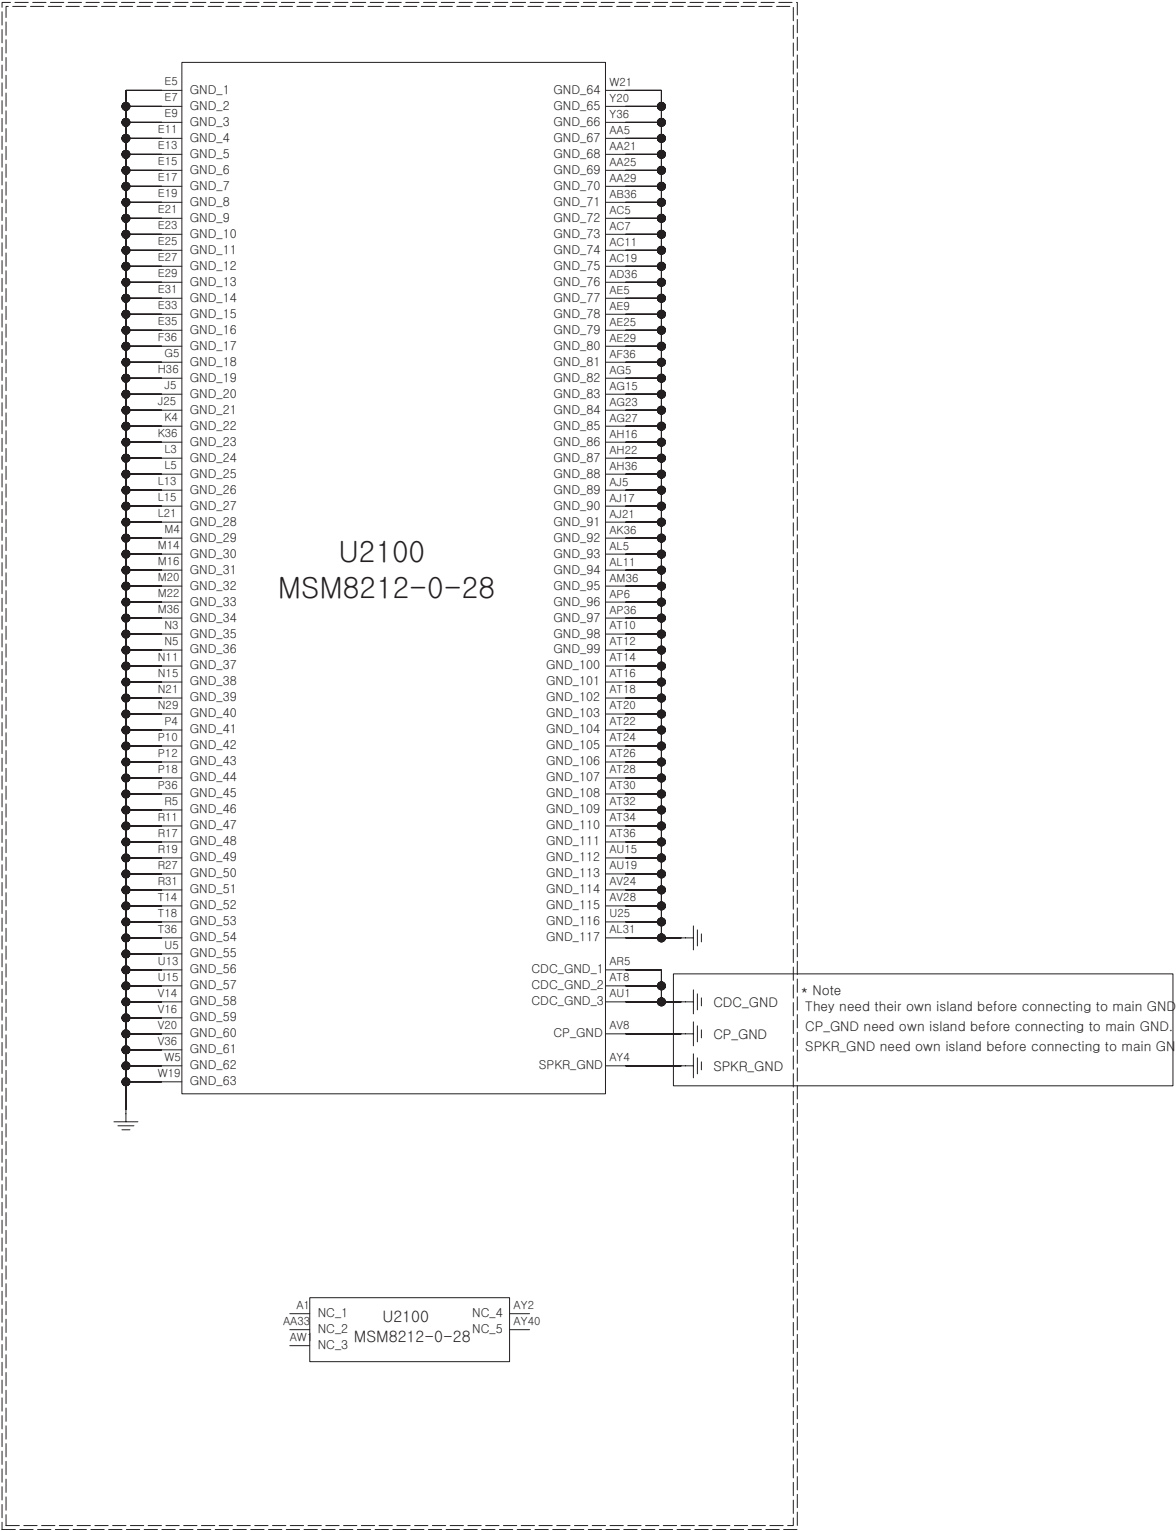


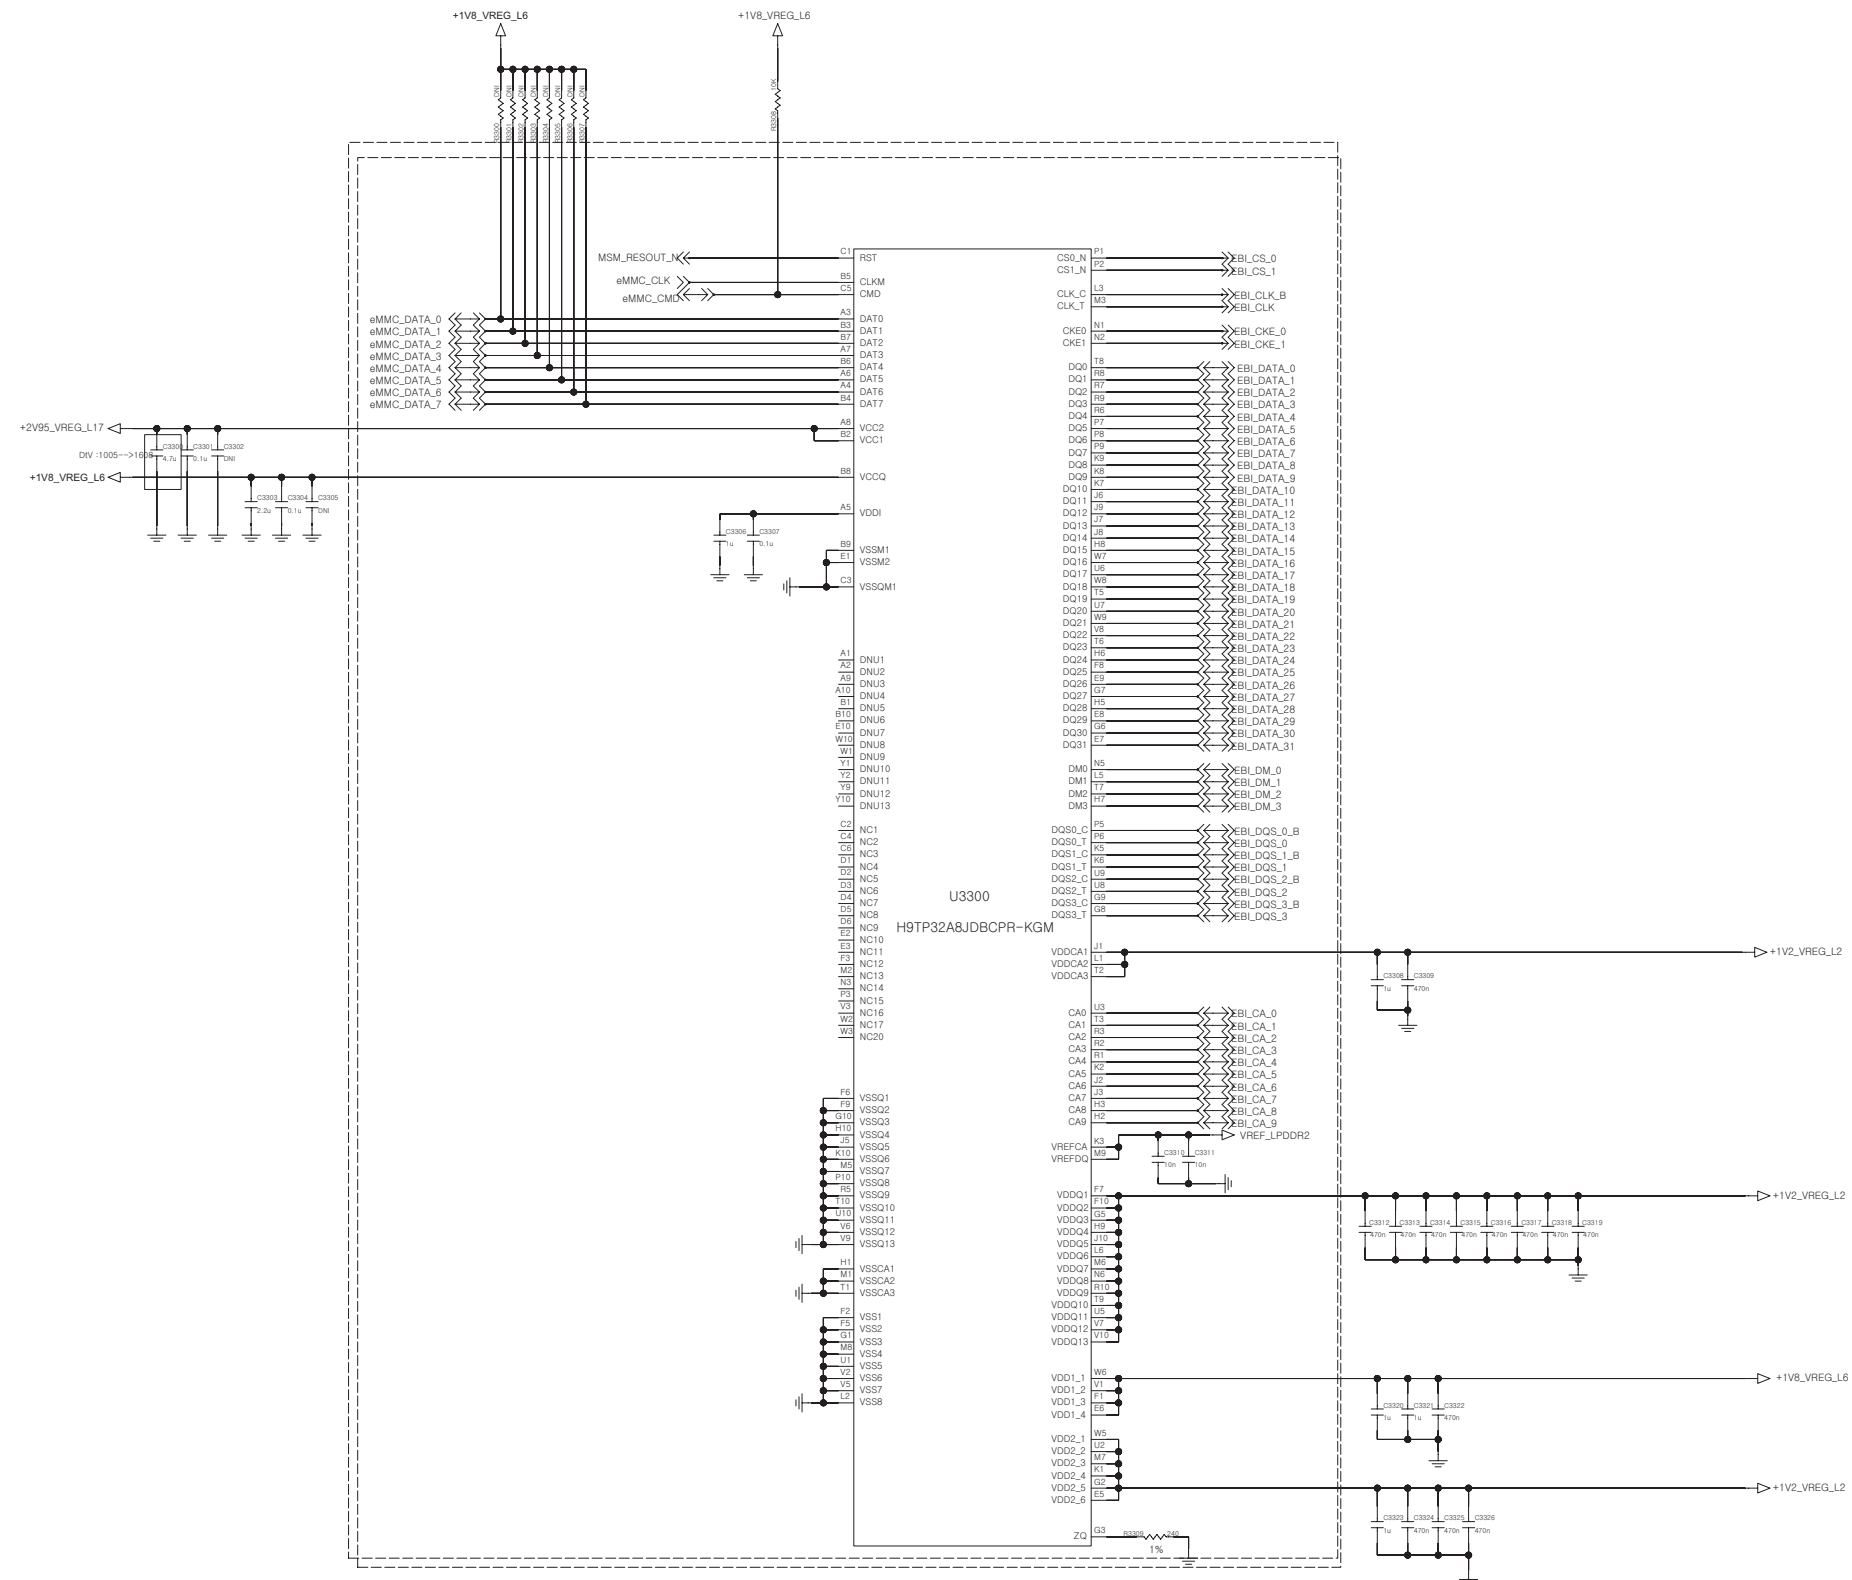


<4-1-4-1_PMIC_PM8110_DATA>

CCDS CARD Information	
Release Date	2013. 12. 2
Based on Reference Schematic	Rev.C
80-ND717-41 MSM8X10 + PM8110 REFERENCE SCHEMATIC	


REV.1.0

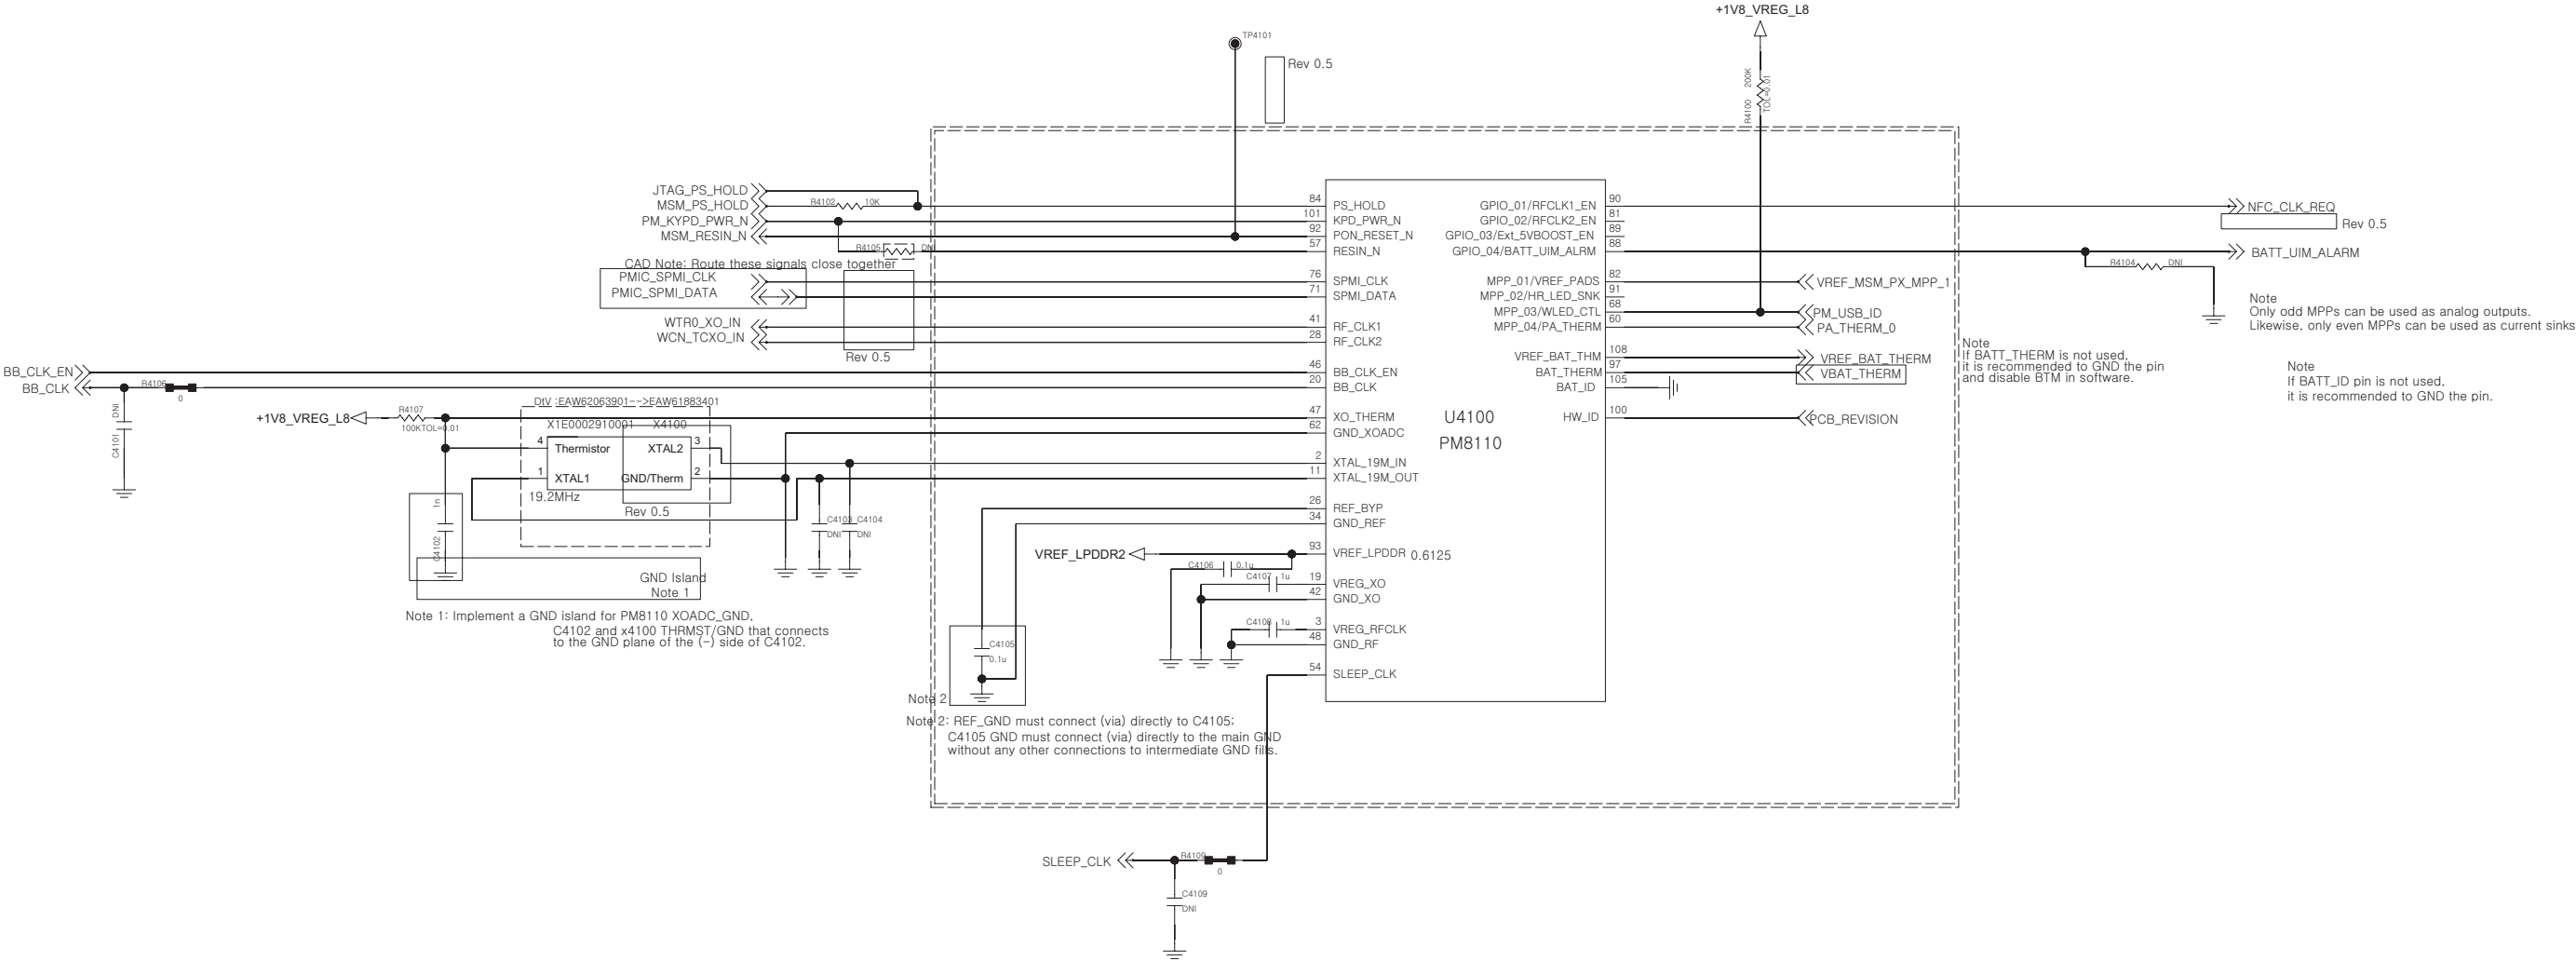

PCB REVISION

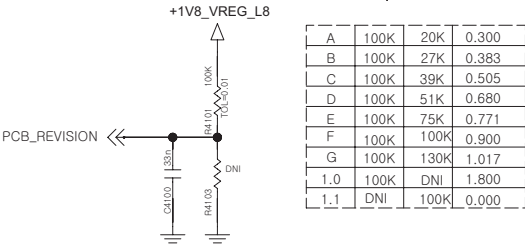


<4-3-3_OVP_RT9718L>
REV.0.3

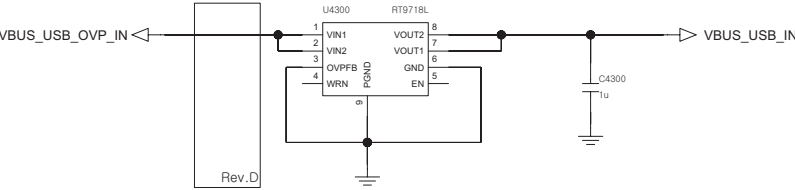


<4-1-4-2_PMIC_PM8110_POWER>

CCDS CARD Information	
Release Date	2013. 12. 2
Based on Reference Schematic	Rev.C
80-ND717-41 MSM8X10 + PM8110 REFERENCE SCHEMATIC	


REV.1.0

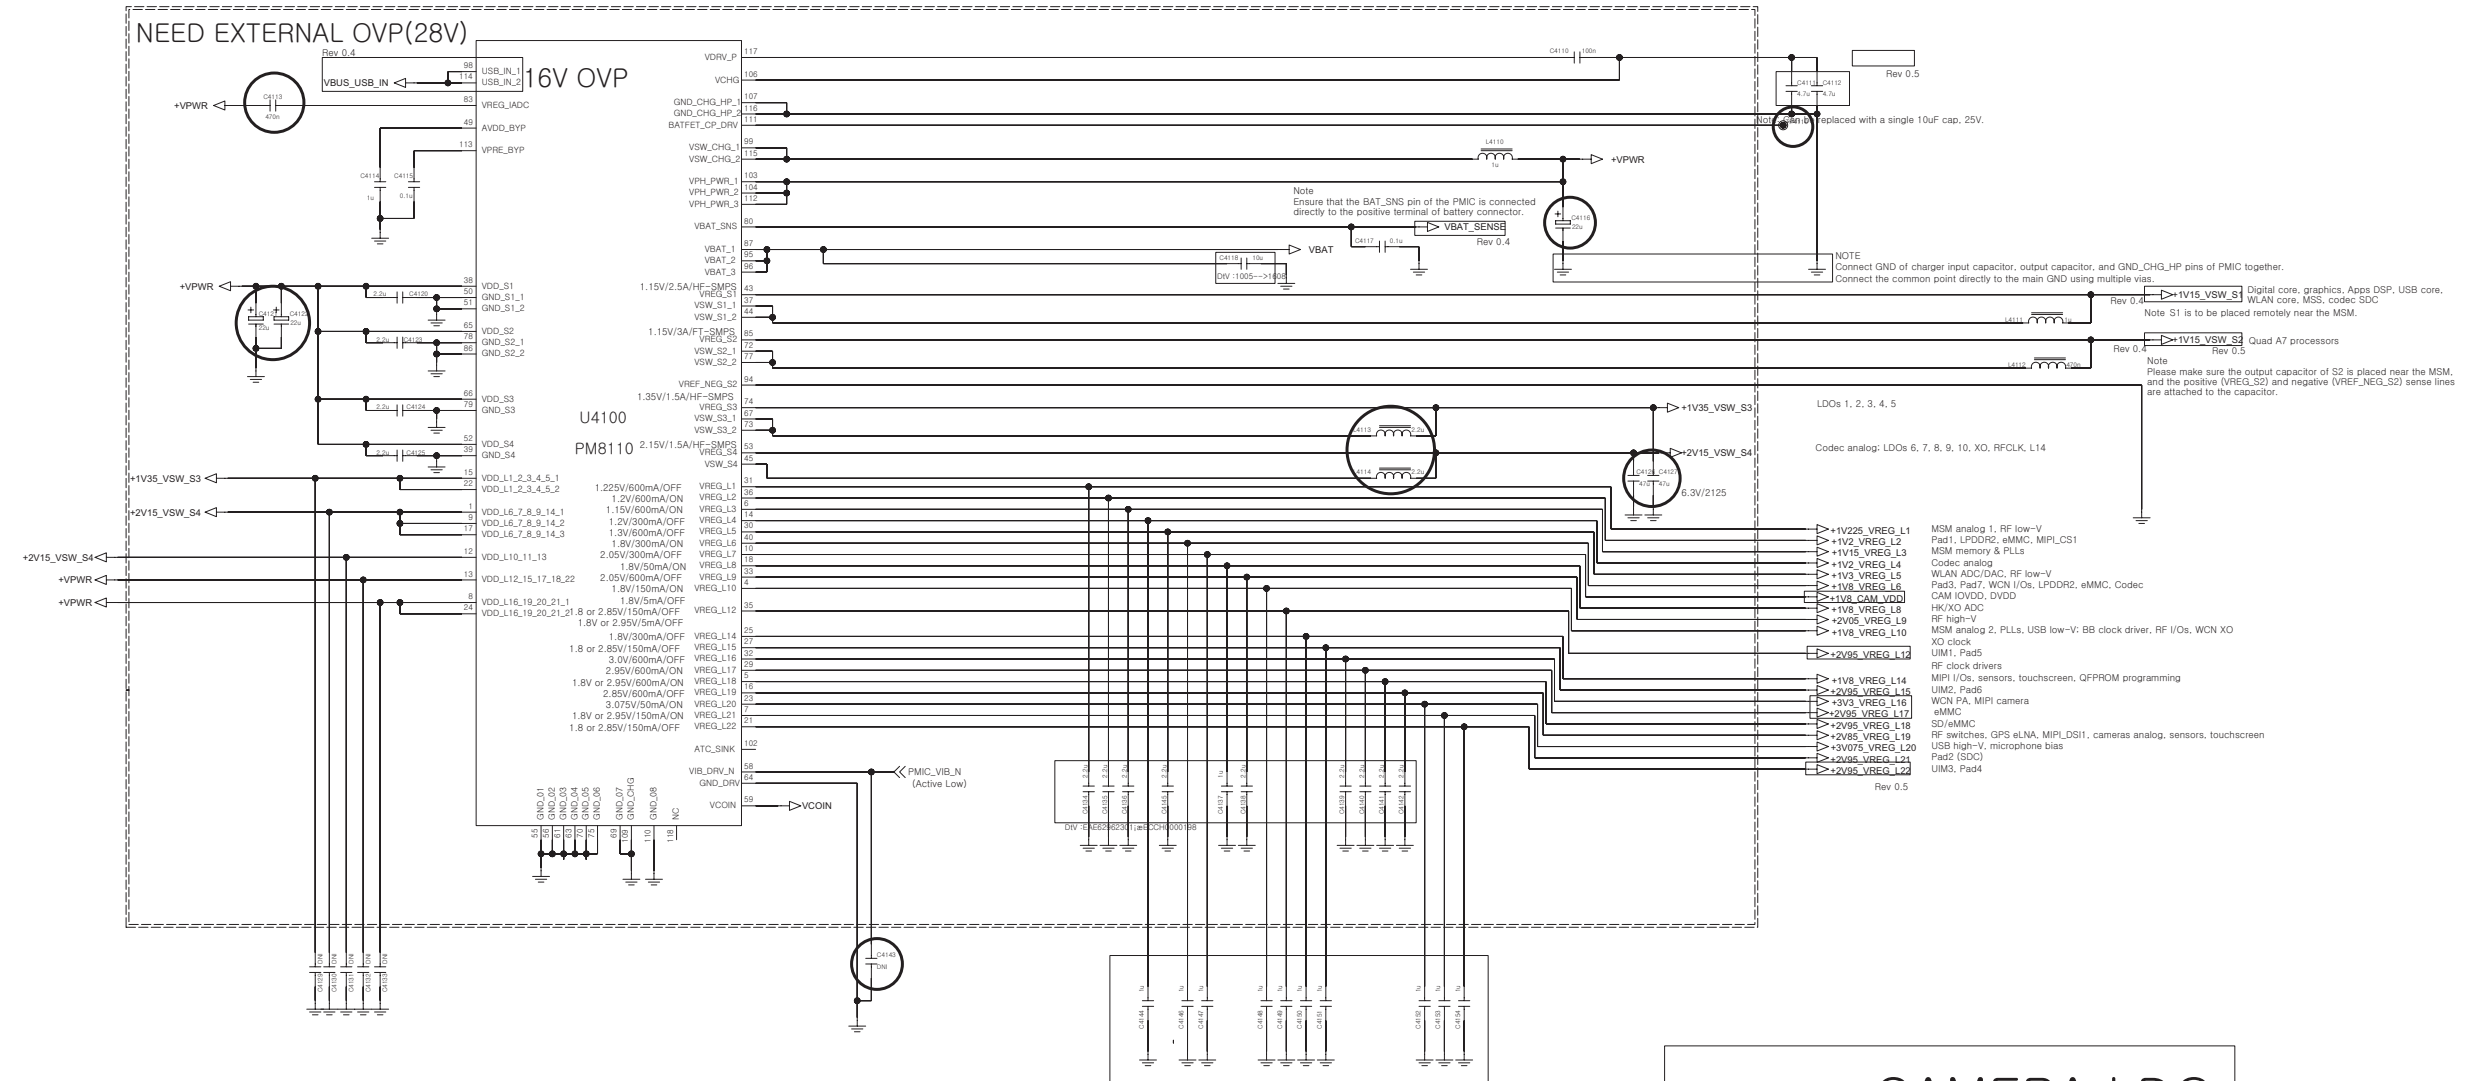


BACKUP BATT




LCD LDC

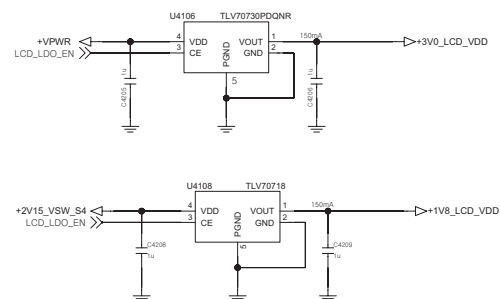


Test Option

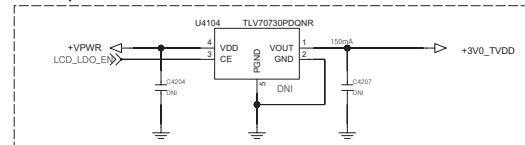

TOUCH LDC

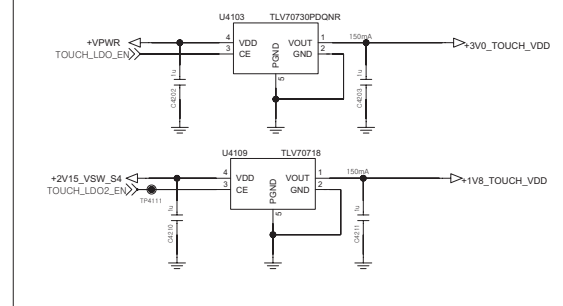


CAMERA LDC

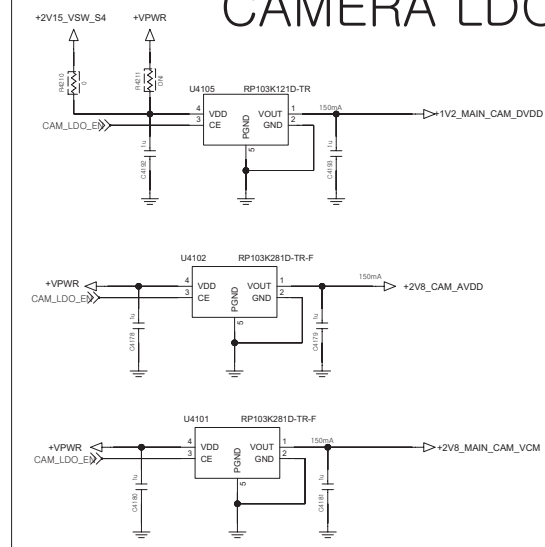


<5-1-1-4> BT_WiFi_Combo_WCN3620

REV 1.0


RF Filter

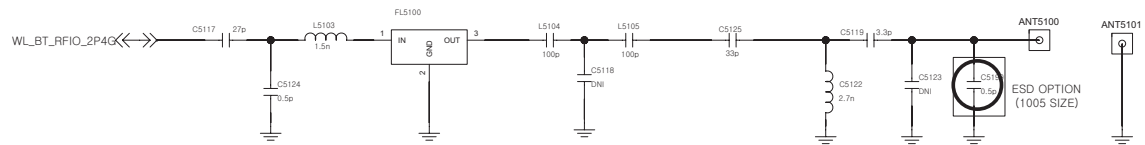


POWER/GND

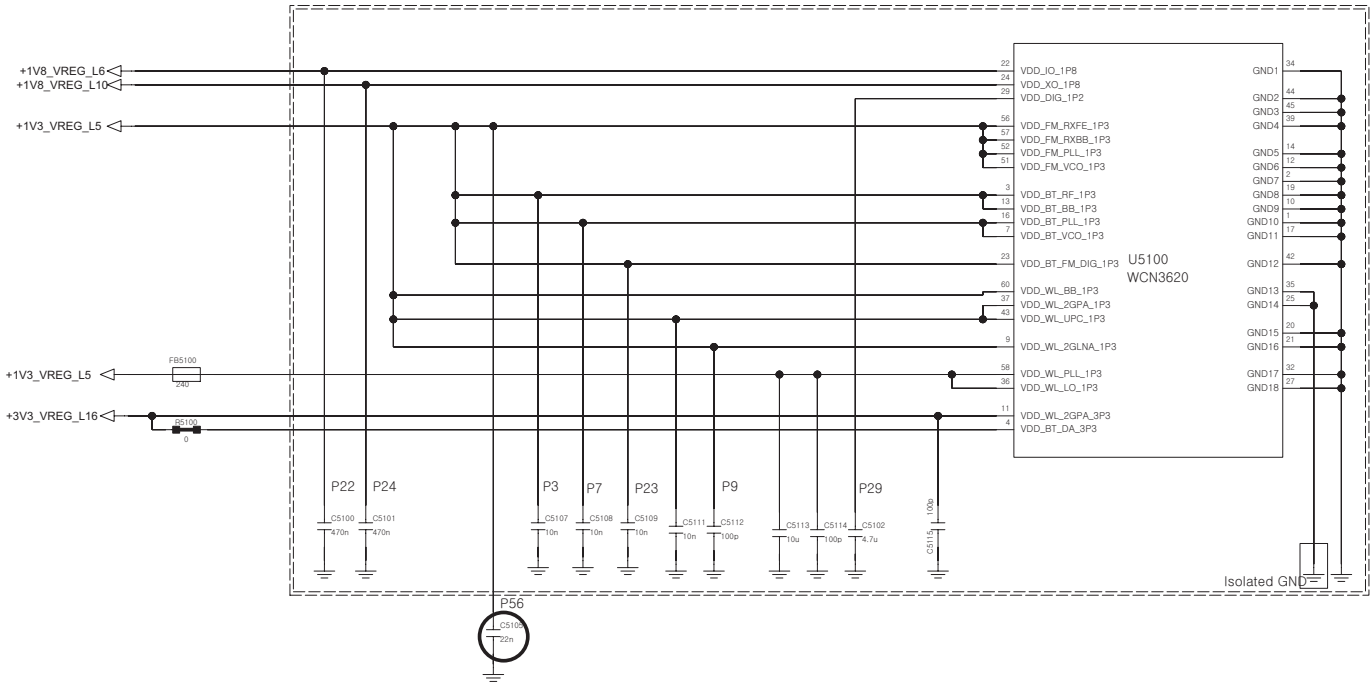


RF/CONTROL

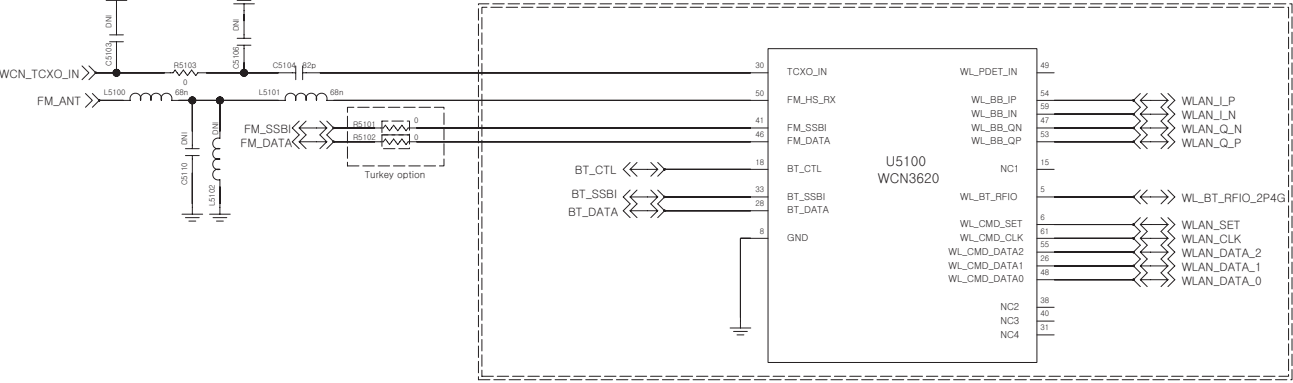


<5-2-1-4_NFC_PN547> Rev_1.1

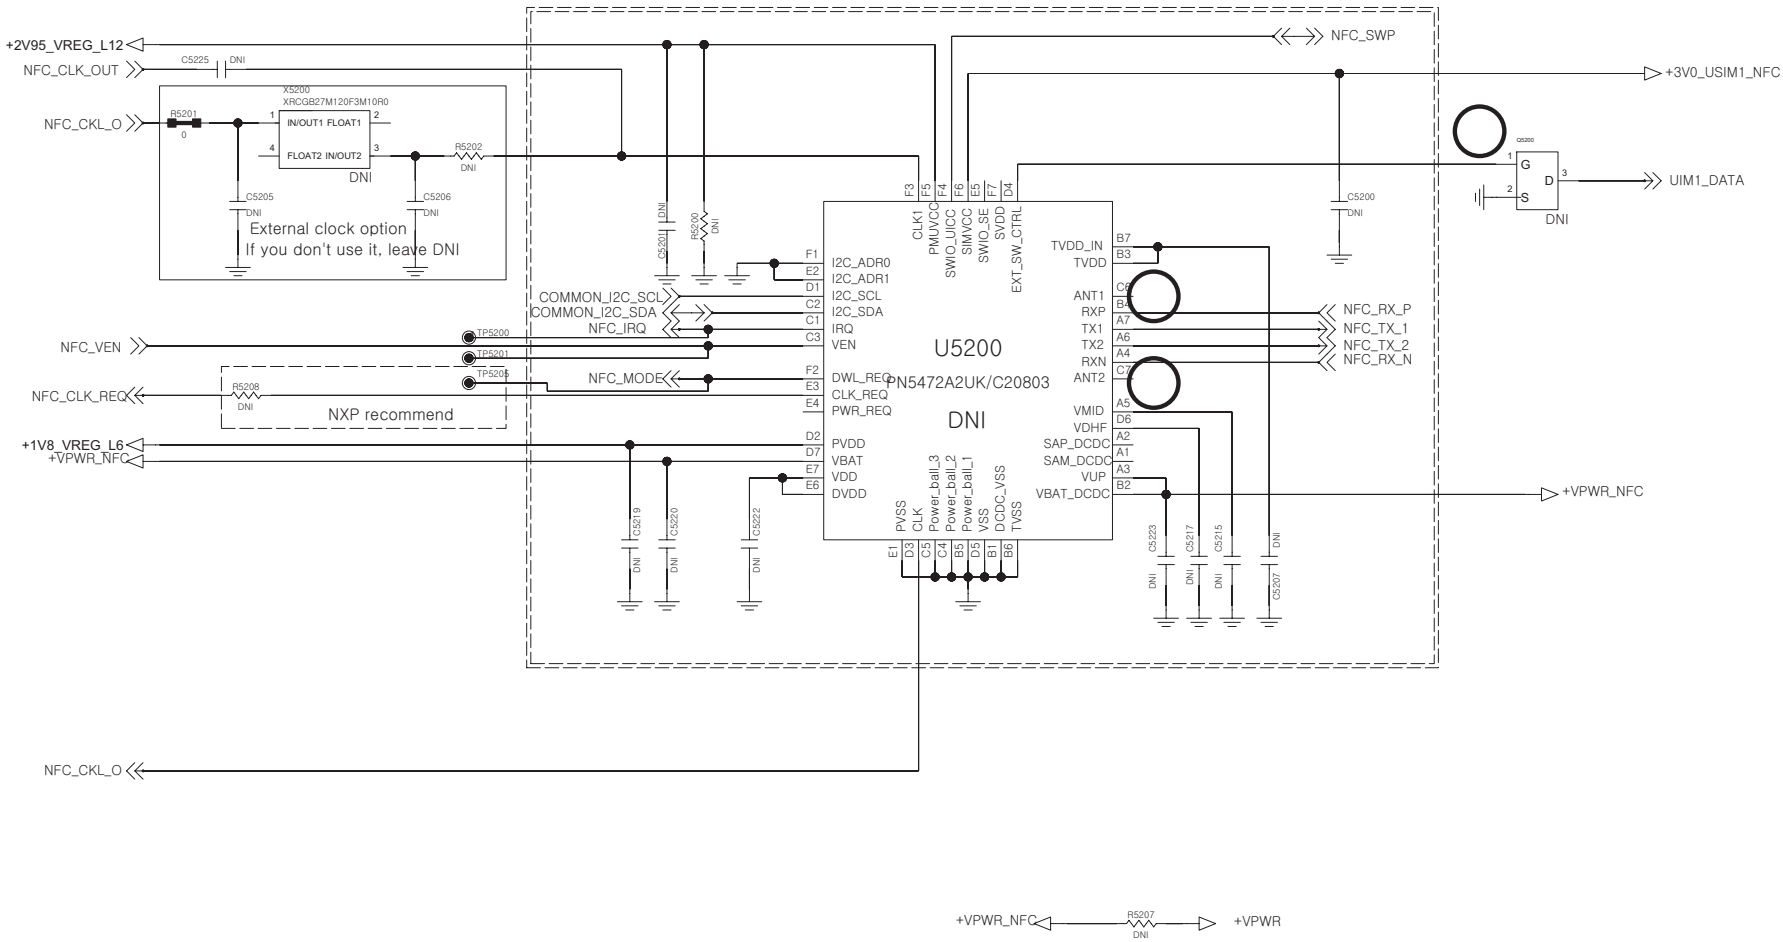


NFC Antenna

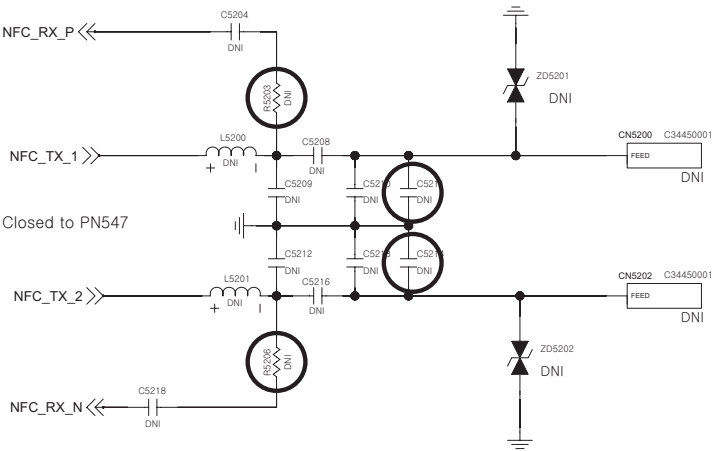


< 6-8-1_Receiver_Only > Rev_0.3

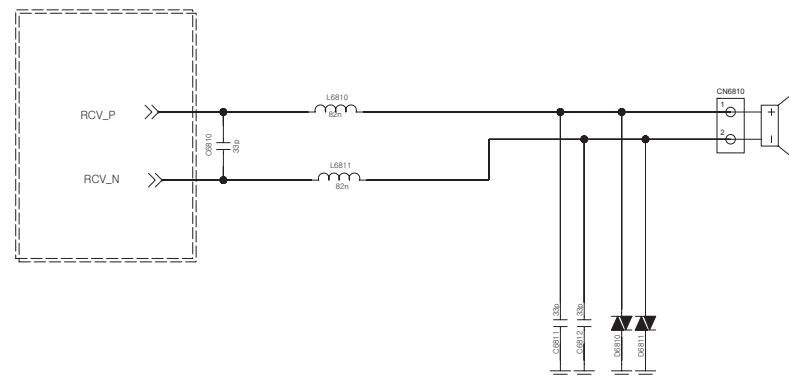


< 6-7-1_Speaker > Rev_0.4

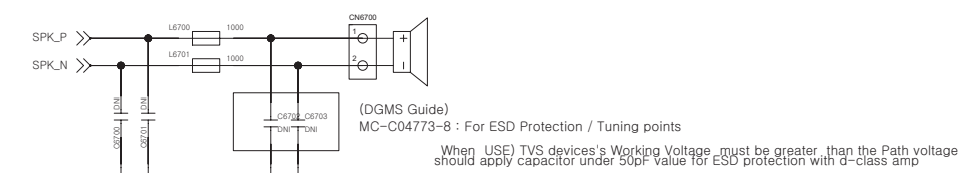


< 6-9-2_2MIC > Rev_0.4

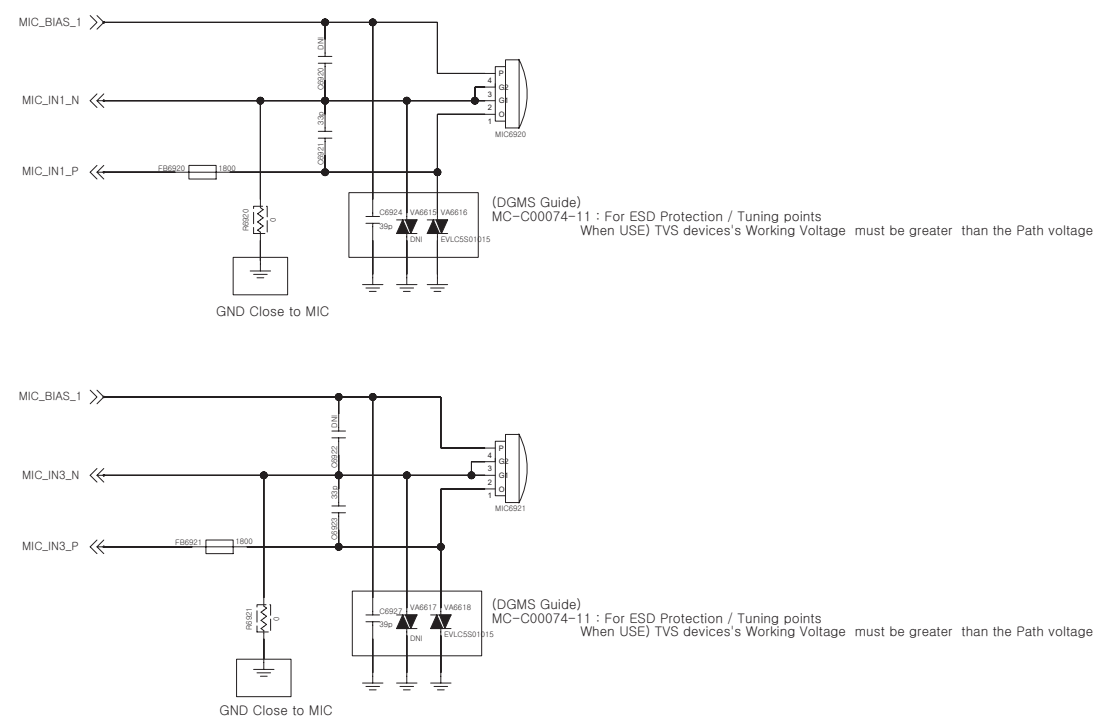


< 6-6-1_Earjack >

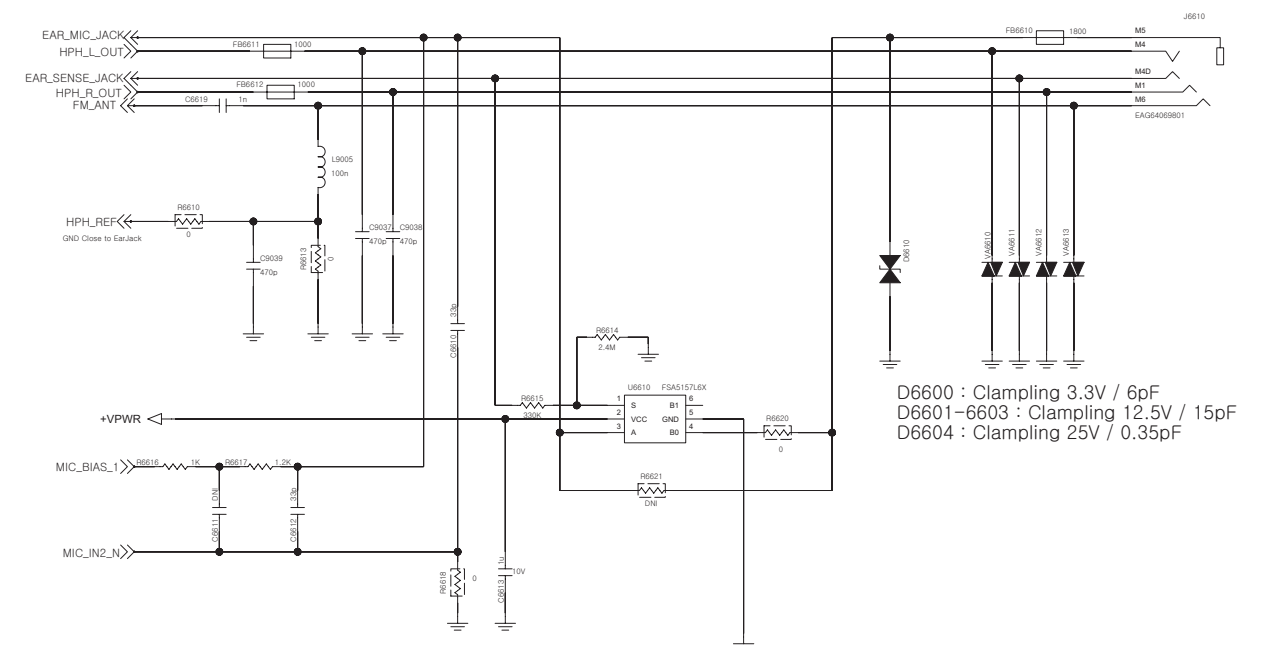

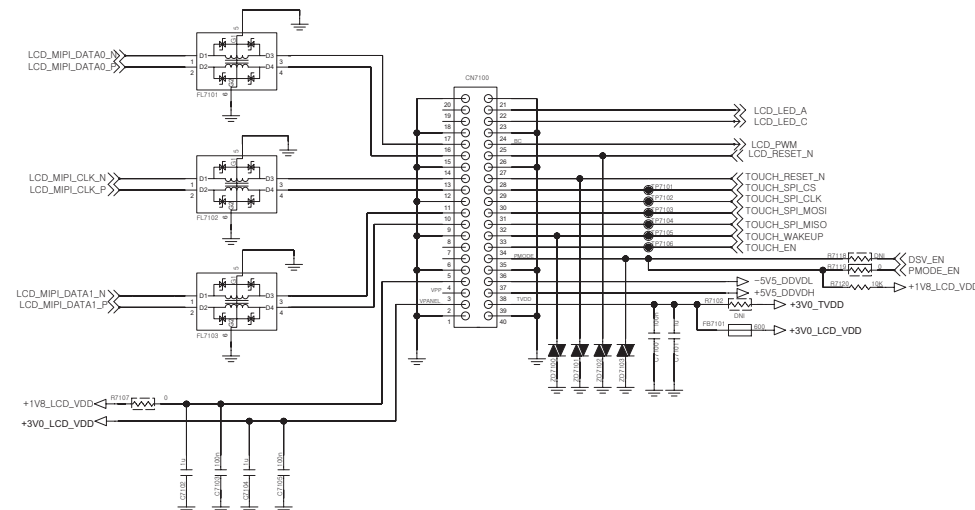
[illegible]

EN	FD	Action
LOW	LOW	Device OFF (Fast discharge active(on) after IC disabled)
LOW	High	Device OFF (The status of dual outputs is floated)
High	LOW/High	Device ON (Don't care about FD Status)

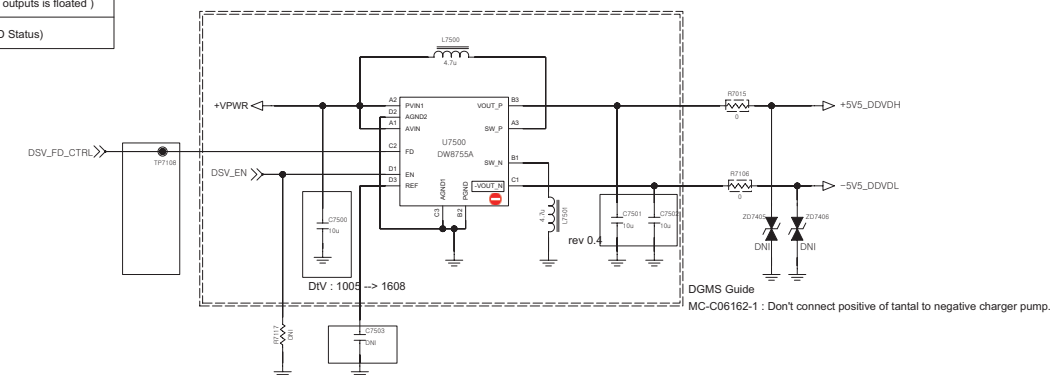


Check the pin map


Check the pin map

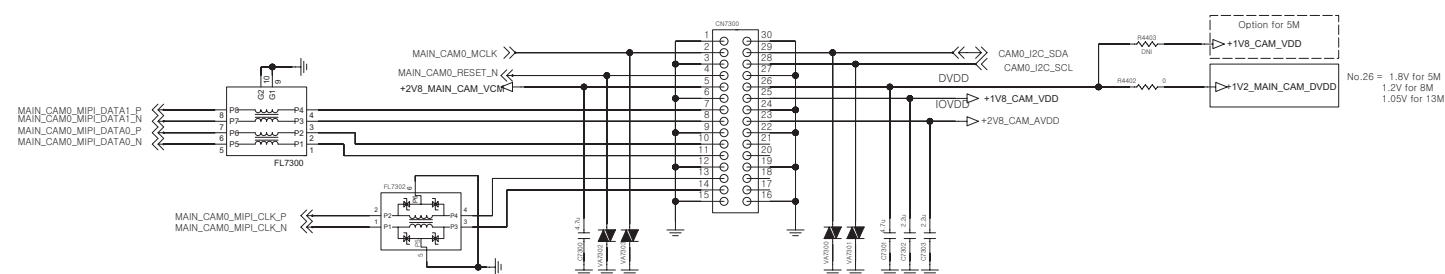


10/10/2016

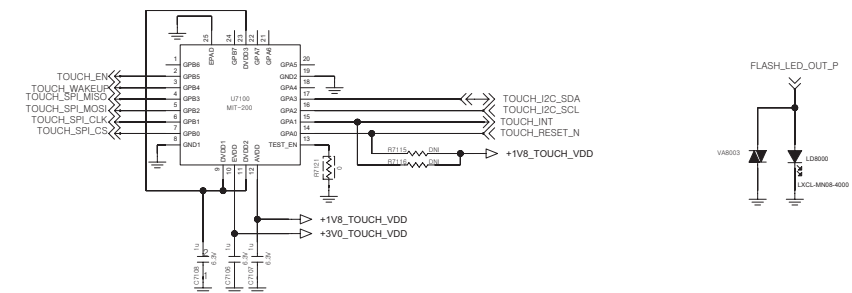




REV 1.0

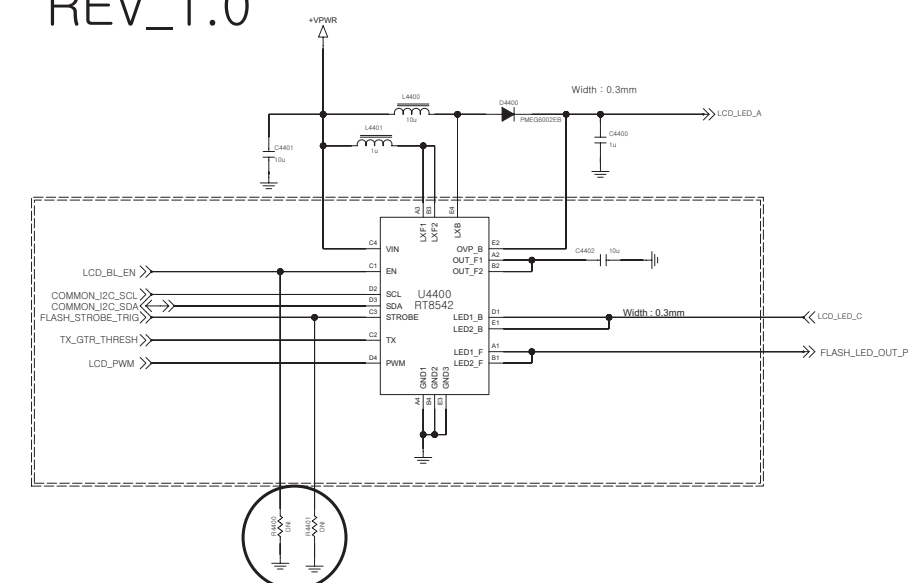


[DGMS Guide] Rev. 0.3

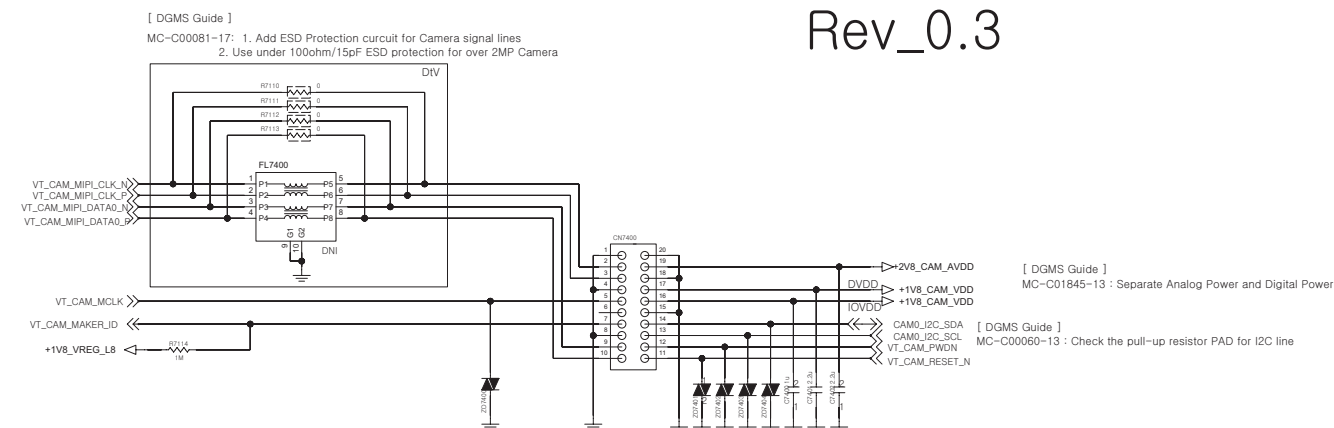


<8-2-1-3_Compass_AK09911> <8-1-1-3_Accelerometer_K2DH> <8-4-1-2_Proximity_APDS-9190>
Rev_0.3 Rev_1.0

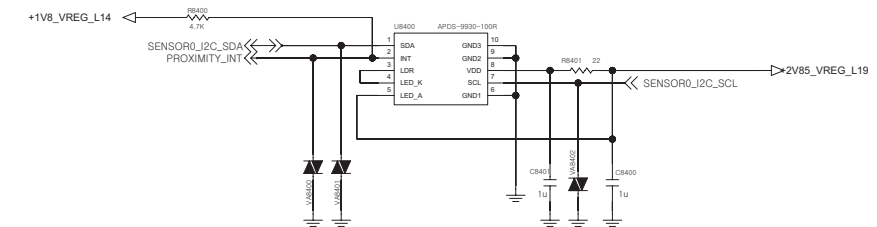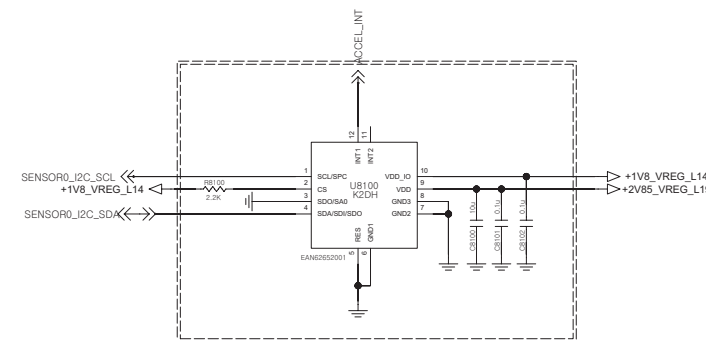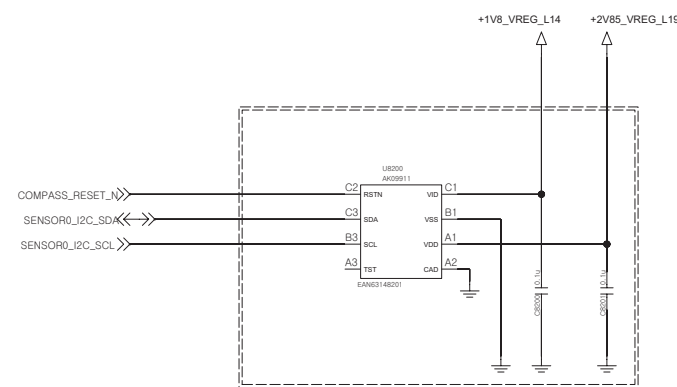


<8-7-1-6_Hall_IC_BU52033NVX>
Rev_1.0

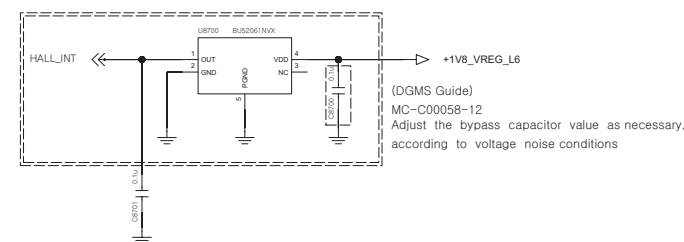


<9-9-1-1_Motor>
Rev_0.3

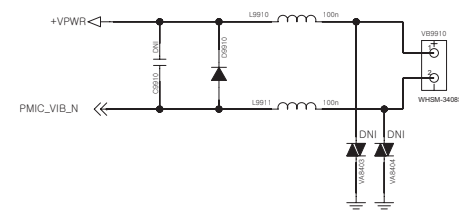


< 9-3-1_JTAG >
Rev_0.4

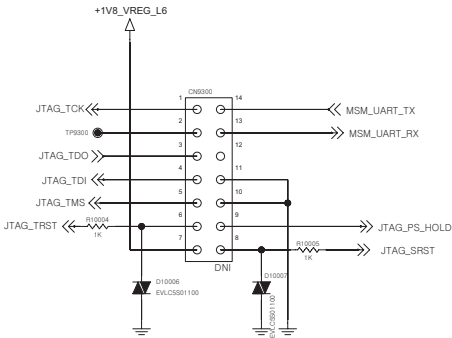

Back Volume Key

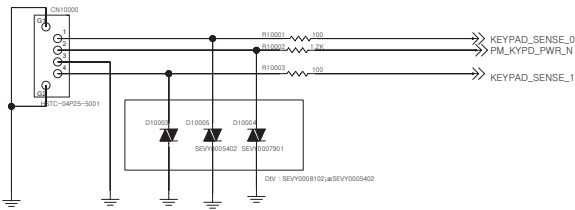


<9-5-2-2_Micro_SIM_8P_1_5T>
Modify to USIM Socket Rev_0.3

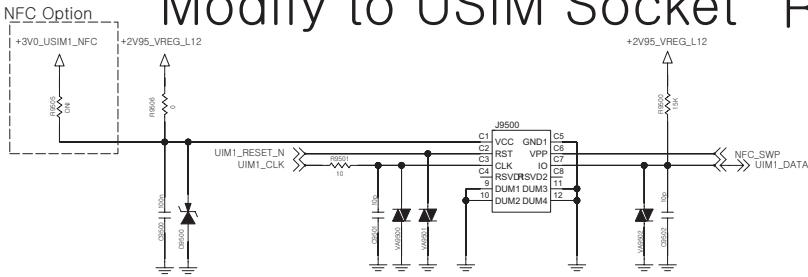

(DGMS Guide)
MC-C045B1-13 : All of items must be satisfied.
1. SIM_DATA : It is required pull-up resistor
(But, if built-in chip, chipset recommend attached)
2. when applying each line cap. or Varistor
- Less than 33pF
- Do not use ESD suppressor type
3. when drawing Artwork, SIM_DATA and SIM_CLK line should be separated, and routing.
4. Cap. or Varistor will be placed close to the socket.

< 9-6-1_Socket_Micro_SD >
Modify to SD Socket

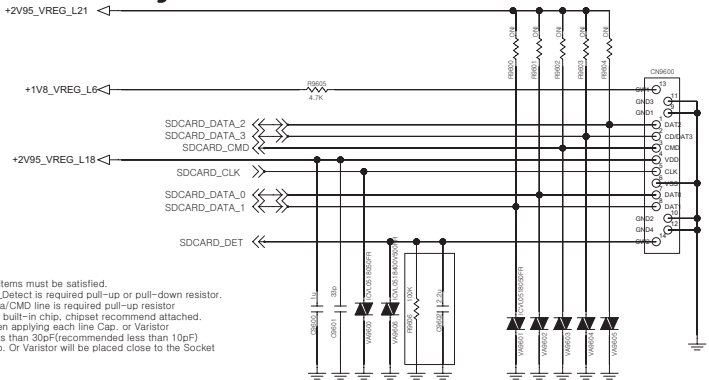


(DGMS Guide)
MC-C045B2-13All of items must be satisfied.
1. SD_Detect is required pull-up or pull-down resistor.
2. Data/CMD line is required pull-up resistor
(But if built-in chip, chipset recommend attached.
3. when applying each line Cap. or Varistor
- Less than 30pF(recommended less than 10pF)
4. Cap. Or Varistor will be placed close to the Socket


Rev_0.5

Card Detect	SW1	SW2	SD_CARD_DET
Card Installed			1.8V
Card Not Installed			GND

<9-5-2-2_Micro_SIM_8P_1_5T>
Modify to USIM Socket

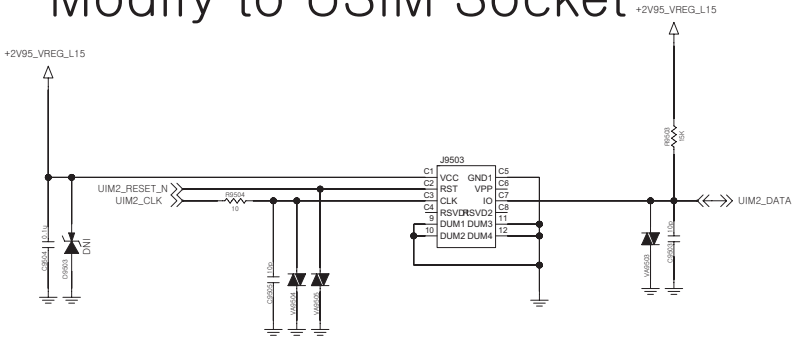

(DGMS Guide)
MC-C045B1-13 : All of items must be satisfied.
1. SIM_DATA : It is required pull-up resistor
(But, if built-in chip, chipset recommend attached)
2. when applying each line cap. or Varistor
- Less than 33pF
- Do not use ESD suppressor type
3. when drawing Artwork, SIM_DATA and SIM_CLK line should be separated, and routing.
4. Cap. or Varistor will be placed close to the socket.



Shield CAN

CAMERA BRACKET

