



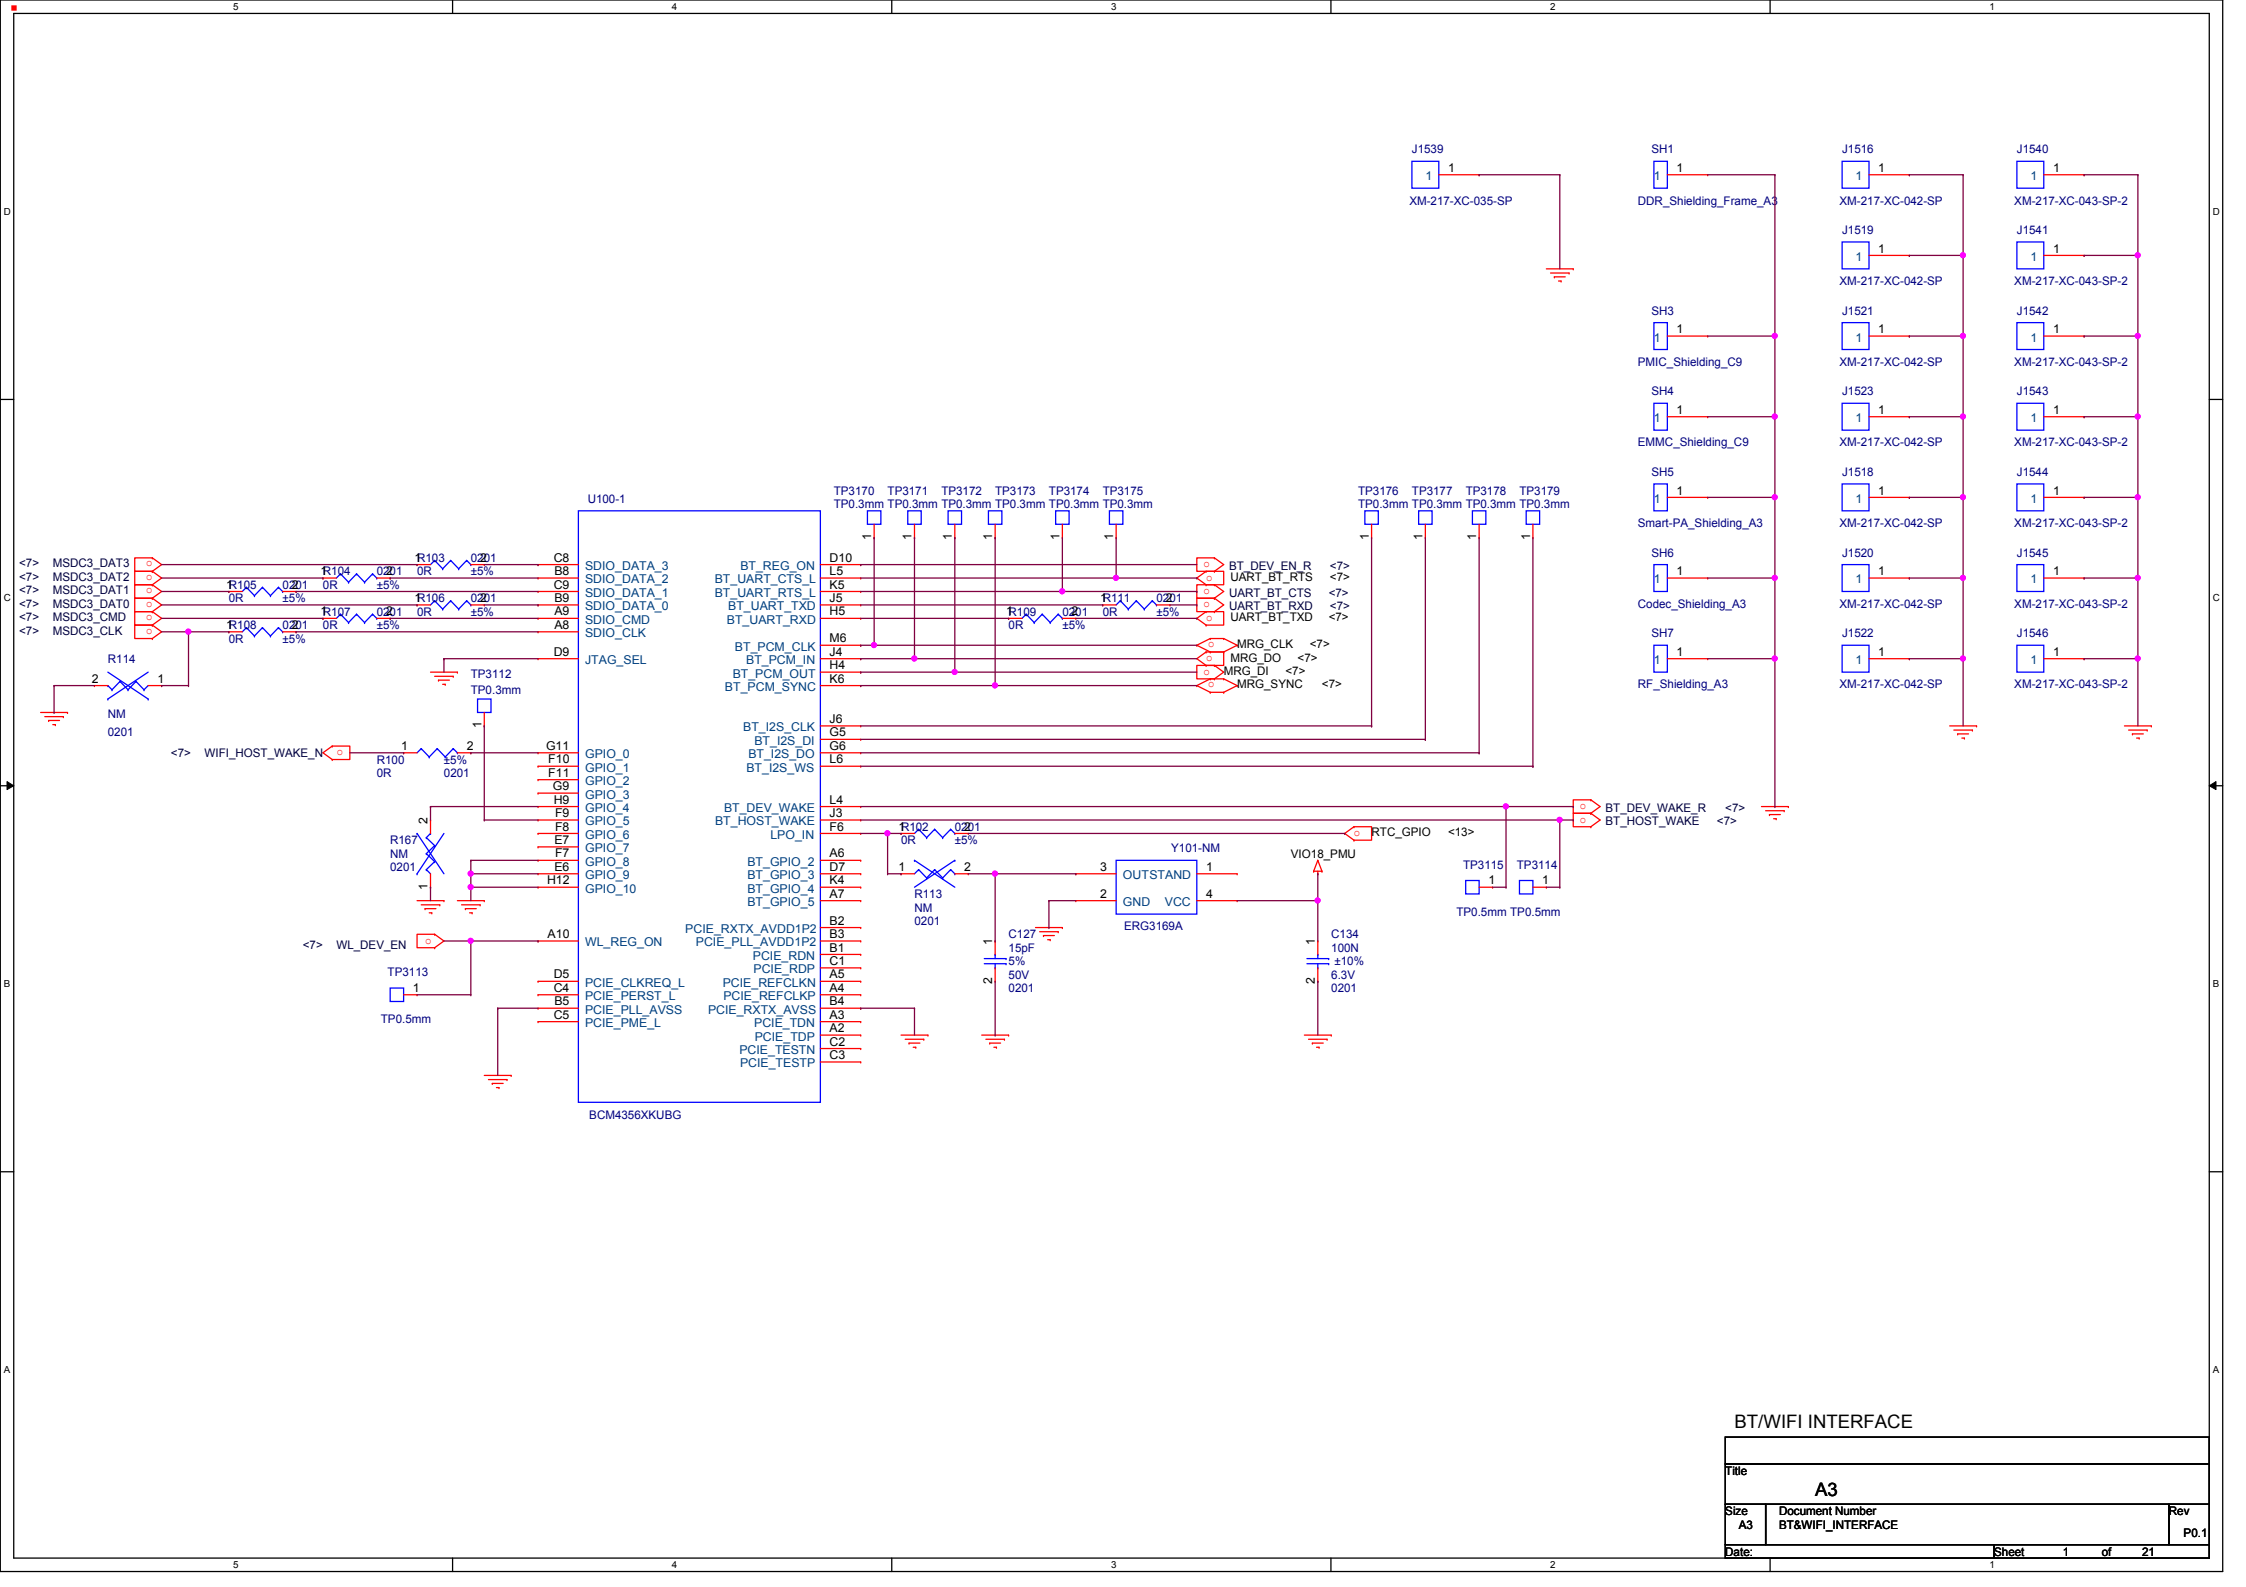







LPDDR3

D

C

B

A

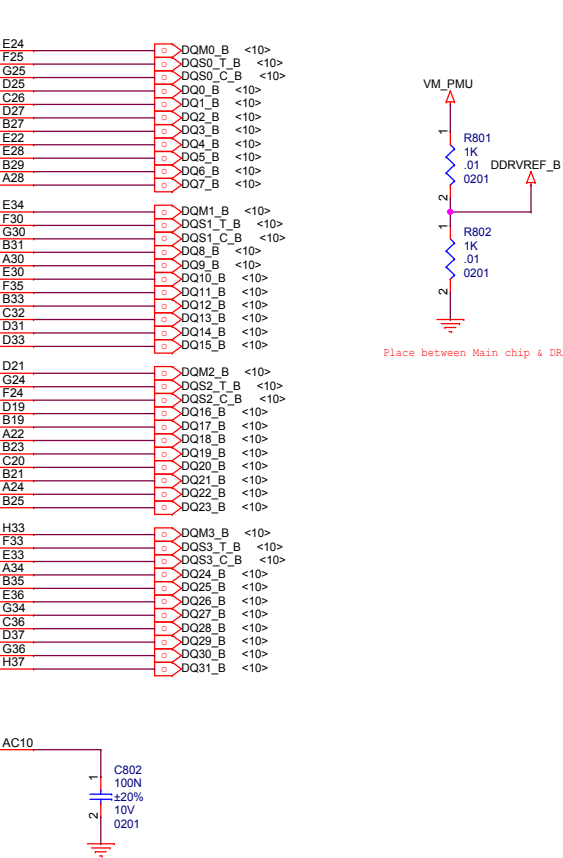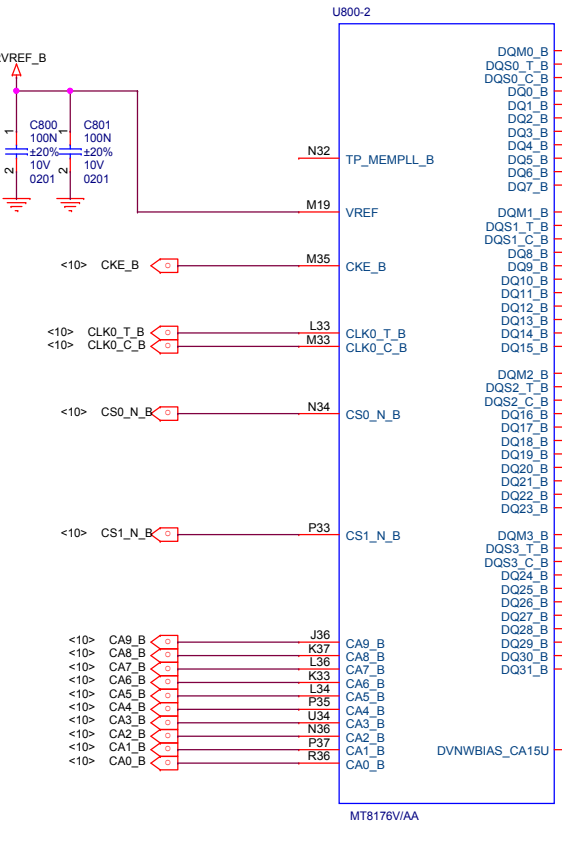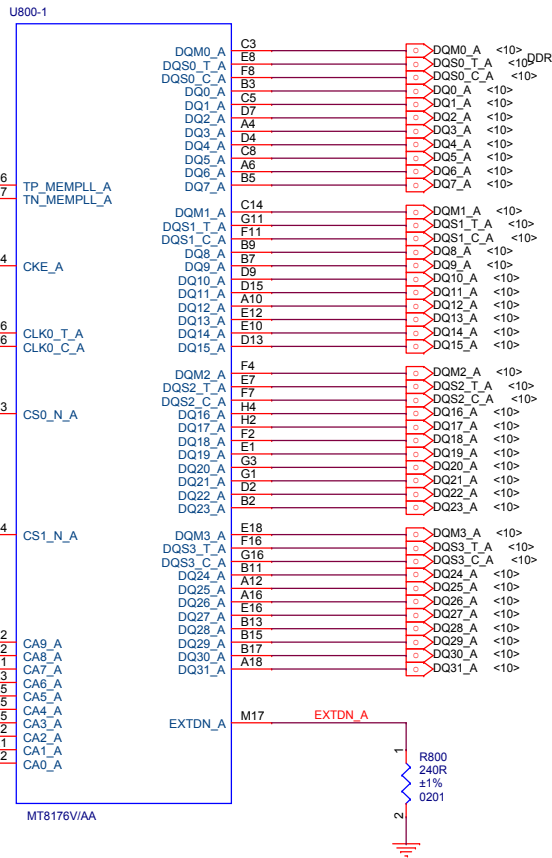

Place between Main chip & DRAM




Baseband

D

C


B



A

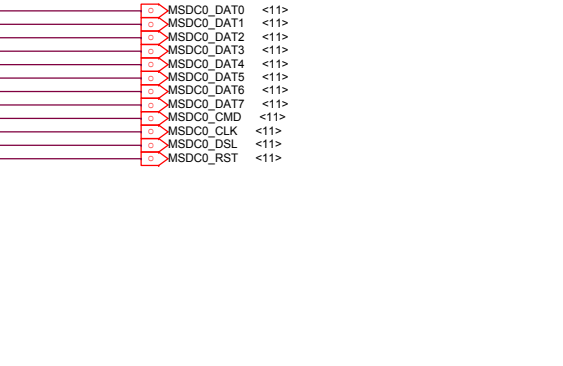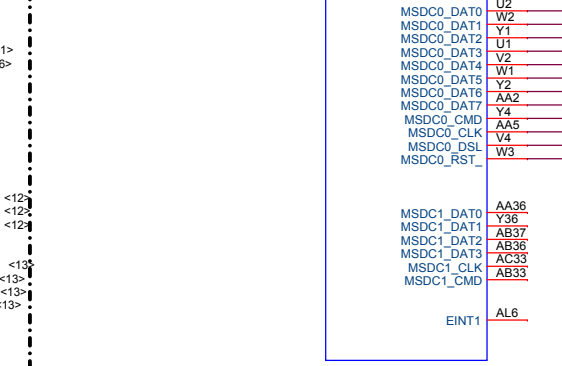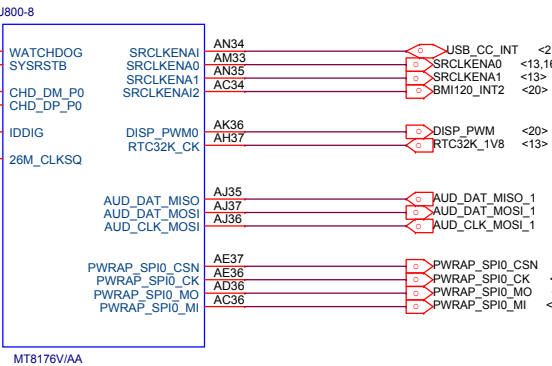


eMMC/SD


Title			
<Title>			
Size	Document Number	Rev	
A3	<Doc>	<RevCode>	
Date:	Monday, January 09, 2017	Sheet	6 of 21

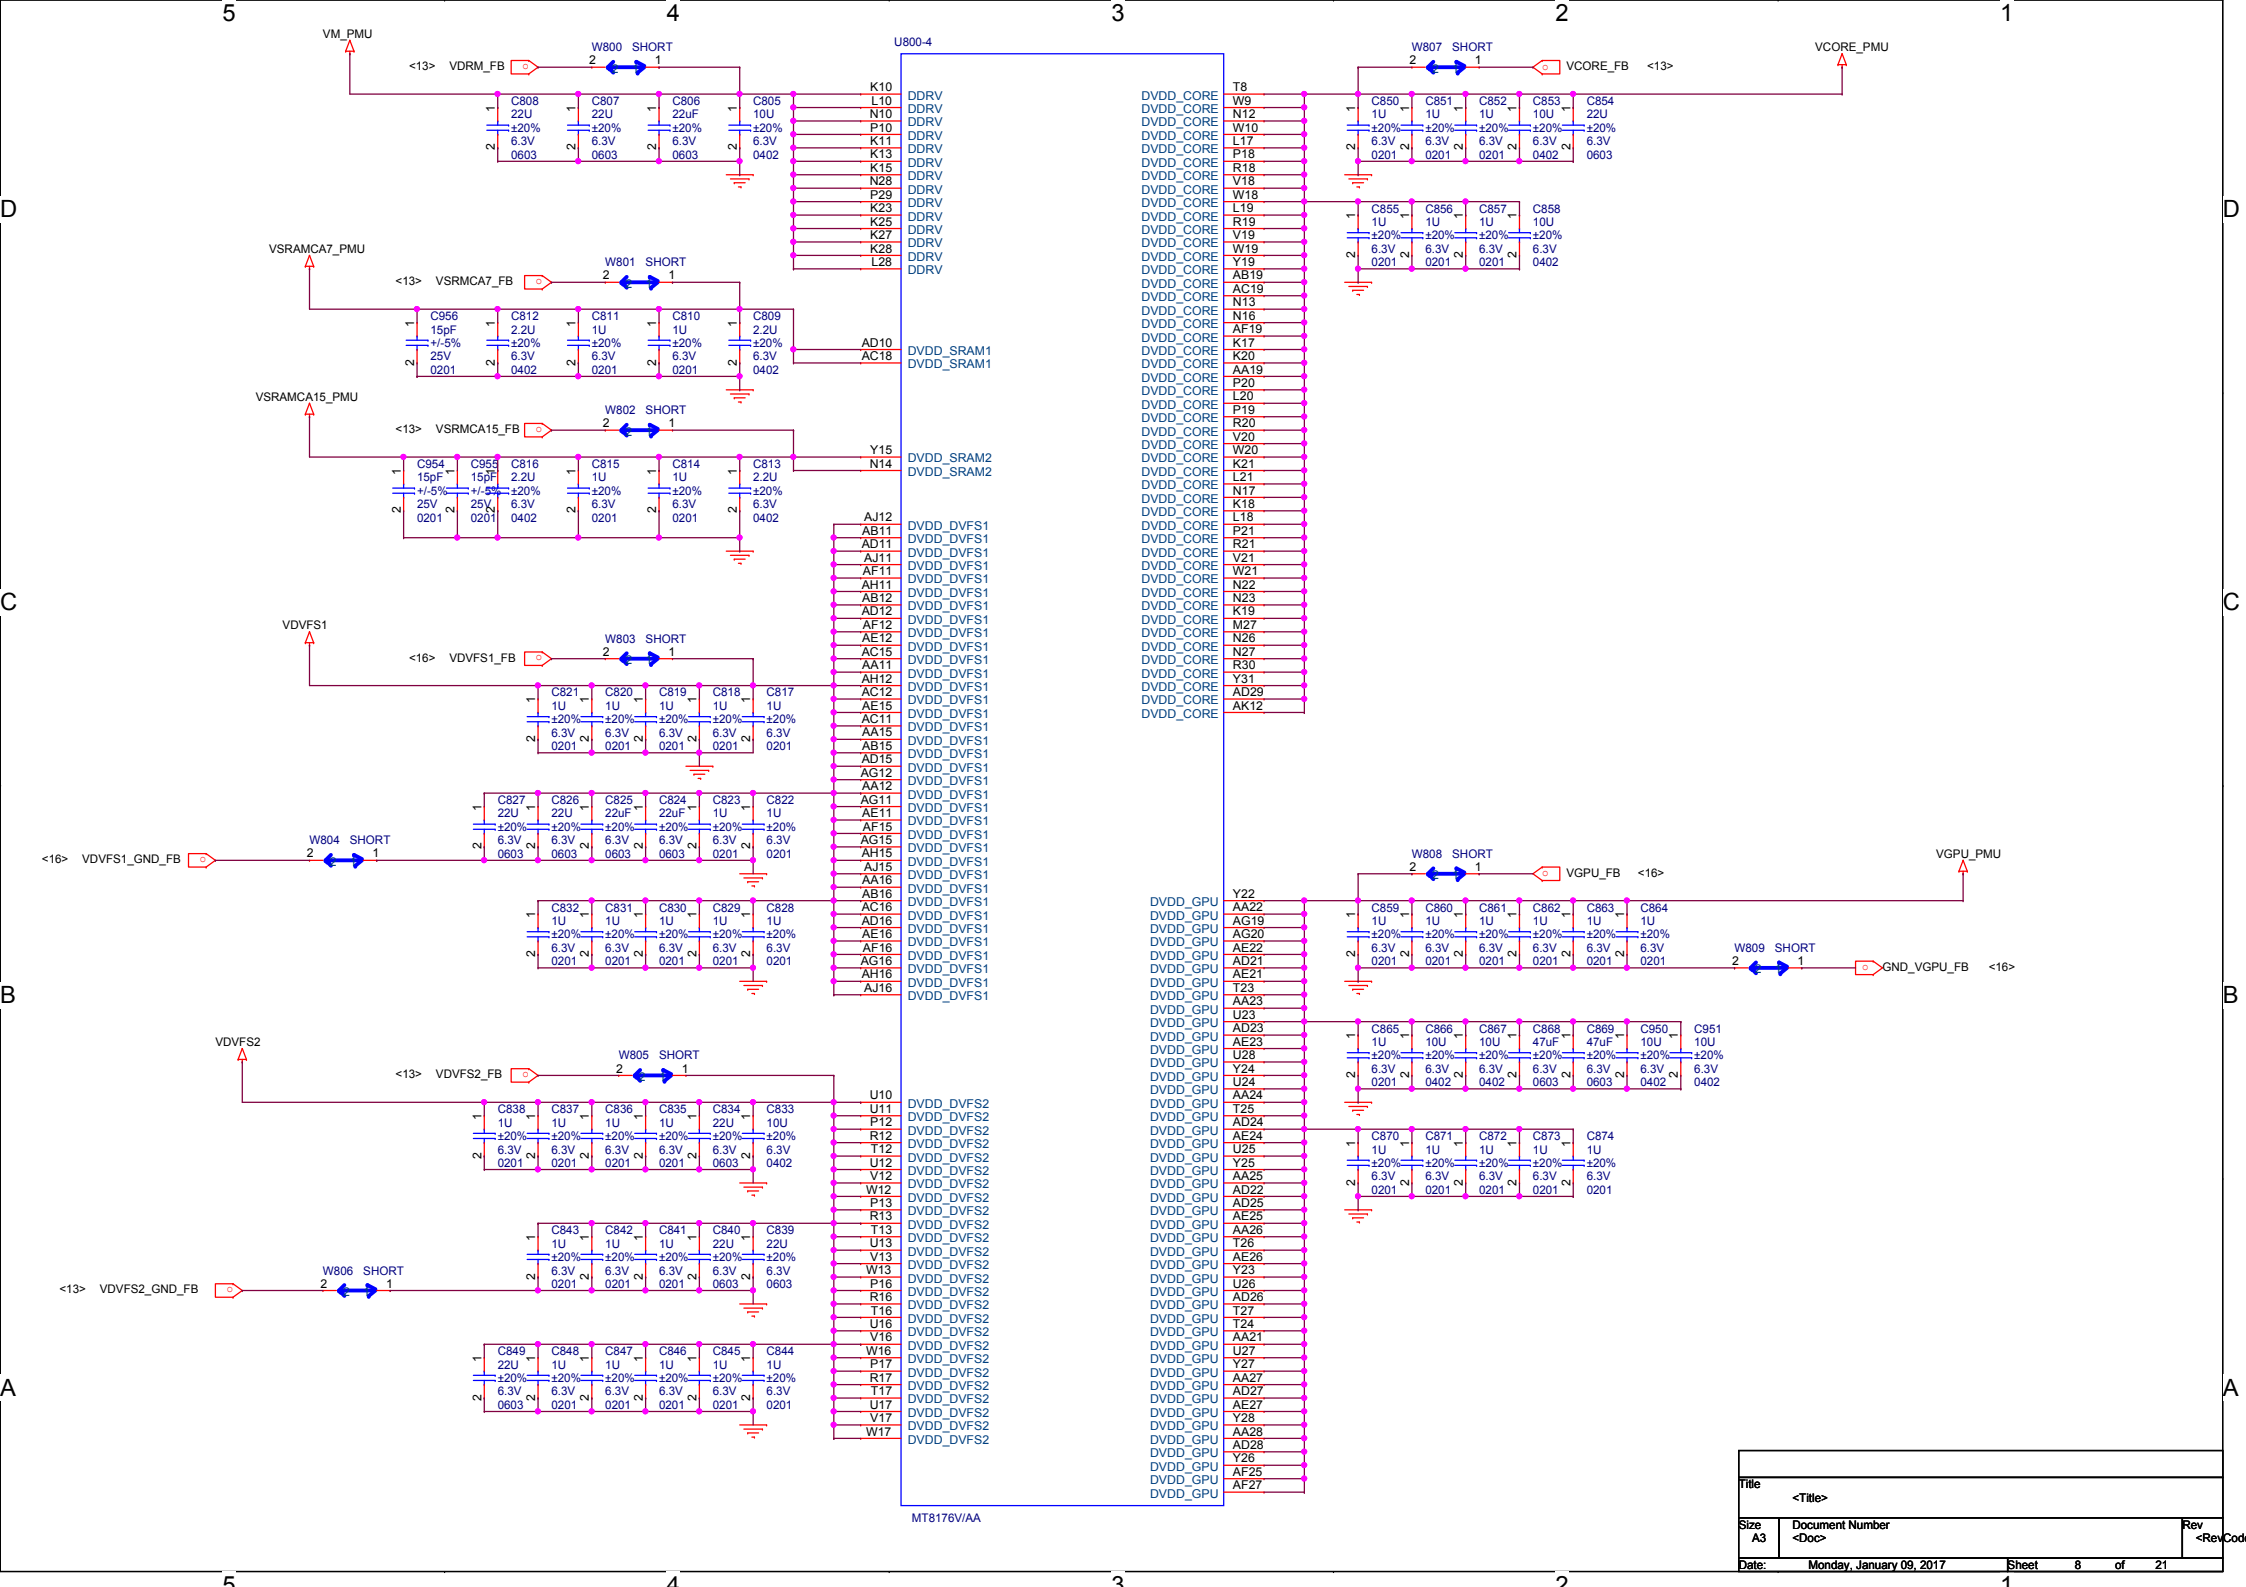

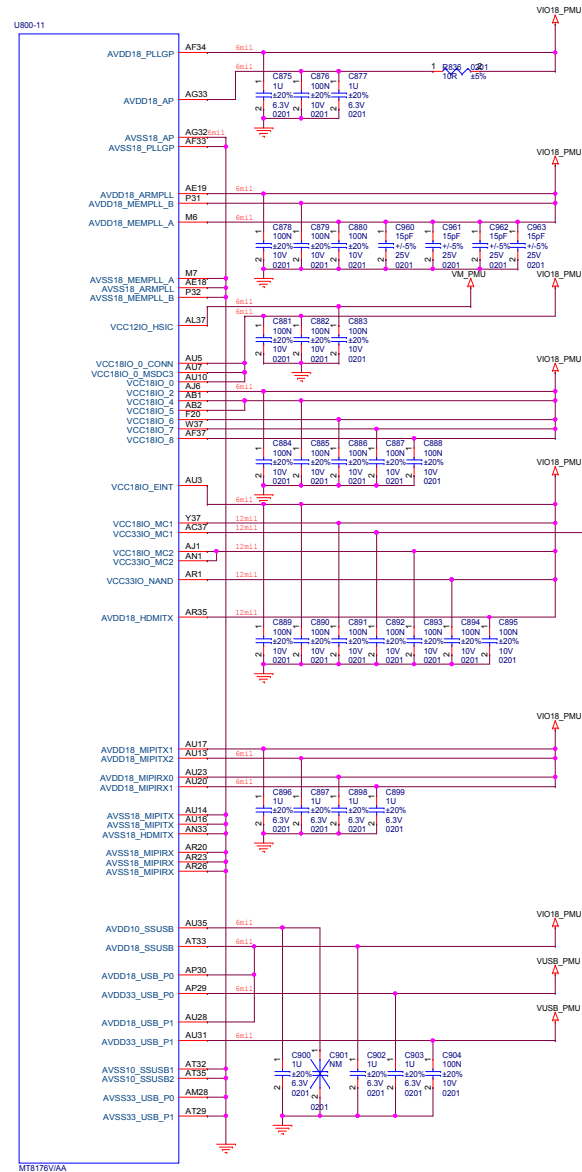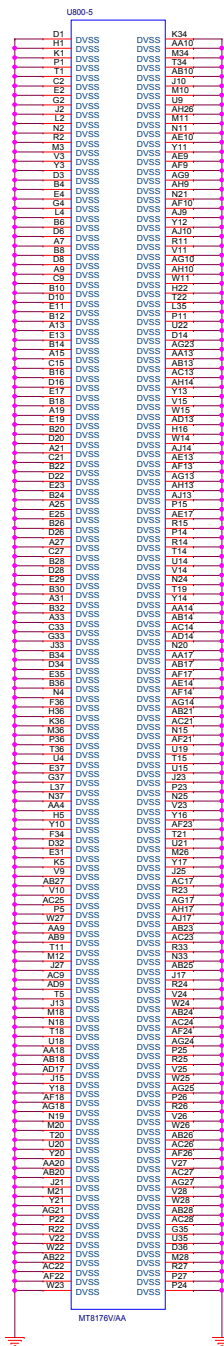

Title <Title>			
Size A2	Document Number <Doc>		Rev <RevCode>
Date:	Monday, January 09, 2017	Sheet 9 of 21	

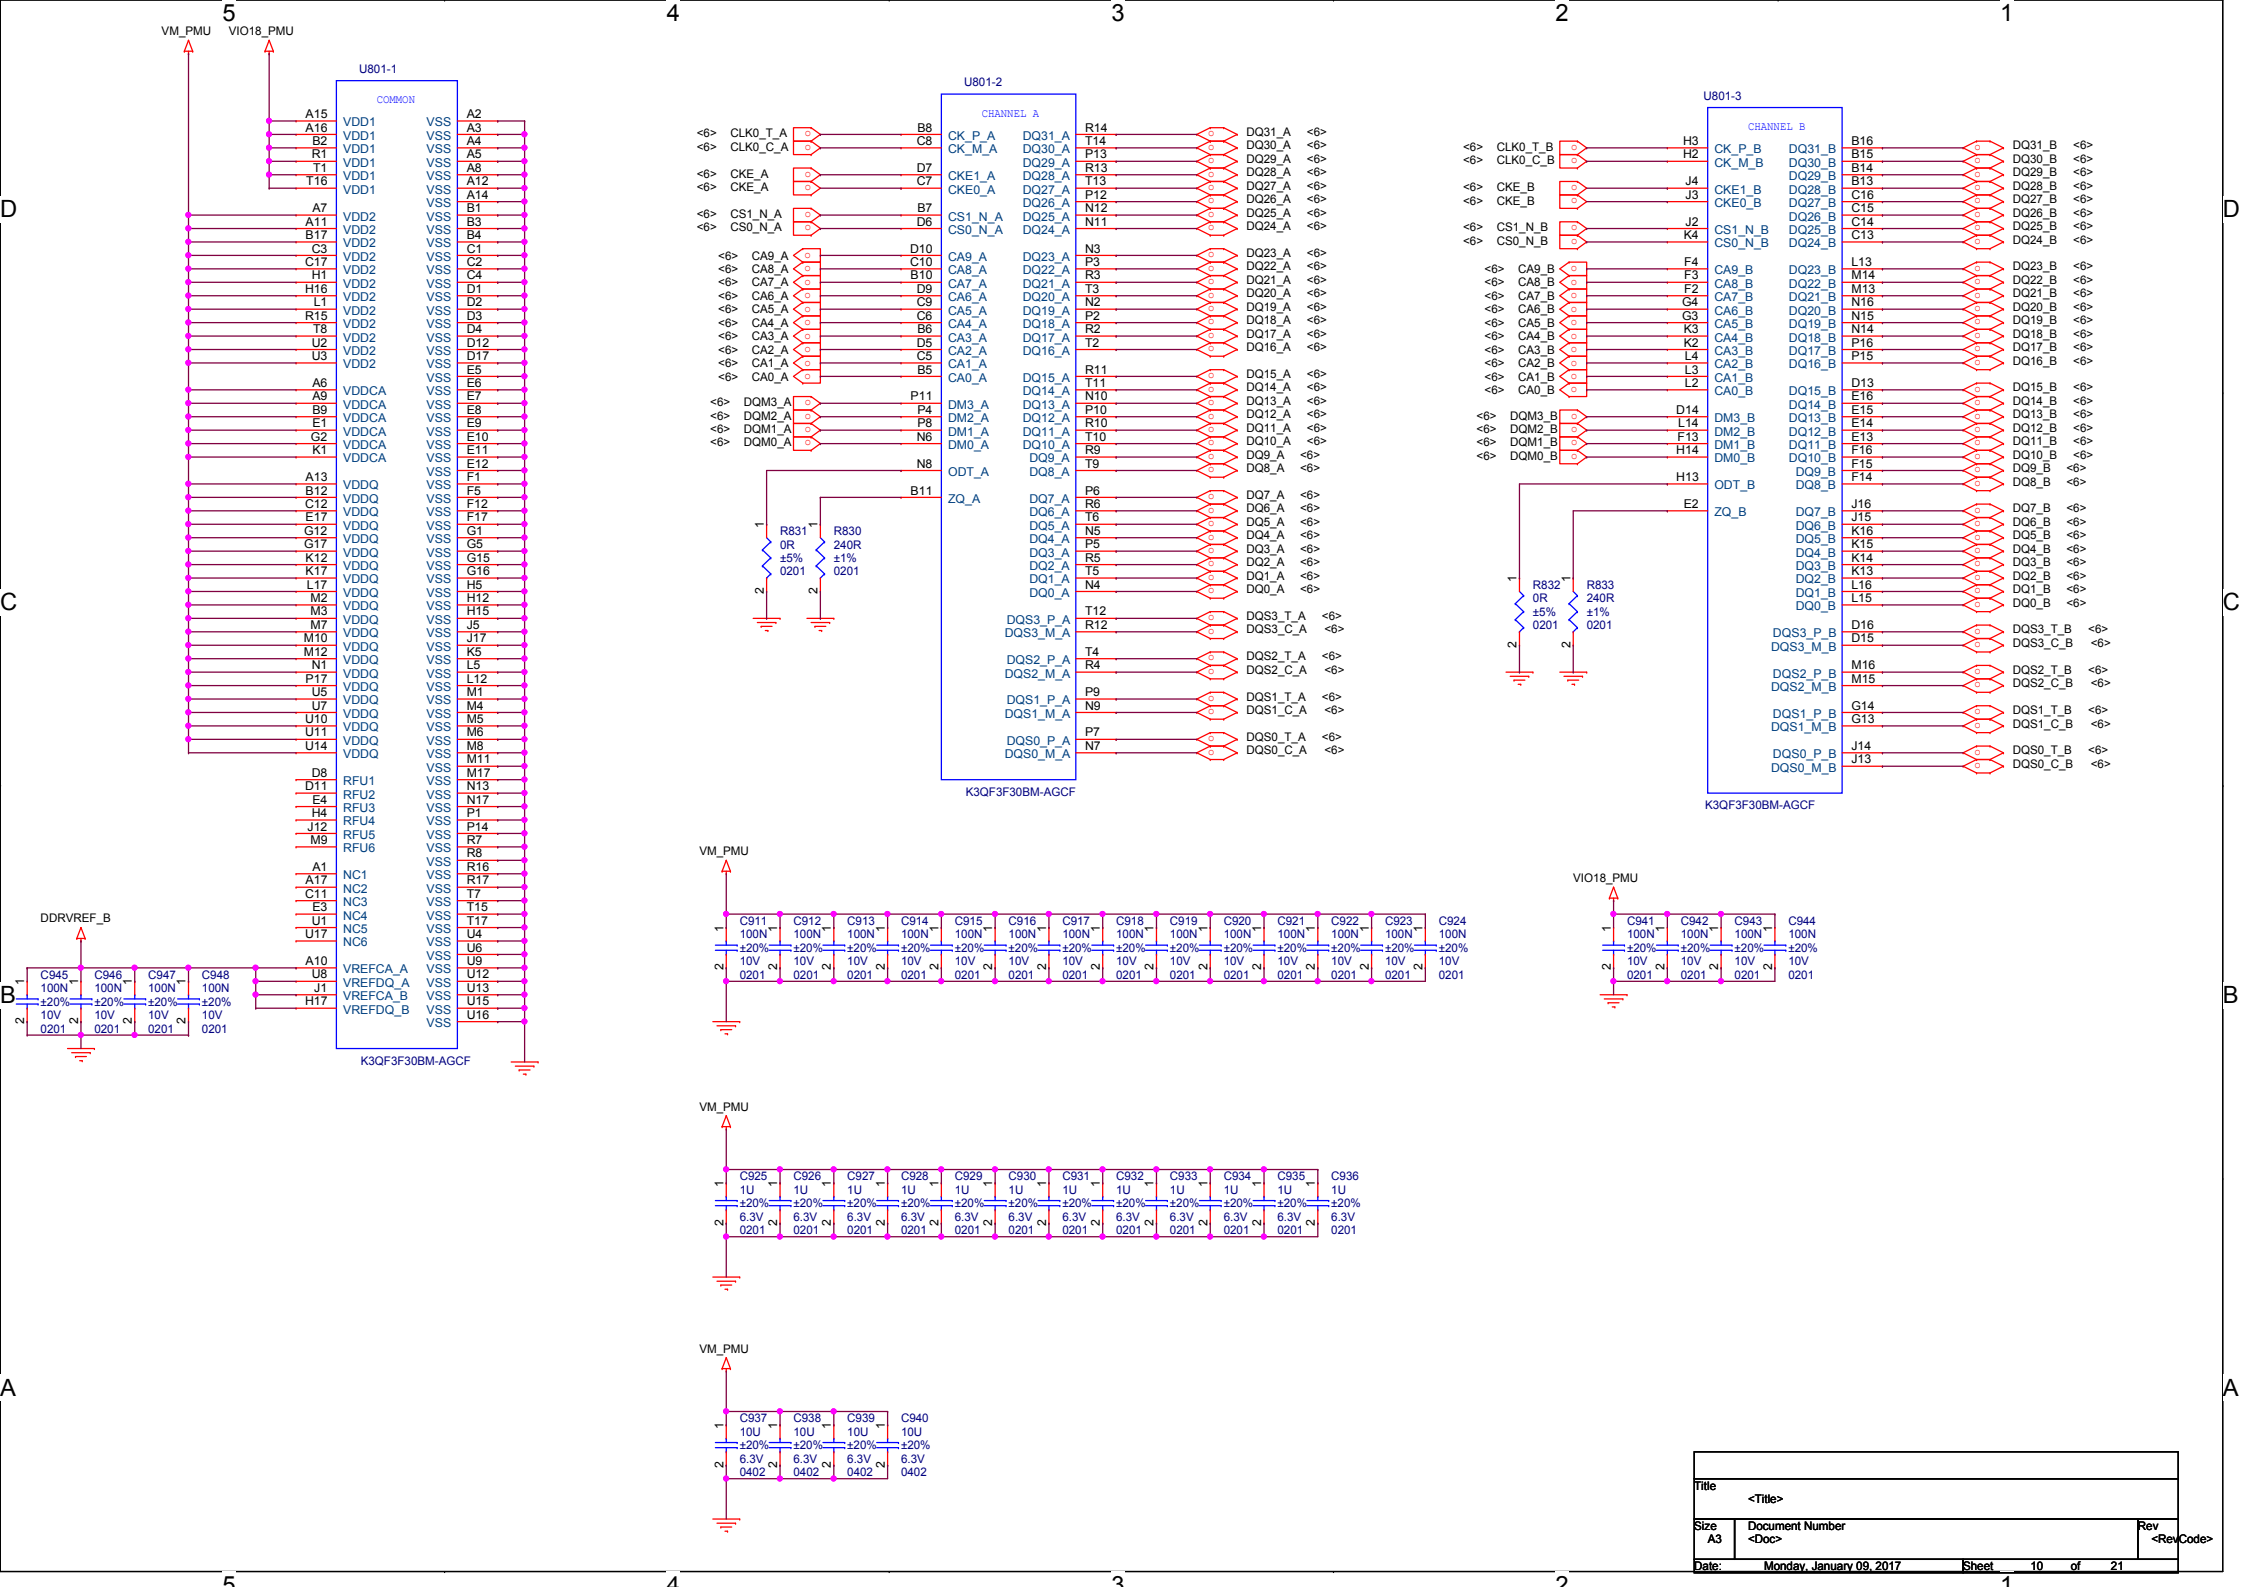

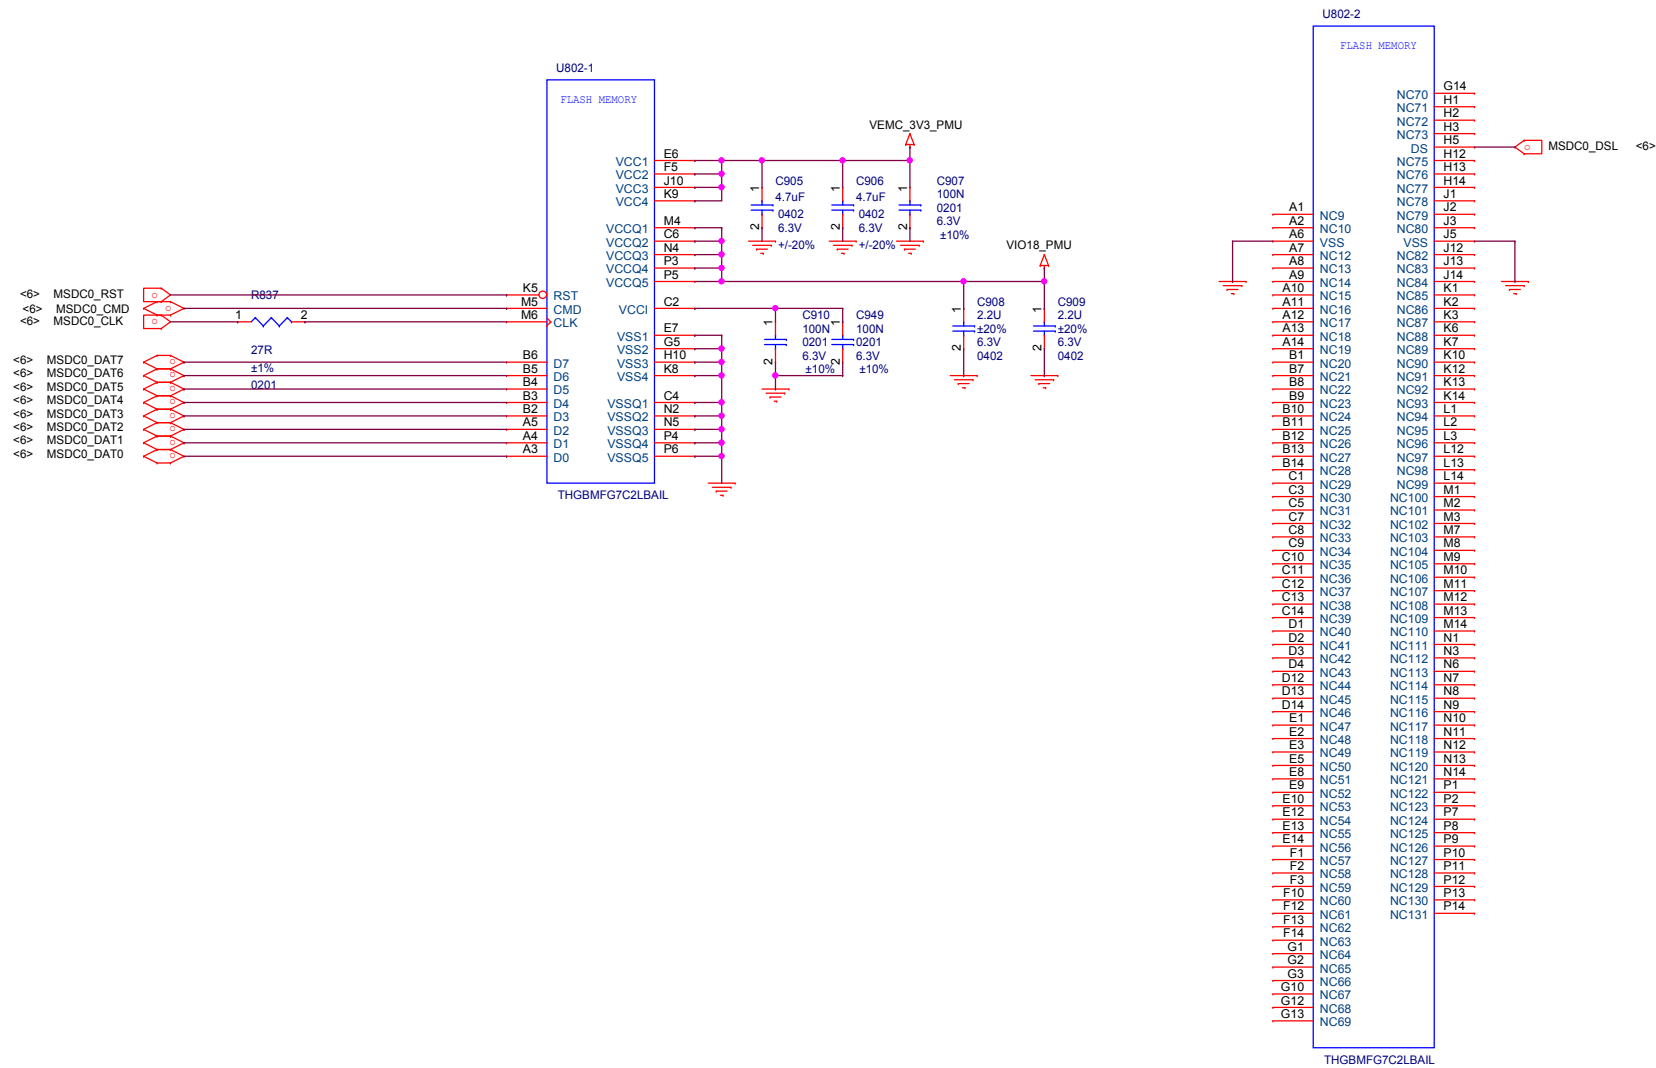


[illegible][illegible]

The schematic diagram illustrates the PMIC Audio section of the MT6391A/B chip. It shows the connection of various pins to external components and the chip itself. The diagram is organized into several sections:

- PMIC Audio Section:** This section shows the connection of VBAT, MICBIAS1, and various audio pins (AUD_DAT_MISO_1, AUD_DAT_MOSI_1, AUD_CLK_MOSI_1, AU_VIN0N, AU_VIN0P, AU_VIN1N, AU_VIN1P, AU_VIN2N, AU_VIN2P, AU_REFN, AU_FMINL, AU_FMINR) to the MT6391A/B chip. It includes components like capacitors (C600, C601, C602, C603, C604, C605, C606, C678, C679), resistors (R637, R646), and a crystal (Y600).
- Crystal 26MHz:** This section shows the connection of the 26MHz crystal (Y600) to the chip. It includes a 26MHz crystal and a 32KHz RTC (Y601).
- RTC 32K:** This section shows the connection of the 32KHz RTC (Y601) to the chip. It includes a 32KHz RTC and a 26MHz crystal (Y600).
- Digital Section:** This section shows the connection of various digital pins (TOUCH_RESET_N, SEL_UART, LCD_RESET_N, CAMERA_1_RESET_N, GPIO_CHG_EN, CAMERA_1_PWDWN, CHG_STAT, EN_A) to the MT6391A/B chip. It includes components like capacitors (C600, C601, C602, C603, C604, C605, C606, C678, C679), resistors (R637, R646), and a crystal (Y600).

The diagram is a detailed representation of the PMIC Audio section of the MT6391A/B chip, showing the connection of various pins to external components and the chip itself. It includes components like capacitors (C600, C601, C602, C603, C604, C605, C606, C678, C679), resistors (R637, R646), and a crystal (Y600). It also shows the connection to the MT6391A/B chip and the MT6391A/B chip.

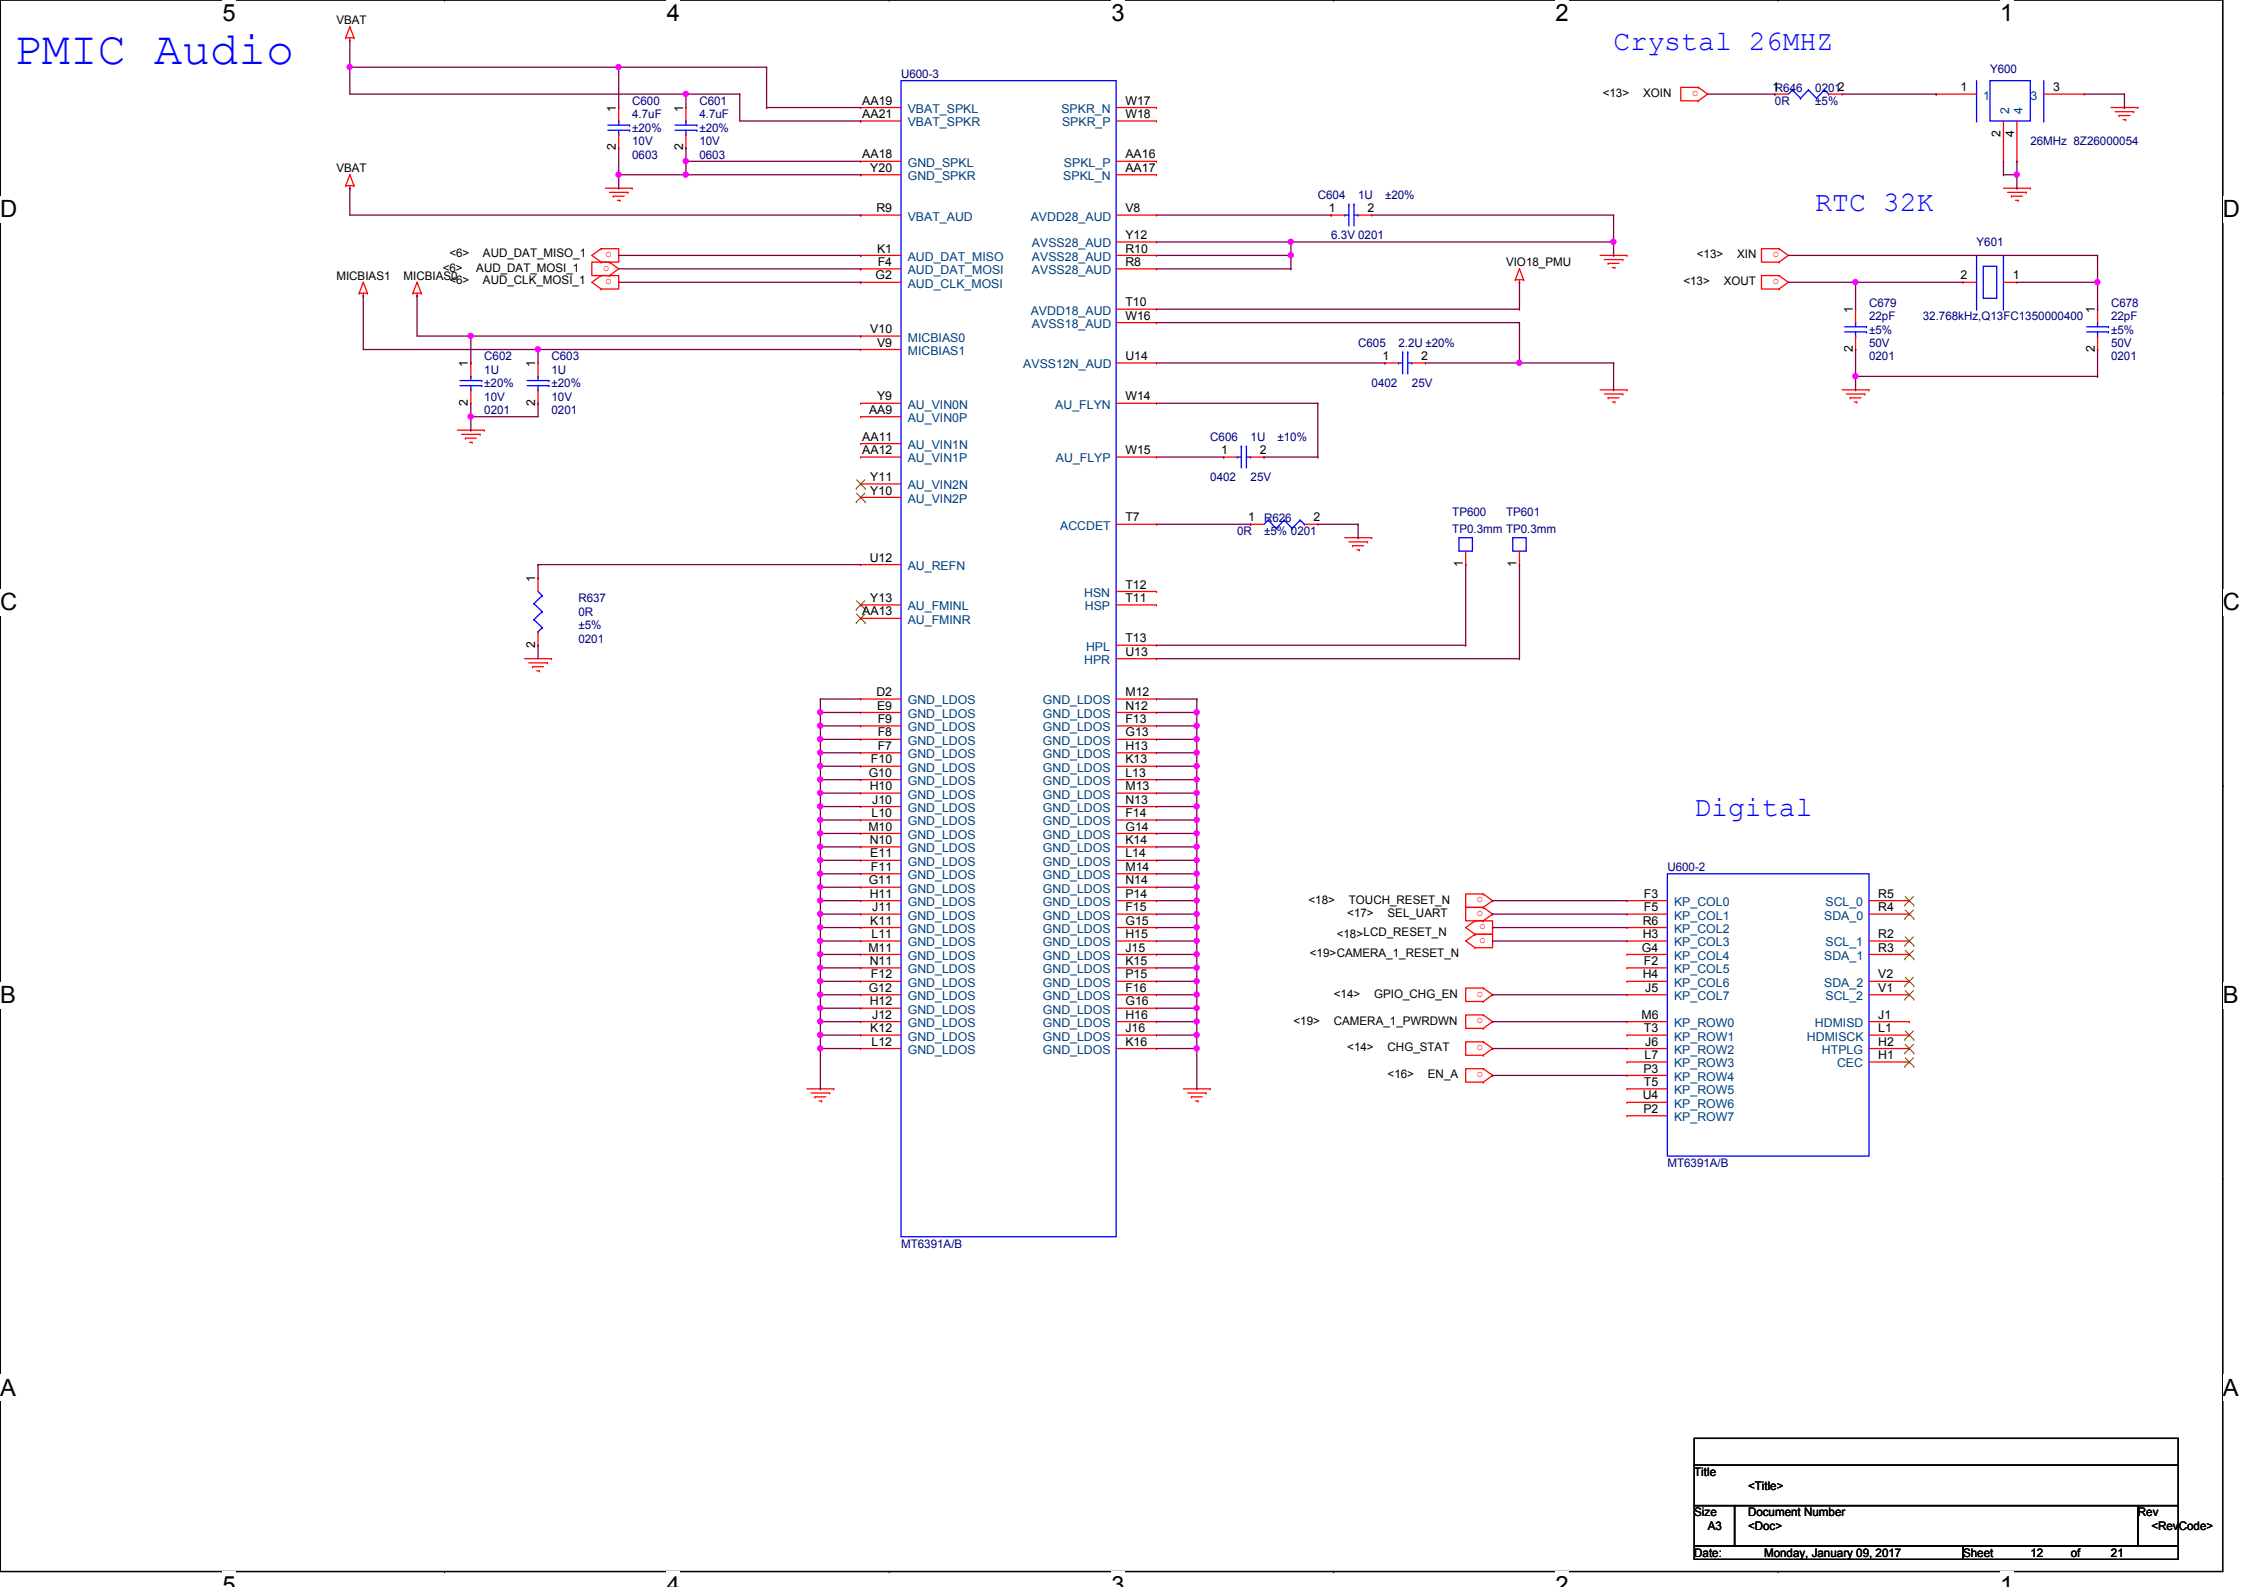


PMIC Audio


Crystal 26MHZ

RTC 32K


Digital

The schematic diagram illustrates the MT6391A/B PMIC Audio section. It shows the connection of VBAT to various pins (AA19, AA21, AA18, Y20, R9, V10, V9, Y9, AA11, AA12, Y11, X10, U12, Y13, AA13) and the MICBIAS1 pin. The diagram includes components like capacitors (C600, C601, C602, C603, C604, C605, C606, C678, C679), resistors (R637, R646), and a 26MHz crystal (Y600). It also shows the connection to a 32K RTC (Y601). The diagram is divided into sections: PMIC Audio, Crystal 26MHZ, RTC 32K, and Digital.




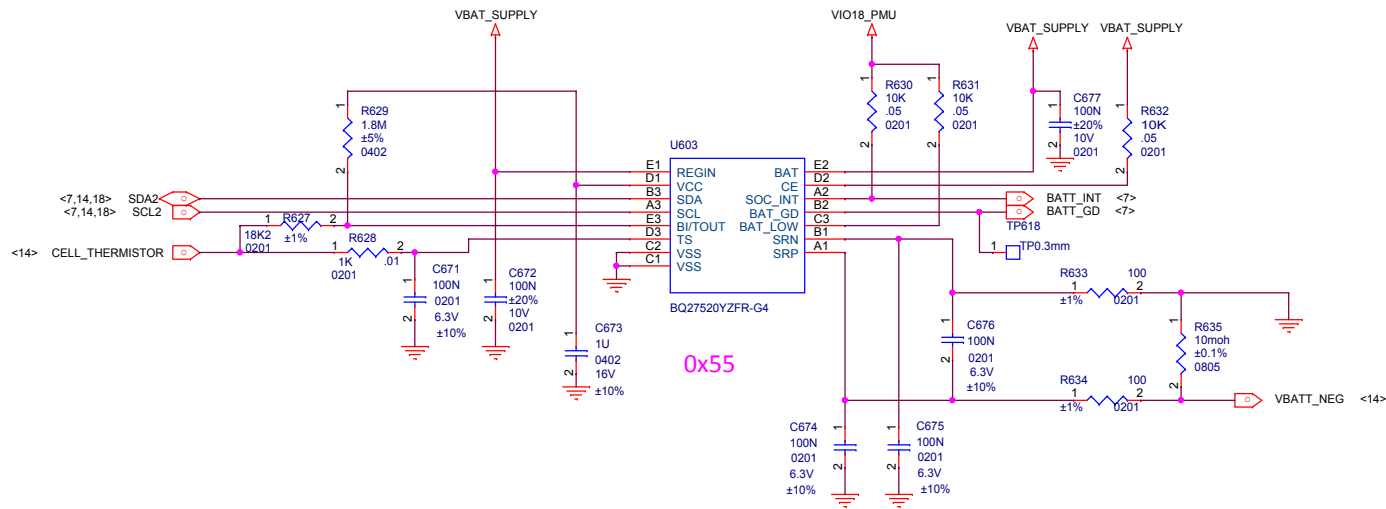

Title		
A3		
Size	Document Number	Rev
A3	Fuel Gauge	P0.1
Date:	Sheet 15 of 21	

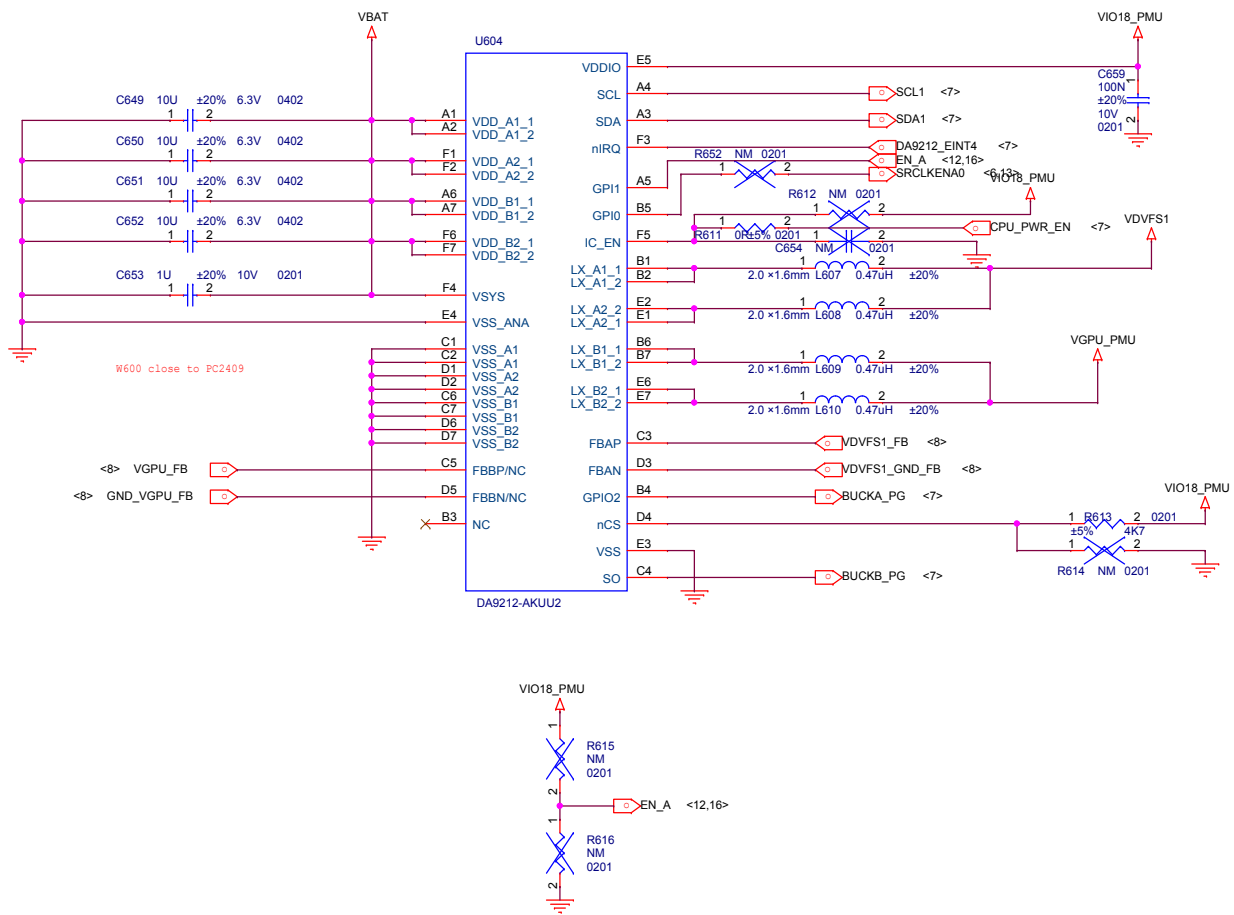


CODEC

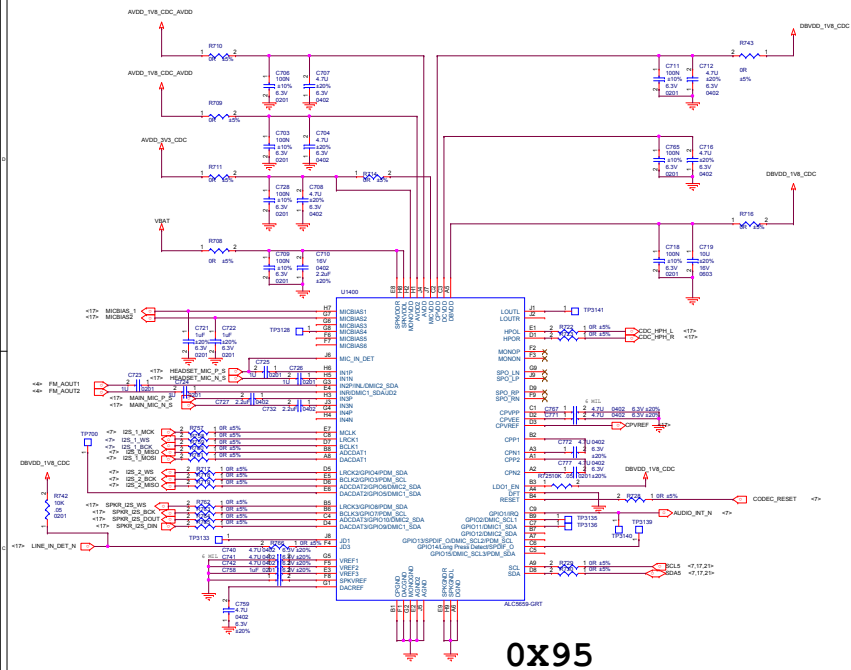


0x95


MAIN Mic

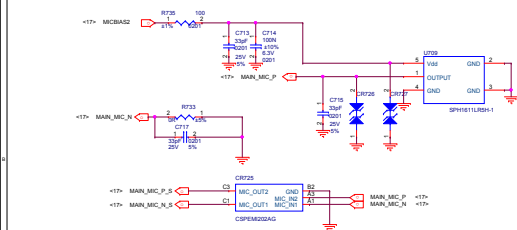


AUX Mic

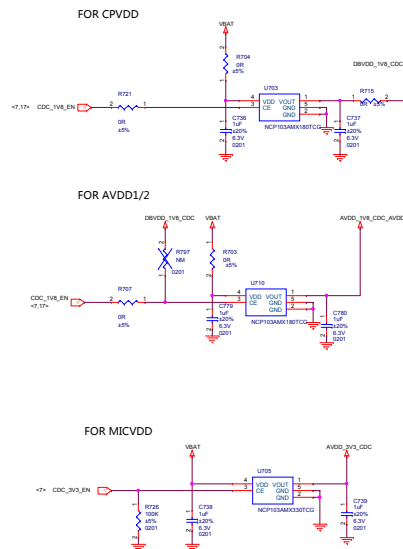



HEADSET

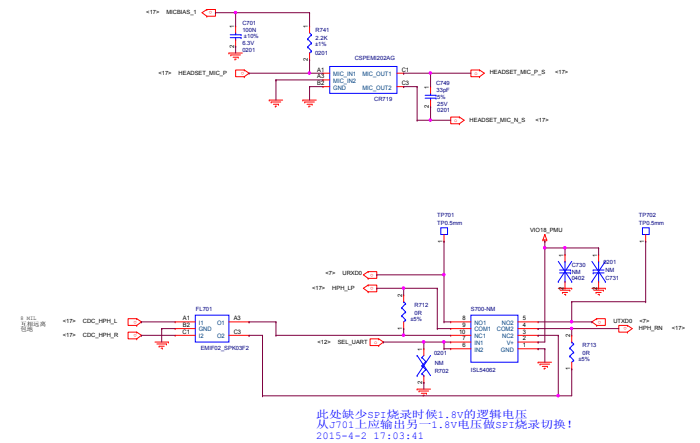



HANDSET

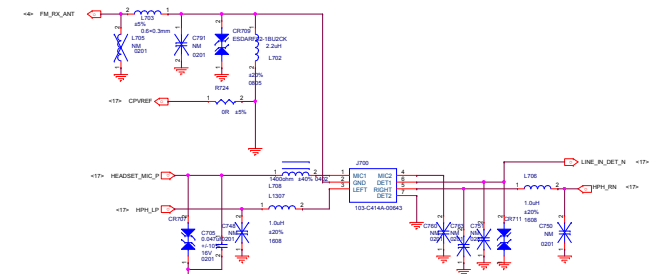



SMART PA

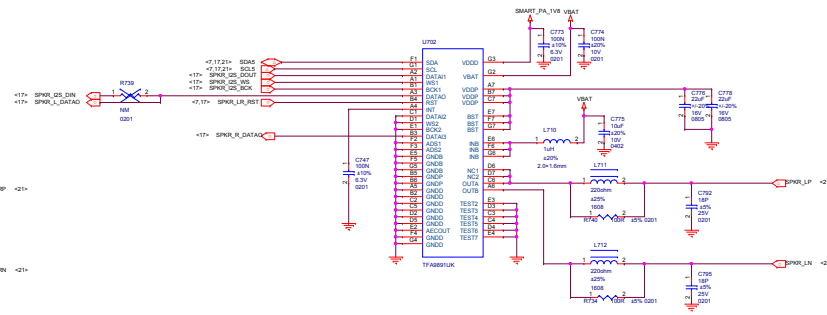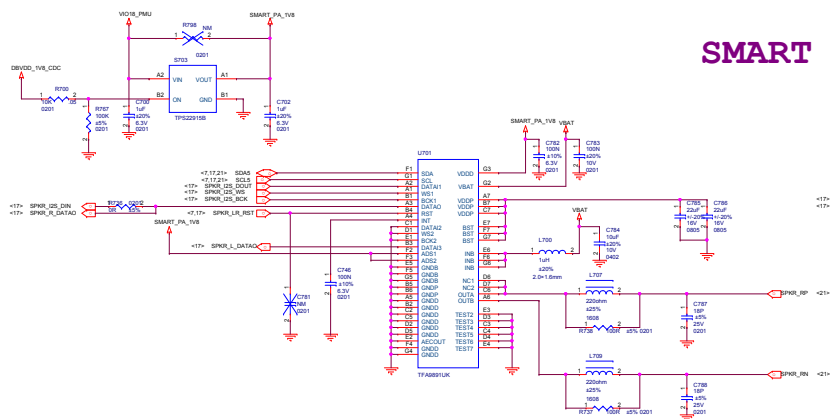





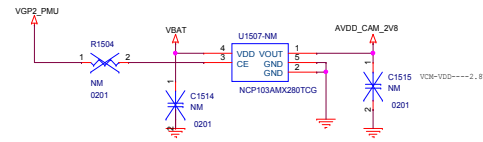

REAR CAMERA

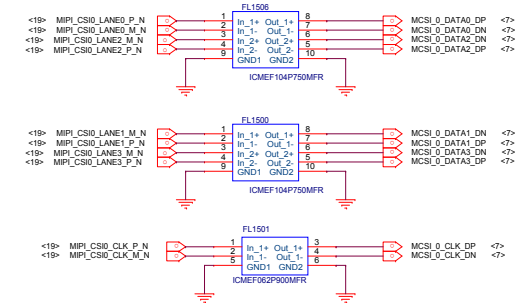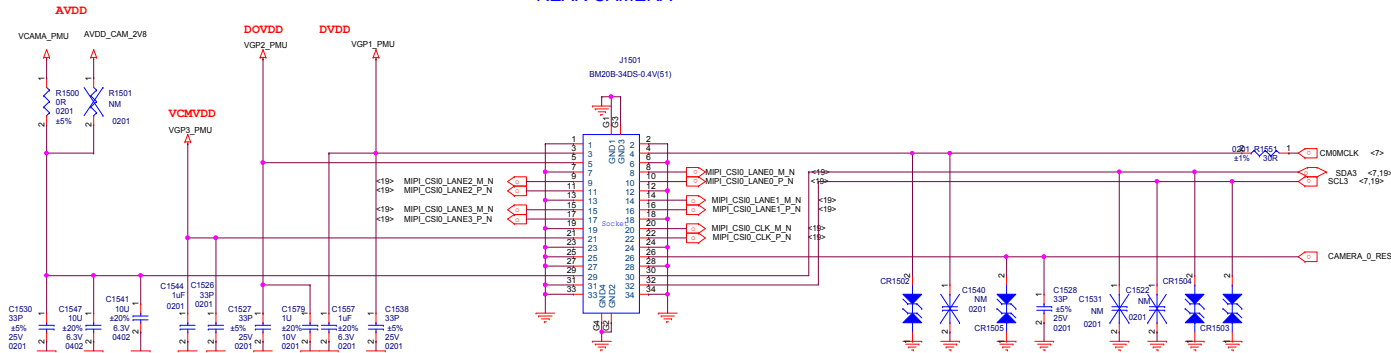


FRONT CAMERA

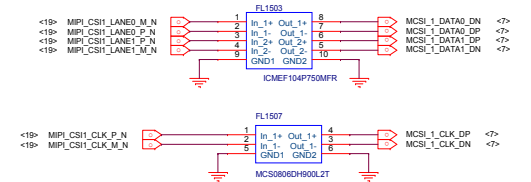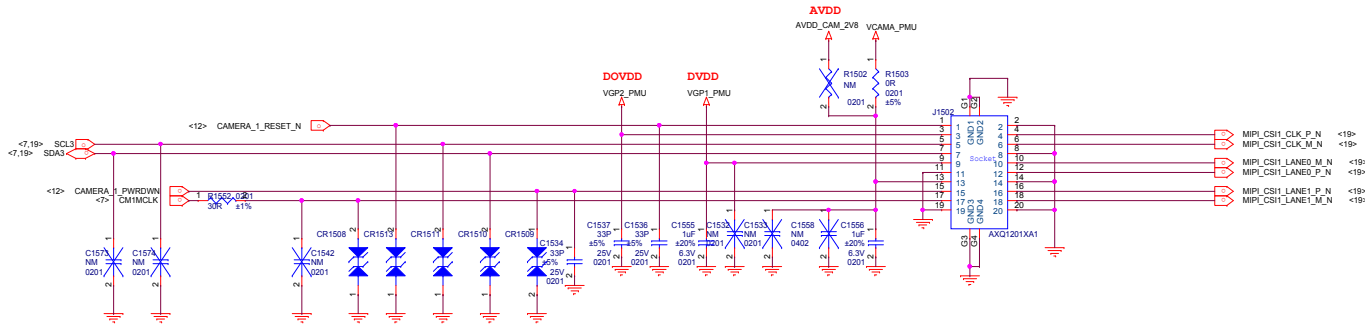


File	A3	Rev	P0.1
Size	Document Number		
A2	CAMERA		
Date	Monday, January 09, 2017	Sheet	19 of 21


KEY LED DRIVER

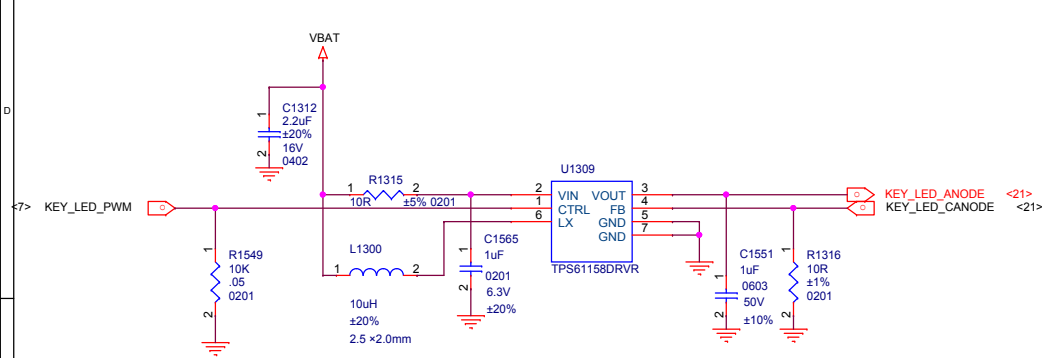


COMPASS

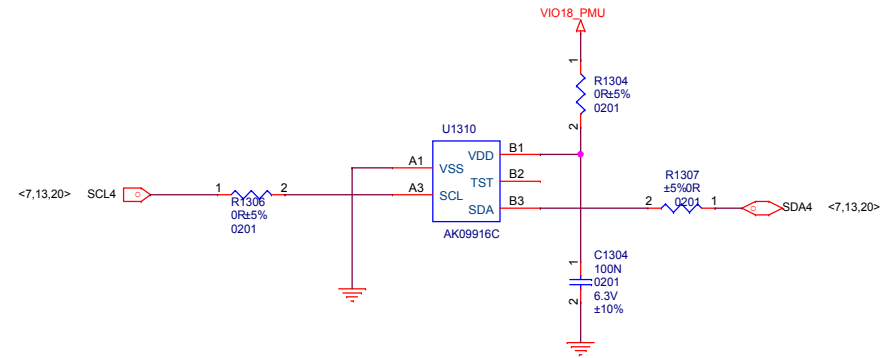


RGB DRIVER

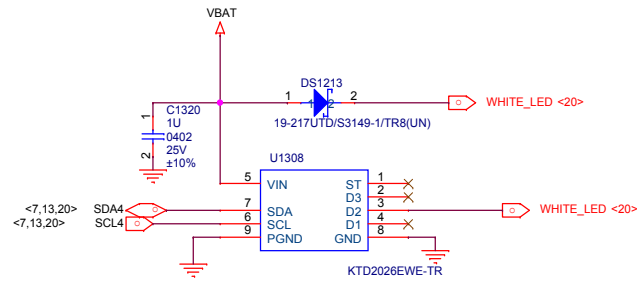


A+G SENSOR

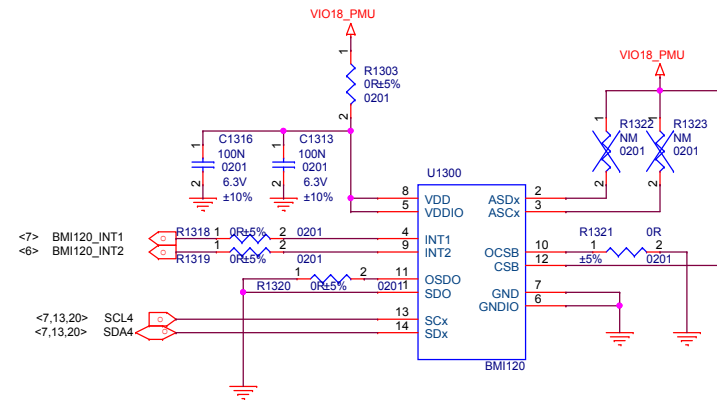

HALL SENSOR

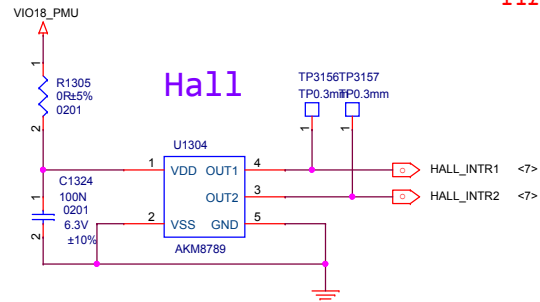

LIGHT SENSOR

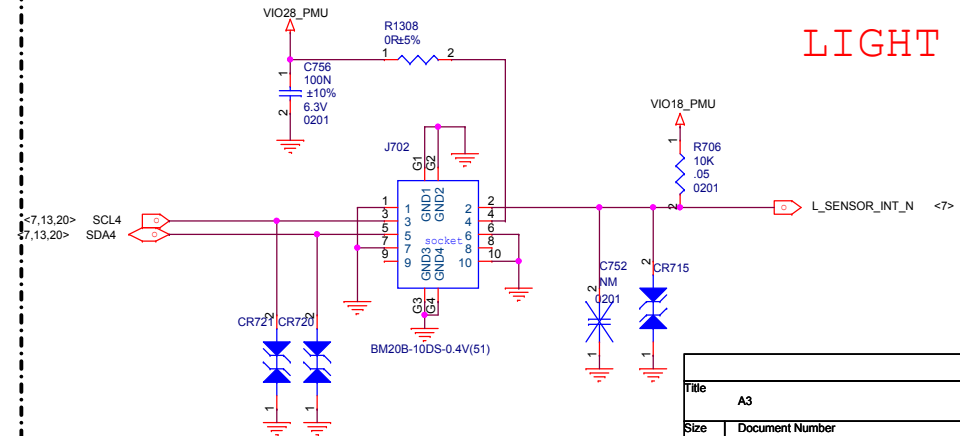

Title		
A3		
Size	Document Number	Rev
A3	SENSOR	P0.1
Date:	Sheet 20 of 21	

