



ETA6953:address: D6M BQ25601:address: 62M

Title Revision					
Doc ID	Document Number OL_POWER_SUPPLY_RE_FLASH				Rev V1.0
Copyright © 2009 Intel Corporation. All rights reserved.					


Flash LED Driver

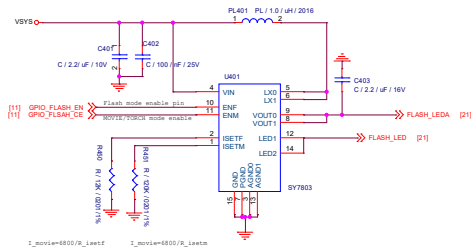

Backlight

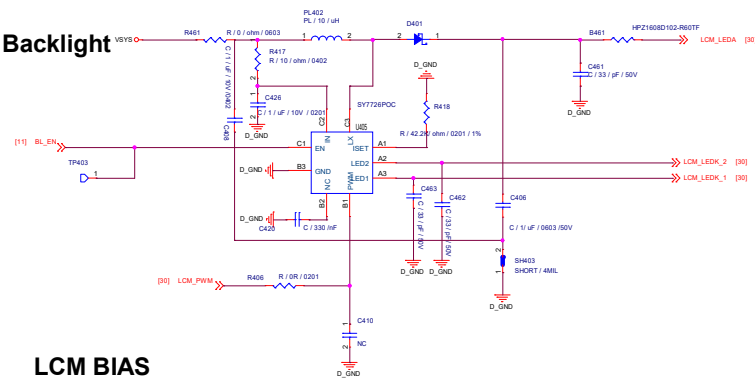


LCM BIAS

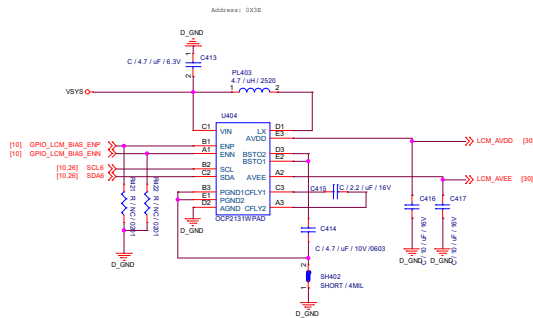

Rev	Amman	
Doc	Document Number	04_POWER_LCMBIAS_BI_FLASH
Date	Wednesday, April 11, 2006	Page 4 of 38

1. "Typical Cap" defined in design notice is the minimum cap. to LDO Cout. 2.
NC cap can move to application, if (PCB L<20nH, PCB R<0.2 ohm)
=> value and placement of Cap, please refer design notice

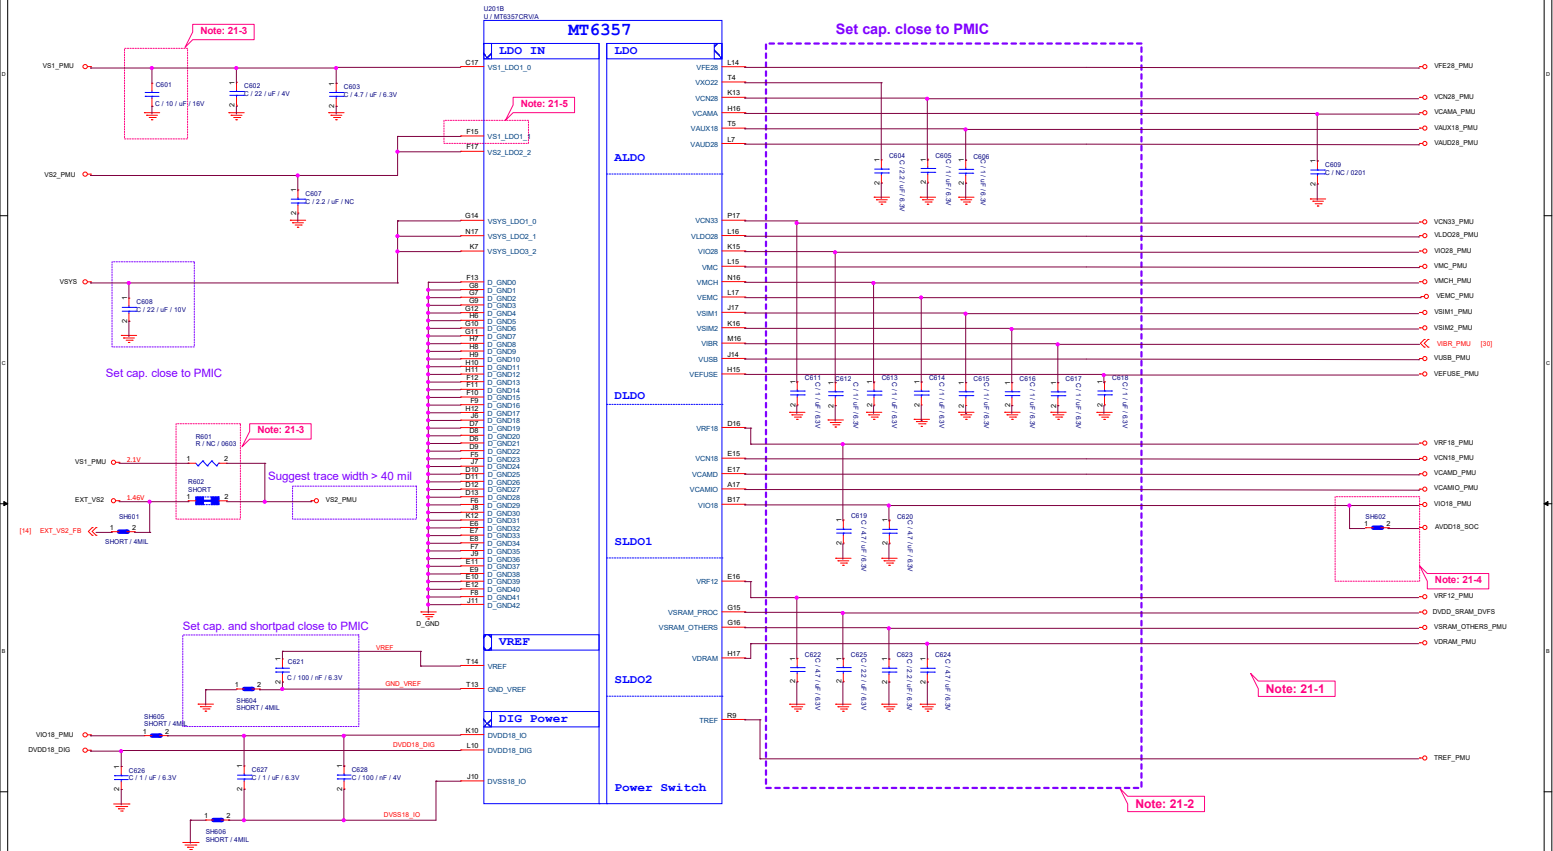

Note 21-1: If these power trace can meet LDO layout constraint, these CAP can be NC or removed.
Please refer to MT6357 design notice.

Note 21-2: Output cap range please follow MT6357CRV LDO design notice

Note 21-3: Ext Buck BOM option

	Ext. buck option	
	w/ EXT VS2 Buck	w/o EXT VS2 Buck
C601	10uF	22uF, 0603
R602	0-ohm, 0603	NC
R601	NC	0-ohm, 0603

Note 21-4: Please set SH602 and SH603 close to C620, making star connection among VIO18_PMU, AVDD18_SOC, and EMI_VDD1 near to LDO cap. C620




Please also refer to MT6357 design notice for further detail design information

Note 21-5: Please connect VS2_LDO1(F15) to VS1_PMU if voltage applied to VCAMD(E17) >= 1.3 V


File	Amman
Doc C	Document Number
Date	Wednesday, April 01, 2020
Rev	1.0

U20 ID1
U1 MT6357ORVIA

MT6357

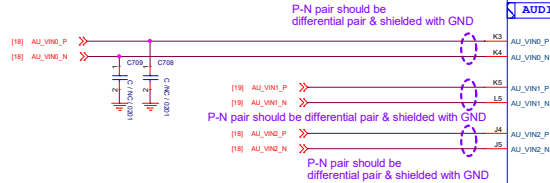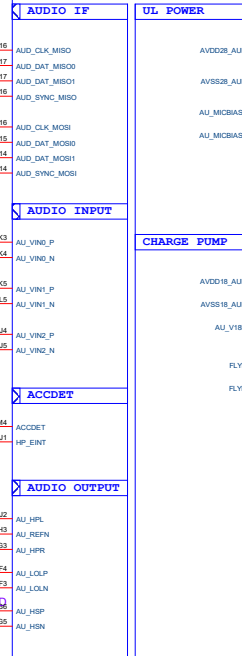


- AU_HPL and AU_HPR should be routed as single end signal, and be guarded by GND, up and down, left and right respectively
- The suggested layout pattern of AU_HPL/ AU_HPR/ AU_REFN is " GND AU_HPL AU_REFN AU_HPR GND"




Set cap. close to PMIC

P-N pair should be differential pair & shielded with GND







Set cap. and shortpad close to PMIC




Set cap. close to PMIC

1. AVSS18_AUD is connected to GND in very short trace
2. AVSS18_AUD is connected to de-couple cap of AVDD18_AUD and AU_V18N with 6mil. trace respectively

Rev				Amman
Rev	Document Number	POWER_MT6357_Audio		Rev
C				V1.2
Date		Wednesday, April 01, 2020	Sheet	7 of 38

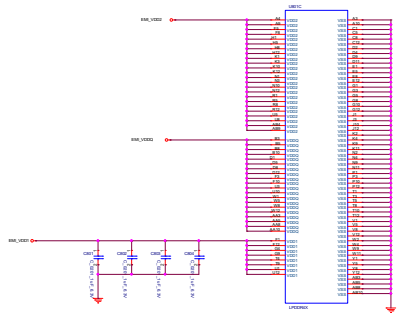

Rev	Rev
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

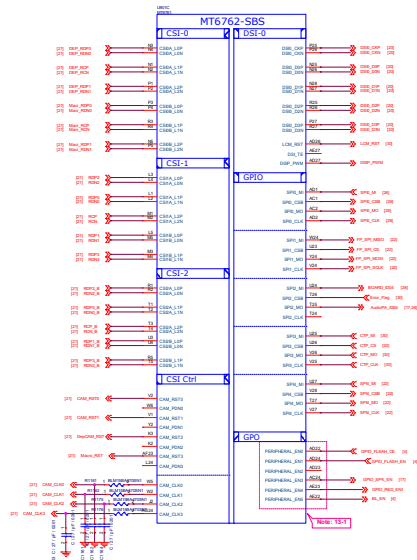


Note 12-1: The de-coupling cap. for REFP (AF18 ball) have to be placed as close to BB as possible.

Note 12-2: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX-ADC input to GND.

Note 12-3: Please set unused IQ pins to NC


Note 12-4: The enable pin of acoustic or optoelectronic devices (e.g. SPK, AMP/Backlight/Charger OCP/VP) suggest to use Peripheral_EN[0:3]. If use other GPIOs as enable pin, suggest to reserve I201 NC to GND

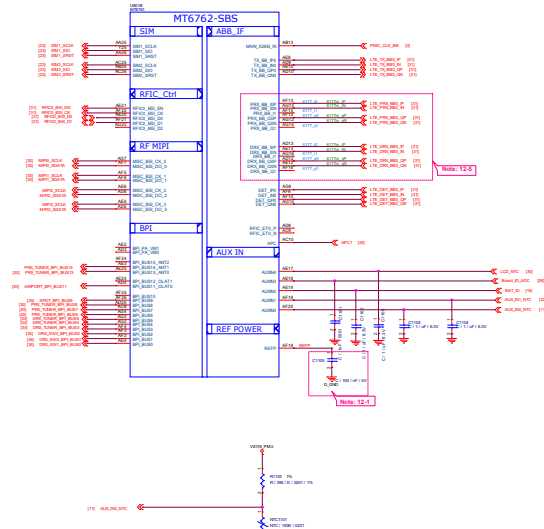

Thermistor to sense AP temperature

1. 70°C/180msec keep a distance about 5-8 mm away from AP and far from any heat sources (if exist at all).
2. The distance to the thermistor between these package edge is 4mm.





Note: 28:-




22 23

Note: 28.4


Note: 28-5



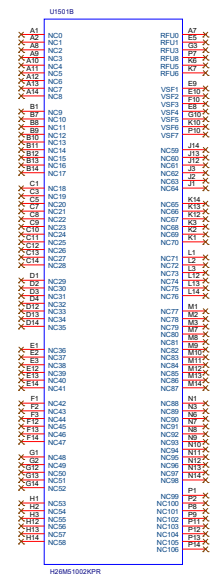


Project	C1517	C1418
MT6765	2.2uF	1uF
MT6762	2.2uF	1uF
MT6761	0.1uF	0.1uF

Class K PA


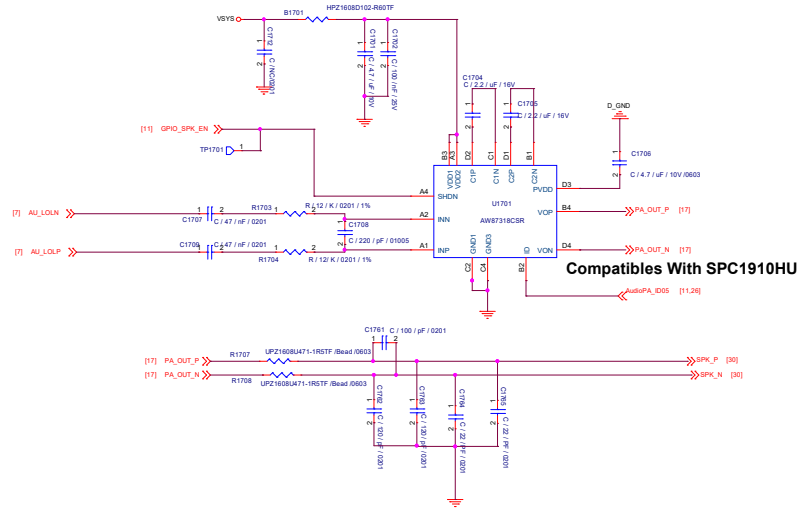


Rev			
Amman			
Doc			
Document Number			
Speaker			
Rev			
V1.0			
Date			
Wednesday, April 01, 2008			
Sheet			
17 of 38			

MIC2

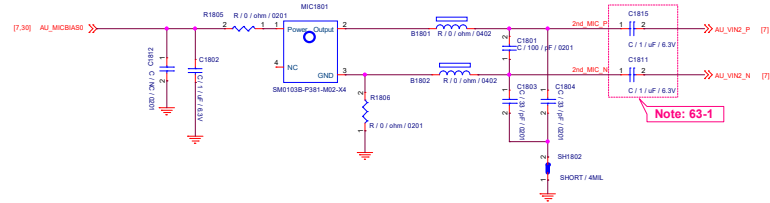

MIC1

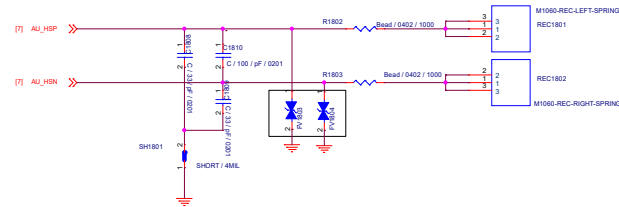


Schematic design notice of "63_PERI_AUDIO_IO" page.

Note 63-1: 1 uF for ACC mode
0 ohm for DCC mode


Rev	Ammann			Rev
Doc	Document Number	MC		V1.0
Date	Wednesday, April 01, 2020	Sheet	18	of 38

A schematic diagram of a four-bar linkage mechanism. It consists of four links: a ground link (L), a crank link (R), a coupler link (G), and a follower link (M). The ground link is represented by a vertical line on the right. The crank link (R) is connected to the ground at a revolute joint and has a diagonal hatching pattern. The coupler link (G) is connected to the crank and the follower. The follower link (M) is connected to the ground at a revolute joint. The diagram is labeled "L-R-G-M" below it.

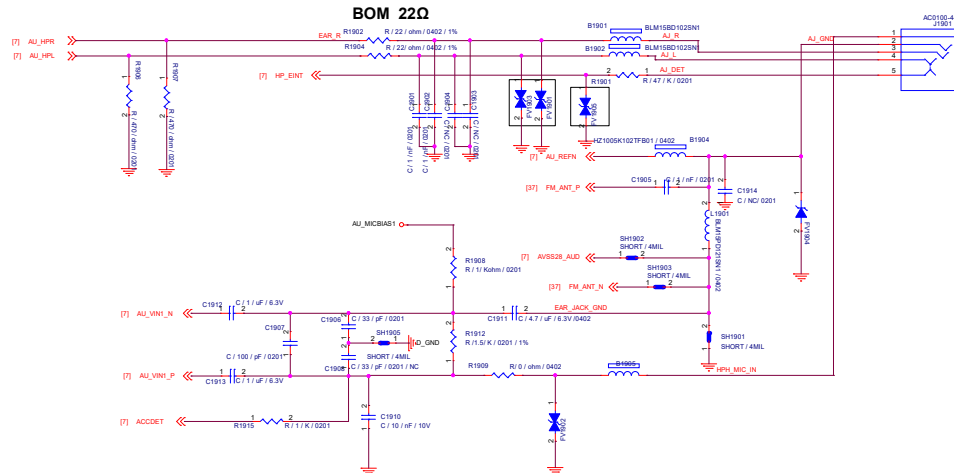


Title			
Amman			
Size	Document Number		Rev
C	Earphone		V1.0
Date:	Wednesday, April 01, 2020		Sheet 19 of 33

Main LCM

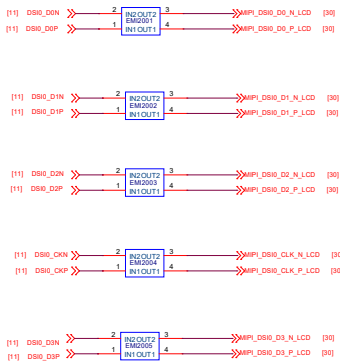


File: Arman			
File: C	Document Number: LCD IF	Rev: V1.0	
Date: Wednesday, April 01, 2009	Sheet: 20	of	38


Main Camera

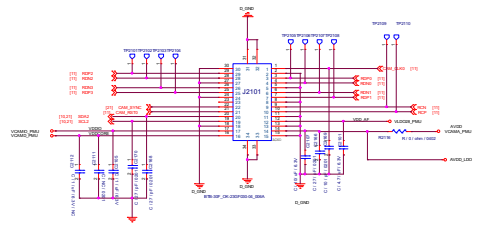


Front Camera

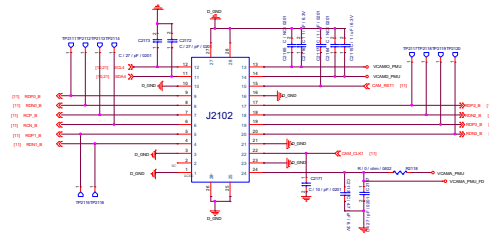


Main Flash LED










Macro Camera

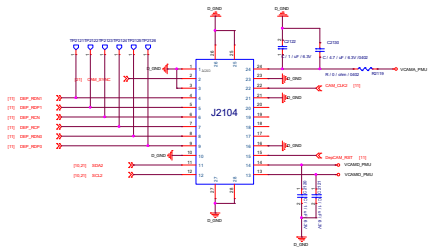


Dep Camera

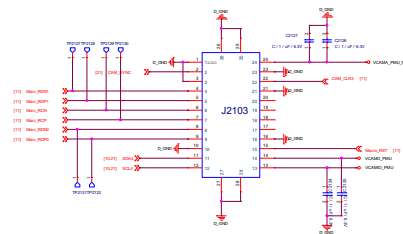

Rev	Author
1	Shenghui Zhang
2	Changhui
3	Shenghui Zhang
4	Shenghui Zhang
5	Shenghui Zhang
6	Shenghui Zhang
7	Shenghui Zhang
8	Shenghui Zhang
9	Shenghui Zhang
10	Shenghui Zhang

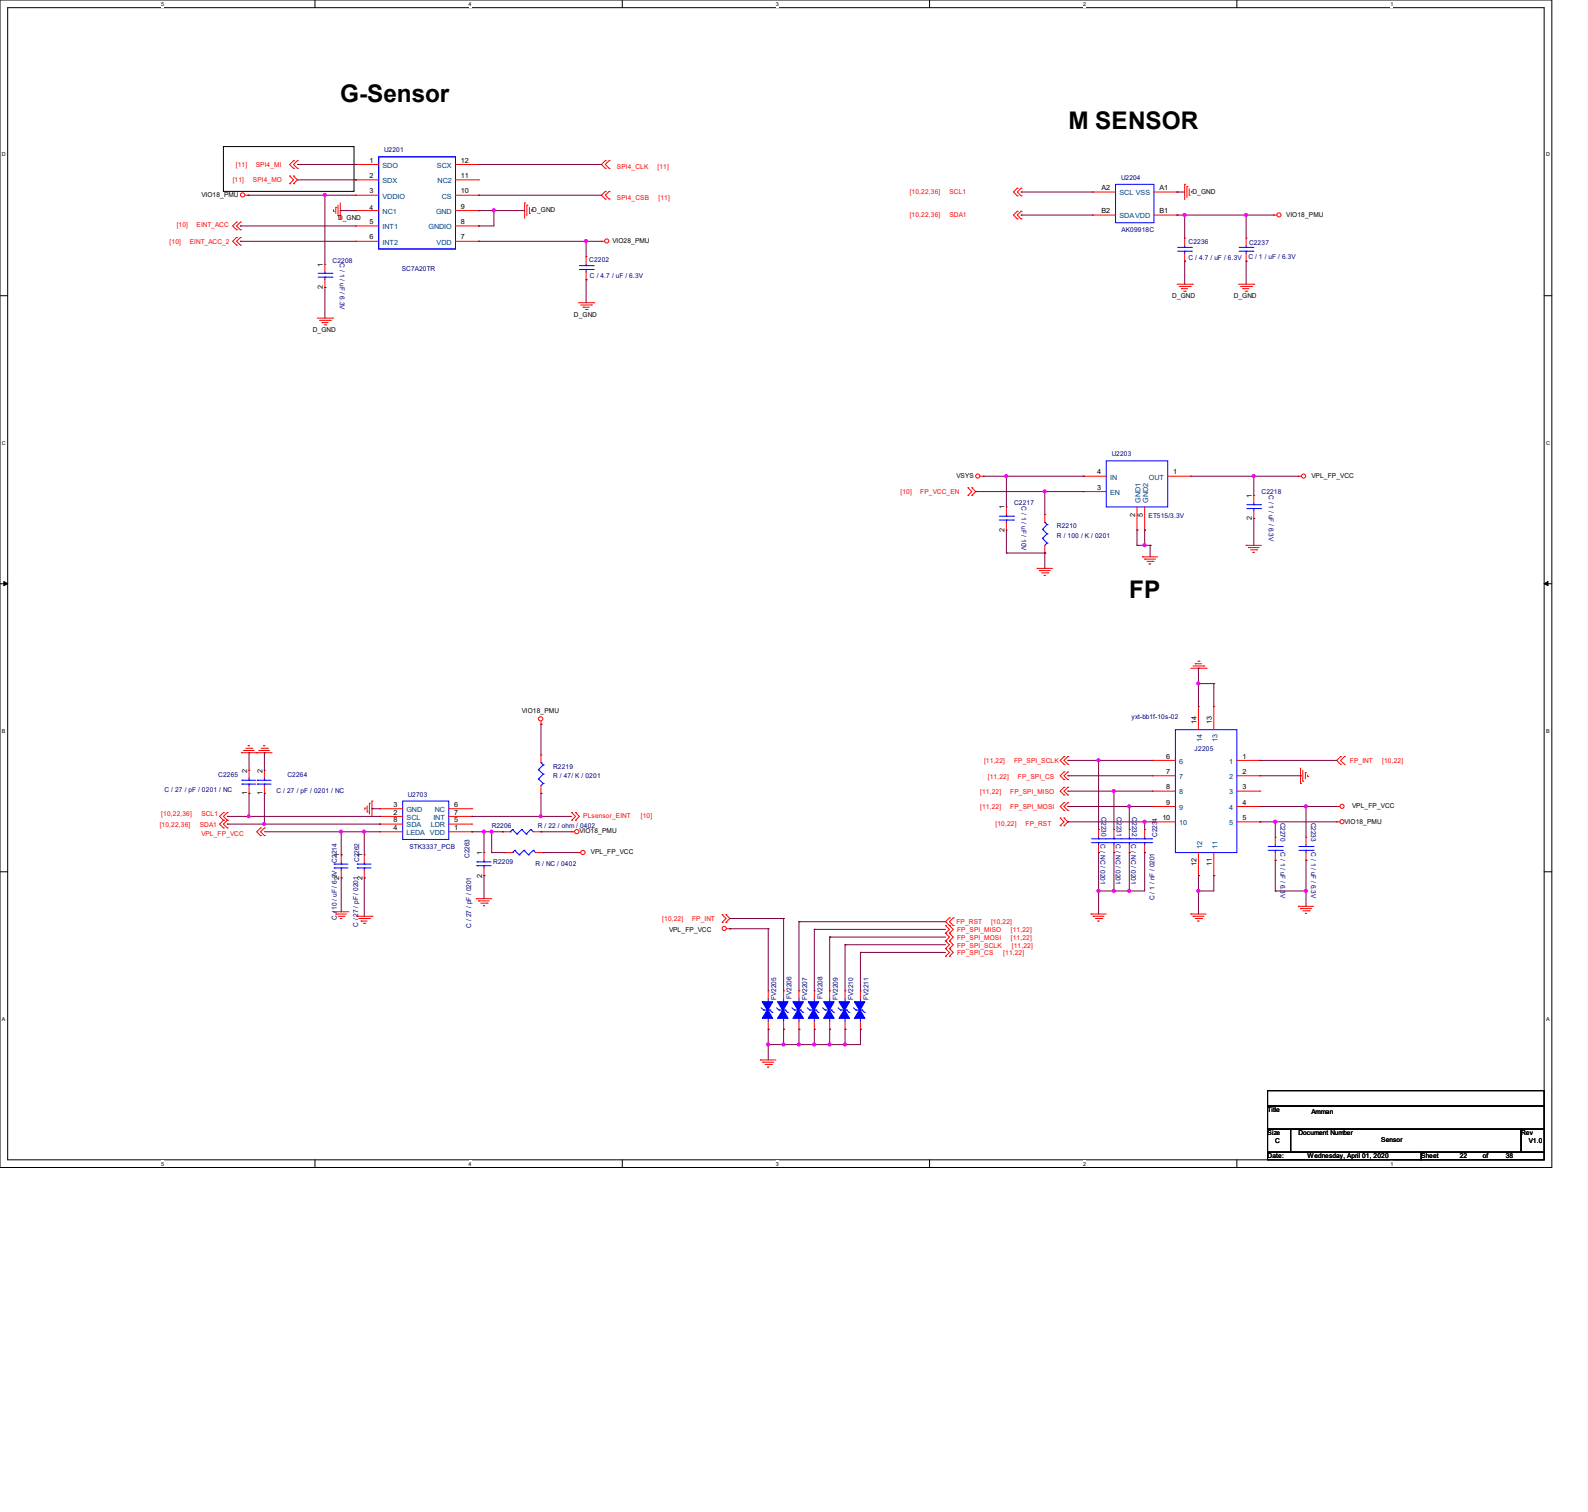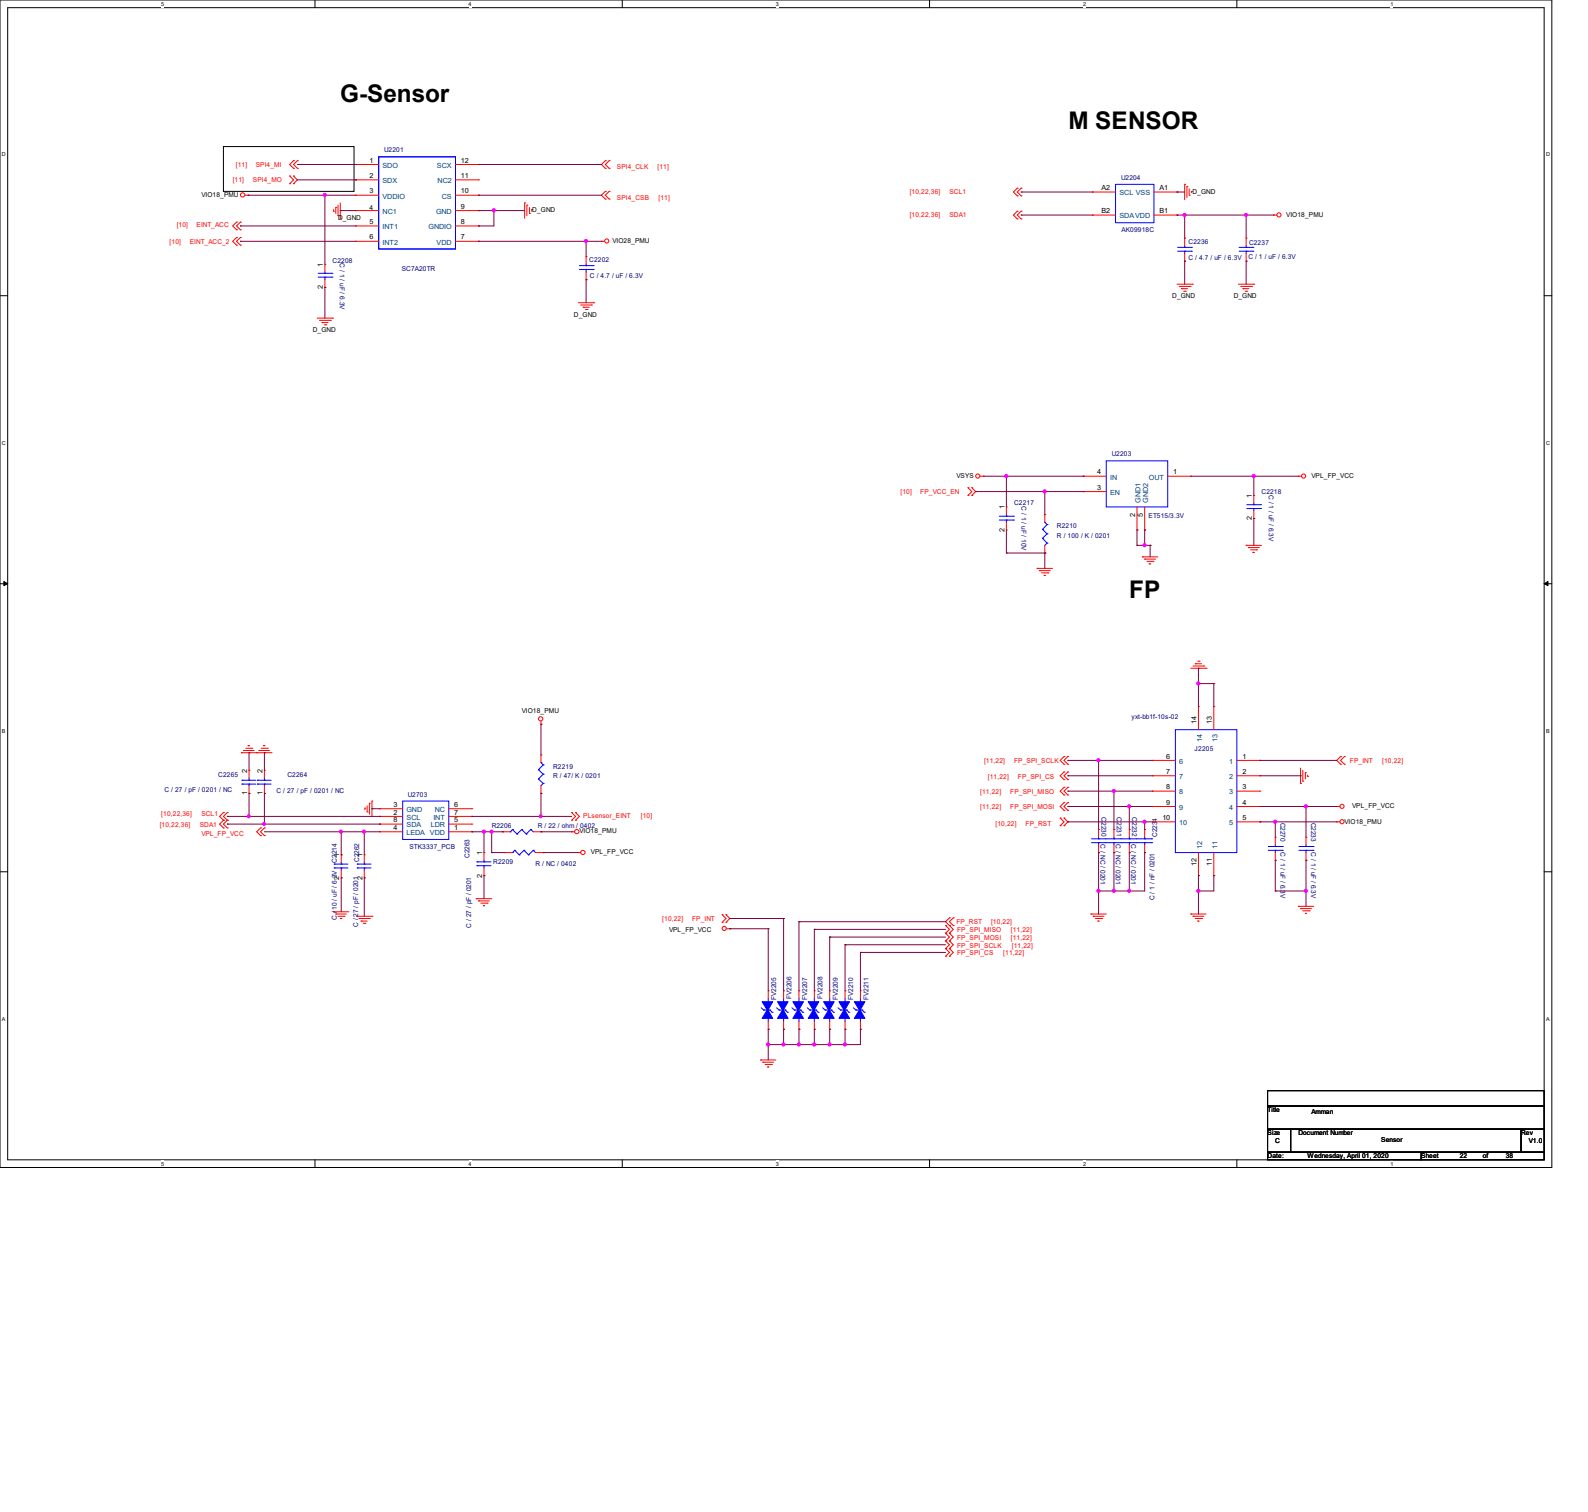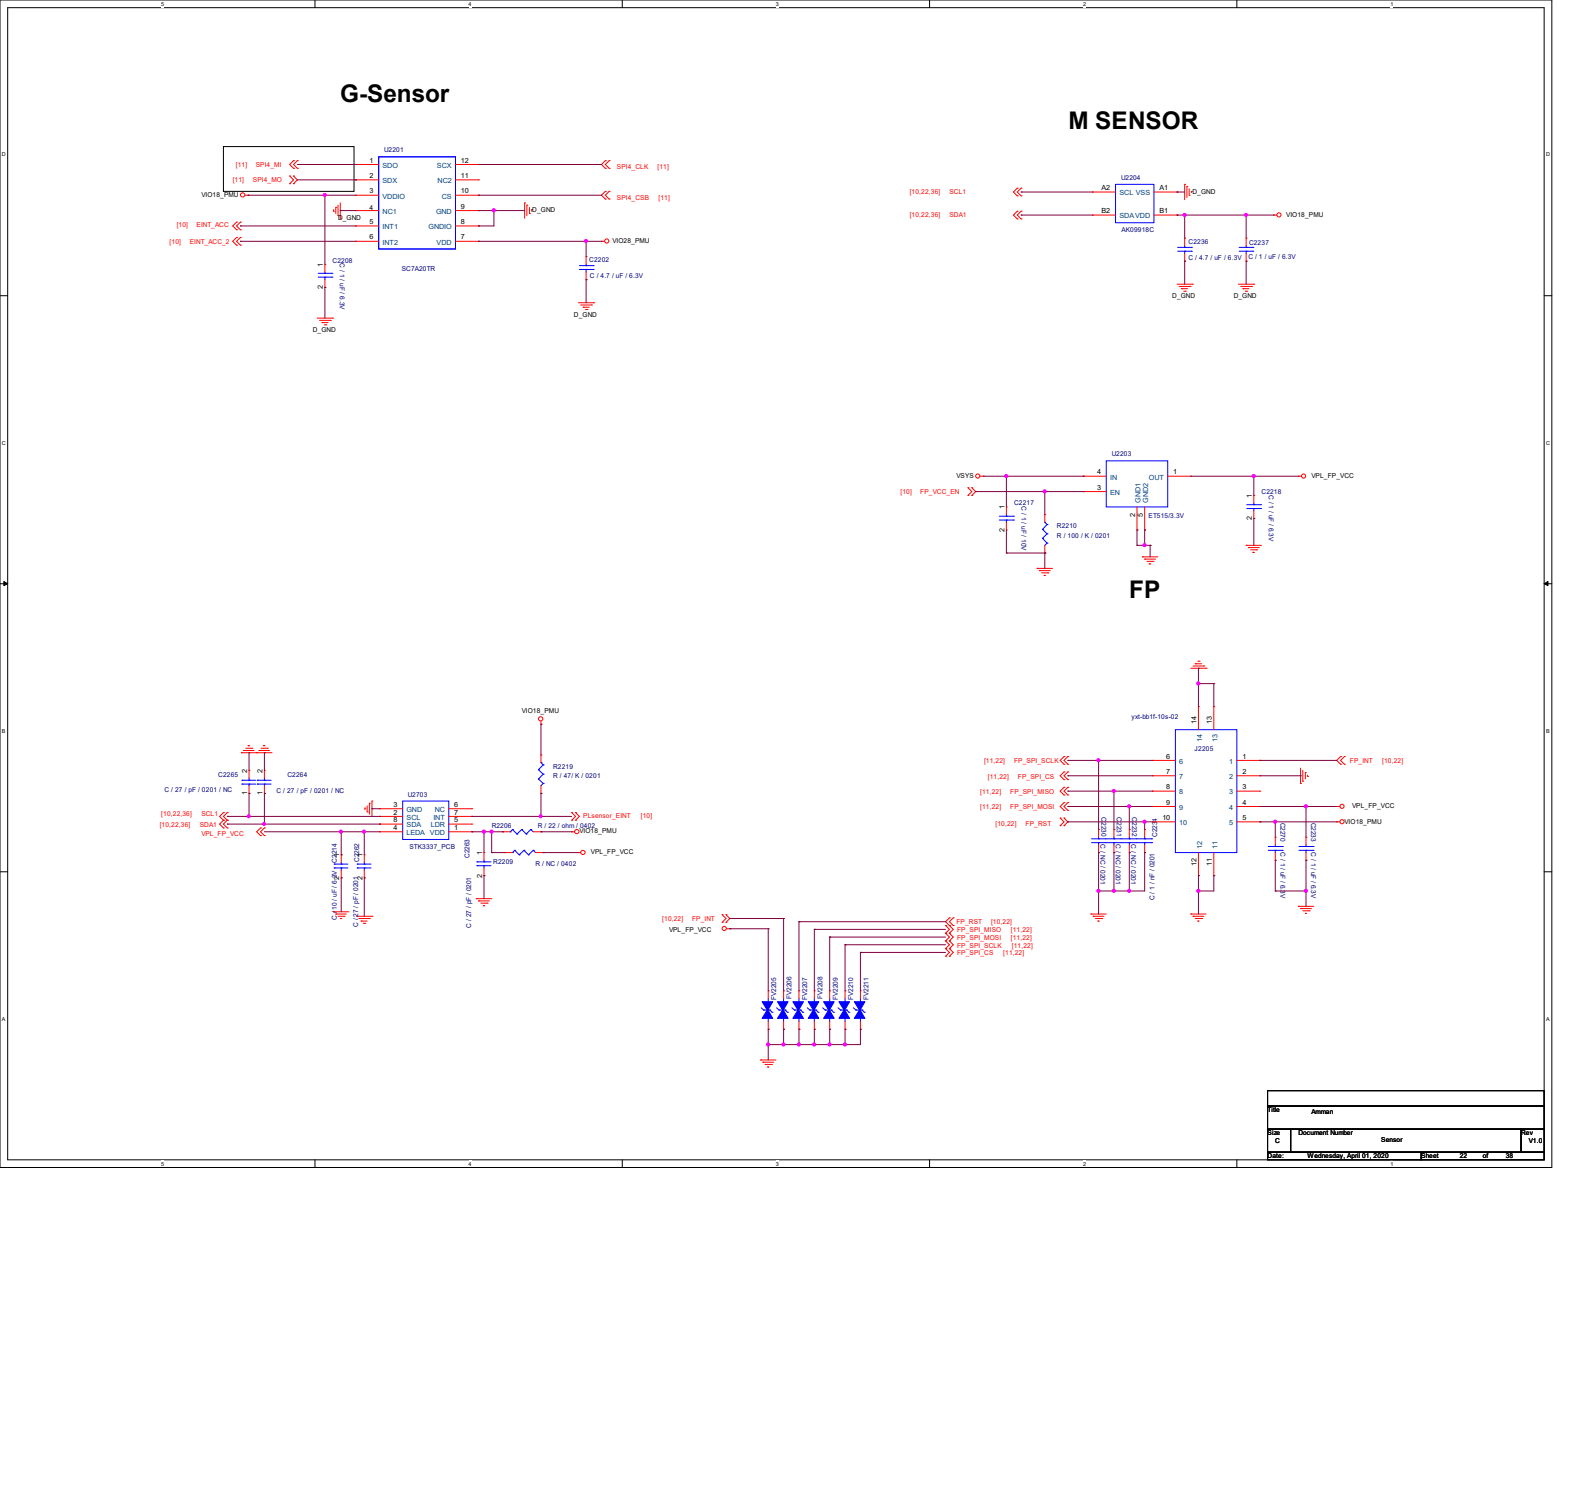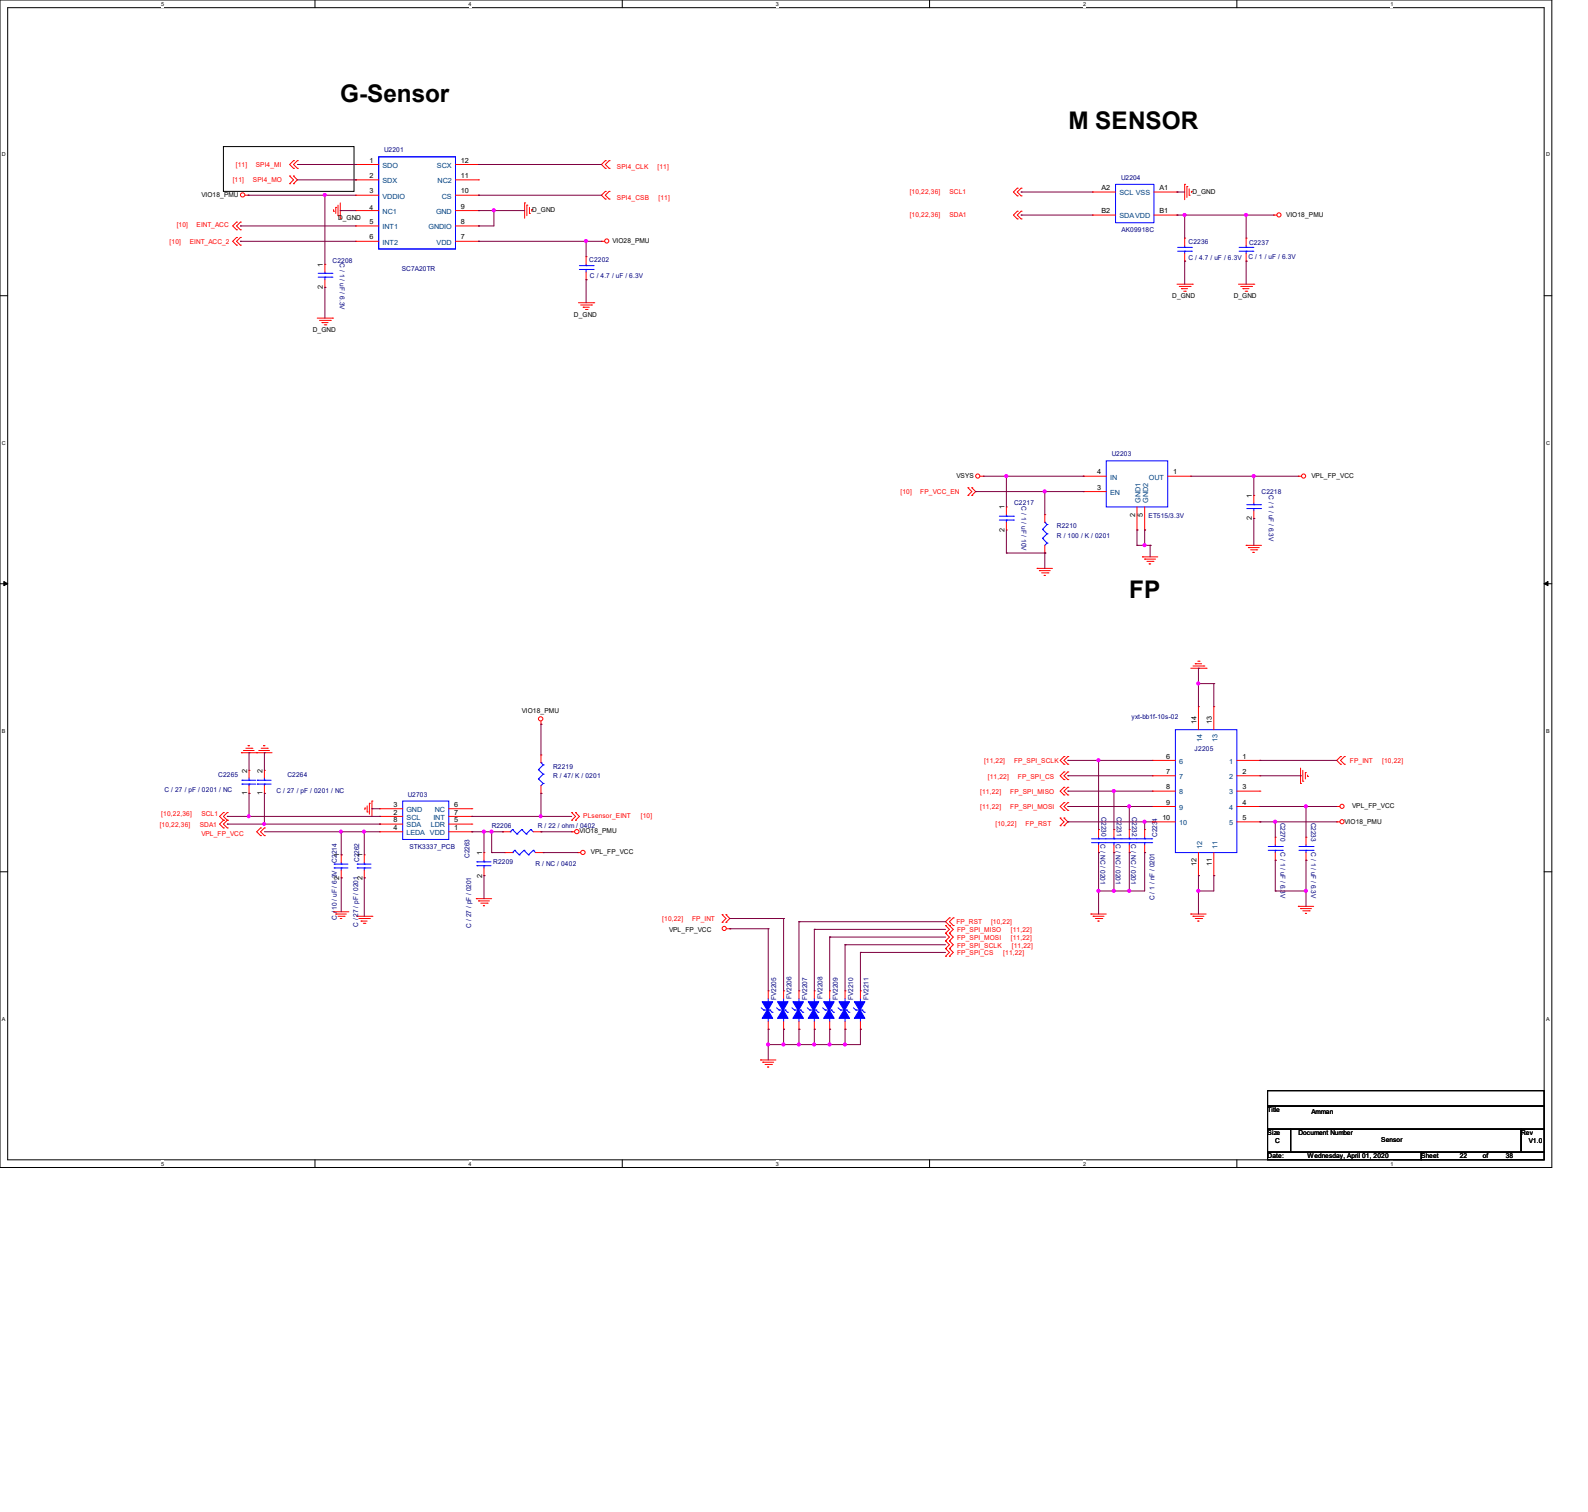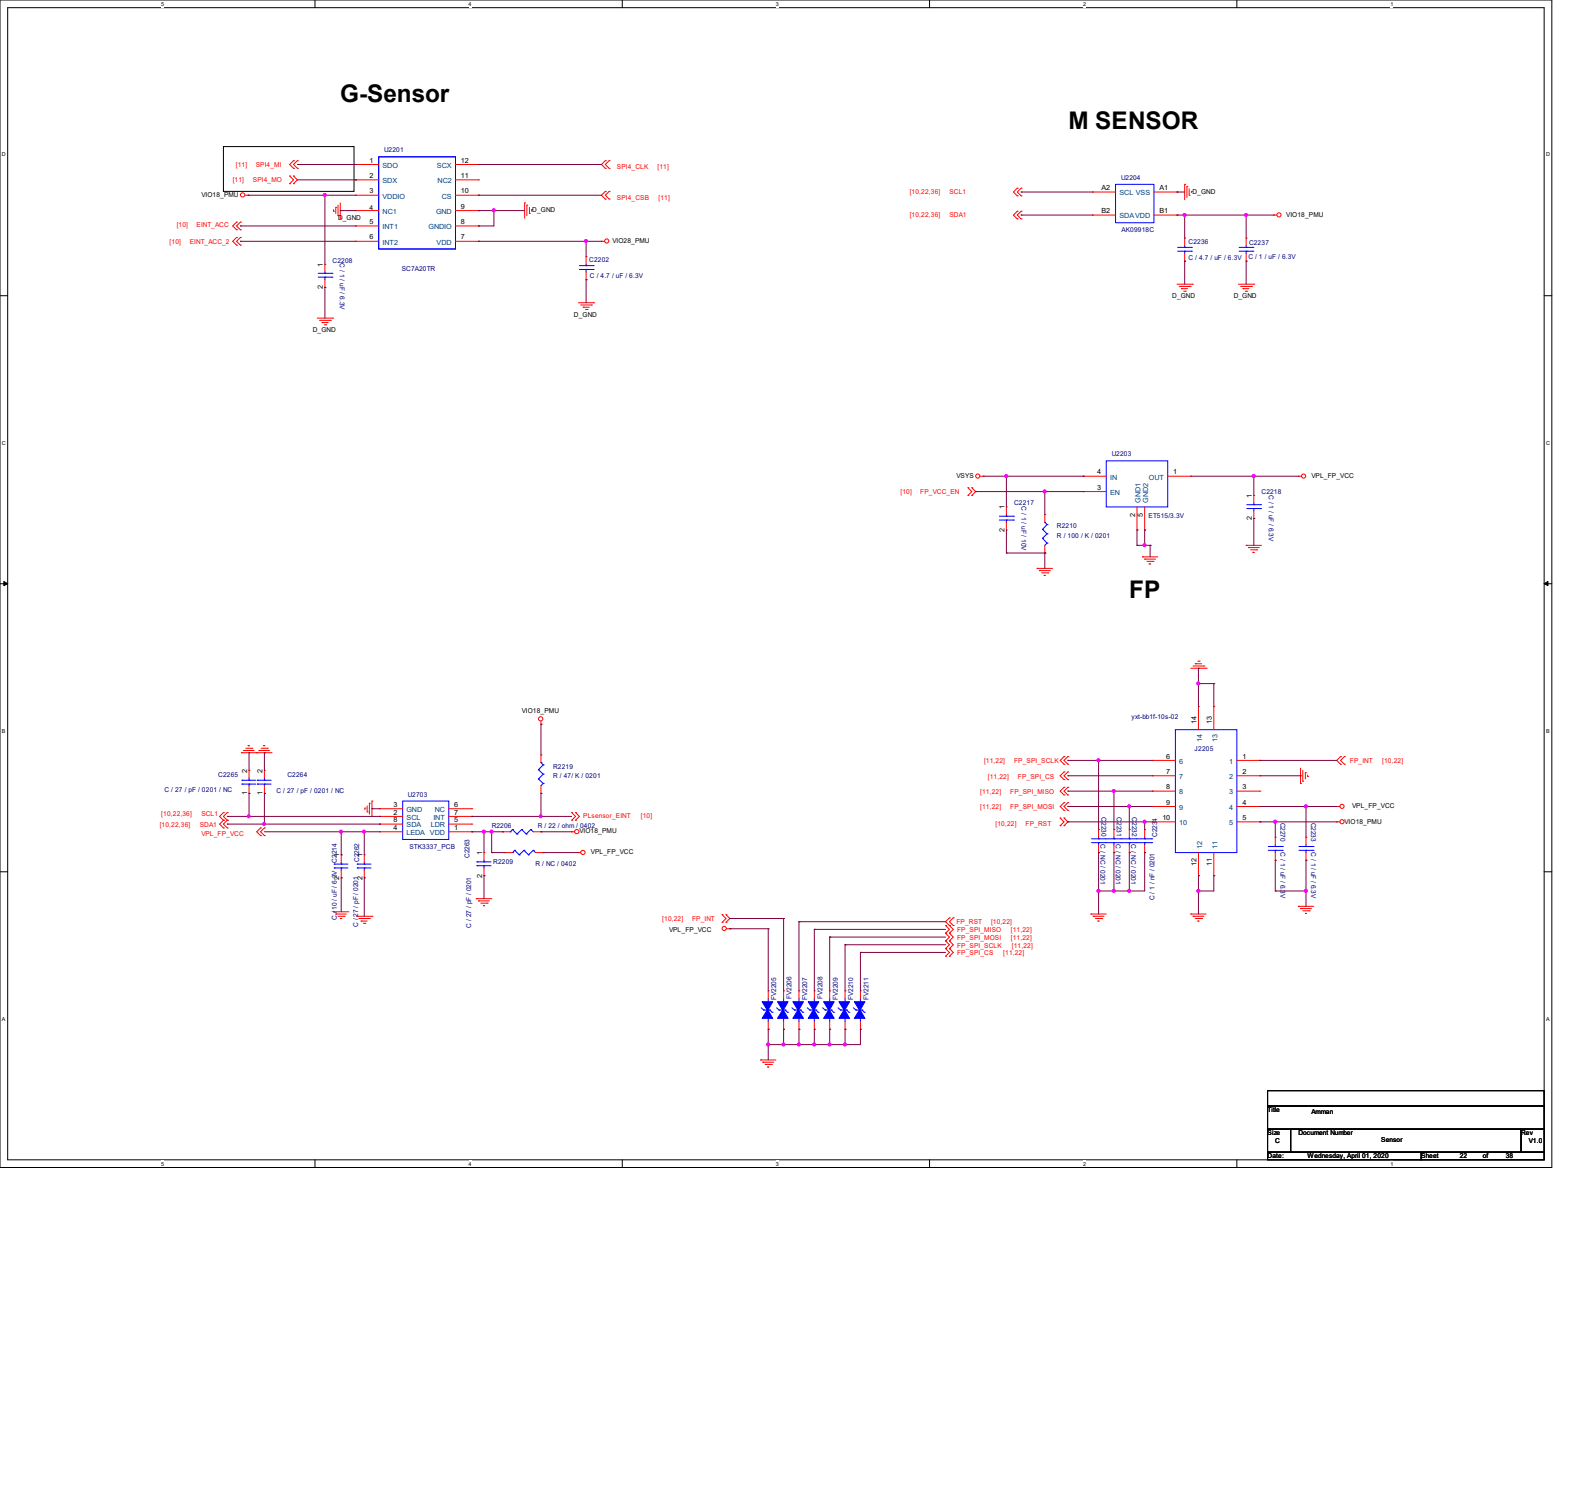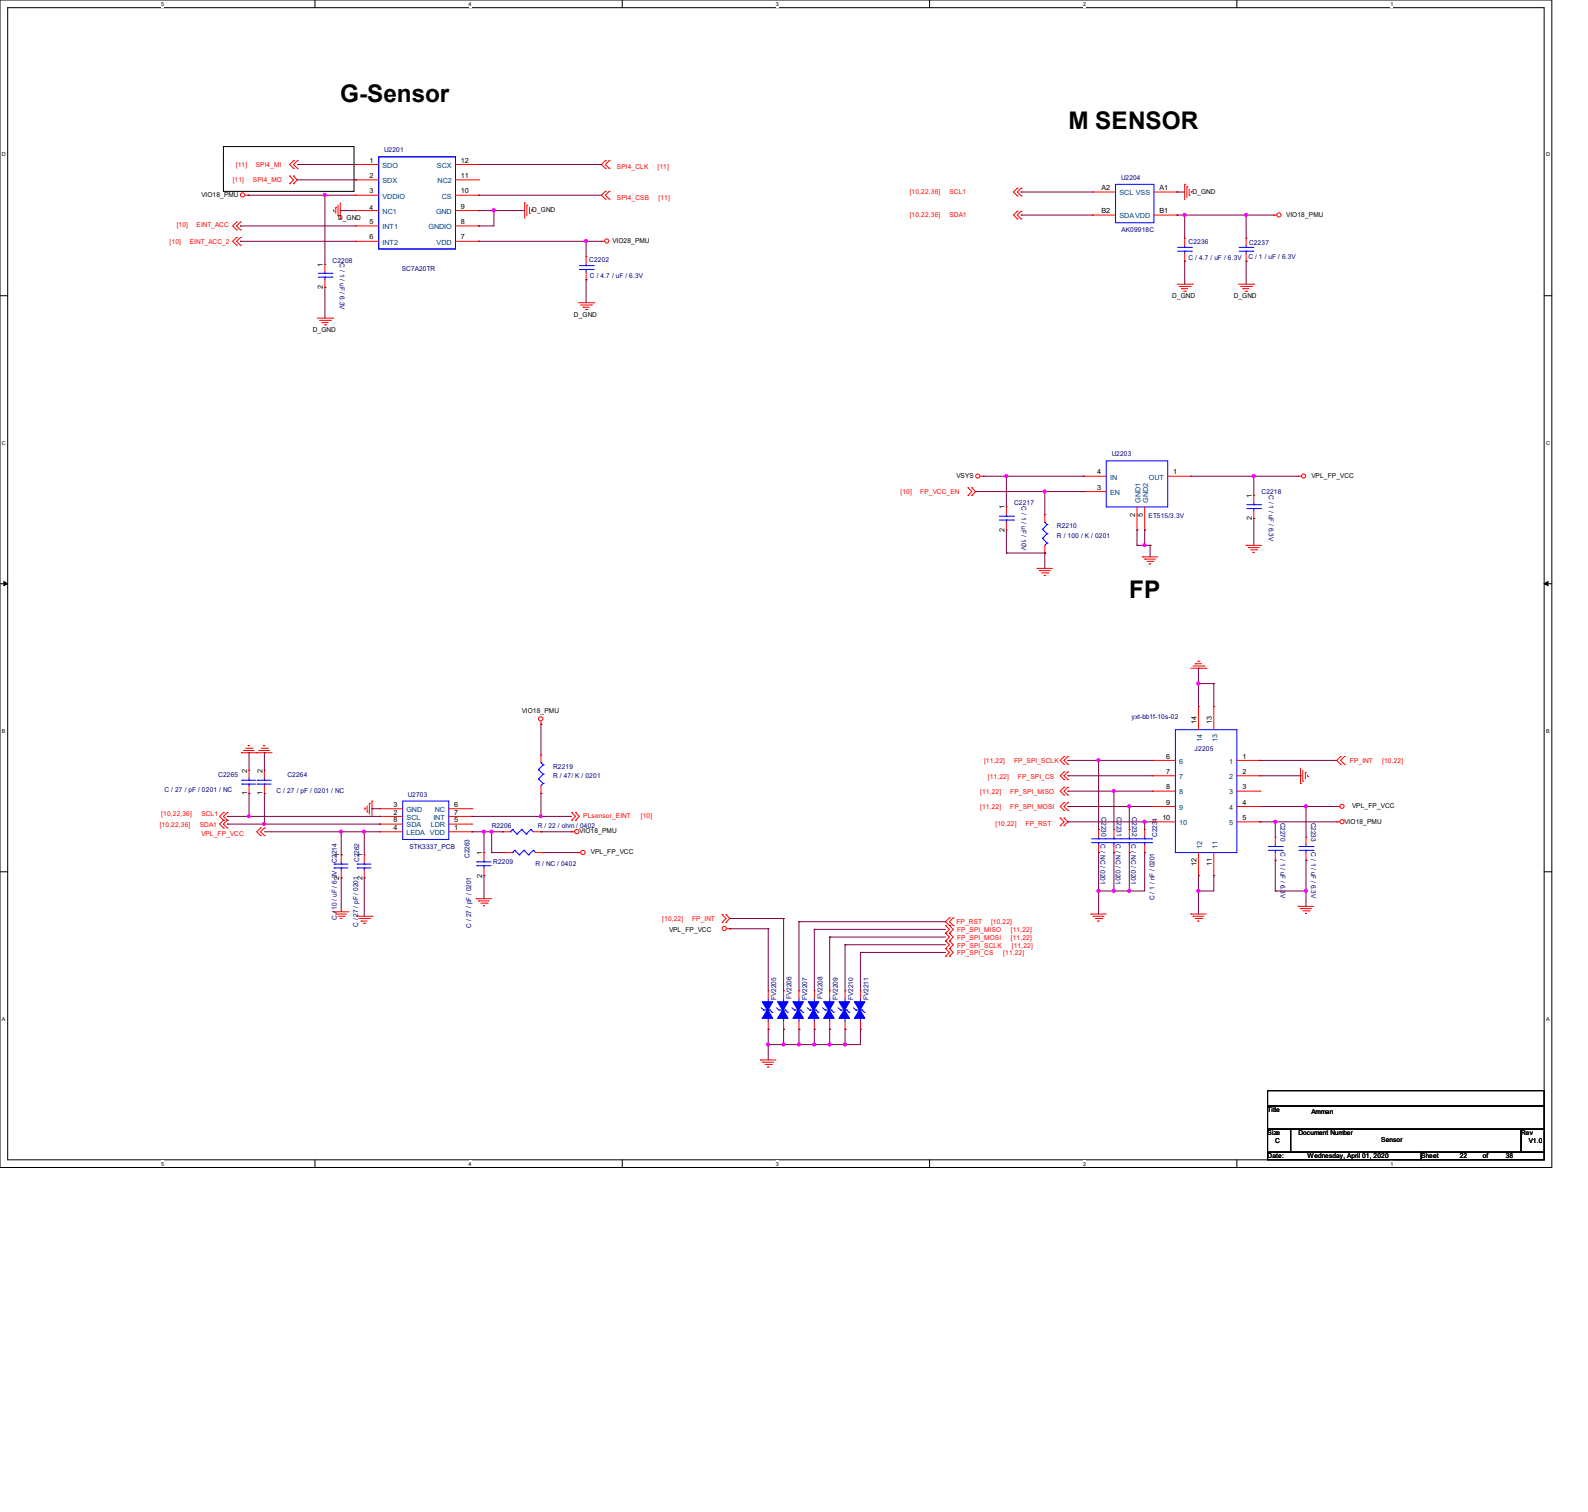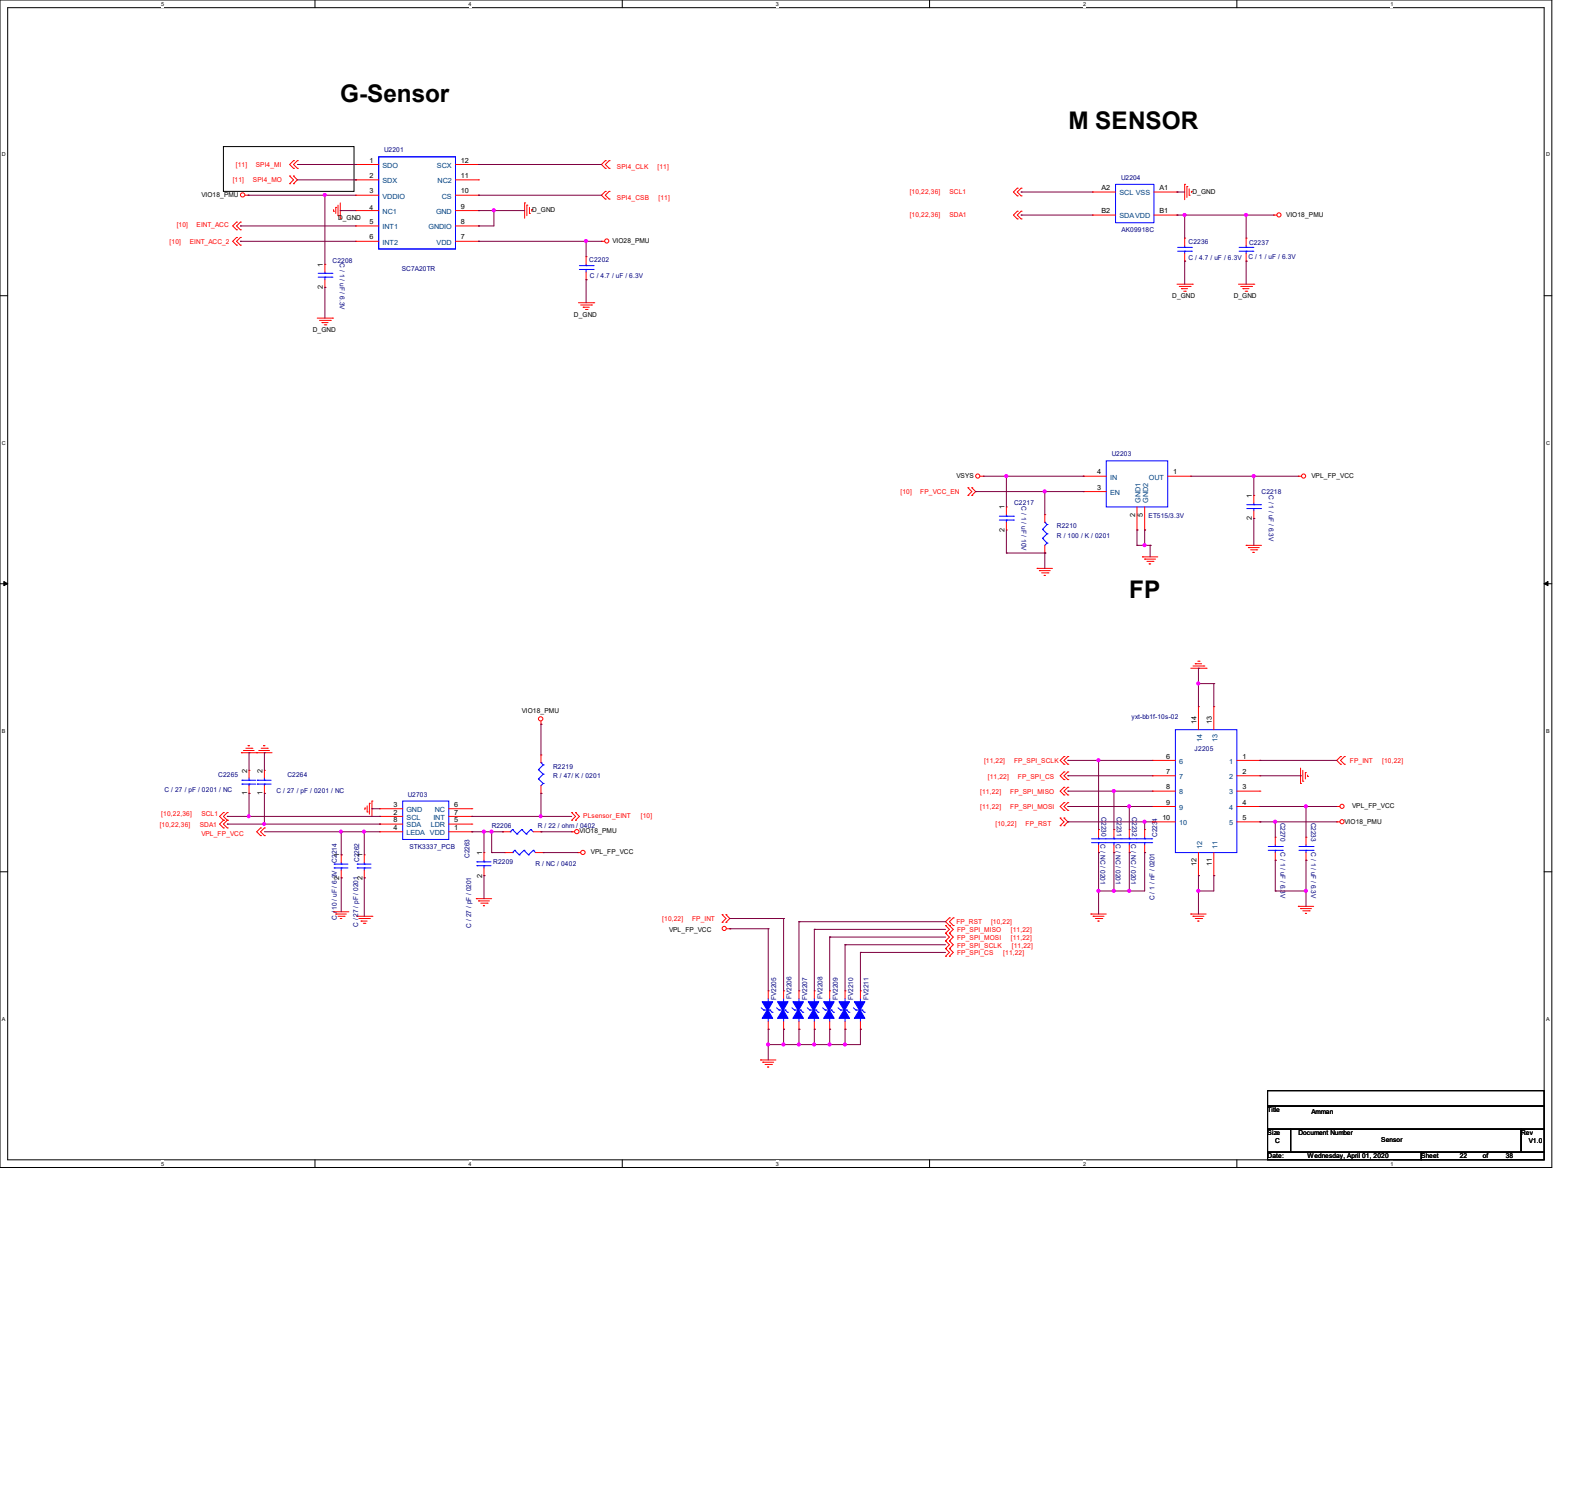



SIM1

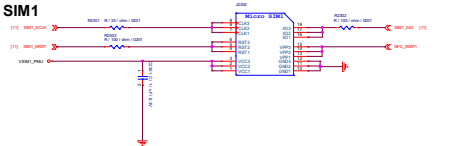


SIM2



SD CARD

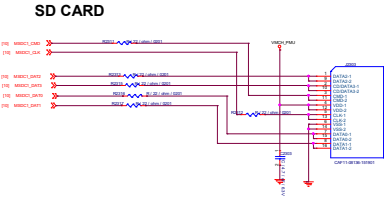

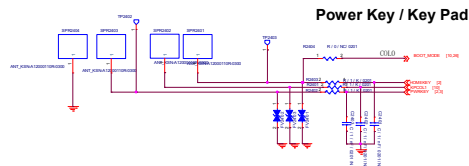

Rev	001
Author	John Doe
Checked By	John Doe
Approved By	John Doe
Date	2023-10-27


USB







BAT



eMMC



Board_ID



Revision			
Rev	Document Number	Test Point	Rev
C			V1.0
Date	Wednesday, April 01, 2020	Sheet	25 of 35

Note 52-1: NFC host I/F and power info are listed in the above connector, NFC COB reference schematic is in the file named "MTK ST NFC Reference Schematic_20170809"

Note 52-2: When NFC is applied, please keep
1. 0ohm NC between VSIM1_PMU and SIM1_VCC
2. 0ohm NC between VSIM2_PMU and SIM2_VCC

Note 52-3: When NFC is applied, please follow NFC COB reference schematic to draw NFC COB schematic

File		Ammon		
Rev		Document Number		Rev
C		NFC		V1.0
Date		Wednesday, April 01, 2020	Sheet	27 of 38

贴片器件，钢网要开



Shielding frame



Marks point



File		Author	
Rev	Document Number	Shielding	Rev
C			V1.0
Date: Wednesday, April 11, 2023		Sheet	29 of 35

