


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
A	SAMSUNG CONFIDENTIAL THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO.'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.																A
B																	B
C																	C
D																	D
E																	E
F																	F
G																	G
H																	H
I																	I
J																	J
K																	K
L																	L
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	

SM-A530D_REV04

2018.07.30


- sheet01 : GSM / WCDMA / LTE RF
- sheet02 : TRANCEIVER, DRX
- sheet03 : SENSORS, GPS, BT/WIFI, NFC, ISDBT, BTP
- sheet04 : LASSEN (EXYNOS7885)
- sheet05 : PMIC (Main,IF), KEY, MOTOR, eMMC, IF CON
- sheet06 : Audio, SD/SIM, SHIELD CAN
- sheet07 : CAMERA, DISPLAY

Engineer:			
Drawn by:			
RED CHK:	TITLE: SM-A530D		SIZE: A1
DOC CTRL CHK:			
MFG ENGR CHK:			
QA CHK:	REV:	Drawing Number:	Page: 1

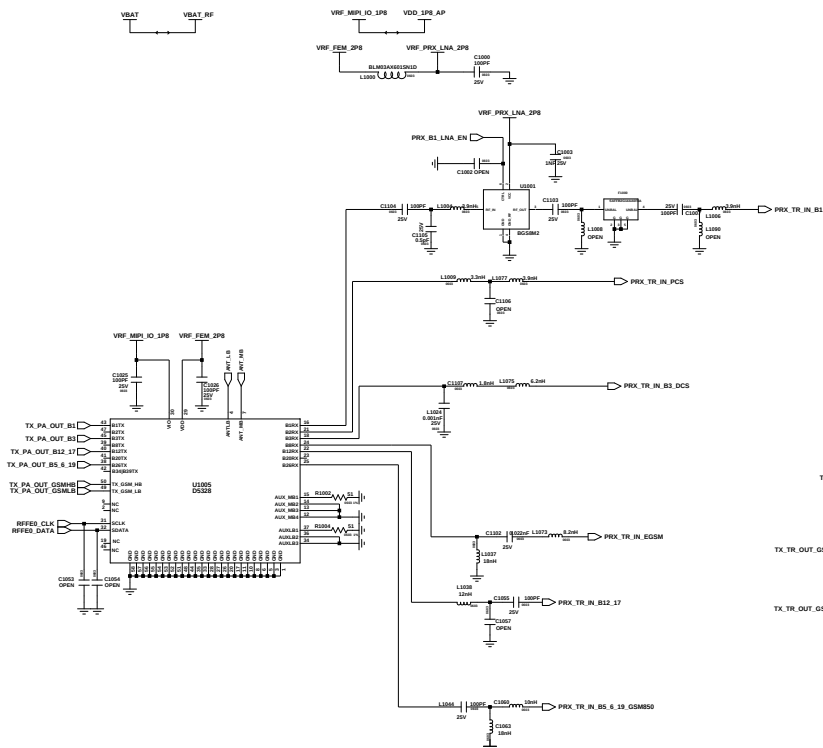

MMMB PA


MAIN CA FEMID

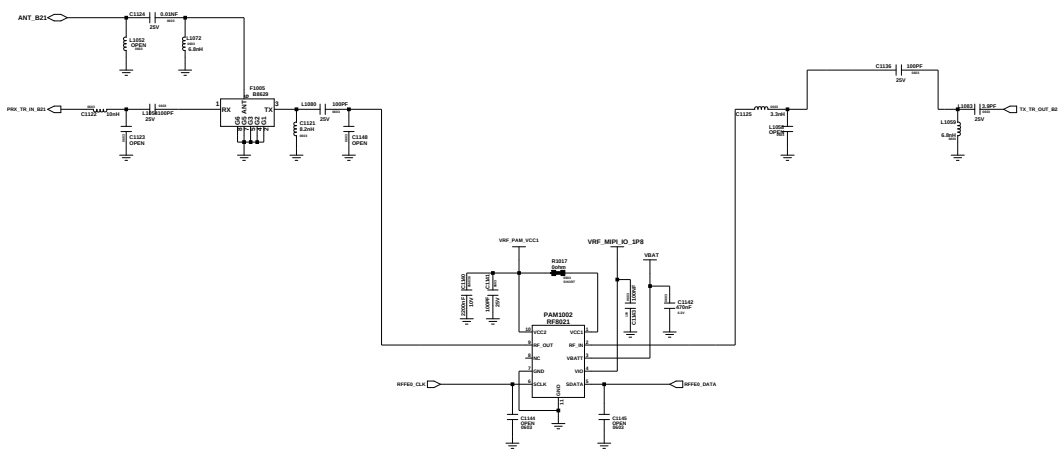

APT MODULATOR



Grip Sensor

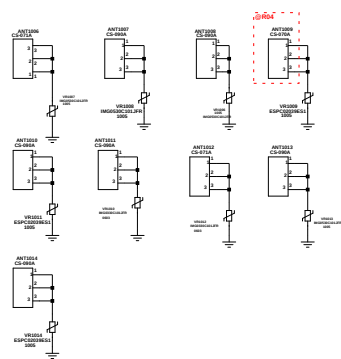

GND CONTACT



	VDD_SENSOR_1P8	VDD_SENSOR_1P8
--	----------------	----------------



VDD_SENSOR_1P8

BLM06A-1025N1D

AH18W75

VDD OUT

GND NC

TP3018

HALL_INT

(For Filp open/close)



1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---






[illegible]

Figure 10 is a schematic diagram of the test setup for the U3019. The diagram shows the U3019 device with pins A5, E2, Q3, and B5 connected to a test circuit. Pin A5 is connected to RF_IN. Pin E2 is connected to LDO_R1_VDD0M. Pin Q3 is connected to DVDD0TAL_ADC_VDD. Pin B5 is connected to RF_VDD_ACD0. The test circuit includes a CDS56 5.6pF capacitor connected to RF_IN, and a 220 ohm resistor connected to RF_IN. The output of the test circuit is connected to a host via HOST_SEL. The host is connected to a test equipment (represented by a box) which has inputs for ISDBT_XO_IN_TEST and ISDBT_XO_OUT_TEST.

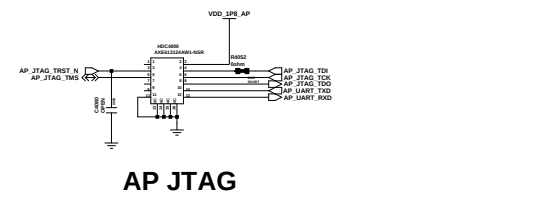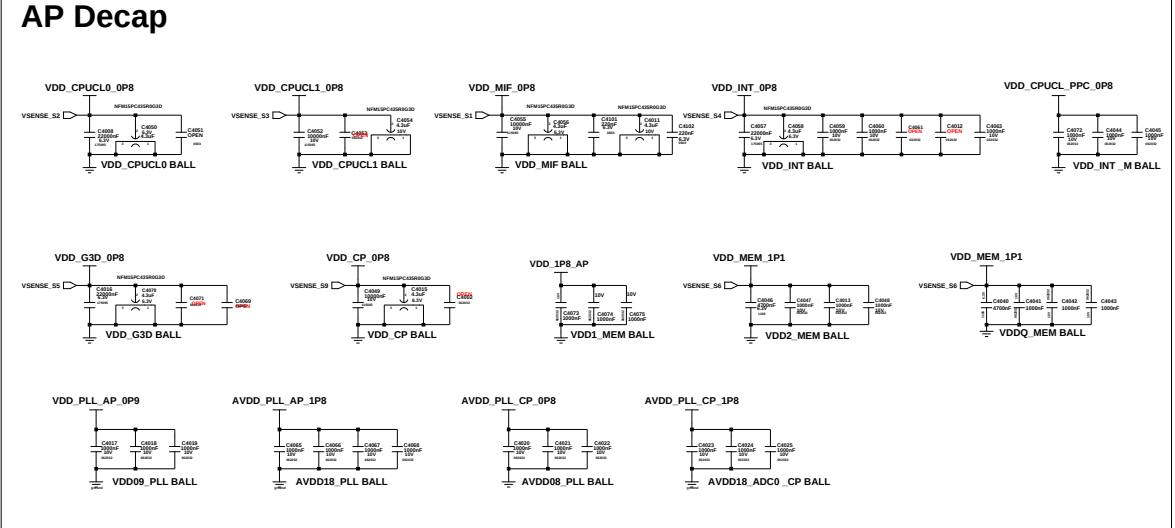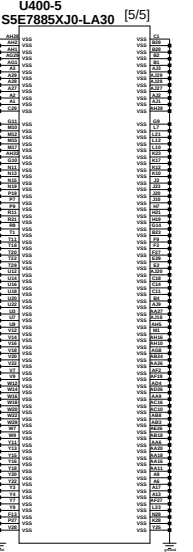


														SM-A330D									
										MFG ENG'GR CHRG:													
										Changed by: user32		Date Changed:		Time Changed:		QA CHR:		REV		Drawing Number:		Page: 2	
9		10		11		12		13		14		15		16									



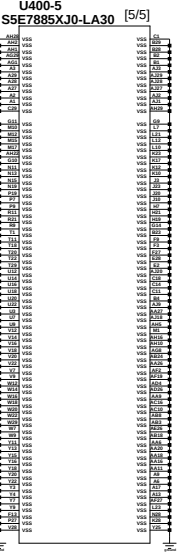


Engineer:	AP				
Drawn by:					
R&D CHK:				TITLE:	Size: A0
DOC CTRL CHK:				SM-A530D	
MFG ENGGR CHK:					
QA CHK:	REV:	Drawing Number:	Page: 4		


MAIN_PMIC

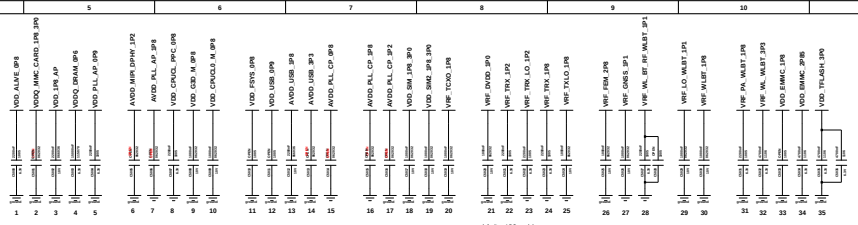


IF_PMIC

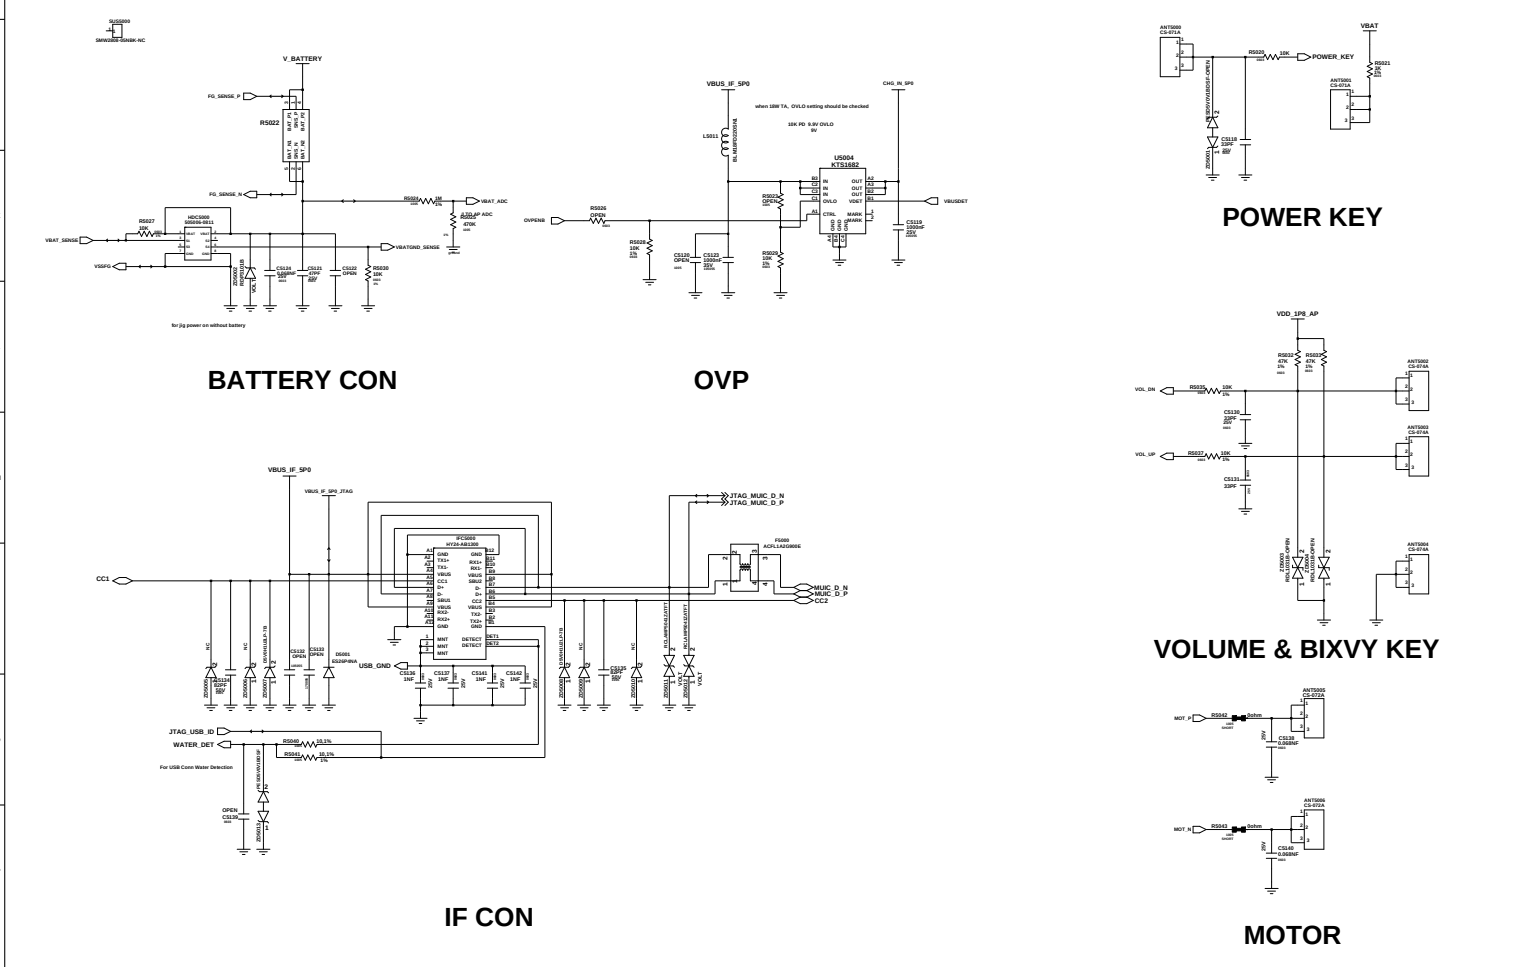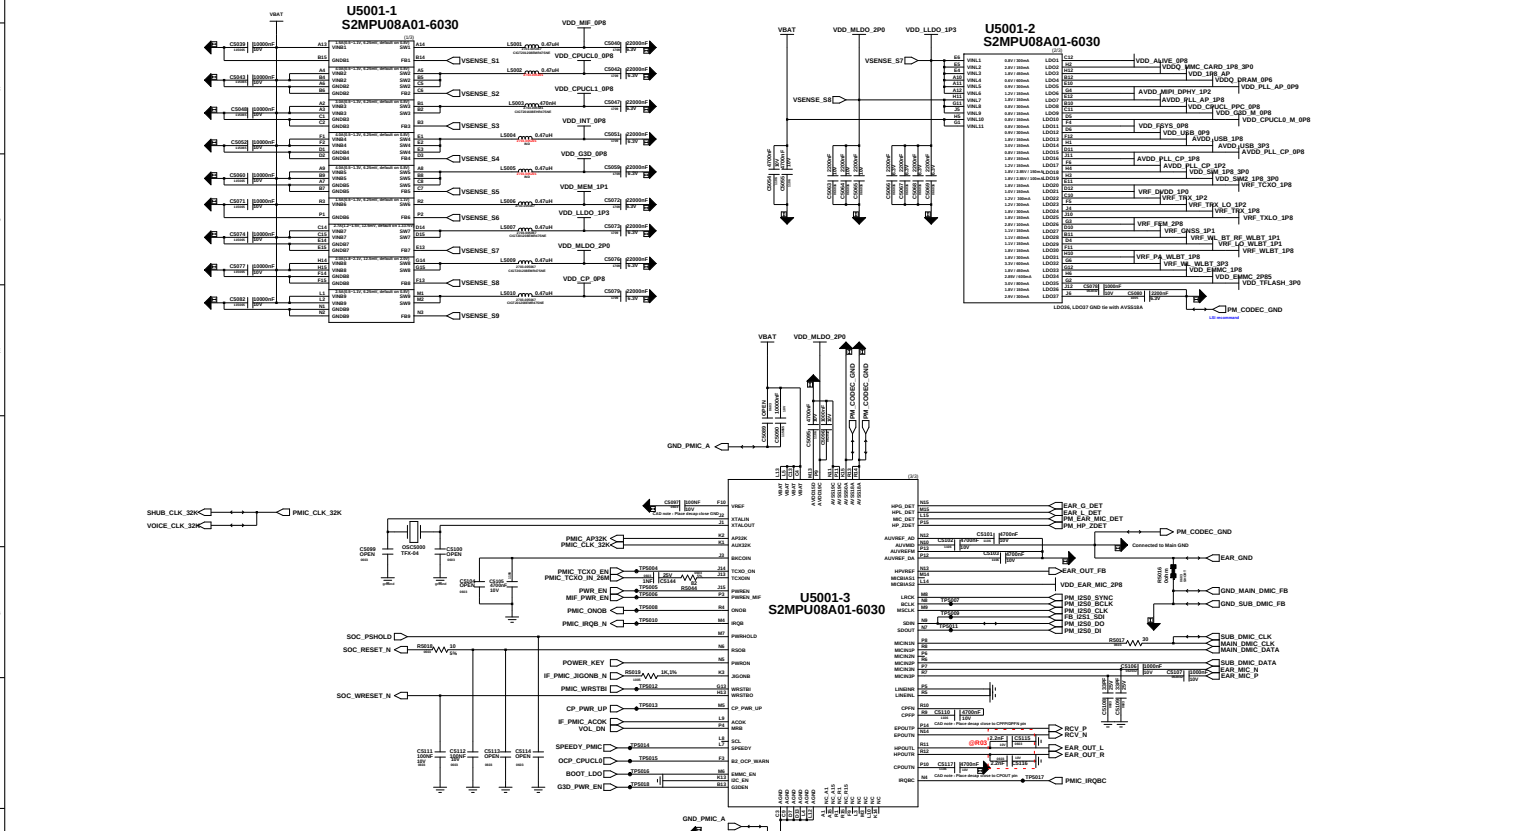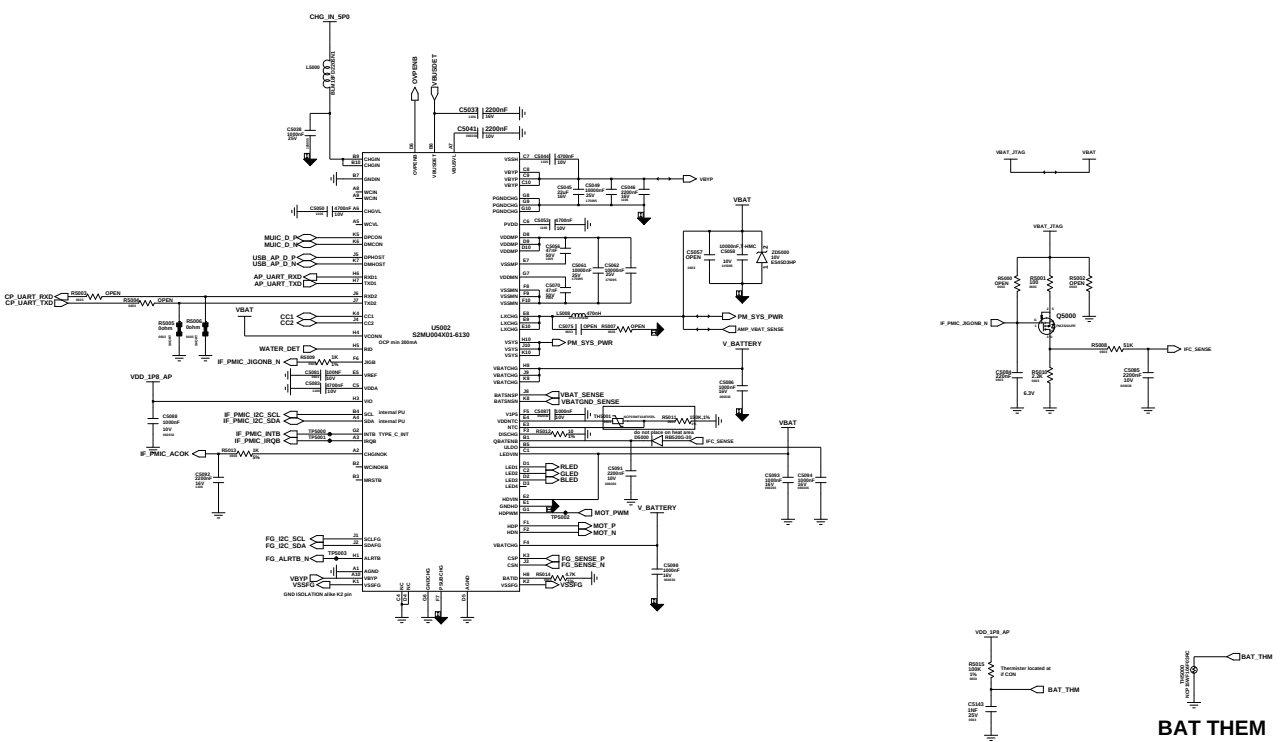


eMMC 32GB 5.1
1st : SEC (1107-002552)

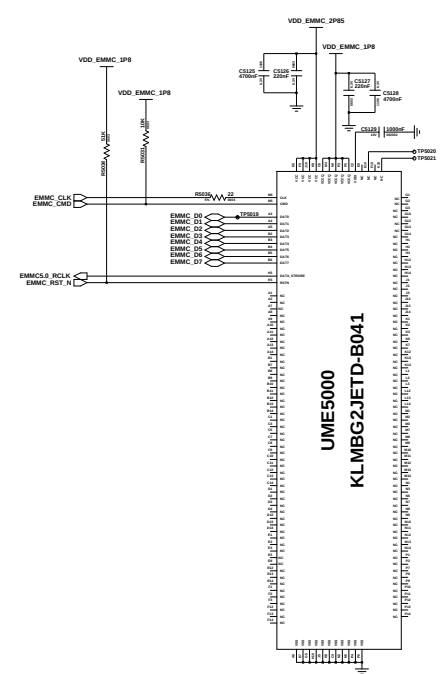

POWER KEY



VOLUME & BIXVY KEY




MOTOR




SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO.'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

AUDIO

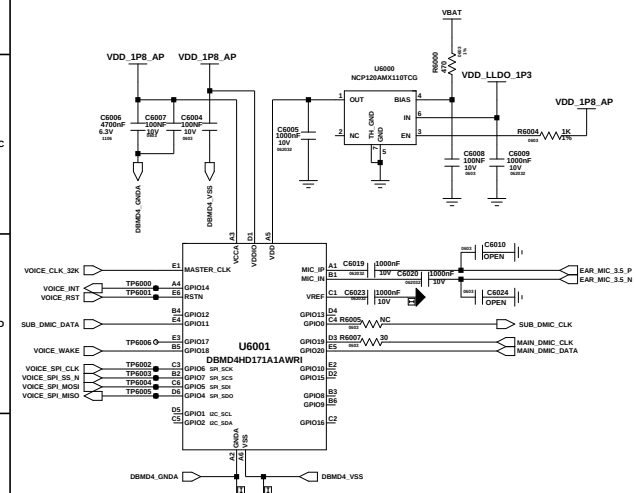


WAKE UP IC


RCV CONTACT

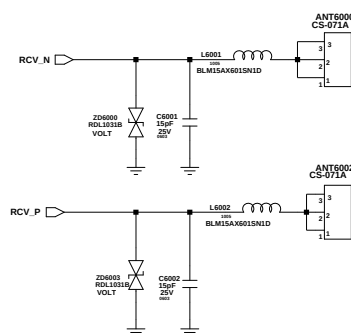


SPK CONTACT

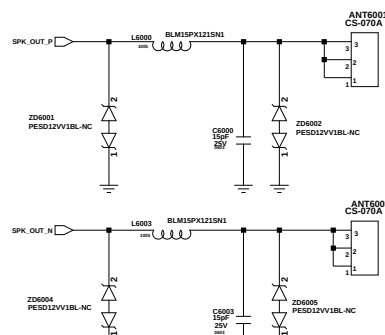

SPK AMP

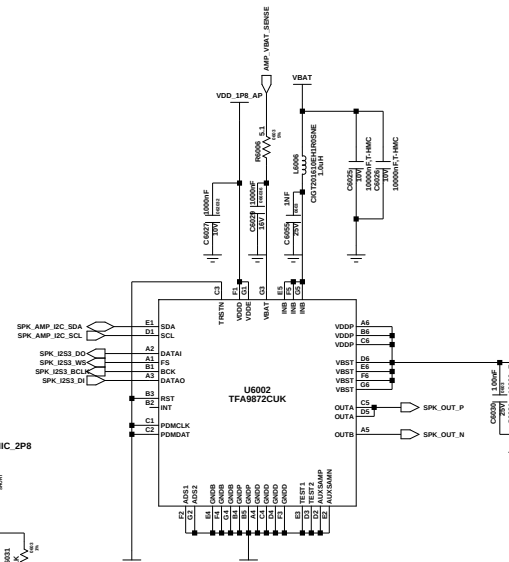


EAR_DET_FOR_ISDBT_ANT

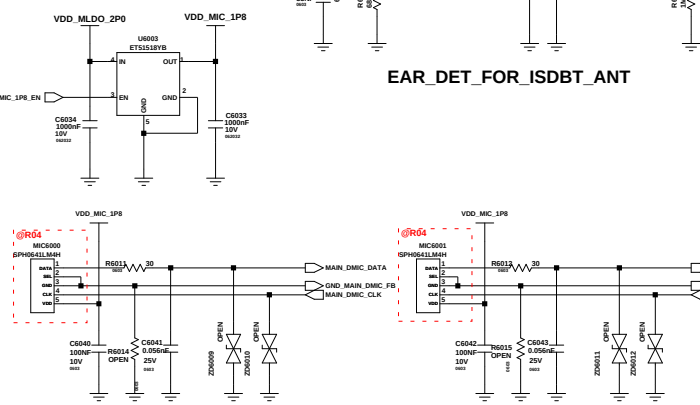

MAIN MIC


SUB MIC

EAR MIC

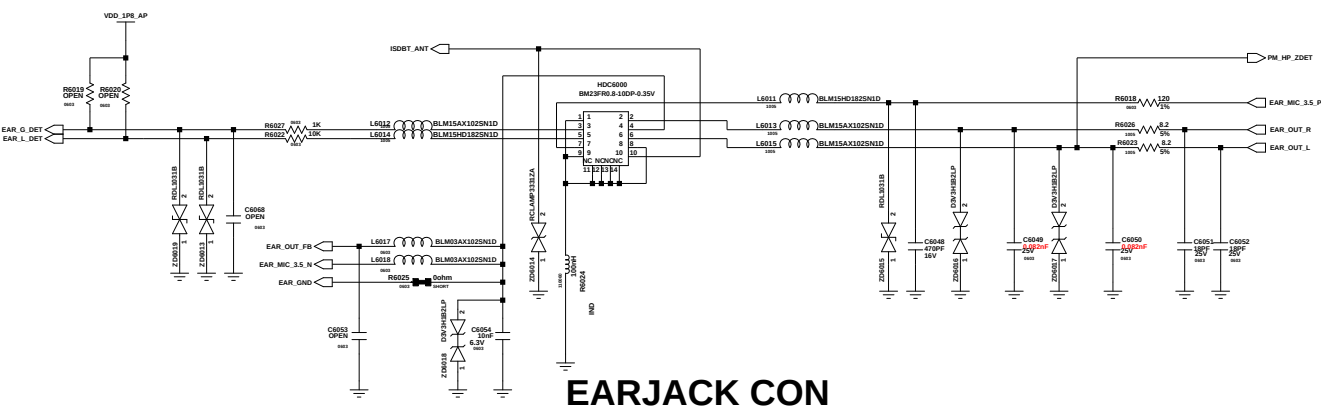

EARJACK CON

SIM & SD CARD

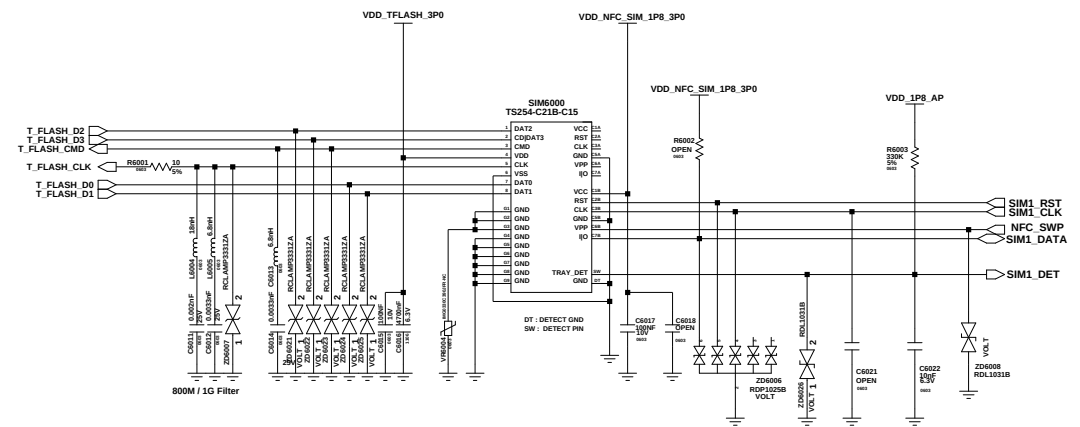

SIM1/ T FLASH

SHIELD CAN/BOTH HOLE

