


Switching Charger Power Path

RTA6953:address: D6H RQ25601:address: 68H

Open switch device for proper good soldering. Connect to pin 202 by 0021.
Note: RTA6953:address: D6H, RQ25601:address: 68H.
Note: RTA6953:address: D6H, RQ25601:address: 68H.
Note: RTA6953:address: D6H, RQ25601:address: 68H.
Note: RTA6953:address: D6H, RQ25601:address: 68H.

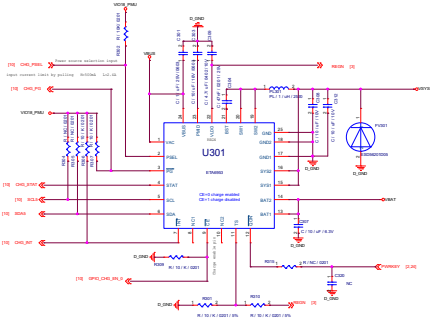


Rev	1.0
File	11_POWER_SubPMIC_Power_Path
Project	11_POWER_SubPMIC_Power_Path
Author	11_POWER_SubPMIC_Power_Path
Check	11_POWER_SubPMIC_Power_Path
Release	11_POWER_SubPMIC_Power_Path

[illegible][illegible]

Title	Armenian		
Size C	Document Number		Rev
	04_POWER_LCMIBIAS_BI_FLASH		V1.0
Date:	Wednesday, April 01, 2020		Sheet 4 of 38

1. "Typical Cap" defined in design notice is the minimum cap. to LDO Cout. 2. NC cap can move to application, if (PCB L<20nH, PCB R<0.2 ohm)
=> value and placement of Cap, please refer design notice

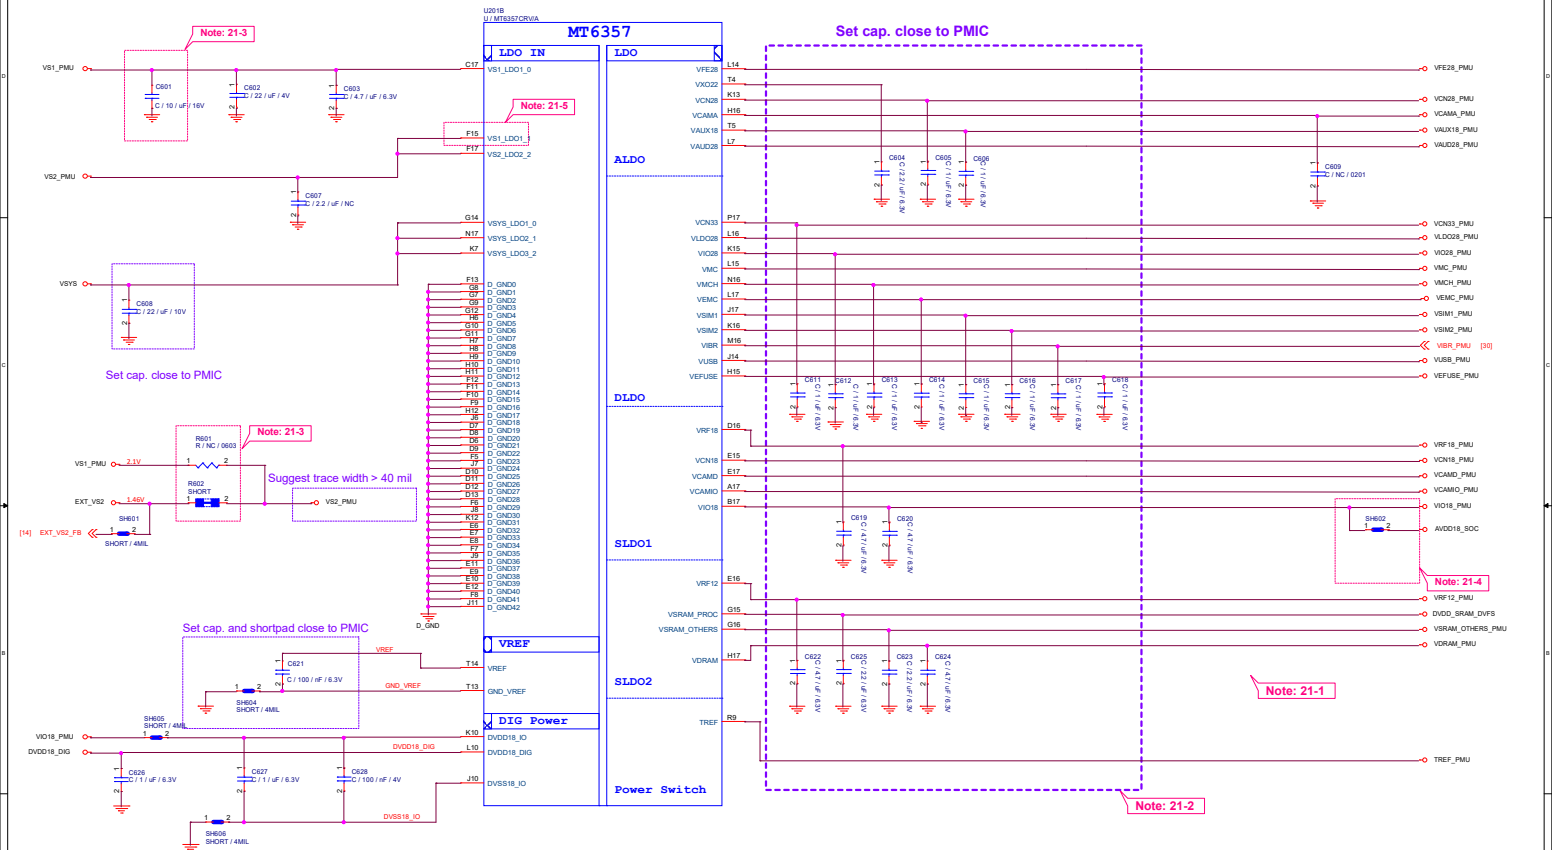

Note 21-1: If these power trace can meet LDO layout constraint, these CAP can be NC or removed.
Please refer to MT6357 design notice.

Note 21-2: Output cap range please follow MT6357CRV LDO design notice

Note 21-3: Ext Buck BOM option

	Ext. buck option	
	w/ EXT VS2 Buck	w/o EXT VS2 Buck
C601	10uF	22uF, 0603
R602	0-ohm , 0603	NC
R601	NC	0-ohm , 0603

Note 21-4: Please set SH602 and SH603 close to C620, making star connection among VIO18_PMU, AVDD18_SOC, and EMI_VDD1 near to LDO cap. C620





Please also refer to MT6357 design notice for further detail design information

Note 21-5: Please connect VS2_LDO1(F15) to VS1_PMU if voltage applied to VCAMD(E17) ≥ 1.3 V

Title Amman			
Size C	Document Number POWER_MT8357_LDO		Rev V1.0
Date: Wednesday, April 01, 2020		Sheet 6 of 38	

U20 ID1
U1 MT6357ORVIA

MT6357

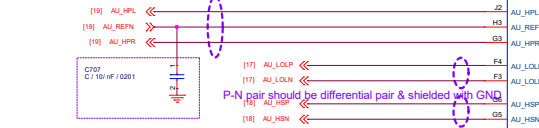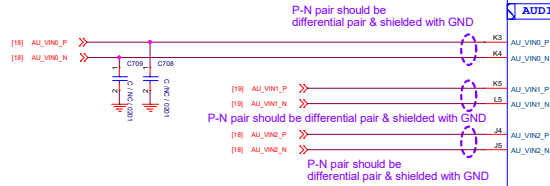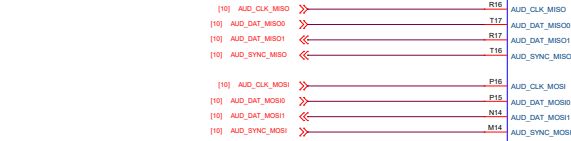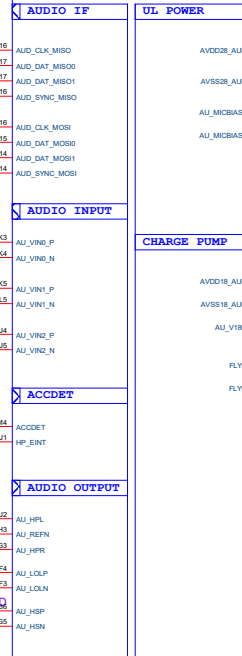

- AU_HPL and AU_HPR should be routed as single end signal, and be guarded by GND, up and down, left and right respectively
- The suggested layout pattern of AU_HPL/ AU_HPR/ AU_REFN is " GND AU_HPL AU_REFN AU_HPR GND"

CT07
C: 150 uF / 0201

Set cap. close to PMIC





P-N pair should be differential pair & shielded with GND

Set cap. and shortpad close to PMIC


Set cap. close to PMIC

1. AVSS18_AUD is connected to GND in very short trace
2. AVDD18_AUD is connected to de-couple cap of AVSS18_AUD and AU_V18N with 6mil. trace respectively

Rev				Amman
Rev	Document Number	POWER_MT6357_Audio		Rev
C				V1.2
Date		Wednesday, April 01, 2020	Sheet	7 of 38

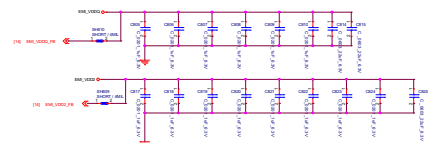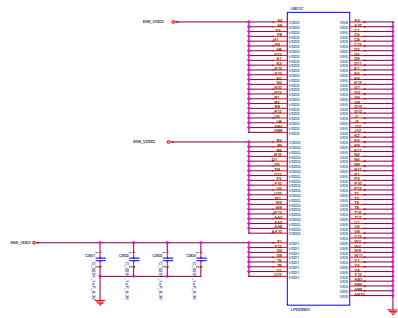

File		Answer	
Doc ID	Document Number	POWER_MSP430_Audio	Rev V1

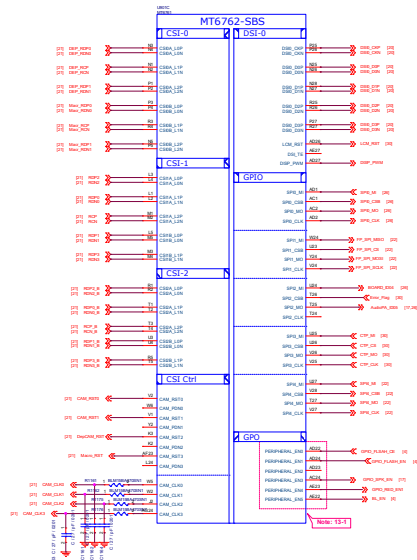


Note 12-1: The de-coupling cap. for REFP (AF18 ball) have to be placed as close to BB as possible.

Note 12-2: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX_ADC input to GND.

Note 12-3: Please set unused IQ pins to NC


Note 12-4: The enable pin of acoustic or optoelectronic devices (e.g. SPK, AMP/Backlight/Charger OCP/VP) suggest to use Peripheral_EN[0:3]. If use other GPIOs as enable pin, suggest to reserve I201 NC to GND

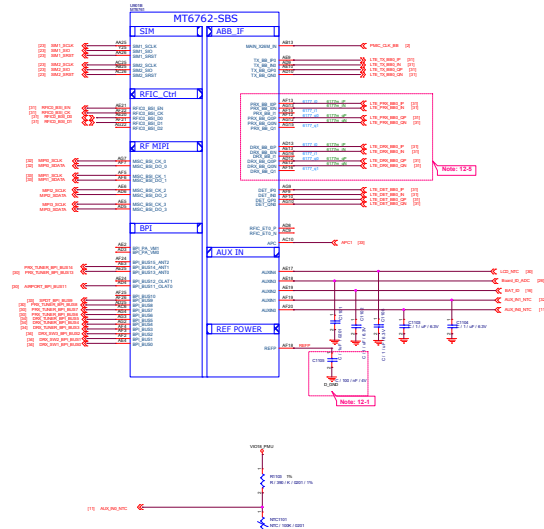


Thermistor to sense AP temperature

1. 70°C/100msec keep a distance about 5-8 mm away from AP and far from any heat sources if there is fan.

2. The distance to the thermistor between these package edge to edge.





Title				Amman			
Size	Document Number						Rev
C	BB_POWER_IO						V1.0
Date	Wednesday, April 01, 2020		Sheet		13		of 38

Note: 28:-



22 23

Note: 28-6

Note: 28.4

Note: 28-6

Reserved for LP4 DRAM [VDDO=1.1V]




Note: 28-5

Note 28-1: VA12 Layout placement please close to AP

Note 28-2: VS2 Buck Layout placement please close to PMIC MT6357, only used for MT6762, NC for MT6761

Name		Foreman	
Size	Document Number	POWER_300Part1_Powers	

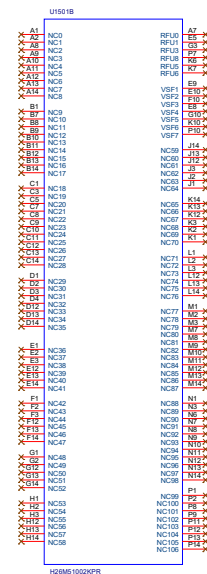


Note 44-1:	Please refer to power supply related page select VDRAM1 output voltage properly for LPDDR3
Note 44-2:	DRAM ZQx resistor = 240ohm (1%) that must be connected to GND
Note 44-3:	Please refer to eMCP vendor's datasheet or MTK common design notice to get the recommendation bypass cap. value for VCC/VCCQ/VDDI power domains of eMMC.
Note 44-4:	VDD2 VDDQ VDDCA decoupling cap: closed to DRAM ball. For other cap for PMIC [>10uF, at PMIC page]: please also refer to MMD and layout guide for placement.
Note 44-5:	Please check MT6765, MT6762 and MT6761's capacitor value.

Project	C1517	C1418
MT6765	2.2uF	1uF
MT6762	2.2uF	1uF
MT6761	0.1uF	0.1uF


File				Arman			
Size	Document Number						Rev
C	Memory_eMMC_LPDDR3						V1.
Date:	Wednesday, April 01, 2020		Sheet		15		of 38

Class K PA


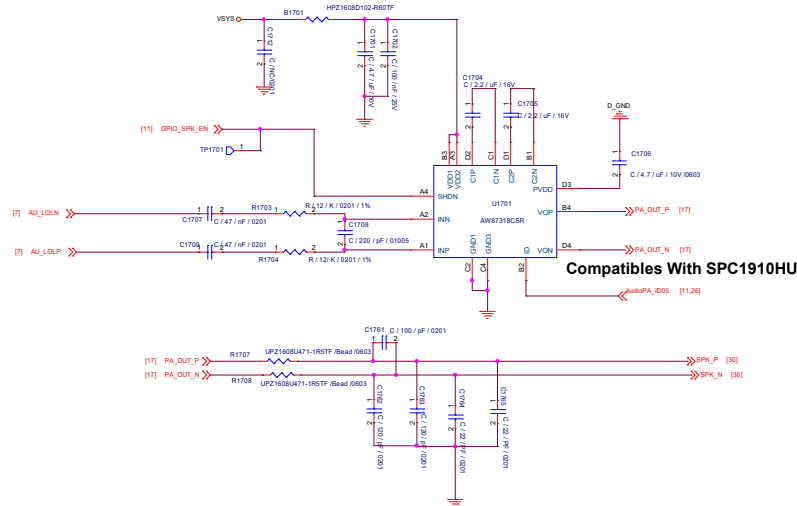


Rev	Amman
Doc	Docuement Number
Rev	Speaker
Doc	Wednesday, April 01, 2020
Sheet	17 of 38

MIC2

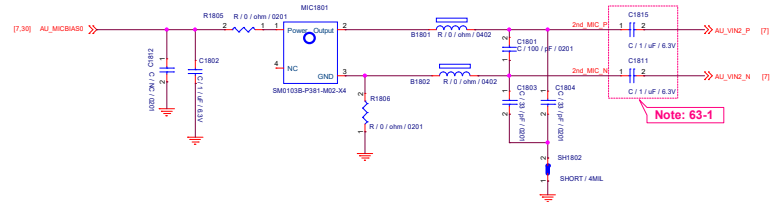

MIC1

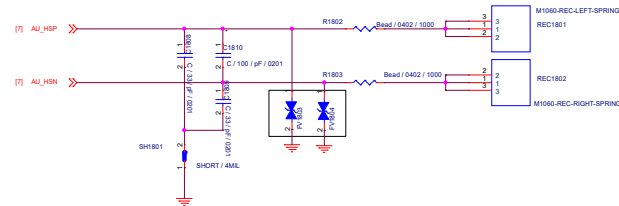


Schematic design notice of "63_PERI_AUDIO_IO" page.

Note 63-1: 1 uF for ACC mode
0 ohm for DCC mode


Rev	Ammann			Rev
Doc	Document Number	MC		V1.0
Date	Wednesday, April 01, 2020	Sheet	18	of 38

A schematic diagram of a four-bar linkage mechanism. It consists of a fixed frame (ground), a crank, a coupler, and a slider block. The crank is connected to the ground at one end and to the coupler at the other. The coupler is connected to the slider block at one end and to the ground at the other. The slider block is constrained to move vertically along a guide. The mechanism is labeled L-R-G-M.

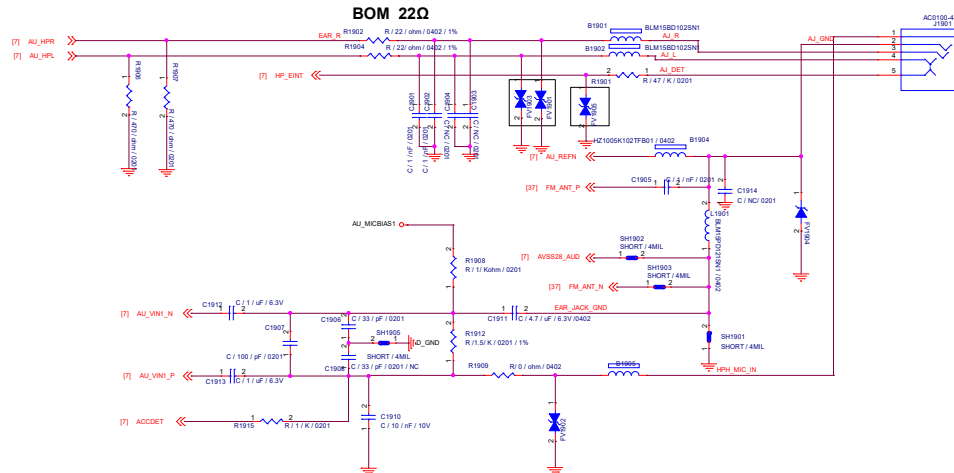


Title			
Amman			
Size	Document Number		Rev
C	Earphone		V1.0
Date:	Wednesday, April 01, 2020		Sheet 19 of 33

Main LCM

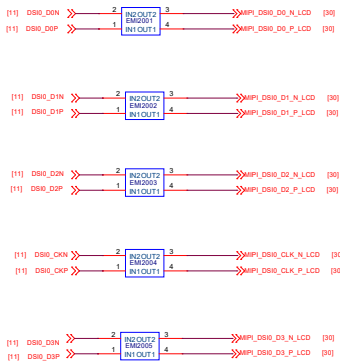


File			
Armen			
File			
C	Document Number	LCD F	Rev
Date			V1.0
Wednesday, April 01, 2009			
Sheet 20 of 38			


Main Camera

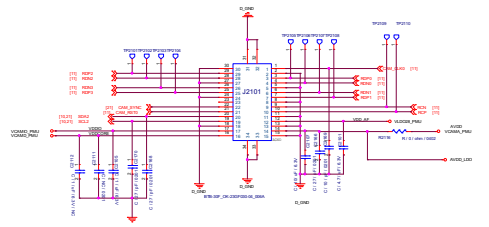


Front Camera

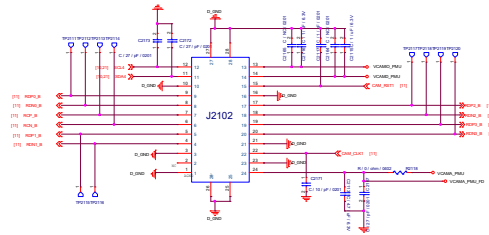


Main Flash LED





Macro Camera

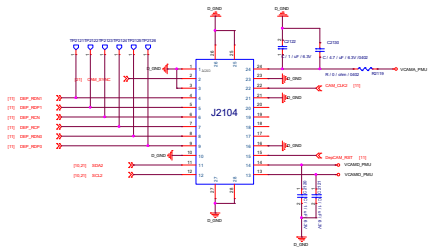


Dep Camera

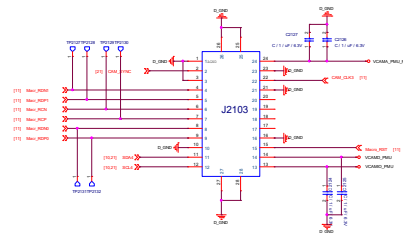

Rev	Rev	Rev
1	2	3
1.0	1.1	1.2
1.0	1.1	1.2
1.0	1.1	1.2

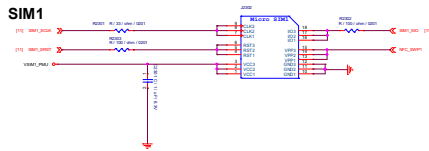

Date: <i>Armenia</i>									
Title: <i>Document Number</i> <i>2247 F</i>									
Date: <i>Wednesday, April 22, 2009</i>									


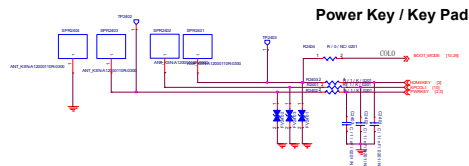


Rev	001
Author	John Doe
Checked By	John Doe
Approved By	John Doe
Date	2023-10-27


USB







BAT

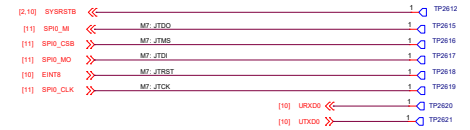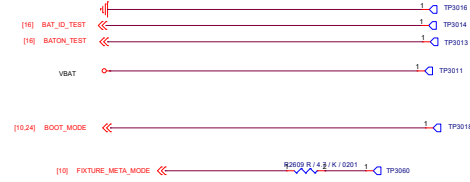

eMMC



Board_ID



Revision			
Rev	Document Number	Test Point	Rev
C			V1.0
Date	Wednesday, April 01, 2020	Sheet	25 of 35

Note 52-1: NFC host I/F and power info are listed in the above connector, NFC COB reference schematic is in the file named "MTK ST NFC Reference Schematic_20170809"

Note 52-2: When NFC is applied, please keep
1. 0ohm NC between VSIM1_PMU and SIM1_VCC
2. 0ohm NC between VSIM2_PMU and SIM2_VCC

Note 52-3: When NFC is applied, please follow NFC COB reference schematic to draw NFC COB schematic

File		Ammon	
Rev		Document Number	
C		NFC	Rev V1.0
Date		Wednesday, April 01, 2020	Sheet 27 of 38

贴片器件，钢网要开



Shielding frame



Marks point



File			
Author			
Doc	Document Number	Shielding	Rev
C			V1.0
Date: Wednesday, April 11, 2006 Sheet 29 of 35			

