



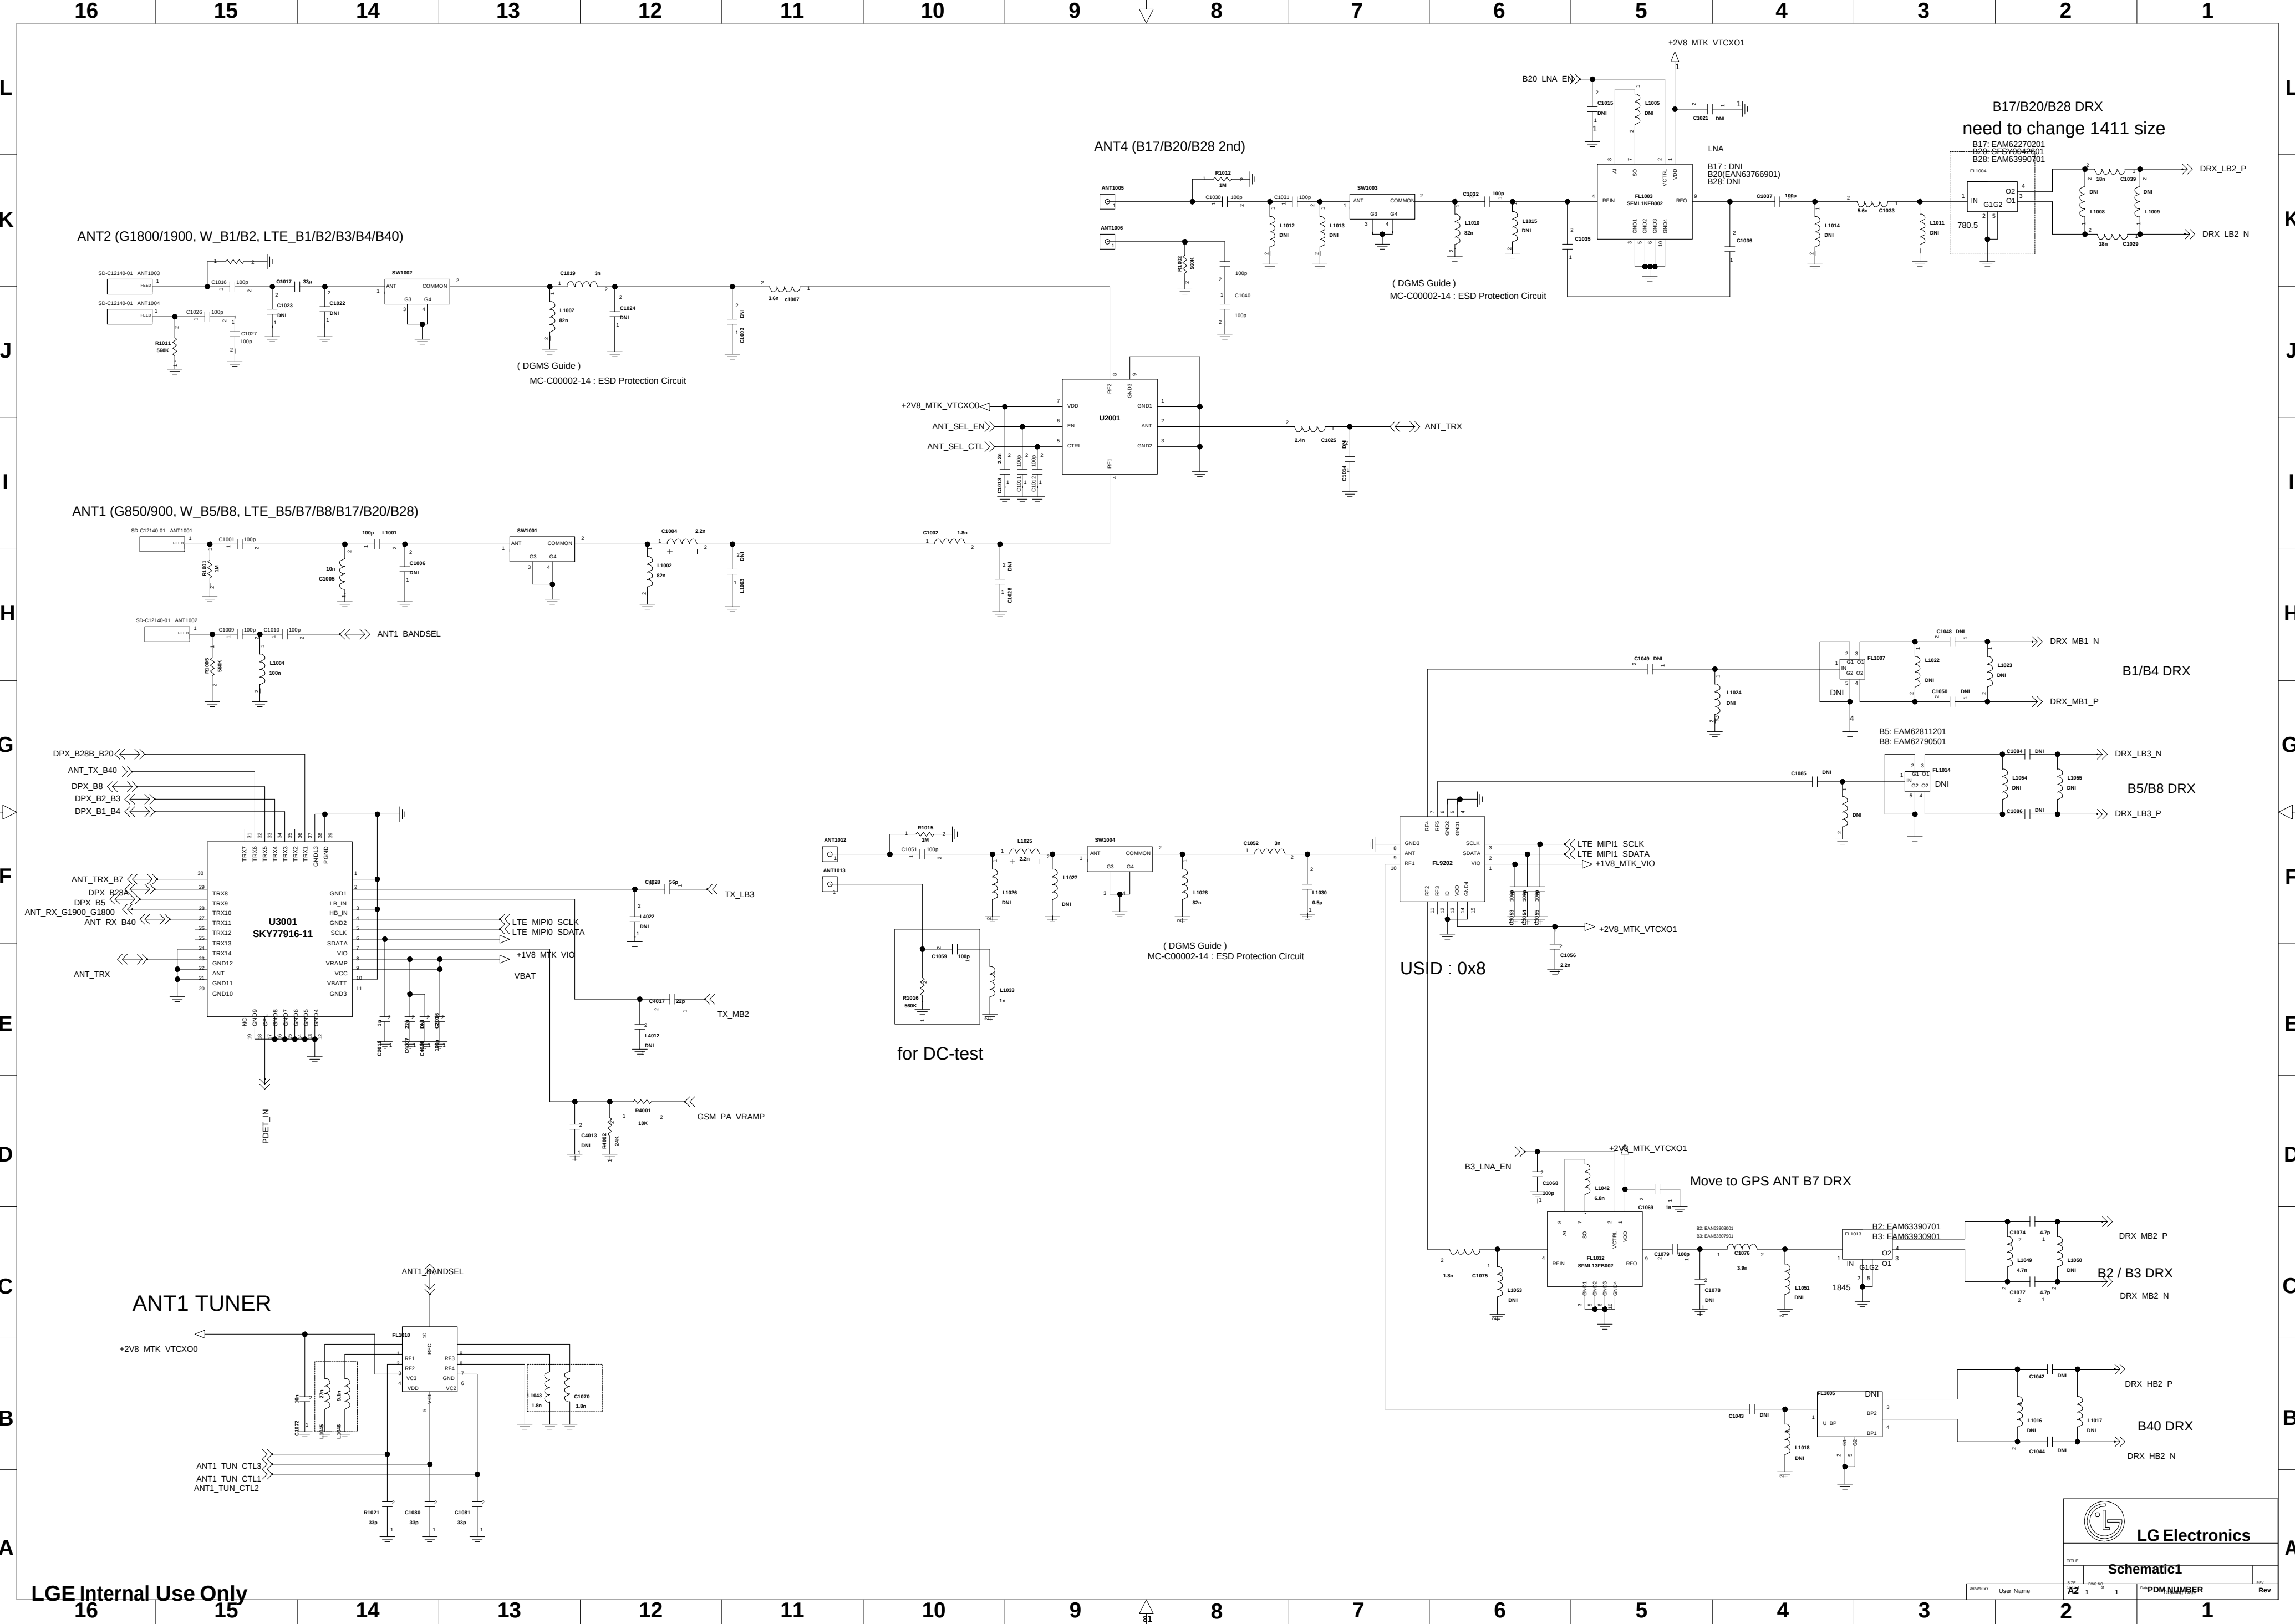


LGE Internal Use Only

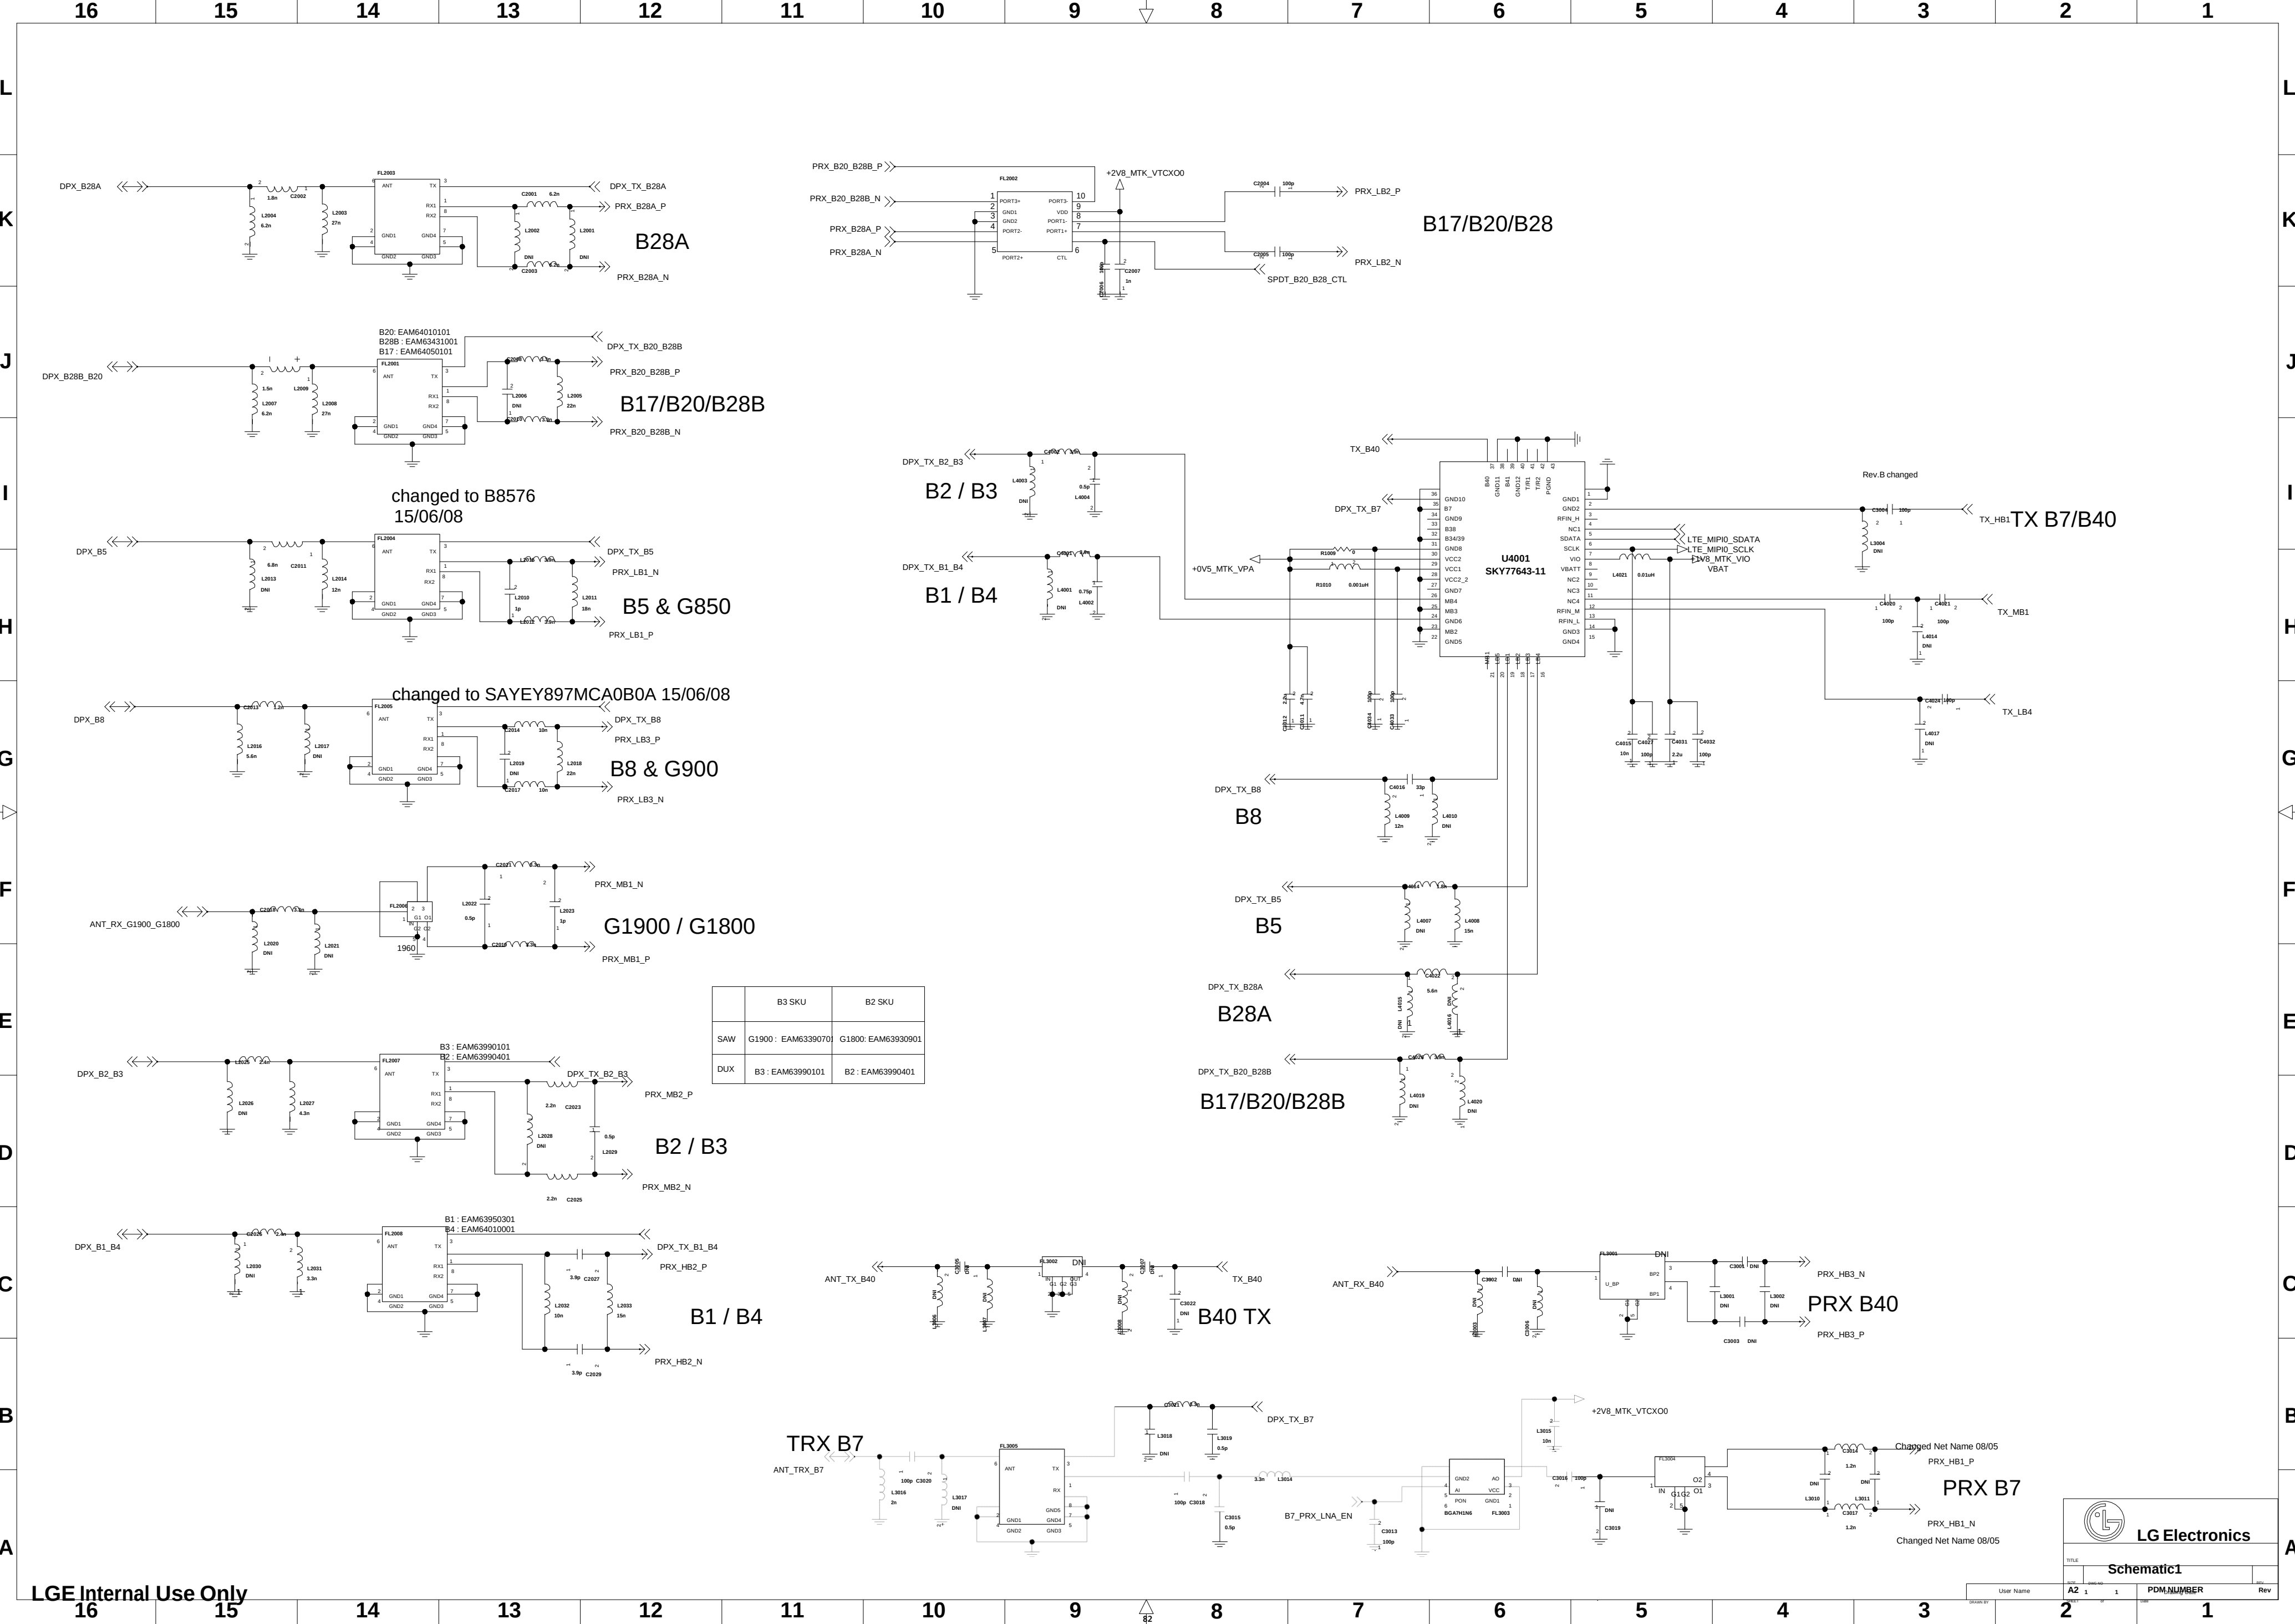

LGE Internal Use Only

<1-9-5-1_RFIC_MT6169>

Rev_0.4


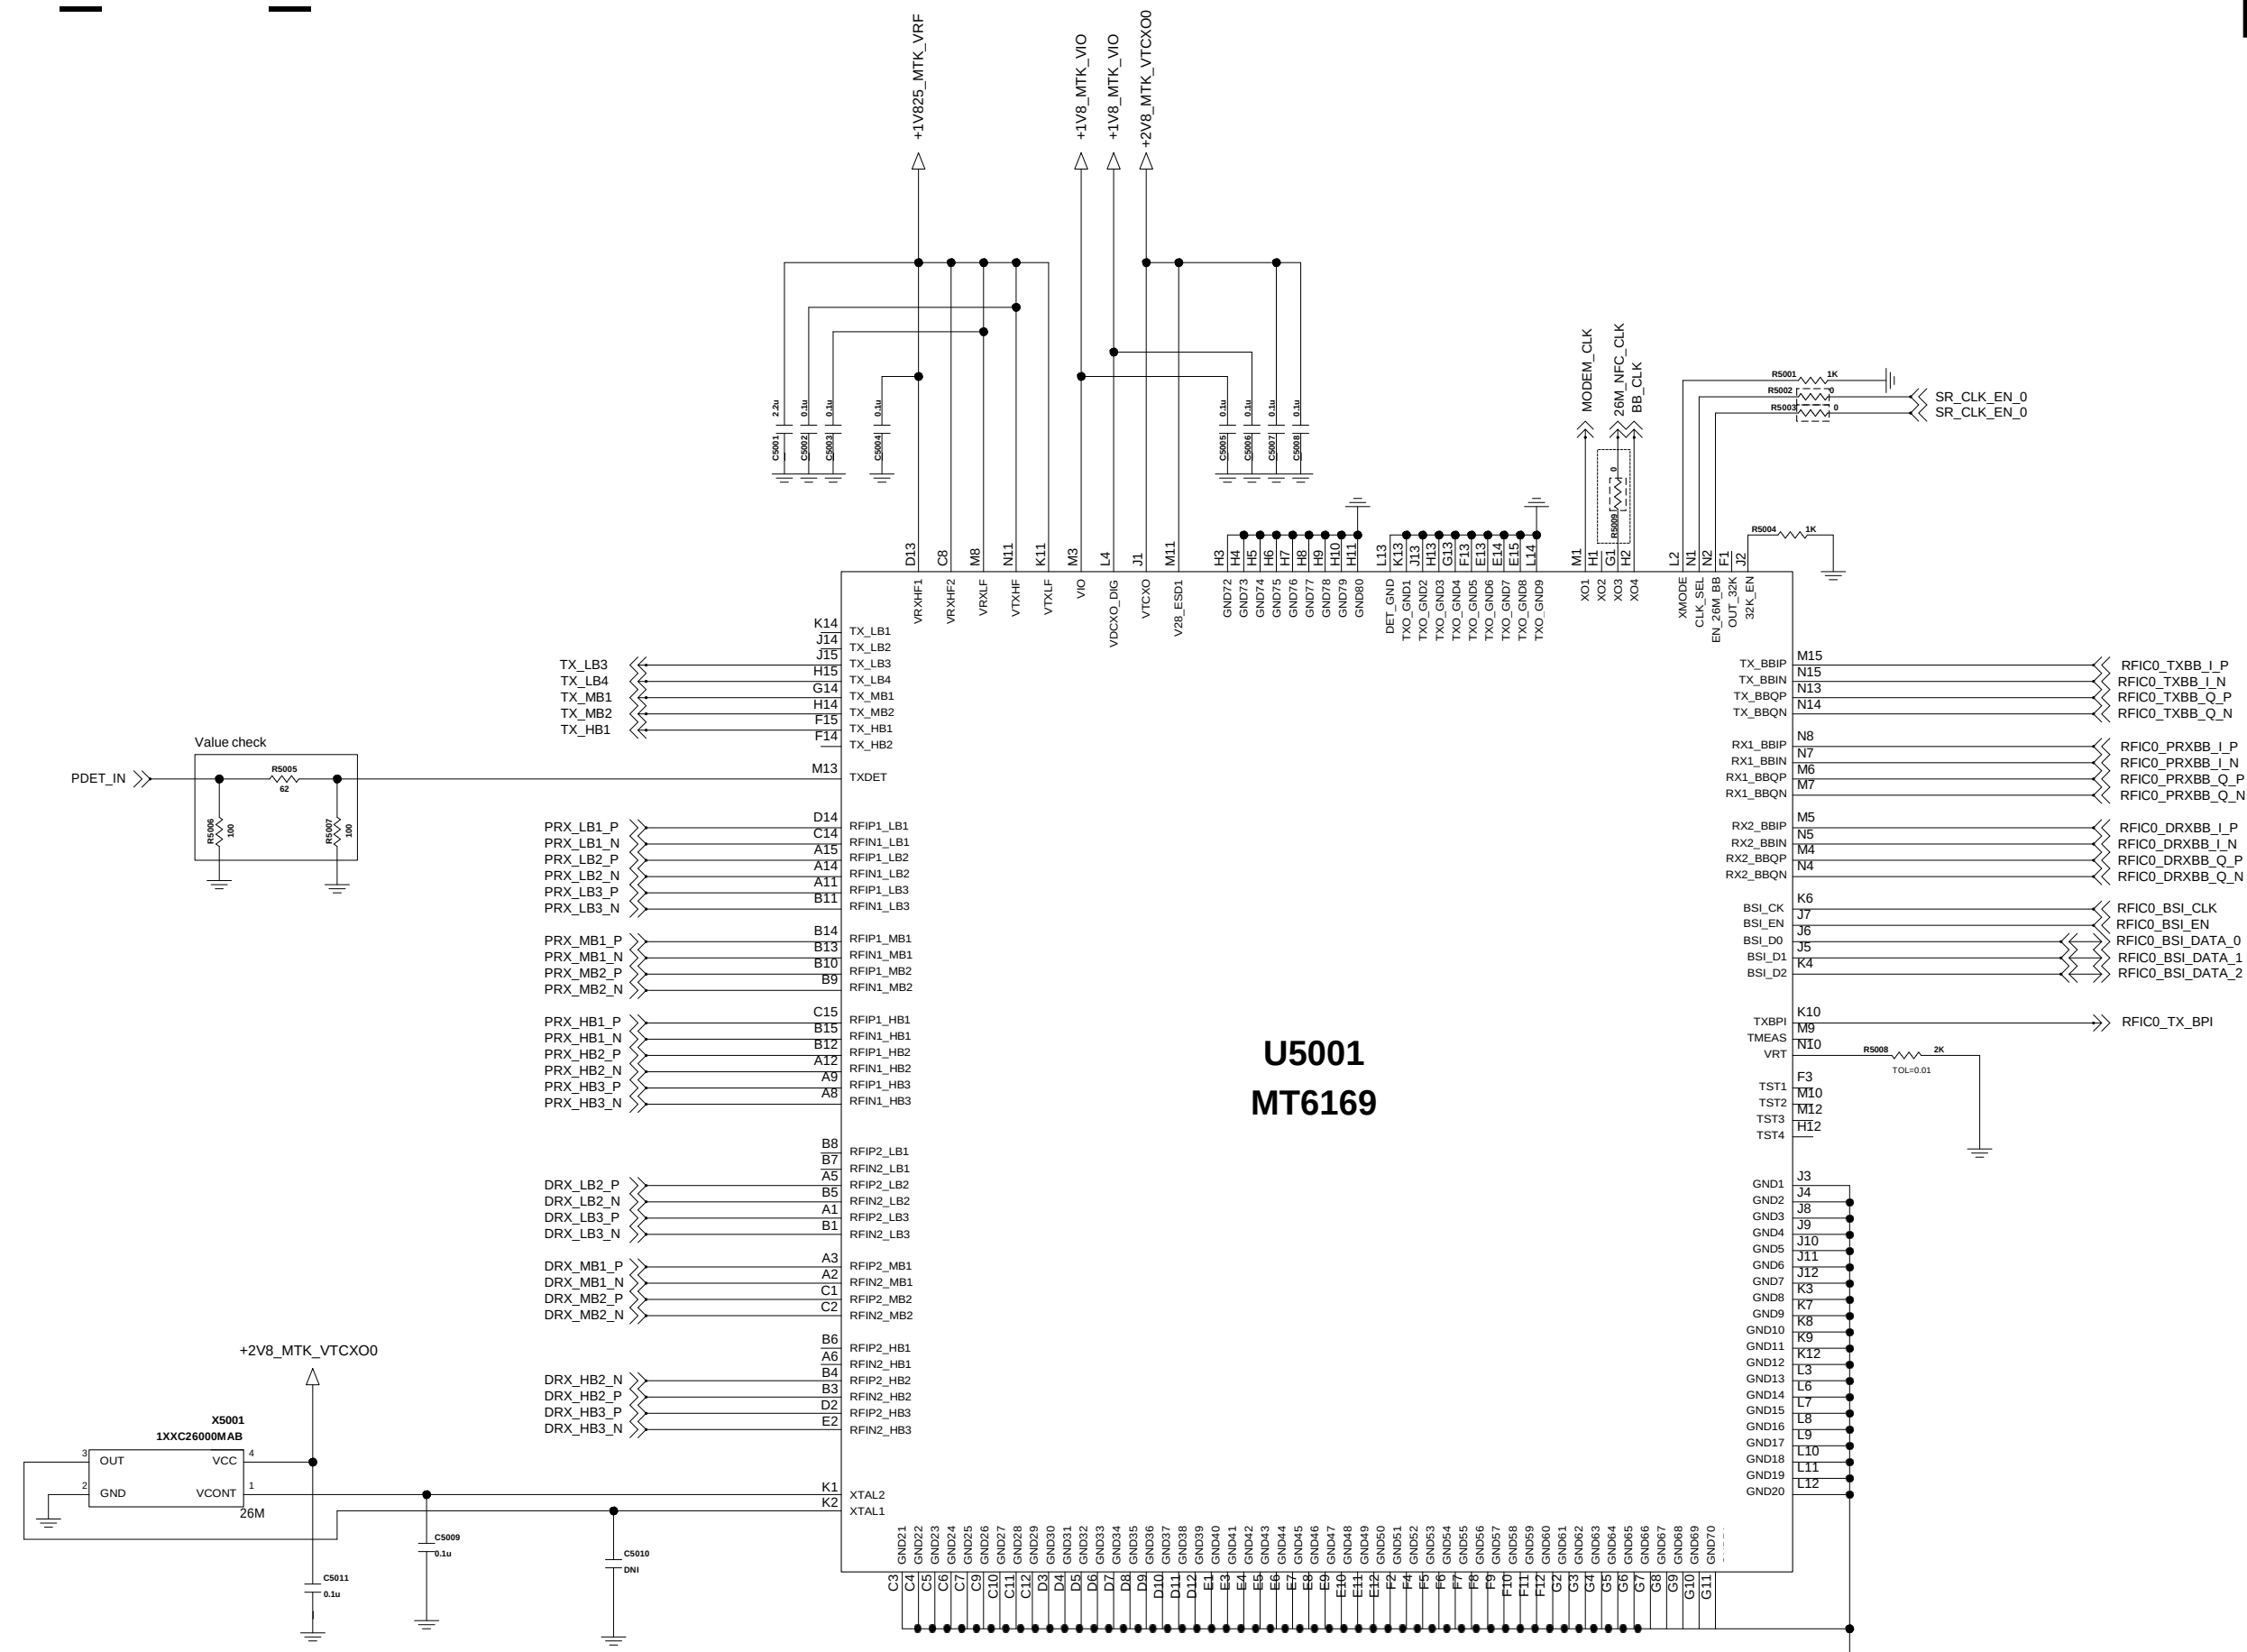


< 2-x-x-x-1_MT6735_DATA >



REV_0.1

< 2-3-6-1-2_MT6735_GPIO >


I2C Pull-Up

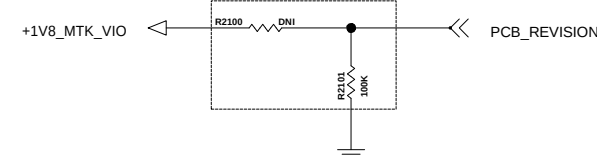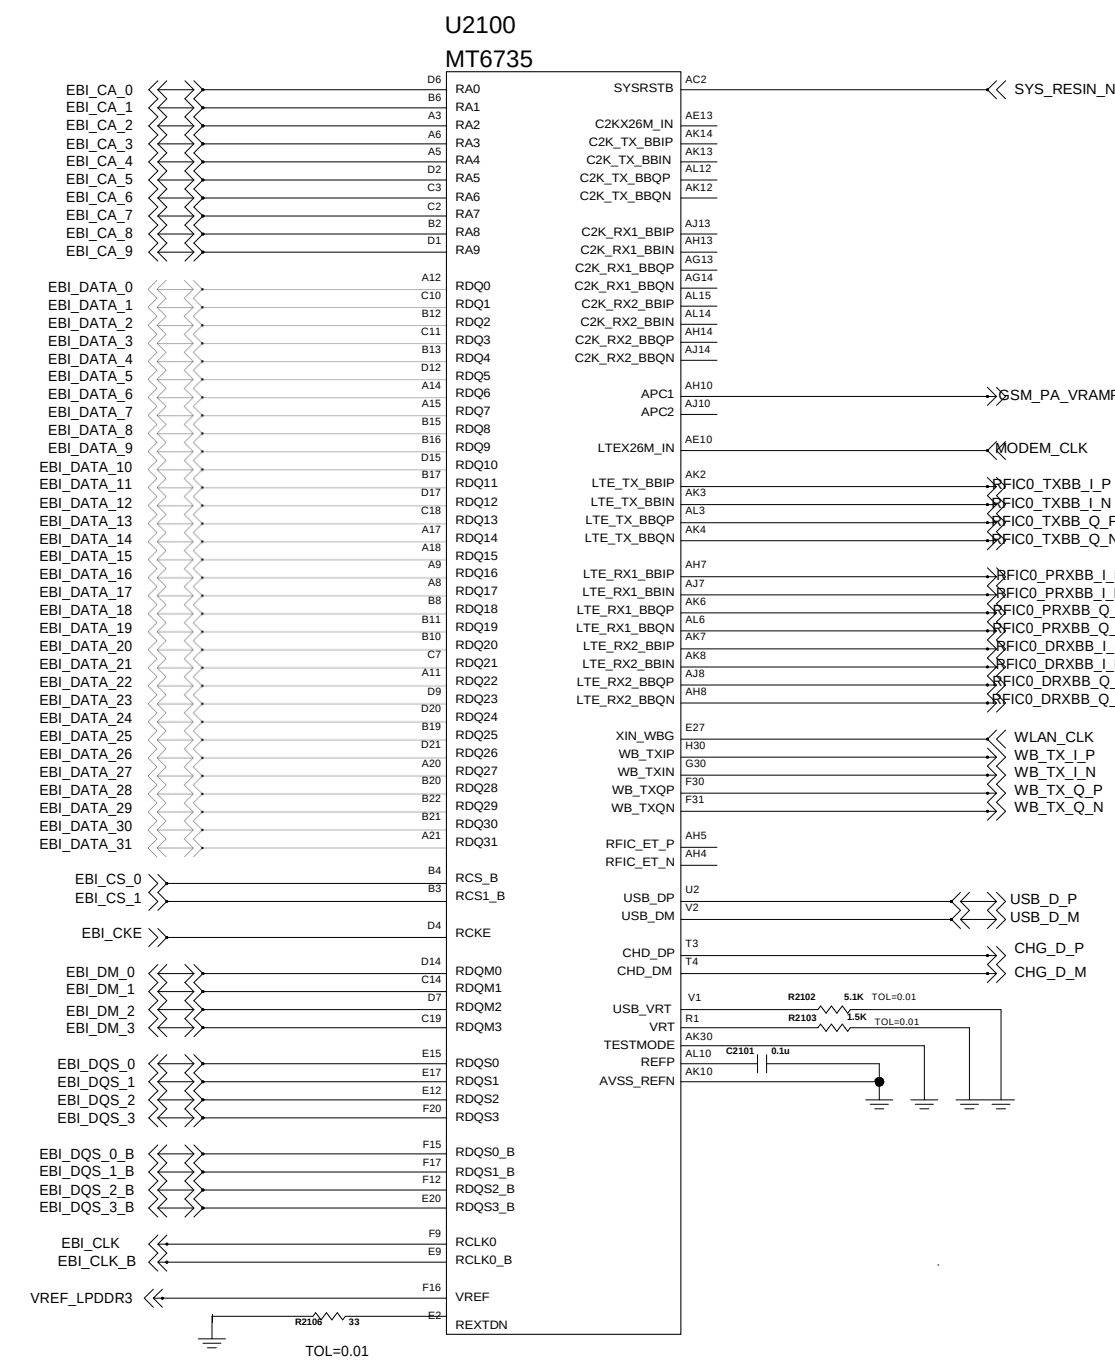

Revision	R2100	R2101	Level
A	100K	20K	0.300
B	100K	39K	0.505
C	100K	51K	0.680
D	100K	100K	0.900
1.0	DNI	100K	0.000
1.1	100K	DNI	1.800

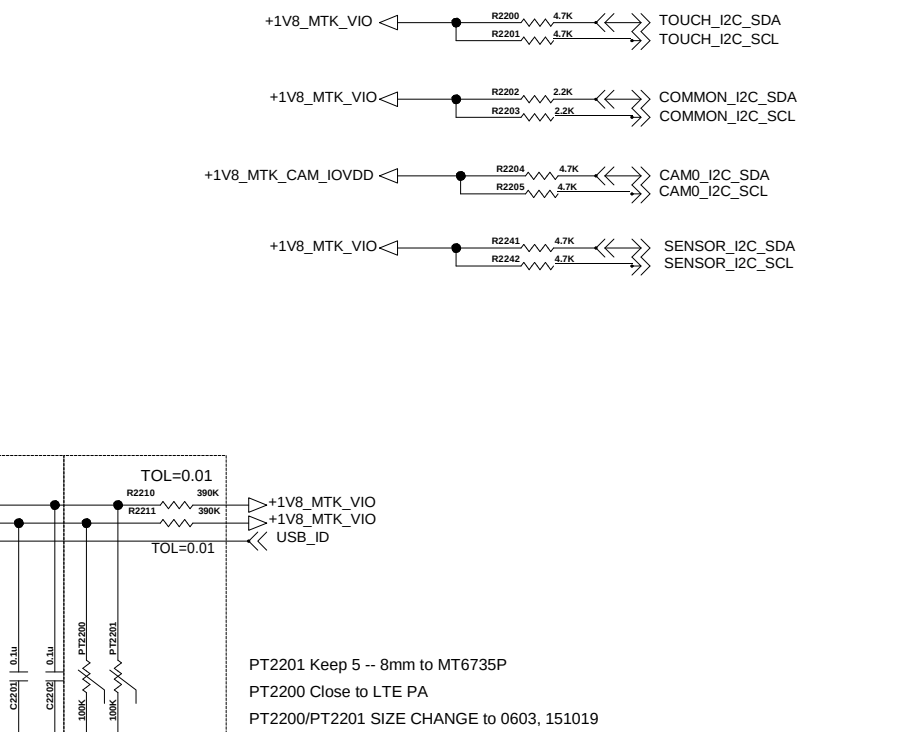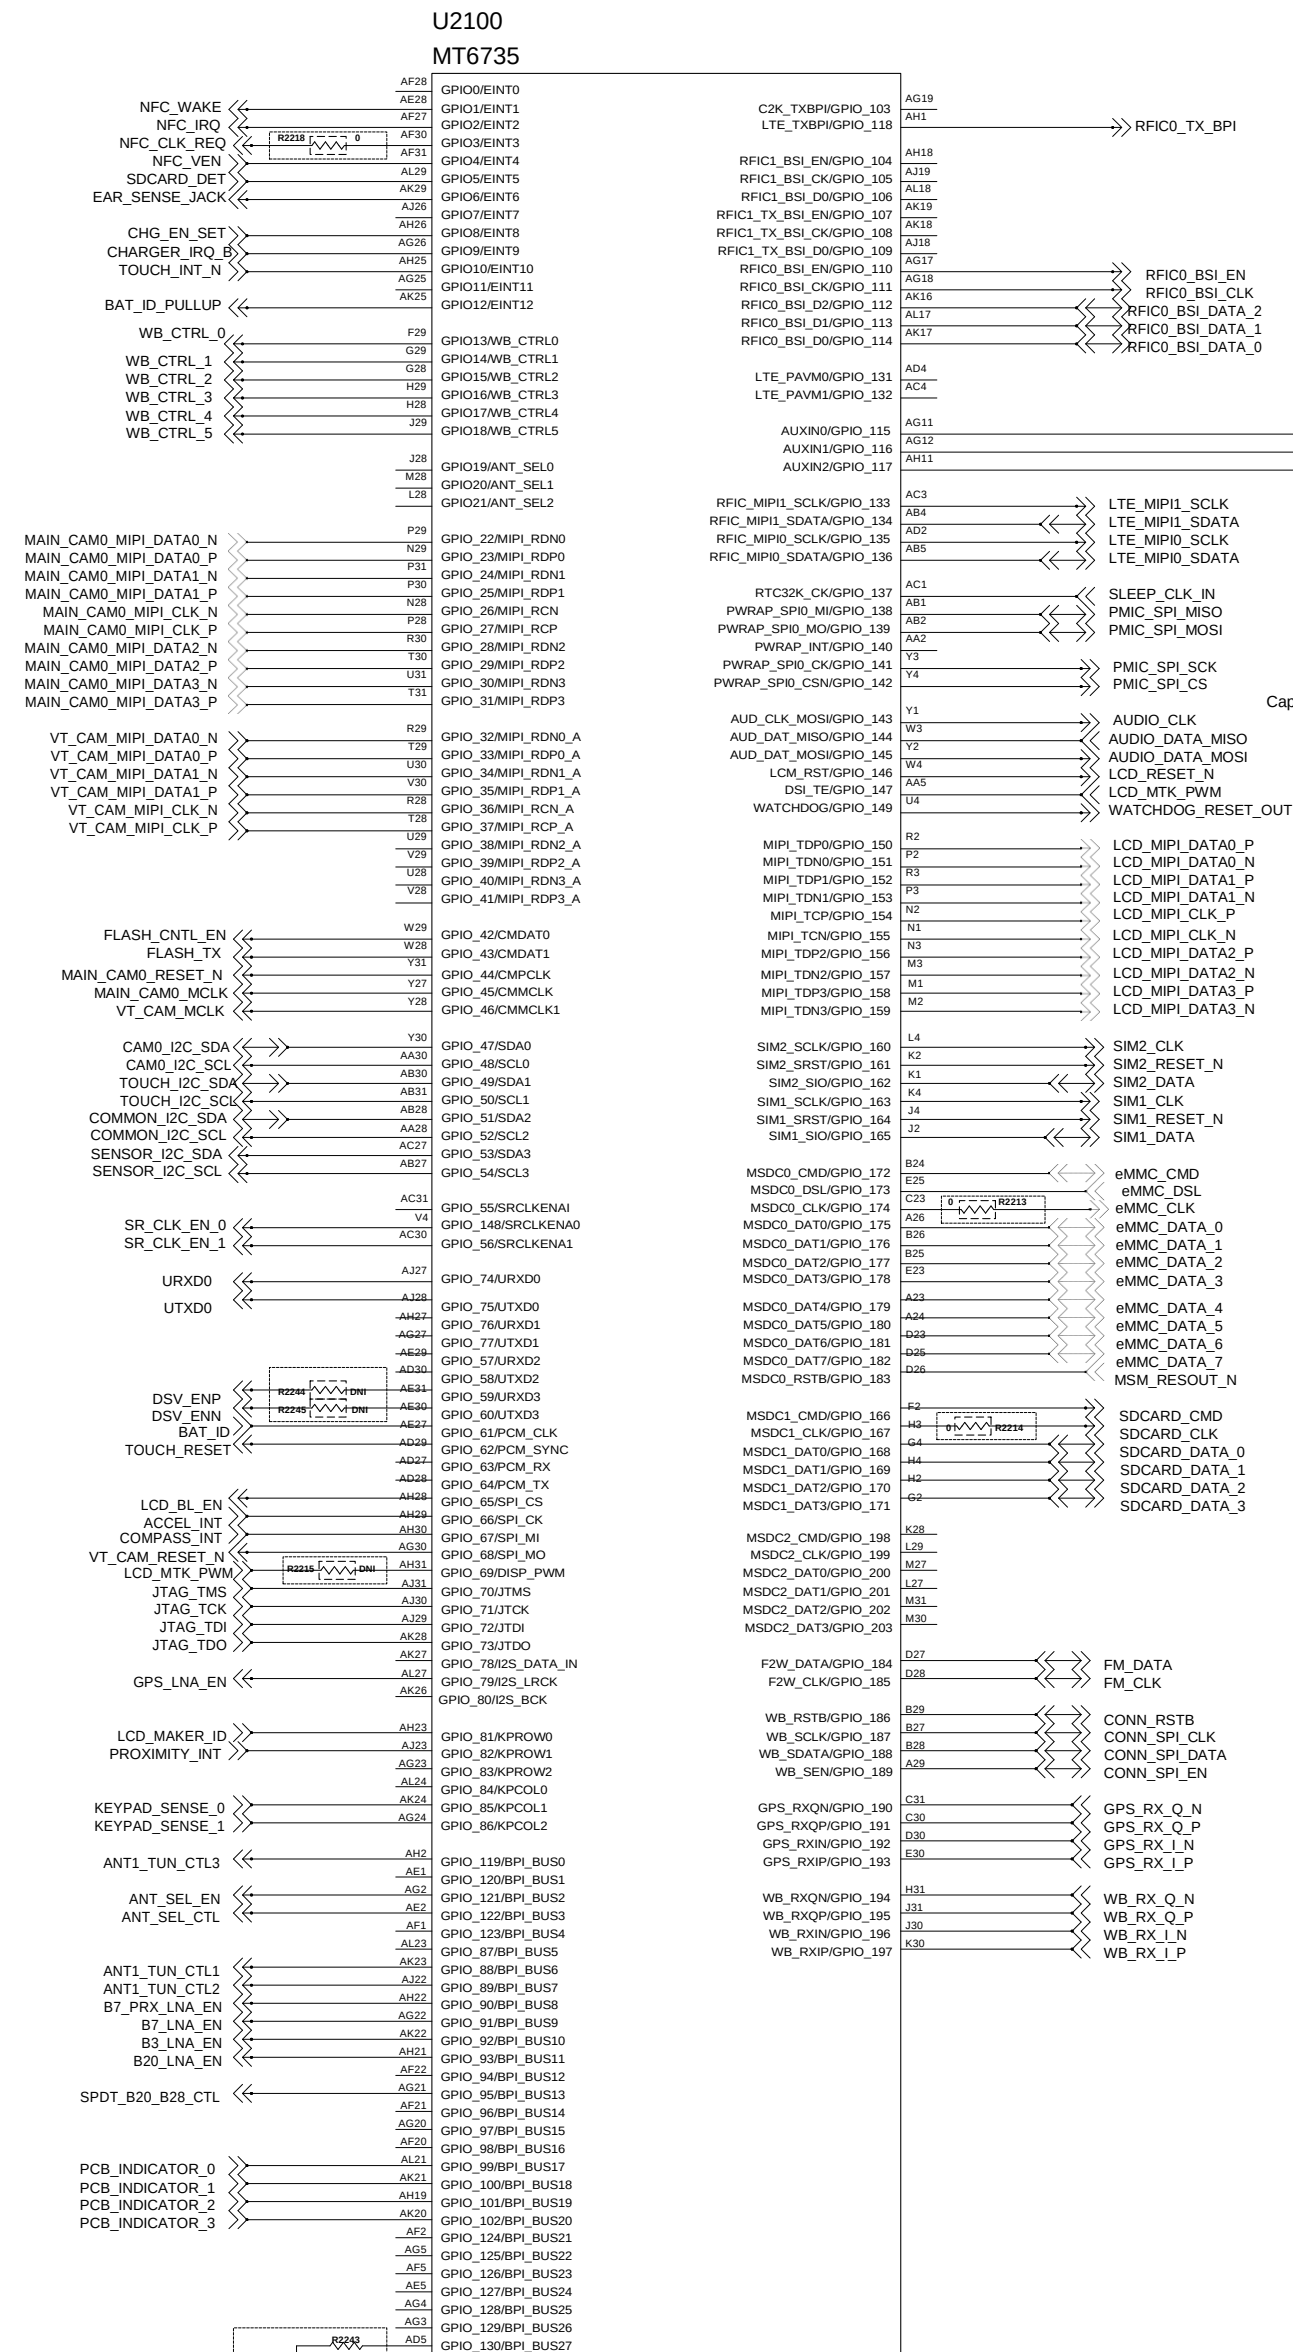

PCB Indicator Model Indicator



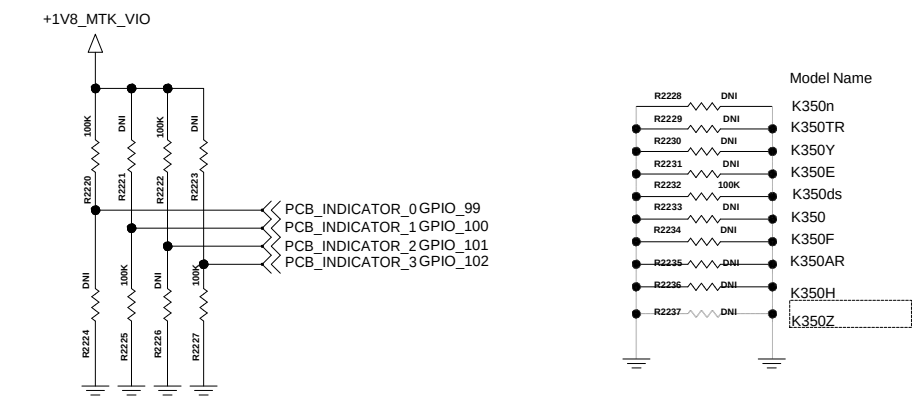


Model	Band	NFC	SIM	GPIO_SUM	GPIO_99	GPIO_100	GPIO_101	GPIO_102
K350n	1/37/8/20	X	SINGLE	9	1	0	0	1
K350TR	1/37/8/20	X	SINGLE	1	0	0	0	1
K350Y	3/7/18/40(TDD)	X	SINGLE	2	0	0	1	0
K350E	3/7/20	X	DUAL	3	0	0	1	1
K350ds	3/7/28	X	DUAL	10	1	0	1	0
K350	3/7/28	X	SINGLE	5	0	1	0	1
K350F	2/4/5/7/28	X	SINGLE	6	0	1	1	0
K350AR	2/4/5/7/28	X	SINGLE	7	0	1	1	1
K350H	2/4/5/7/17	X	SINGLE	8	1	0	0	0
K350Z	3/7/20	X	DUAL	11	1	0	1	1
K350ds(A)	3/7/28	X	DUAL	4	0	1	0	0
K350n(A)	1/37/8/20	X	SINGLE	0	0	0	0	0


< 2-x-x-x-3_MT6735_POWER >

REV_0.1

< 2-x-x-x-4_MT6735_GND_NC > Rev_0.1

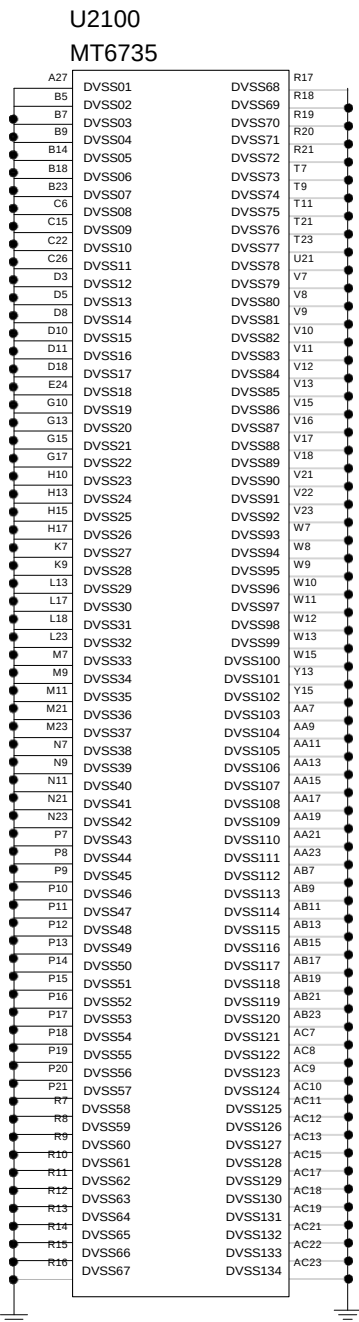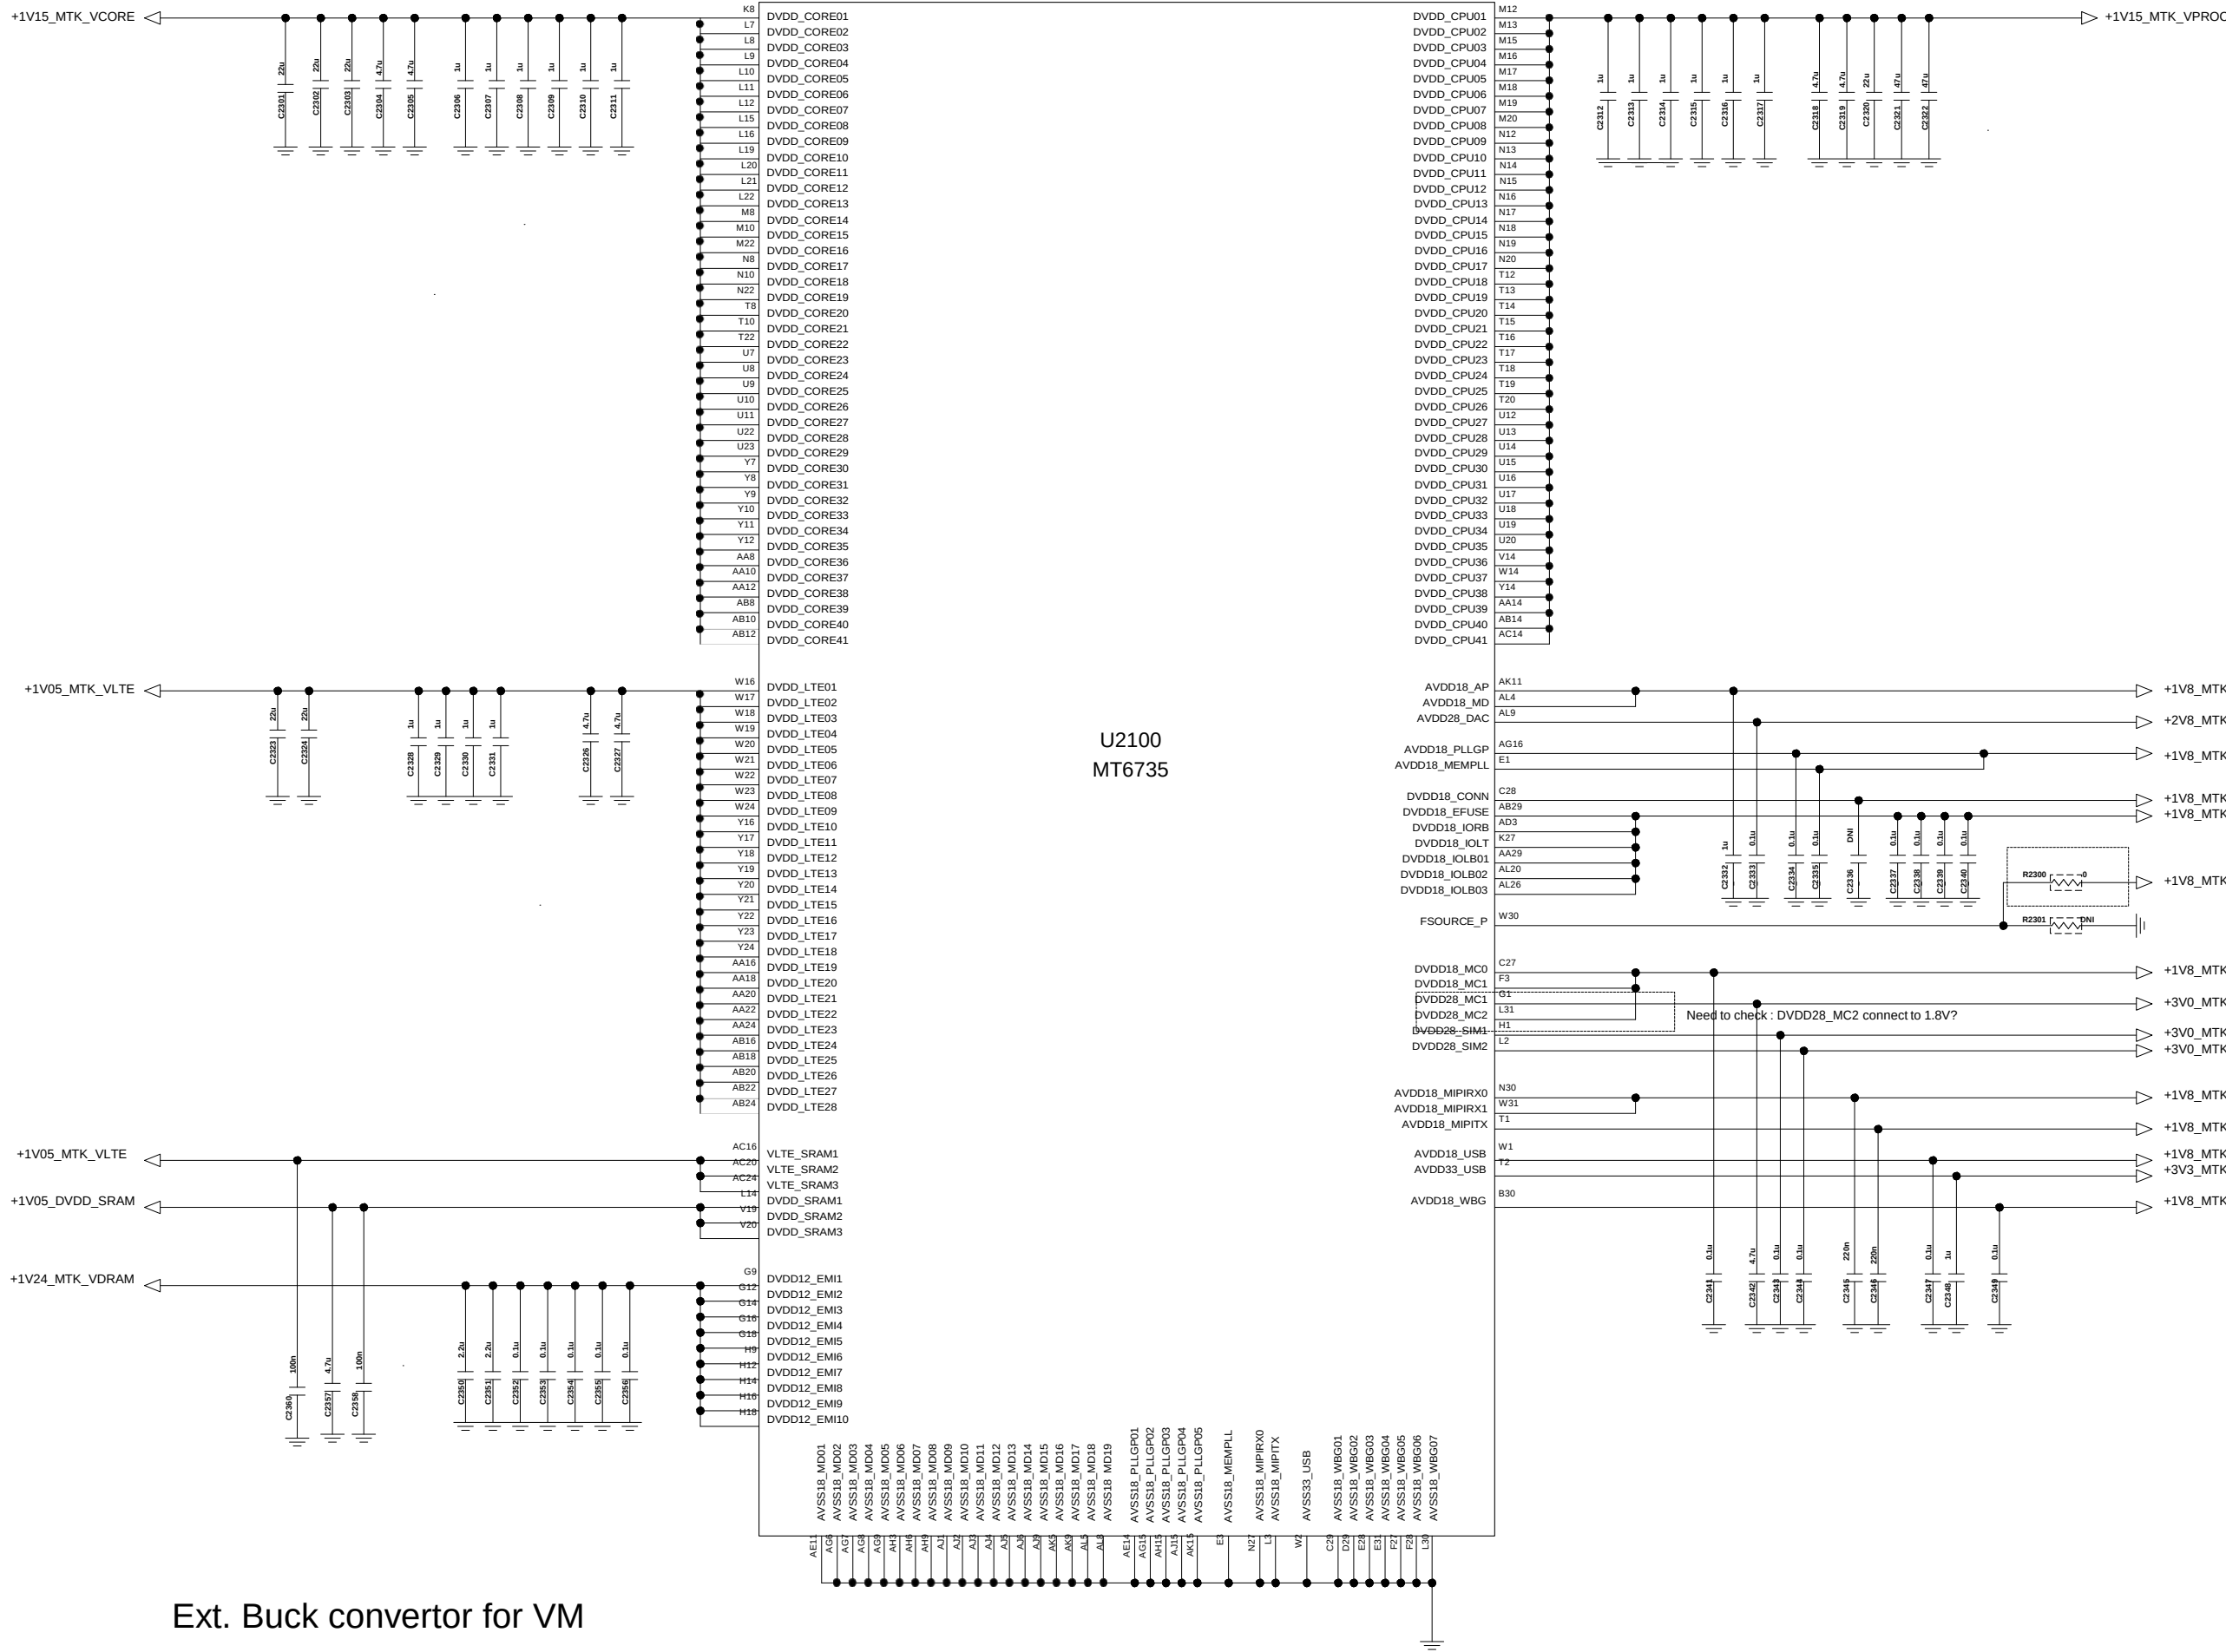


Ext. Buck convertor for VM

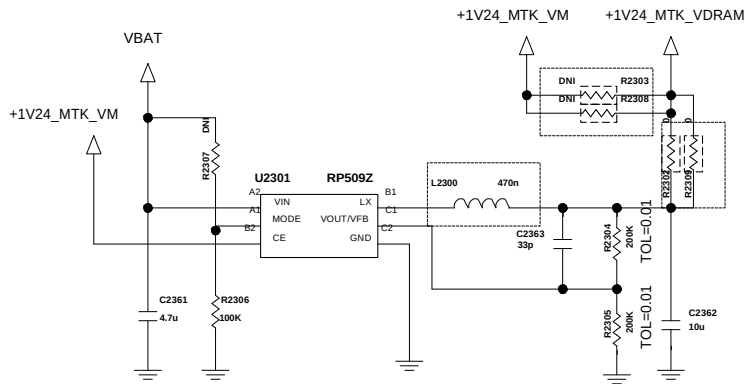


Output voltage changed : 1.15V - 141121

- Vout = Vfb x (1+R1/R2)
- C2363 x R2304 = 3x10⁻⁶ - 6x10⁻⁶

< 3-3-3-3-1_MCP_eMMC_5_0_16G_DDR3_8G_HYNIX > Rev_0.3

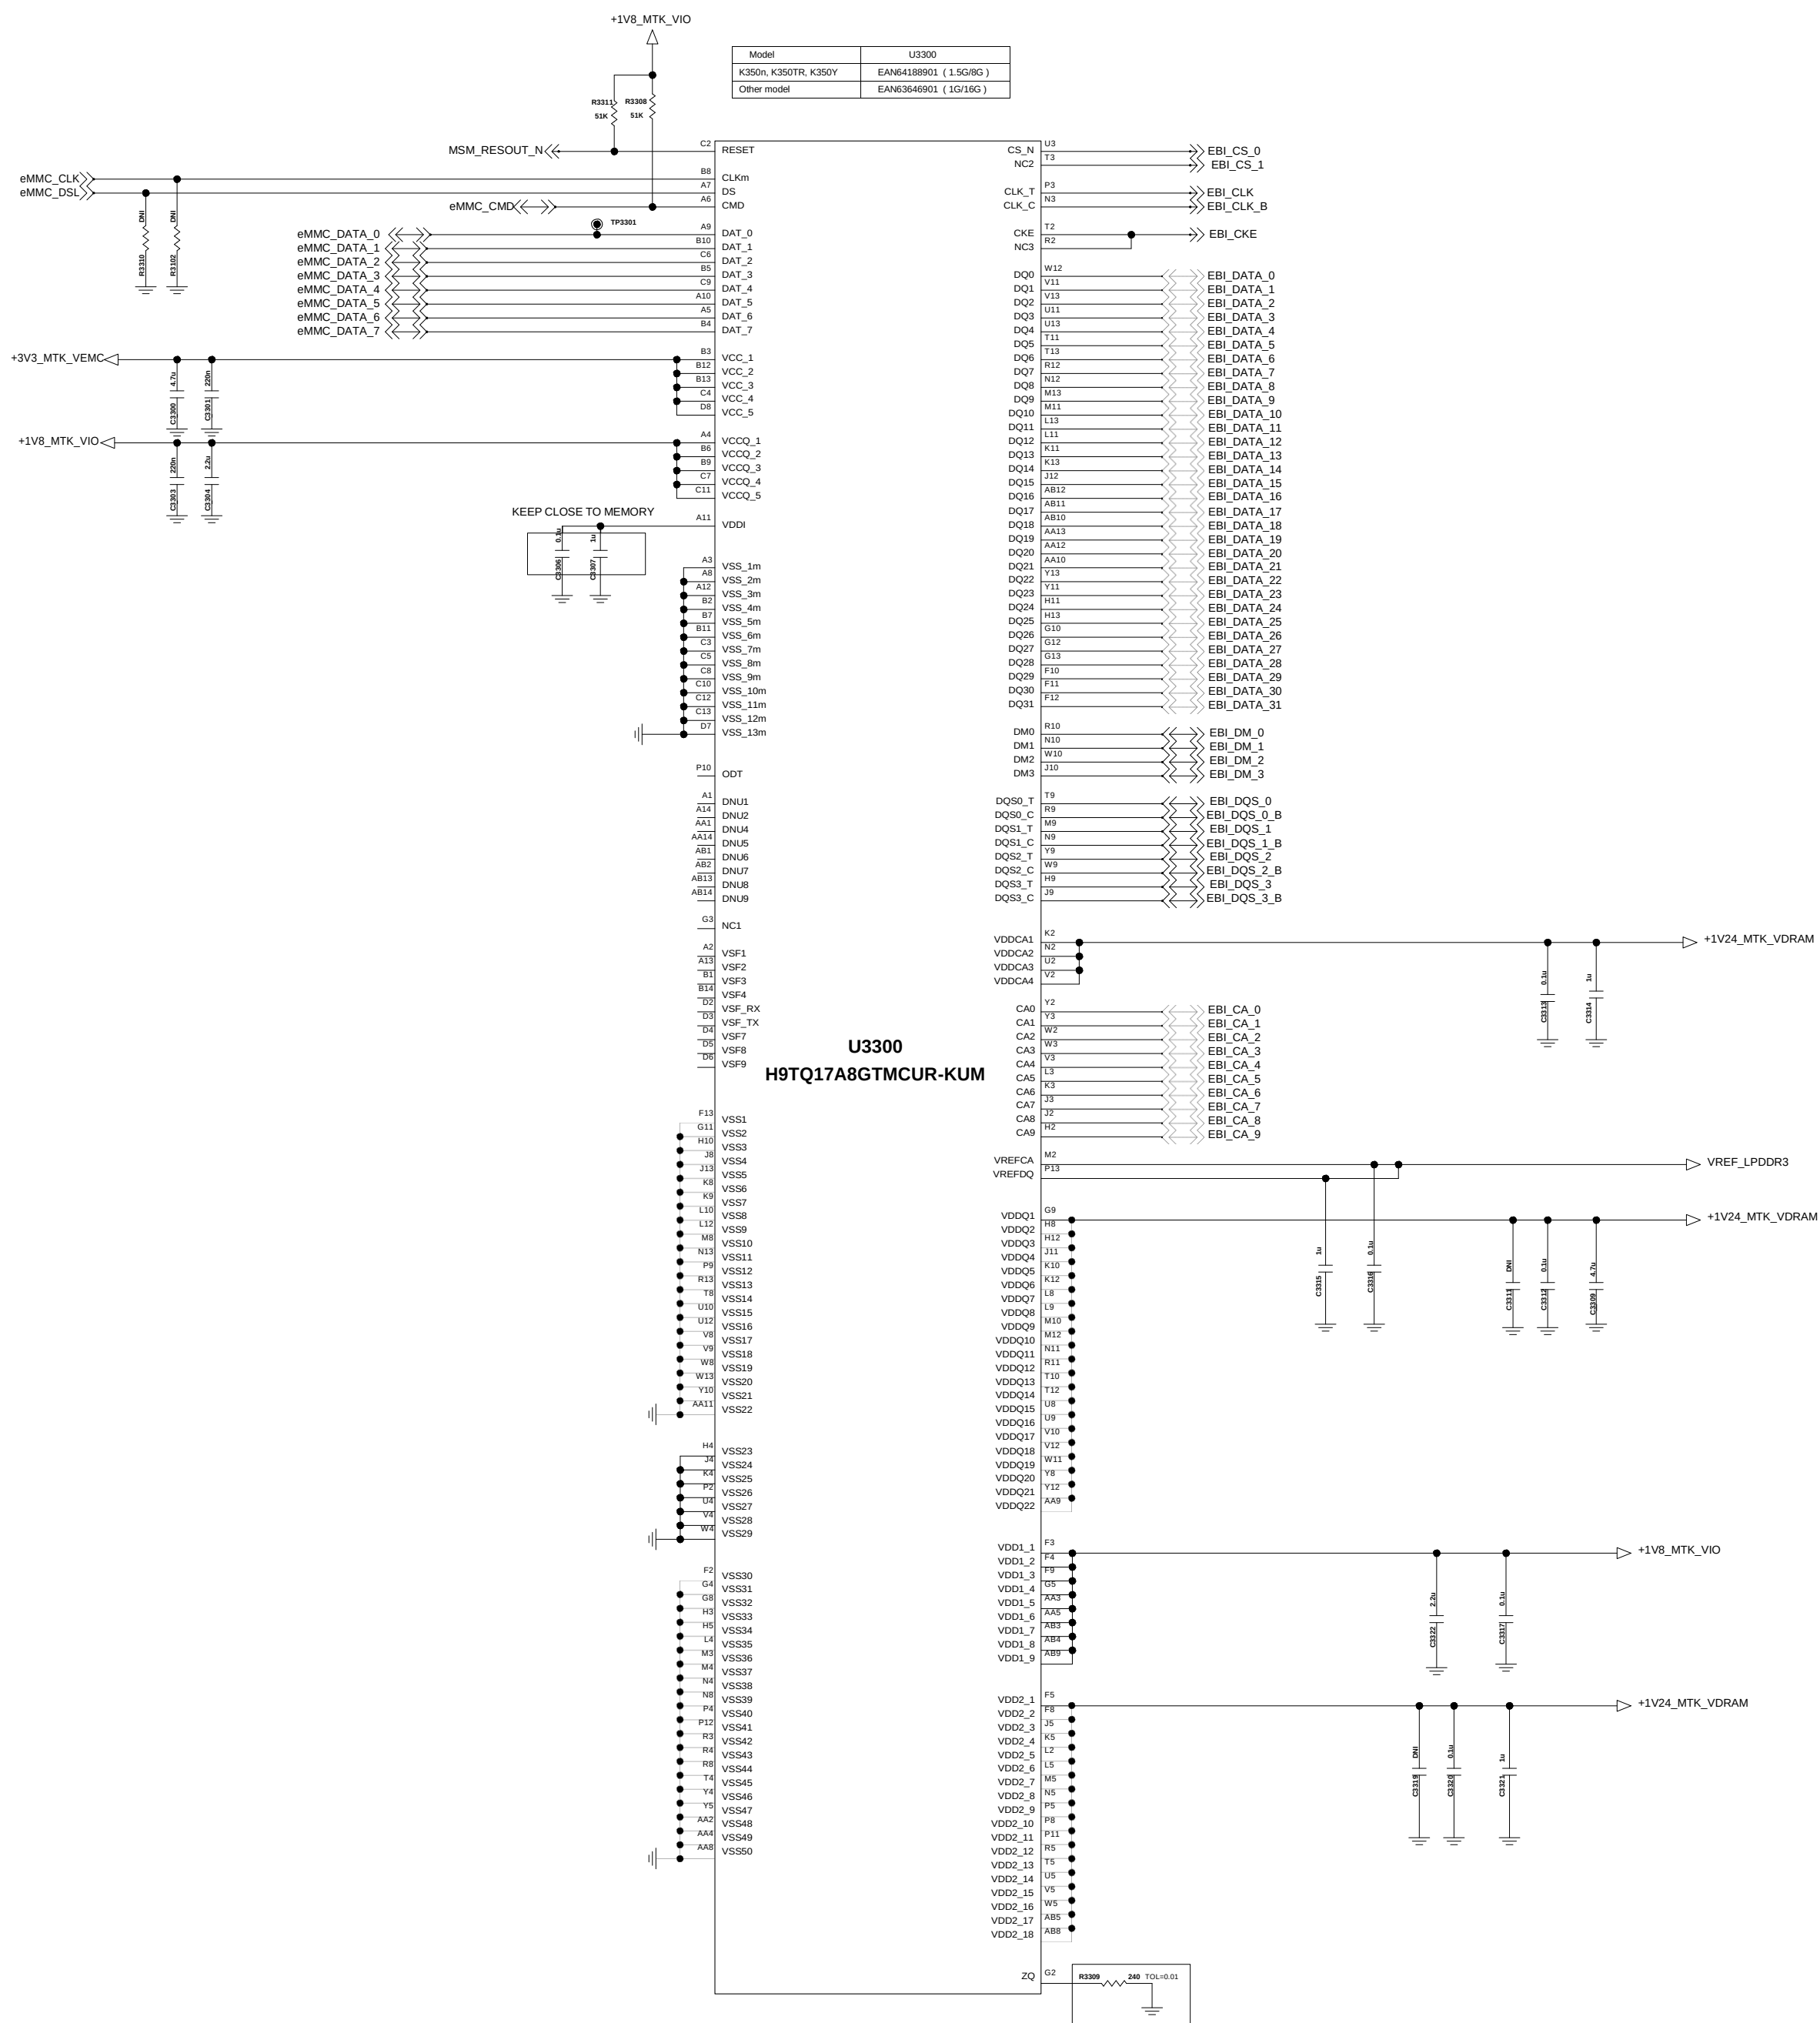


<4-1-15-1_PMIC_MT6328_DATA> Rev_0.3

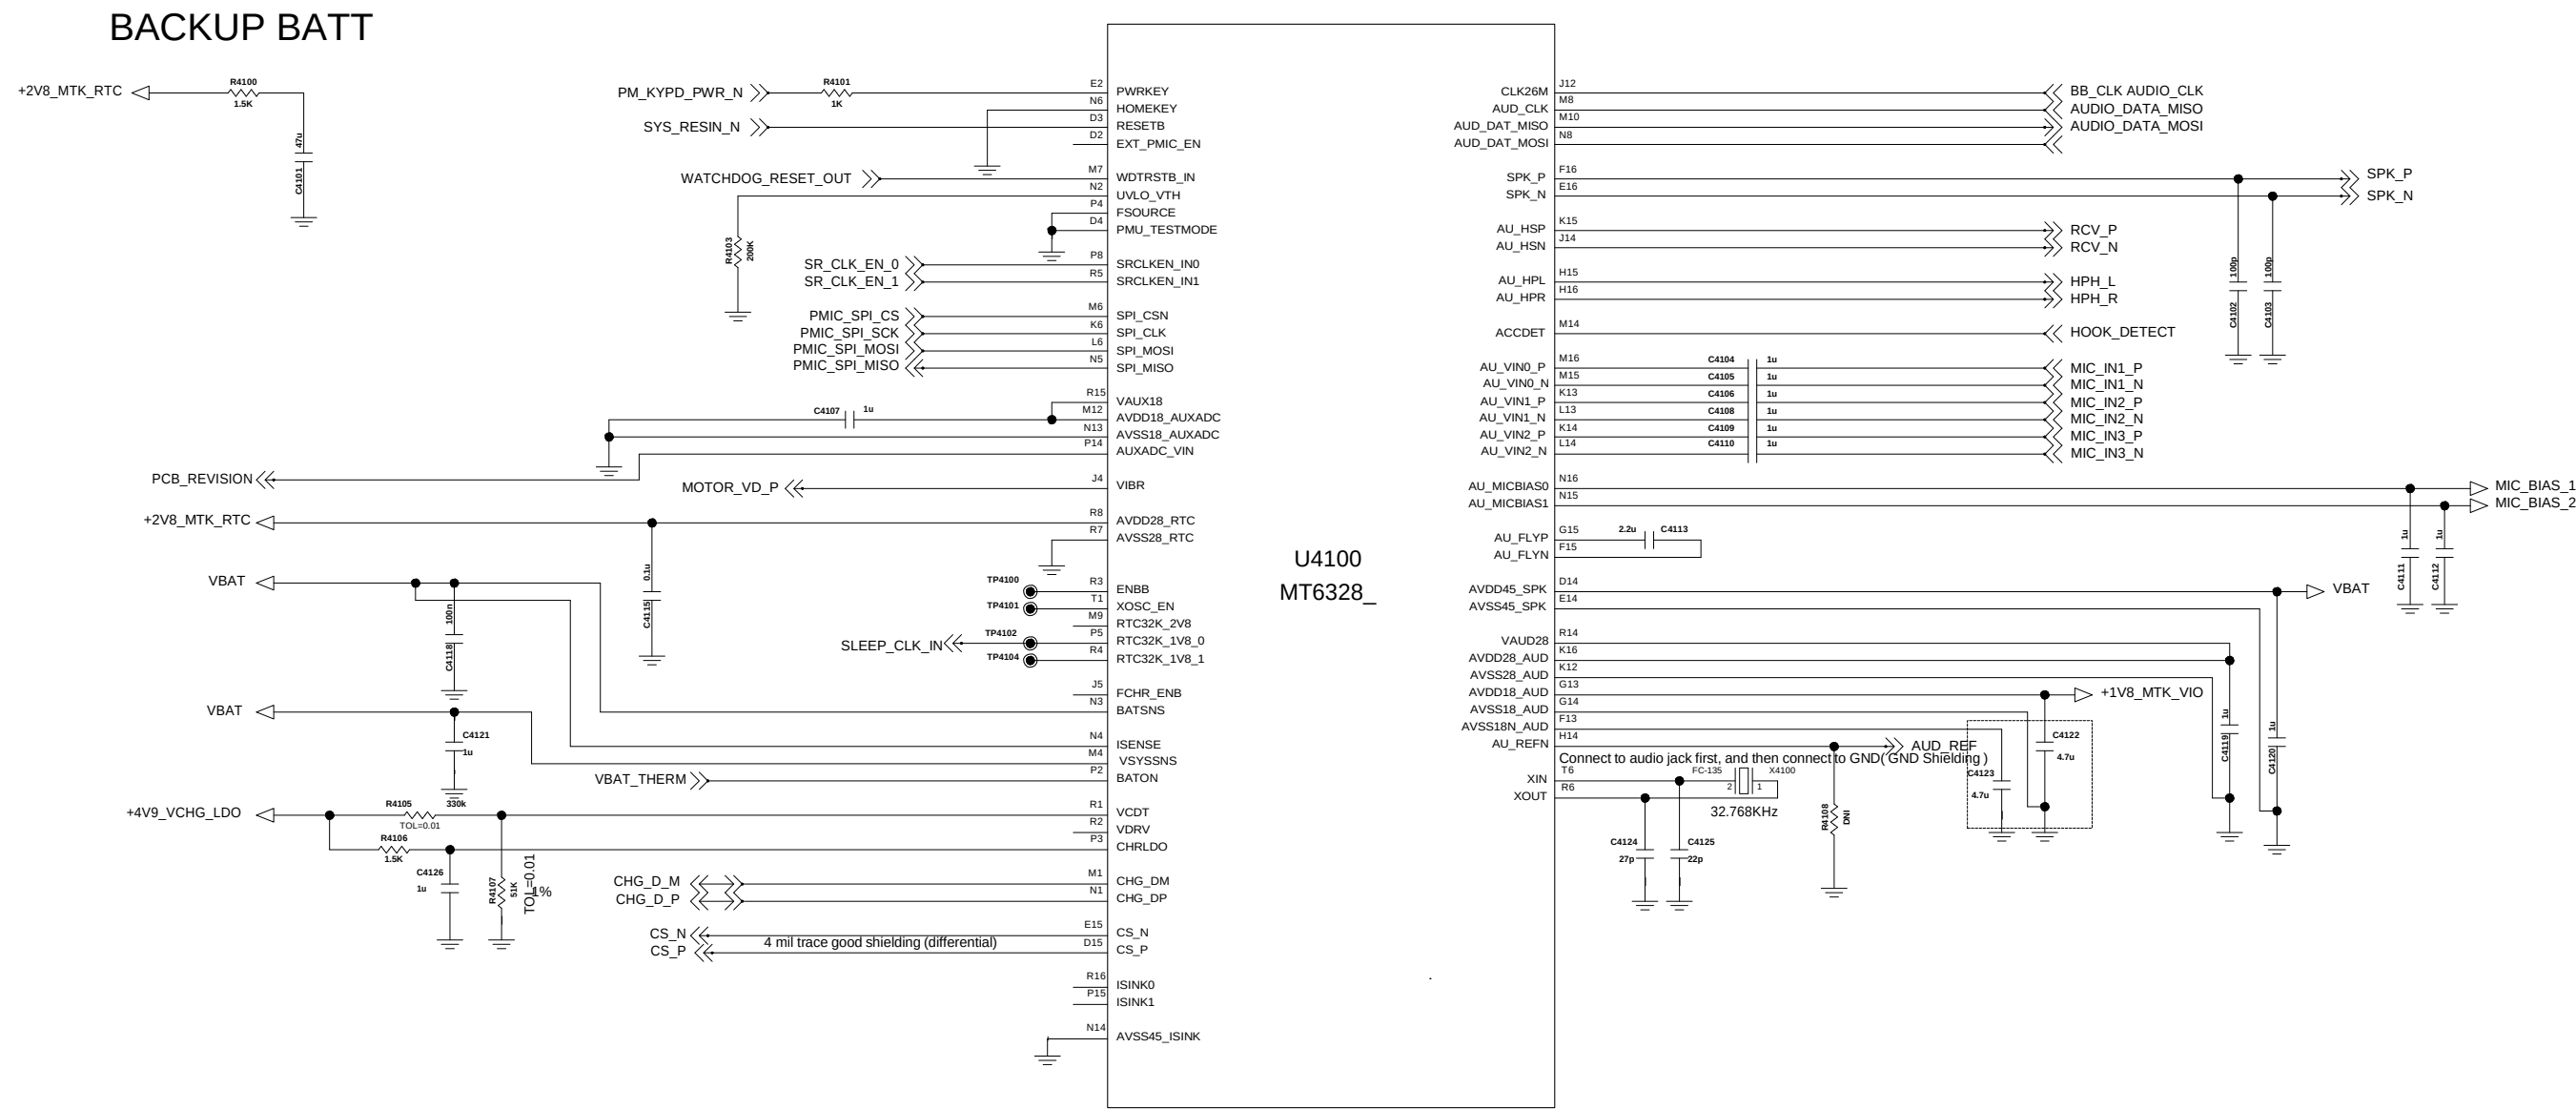



<5-1-1-18_MT6625L_WiFi_BT_GPS_FM>

Rev_0.3

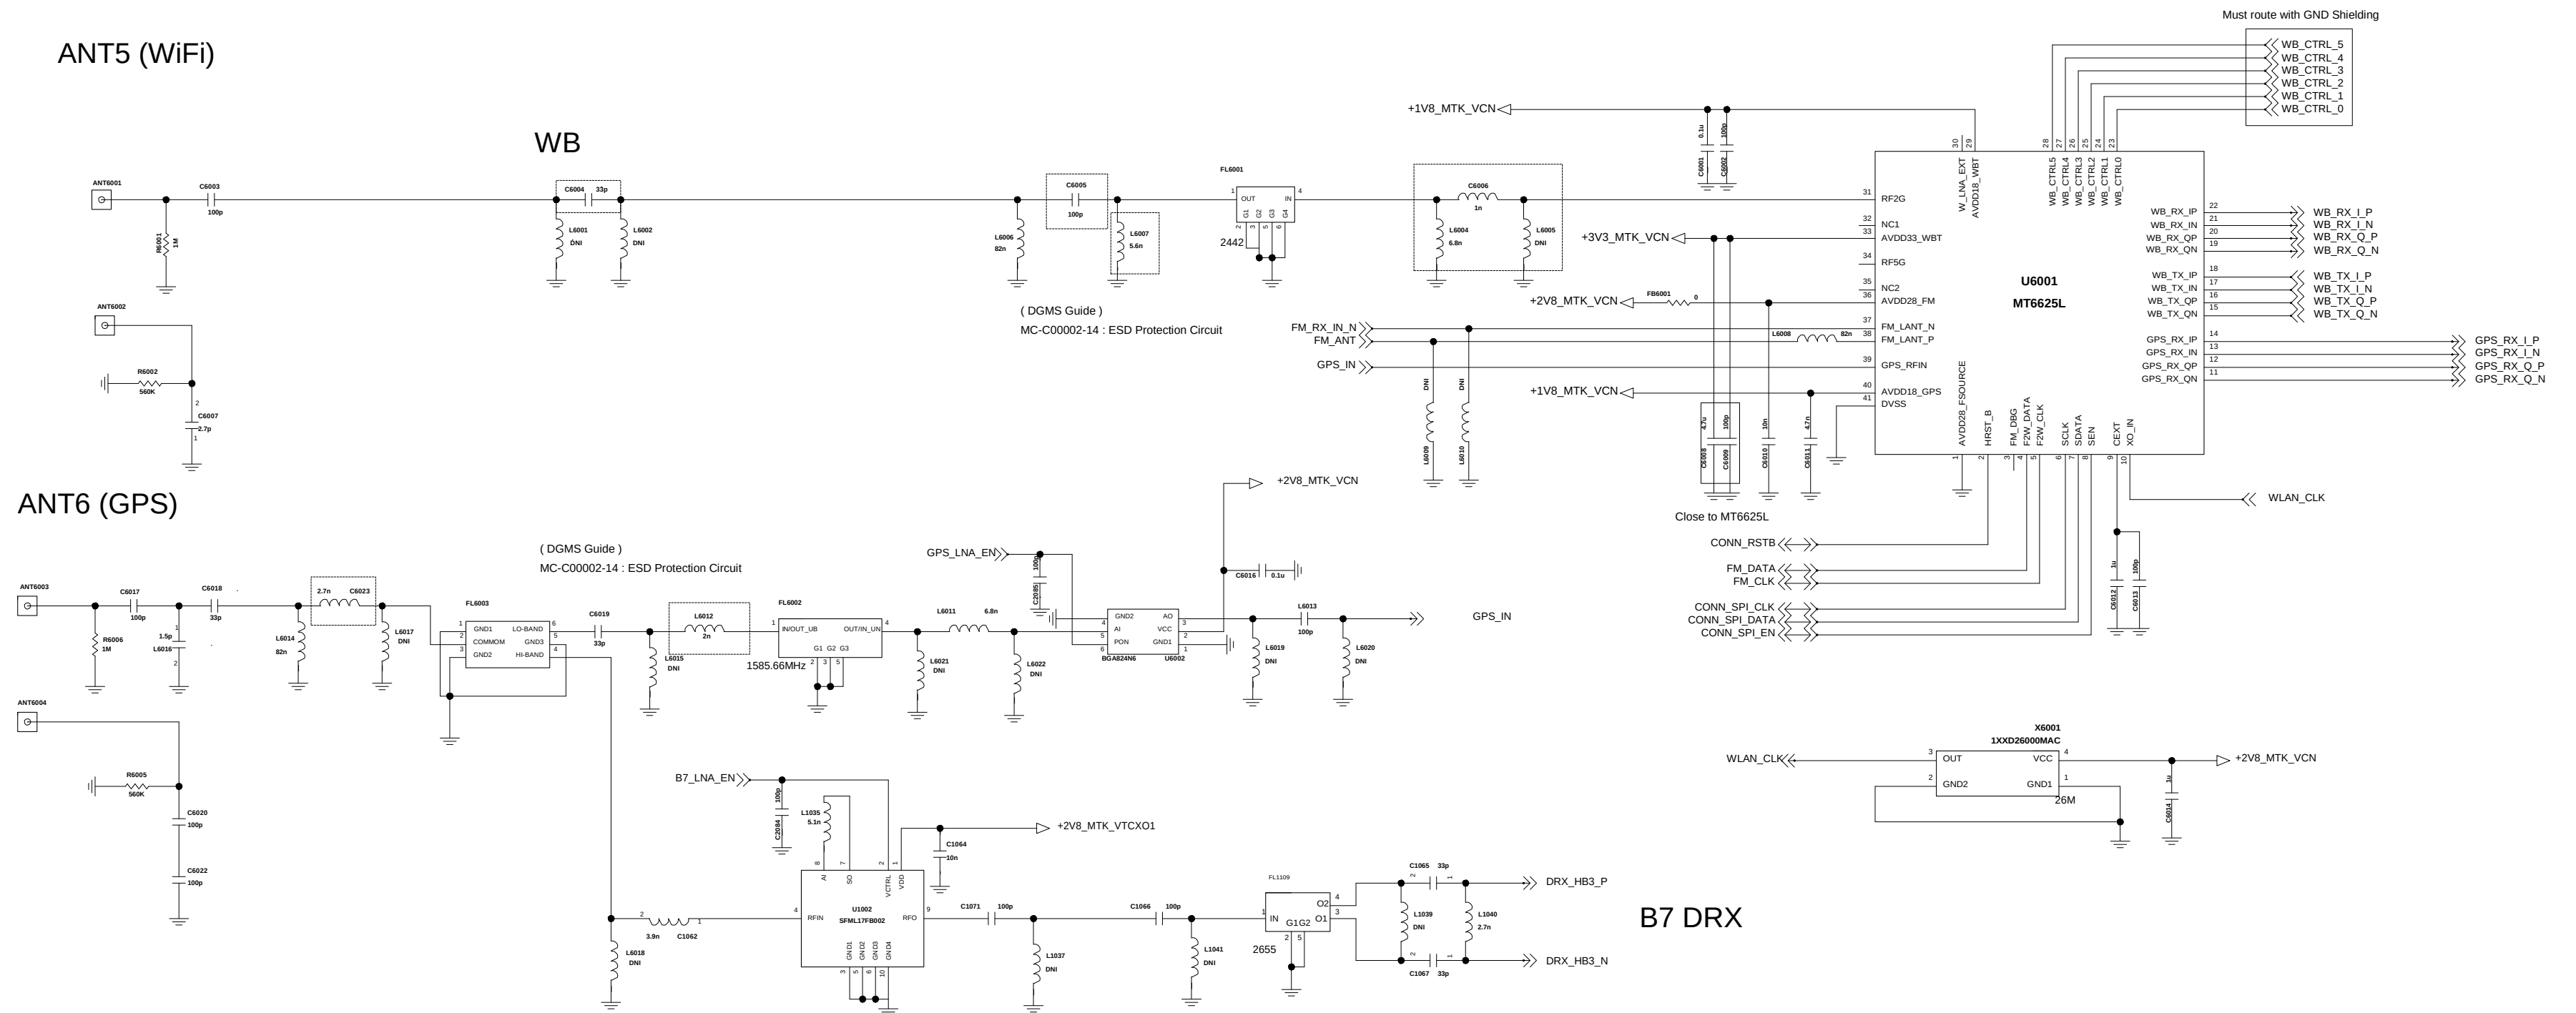

<5-2-1-8_BCM20795F> Rev_1.0


K350n, K350Y is mounted

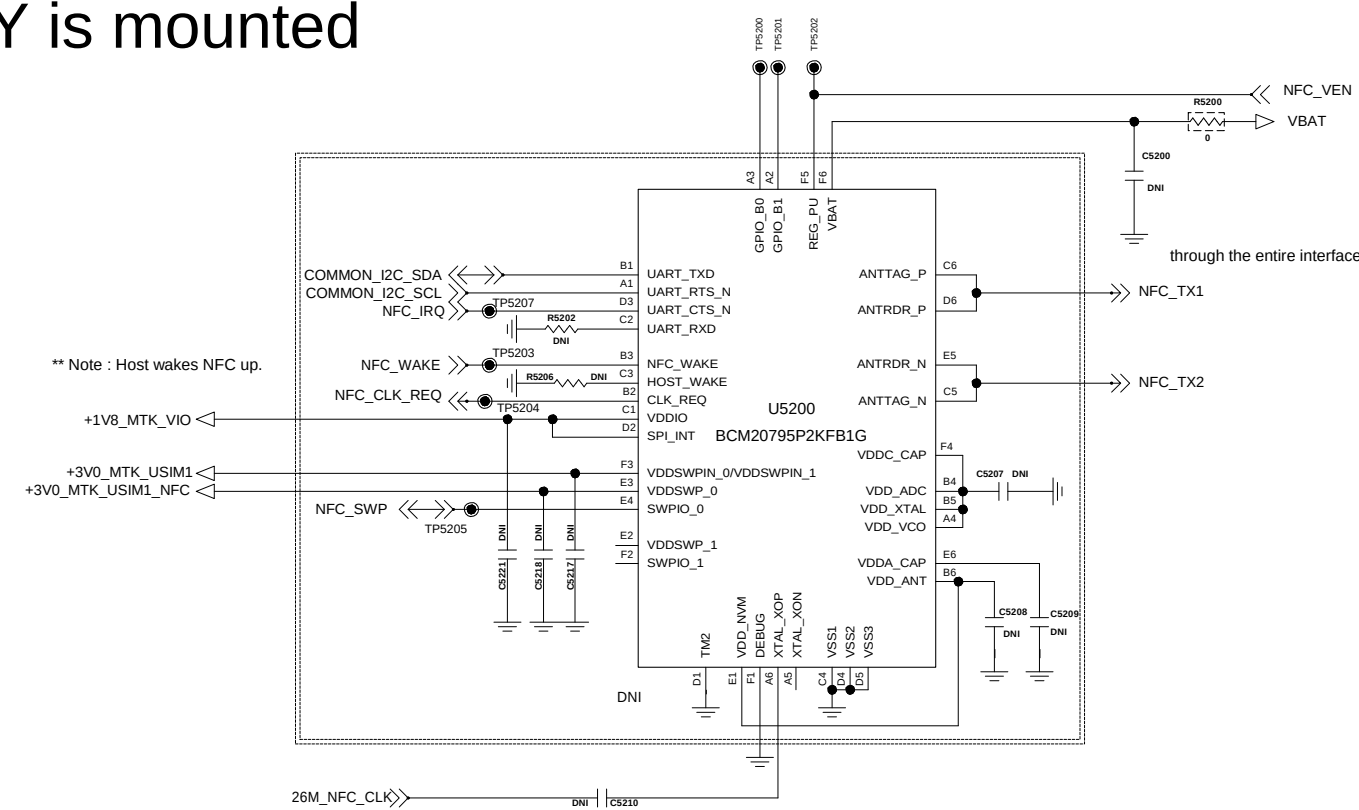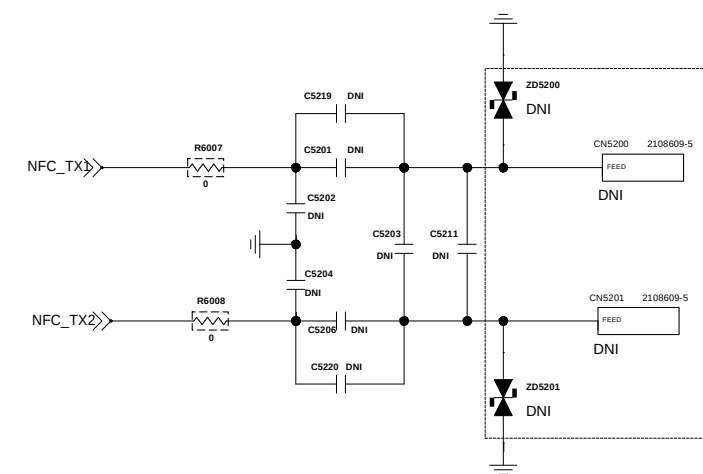

< 7-1-5_LCD_HD > Rev_1.1

LCD 2. 5.0 Inch incell

LCD Information	
Maker	LGD
Driver IC	DB7400
Connector	EAG64751201

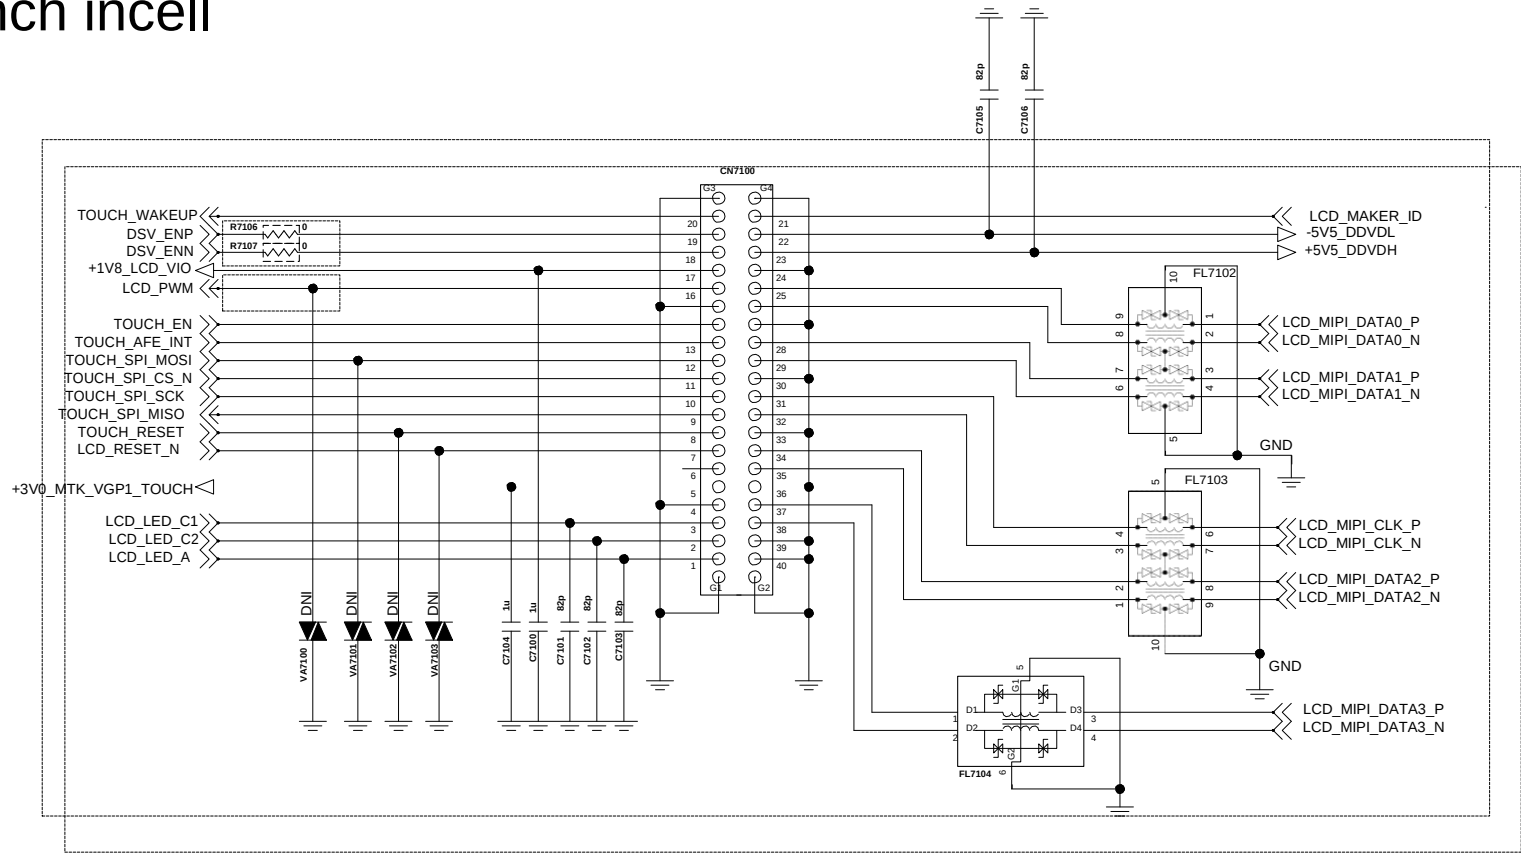


[DGMS Guide]
MC-C00057-16
1 - Components for ESD Protection should be located nearby at LCD Data, Control and Power line.
2- Basically, DNI_PAD for ESD Protection components should be used.
2- LCD RESET should be allocated with dedicated GPIO for the purpose of Reset function.

< 7-3_Main_Camera > Rev_1.1

Camera 5. 30pin 5M 8M AF

8M AF

- EBP62702201 (IM Tech)

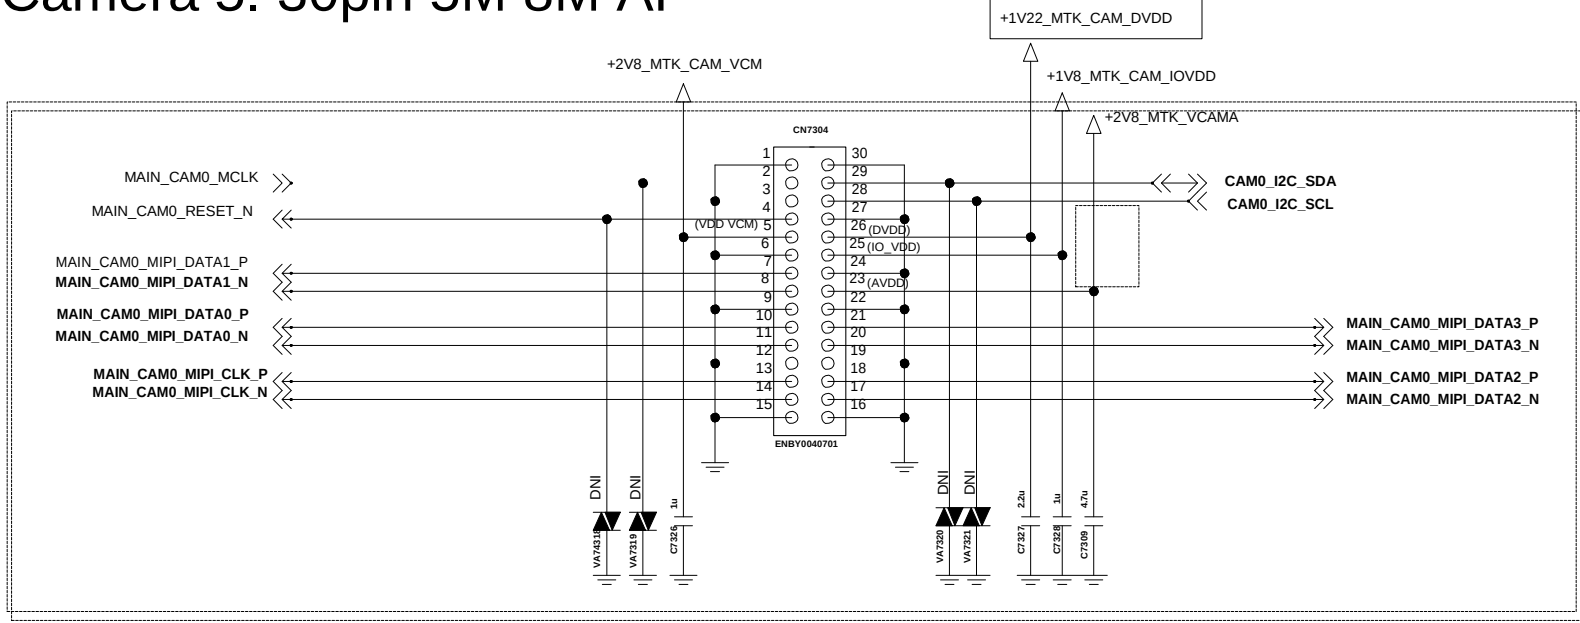


< 7-4_VT_Camera > Rev_1.2



Camera 5. 30pin 5M FF

5M FF


- EBP62722501 (BYD)

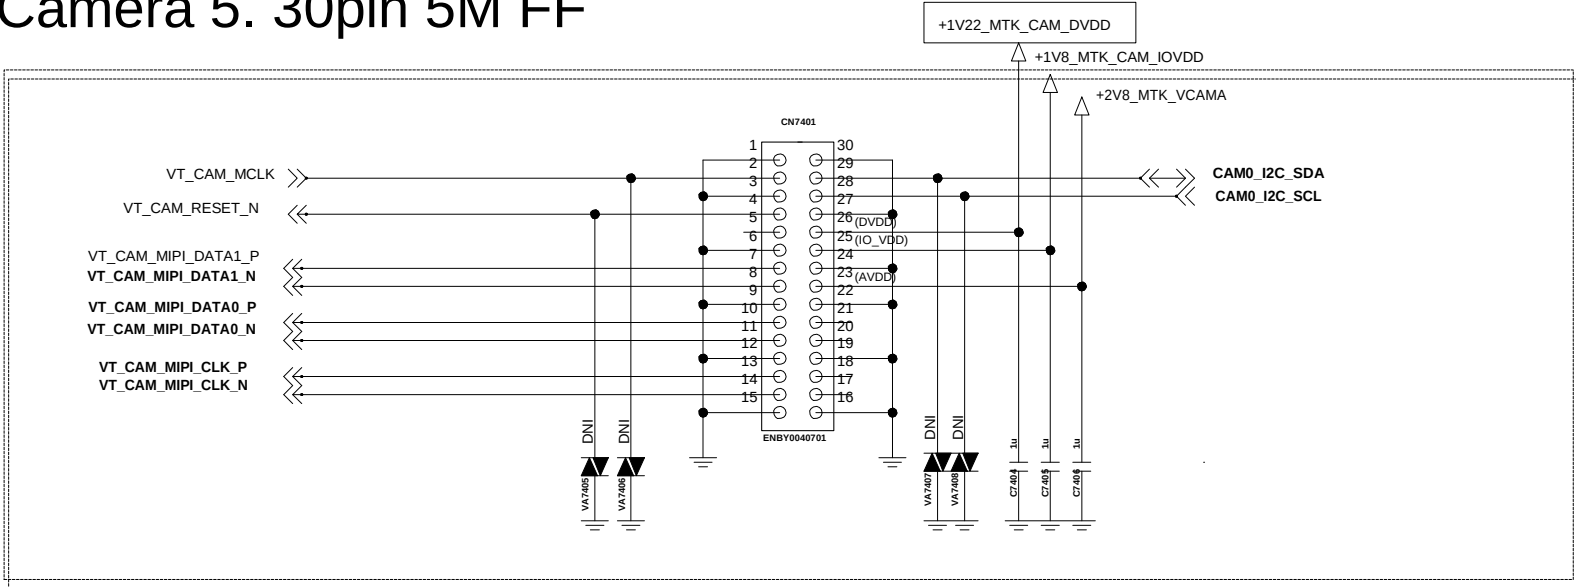

<4-4-7_LCD_Backlight_Flash_DSV_IC_RT4832> Rev_0.1

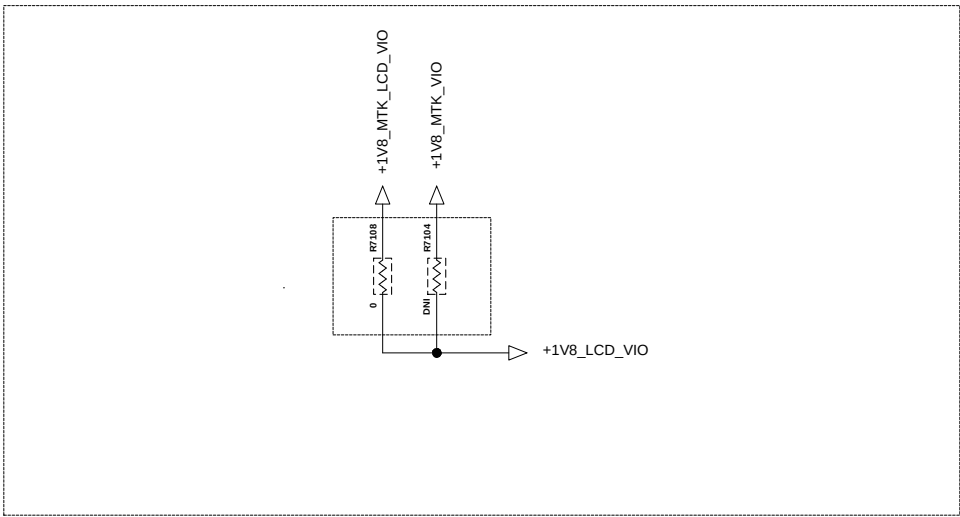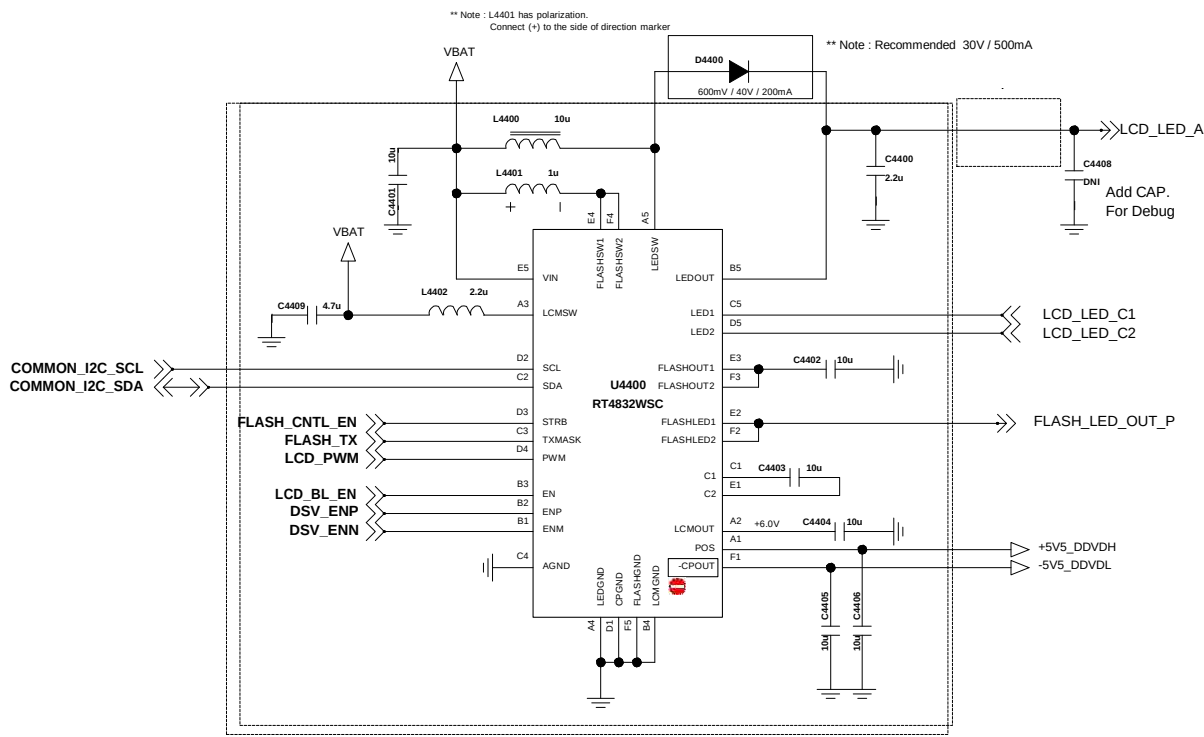


TOUCH MCU
MIT-300

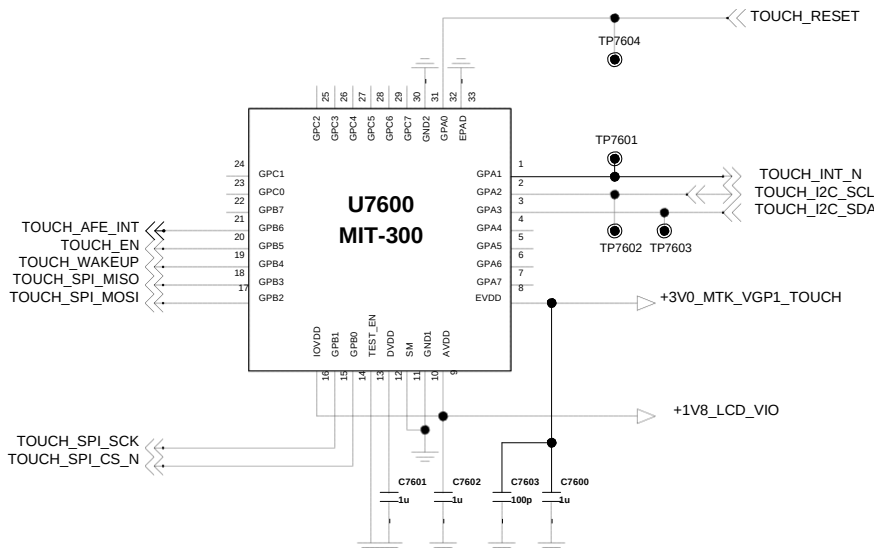


<9-1_Battery_Connector_4Pin> Rev_1.4


Circuit 5. Batt Conn.(For MTK Platform)

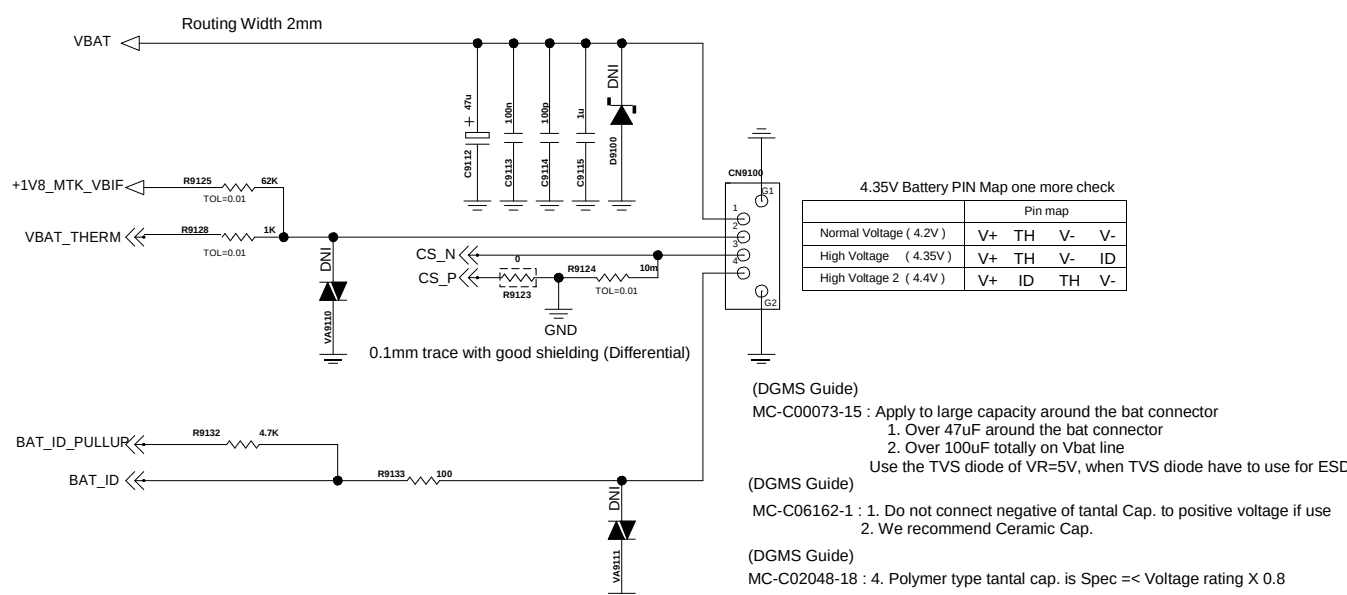

<9-2-1_USB_IO> Rev_1.2

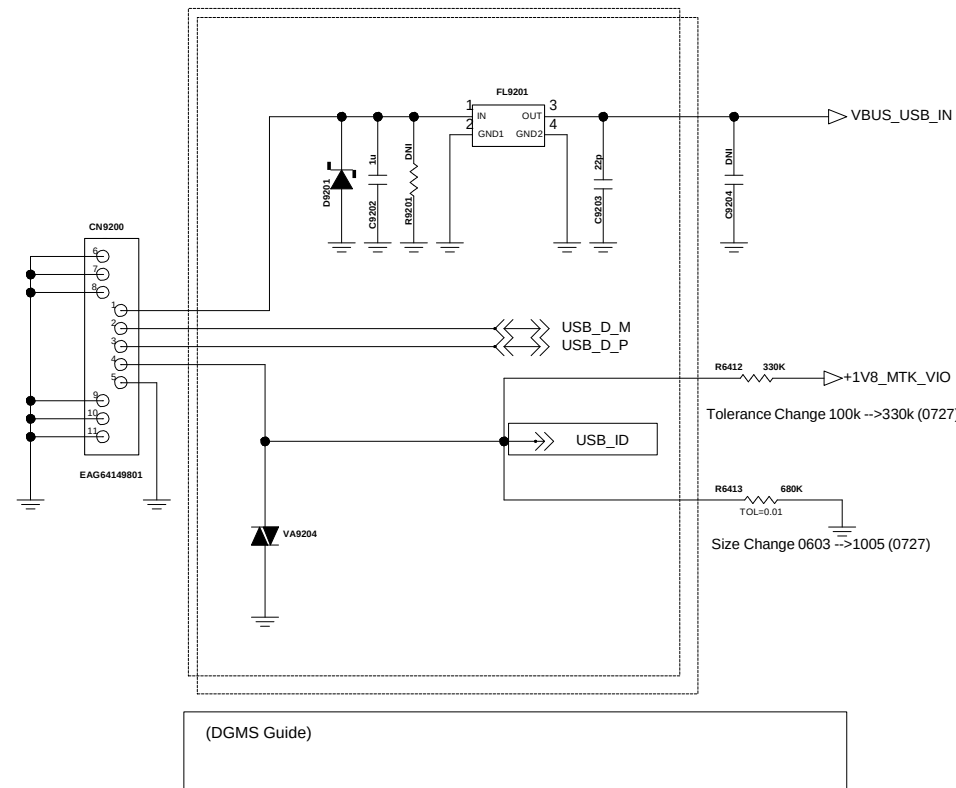


<4-7-1-1_Linear Charger_RT9536> Rev_1.0

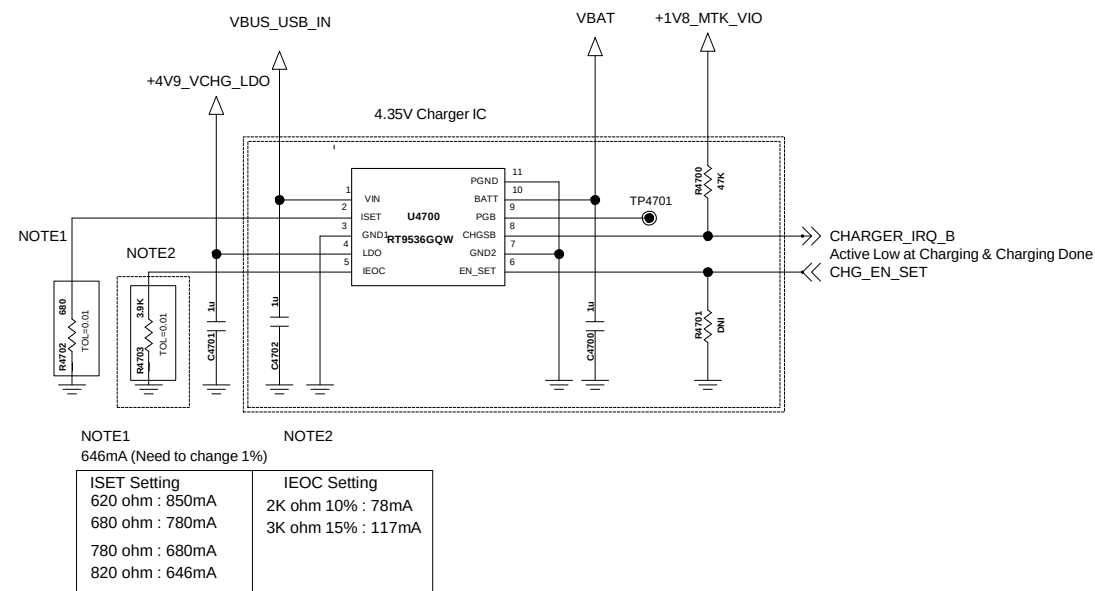


< 9-6_u_SDCARD_Socket > Rev_1.3


Circuit 1. u-SDCARD SIM Combo for QMC /w Low Detection

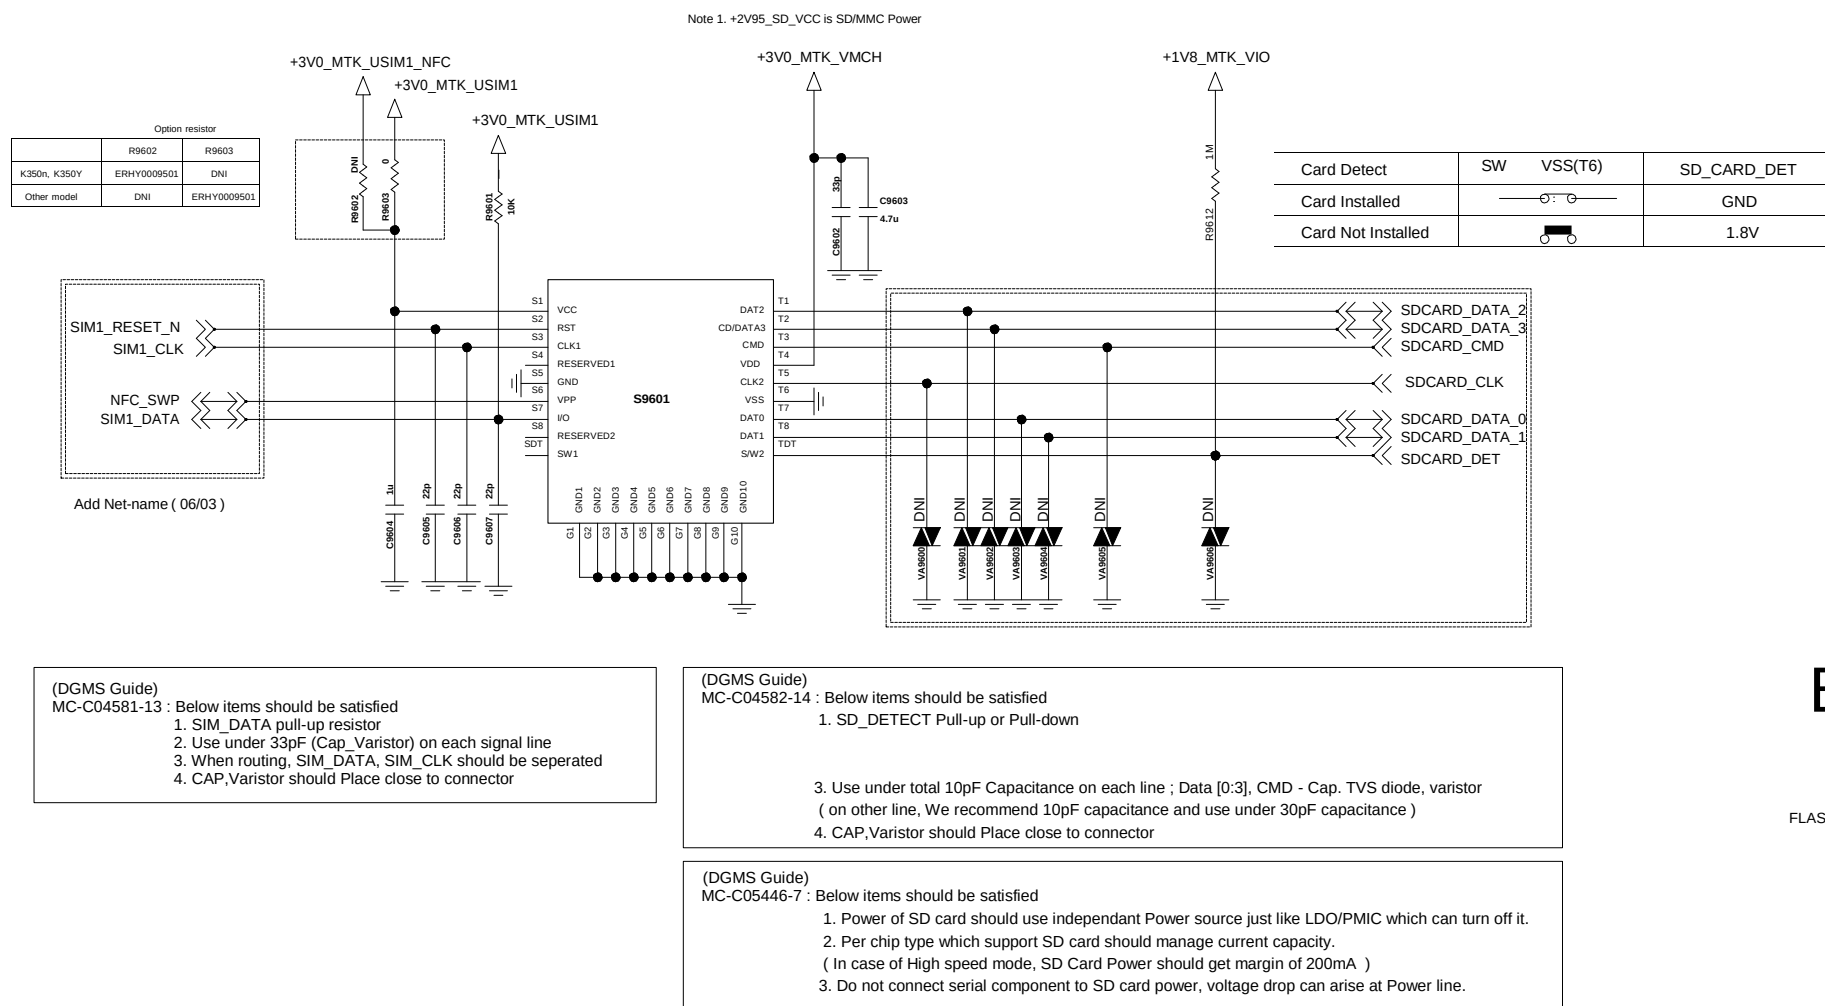


Dual SIM Connector

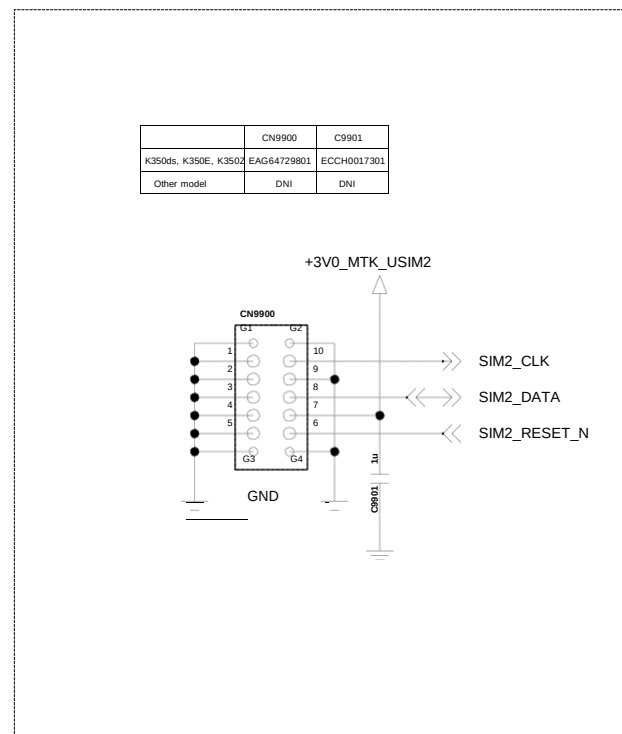

LCD Contact




Side Contact

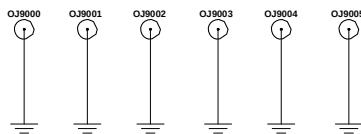


CAN_SHIELD



Connectivity




RF



PID Label




BACK KEY CONNECTOR

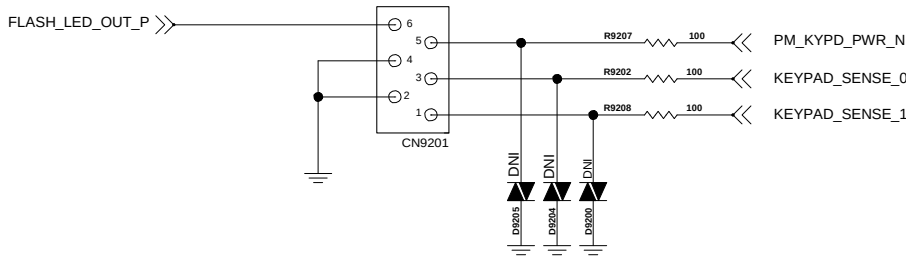


6. BGA PIN MAP

U2100_MT6735_IC,Digital Baseband Processor(Top View)

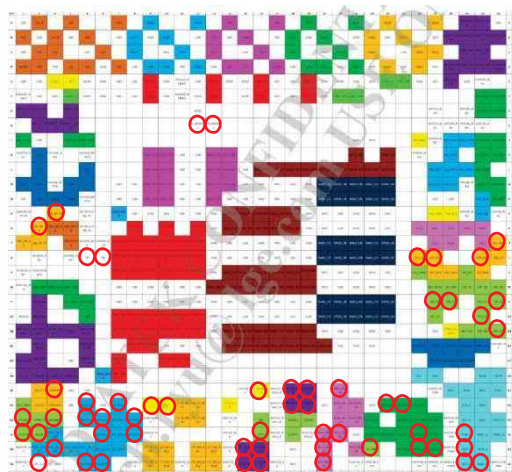


O Not used

U3300_H9TQ17A8GTMCUR,IC,MCP.eMMC(Top View)

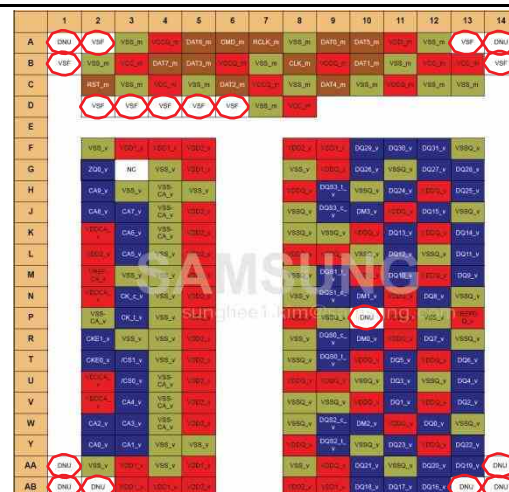

O Not used

U4100_MT6328_IC,PMIC (Top View)

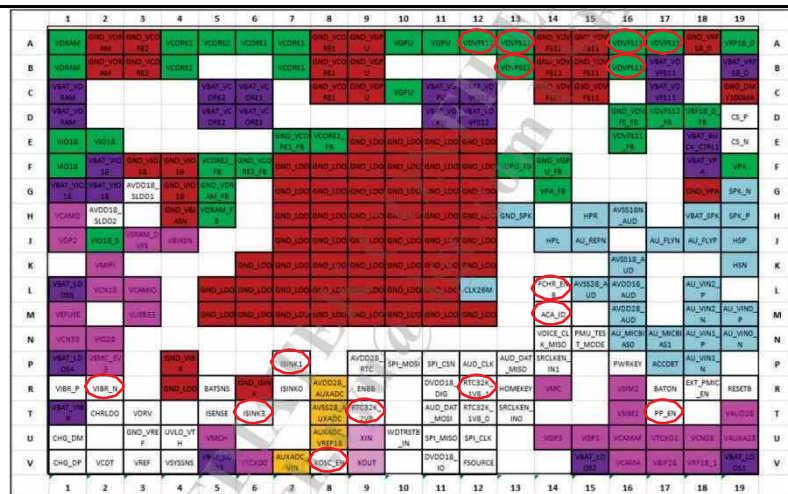

O Not used