



MOBILE PHONE SERVICE MANUAL

CAUTION

BEFORE SERVICING THE UNIT, READ THE "SAFETY PRECAUTIONS" IN THIS MANUAL

MODEL : LG-K430DSF

1. INTRODUCTION	3	6. BGA PIN MAP.....	219
1.1 Purpose		7. PCB LAYOUT.....	21:
1.2 Regulatory Information		8. HIDDEN MENU.....	227
2. PERFORMANCE.	4	9. DOWNLOAD.....	22:
2.1 Band Specification		10. CALIBRATION.....	231
2.2 HW Features		11. DISASSEMBLE GUIDE.....	232
2.3 RSSI Display		12. EXPLODED VIEW.....	236
2.4 Current consumption		13. REPLACEMENT PART LIST.....	237
2.5 Battery bar			
2.6 SW Specification			
3. TROUBLE SHOOTING.	13		
3.2 Transceiver DC Power Supply Circuit Block			
3.3 DC-DC Block			
3.4 FEMiD(Front End Module integrated Duplexer) Block			
3.5 GSM RF PART			
3.6 WCDMA RF PART			
3.7 LTE RF PART			
3.8 Checking Wifi/BT Block			
3.9 Checking GPS Block			
3.10 Checking FM Block			
3.11 Checking NFC Block			
3.12 Power			
3.13 charger			
3.14 Audio			
3.15 Checking LCD Block			
3.16 Touch			
3.17 Sensor			
3.18 Checking USB Block			
3.19 Camera			
4. BLOCK DIAGRAM.....	92		
5. CIRCUIT DIAGRAM.....	8:		

1.1 Purpose

This manual provides the information necessary to repair, calibration, description and download the features of this model.

1.2 Regulatory Information

A. Security

This material is prohibited to share and release to unauthorized person, in accordance with the regulations, LG Electronics, Civil / criminal responsibility in accordance with the relevant provisions violate.

B. Precautions for repair

- In case of Disassembly or Assembly to repair product, be careful of a product failure caused by RF signals and Static electricity.
- When using Magnetic tool for the Phone's SVC repair, you should check affect the Electric parts according to effect of Magnet.
- When fastening the screw, be careful not to damage the head of screw and even product.

C. Attention

Boards, which contain Electrostatic Sensitive Device (ESD), are indicated by the  sign.

Following information is ESD handling:

- Service personal should ground themselves by using a wrist, strap when exchange system board.
- When repair are made to a system board, they should spread the floor with anti-static mat which is also grounded.
- Use a suitable, grounded soldering iron.
- Keep sensitive parts in these protective packages until these are used.
- When returning system board or parts like EEPROM to the Factory, use the protective package as described.

2.1 Band Specification

Support Band	TX Freq (MHz)	RX Freq (MHz)
WCDMA(FDD1)	1920 – 1980	2110 – 2170
WCDMA(FDD2)	1852 – 1907	1932 – 1987
WCDMA(FDD5)	824 – 849	869 – 894
WCDMA(FDD8)	880 – 915	925 – 960
EGSM	880 – 915	925 – 960
GSM850	824 – 849	869 – 894
DCS1800	1710 – 1785	1805 – 1880
PCS1900	1850 – 1910	1930 – 1990
LTE3	1710 – 1785	1805 – 1880
LTE7	2500 – 2570	2620 – 2690
LTE28	703 – 748	758 – 803

2.2 HW Features

List	Type / Spec.	
1. Phone Type	DOP Type	
2. Size	146.6 x 74.8 x 8.8	
3. Weight	127.1 g (with Battery)	
4. Battery	2300mAh(Typ) (Li-Ion)	
5. Chipset	MT6753 1.14GHz Octa core	
6. Memory	16GB(EMMC) + 1.5GMB(LPDDR2)	
7. LCD	Size	5.3 inch
	Display Type	Active matrix TFT, Transmissive Type
	Color	16.7M colors
	Resolution	HD (720 x 1280)
8. Touch	Type	In-Cell Touch
9. Main Camera (13M)	Type	CMOS image sensor
	Resolution	13MP @ 30 FPS
	Focus (Laser / OIS)	AF (X/X)
	# of Flash	1EA

2. PERFORMANCE

2.2 HW Features

10. Audio	Receiver/Speaker/3.5phi	1 (AMR-WB) / 1 / Yes
	# of mic.	2
	Audio Zoom	X
11. Bluetooth	Standard	Bluetooth 4.0
	Effective Distance	10M
	Distance	0 m ~ 10 m (depend on environment)
12. WLAN	Standard	IEEE 802.11 b/g/n
	Throughput	Max 40Mbps (SDIO Driver performance)
	Depend on environment	0 ~ 50m (depend on environment)
13. GPS	type	A-GPS
14. FM	type	FM Radio, 3.5pi Ear-jack

2.3 RSSI Display

RSSI BAR	GSM RSSI	WCDMA RSCP	LTE RSRP	Comment
BAR 5->4	- 91dBm± 3dB	- 89dBm± 3dB	-85dBm ± 3dB	1. Call Connected & CIPPH Level =-3.3 2. LTE: RSRP
BAR 4->3	- 96dBm± 3dB	- 94dBm± 3dB	-95dBm ± 3dB	
BAR 3->2	- 99dBm± 3dB	- 100dBm± 3dB	-105dBm ± 3dB	
BAR 2->1	- 103dBm± 3dB	- 104dBm± 3dB	-115dBm ±3dB	
BAR 1->0	- 105dBm± 3dB	- 110dBm± 3dB	-128dBm ± 3dB	

RSSI BAR	GSM RSSI	WCDMA RSSI	LTE RSSI	Comment
BAR 5->4	- 91dBm± 3dB	- 86dBm± 3dB	-85dBm ± 3dB	1. Call Connected & CIPPH Level =-3.3
BAR 4->3	- 96dBm± 3dB	- 91dBm± 3dB	-95dBm ± 3dB	
BAR 3->2	- 99dBm± 3dB	- 97dBm± 3dB	-105dBm ± 3dB	
BAR 2->1	- 103dBm± 3dB	- 101dBm± 3dB	-115dBm ±3dB	
BAR 1->0	- 105dBm± 3dB	- 107dBm± 3dB	-128dBm ± 3dB	

2.4 Current consumption

- . Battery Spec. : 2,300mAh(Typ.)/3.8V/Li-Ion

구분	Specification	측정 조건
Sleep mode (WCDMA)	320h over 7 mA under	DRX 7 @ BATT Capacity : 2300mAh
Sleep mode (GSM)	320h over 7 mA under	EGSM P5 @ BATT Capacity : 2300mAh
Sleep mode (LTE)	320h over 7 mA under	DRX 2.56 @ BATT Capacity :2300mAh (AMR Mode)
Calling (WCDMA)	350m over 400mA under	10dBm @ BATT Capacity :2300mAh (AMR Mode)
Calling (GSM)	350m over 400mA under	EGSM, LV5 @ BATT Capacity : 2300mAh
Calling (LTE)	300m over 430mA under	Cat2 Tx 10dBm @ BATT Capacity : 2300mAh
Charging time	4h 20m under	Phone off

2.5 Battery bar

Battery Bar	Specification	Battery Bar	Specification
Bar 20(Full)	98%이상	Bar 9 → Bar 8	43% → 42%
Bar 20 → Bar 19	98% → 97%	Bar 8 → Bar 7	38% → 37%
Bar 19 → Bar 18	93% → 92%	Bar 7 → Bar 6	33% → 32%
Bar 18 → Bar 17	88% → 87%	Bar 6 → Bar 5	28% → 27%
Bar 17 → Bar 16	83% → 82%	Bar 5 → Bar 4	23% → 22%
Bar 16 → Bar 15	78% → 77%	Bar 4 → Bar 3	16% → 15%
Bar 15 → Bar 14	73% → 72%	Bar 3 → Bar 2	13% → 12%
Bar 14 → Bar 13	68% → 67%	Bar 2 → Bar 1	8% → 7%
Bar 13 → Bar 12	63% → 62%	Bar 1 → Bar 0	3% → 2%
Bar 12 → Bar 11	58% → 57%	Power off	1%이하
Bar 11 → Bar 10	53% → 52%	Low battery pop-up	15% , 5%
Bar 10 → Bar 9	48% → 47%	high temperature pop-up	57도, 60도(Power off)

2.6 SW Specification

Item	Feature	Comment
RSSI	0 ~ 5 Levels	
Battery Charging	0 ~ 20 Levels	
Key Volume	0 ~ 7 Level	
Audio Volume	0 ~ 15 Level	
Time / Date Display	Yes	
Multi-Language	Yes	depending on build language
Quick Access Mode	Phone / Messaging / Browser/ Applications	Phone / Contact / Messaging / Applications
PC Sync	Yes	
Speed Dial	Yes	Voice mail center -> 1 key
Profile	Yes	not same with feature phone setting
CLIP / CLIR	Yes	
Phone Book	Name / Number / Email / Groups / Postal addresses / Organizations / IM / Note / Nickname / Website / Event /	There is no limitation on the number of items. It depends on available memory amount.
Last Dial Number	Yes	
Last Received Number	Yes	
Last Missed Number	Yes	
Search by Number/Name	Yes	
Group	Yes	There is no limitation on the number of items. It depends on available memory amount.
Fixed Dial Number	Yes	
Service Dial Number	No	
Own Number	Yes	My Profile (add/edit/delete are supported)

2.6 SW Specification

Voice Memo	Yes	Support voice recorder
Call Reminder	No	
Network Selection	Automatic	
Mute	Yes	
Call Divert	Yes	
Call Barring	Yes	
Call Charge (AoC)	No	
Call Duration	Yes	
SMS (EMS)	There is no limitation on the number of items It depends on available memory amount.	EMS does not support.
SMS Over GPRS	Yes	
EMS Melody / Picture Send / Receive / Save	No	
MMS MPEG4 Send / Receive / Save	Yes	➤ Send / Receive : Yes ➤ Save : depends on content type Support video content type list 1. video/mp4 2. video/h263 3. video/3gpp2 video/3gpp
Long Message	MAX 2000 characters	The standard of Open vender
Cell Broadcast	Yes	
Download	Over the Web	
Game	No	
Calendar	Yes	
Memo	Yes	There is no limitation on the number of items. It depends on available memory amount.
World Clock	Yes	

2.6 SW Specification


Unit Convert	No	
Stop Watch	Yes	
Wall Paper	Yes	
WAP Browser	No	Support only web browser based on webkit. WAP stack and wml are not supported.
Download Melody / Wallpaper	Yes	Over web browser
SIM Lock	No	
SIM Toolkit	Yes	
MMS	Yes	OMA MMS 1.2 version
EONS	Yes	
CPHS	Yes	V4.2
ENS	No	
Camera	Yes	13MP AF / 5MP Digital Zoom : x4
JAVA	No	
Voice Dial	No	US English only
IrDa	No	IrRC
Bluetooth	Yes	Ver. 4.2LE [HSP, HFP, A2DP, AVRCP, PBAP, OPP, MAP, HID, PAN, HOGP, HDP, DID]
FM radio	Yes	
GPRS	Yes	Class 12
EDGE	Yes	Class 12(Rx only)
Hold / Retrieve	Yes	
Conference Call	Yes	Max. 6
DTMF	Yes	
Memo pad	No	
TTY	No	
AMR	Yes	
SyncML	No	
IM	Yes	Google Hangout
Email	Yes	IMAP/POP3/SMTP/EAS

3. TROUBLE SHOOTING

3.1 Checking XO Block

The out put frequency(26MHz) of VTCXO(X5001) is used as the reference one of MT6169

Checking Flow

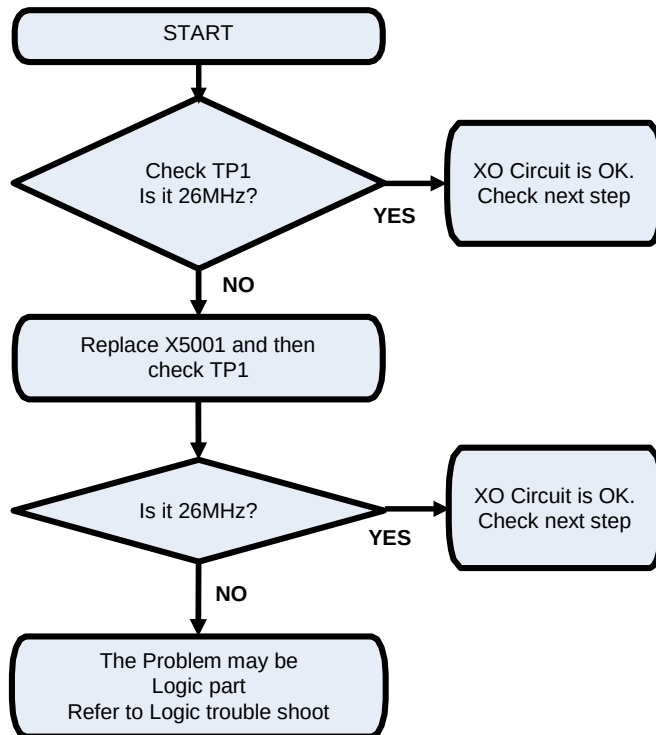


Image

Main Top



Circuit Diagram

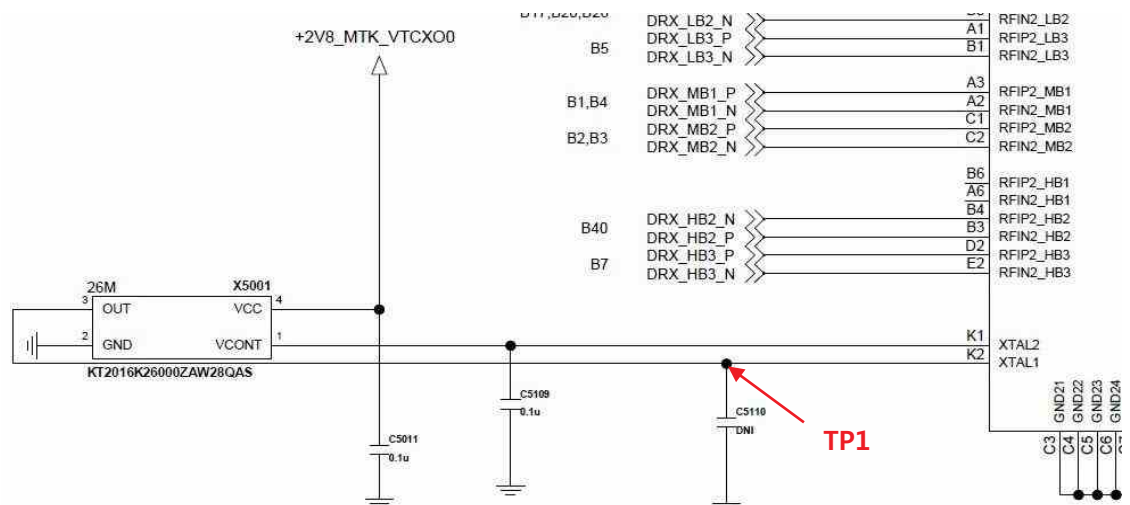


3. TROUBLE SHOOTING


3.2 Checking Transceiver DC Power Supply Circuit Block

The MT6169 operating voltages used two voltage sources 1.8V and 2.8V


Checking Flow

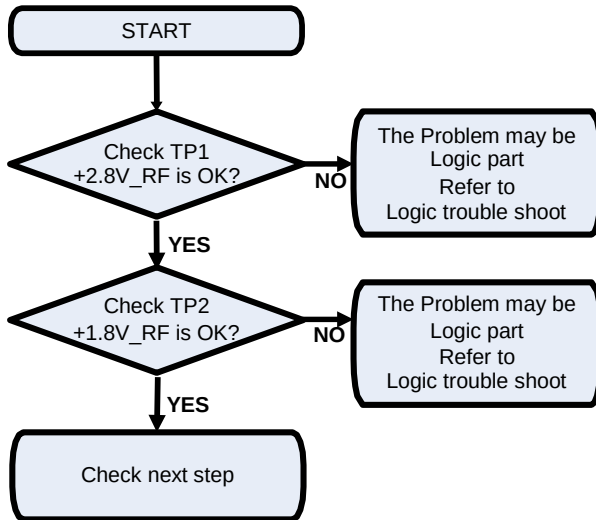

Image

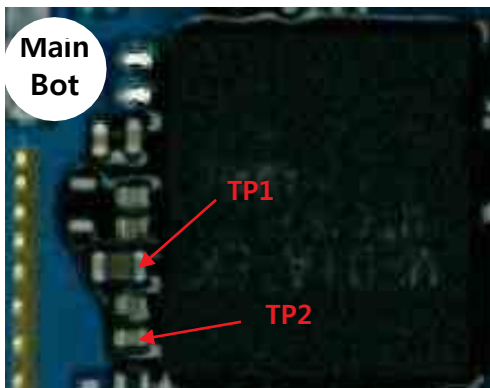

Circuit Diagram

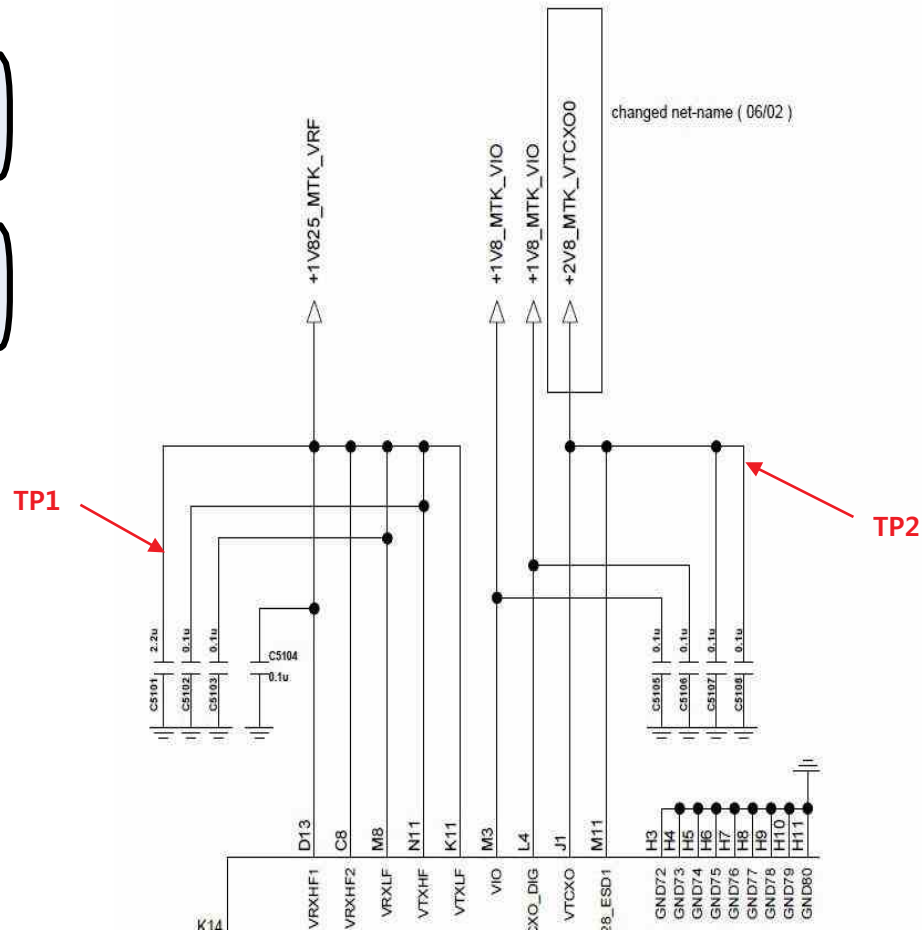


3. TROUBLE SHOOTING



3.3 Checking DC-DC Block

The DC-DC(MT6328, U4100) output voltages is used as the reference one of SKY77643-31

Checking Flow

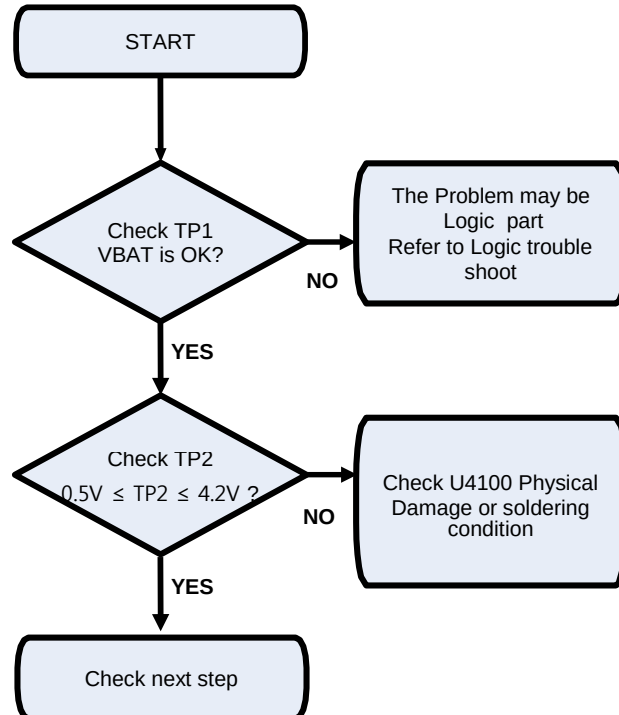

Image

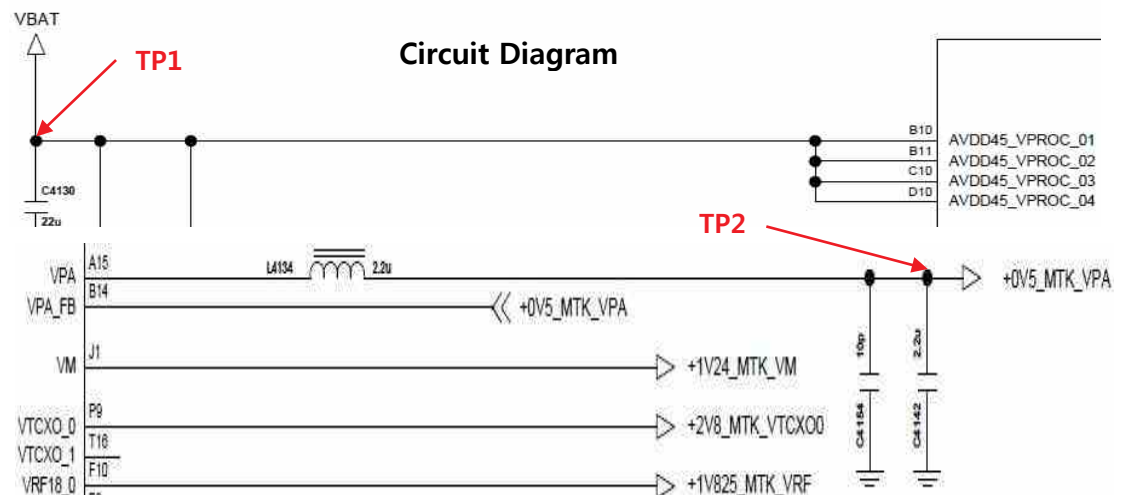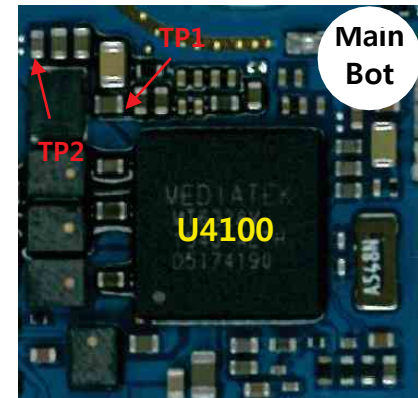


3. TROUBLE SHOOTING



3.4 ASM(Antenna Switch Module) Block

3.4.1 Checking ANT #1 ASM (GSM 850/900, W B5/8, LTE B7/20)


Checking Flow

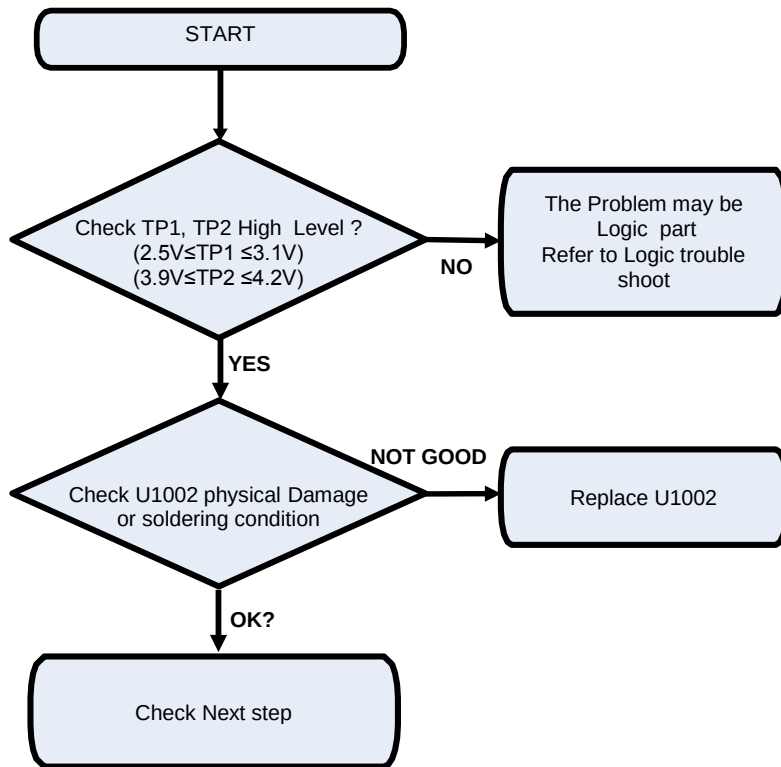

Image

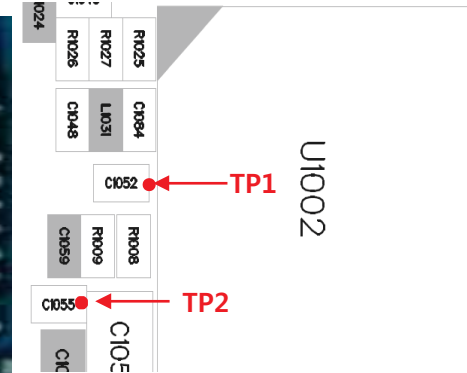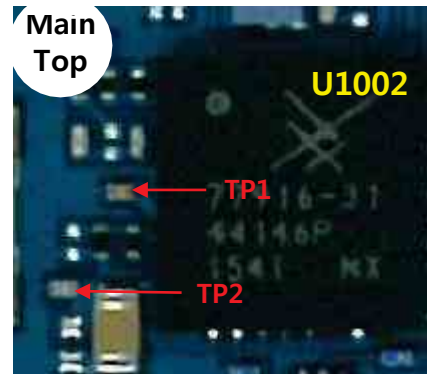

Circuit Diagram

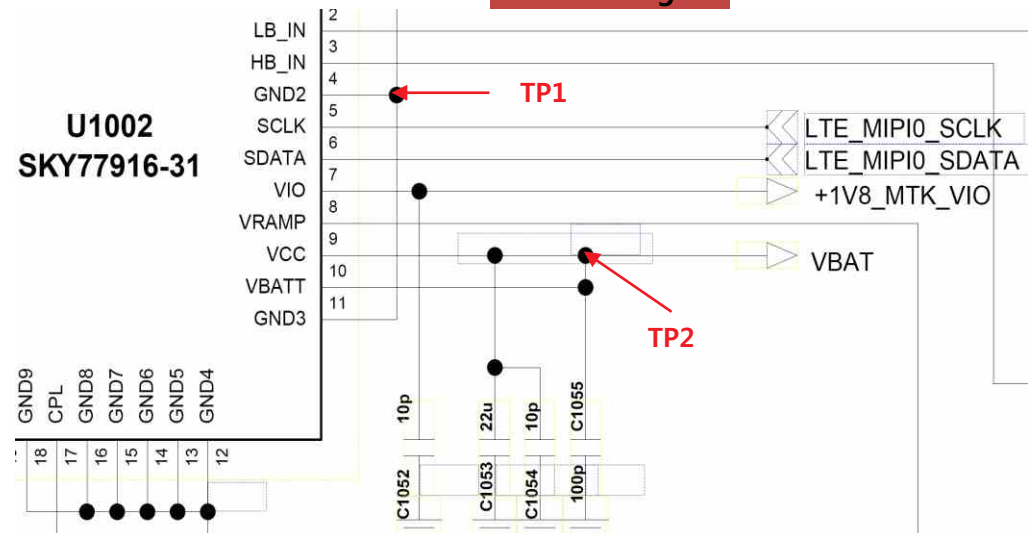


3. TROUBLE SHOOTING


3.4 ASM(Antenna Switch Module) Block

3.4.2 Checking ANT #2 ASM (GSM 1800/1900, W B1 B2, LTE B3)


Checking Flow

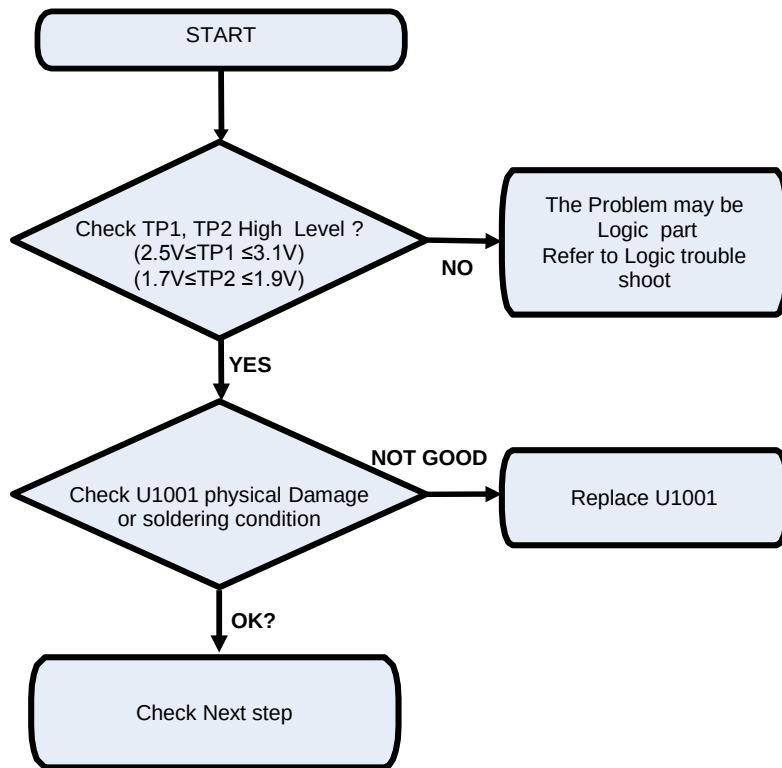

Image

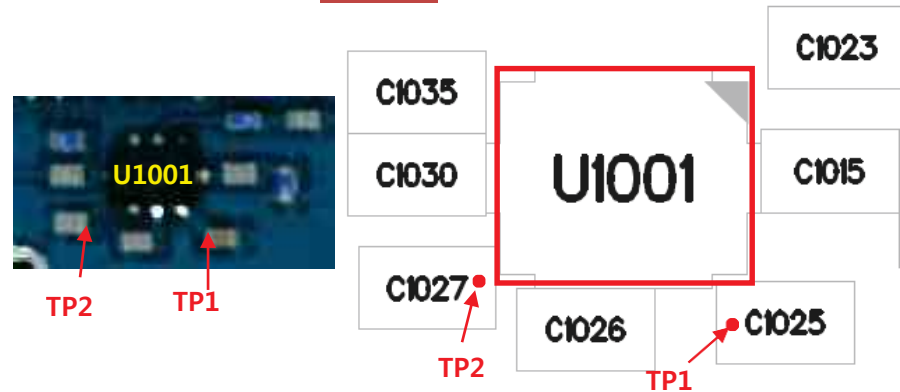


Circuit Diagram

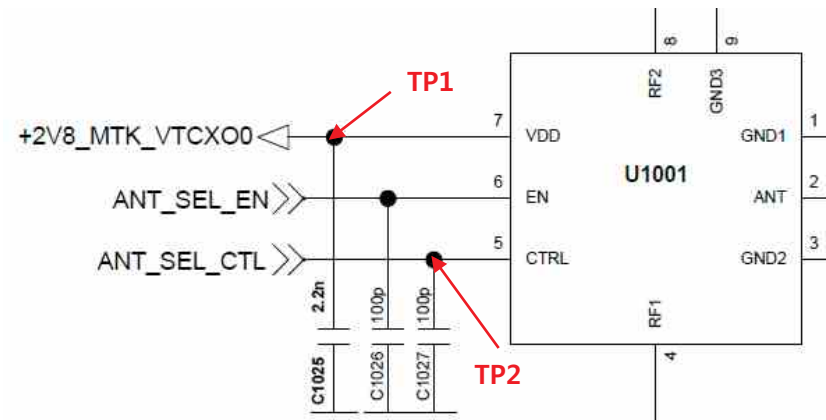

3.5 GSM RF PART

GSM RF Part support GSM850/900/1800/1900 with ASM, PAM, Transceiver component

Checking Flow

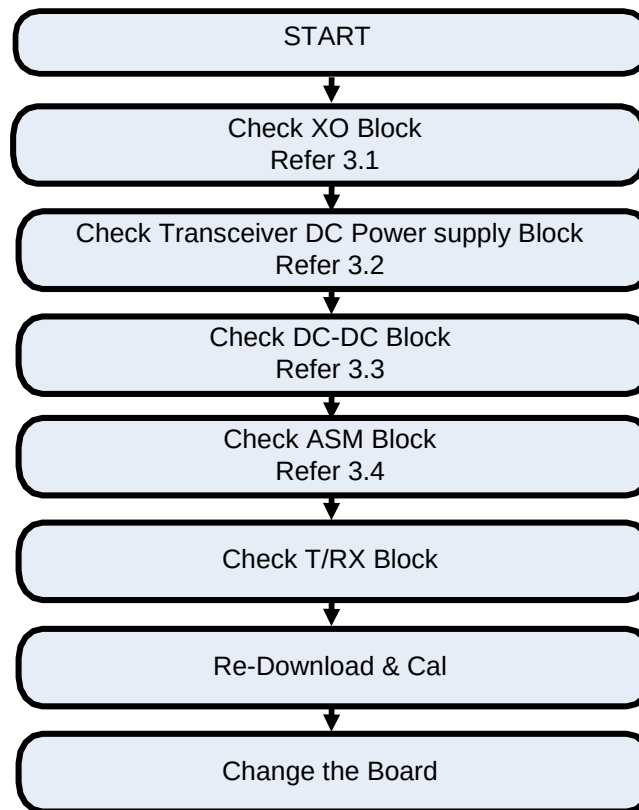

3. TROUBLE SHOOTING


3.5 GSM RF PART

3.5.1 GSM RF Part RX RF PATH

Image

1. GSM850 RX PATH
2. GSM900 RX PATH
3. GSM1800 RX PATH
4. GSM1900 RX PATH

**Main
Top**

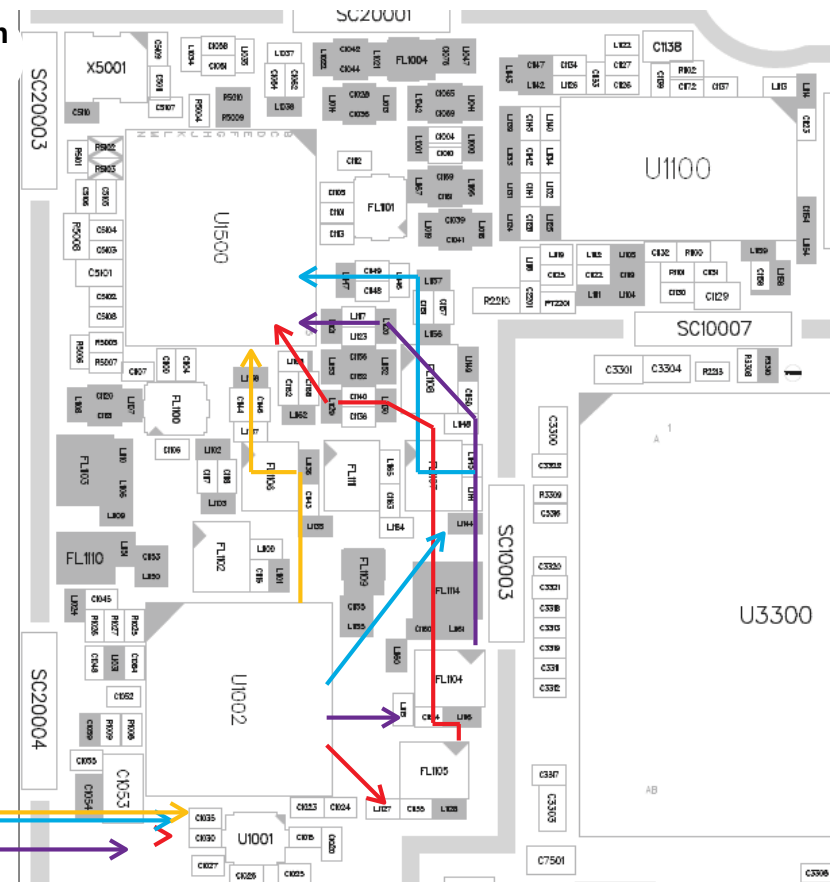


3. TROUBLE SHOOTING


3.5 GSM RF PART

3.5.2 Checking RF Signal RX path(SW, GSM850/900)


Checking Flow

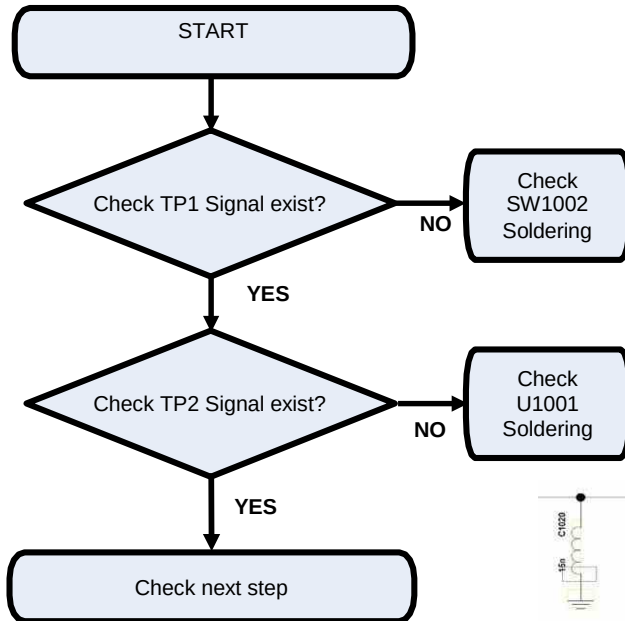


Main Top



Image

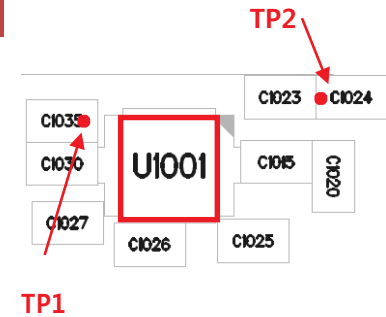

Circuit Diagram

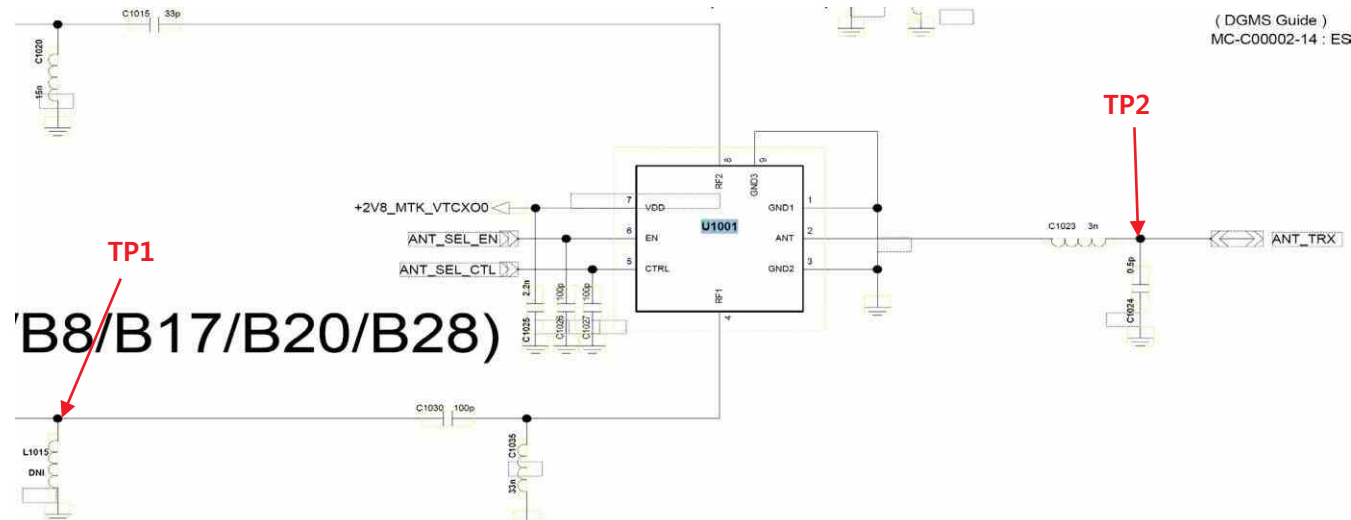


3. TROUBLE SHOOTING


3.5 GSM RF PART

3.5.3 Checking RF Signal RX path(GSM850/900)


Checking Flow

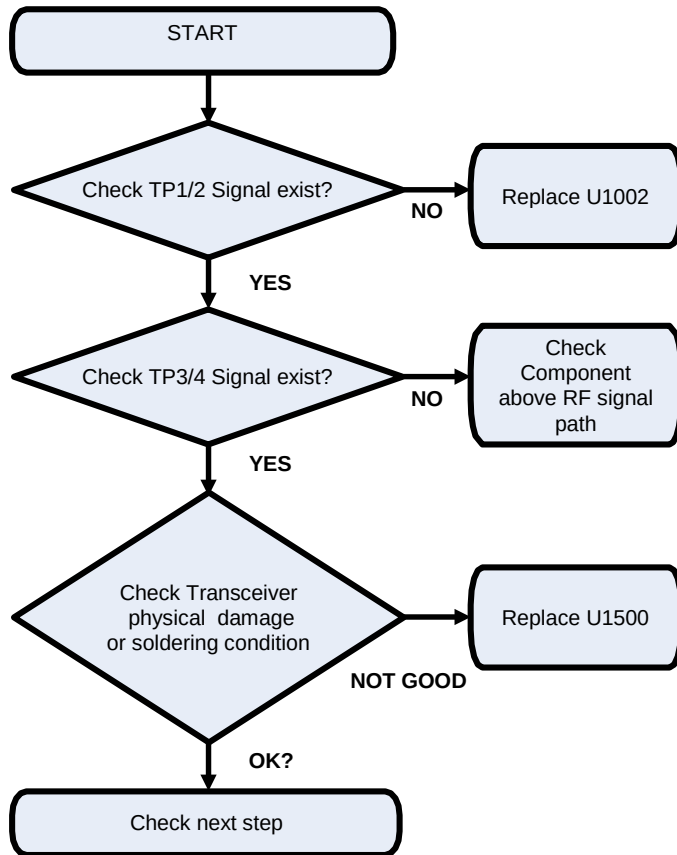

Image

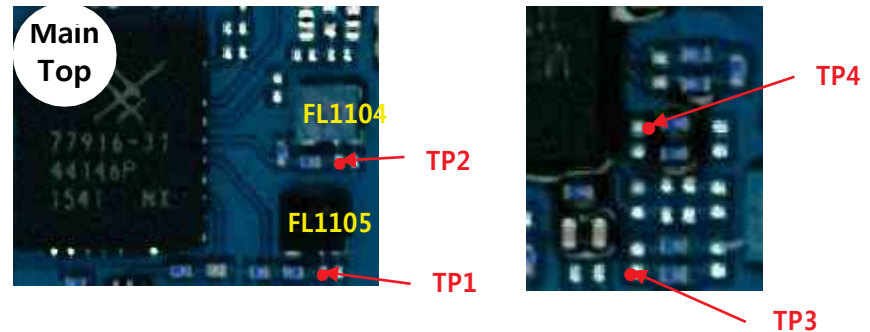

Circuit Diagram

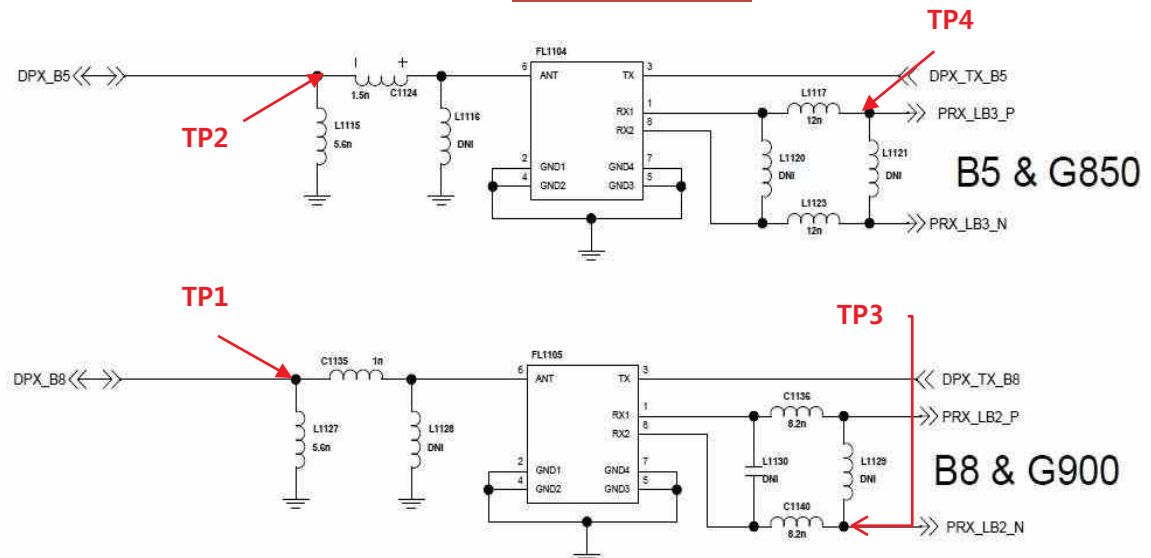


3. TROUBLE SHOOTING

3.5 GSM RF PART


3.5.4 Checking RF Signal RX path(SW, GSM1800/1900)

Checking Flow

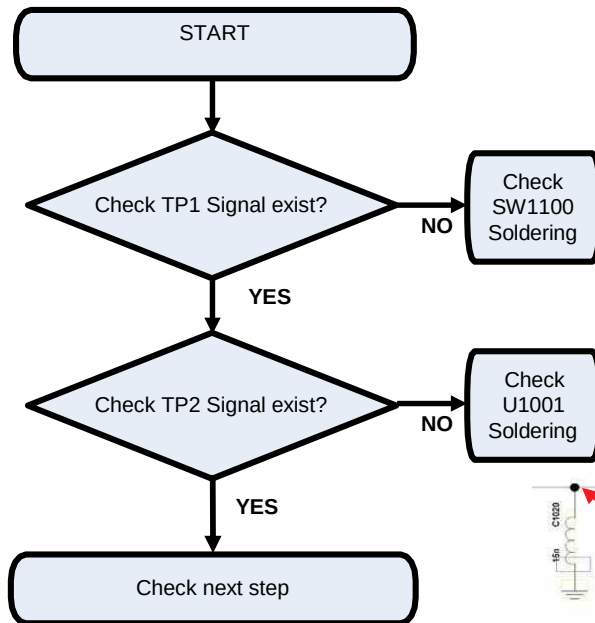


Image

Main
Top

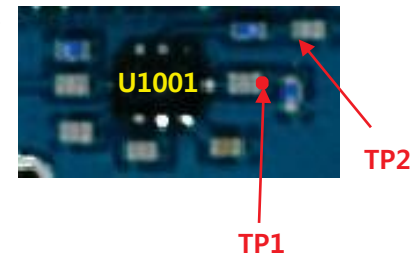

Circuit Diagram

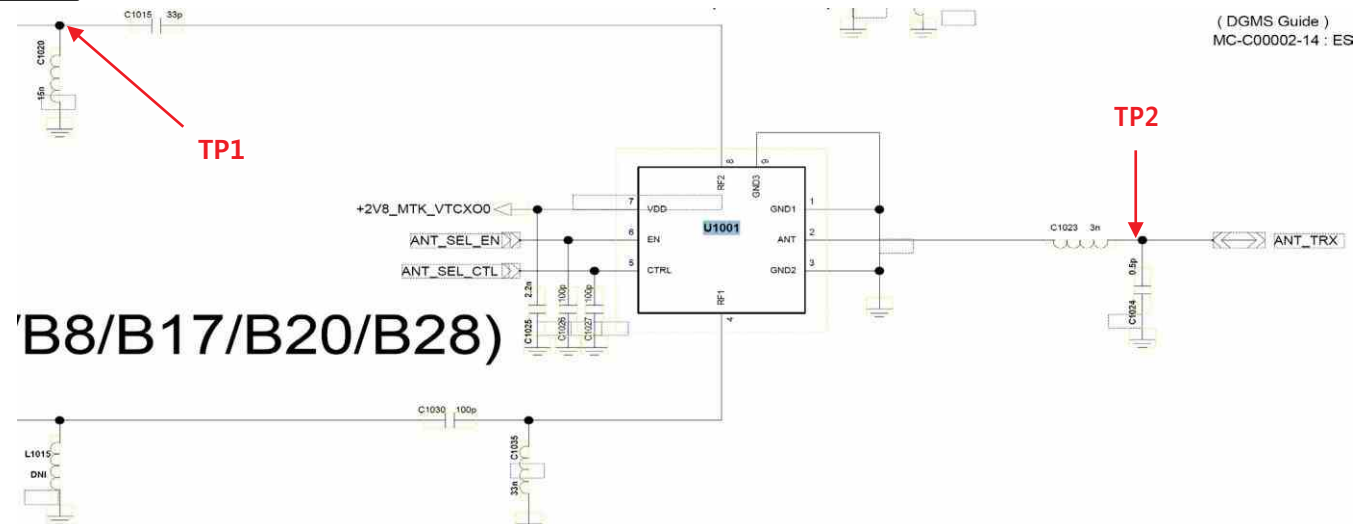


3. TROUBLE SHOOTING


3.5 GSM RF PART

3.5.5 Checking RF Signal RX path(GSM1800/1900)


Checking Flow

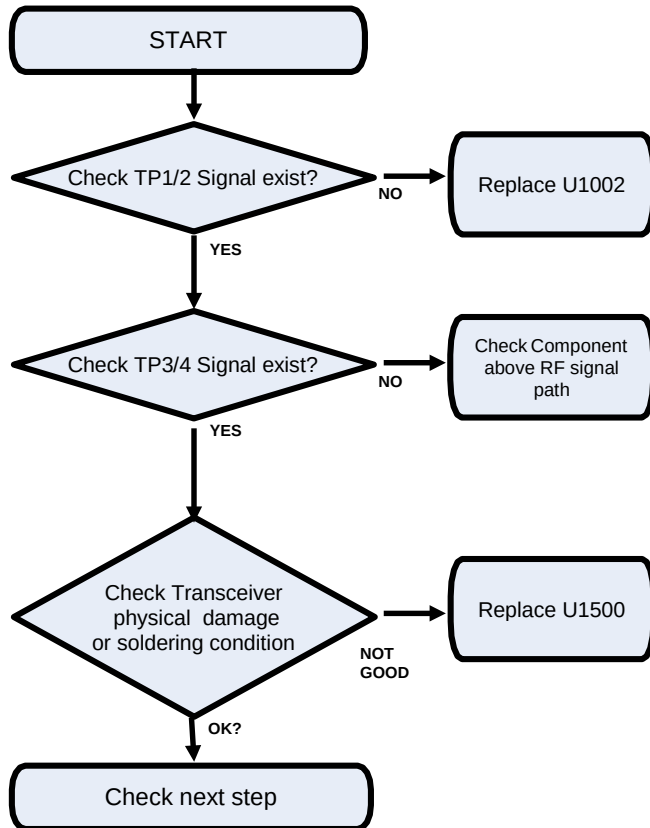

Image

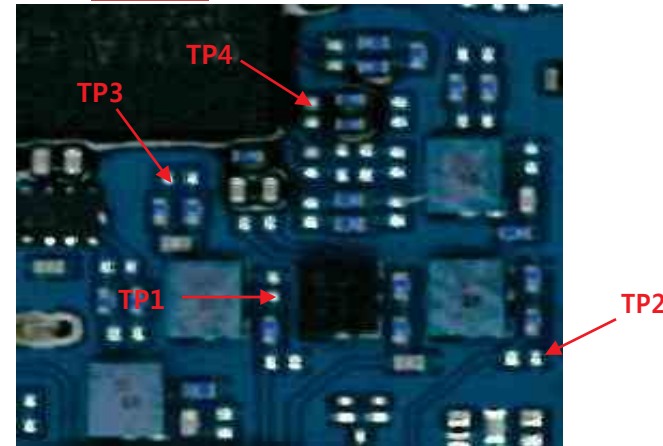

Circuit Diagram

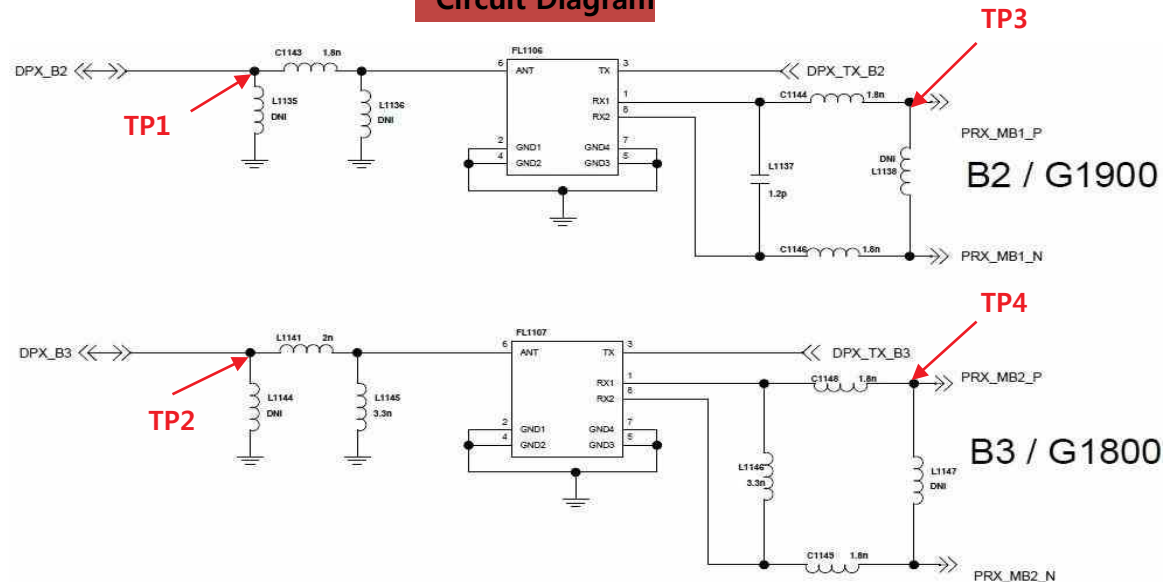


3. TROUBLE SHOOTING

3.5 GSM RF PART

3.5.6 GSM RF Part TX RF PATH

1. GSM850 TX PATH
2. GSM900 TX PATH
3. GSM1800 TX PATH
4. GSM1900 TX PATH

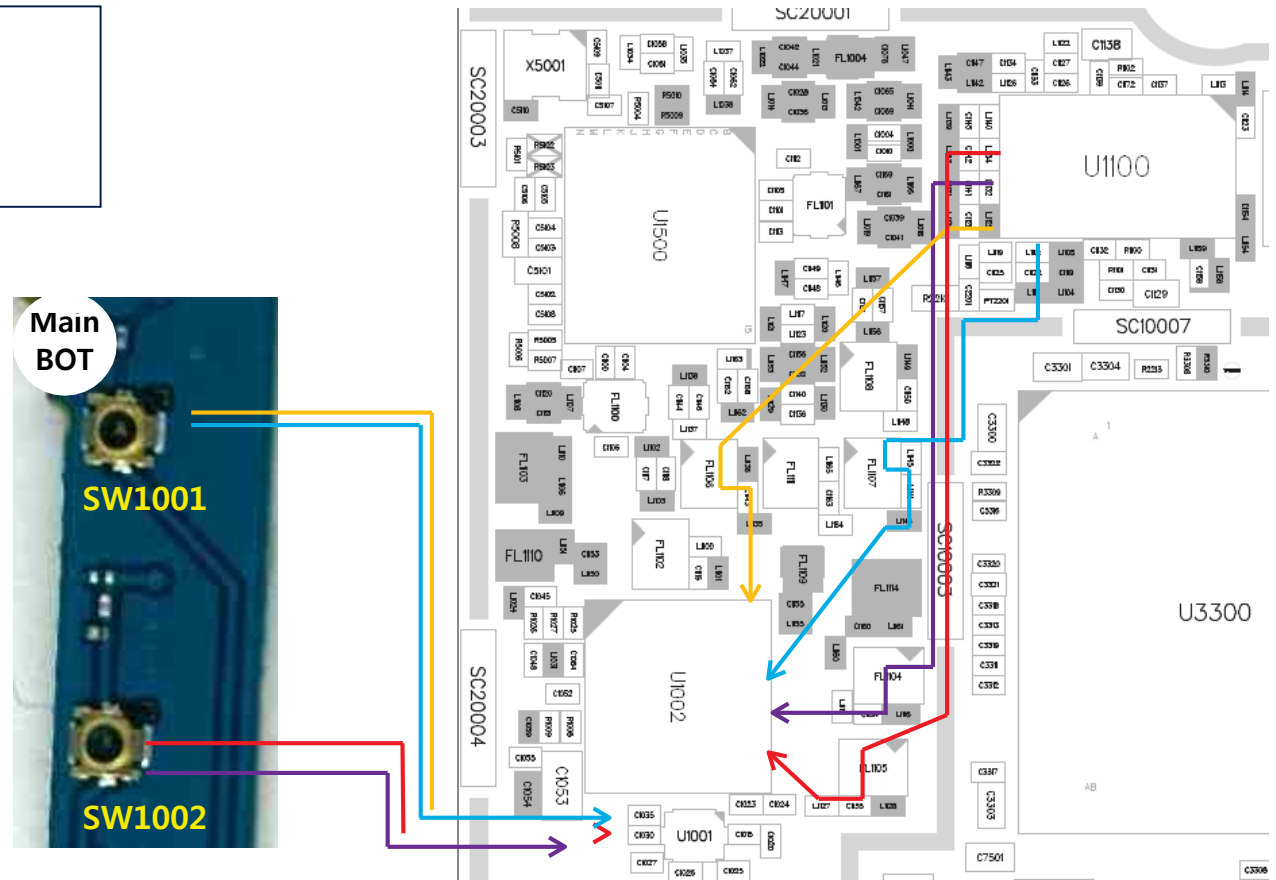


3. TROUBLE SHOOTING


3.5 GSM RF PART

3.5.7 Checking GSM PAM DC Power Circuit


Checking Flow

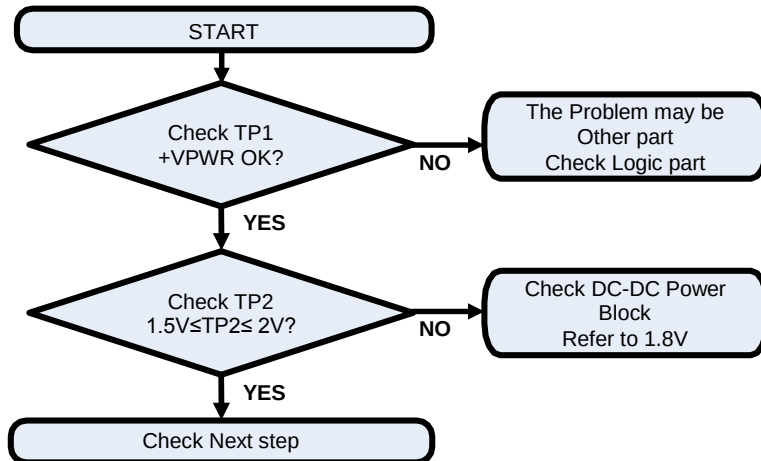

Image

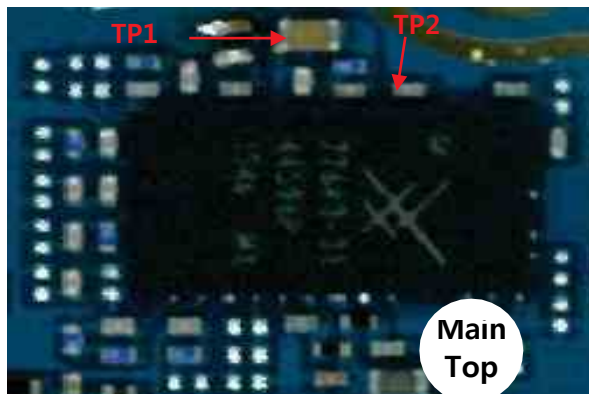




Circuit Diagram

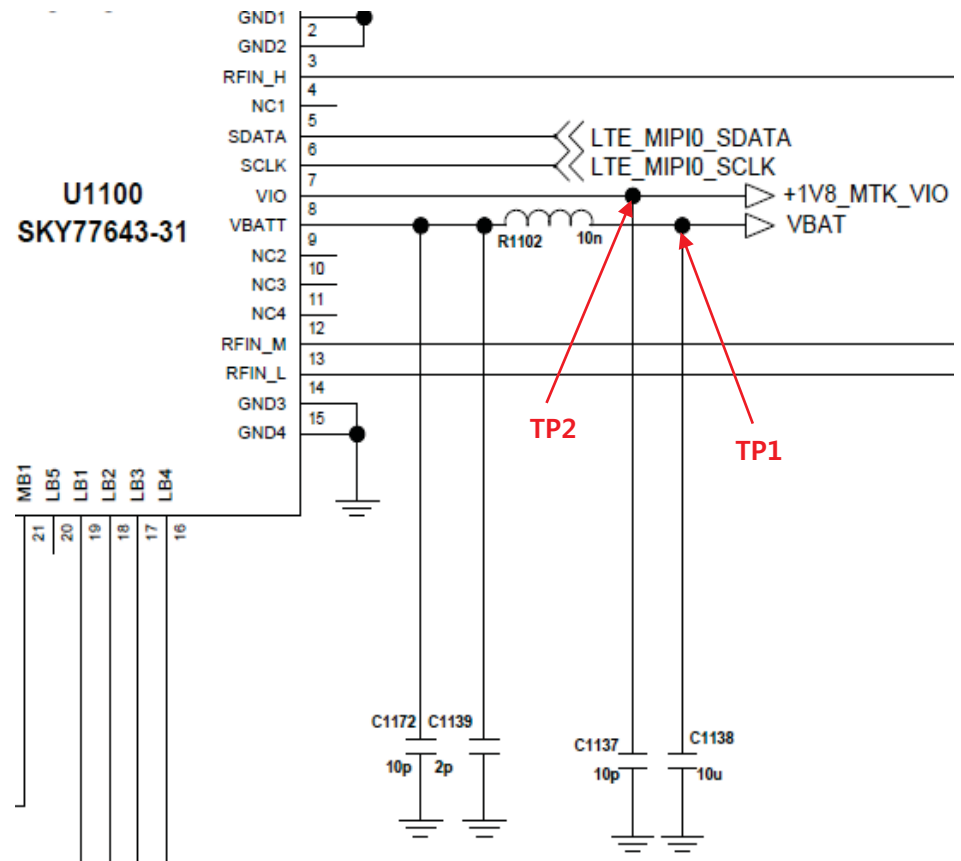


3. TROUBLE SHOOTING

3.5 GSM RF PART

3.5.8 Checking RF Signal TX path(SW, GSM850/900)

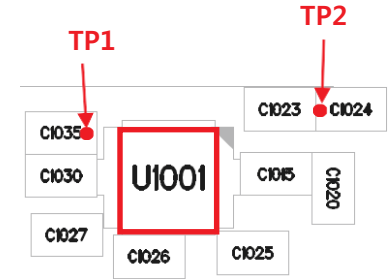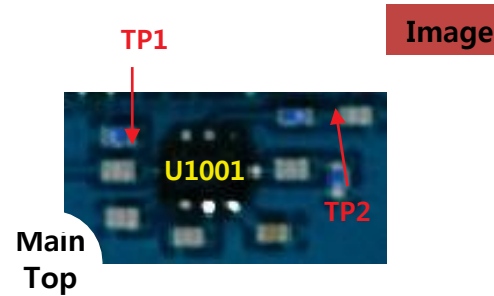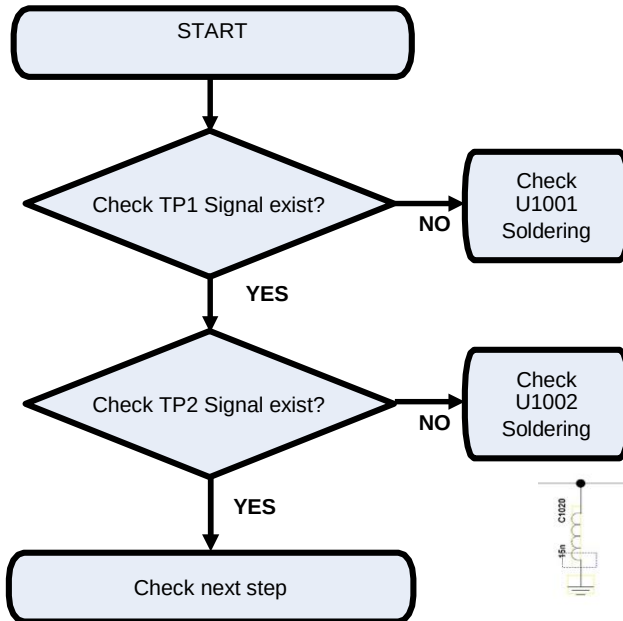



Circuit Diagram

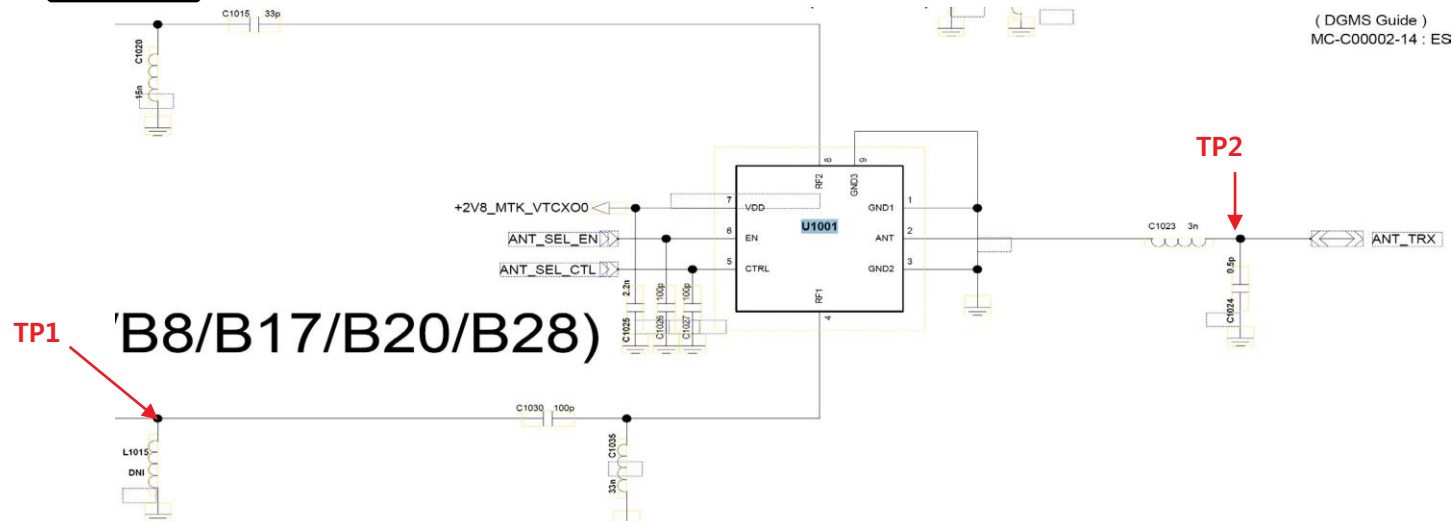


3.5 GSM RF PART

3.5.9 Checking RF Signal TX path(GSM850/900)


Checking Flow

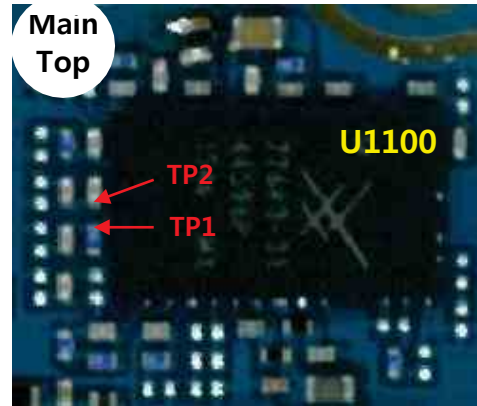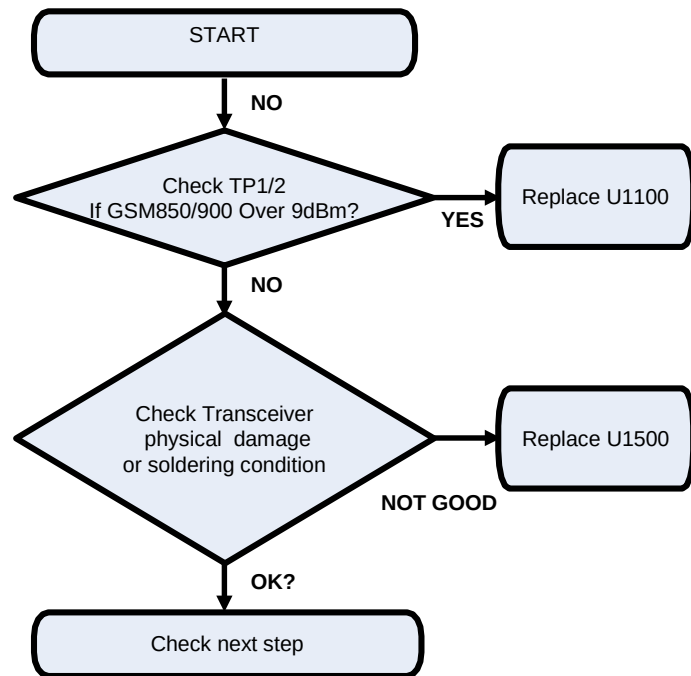

Image

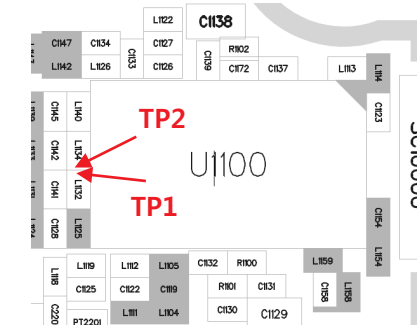

Circuit Diagram

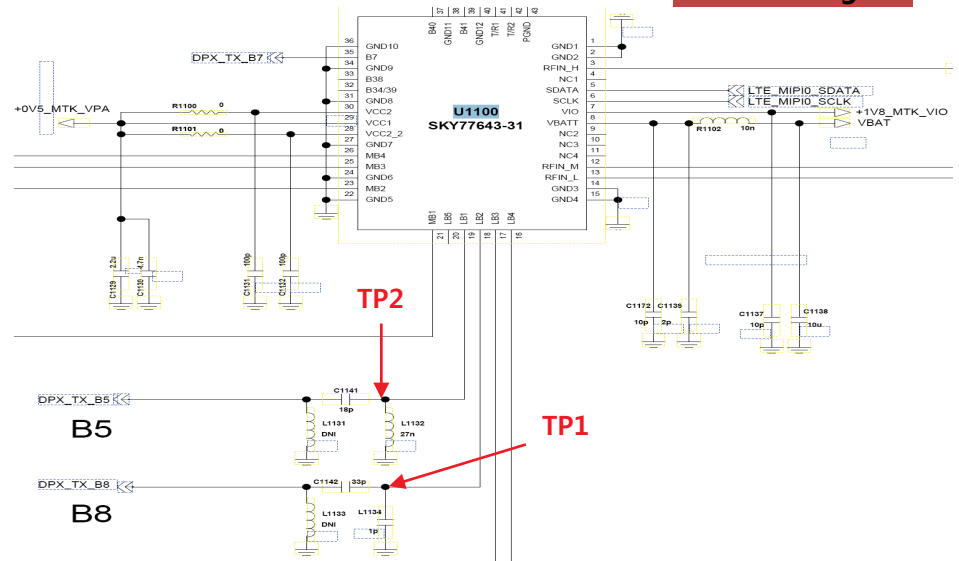


3. TROUBLE SHOOTING

3.5 GSM RF PART



3.5.10 Checking RF Signal TX path(GSM1800/1900)

Checking Flow

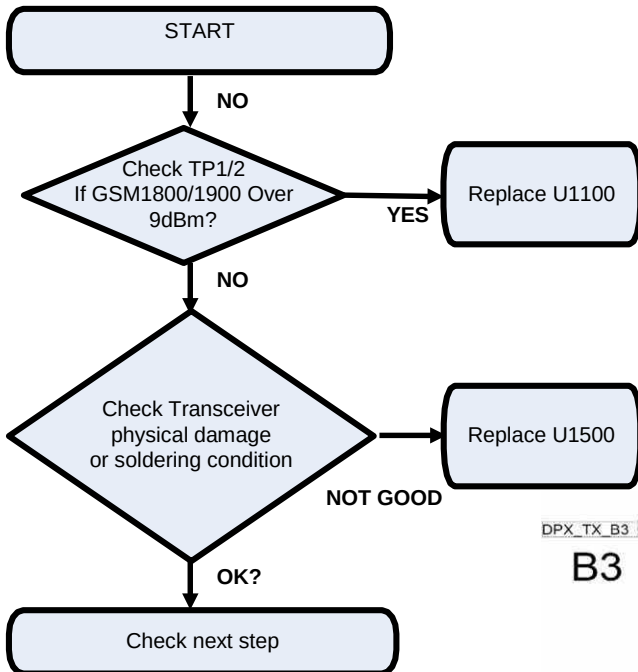


Image

Main
Top

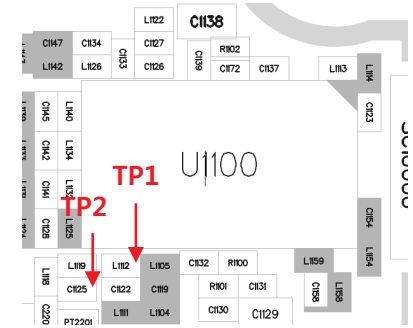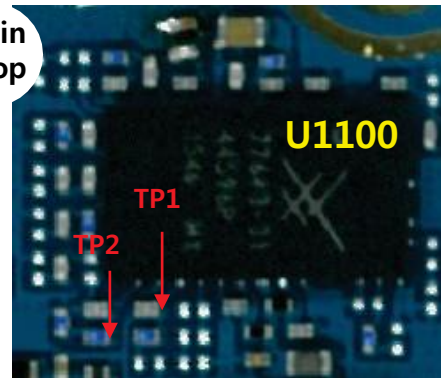


Circuit Diagram

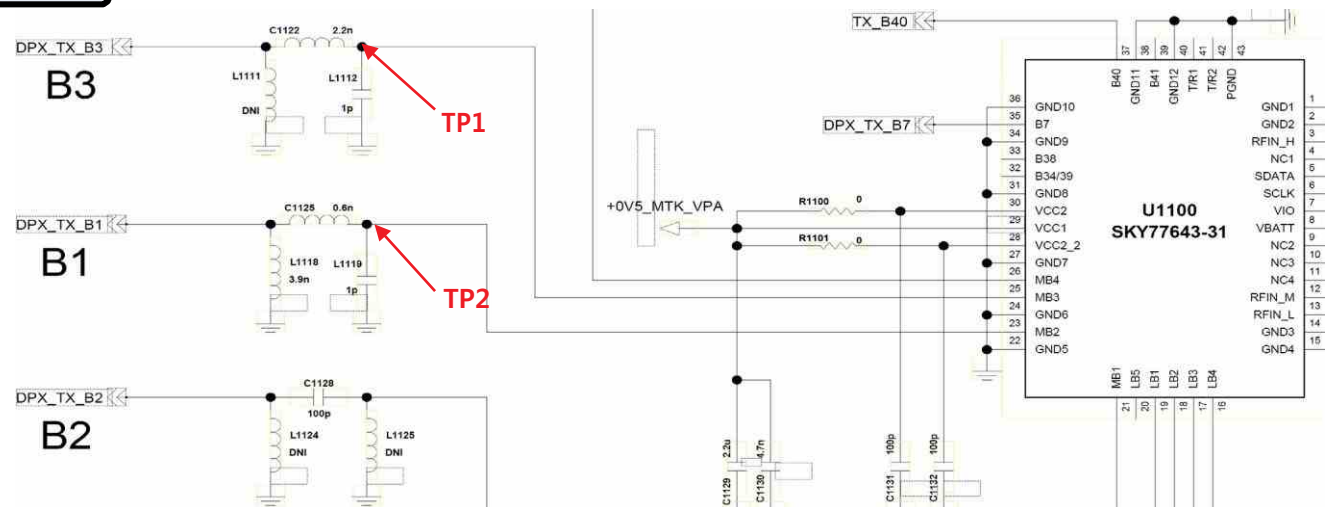

3.6 WCDMA RF PART

WCDMA RF Part support WCDMA B1/2/5/8 with ASM, PAM, Transceiver component

Checking Flow

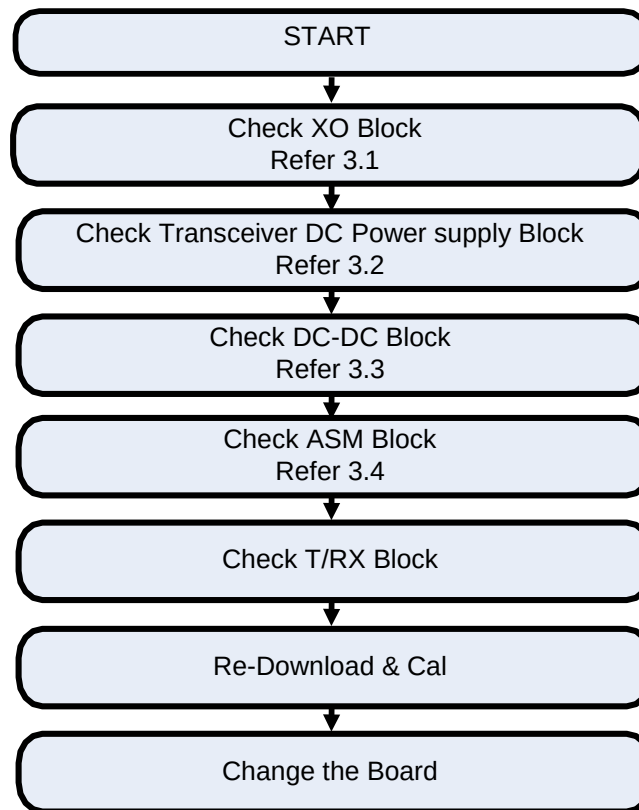


3. TROUBLE SHOOTING

3.6 WCDMA RF PART

3.6.1 WCDMA RF Part RX RF PATH

Image

1. WCDMA B5 RX PATH
2. WCDMA B8 RX PATH
3. WCDMA B1 RX PATH
4. WCDMA B2 RX PATH

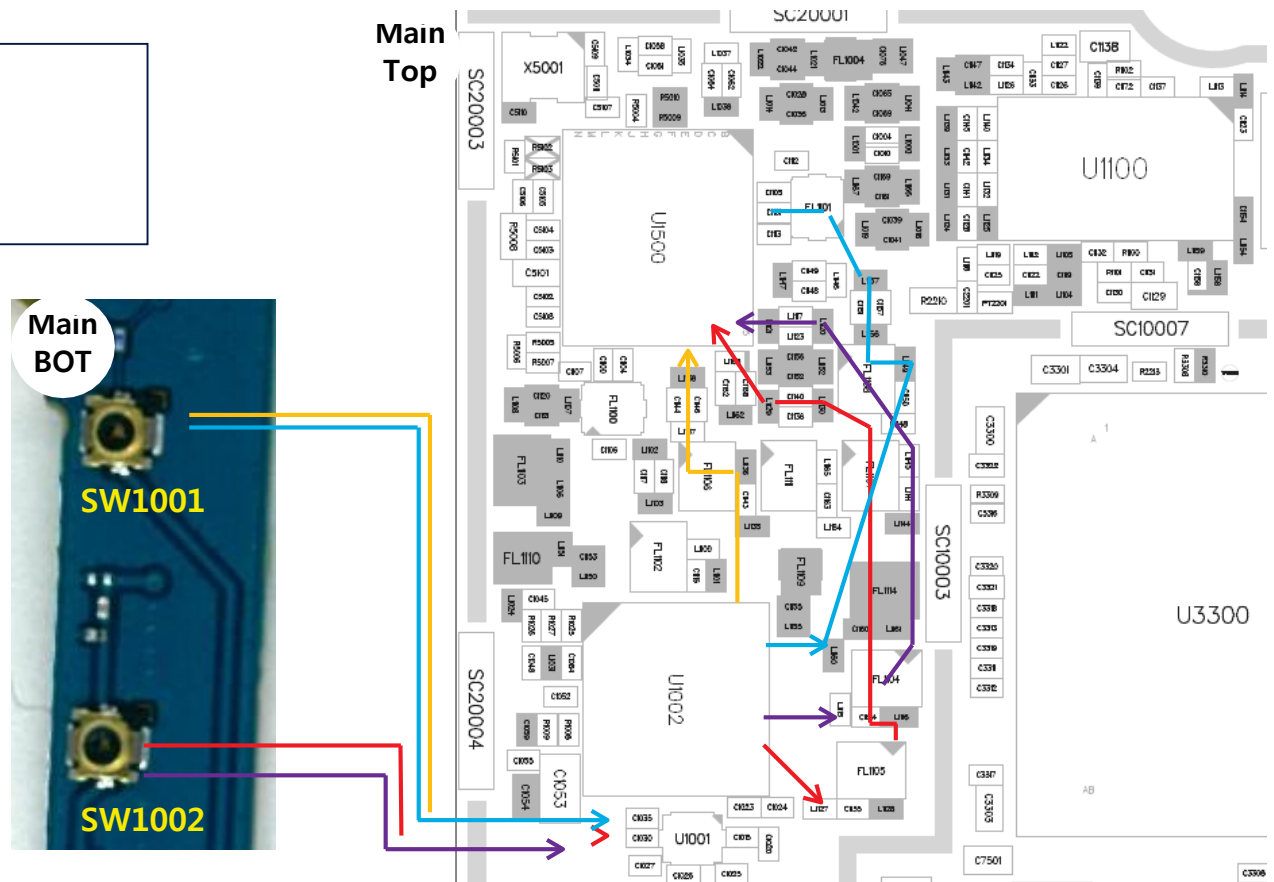


3. TROUBLE SHOOTING

3.6 WCDMA RF PART

3.6.2 Checking RF Signal RX path(SW, WCDMA B1)

Checking Flow

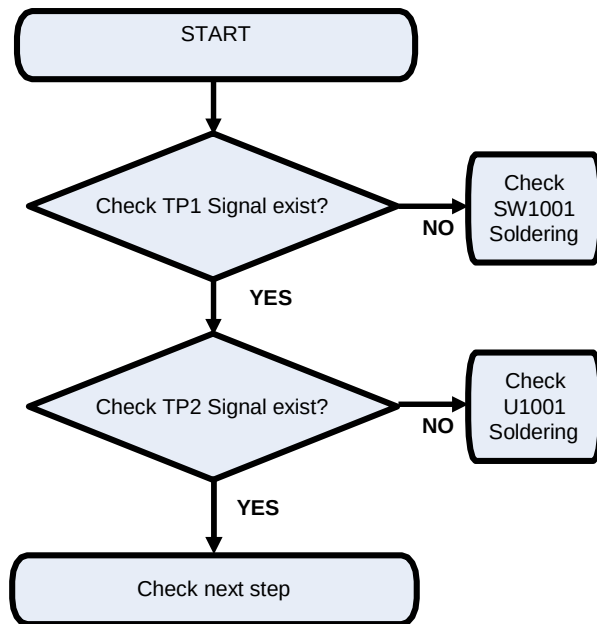


Image

Main
Top



Circuit Diagram

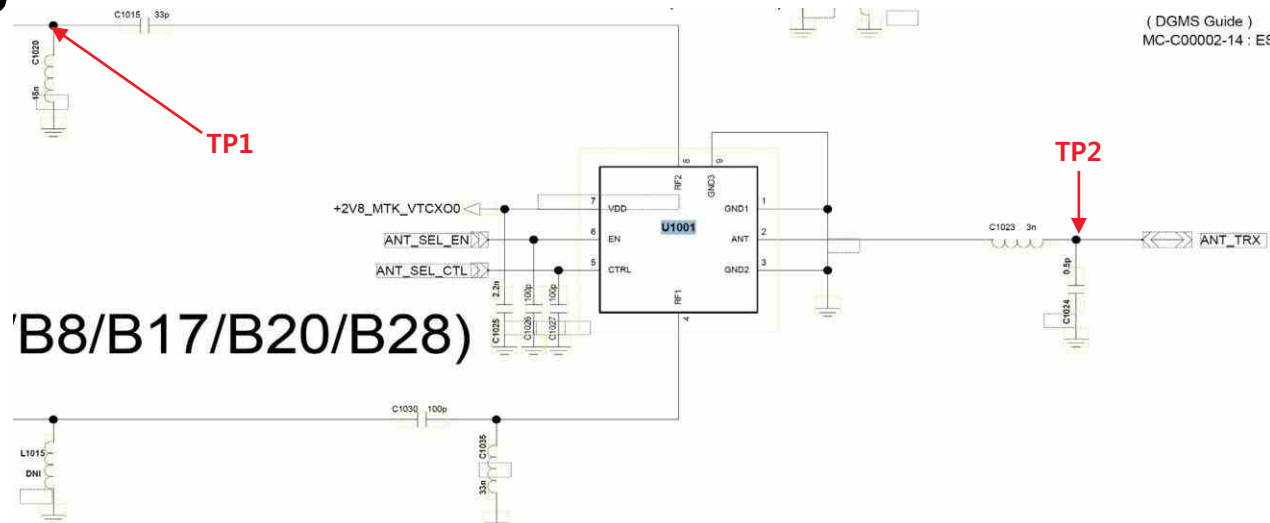


3. TROUBLE SHOOTING


3.6 WCDMA RF PART

3.6.3 Checking RF Signal RX path(WCDMA B1)


Checking Flow

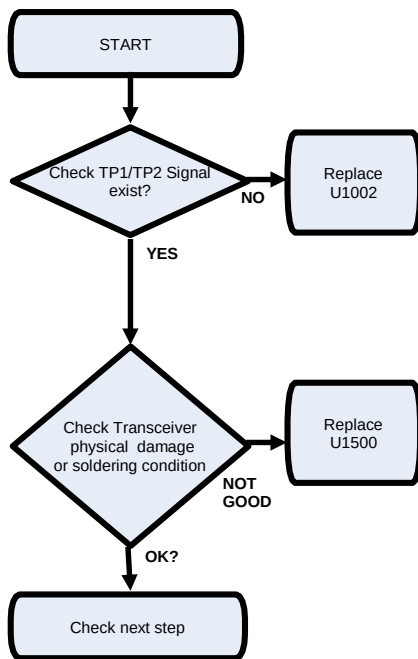

Image



Circuit Diagram

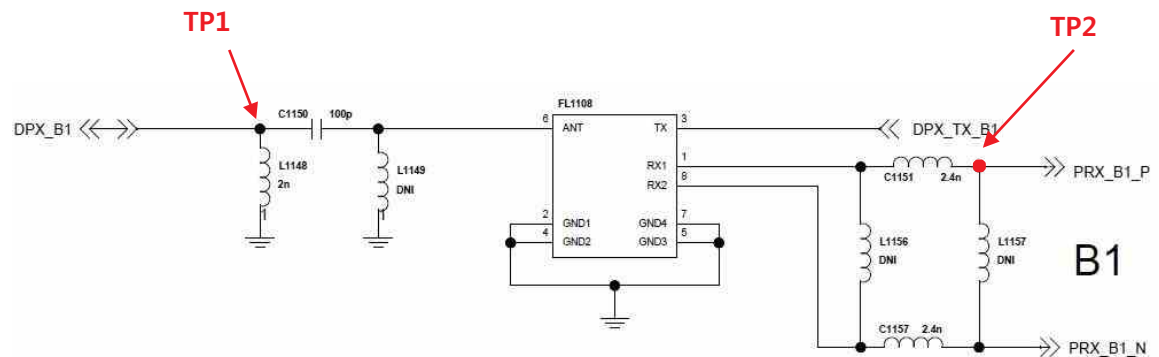


3. TROUBLE SHOOTING


3.6 WCDMA RF PART

3.6.4 Checking RF Signal RX path(SW, WCDMA B5/8)


Checking Flow

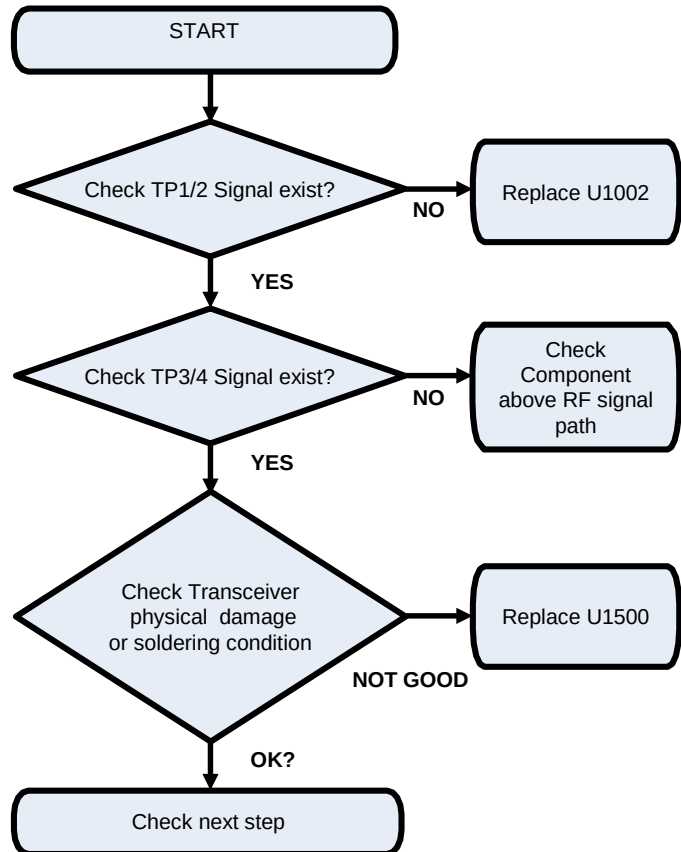

Image

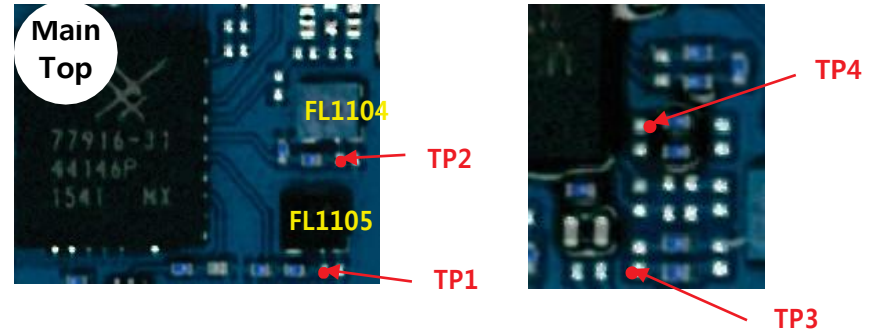

Circuit Diagram

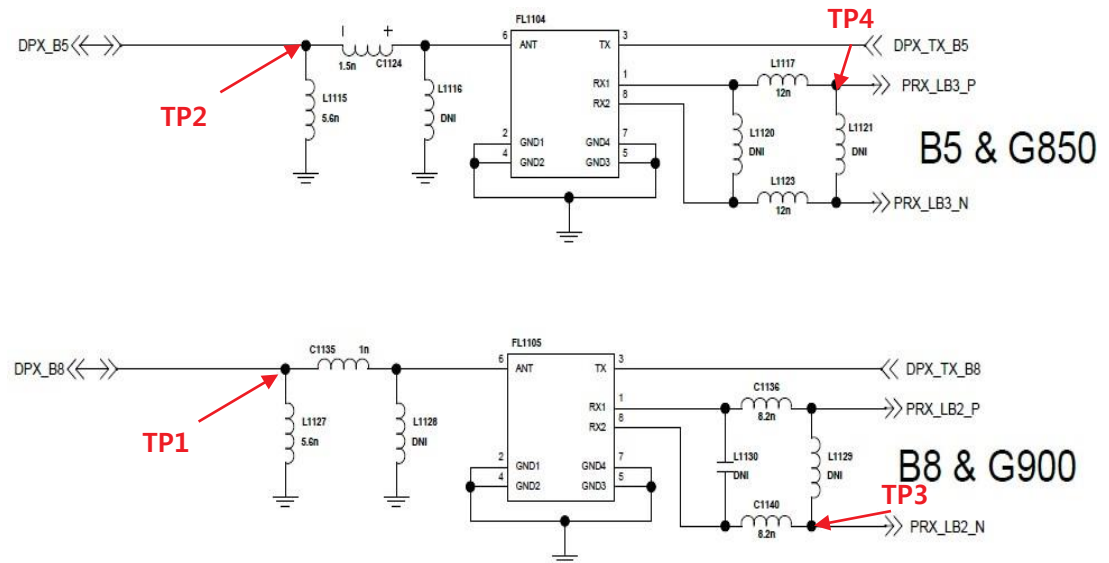


3. TROUBLE SHOOTING

3.6 WCDMA RF PART

3.6.5 WCDMA RF Part TX RF PATH

Image

1. WCDMA B5 TX PATH
2. WCDMA B8 TX PATH
3. WCDMA B1 TX PATH
4. WCDMA B2 TX PATH

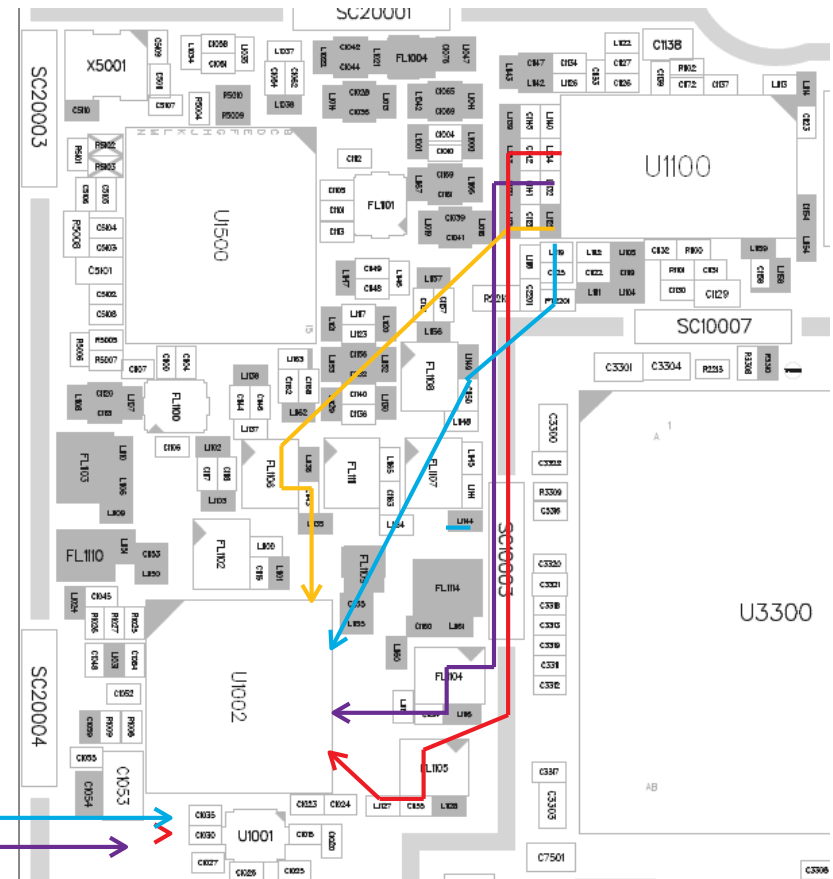


3. TROUBLE SHOOTING

3.6 WCDMA RF PART

3.6.6 Checking RF Signal TX path(SW, WCDMA B1)


Checking Flow

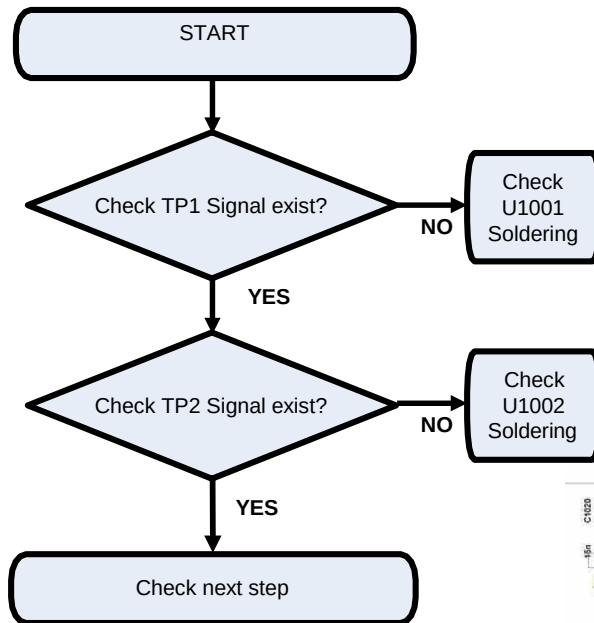

Image




Circuit Diagram

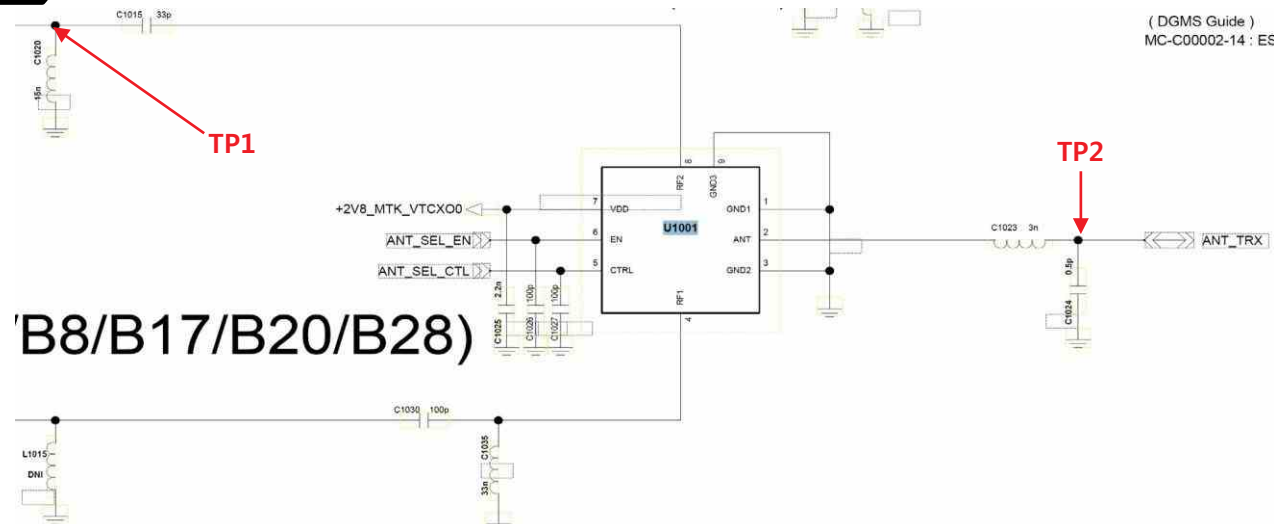


3.6 WCDMA RF PART

3.6.7 Checking RF Signal TX path(WCDMA B1)

Checking Flow

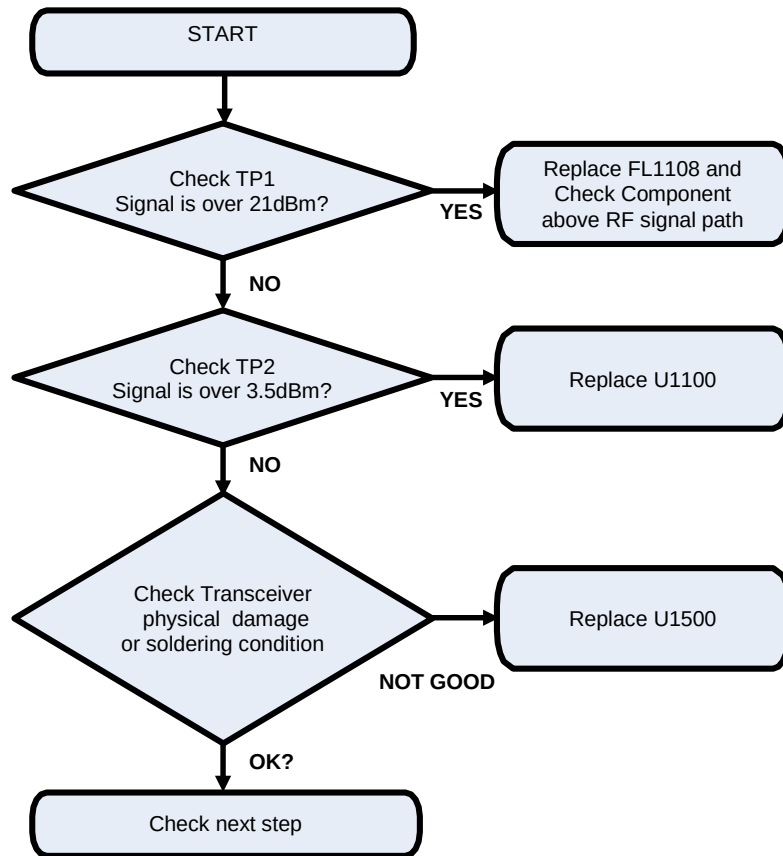


Image

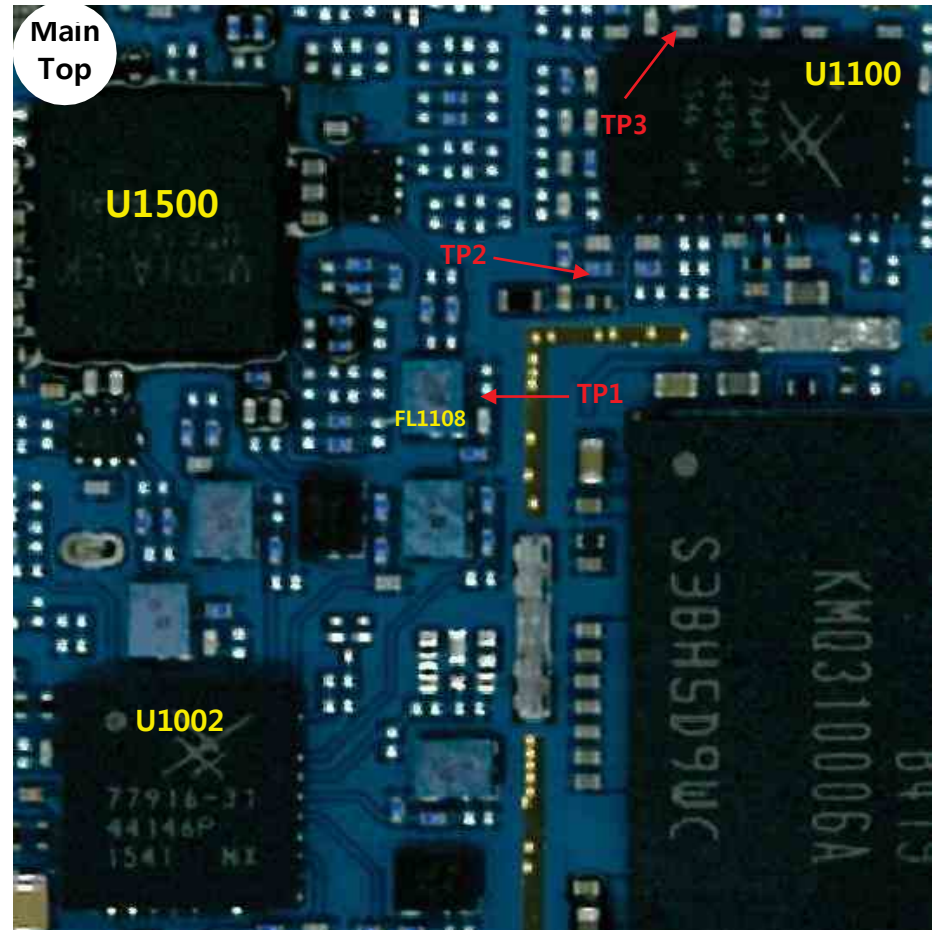

3.6 WCDMA RF PART

3.6.8 Checking RF Signal TX path(WCDMA B1)

Circuit Diagram

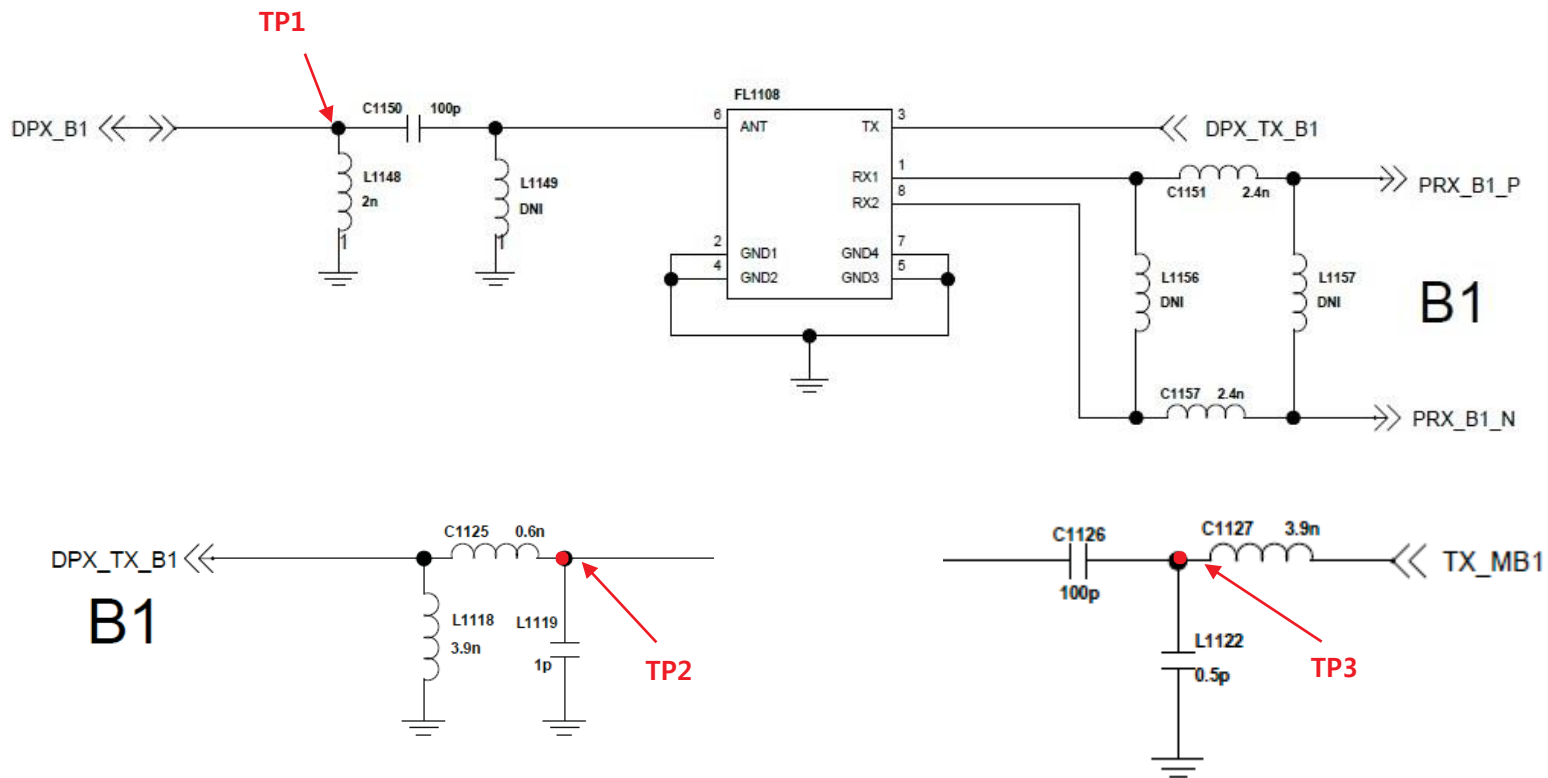


3. TROUBLE SHOOTING

3.6 WCDMA RF PART

3.6.9 Checking RF Signal TX path(SW, WCDMA B5/8)


Checking Flow

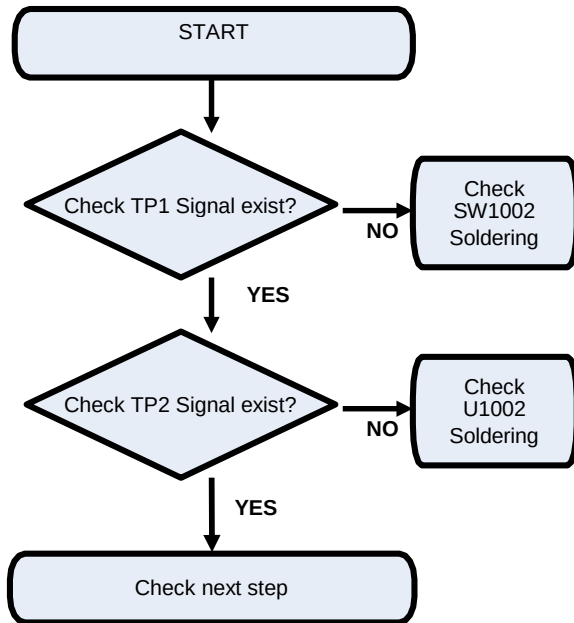


**Main
Top**



Image

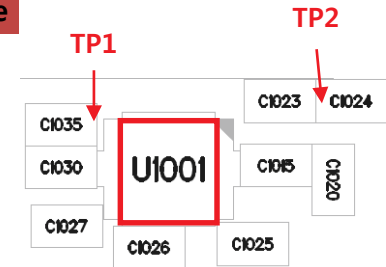


Circuit Diagram

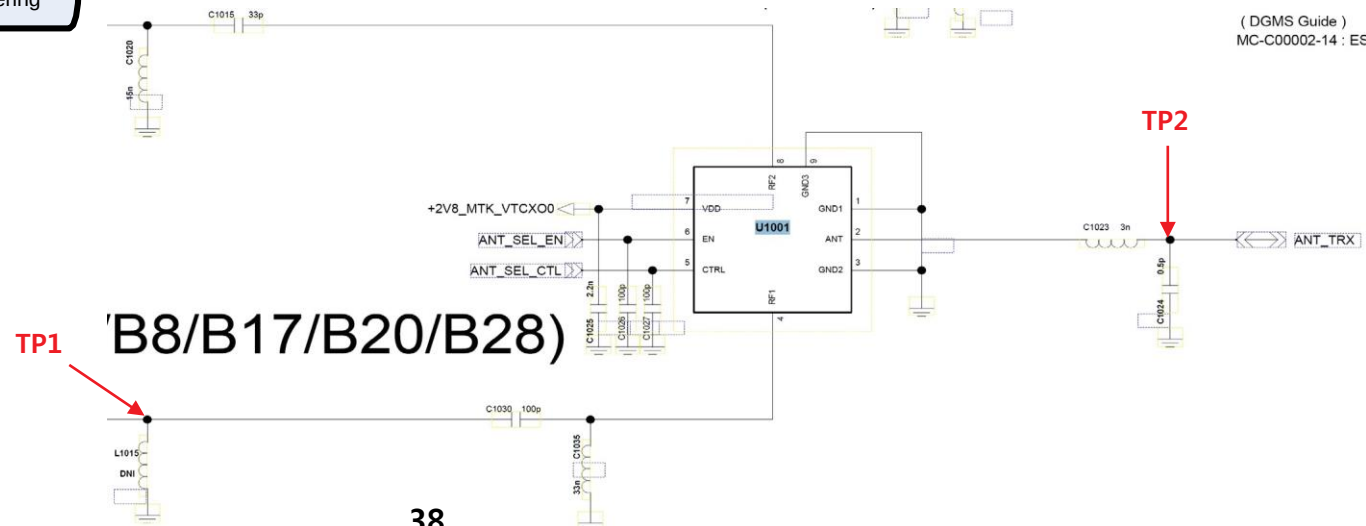



3.6 WCDMA RF PART

3.6.10 Checking RF Signal TX path(WCDMA B5/8)

Checking Flow

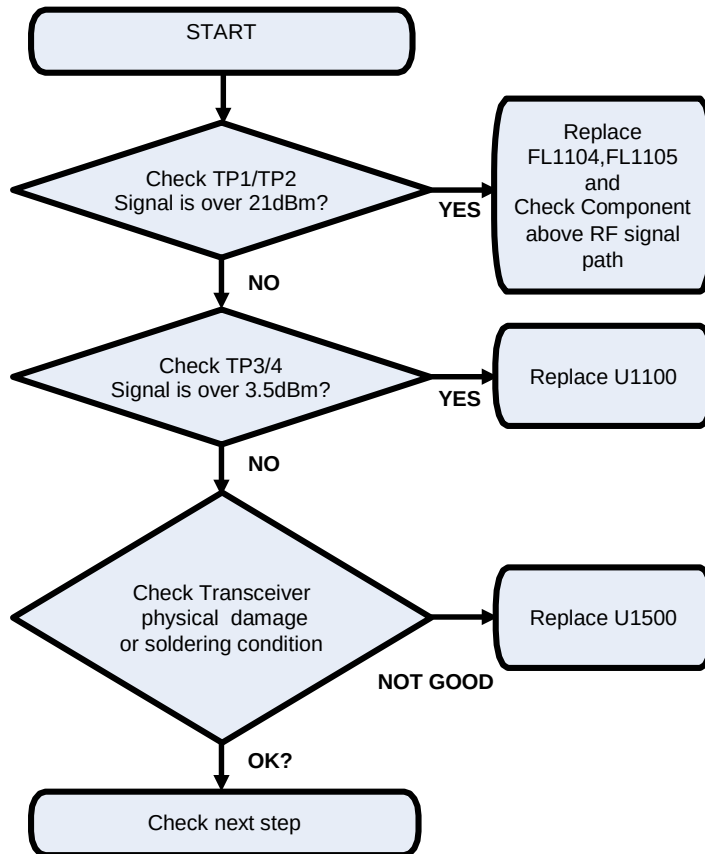


Image

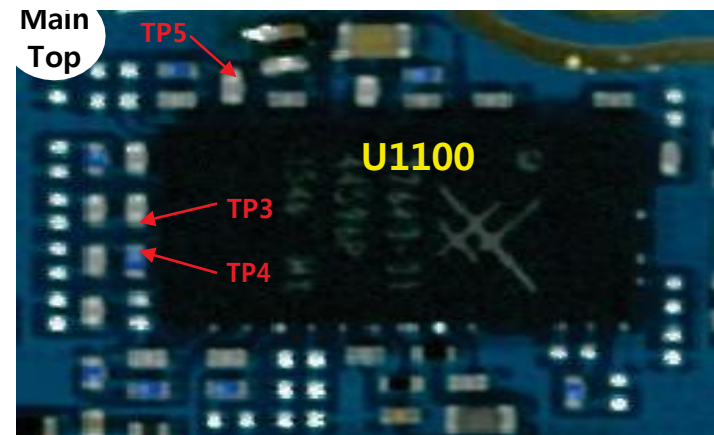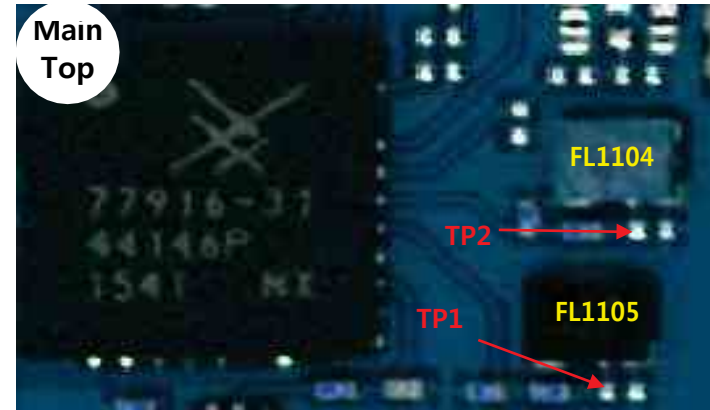

3.6 WCDMA RF PART

3.6.11 Checking RF Signal TX path(WCDMA B5/8)


Circuit Diagram

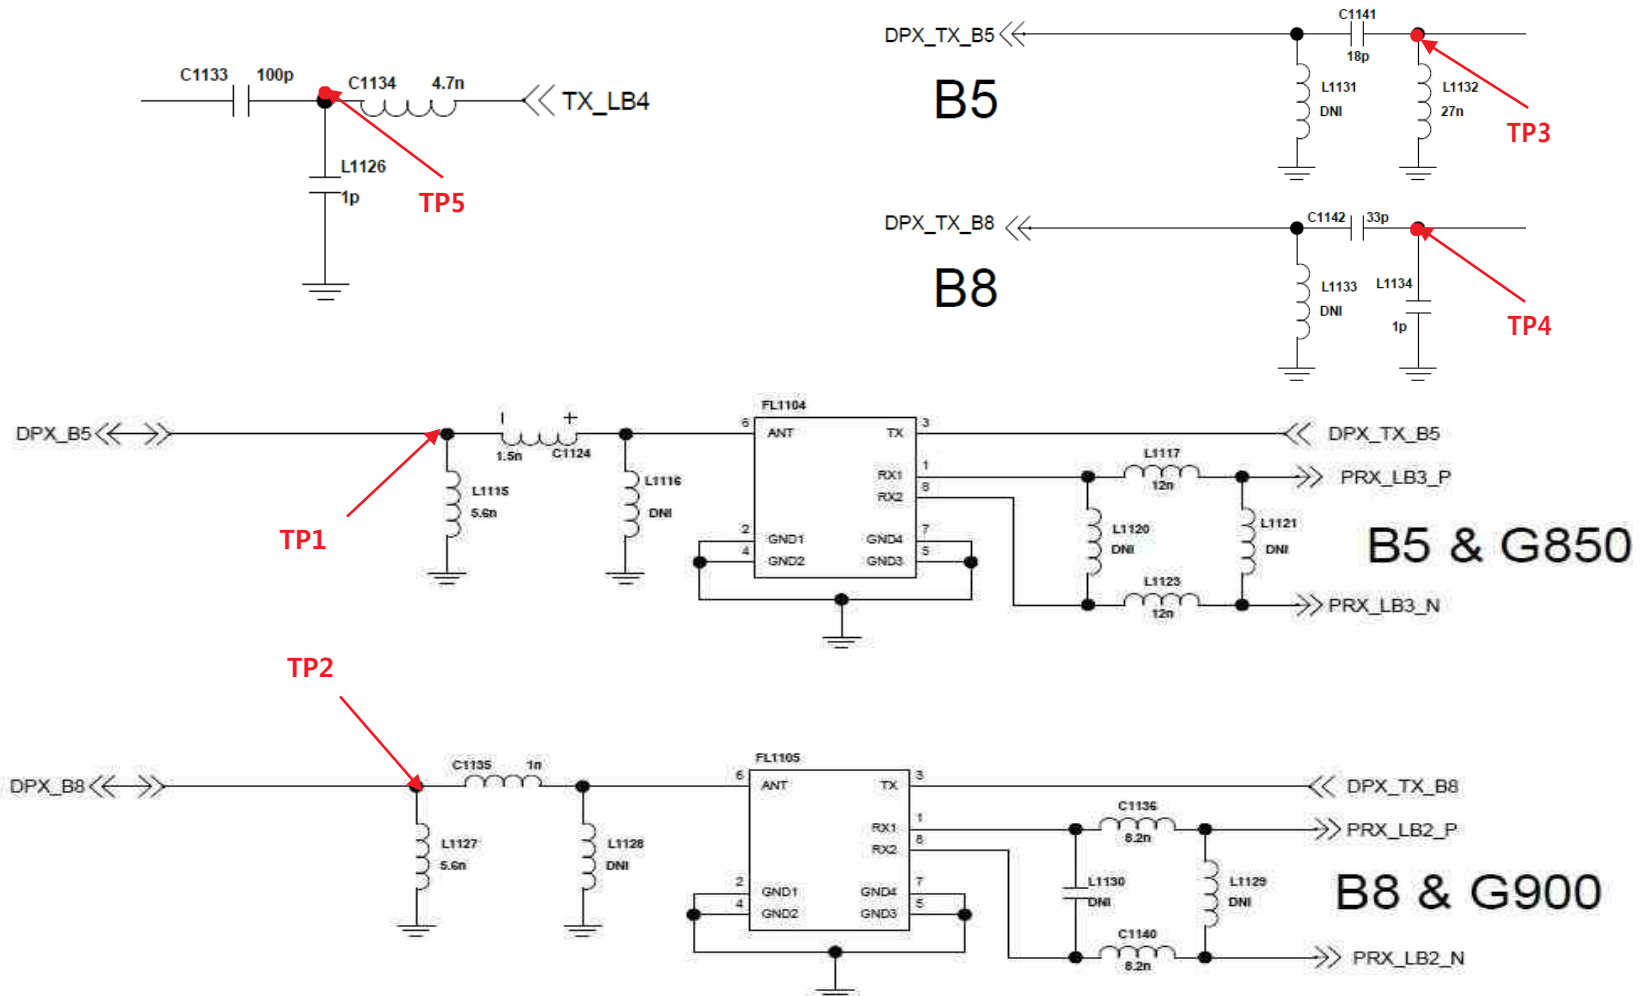

3.7 LTE RF PART

LTE RF Part support LTE B3/7/20 with ASM, PAM, Transceiver component



Checking Flow

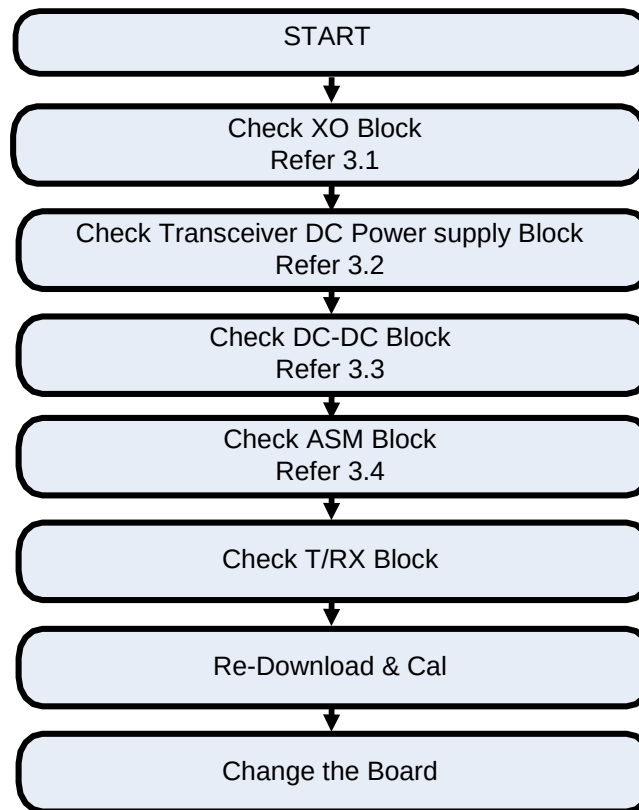

3.7 LTE RF PART

3.7.1 LTE RF Part RX RF PATH

1. LTE B3 RX PATH
2. LTE B7 RX PATH
3. LTE B20 RX PATH

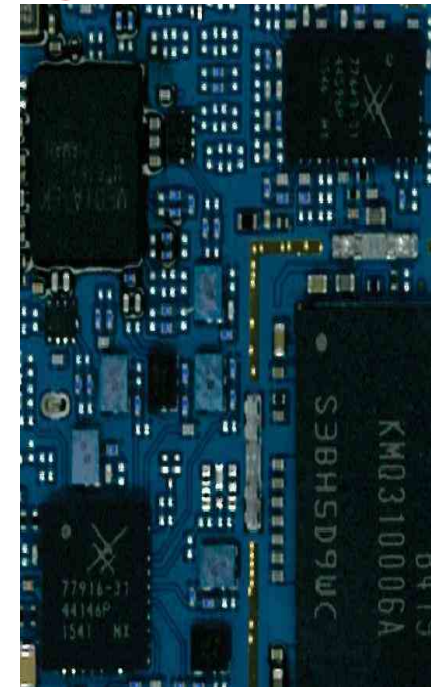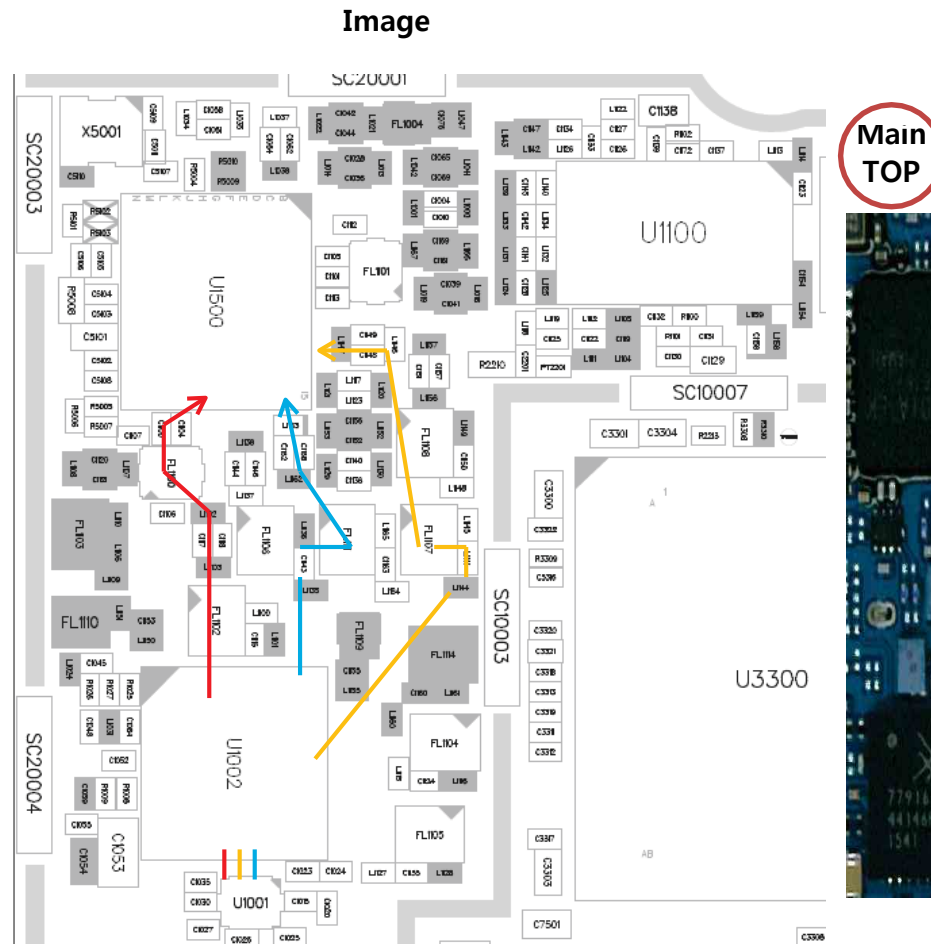


3. TROUBLE SHOOTING

3.7 LTE RF PART

3.7.2 Checking RF Signal RX path(SW, LTE B3)


Checking Flow

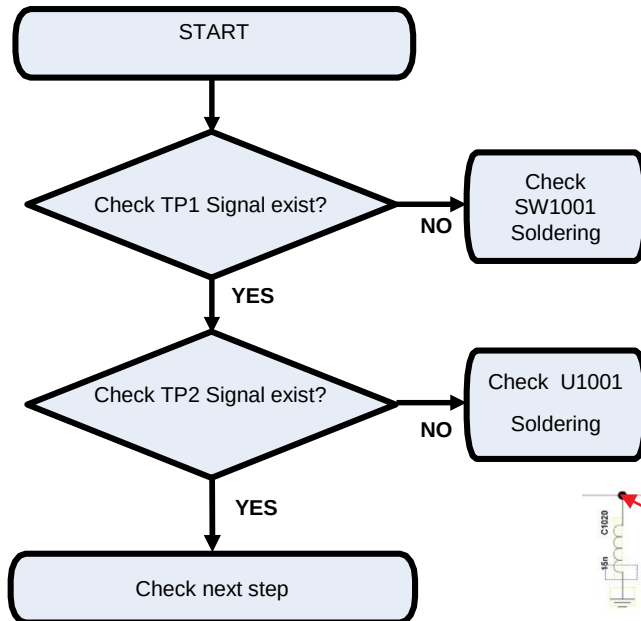

Image



Circuit Diagram

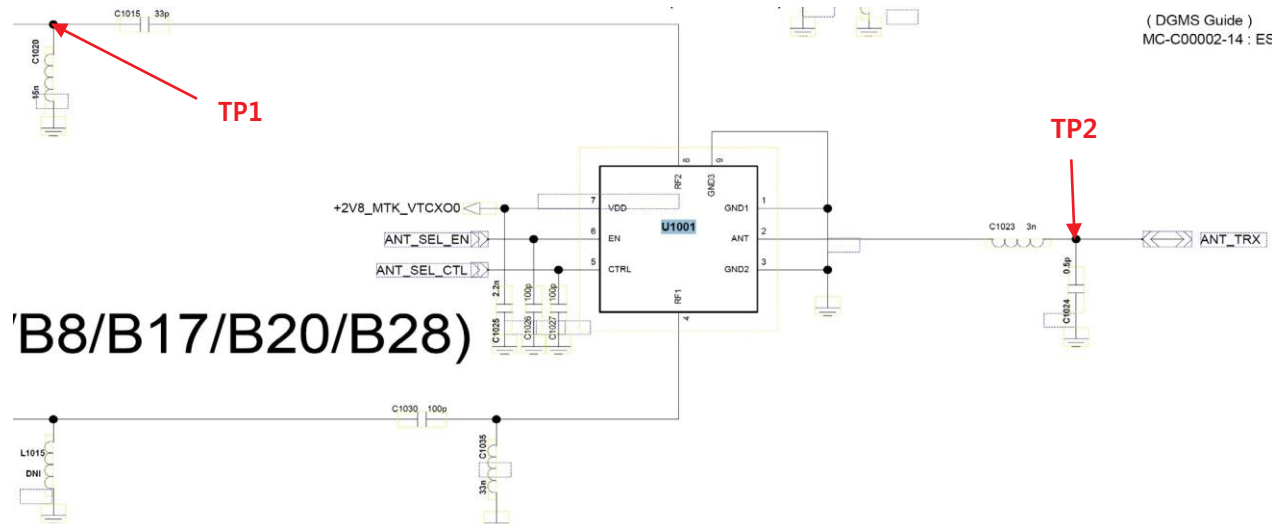


3. TROUBLE SHOOTING


3.7 LTE RF PART

3.7.3 Checking RF Signal RX path(LTE B3)


Checking Flow

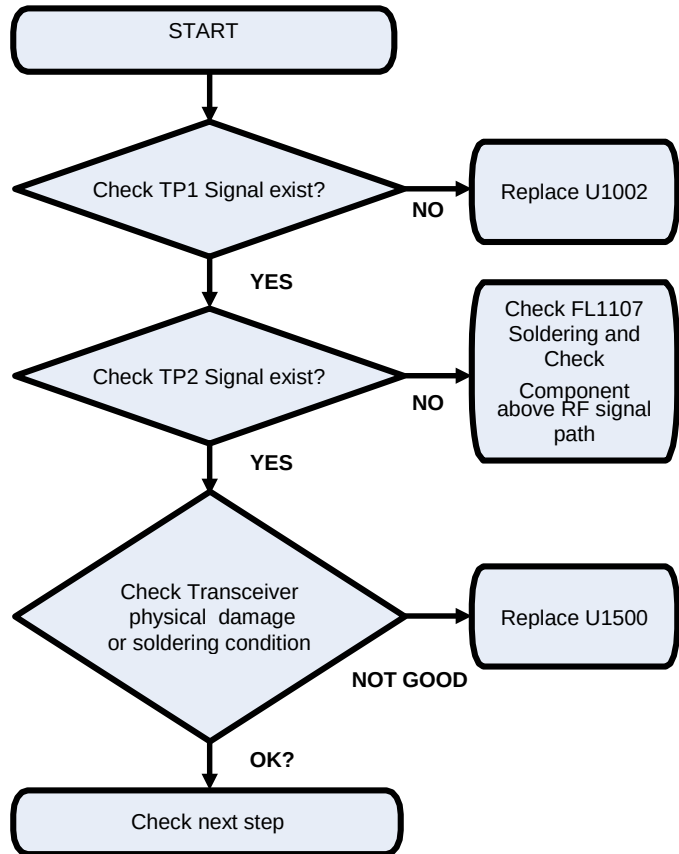

Image

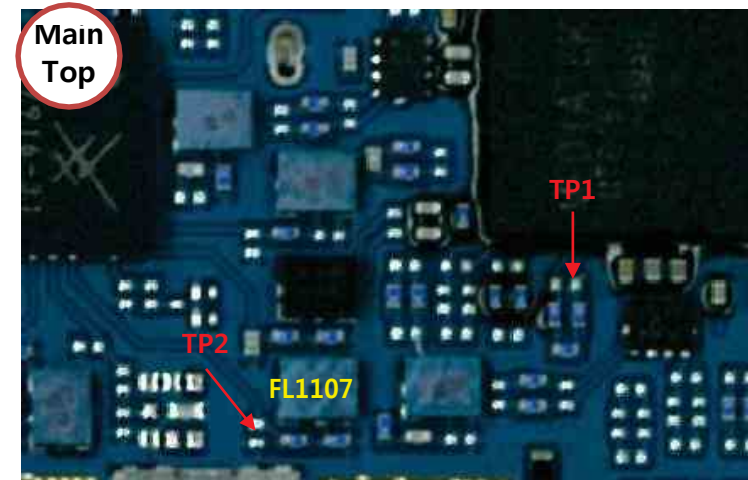

Circuit Diagram

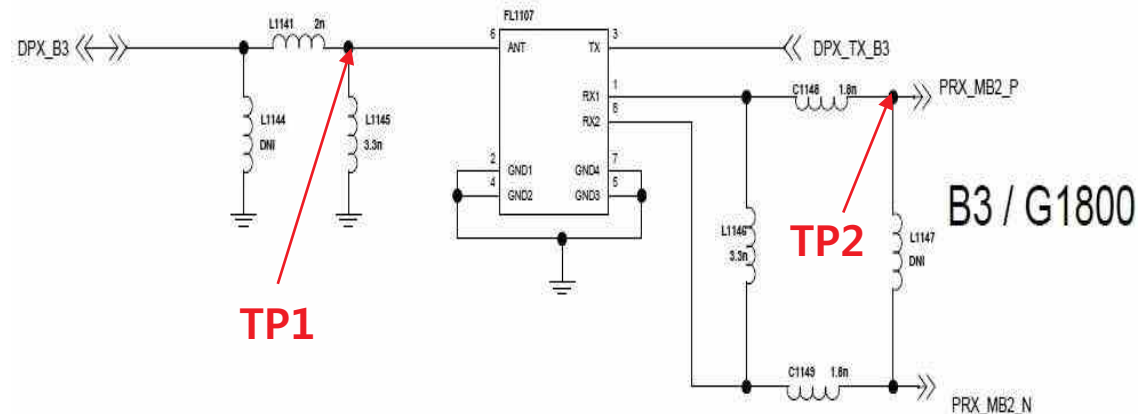


3. TROUBLE SHOOTING

3.7 LTE RF PART

3.7.4 Checking RF Signal RX path(SW, LTEB7/28)


Checking Flow

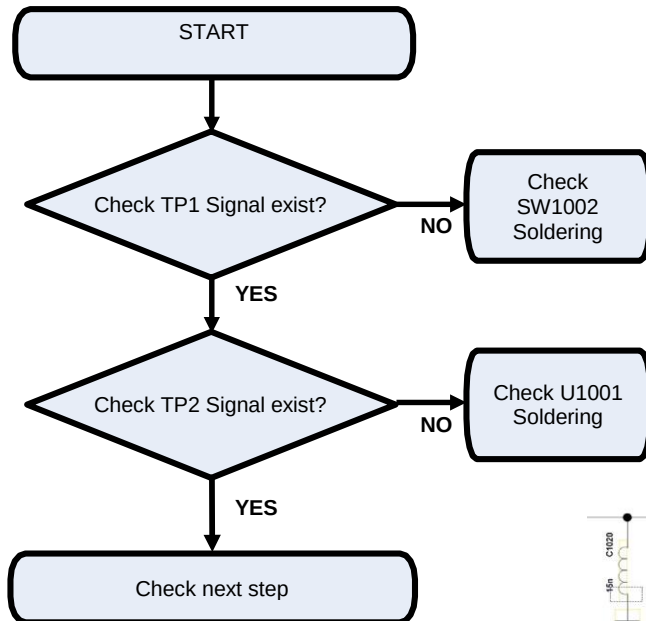


Main
Top



Image

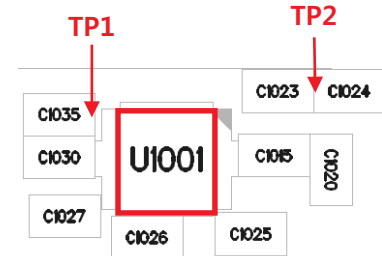

Circuit Diagram

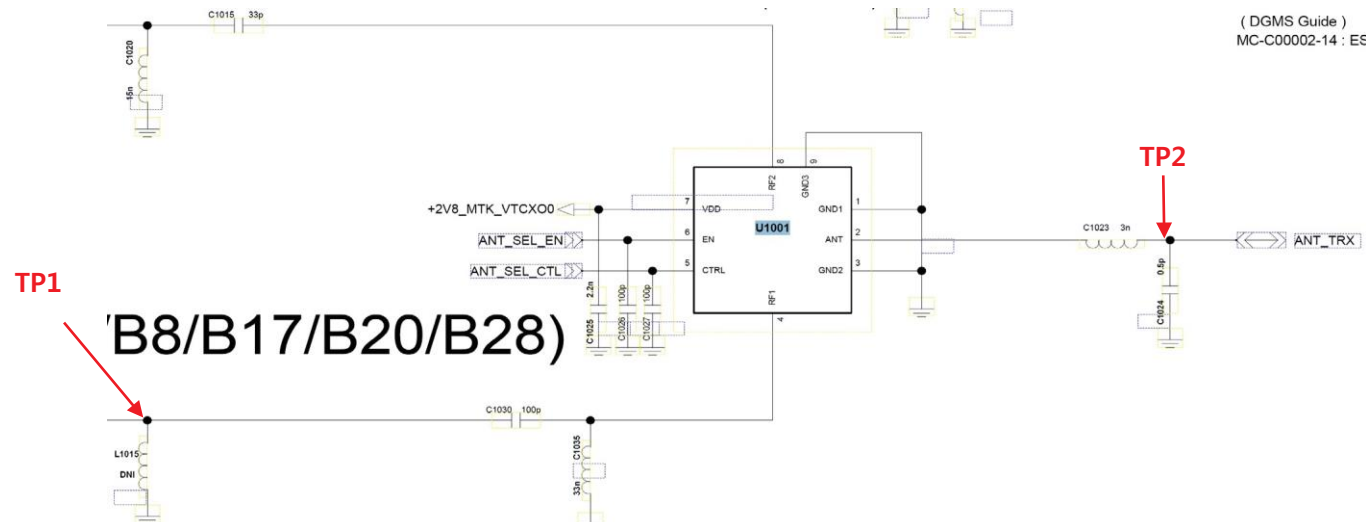


3. TROUBLE SHOOTING

3.7 LTE RF PART


3.7.5 Checking RF Signal RX path(LTE B7)

Checking Flow

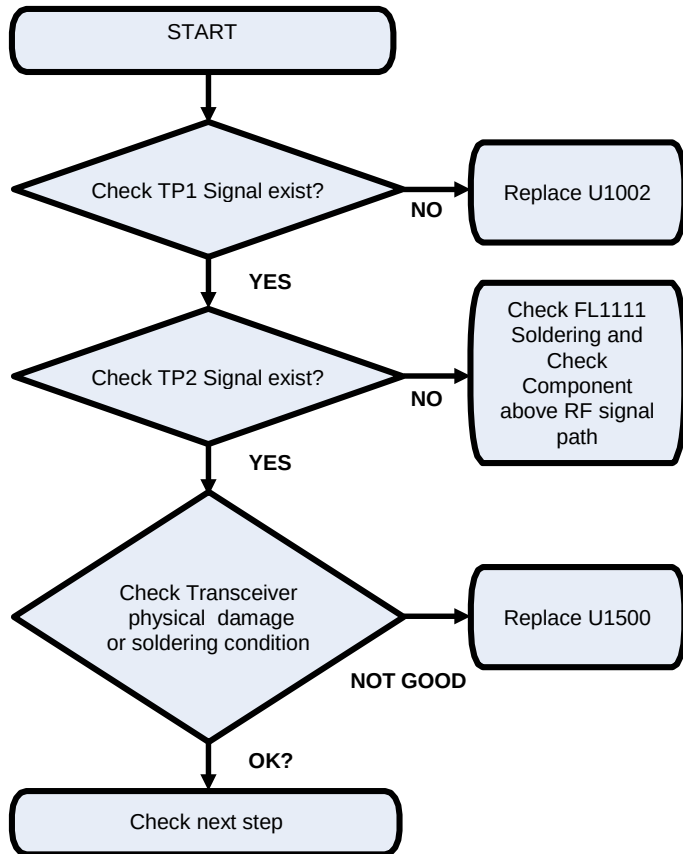


Image

Main Top

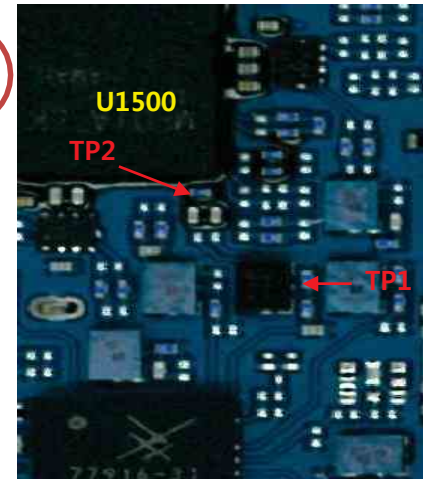

Circuit Diagram

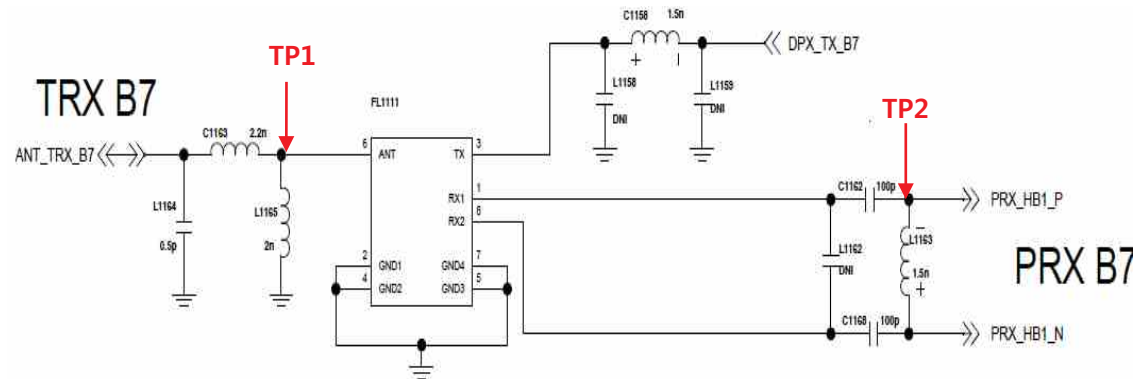


3. TROUBLE SHOOTING


3.7 LTE RF PART

3.7.6 Checking RF Signal RX path(LTE B28A)

Checking Flow

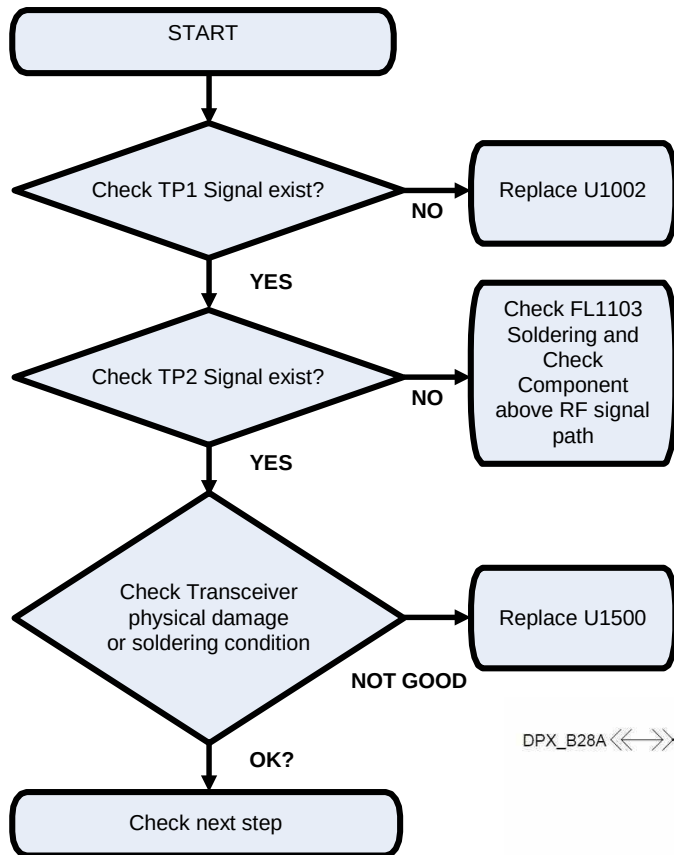


Main Top

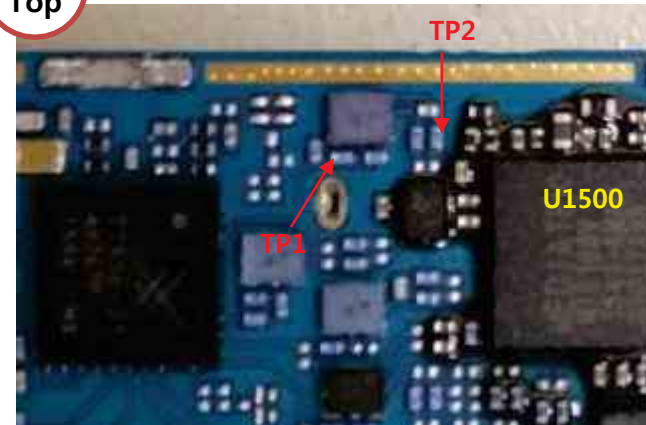

Image

Circuit Diagram

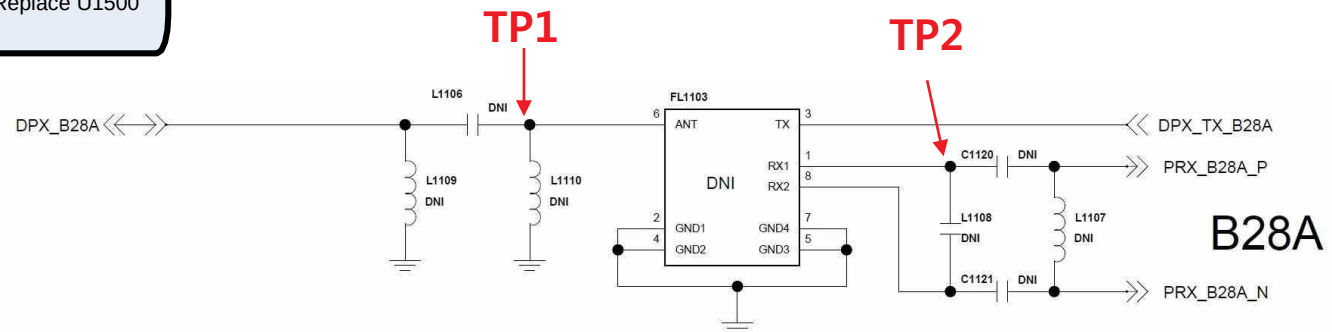


3. TROUBLE SHOOTING


3.7 LTE RF PART

3.7.6 Checking RF Signal RX path(LTE B28B)


Checking Flow

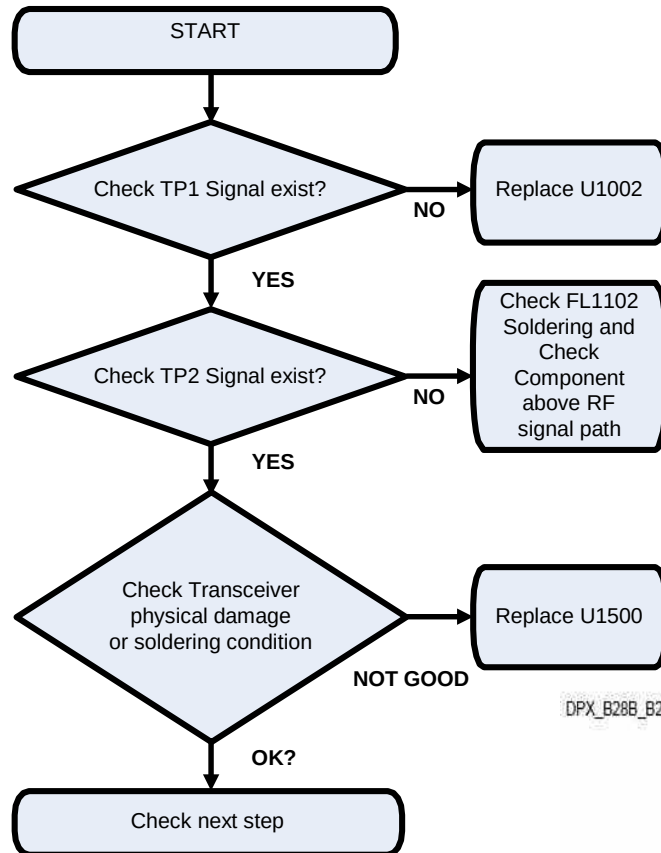

Image

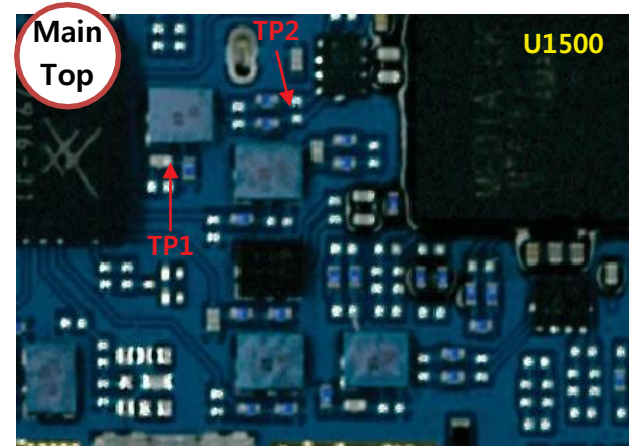

Circuit Diagram

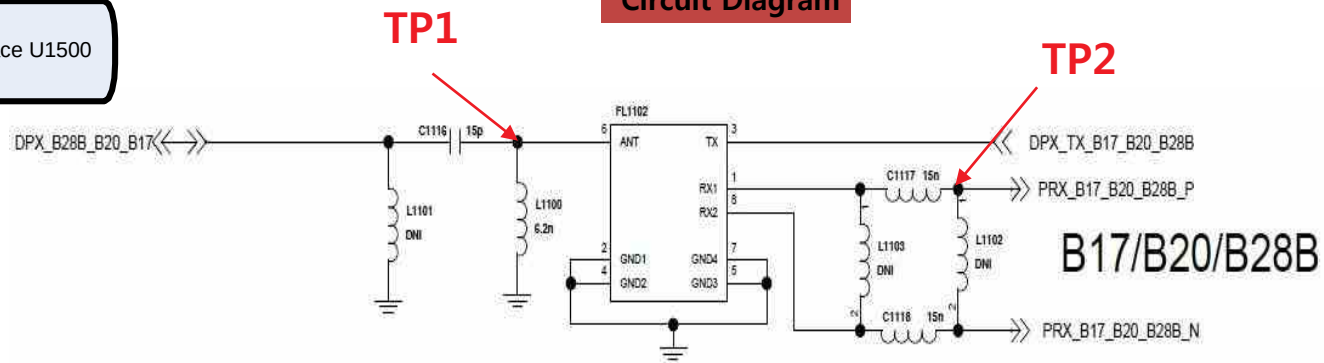


3.7 LTE RF PART

3.7.7 LTE RF Part DRX RF PATH

Image

1. LTE B3 DRX PATH
2. LTE B7 DRX PATH
3. LTE B28 DRX PATH

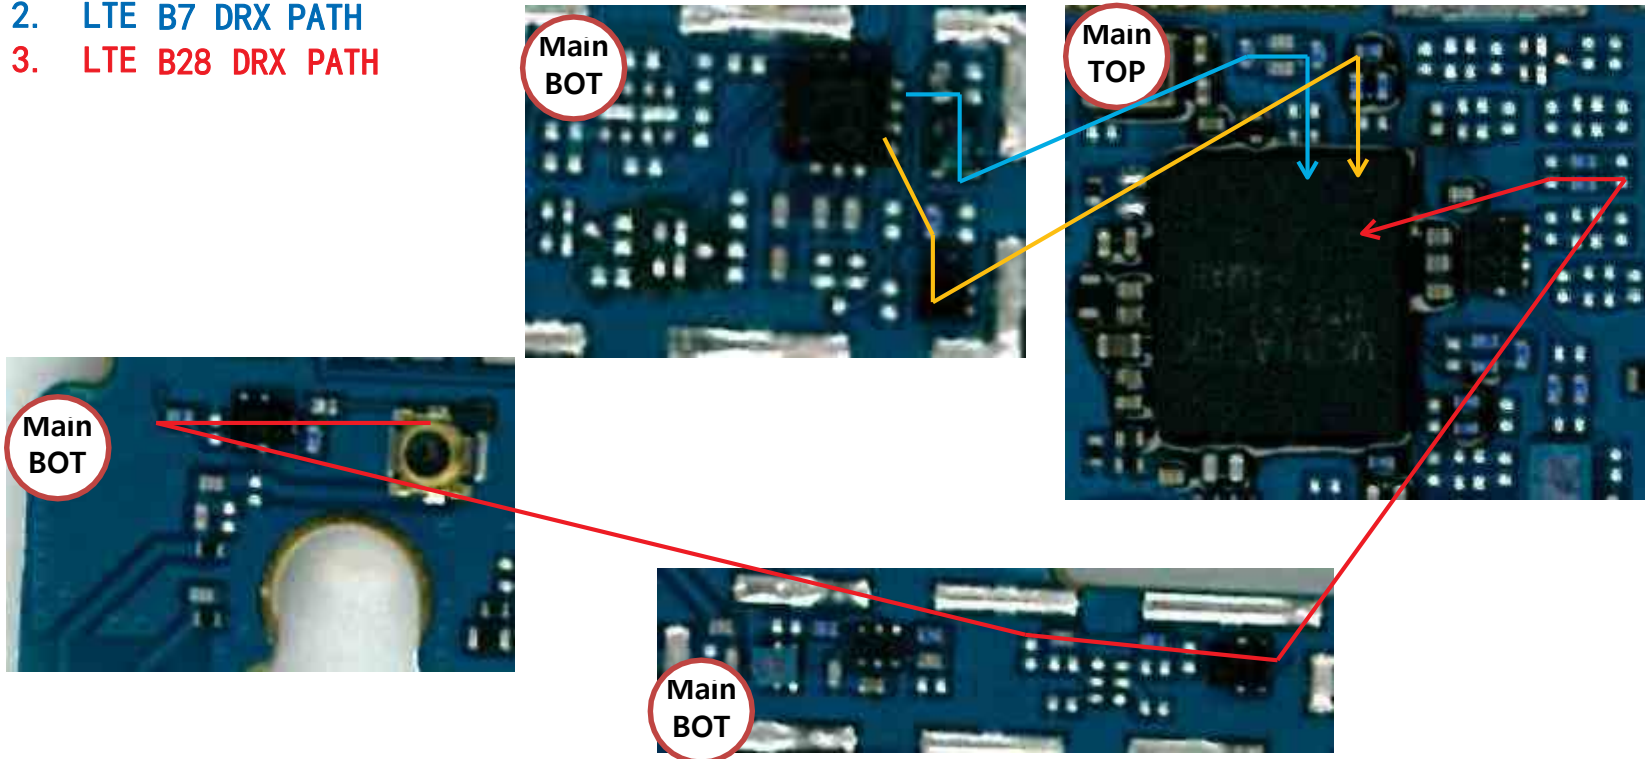


3. TROUBLE SHOOTING




3.7 LTE RF PART

3.7.8 Checking RF Signal DRX path(LTEB3/B7/B20)

Checking Flow

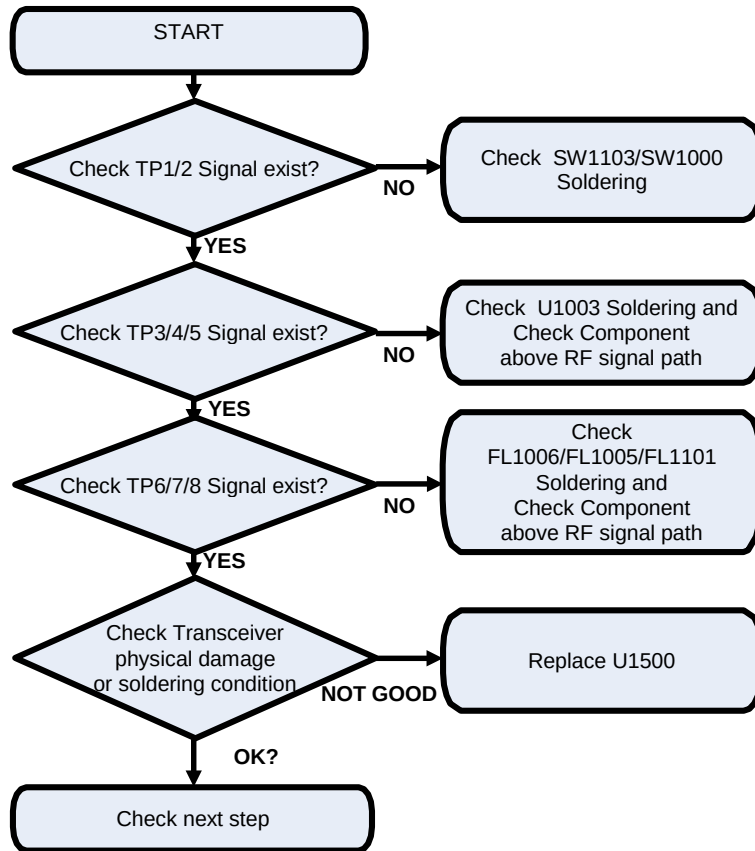

Image

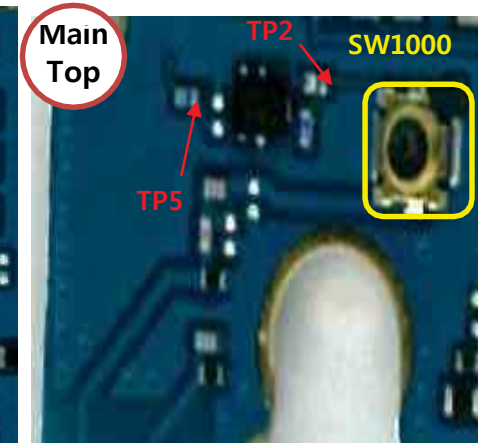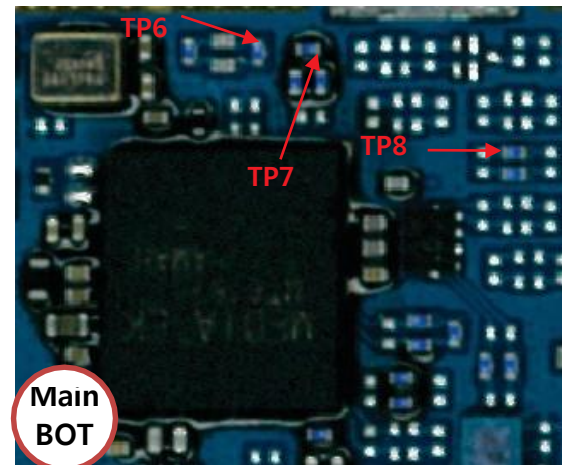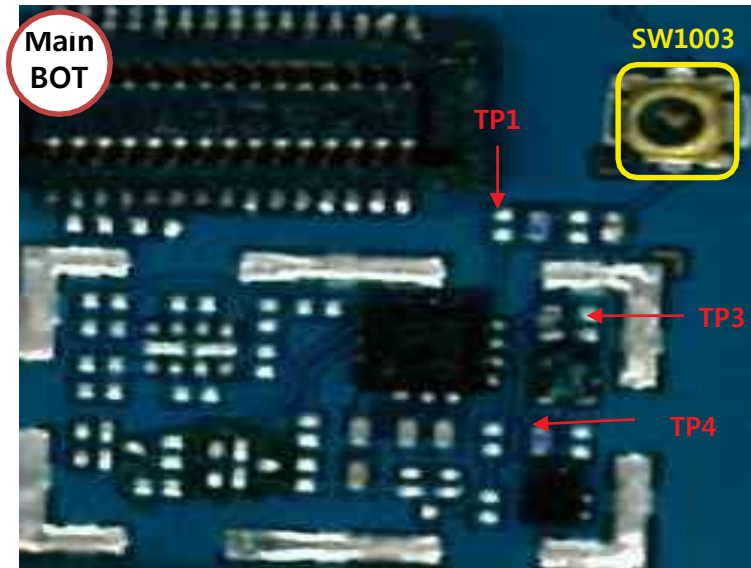


3. TROUBLE SHOOTING

3.7 LTE RF PART

3.7.8 Checking RF Signal DRX path(LTEB3/B7/B20)

Circuit Diagram

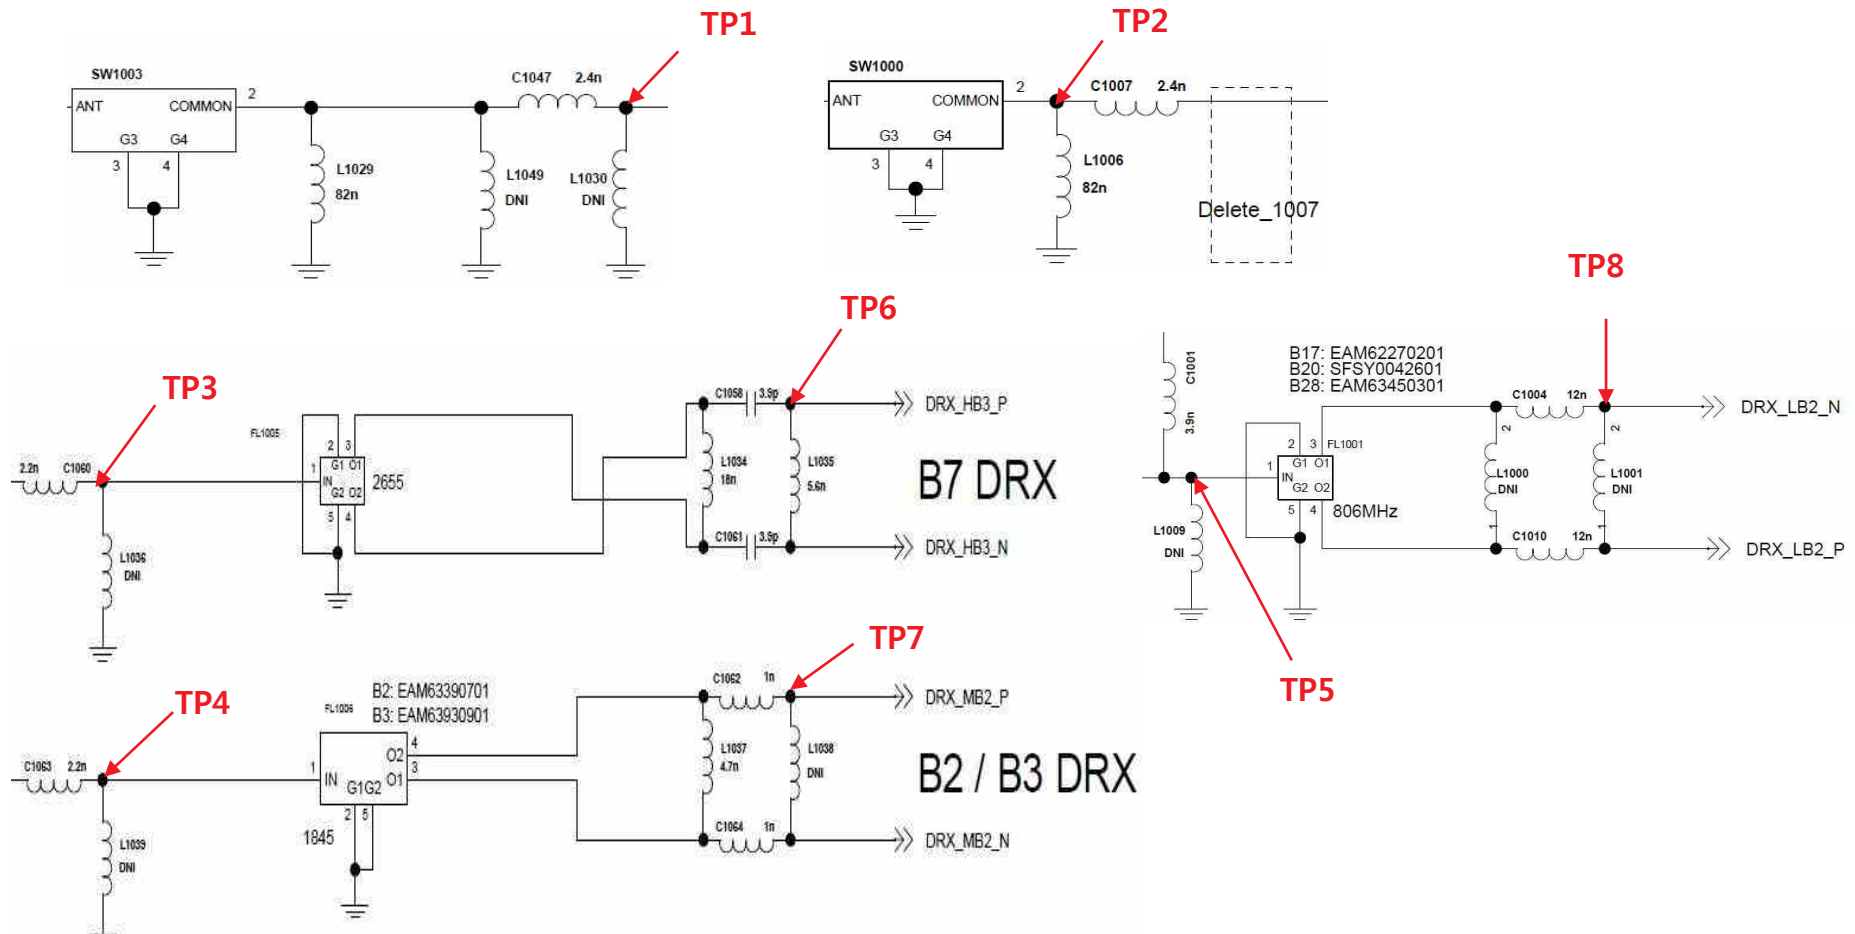


3.7 LTE RF PART

3.7.9 LTE RF Part TX RF PATH


Image

1. LTE B3 TX PATH
2. LTE B7 TX PATH
3. LTE B28 TX PATH

Main
BOT

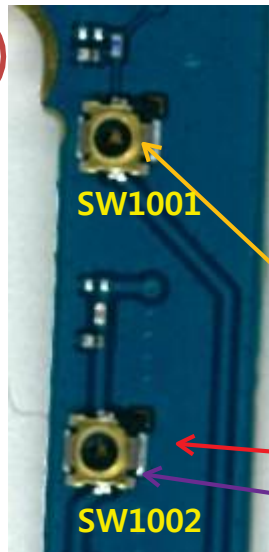

Main
Top

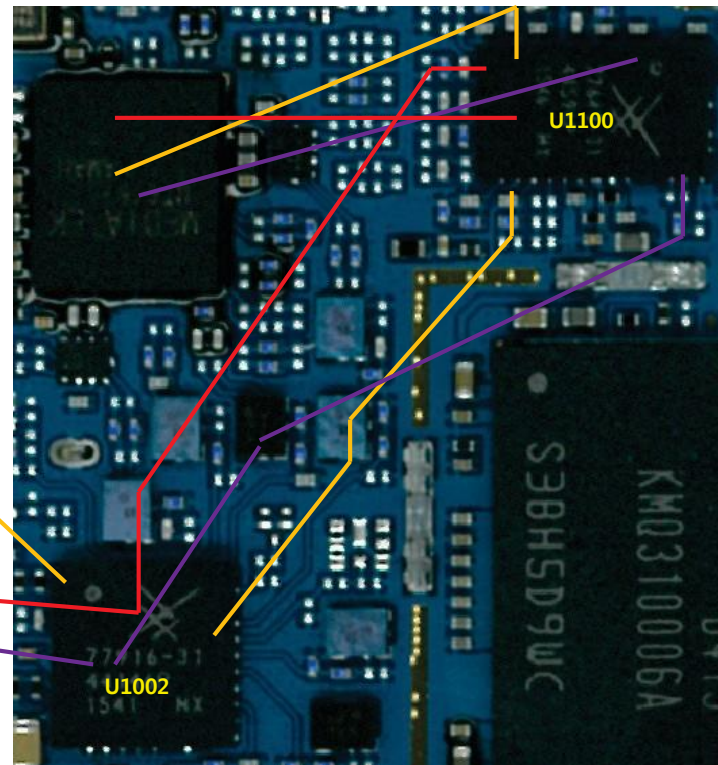


3. TROUBLE SHOOTING

3.7 LTE RF PART

3.7.10 Checking RF Signal TX path(SW, LTE B3)


Checking Flow

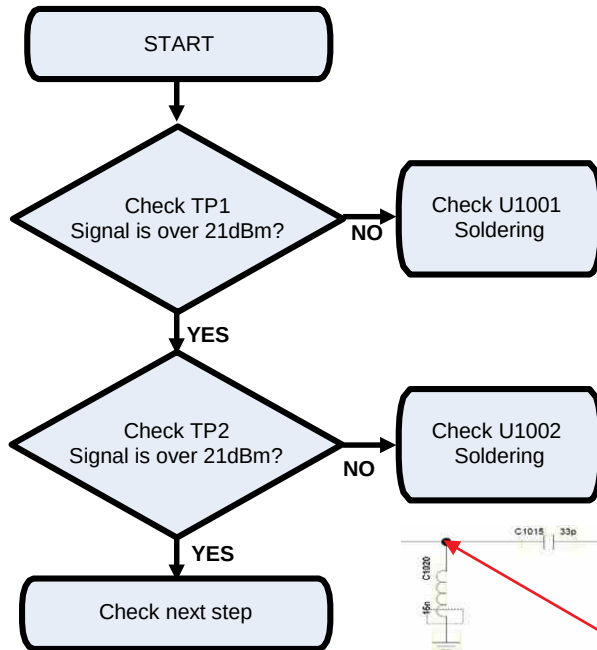

Image



Circuit Diagram

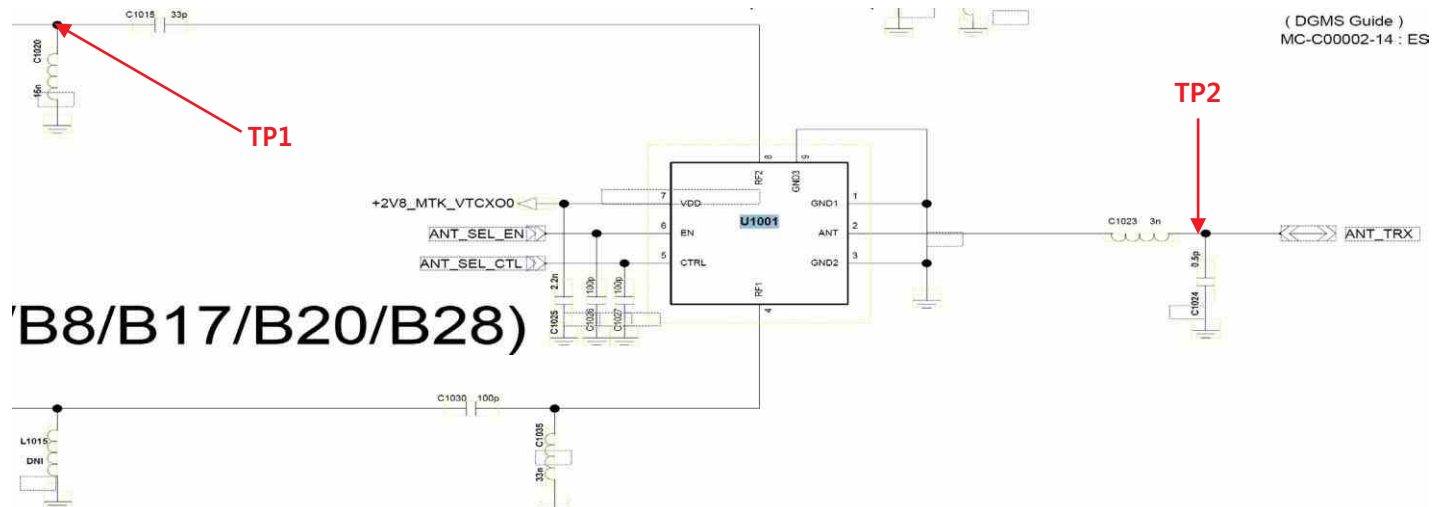


3. TROUBLE SHOOTING


3.7 LTE RF PART

3.7.11 Checking RF Signal TX path(LTE B3)


Checking Flow

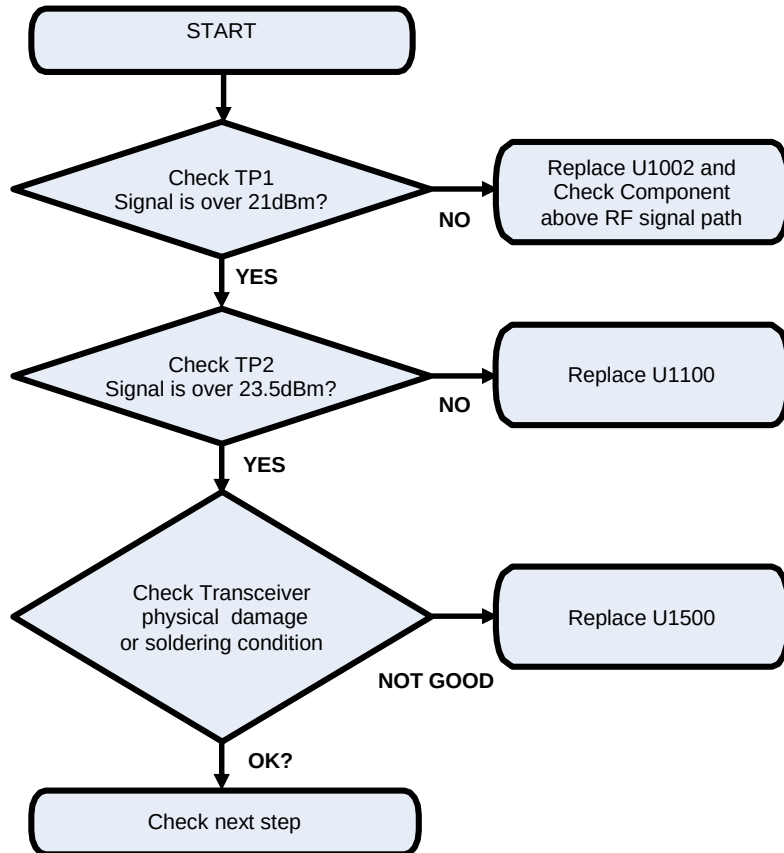

Image

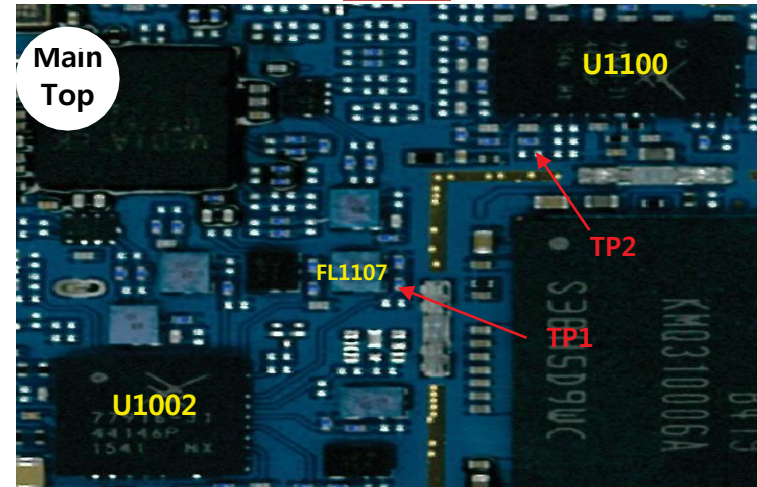

Circuit Diagram

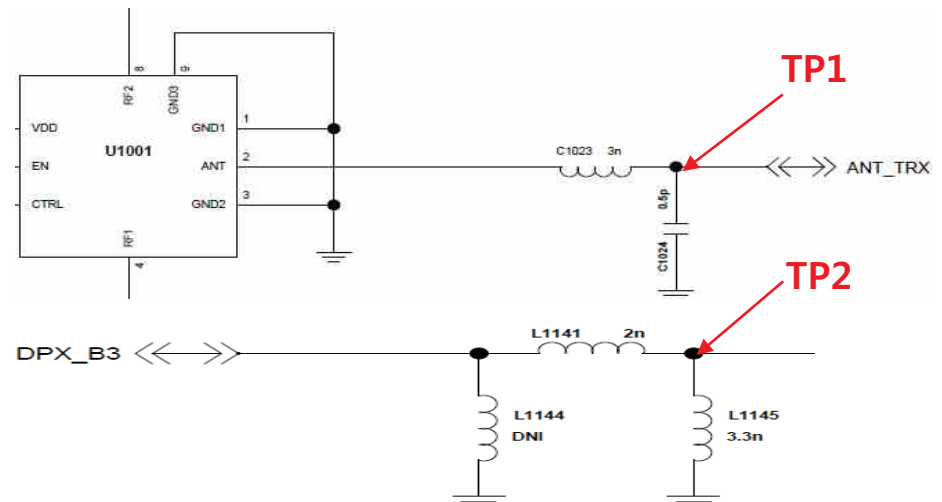


3. TROUBLE SHOOTING



3.7 LTE RF PART

3.7.12 Checking RF Signal TX path(SW, LTE B7/B28)


Checking Flow

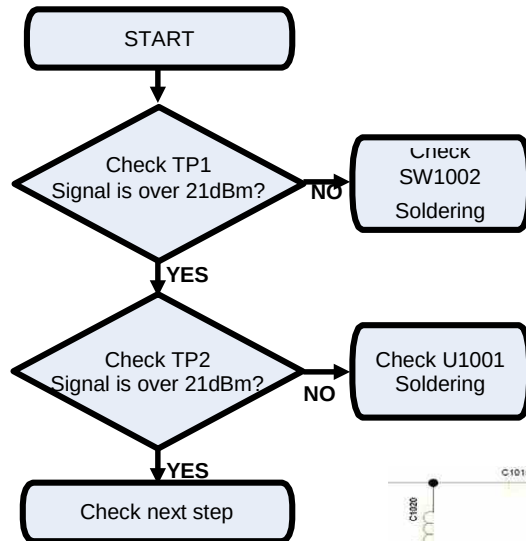

Image

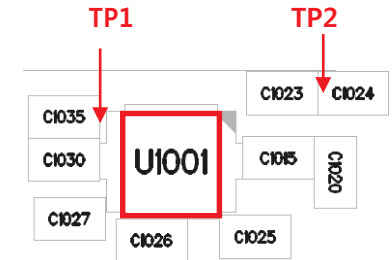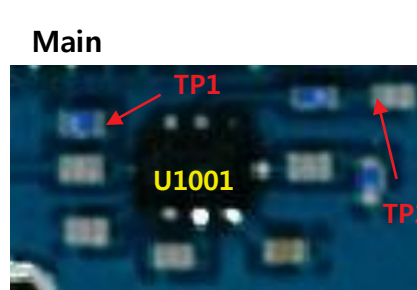

Circuit Diagram

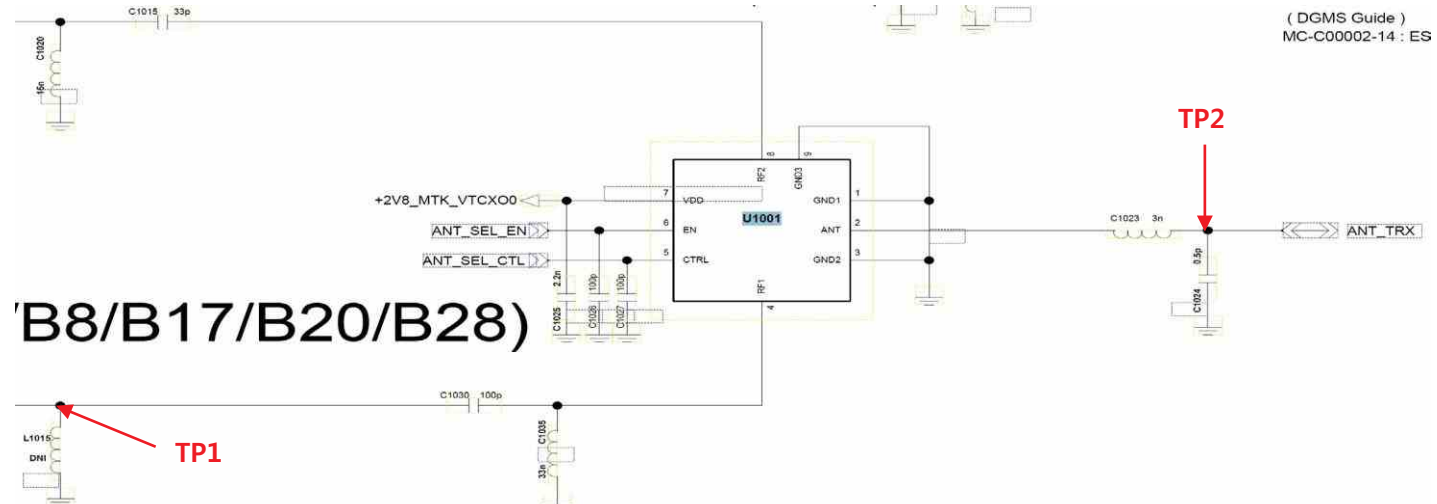


3. TROUBLE SHOOTING


3.7 LTE RF PART

3.7.13 Checking RF Signal TX path(LTE B7)


Checking Flow

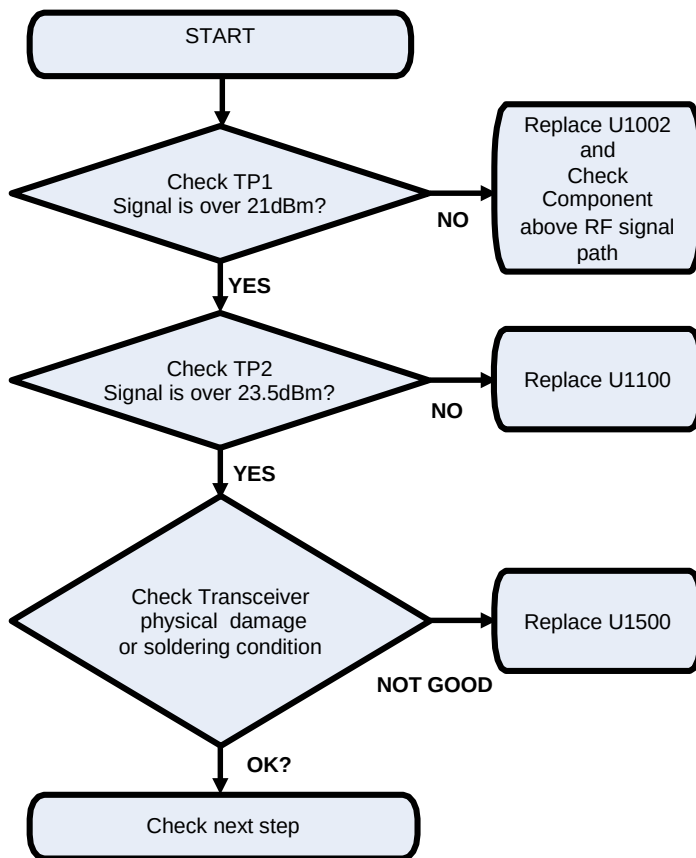

Image

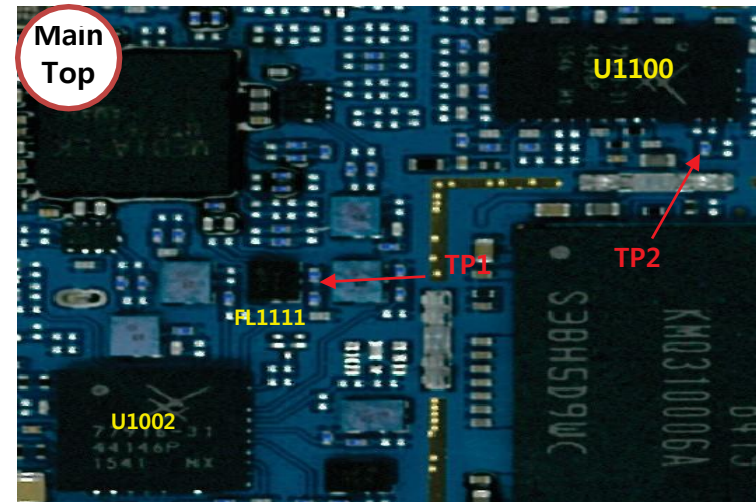


Circuit Diagram

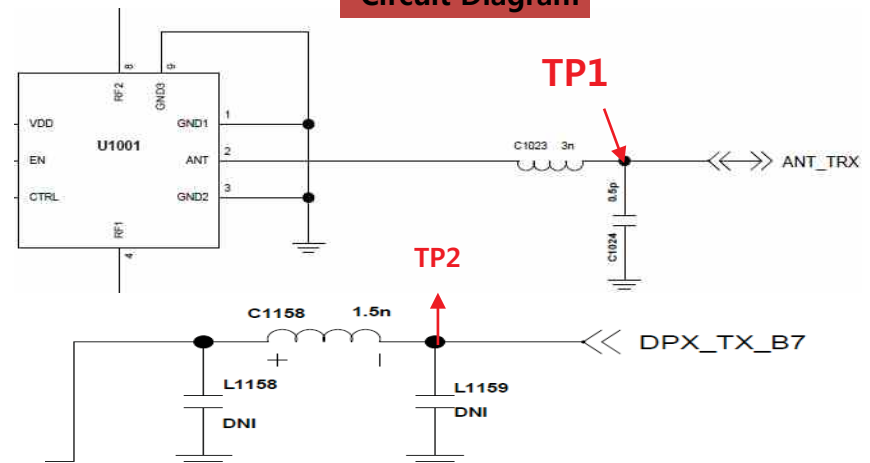


3.7 LTE RF PART

3.7.14 Checking RF Signal TX path(LTE B28A)

Checking Flow

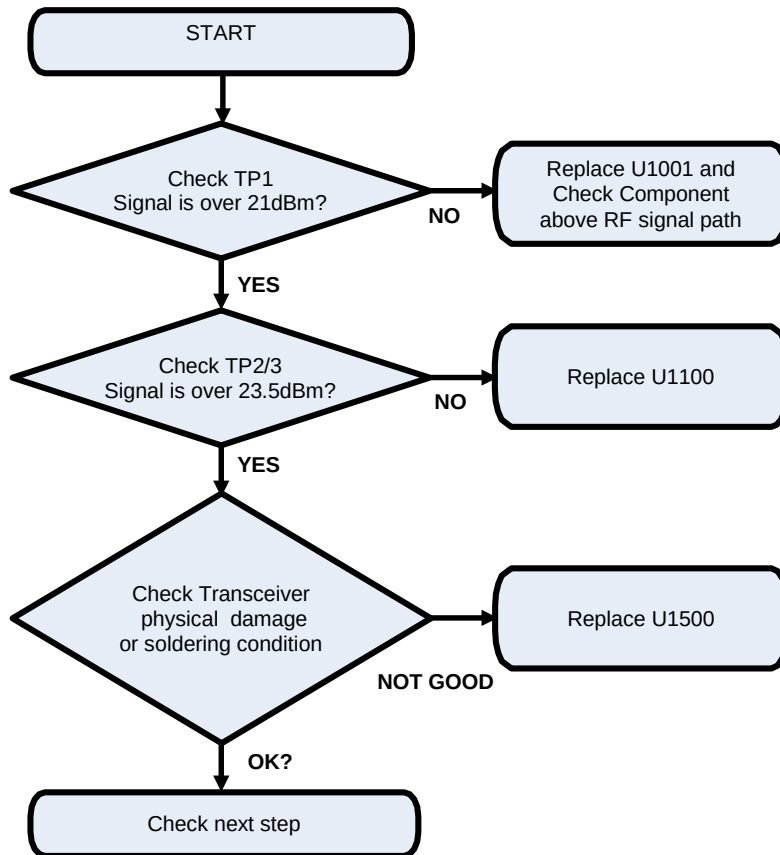


Image

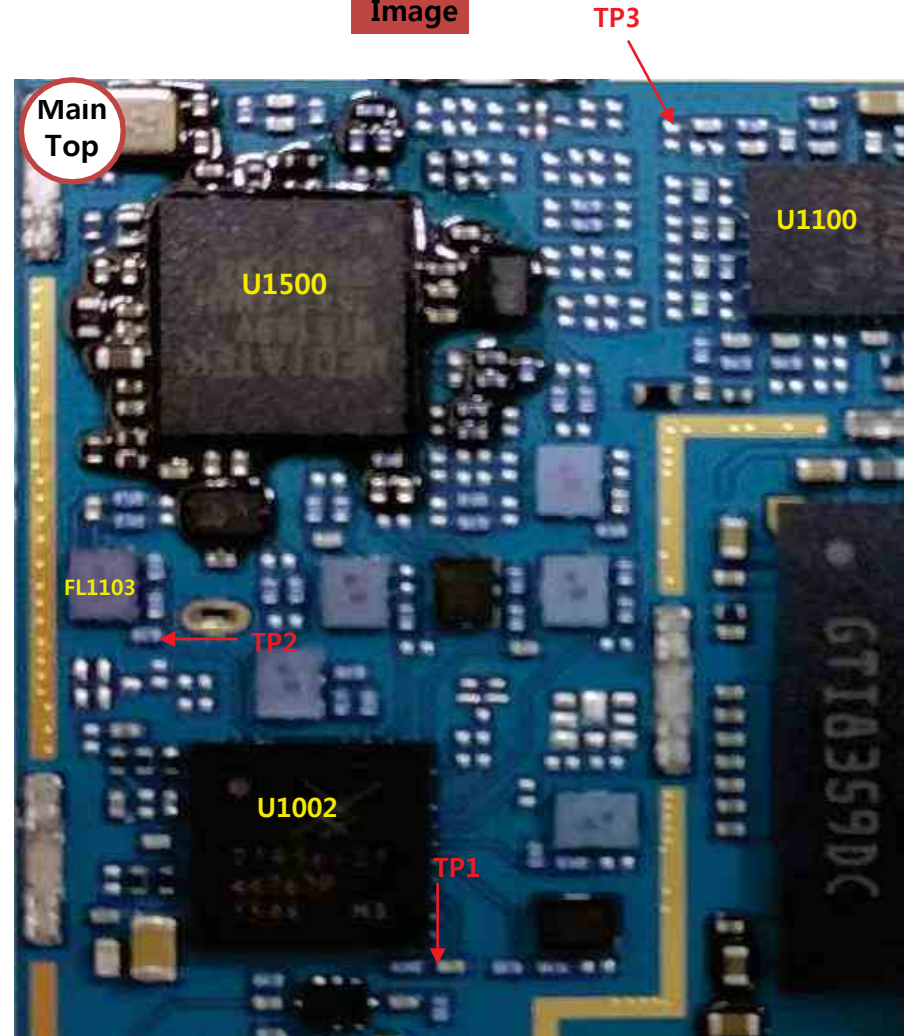

3.7 LTE RF PART


3.7.14 Checking RF Signal TX path(LTE B28B)

Checking Flow

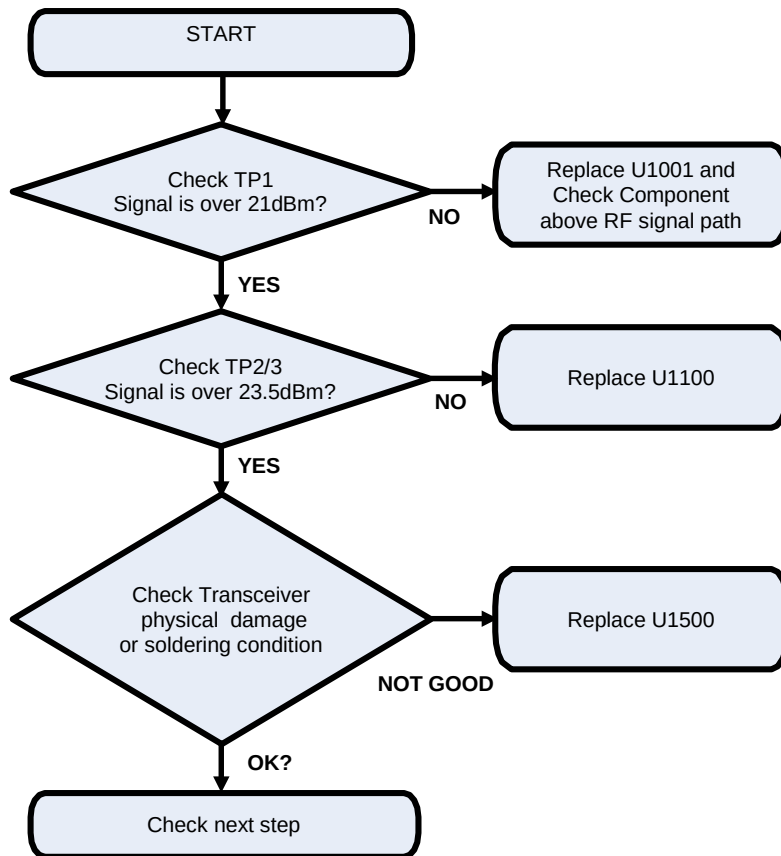

Image






Main
Top

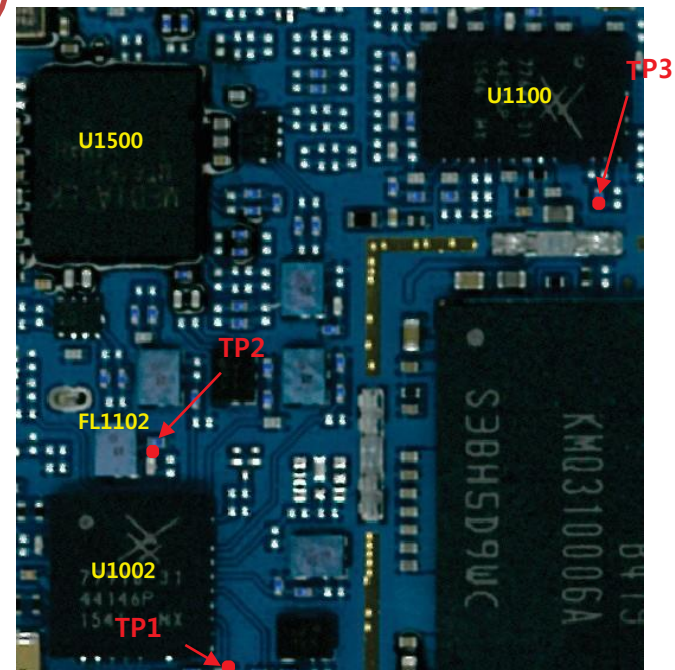

3.7 LTE RF PART

3.7.14 Checking RF Signal TX path(LTE B28A/B)

Circuit Diagram

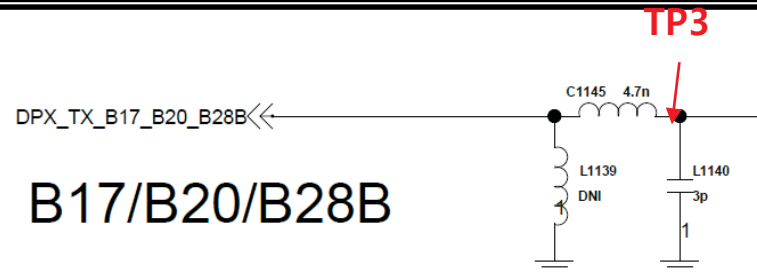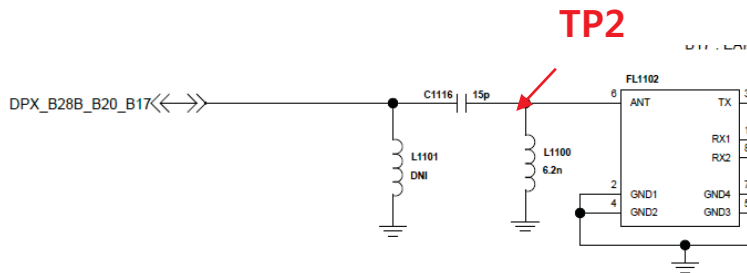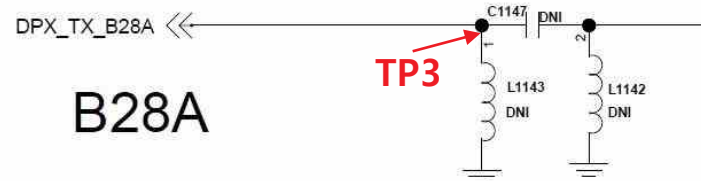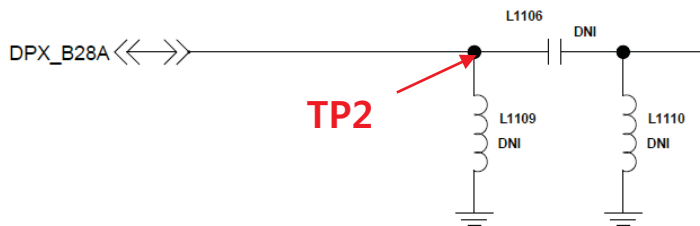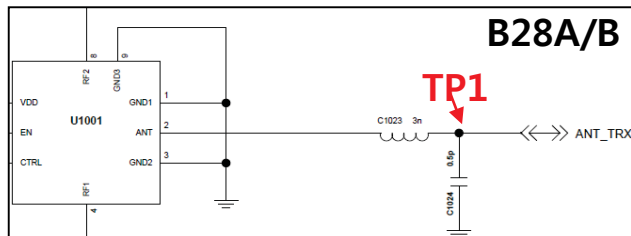


3. TROUBLE SHOOTING


3.8 Power

Checking Power signal (Battery connector, Power Key, PMIC Regulator)

Checking Flow

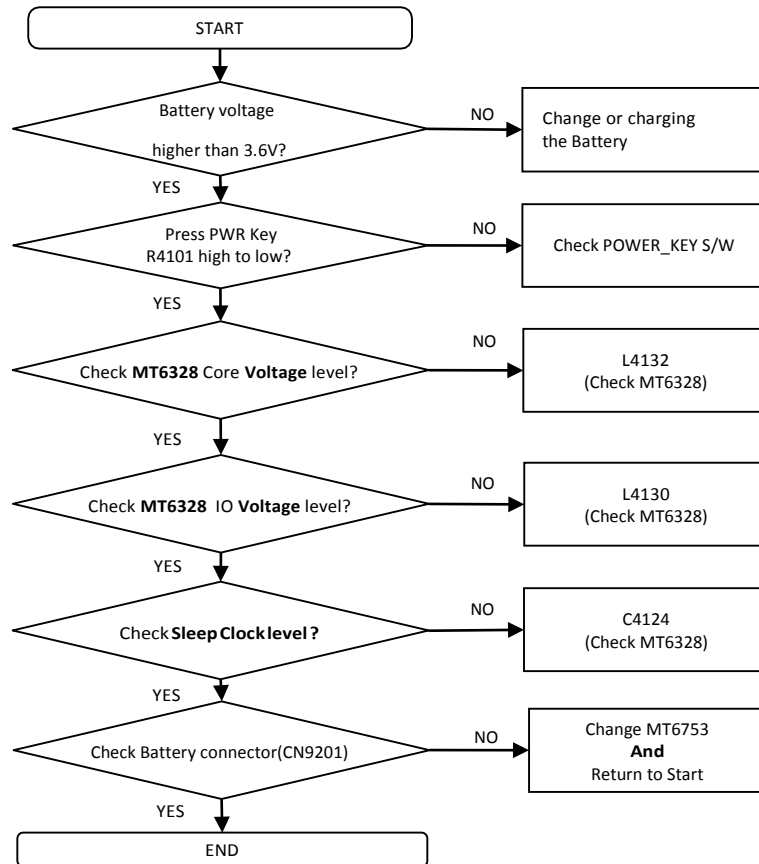


Image

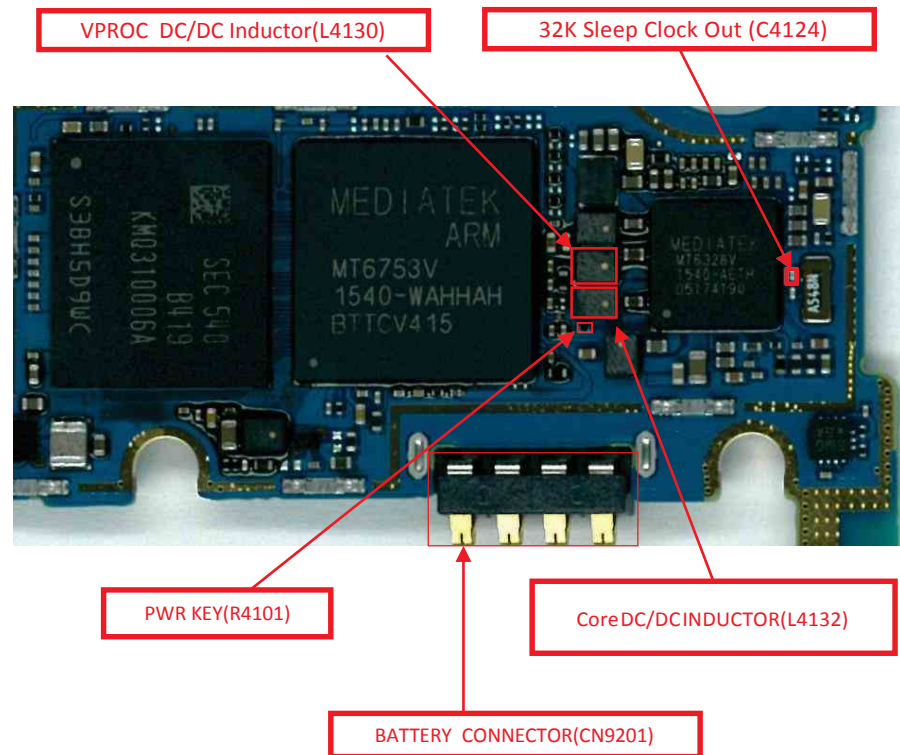

3.8 Power

Checking Power signal (Battery connector, Power Key, PMIC Regulator)

Circuit Diagram

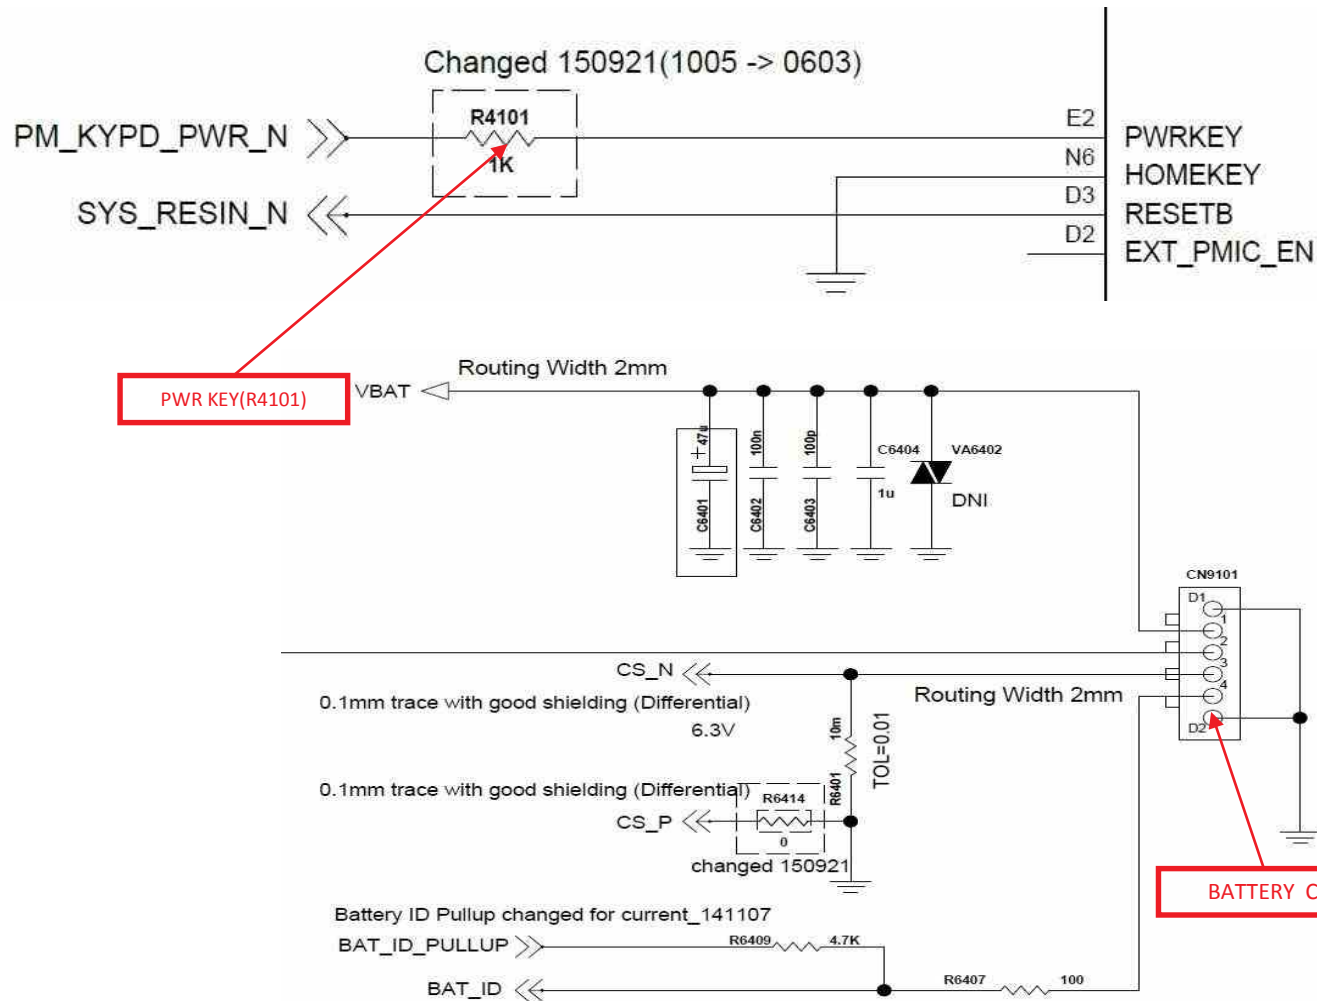

3.8 Power

Checking Power signal (Battery connector, Power Key, PMIC Regulator)


Circuit Diagram




3.9 Charger

The I/O connector and uUSB cable voltage(5.0V) is used as the reference one of PMIC for charging.


Checking Flow

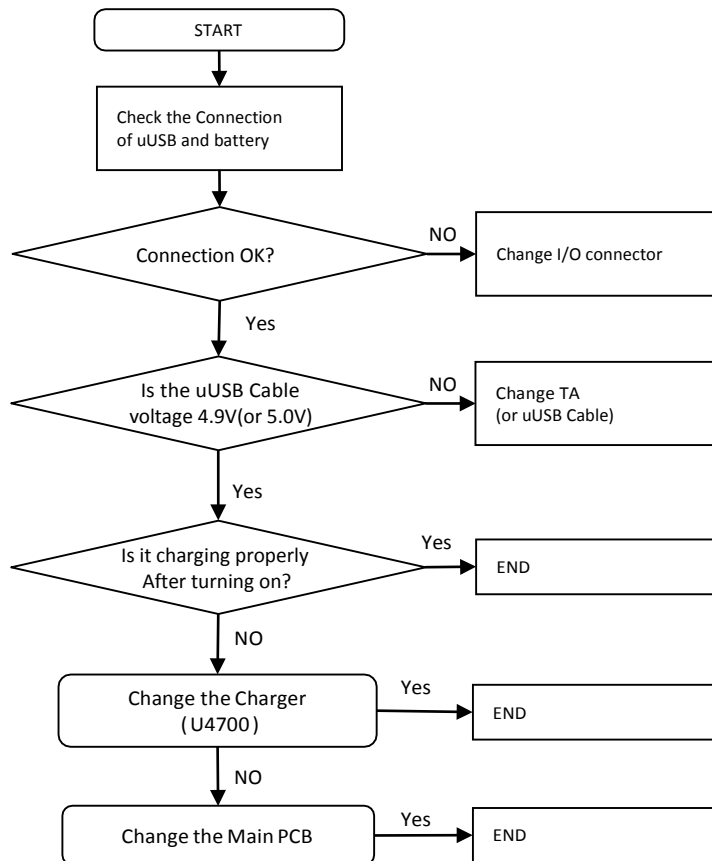

Image

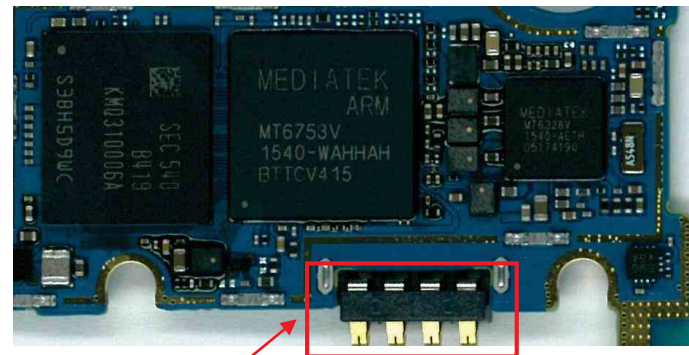

I/O connector

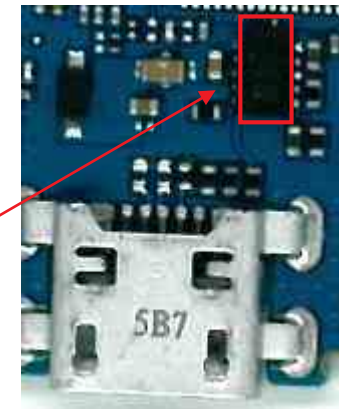


Linear Charger

3. TROUBLE SHOOTING

3.10 Audio Block(3.10.1 Audio receiver)

The receiver control signals are generated by MT6328(U4100), the MT6328 chip and the receiver are to be checked out.


Checking Flow

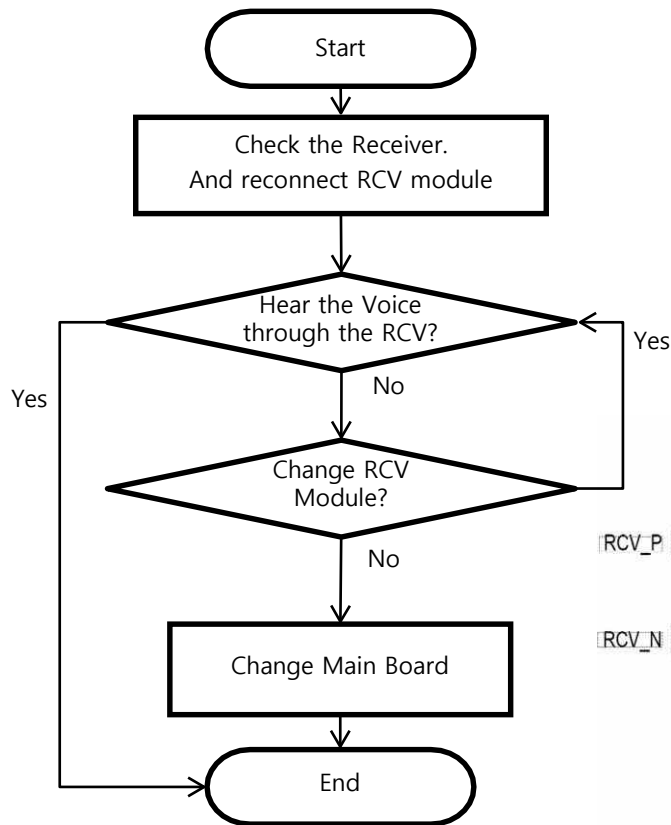

Image



Circuit Diagram

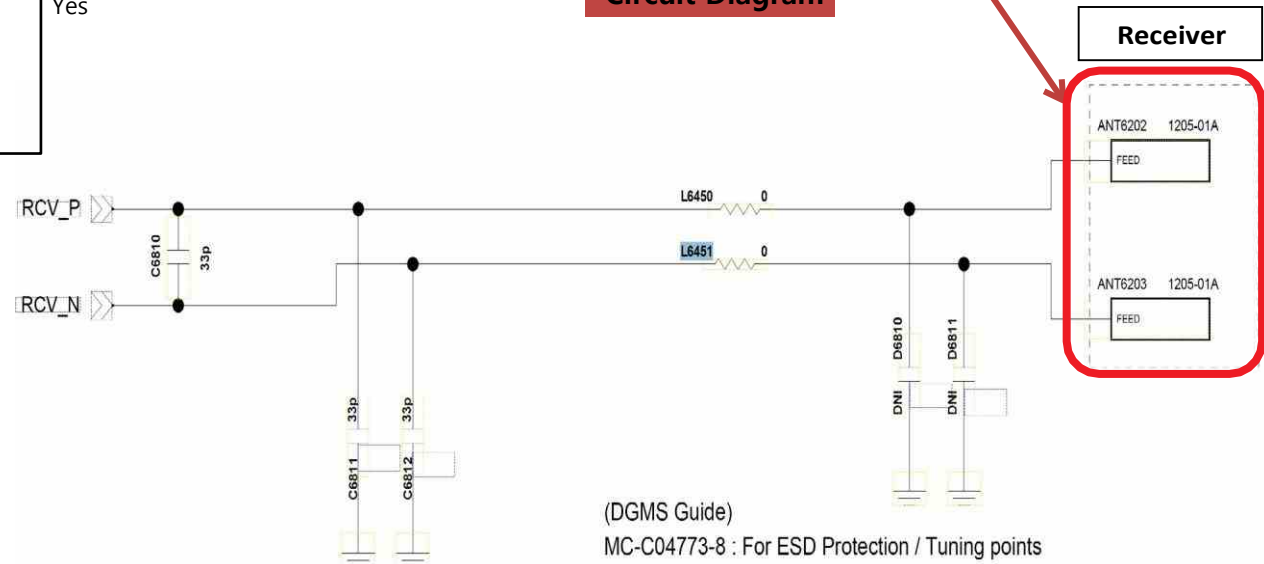


3. TROUBLE SHOOTING


3.10.1 Audio_speaker

The Speaker control signals are generated by MT6328(U4100), the MT6328 chip and the speaker are to be checked out.


Checking Flow

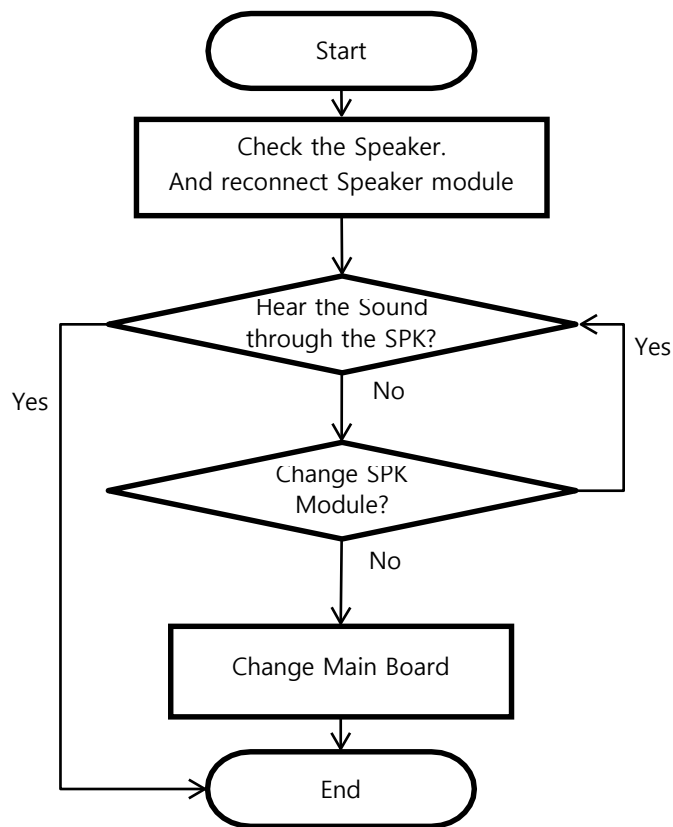

Image

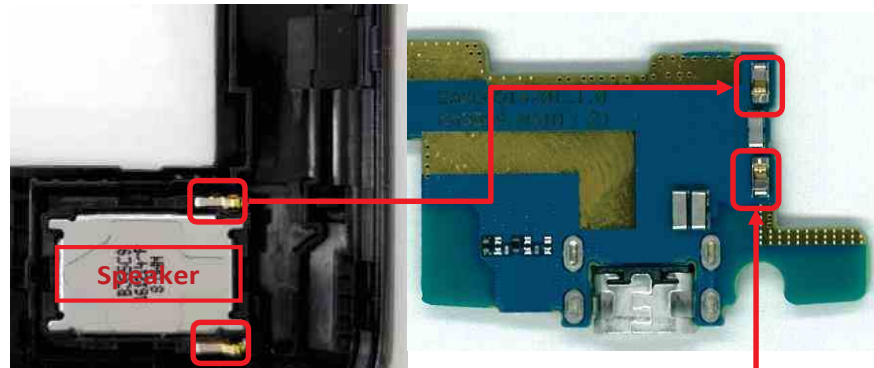


Circuit Diagram

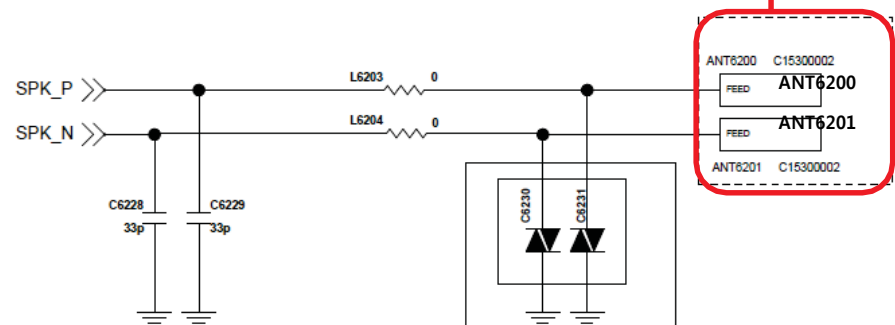


3.10.2 Audio_Main MIC

It's operating voice call(except speakerphone), voice recording, camcorder recording.


Checking Flow

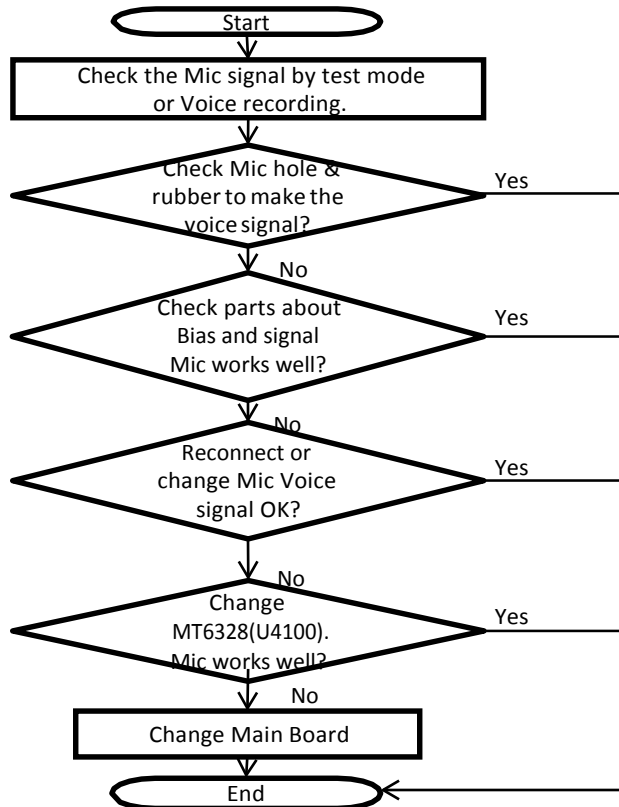

Image

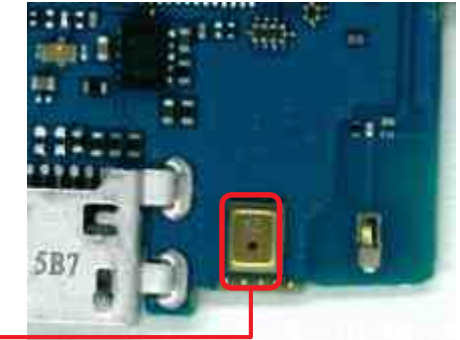

Circuit Diagram

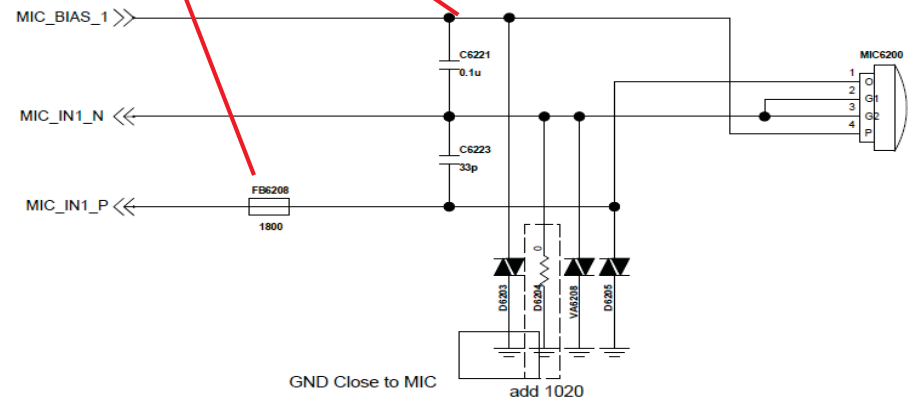


Check FB6208, VMIC voltage level (C6221)

3. TROUBLE SHOOTING

3.10.3 Audio_sub MIC

It's operating Speakerphone call.

Checking Flow

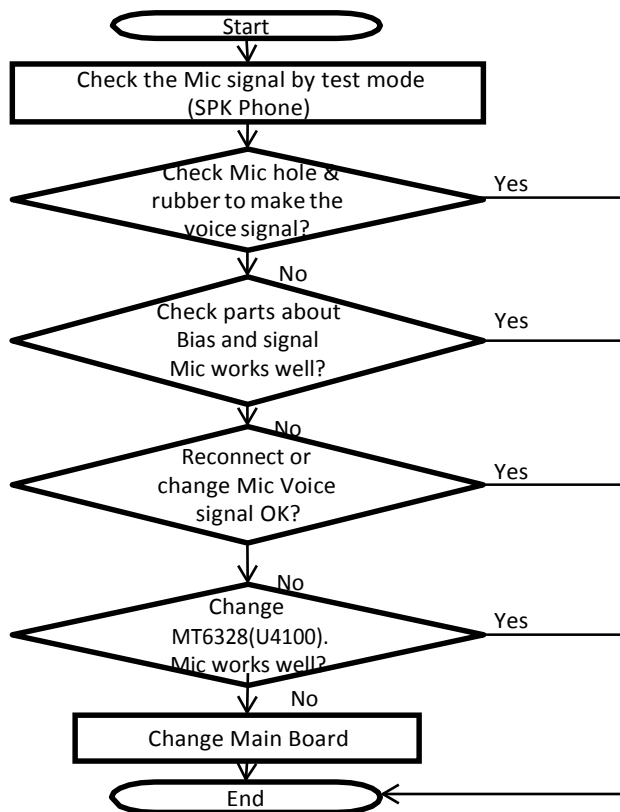


Image



Check SUB Mic rubber

Circuit Diagram

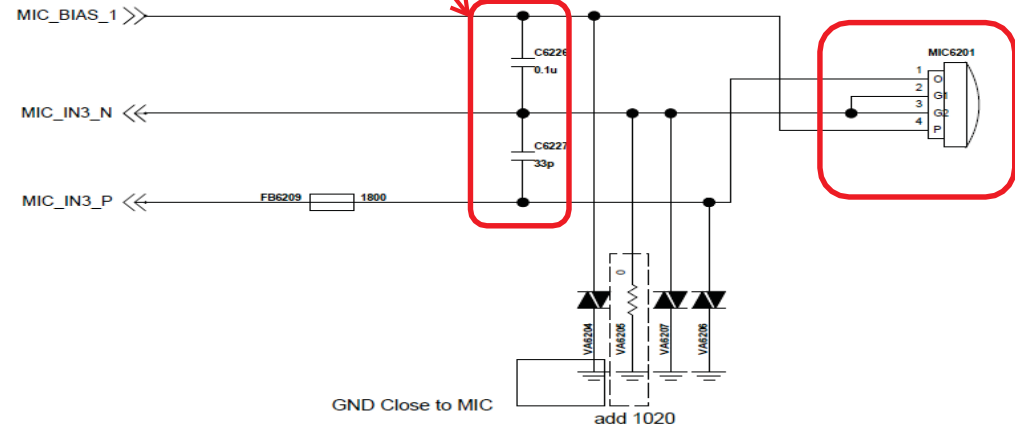

Check FB6209, , VMIC voltage level (C6226)



3. TROUBLE SHOOTING

3.10.4 Audio_Ear MIC Jack


Disable detecting headset insert or No sound from Earphone, Check the Ear Mic and MT6328

Image


Checking Flow

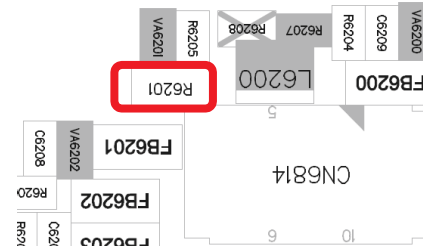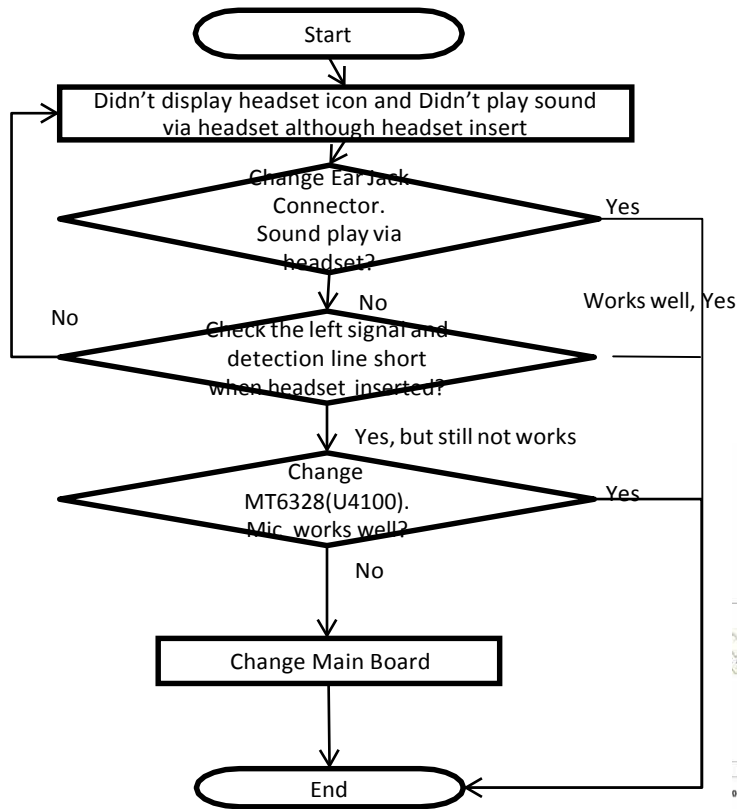

Jack detect
Voltage Level Check at R6201
- 1.8V(before Jack)
- low(after Jack)

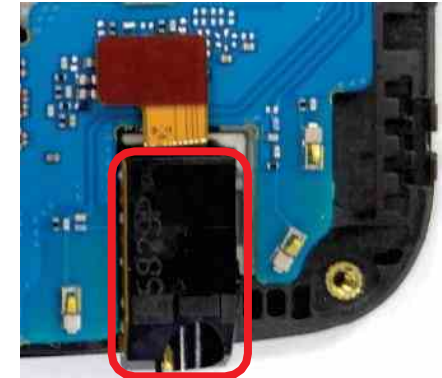

Circuit Diagram

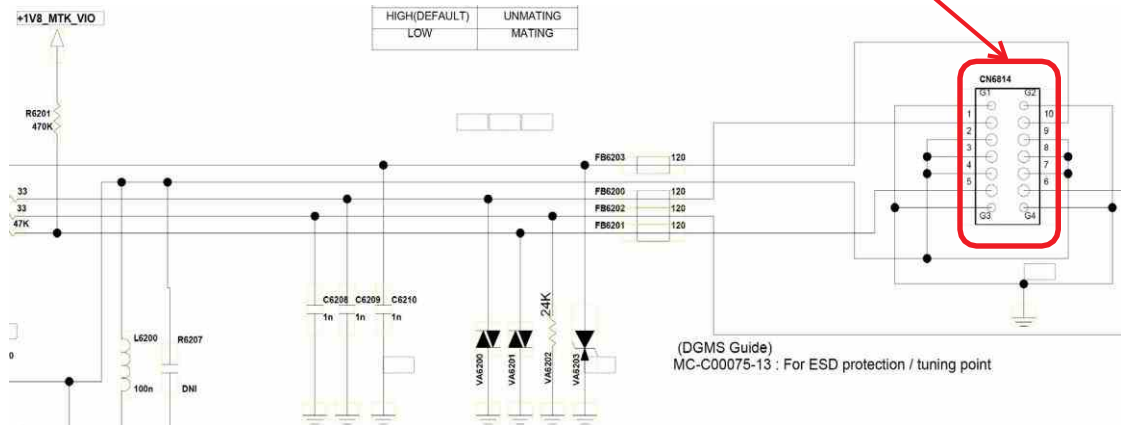


3. TROUBLE SHOOTING



3.10.5 FM_Radio

Disable detecting headset insert or No FM sound from Earphone, Check the Ear Mic and MT6625L


Checking Flow

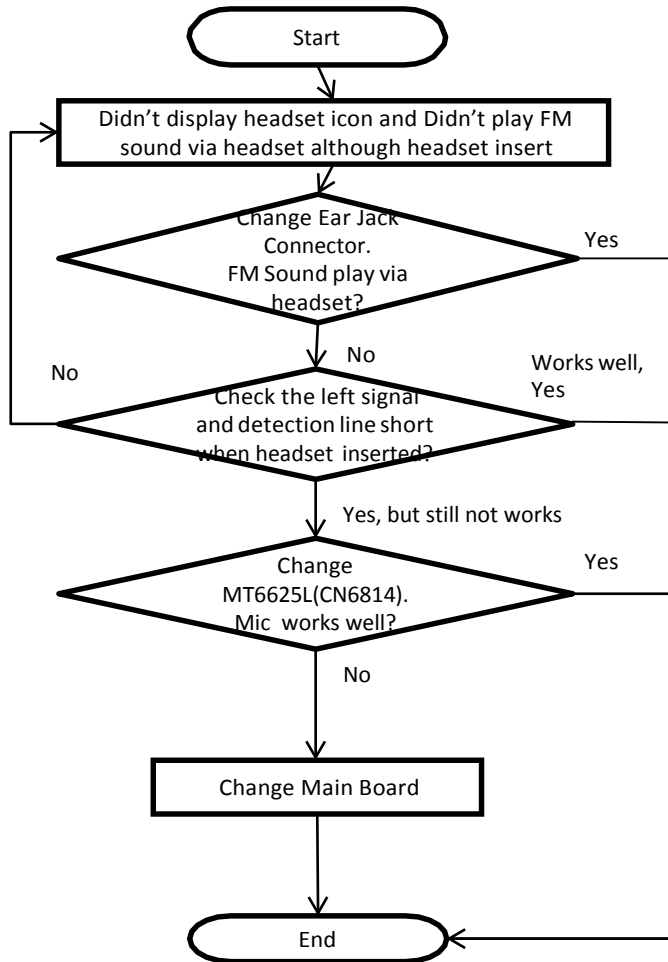

Image

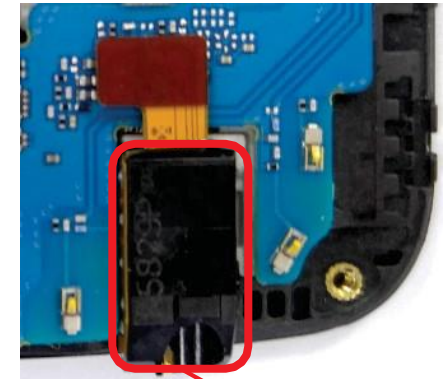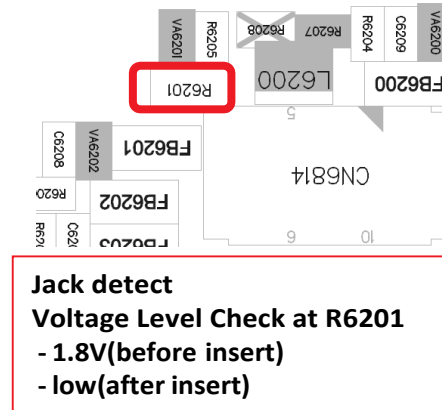


Circuit Diagram

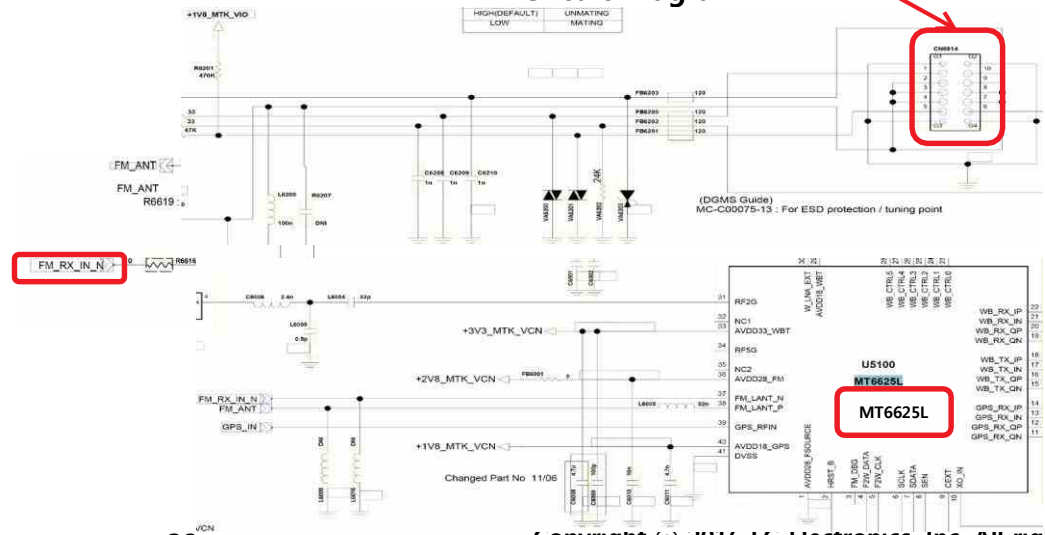


3.11 Checking LCD Block

The LCD control signals are generated by MT6753. Its interface is MIPI having four data lanes and one clock lane.

Checking Flow

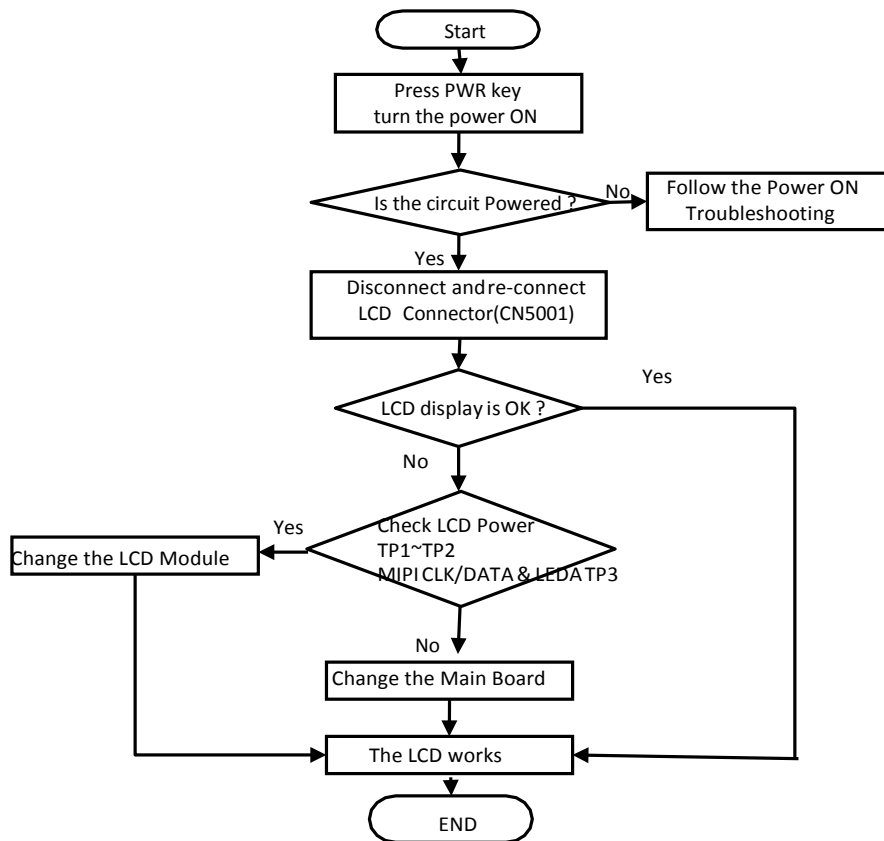

Image

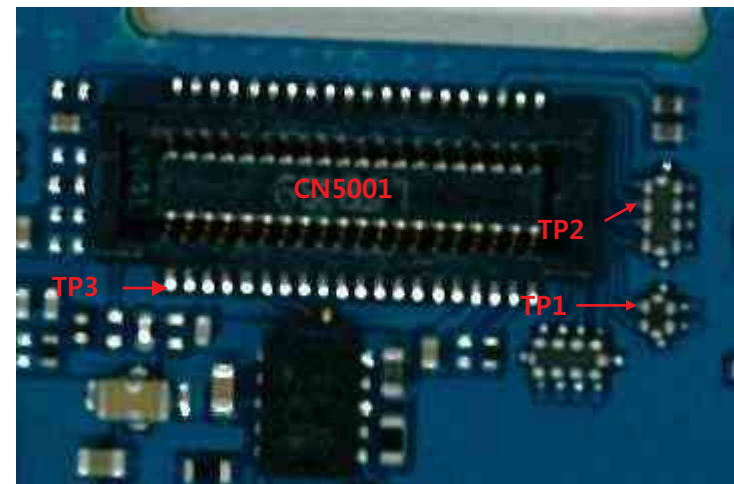


3. TROUBLE SHOOTING

3.11 Checking LCD Block

The LCD control signals are generated by MT6753. Its interface is MIPI having four data lanes and one clock lane.


Circuit Diagram

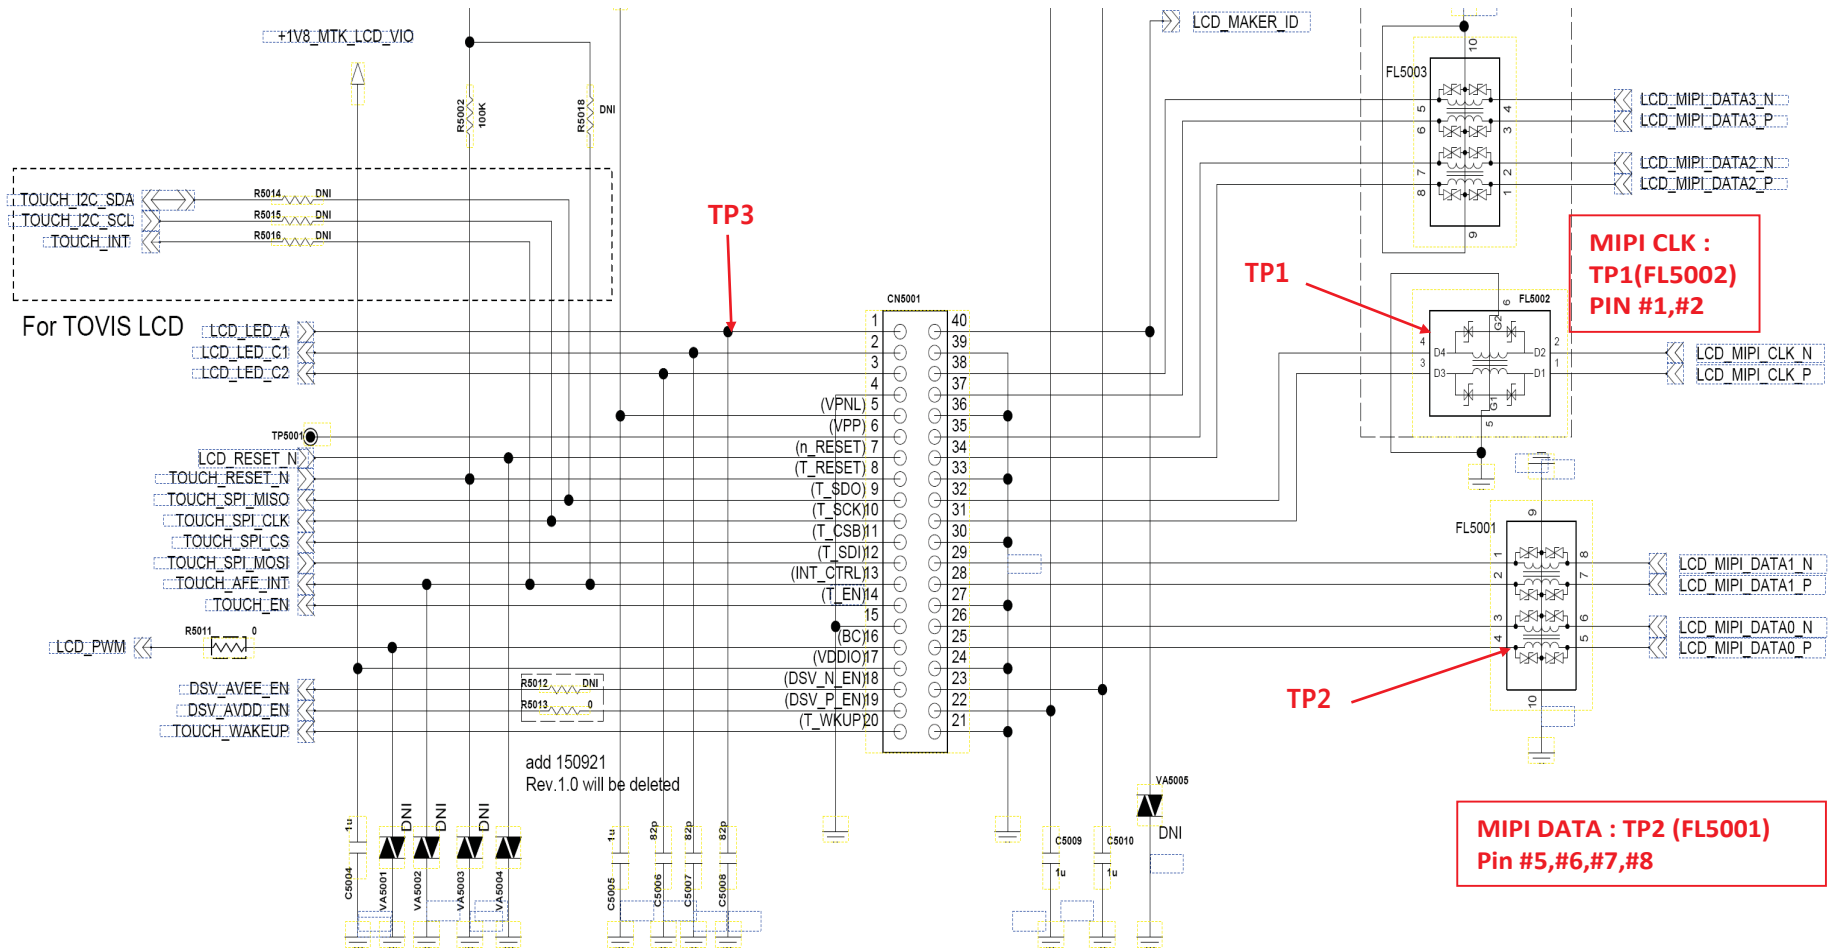


3.12 Checking Touch Block

The Touch control signals are generated by MT6753. It is assembled with LCD.

Checking Flow

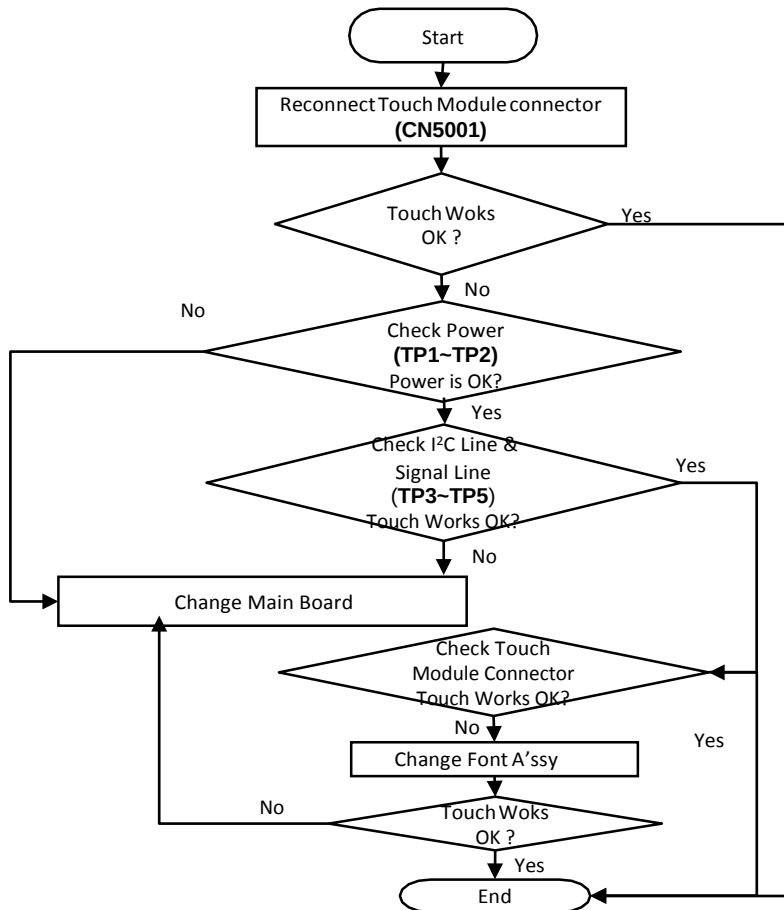


Image

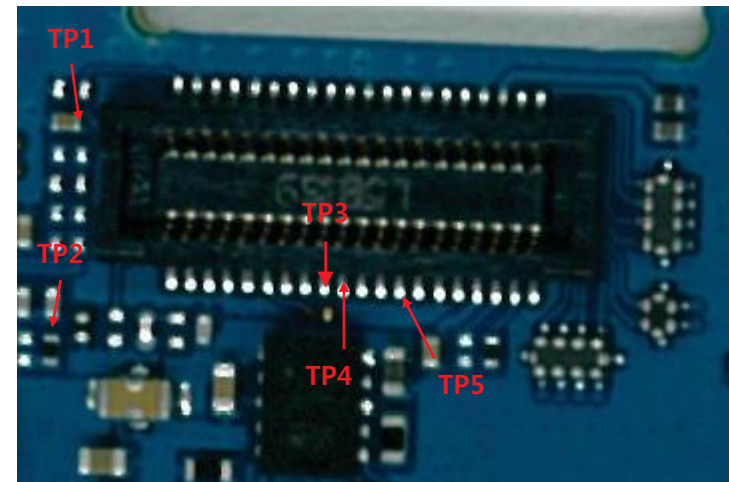

3.12 Checking Touch Block

The Touch control signals are generated by MT6753. It is assembled with LCD.

Circuit Diagram

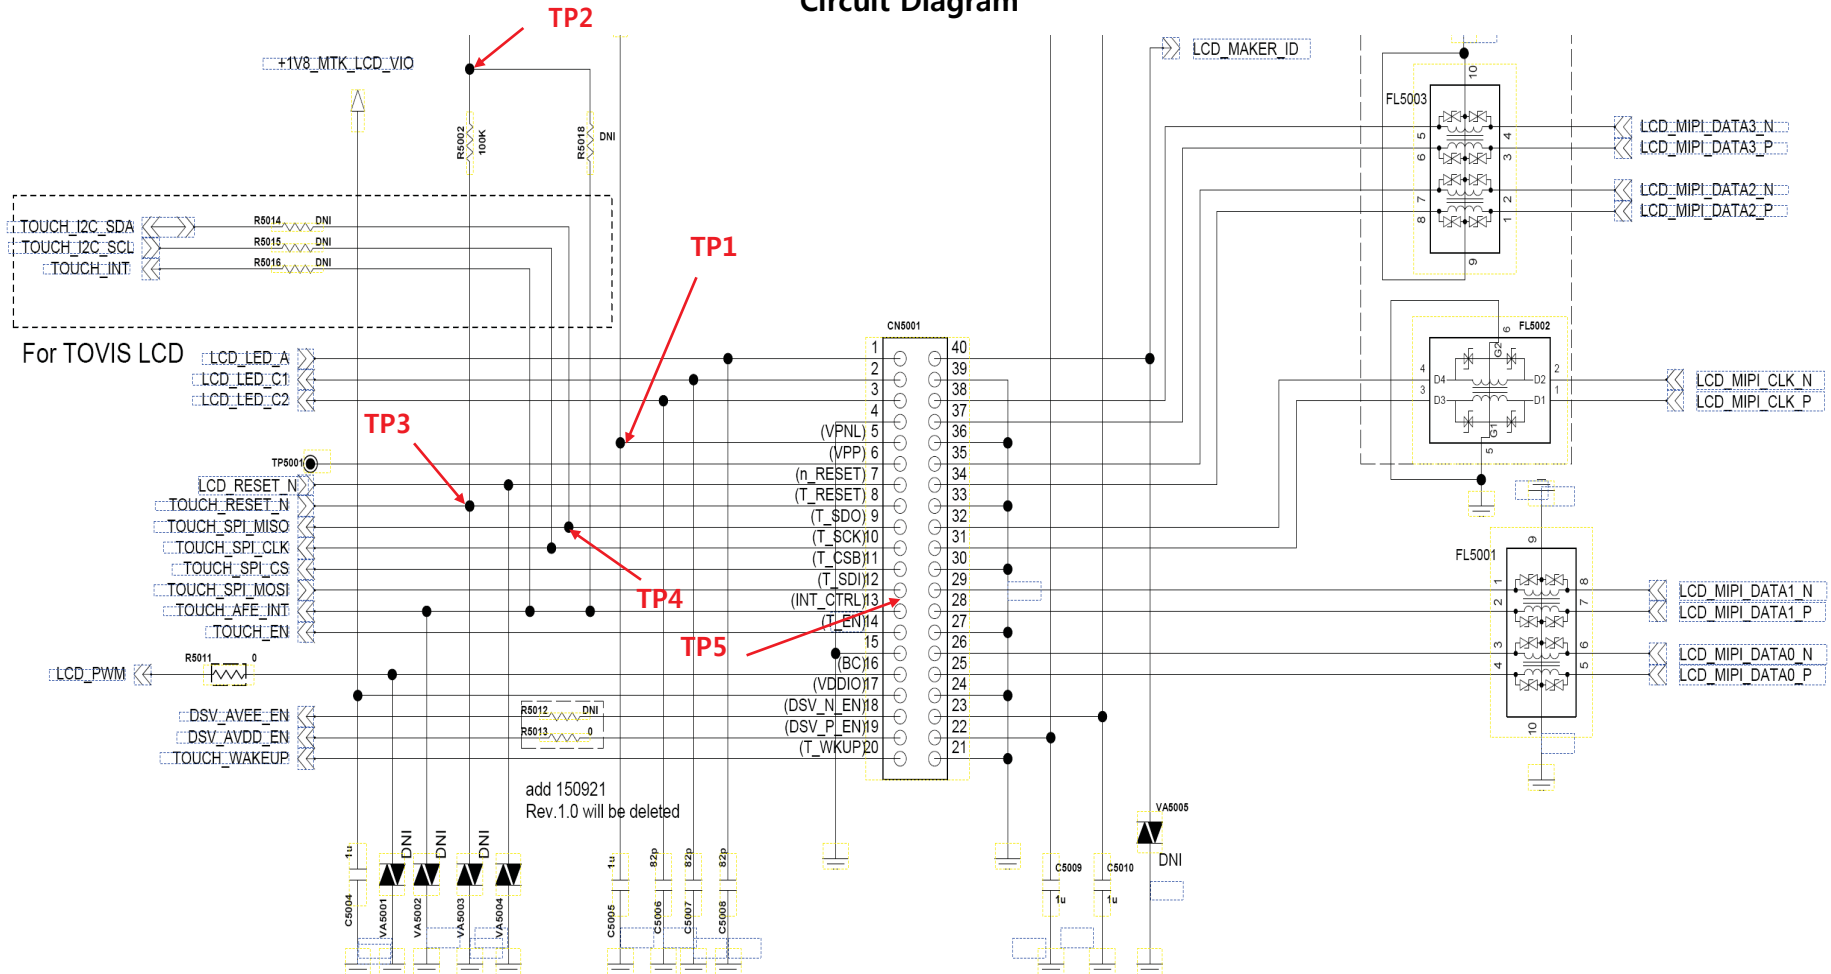


3. TROUBLE SHOOTING


3.13 Checking accelmeter+compass sensor Block

The Accl. & compass sensors are calibrated by using SW algorithm.

Image



Circuit Diagram

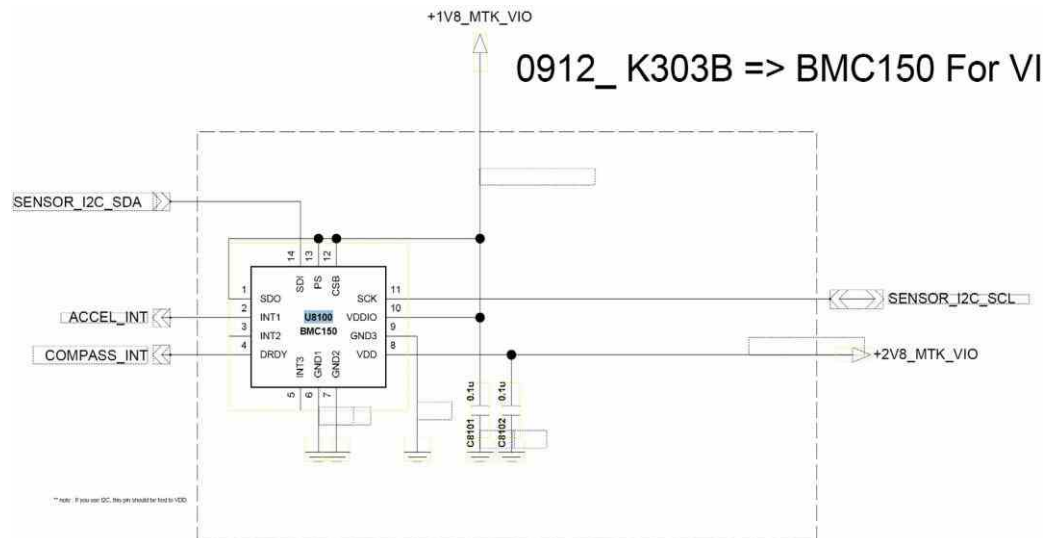


3. TROUBLE SHOOTING


3.13 Checking proximity sensor Block

Proximity Sensor is worked as below: Send Key click → Phone number click → Call connected
→ Object moved at the sensor → Control the screen's on/off operation automatically


Checking Flow

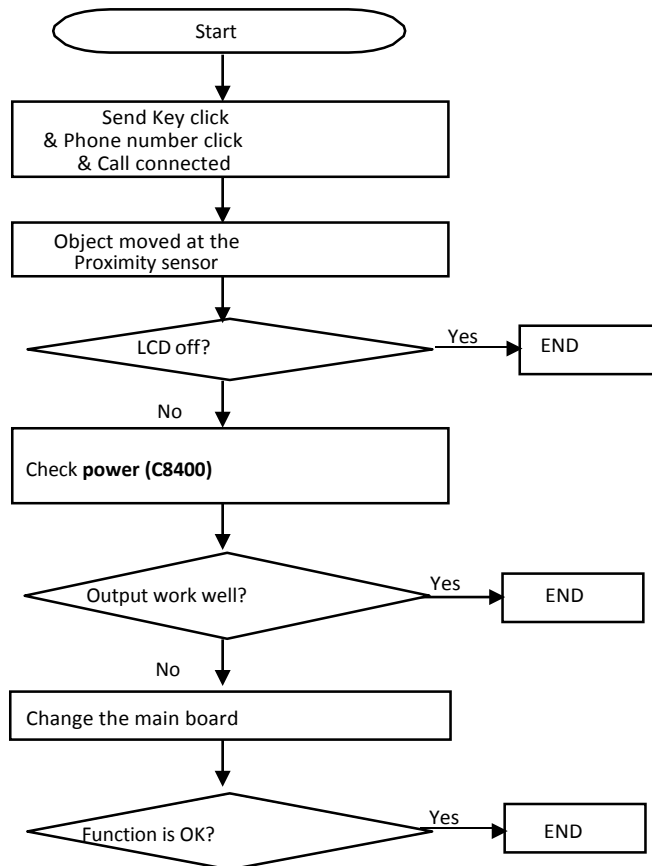

Image

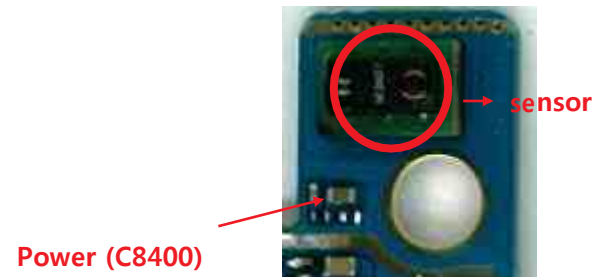

Circuit Diagram

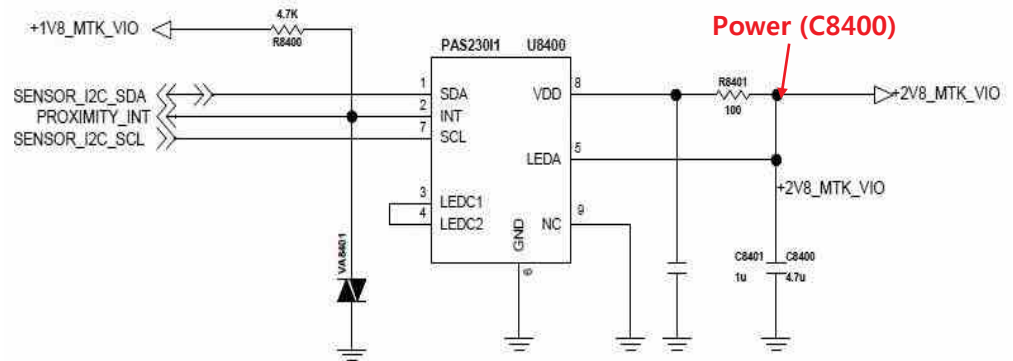


3. TROUBLE SHOOTING

3.14 Checking USB Block

I/O connector is used as the USB port.


Checking Flow

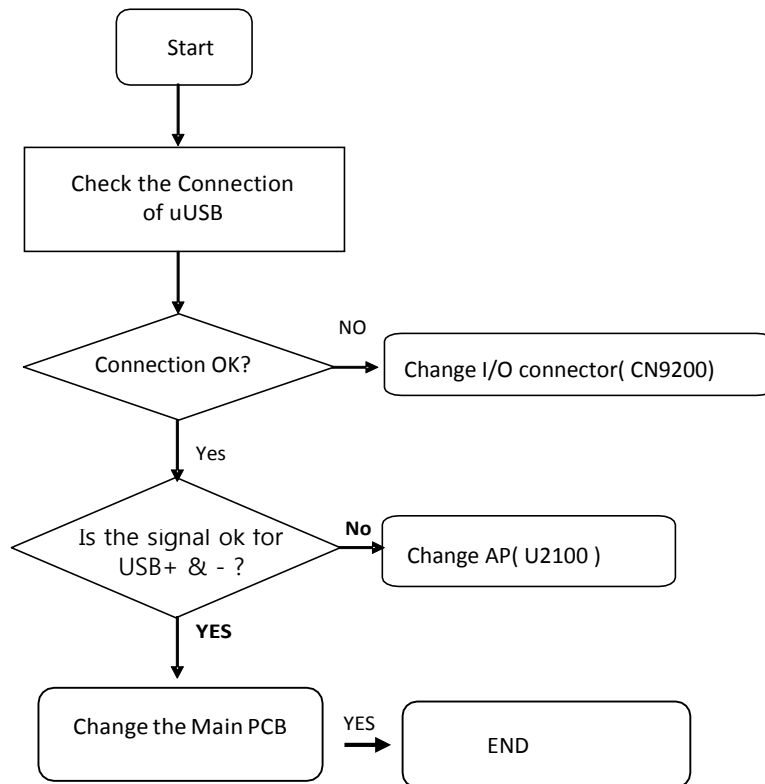

Image



Circuit Diagram

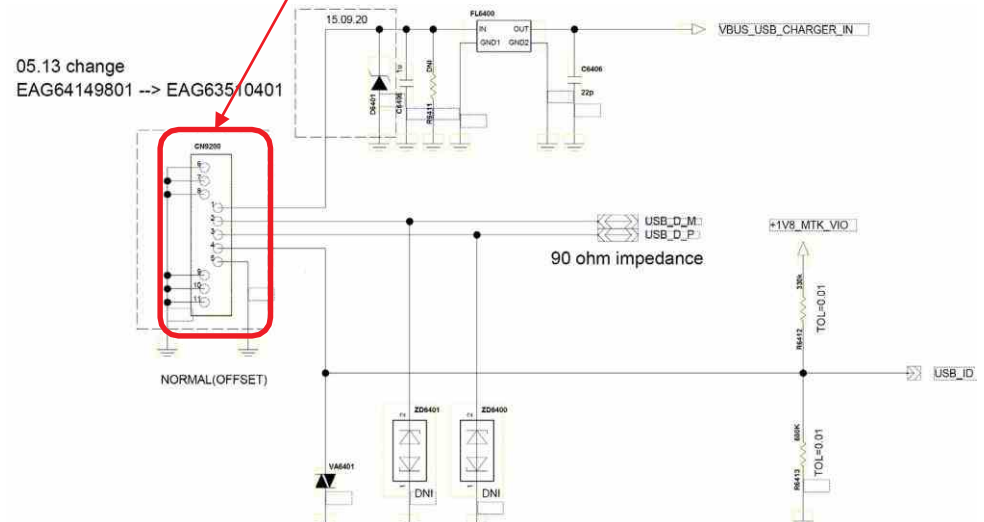


3. TROUBLE SHOOTING


3.15 Checking Main camera Block

8M camera control signals are generated by MT6753 (U2100 : Main Chipset). And powered by MT6328 (U4100 : PMIC).


Checking Flow

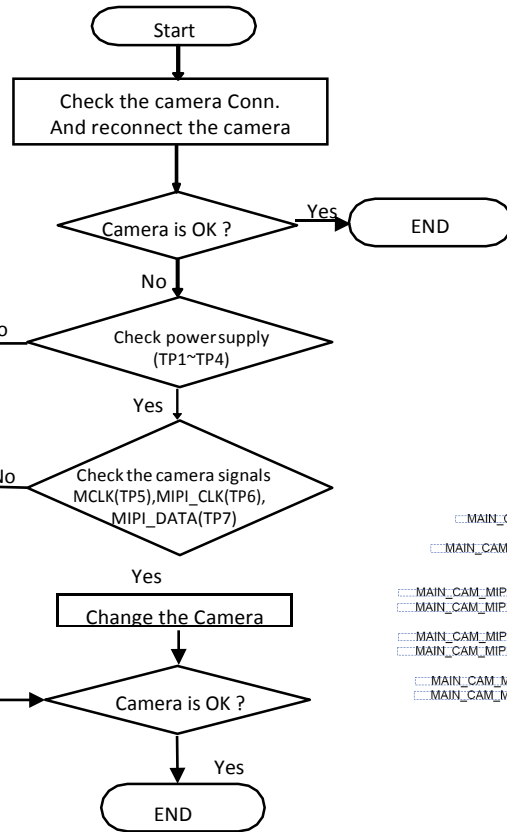

Image

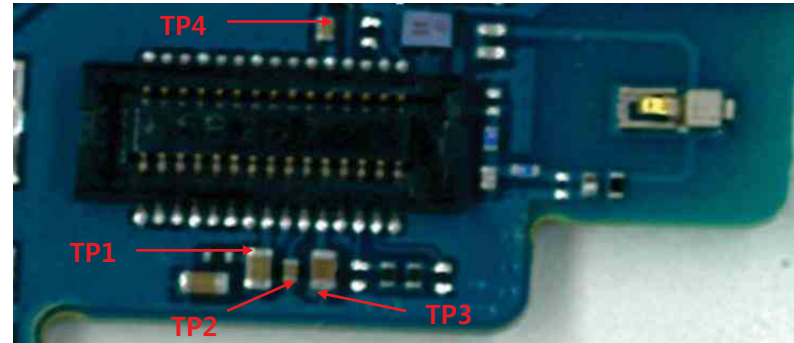

Circuit Diagram

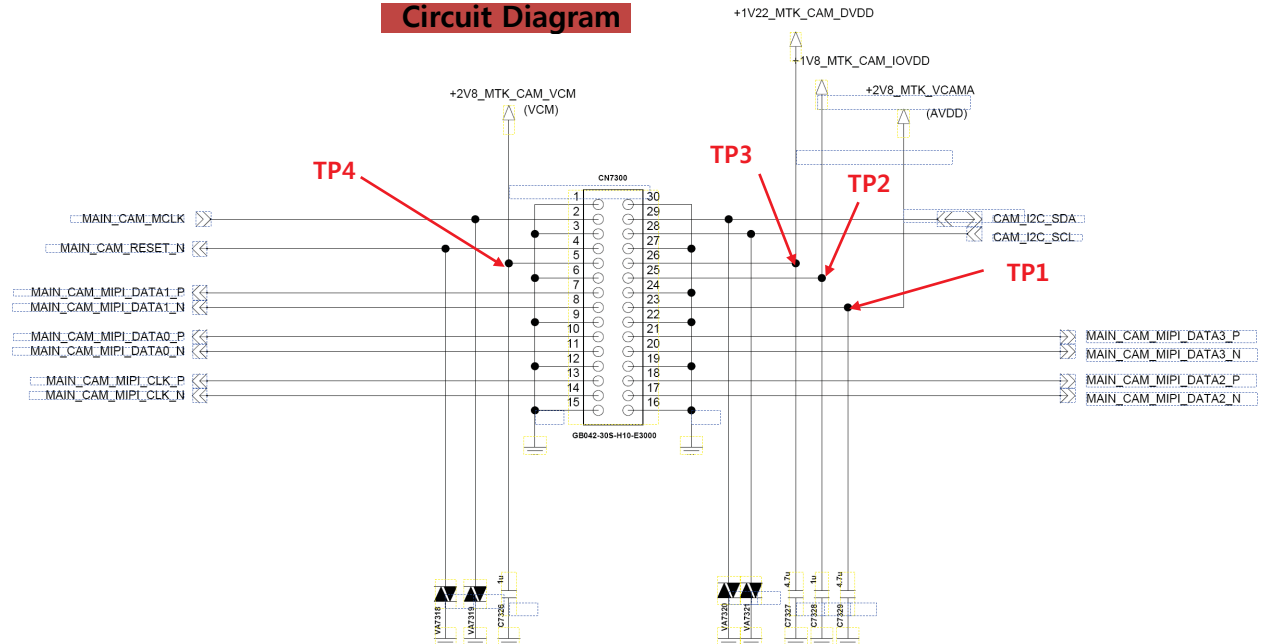


3. TROUBLE SHOOTING


3.15 Checking VT camera Block

5M camera control signals are generated by MT6753 (U2100 : Main Chipset). And powered by MT6328 (U4100 : PMIC).


Checking Flow

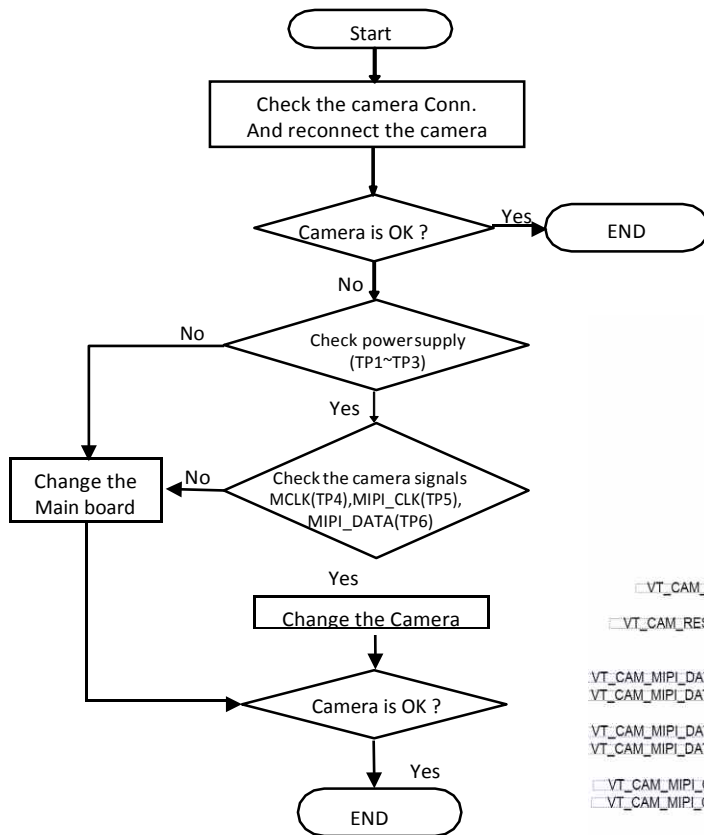

Image

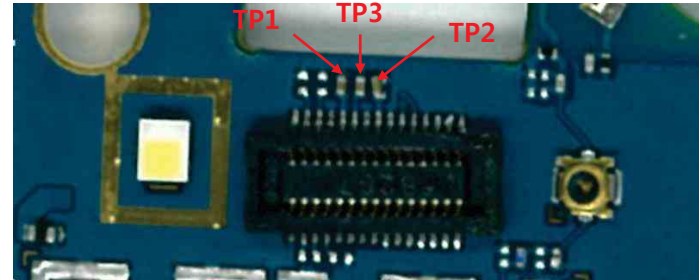

Circuit Diagram

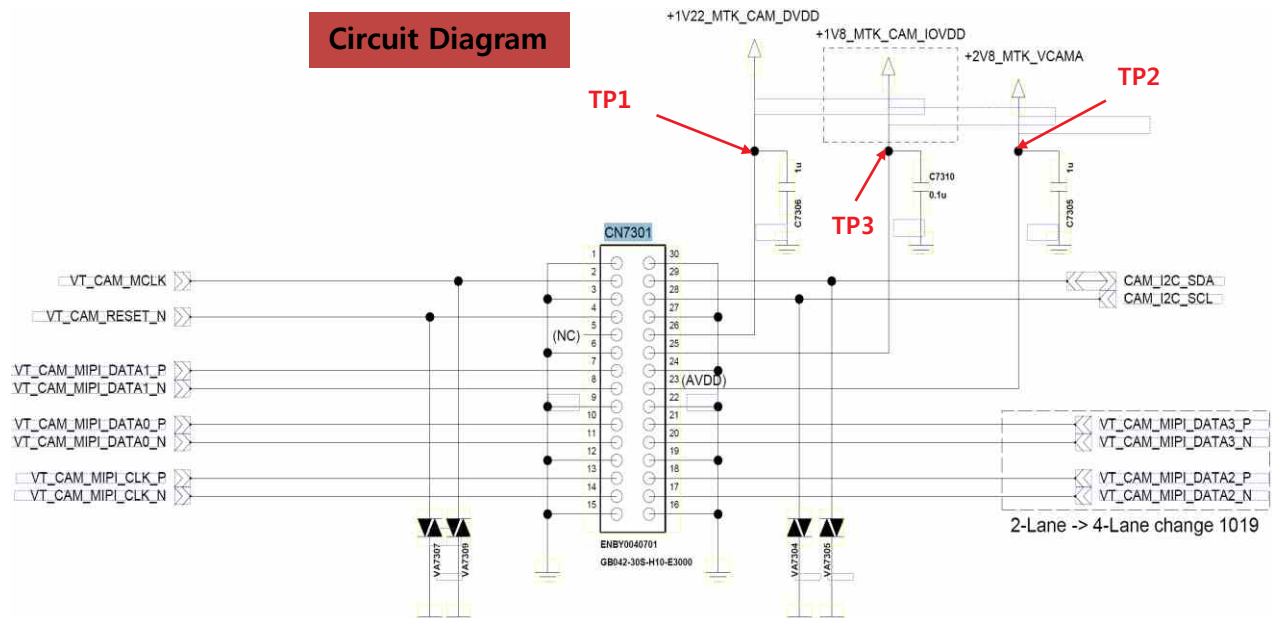


3. TROUBLE SHOOTING


3.16 Connectivity RF PART

3.16.1 Checking RF Signal TRX path(WiFi, BT)


Checking Flow

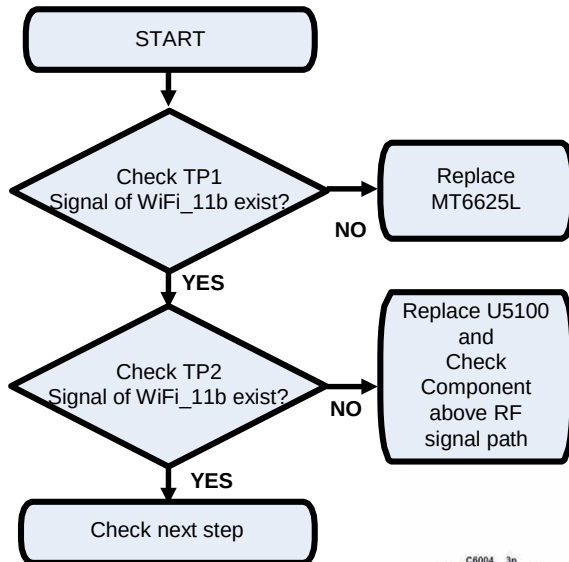


Main BOT
TP2

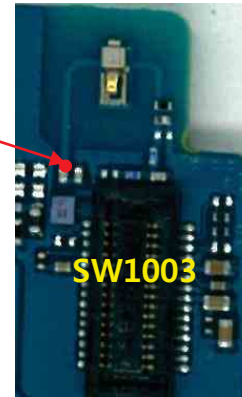

Main
TOP

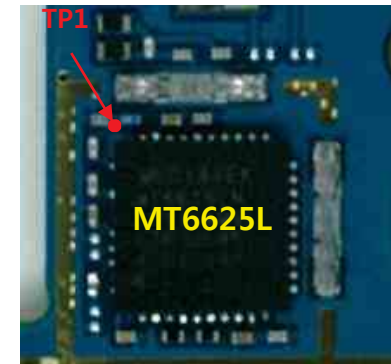


Circuit Diagram

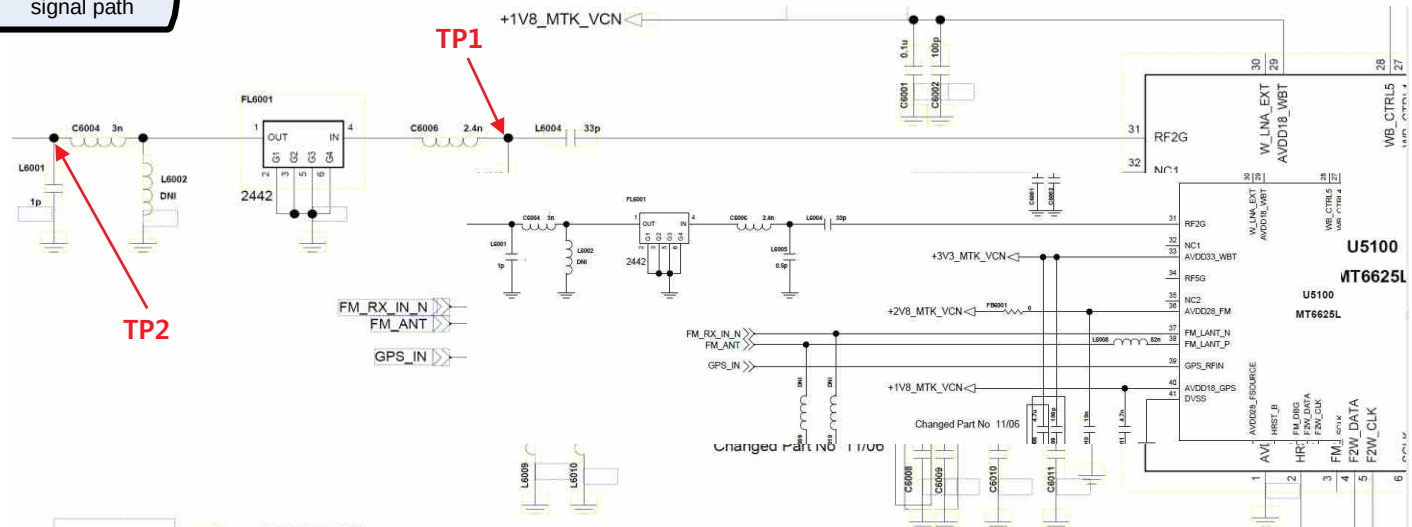


3.16 Connectivity RF PART

3.16.2 Checking RF Signal TRX path(GPS)


Checking Flow

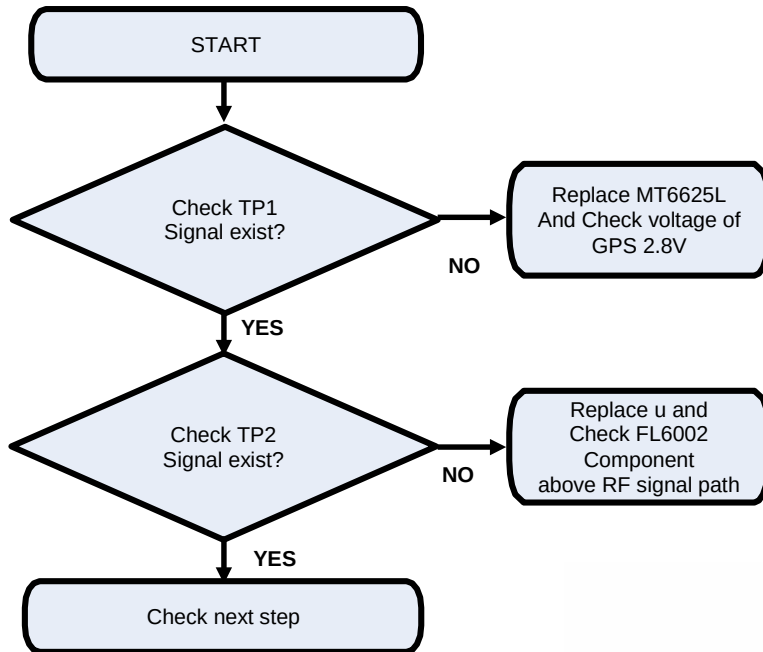


Image

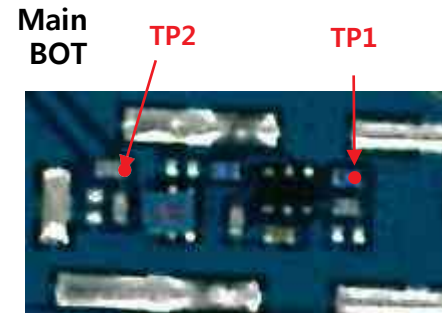


Circuit Diagram

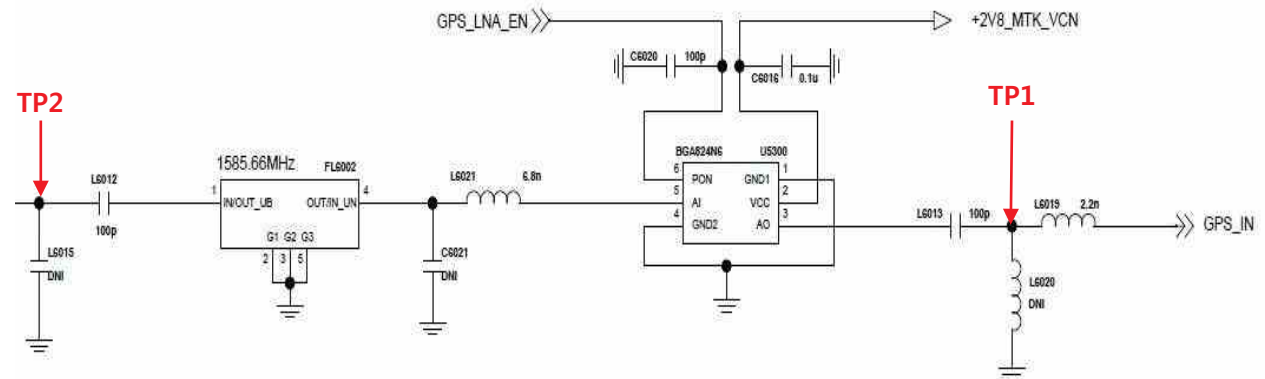


4. BLOCK DIAGRAM

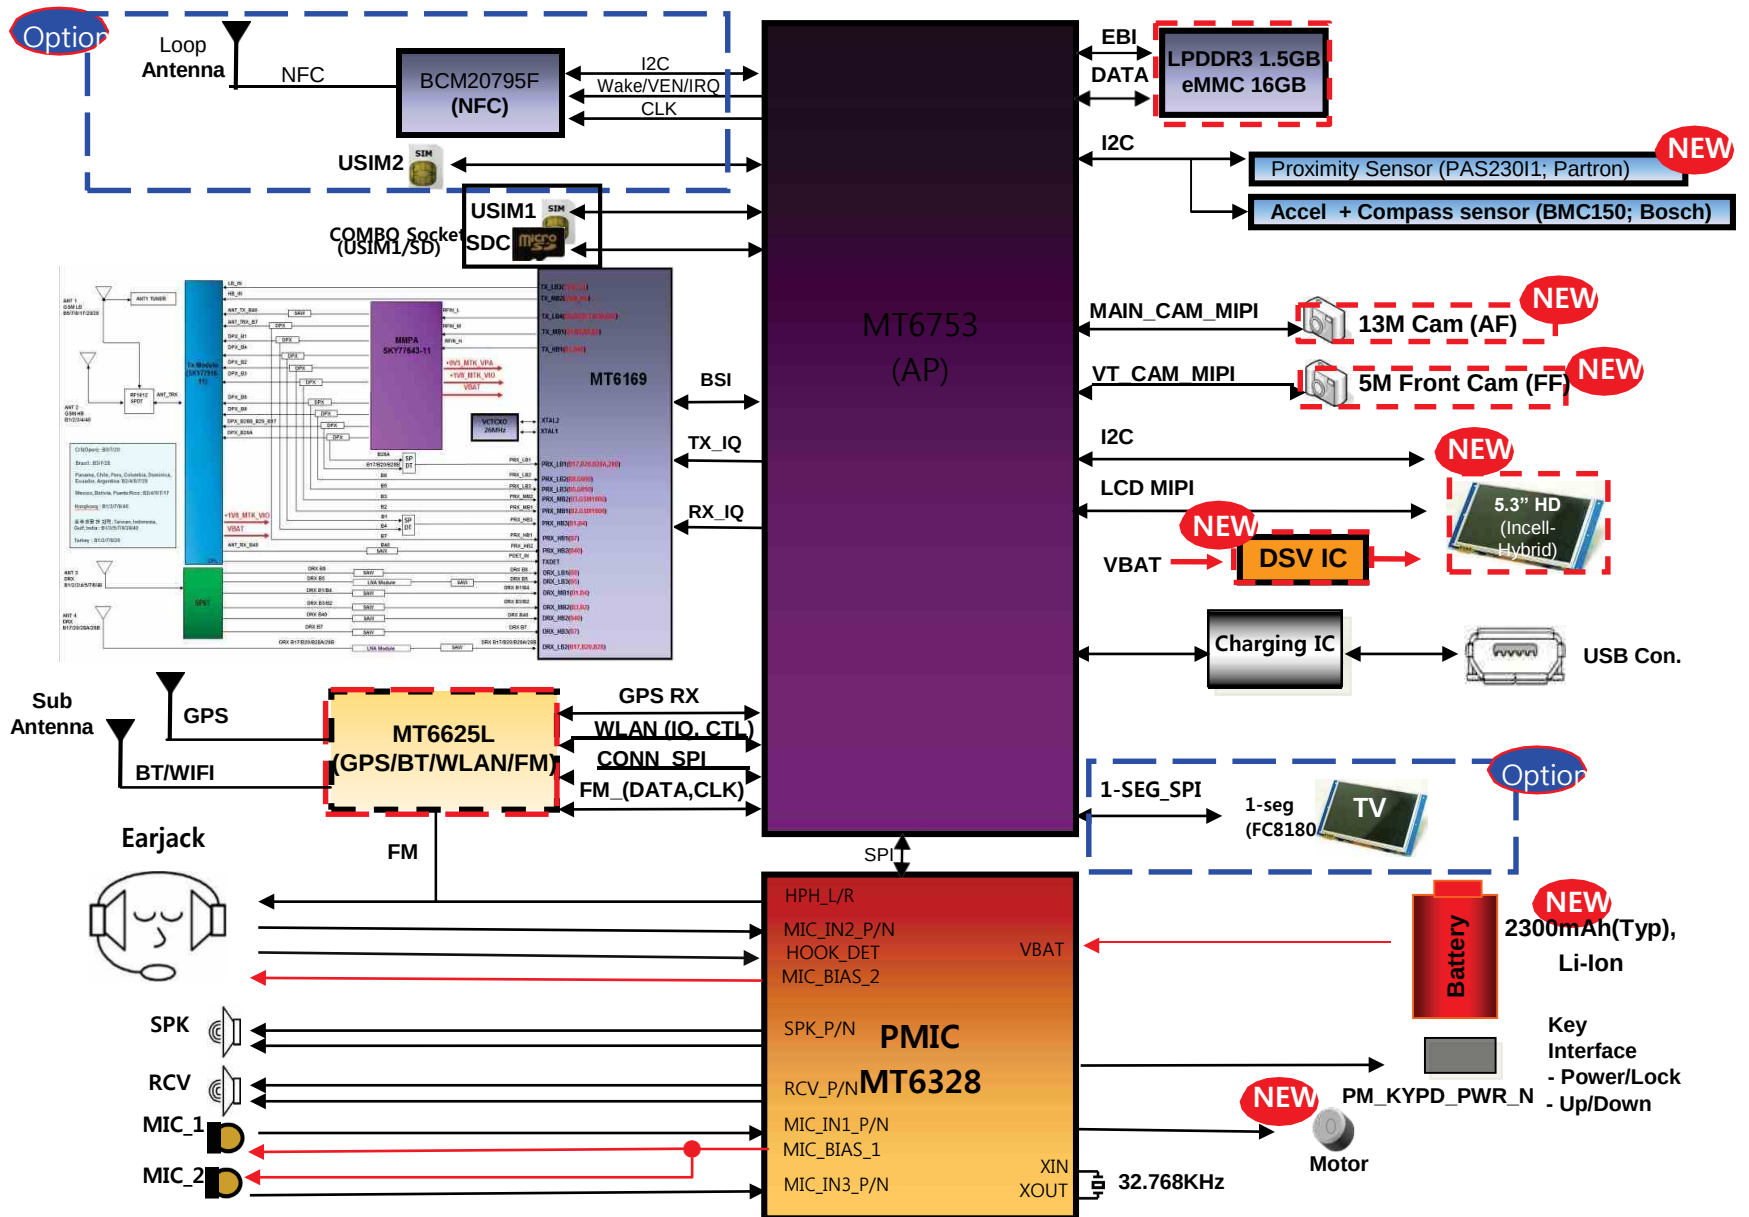


4. BLOCK DIAGRAM

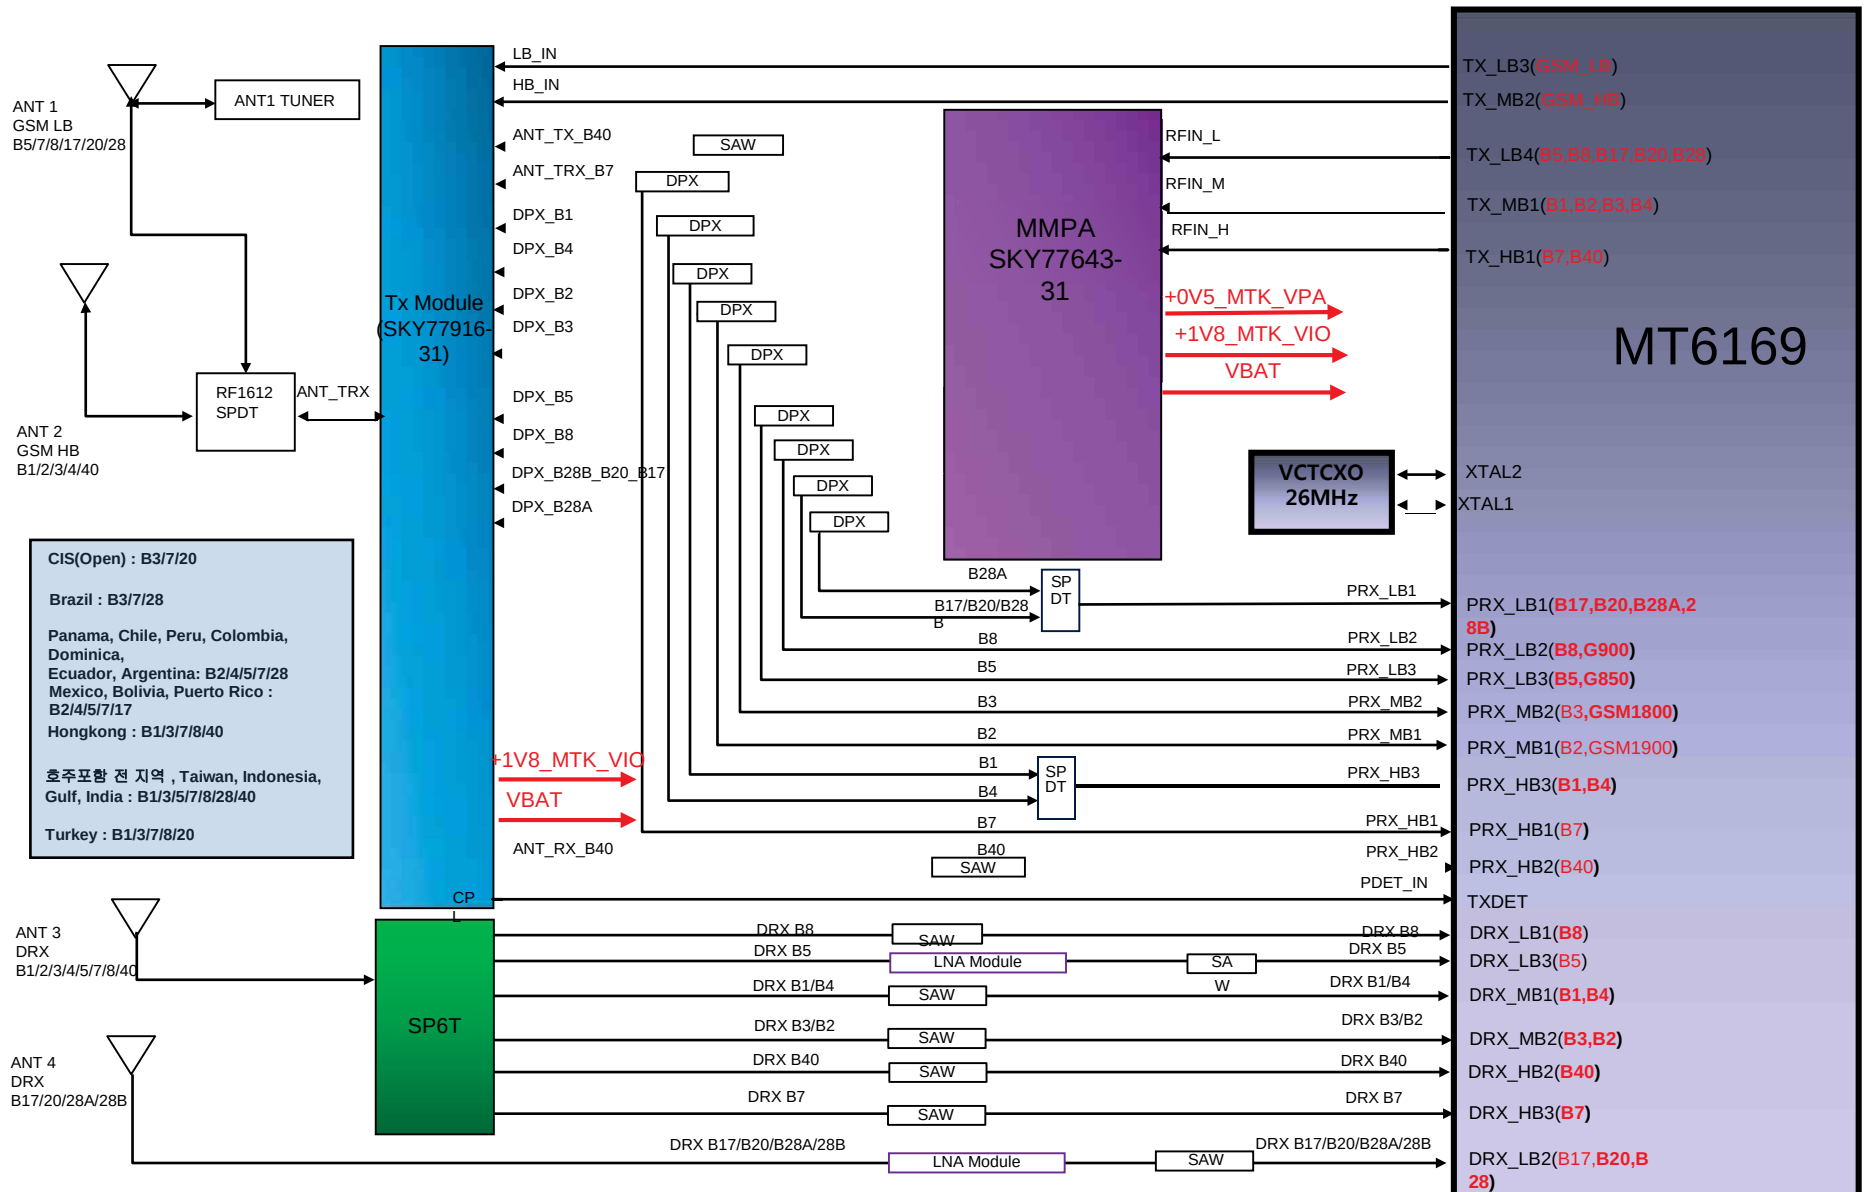


4. BLOCK DIAGRAM

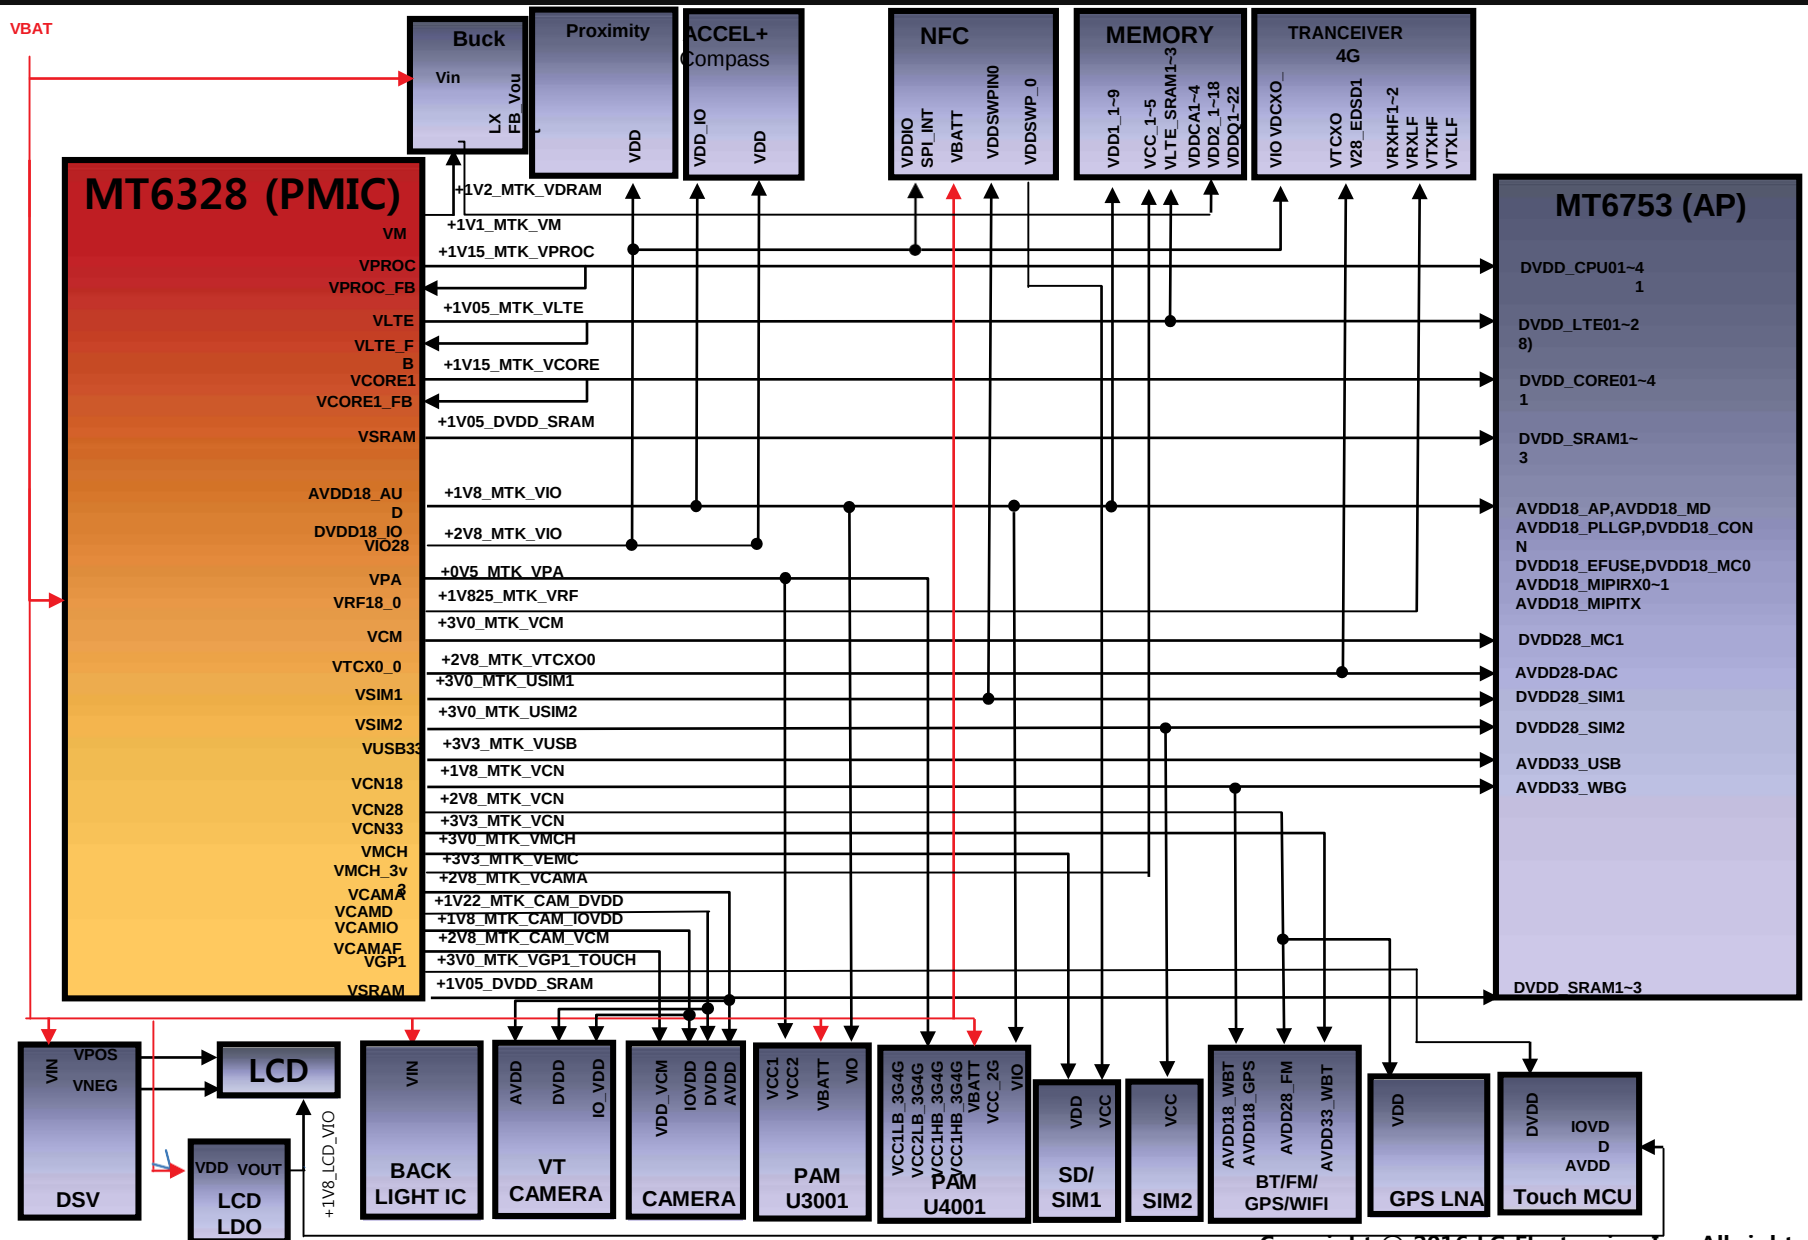


4. BLOCK DIAGRAM

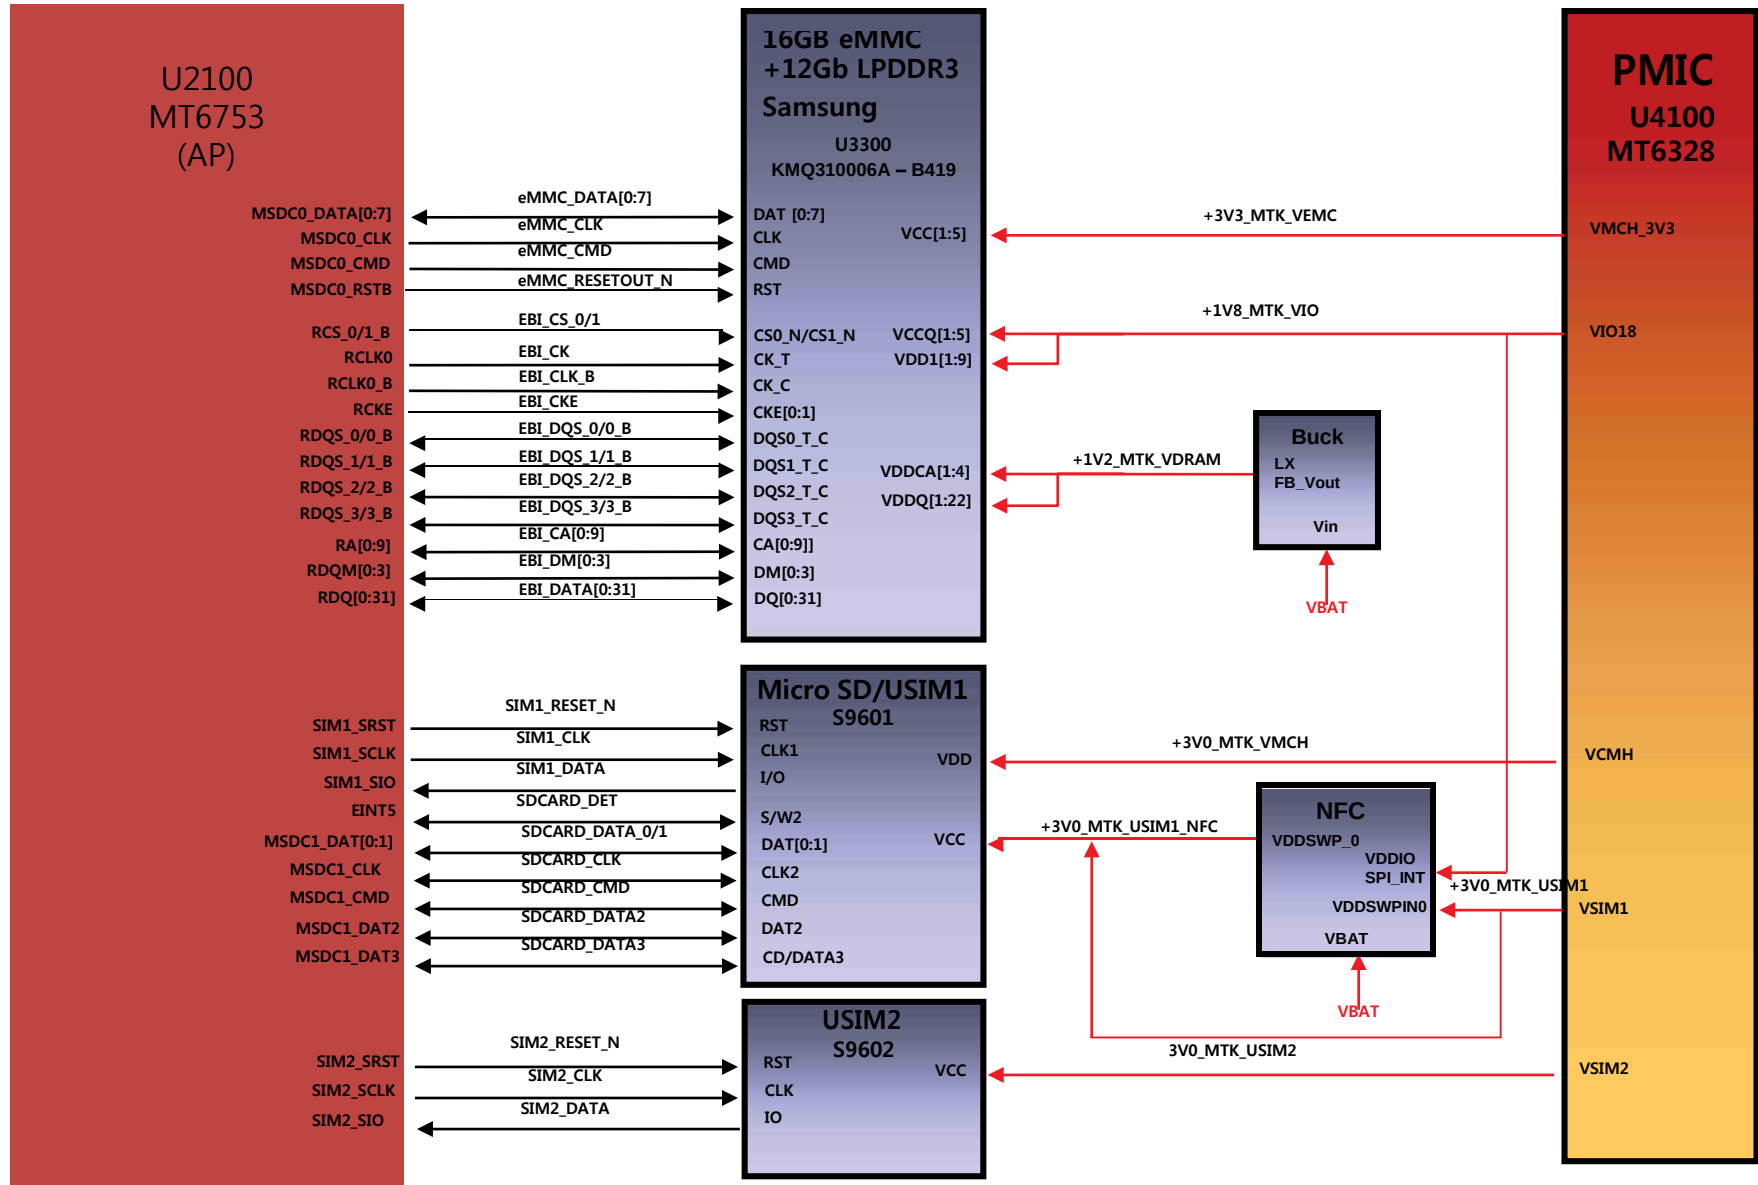


4. BLOCK DIAGRAM

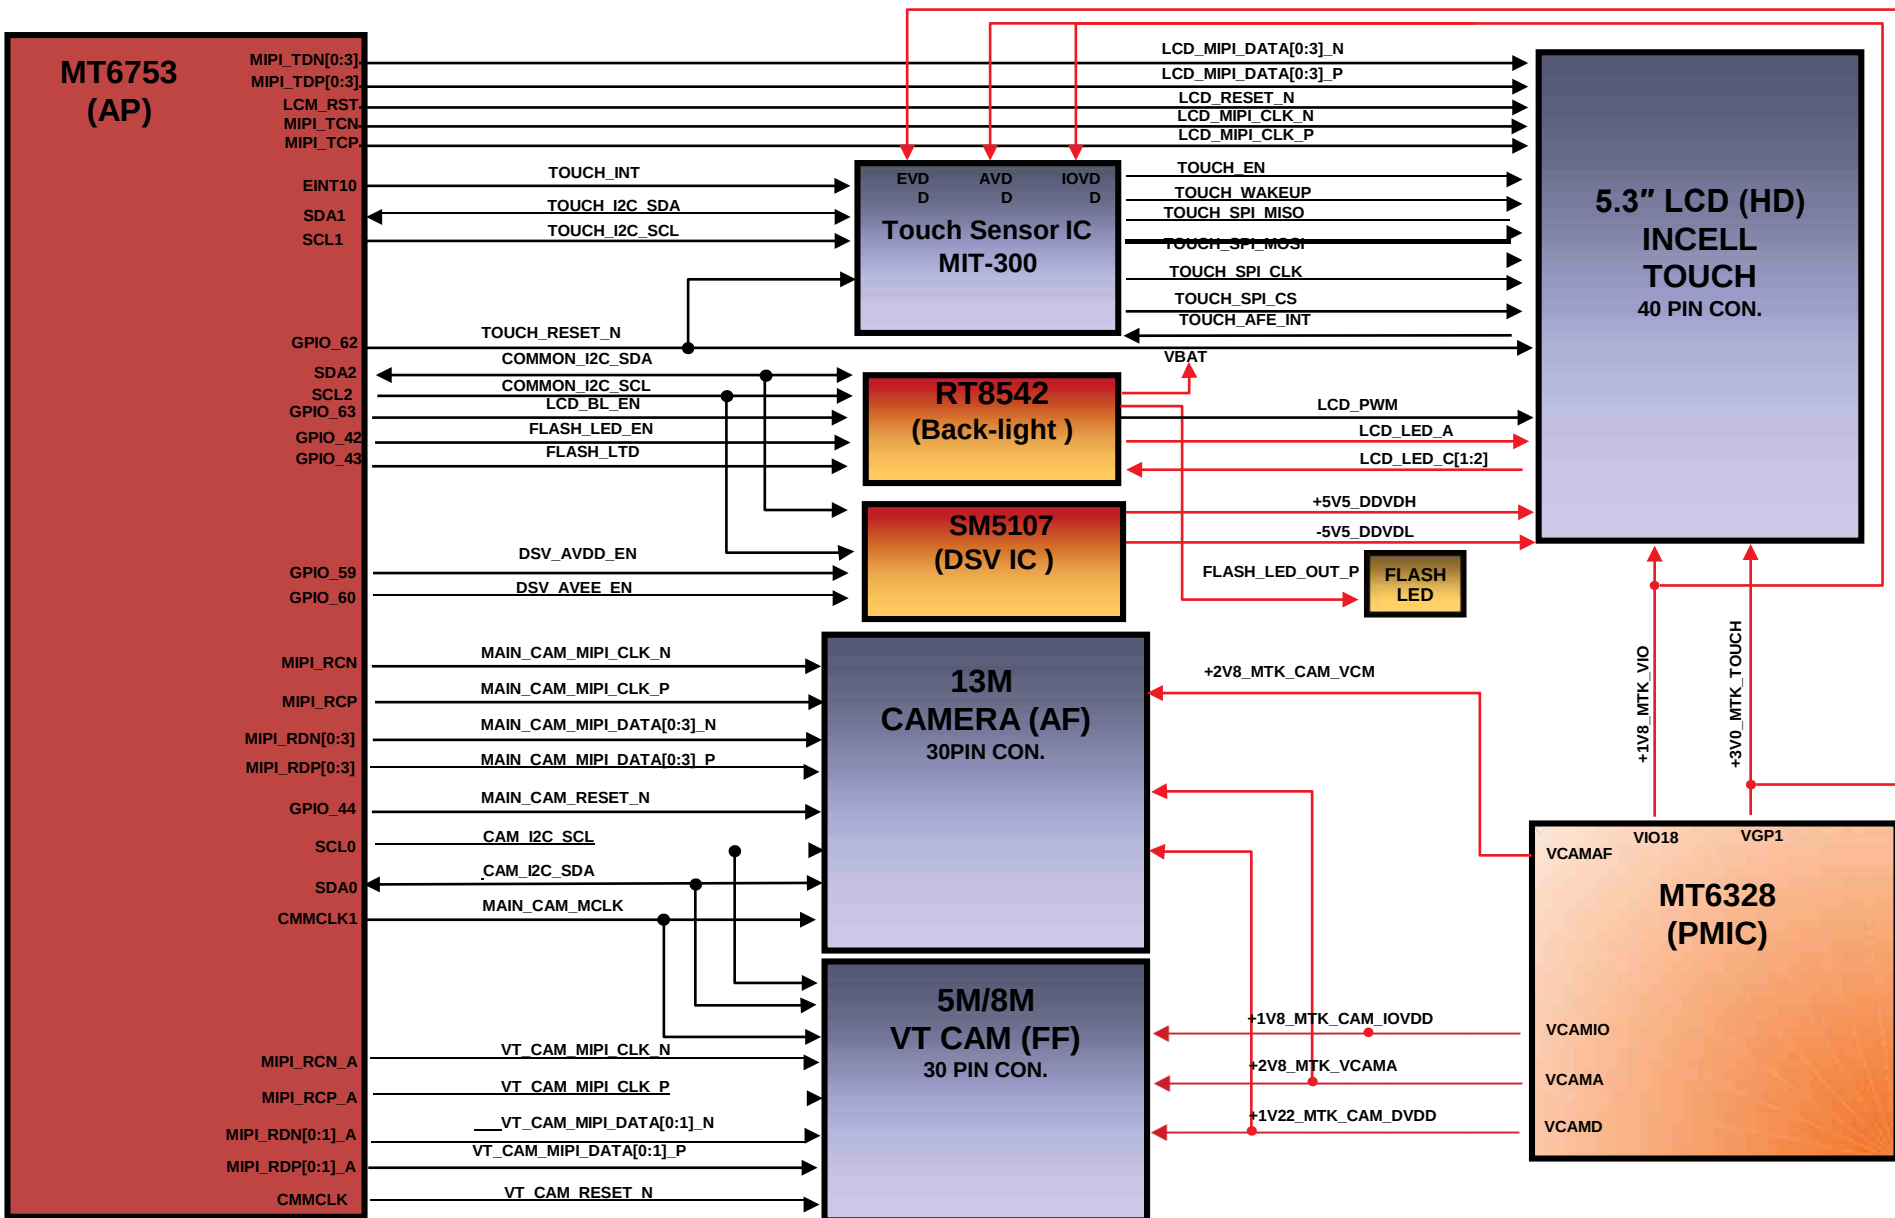


4. BLOCK DIAGRAM

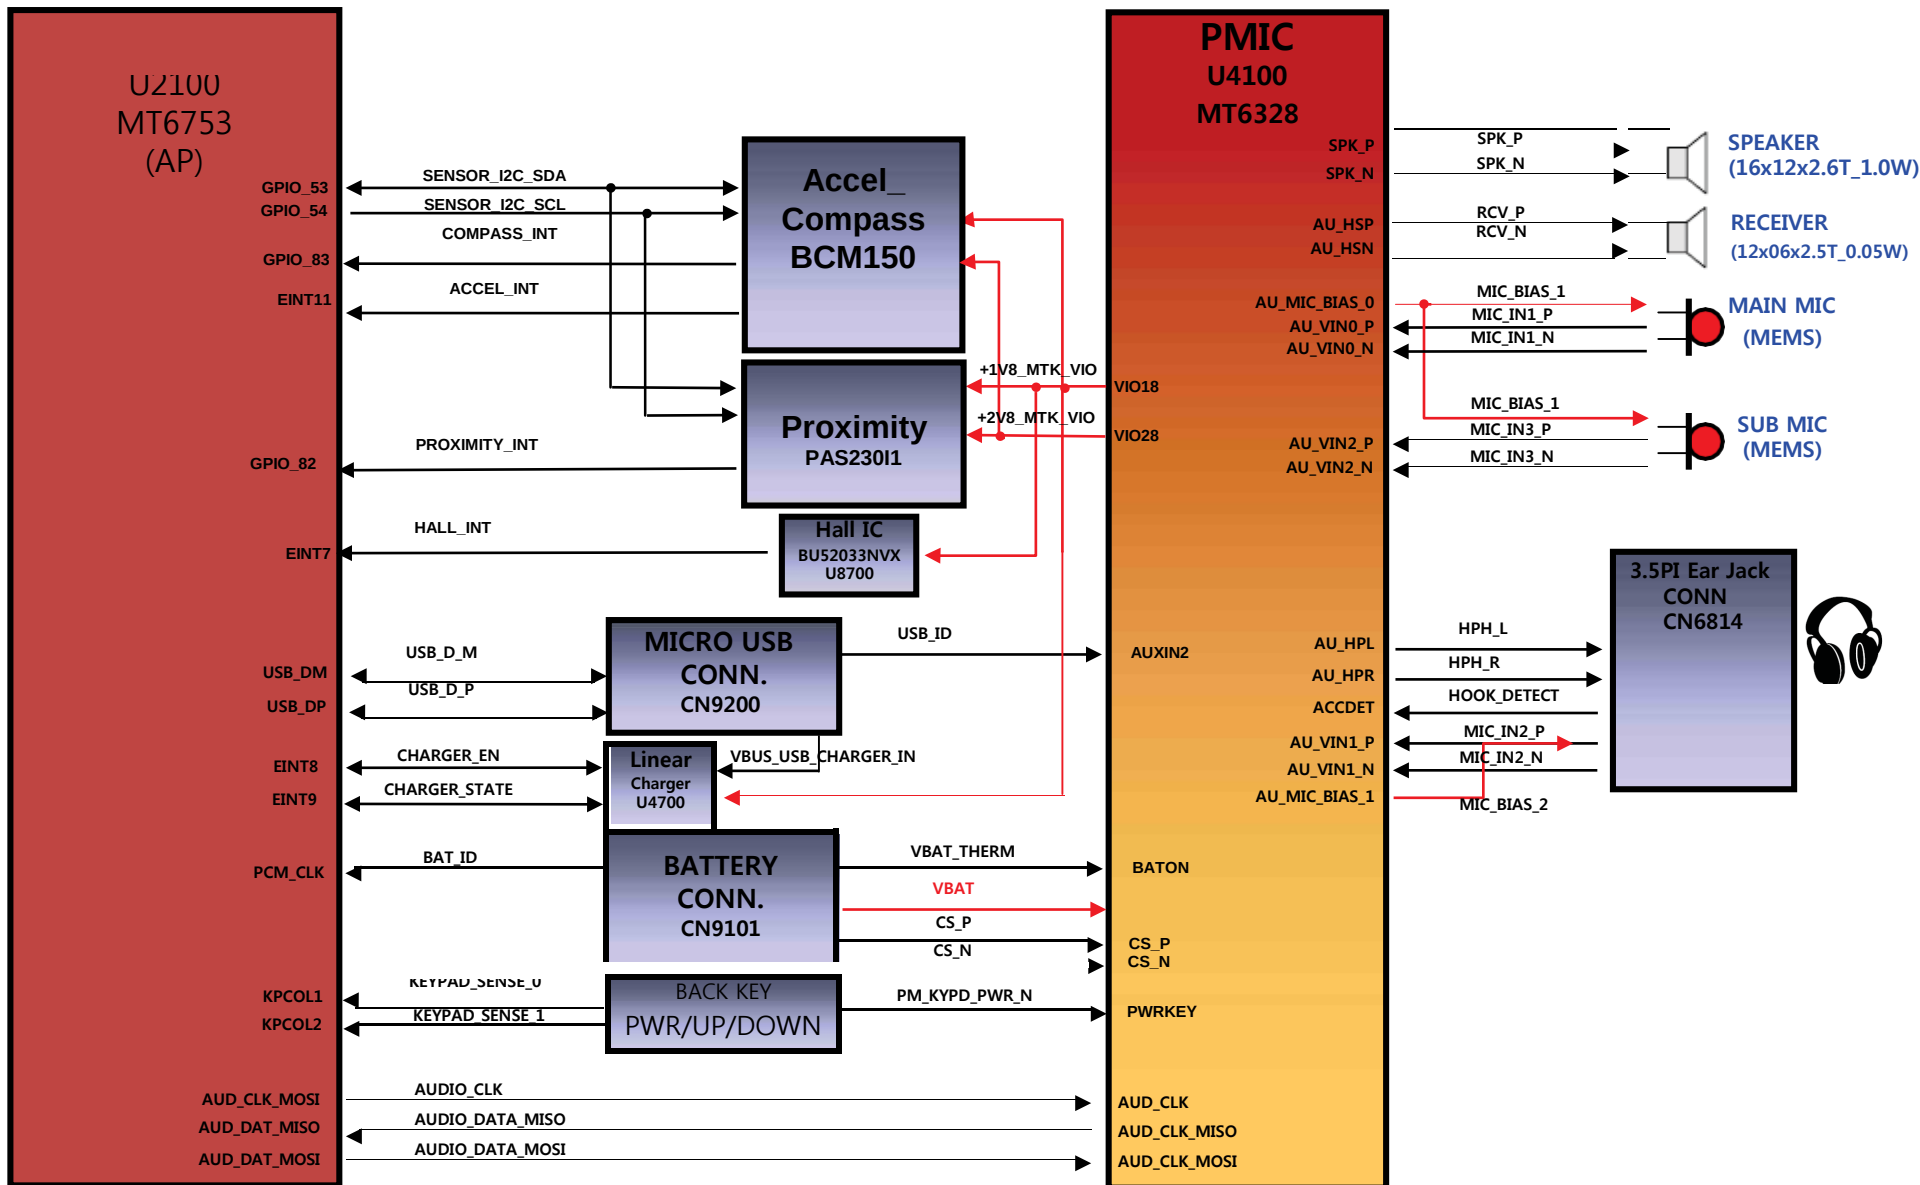

4. BLOCK DIAGRAM

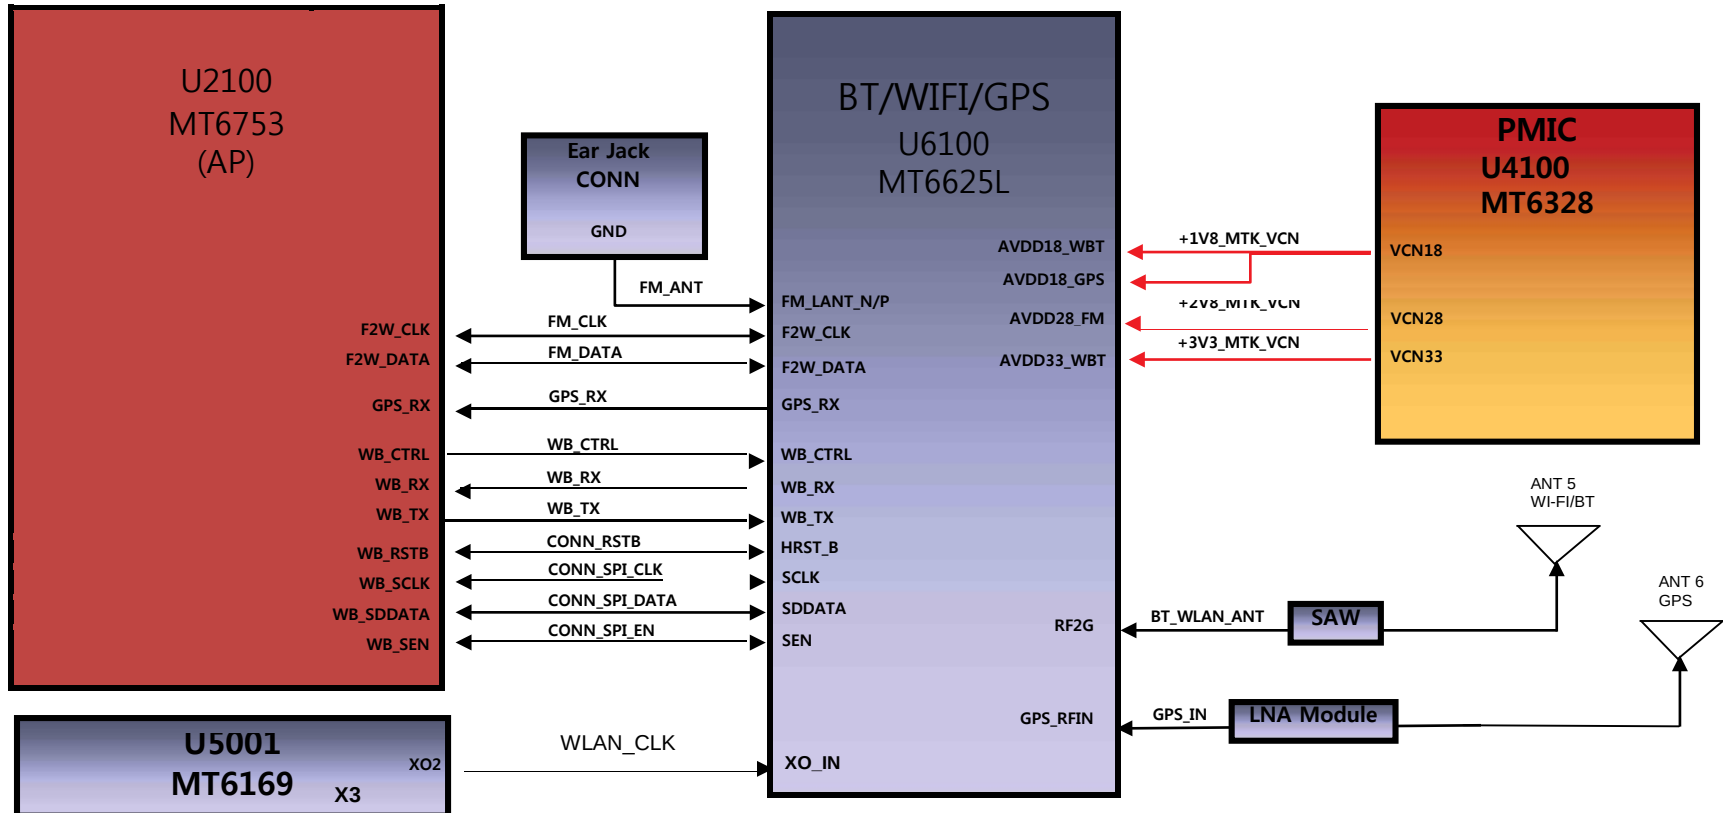


4. BLOCK DIAGRAM

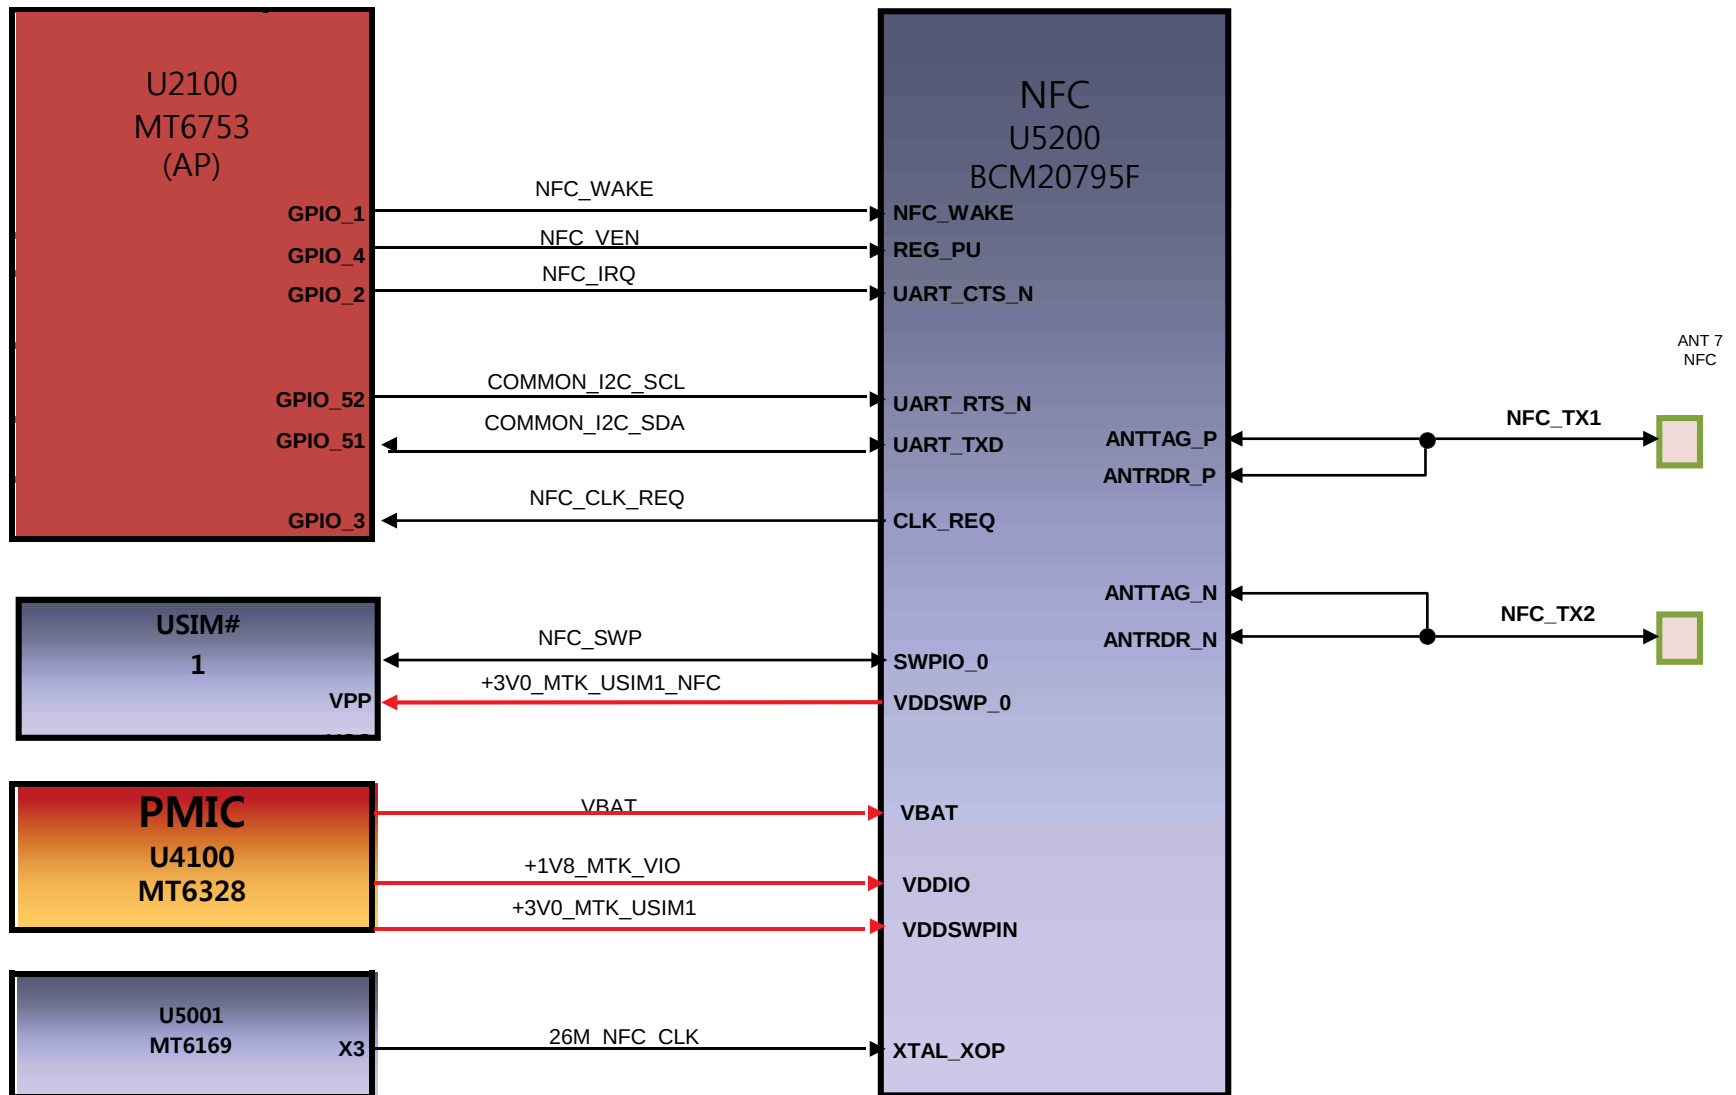




CIRCUIT DIAGRAM

ANT4 (B17/B20/B28 2nd)


ANT2 (G1800/1900, W_B1/B2, LTE_B1/B2/B3/B4/B40)

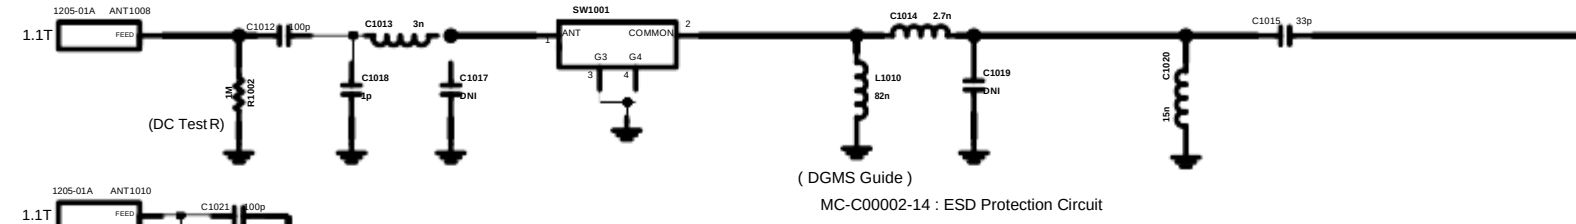

ANT1 (G850/900, W_B5/B8, LTE_B5/B7/B8/B17/B20/B28)

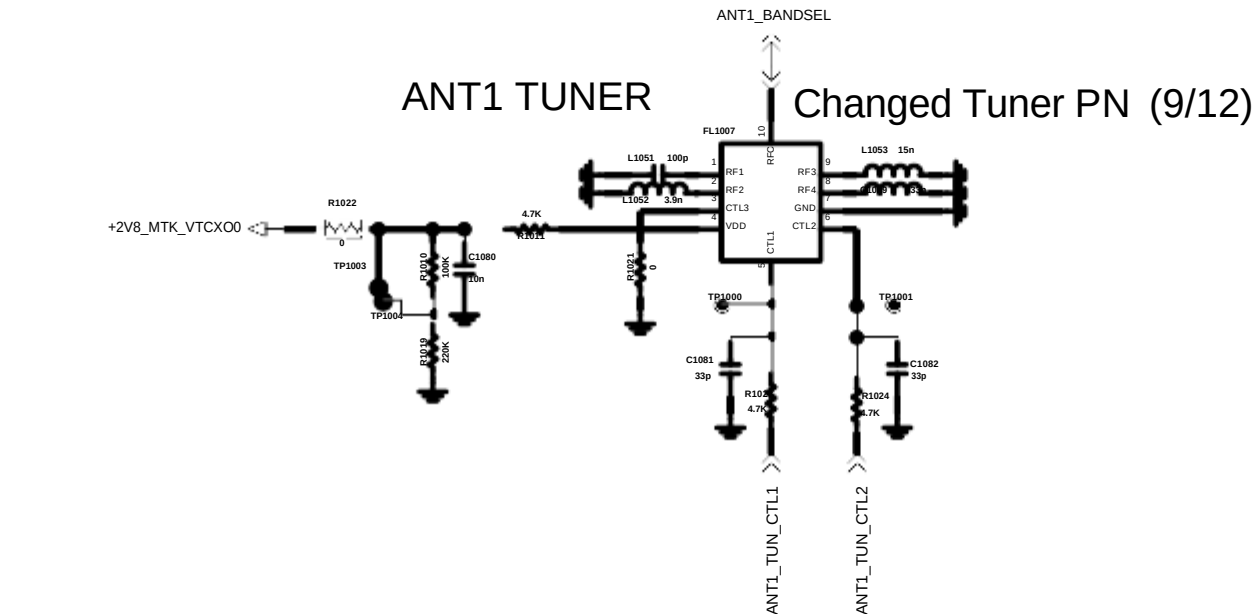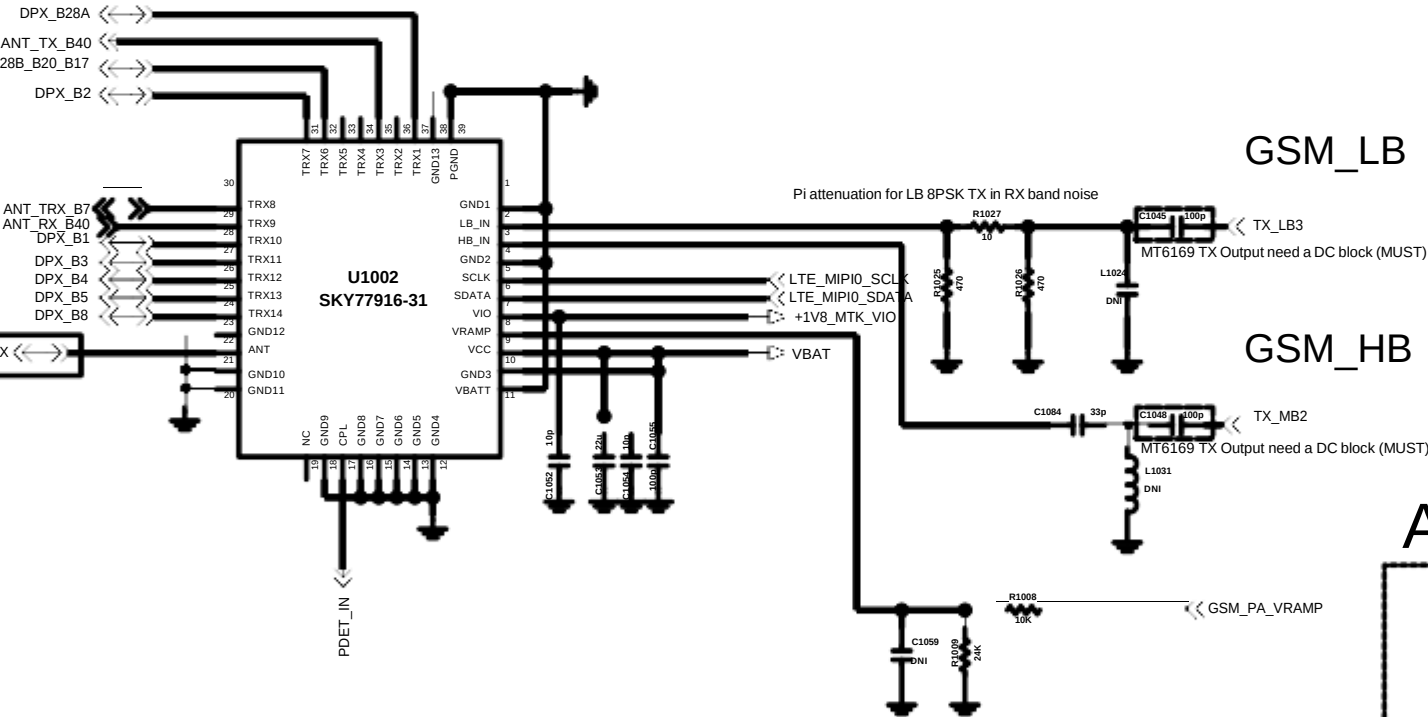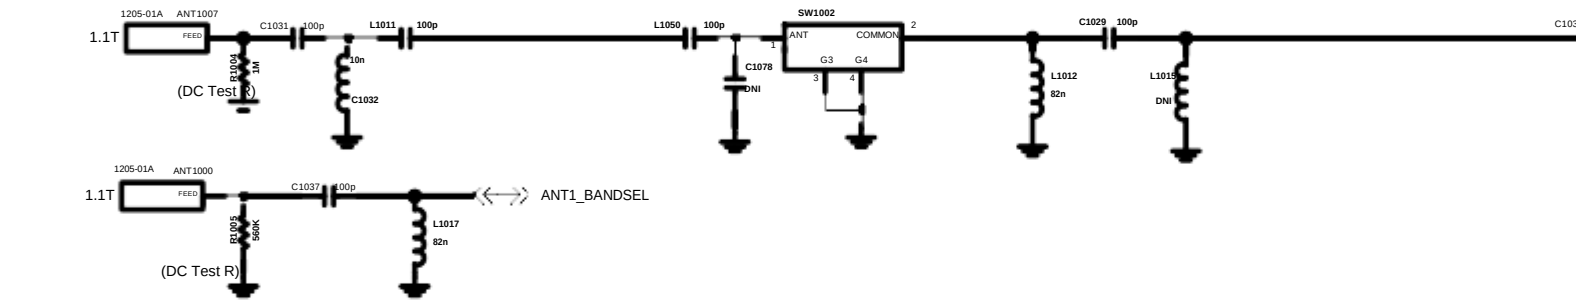


ANT3 (B1/B2/B3/B4/B5/B7/B8/B40 2nd)

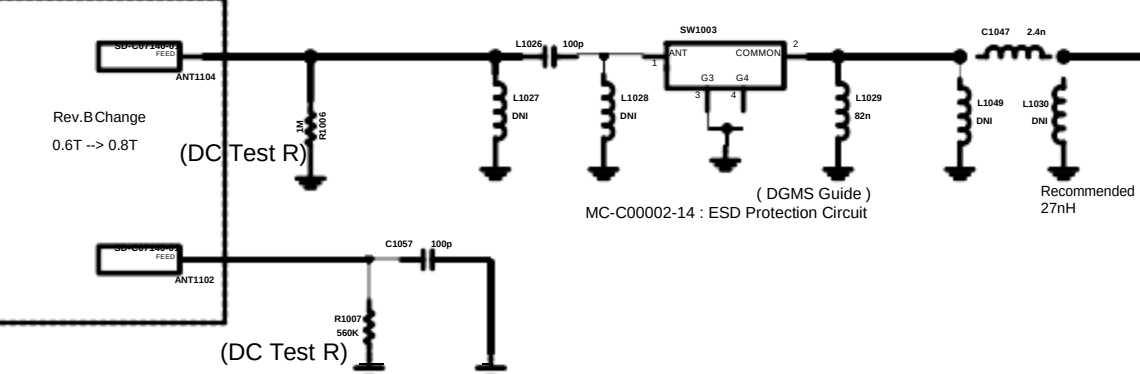


for DC-test


SMT Gasket (10ea)_0625

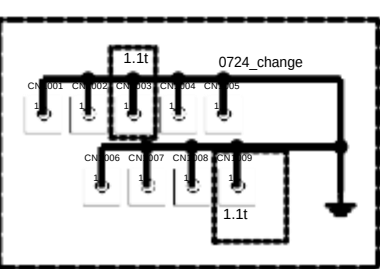


B17/B20/B28 DRX

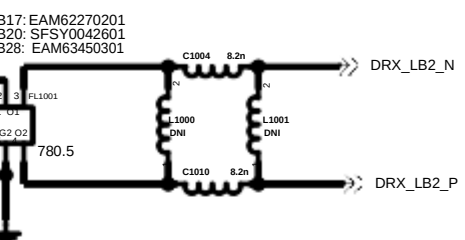

B7 DRX




B2 / B3 DRX




B40 DRX




B5 DRX



B8 DRX



B1/B4 DRX



Schematic1


PDMNUMBER


Rev

User Name

1 1 1


Drawing Date

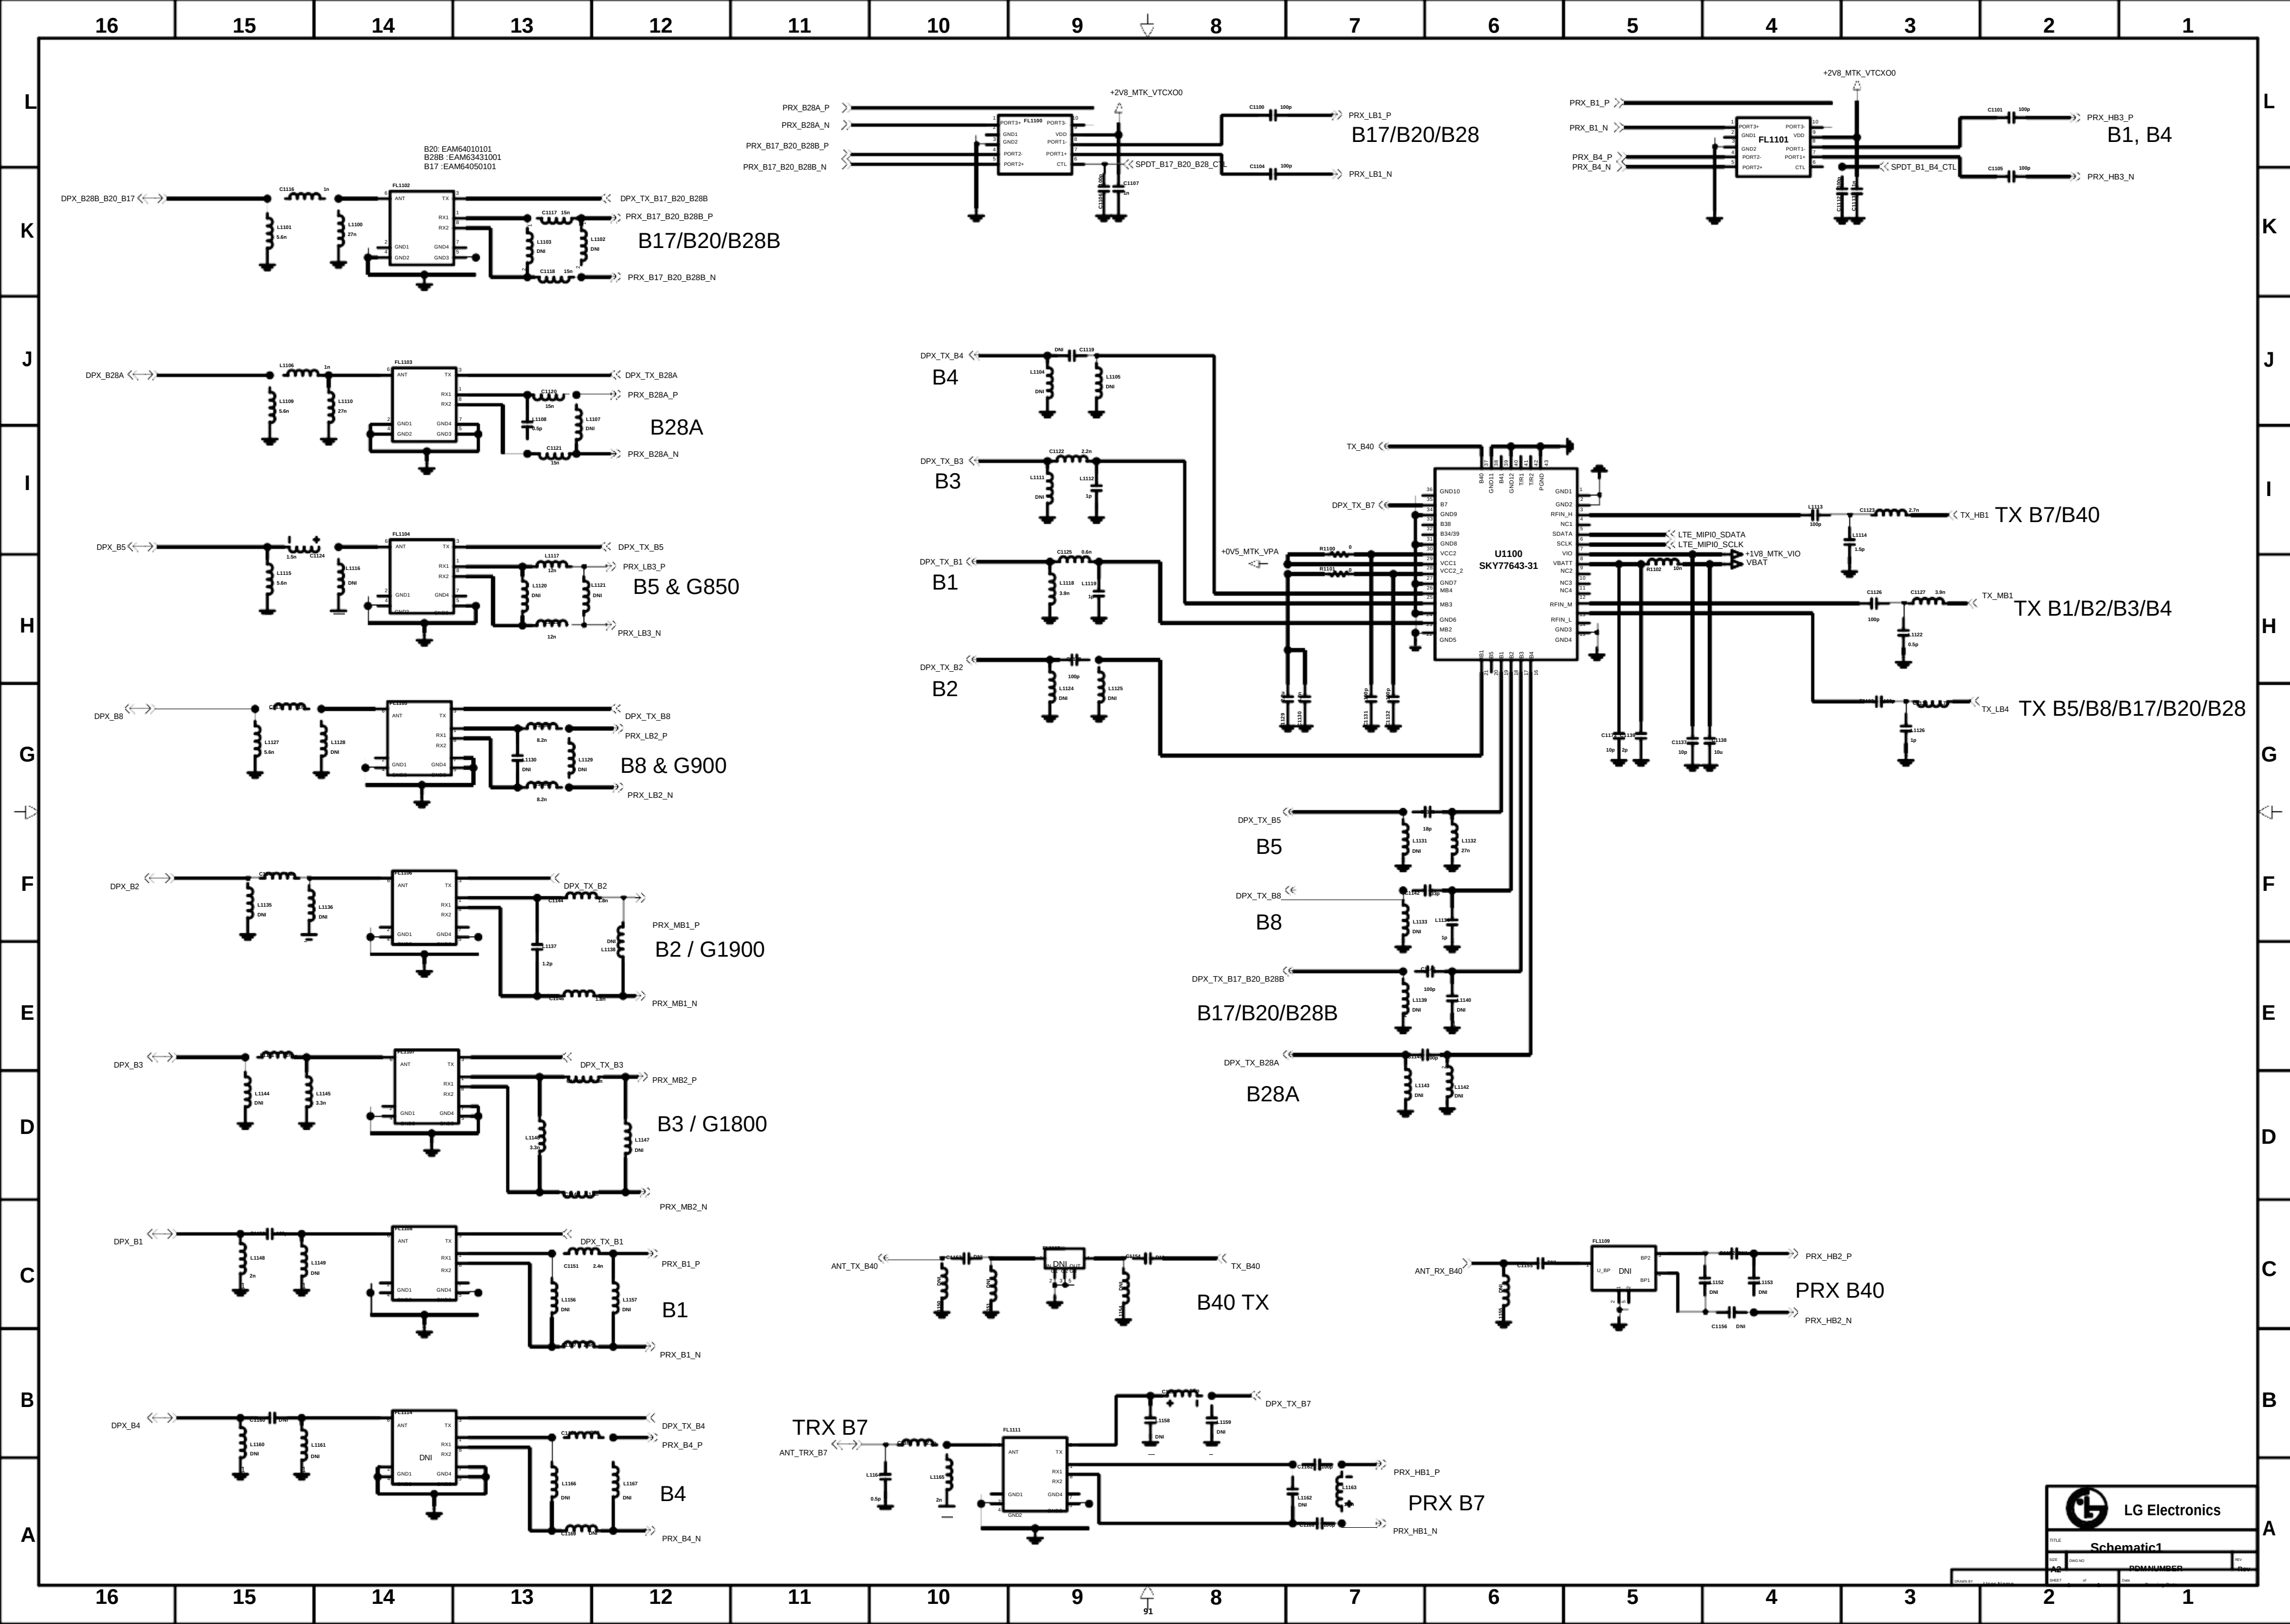

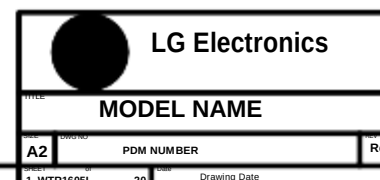

< MT6753_GPIO >




PCB Indicator

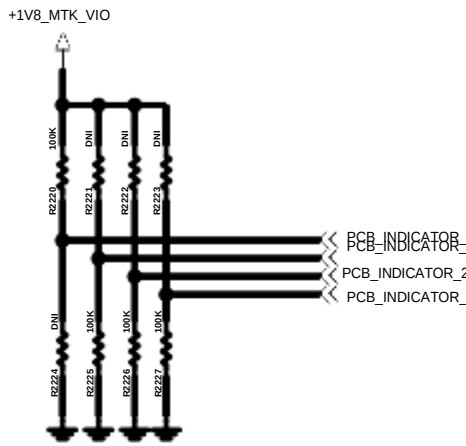


Model	Band	IFC	SIM	GPIO_102	GPIO_101	GPIO_100	GPIO_99	SUM
K430ds	3/7/20	X	Dual	L	L	L	L	0
<-----MMPA REV-B----->				L	H	H	L	6
K430TV	3/7/28	X	Dual	L	H	L	H	5
<-----MMPA REV-B----->				L	H	H	H	7
K430dsF	3/7/28	X	Dual	L	L	L	H	1
K430dsA	3/7/28	X	Dual	L	L	H	H	3
K430T	2/4/5/7/28	X	SINGLE	H	H	H	H	15
K430AR	4/28	X	SINGLE	H	L	L	H	9
K430H	2/4/5/7/17	X	SINGLE	H	L	H	H	11
K430n	1/3/7/8/40	O	SINGLE	H	H	H	L	14
K430Y	1/3/5/7/8	X	SINGLE	H	L	H	L	10
K430dsY	1/3/5/7/8/28/40	X	Dual	L	L	L	L	2
K430TR	1/3/7/8/20	X	SINGLE	H	L	L	L	8

Indicator_3 : Dual SIM/Single SIM
Indicator_2 : 1Seg/NFC/etc
Indicator_1 : Band(3G_B4)/40(TDD)/Memory(1G/8G
Indicator_0 : A08^a
Indicator_2&1 : MMPA REVISION ±, °D

Model Indicator

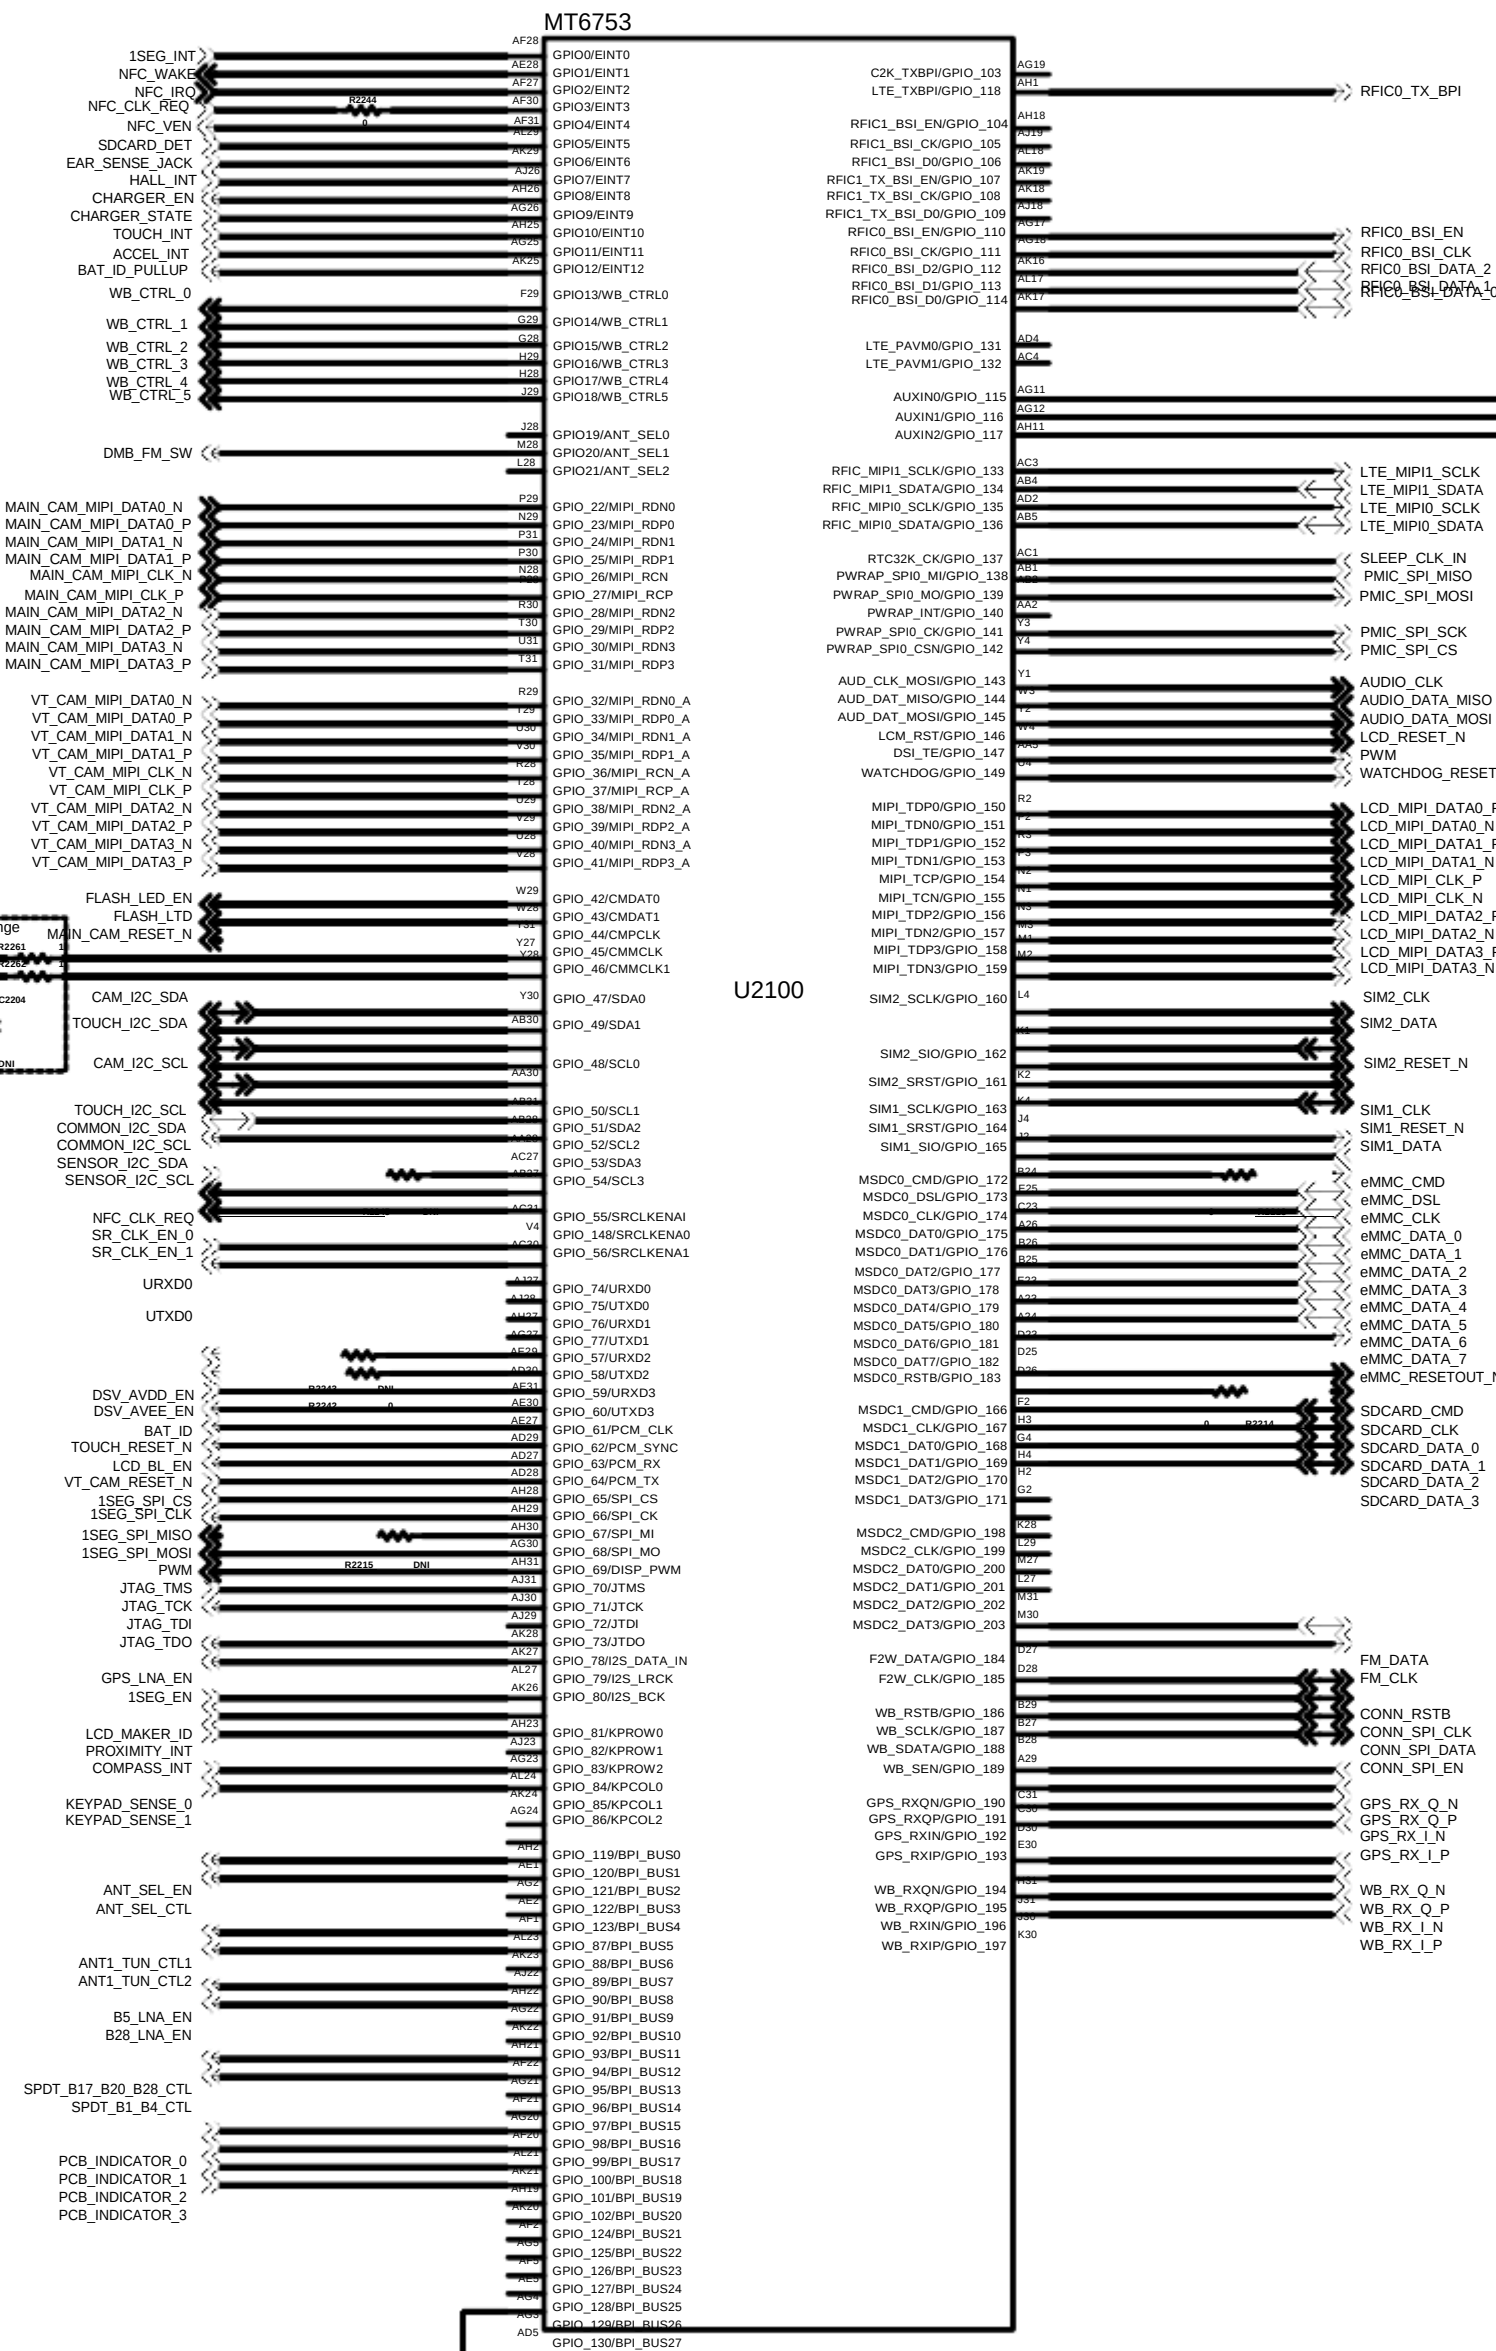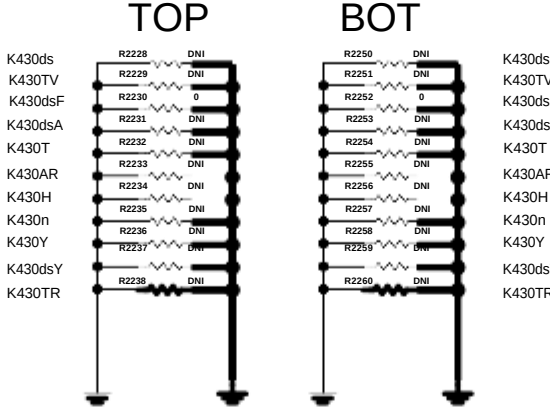


LOW : Externl VLTE_SRAM Buck disab

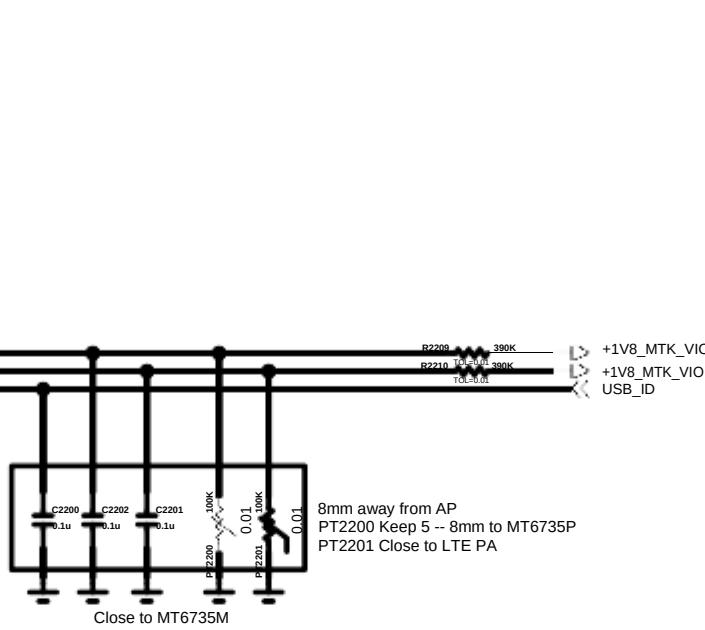

I2C Pull-U

I2C 0 : Main CAM, VT CA



I2C 1 : Touch




I2C 2 : sub 1




I2C 3: Proximity, Acceleration




< 9-3-1 JTAG > Rev 0.4

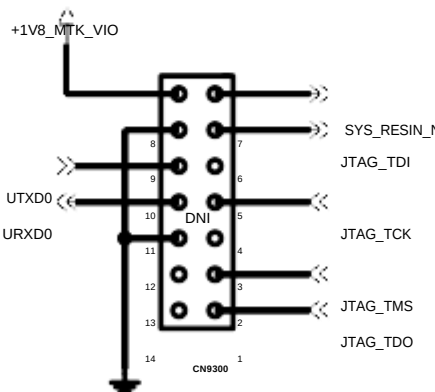

<MT6753_POWER >

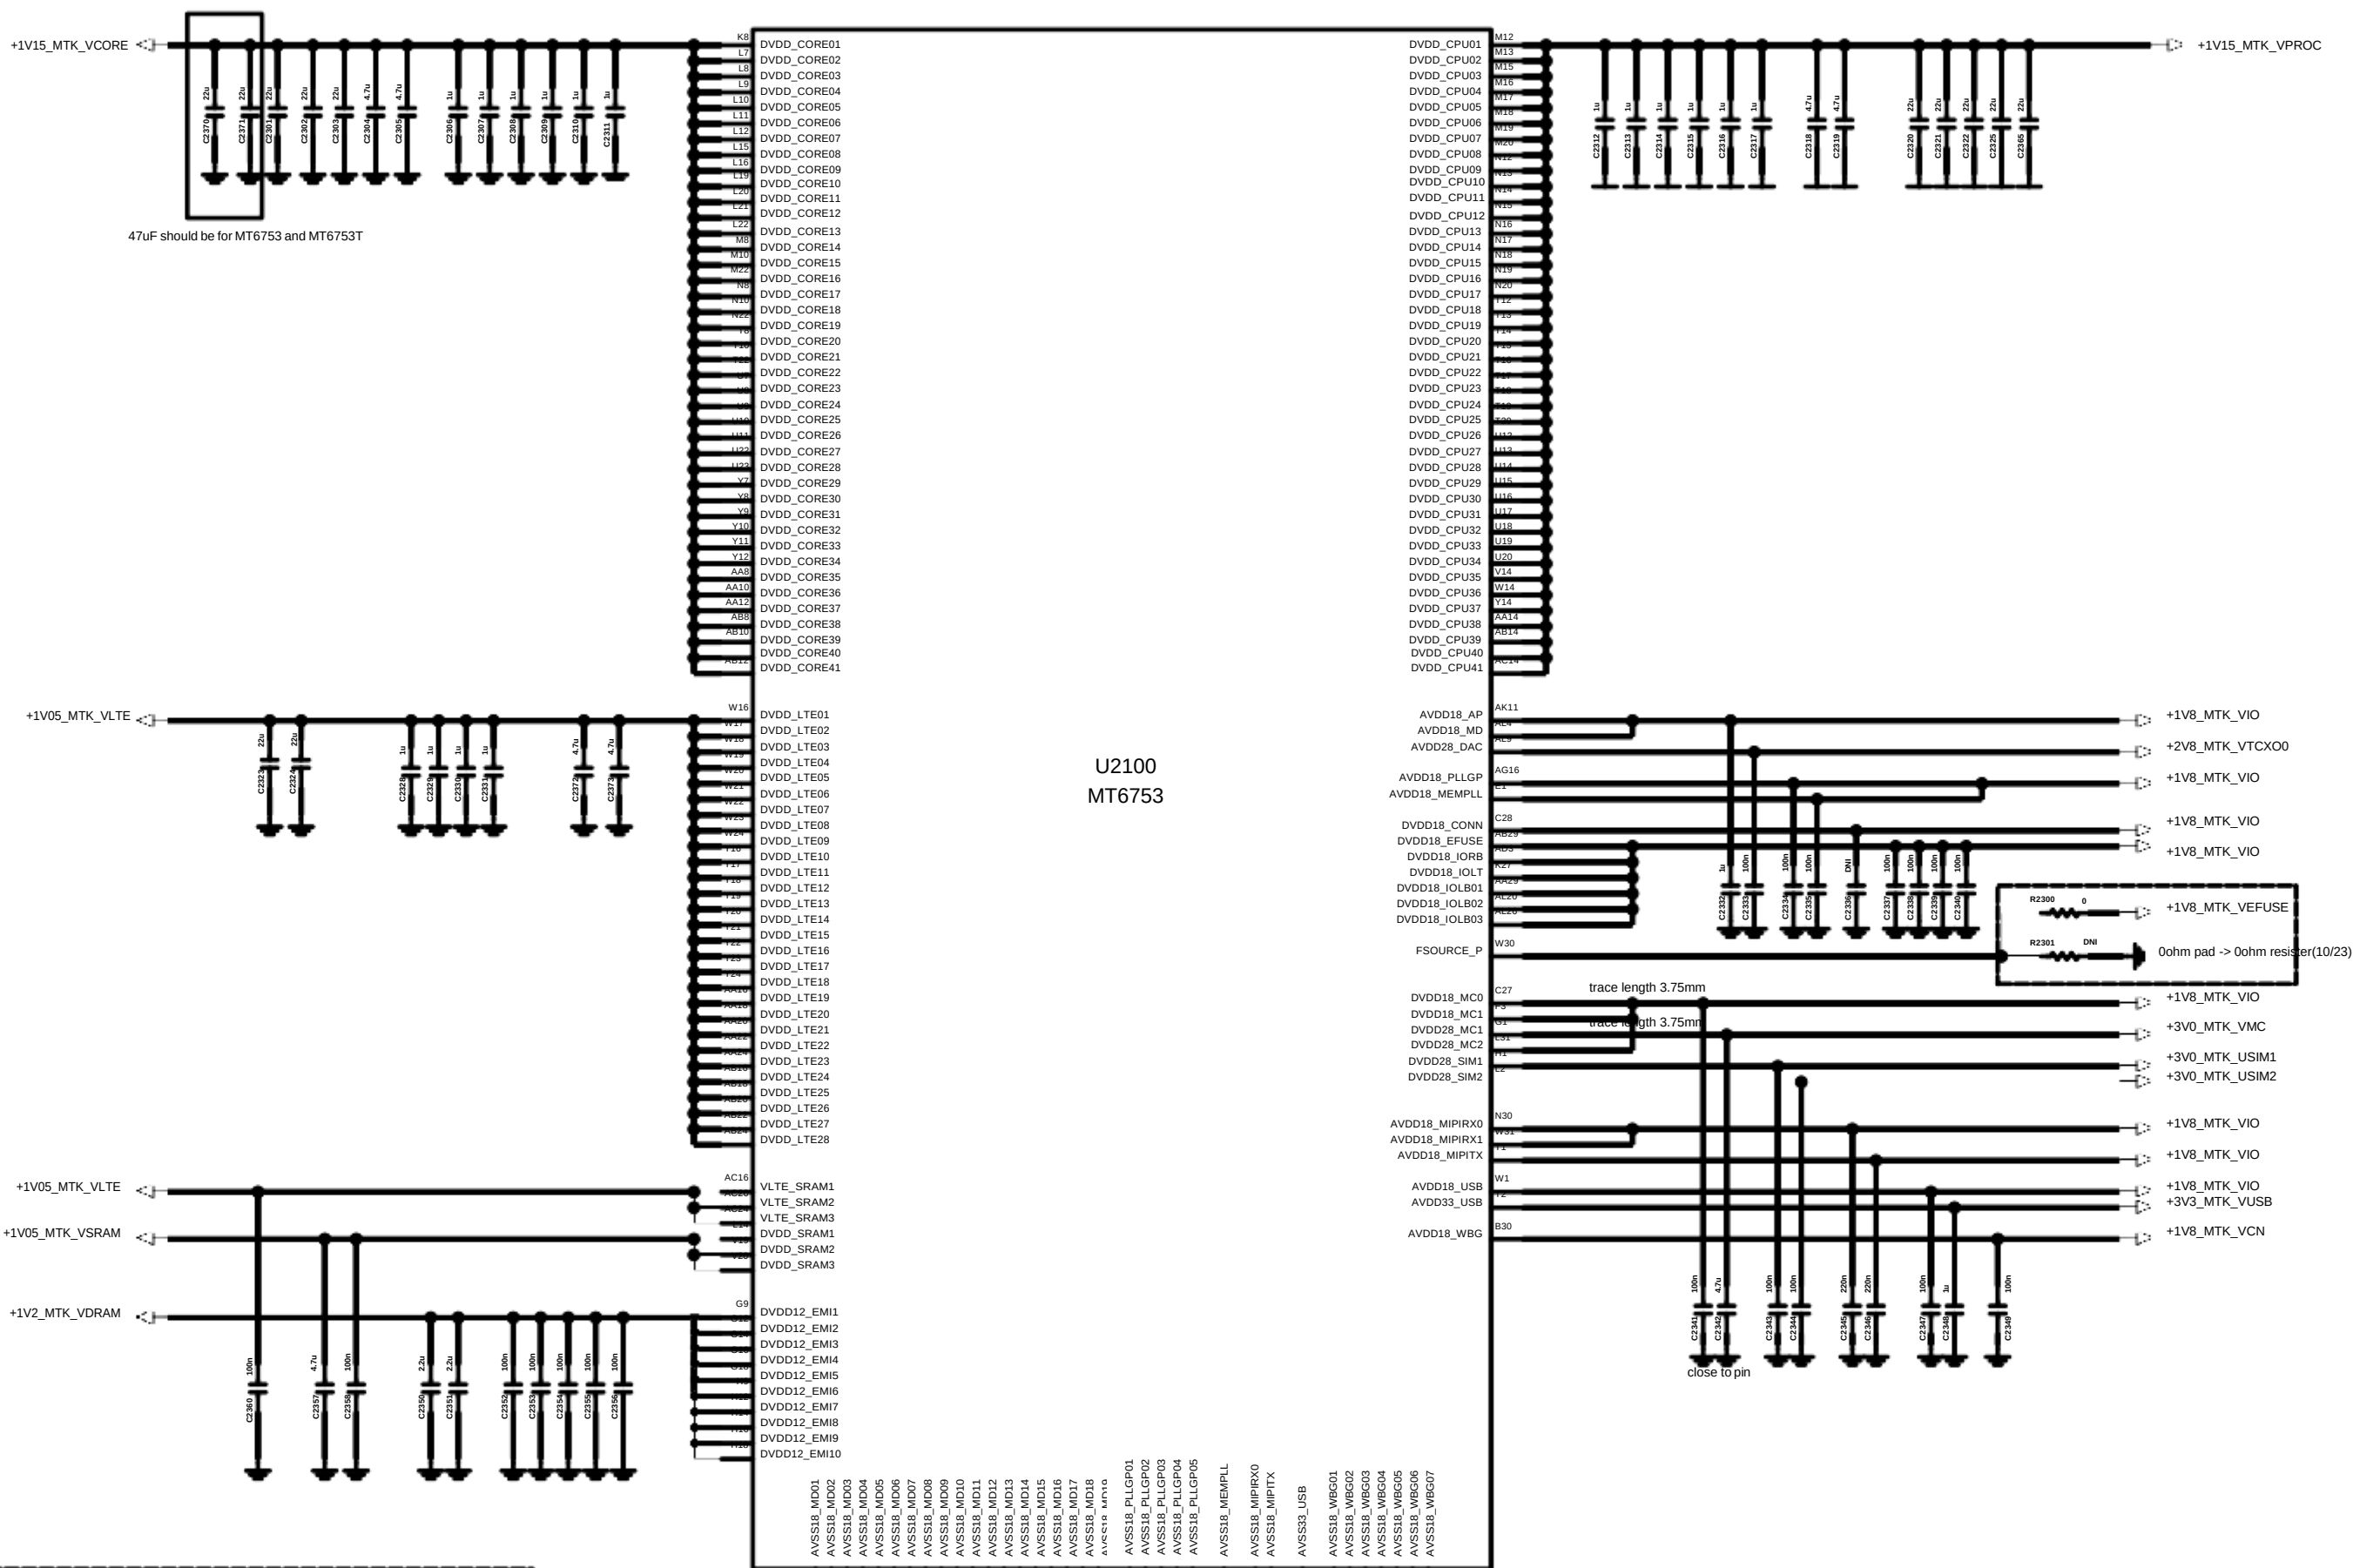

External Buck convertor for VM

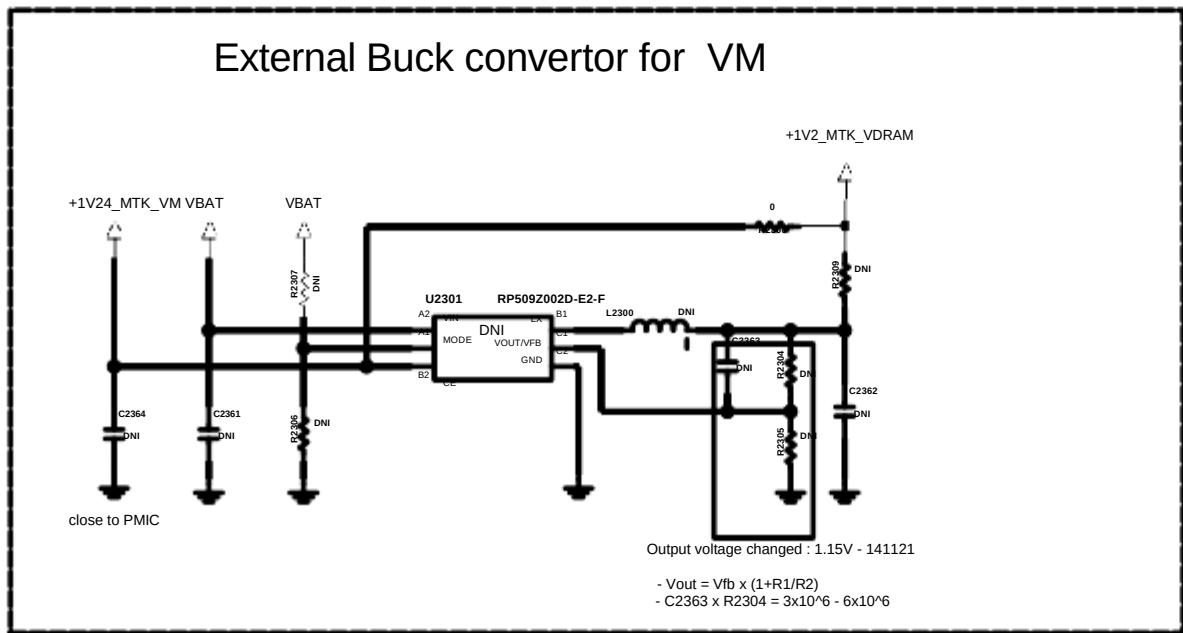

MODEL NAME

A2


PDMNUMBER

Rev


2-1-1 MSM8974 DATA

Drawing Date

User Name

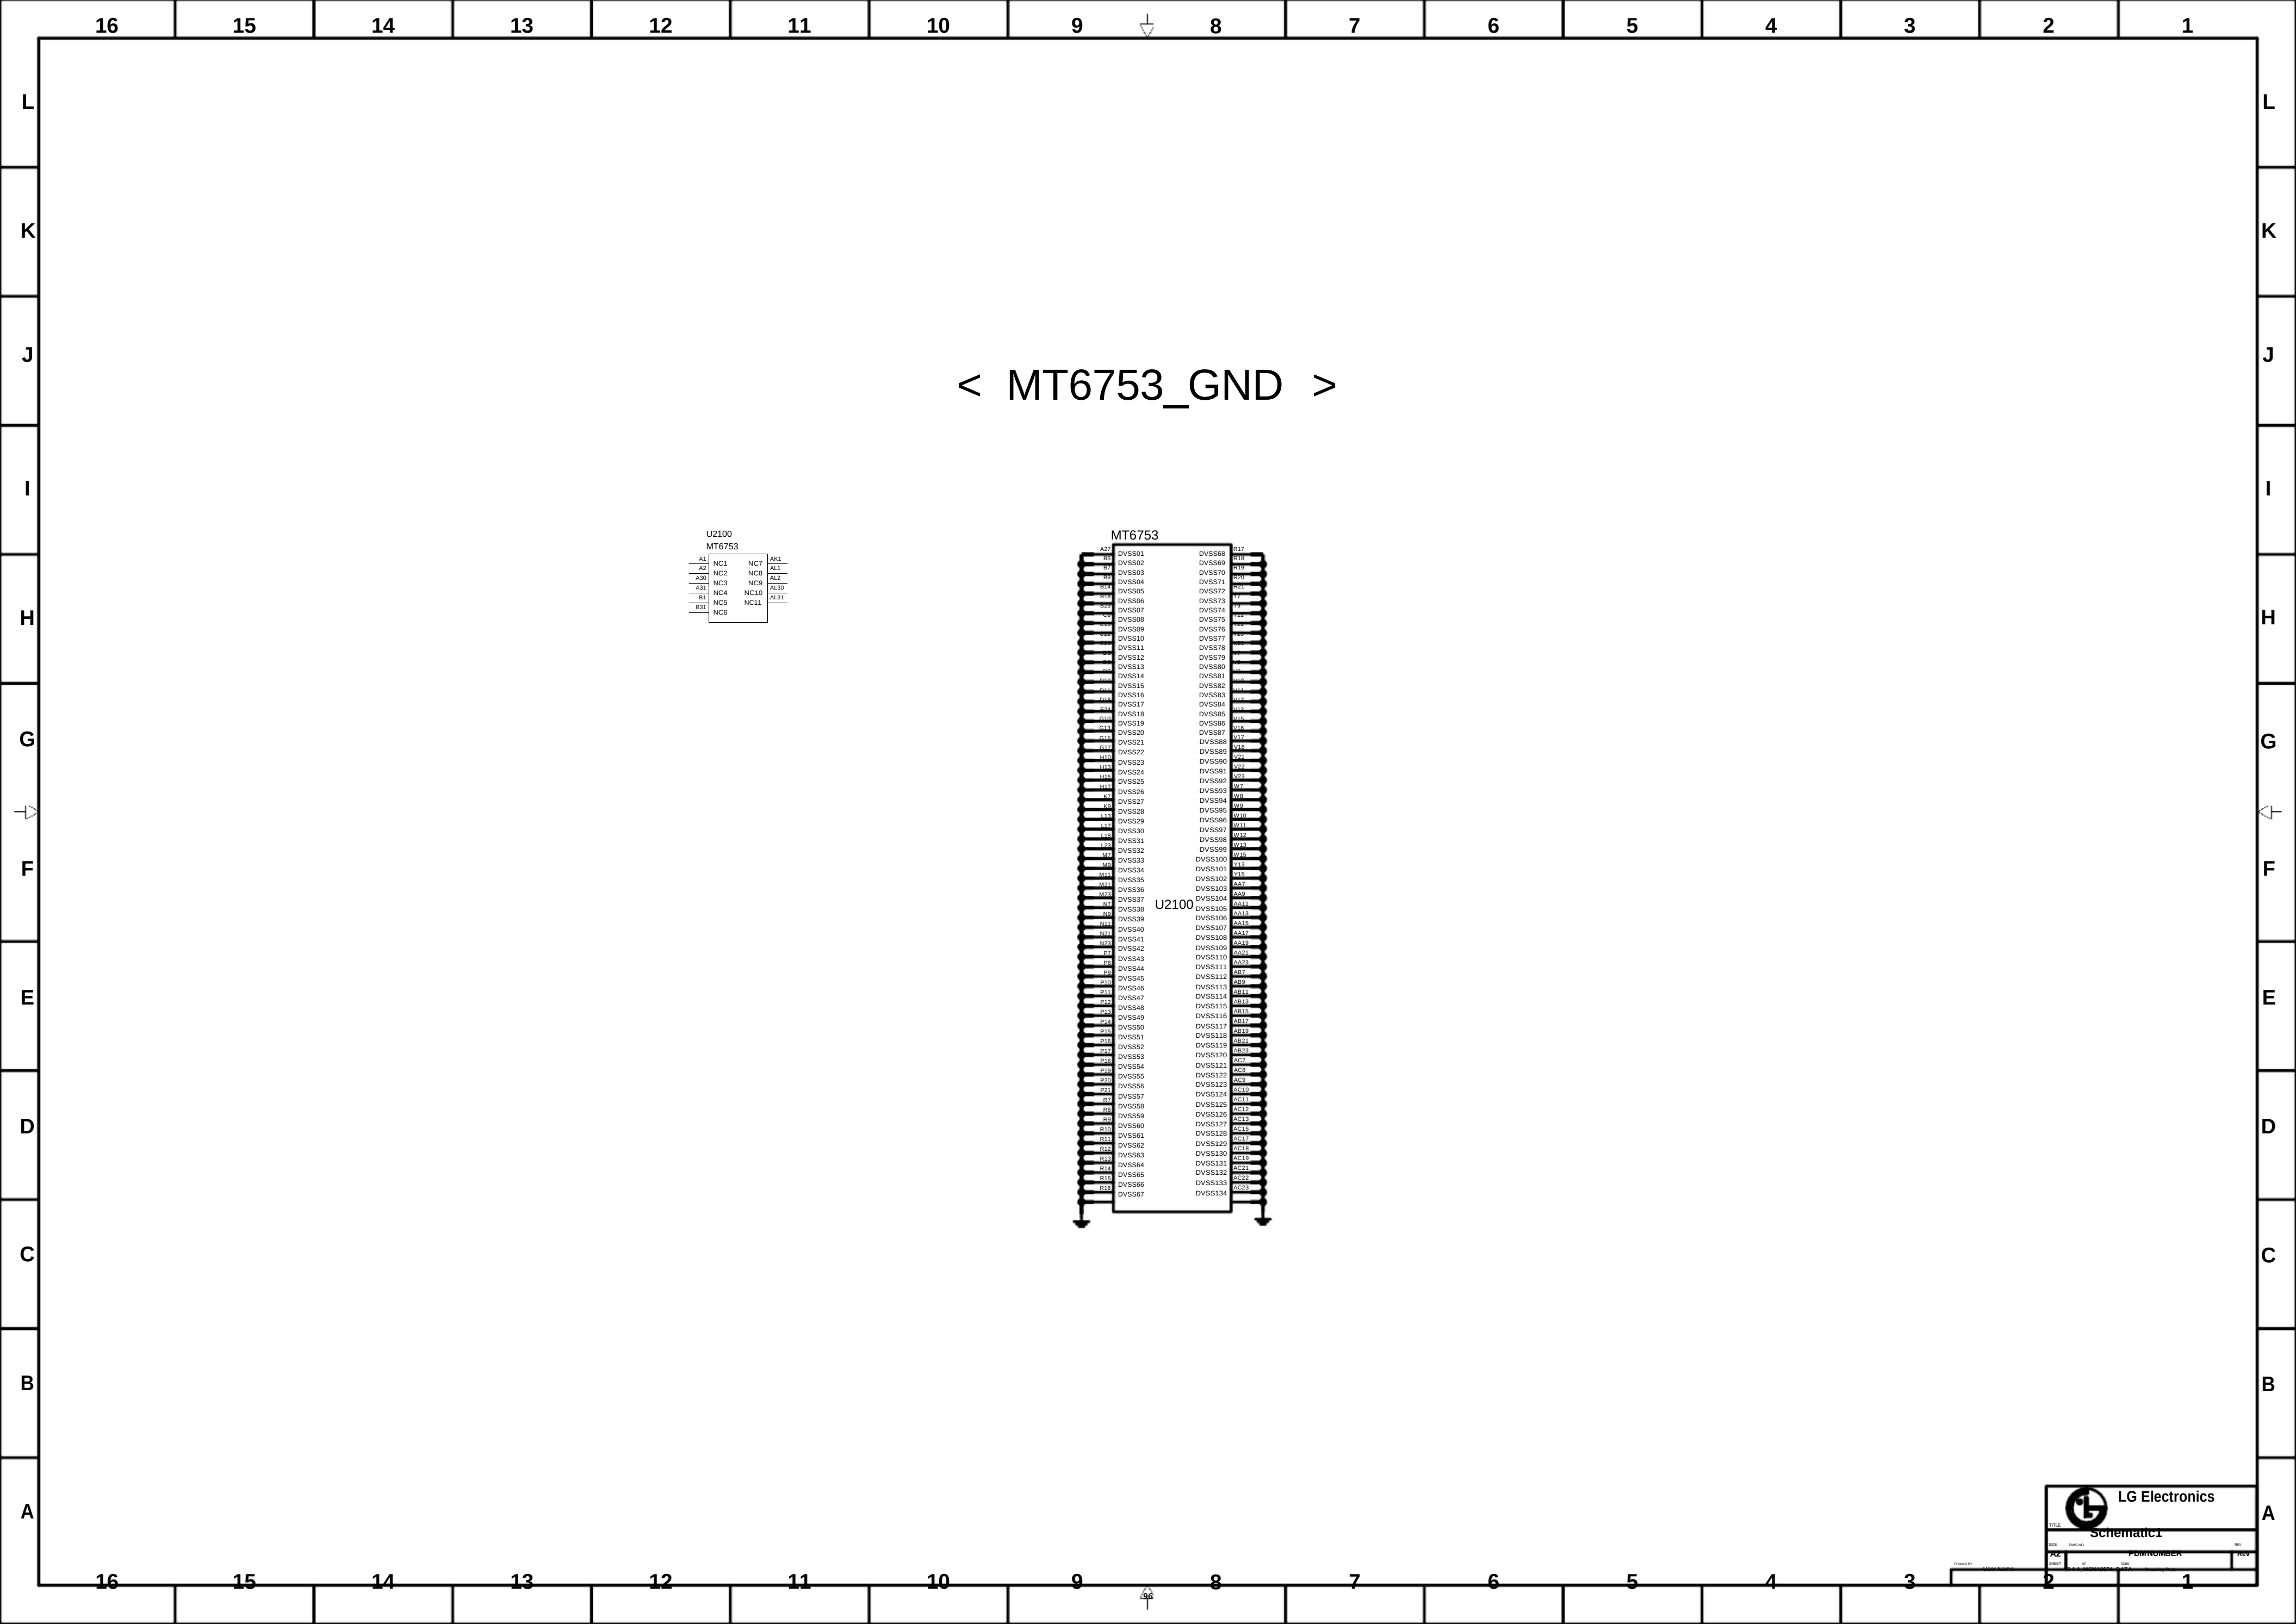


< 3-3-3_MCP_eMMC_5_0_1.5G_DDR3_16G_eMMC Samsung > Rev_0.3

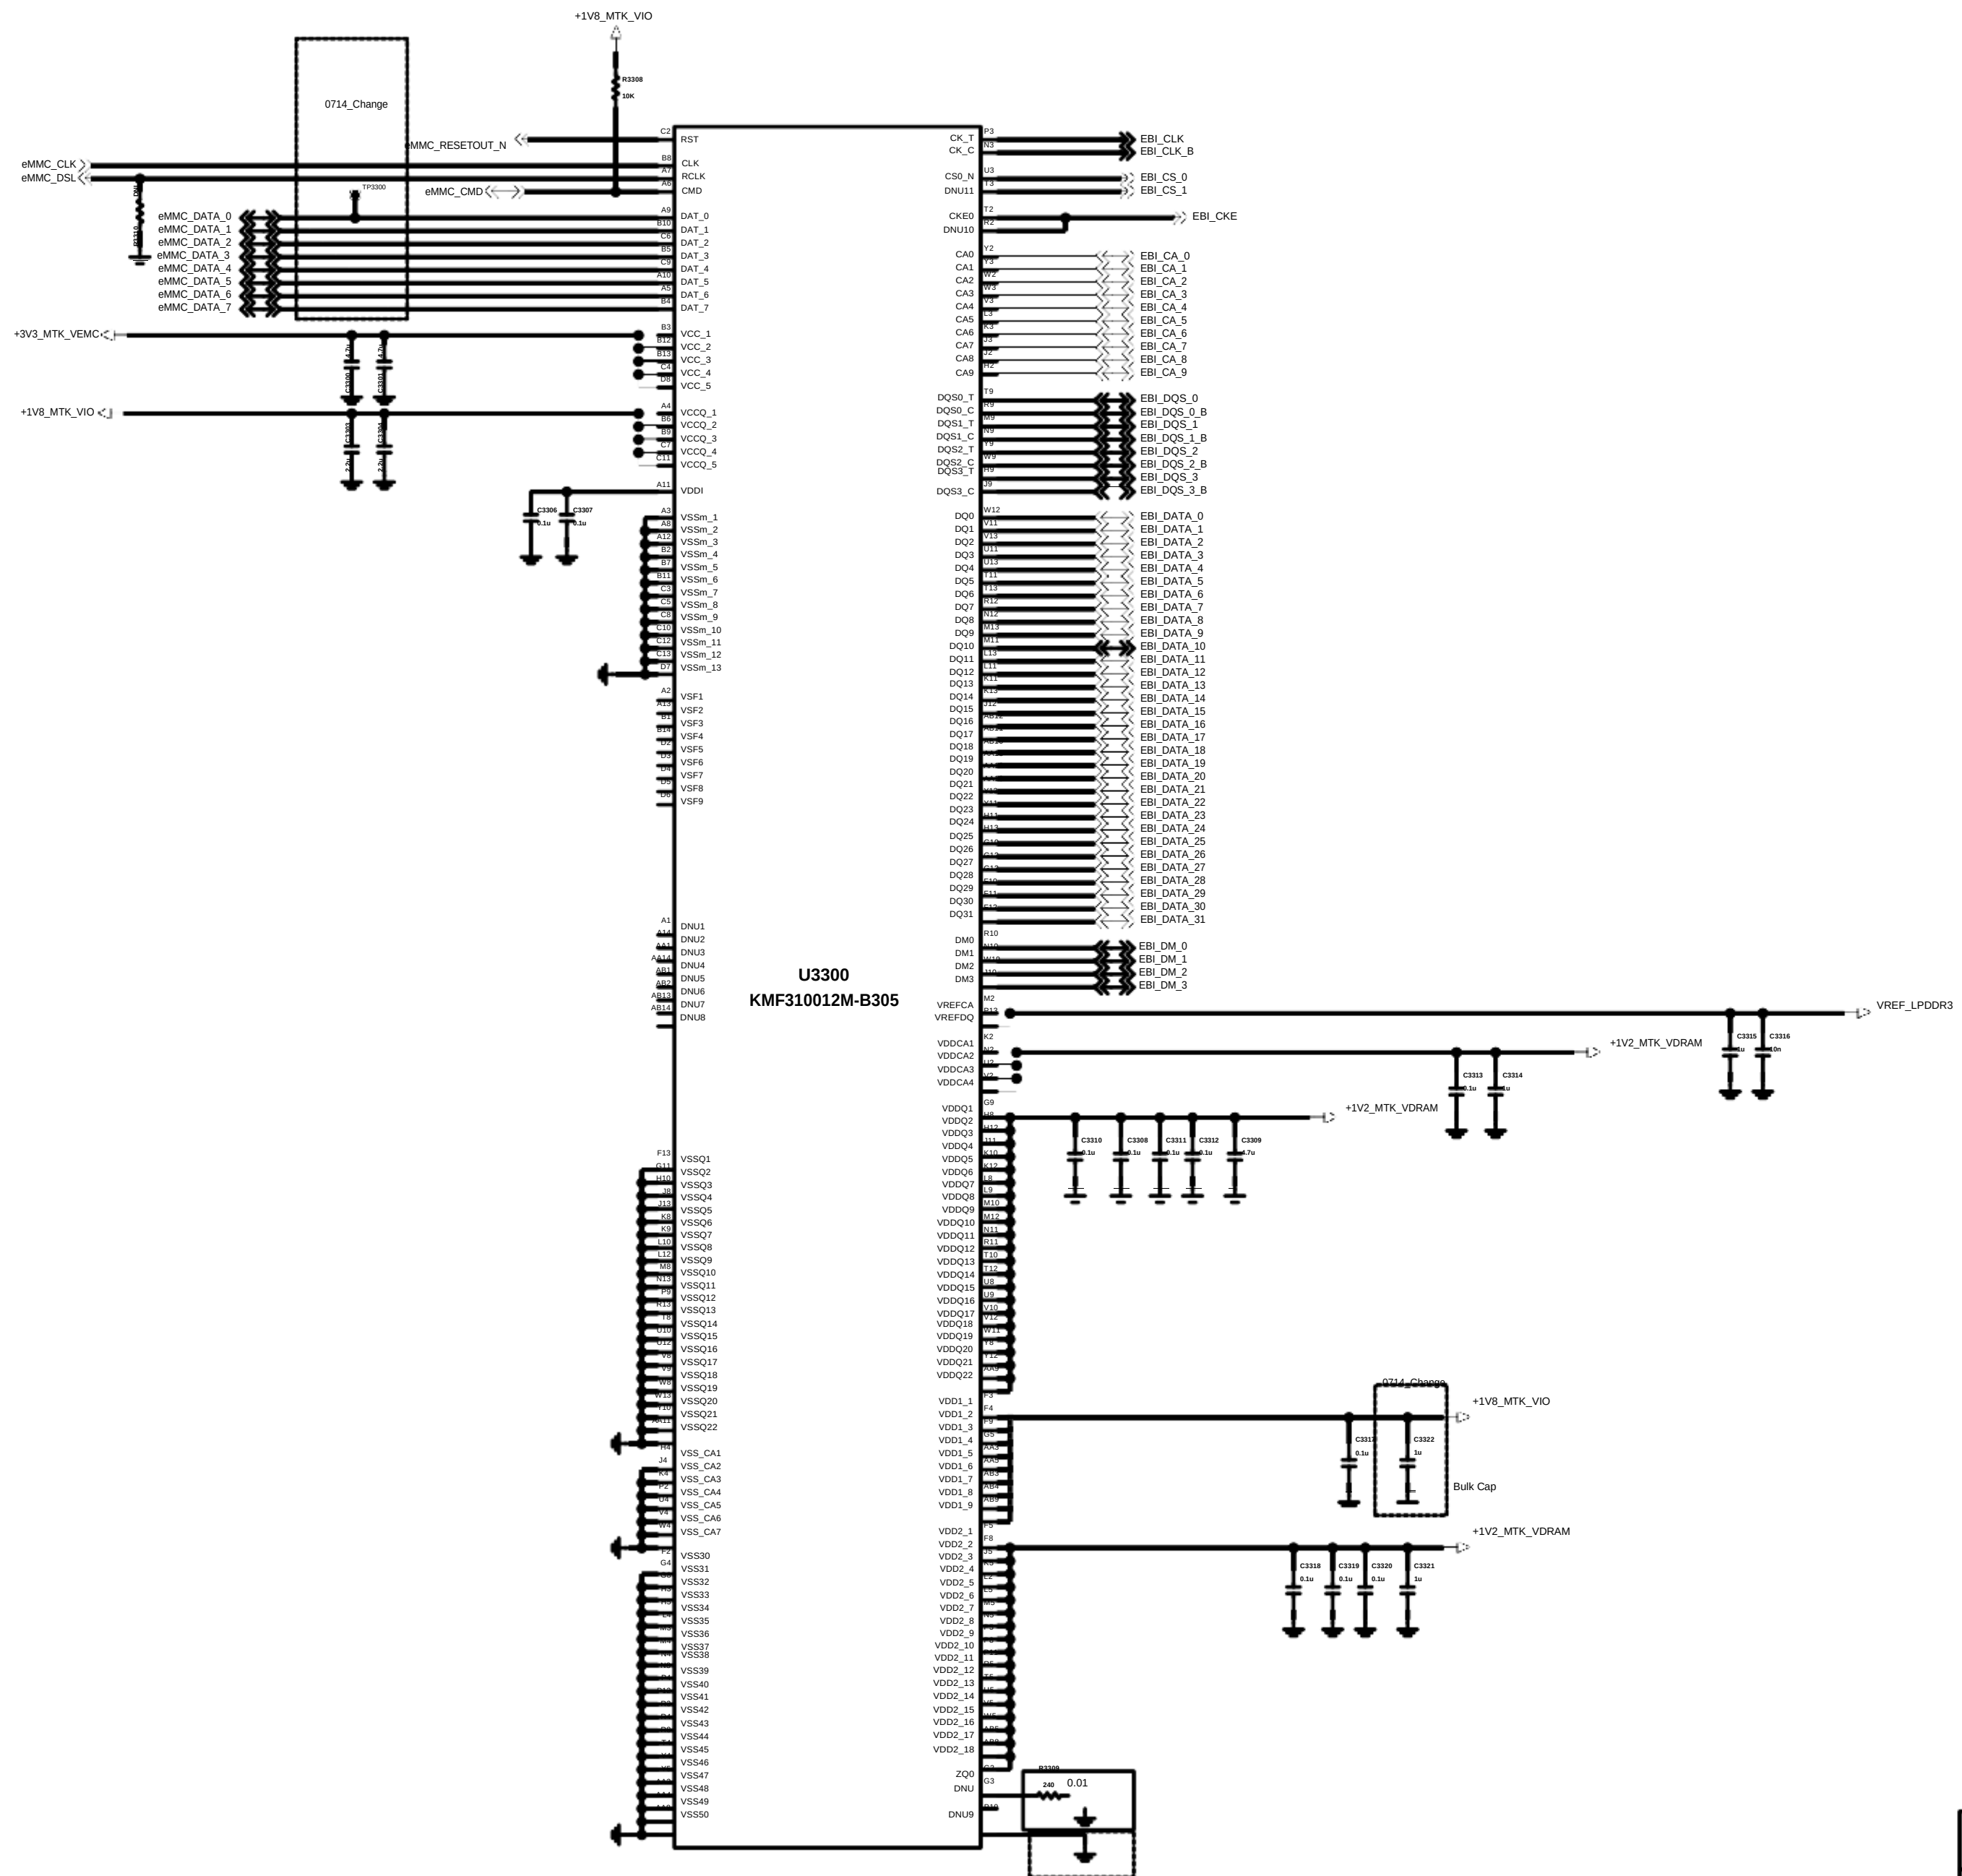


< MT6328_DATA >

BACKUP BATTERY

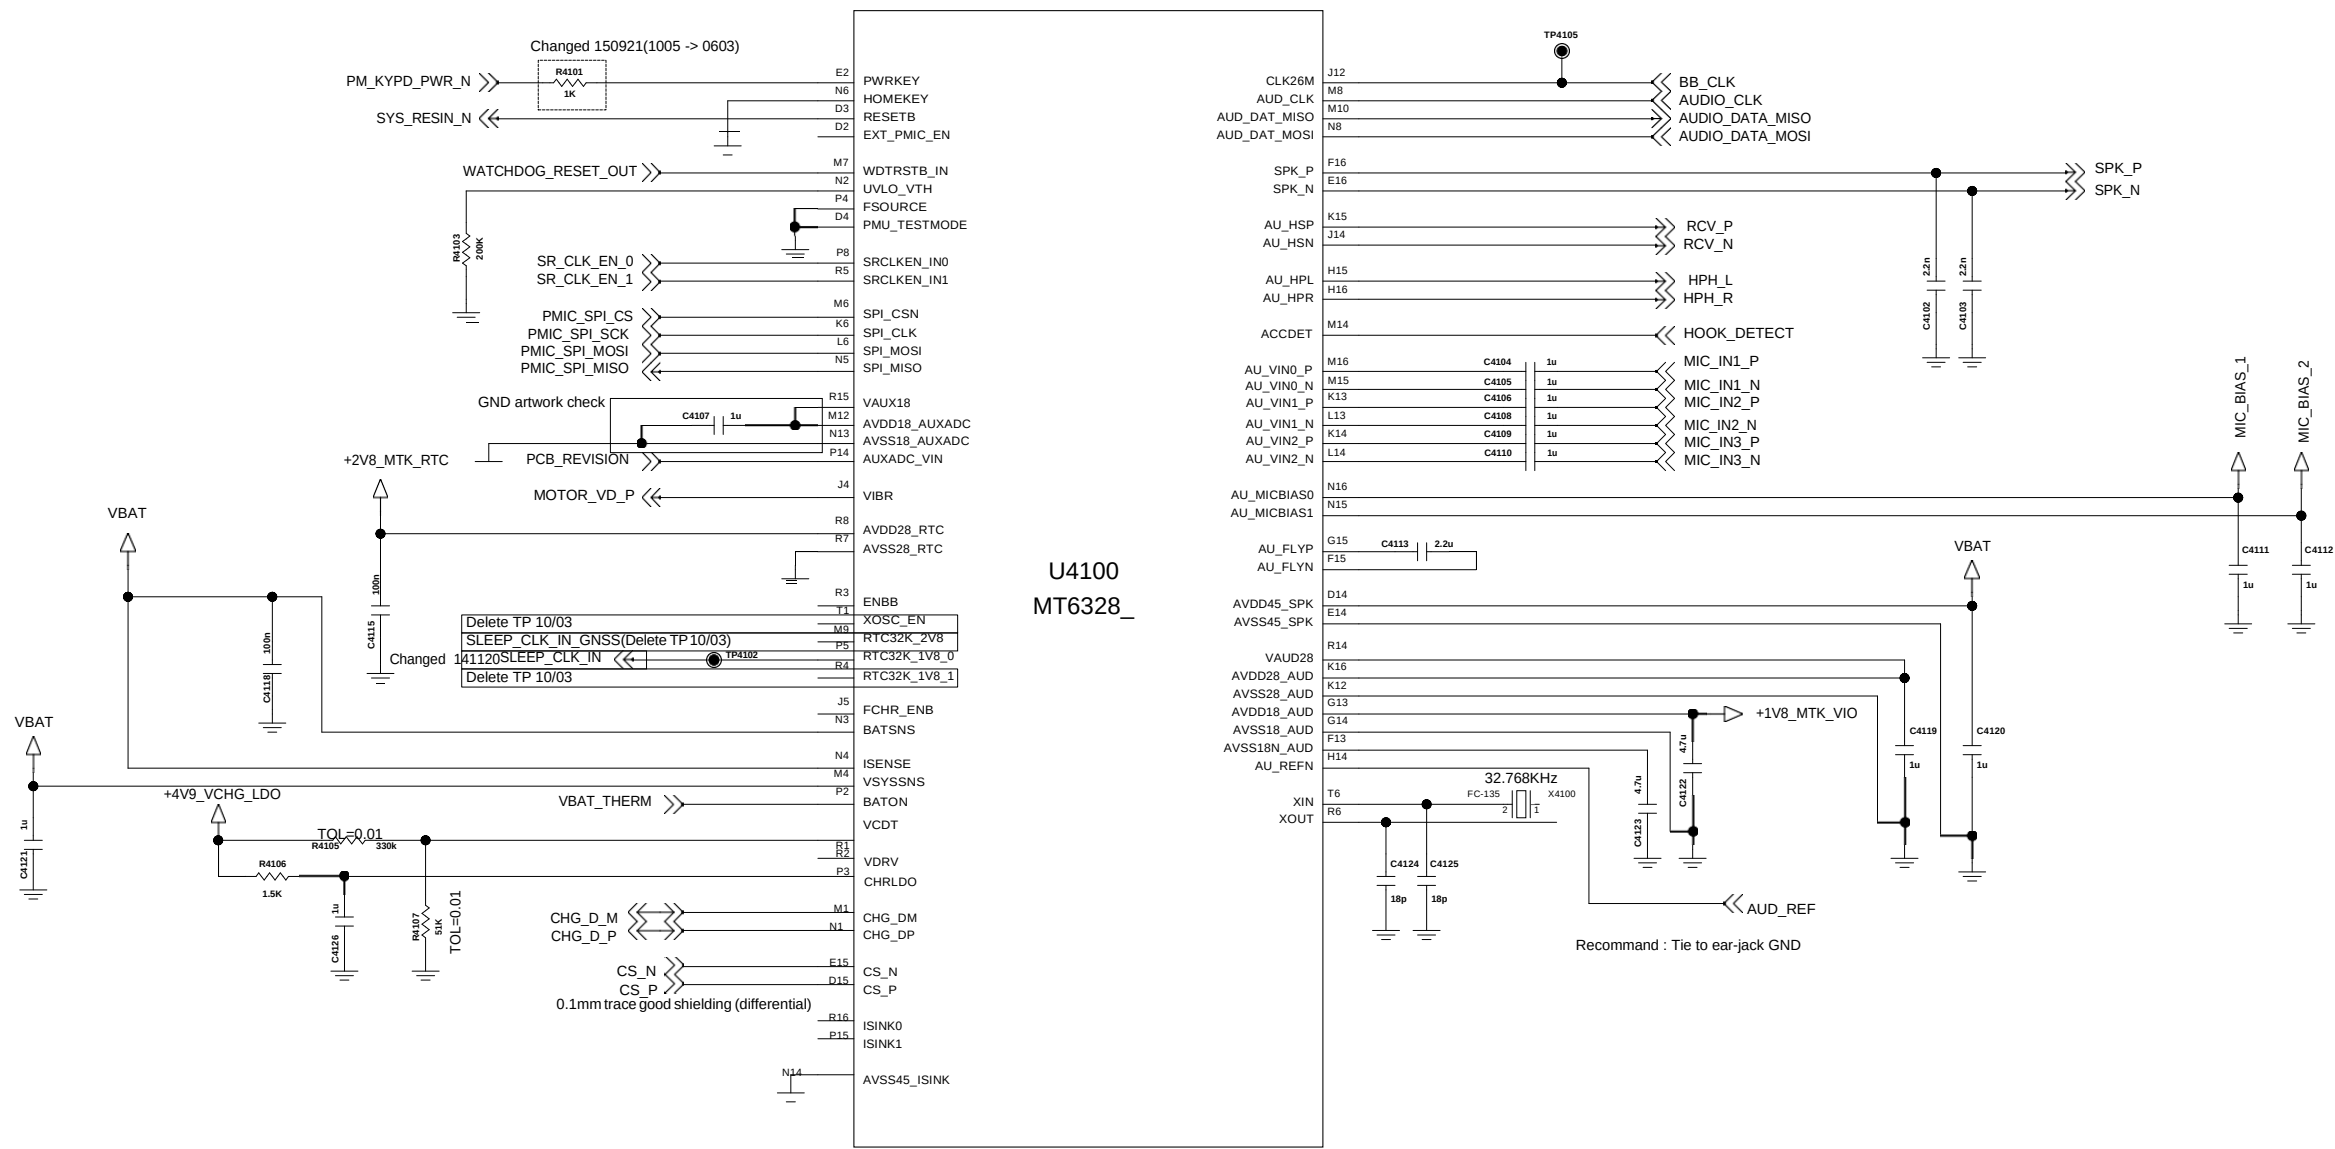

< MT6328 POWER >

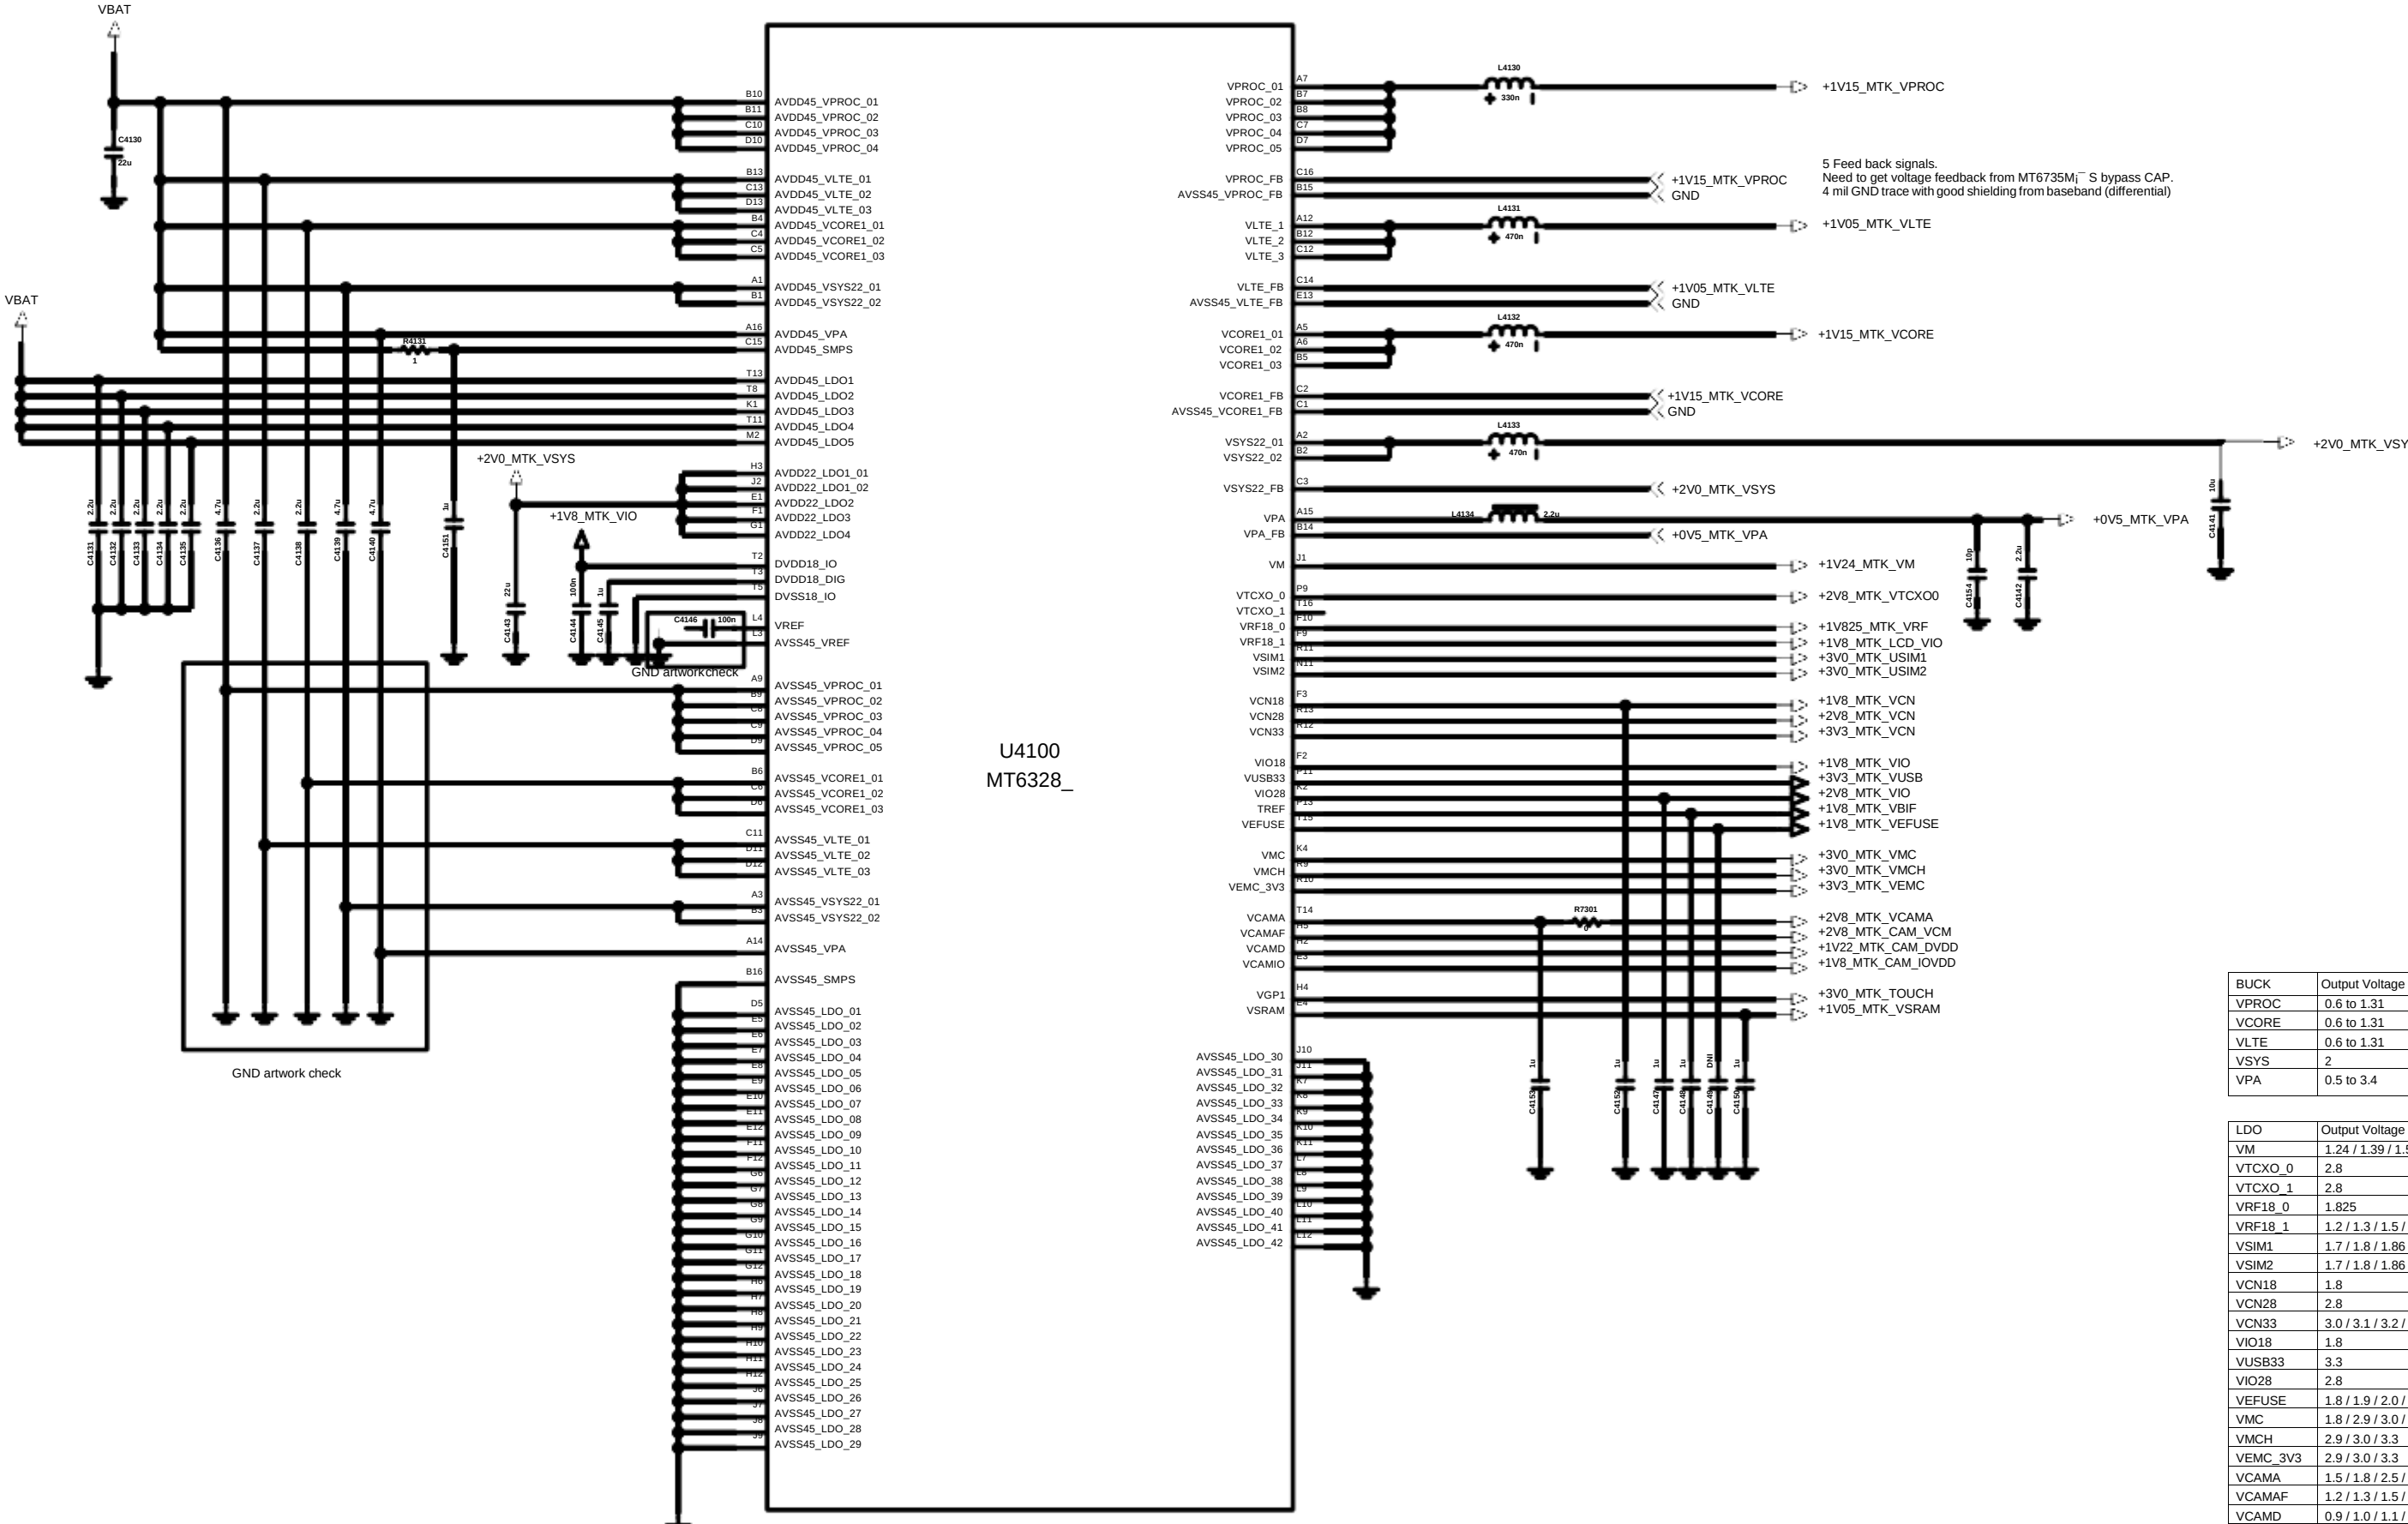


BUCK	Output Voltage Range(V)	Output Current(mA)
VPROC	0.6 to 1.31	5000
VCORE	0.6 to 1.31	3500
VLTE	0.6 to 1.31	2800
VSYS	2	1900
VPA	0.5 to 3.4	600

LDO	Output Voltage Range(V)	Output Current(mA)
VM	1.24/1.39/1.54	1000
VTXCO_0	2.8	40
VTXCO_1	2.8	40
VRF18_0	1.825	350
VRF18_1	1.2/1.3/1.5/1.825	300
VSIM1	1.7/1.8/1.86/2.76/3.0/3.1	50
VSIM2	1.7/1.8/1.86/2.76/3.0/3.1	50
VCN18	1.8	150
VCN28	2.8	40
VCN33	3.0/3.1/3.2/3.3/3.4/3.5/3.6	350
VIO18	1.8	600
VUSB33	3.3	20
VIO28	2.8	200
VEFUSE	1.8/1.9/2.0/2.1/2.2	200
VMC	1.8/2.9/3.0/3.3	200
VMCH	2.9/3.0/3.3	800
VMC3_3V3	2.9/3.0/3.3	400
VCAMA	1.5/1.8/2.5/2.8	200
VCAMAF	1.2/1.3/1.5/1.8/2.0/2.8/3.0/3.3	200
VCAMO	0.9/1.0/1.1/1.22/1.3/1.5	500
VCAMD	1.2/1.3/1.5/1.8	200
VGP1	1.2/1.3/1.5/1.8/2.5/2.8/3.0/3.3	200
VSRAM	0.6 to 1.31	100
VYBR	1.2/1.3/1.5/1.8/2.0/2.8/3.0/3.3	400
VAXU18	1.8	40
VAXU28	2.8	40
DVDD18_D18	1.8	20
VRTC	2.8	2




<5-1-1-18_MT6625L_WiFi_BT_GPS_FM>

Rev_0.3

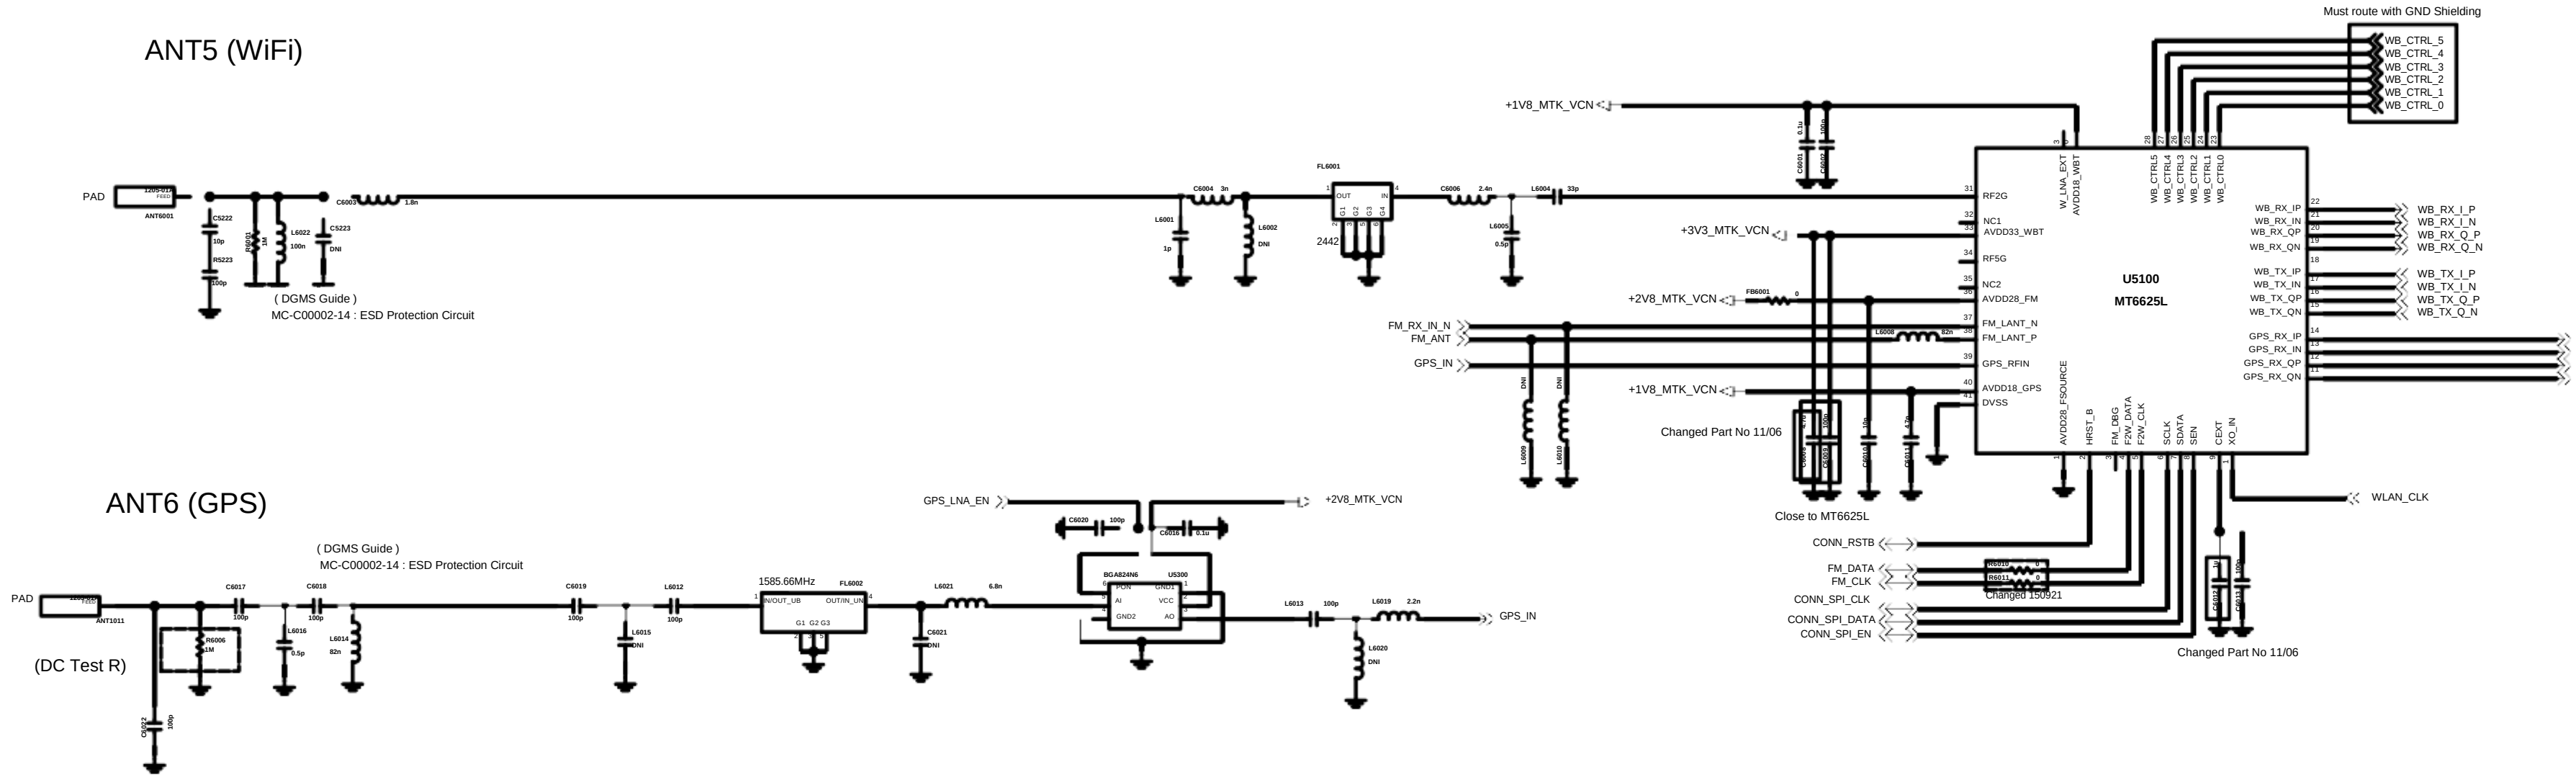

<5-2-1-8_BCM20795F> Rev_1.0

NFC Antenna

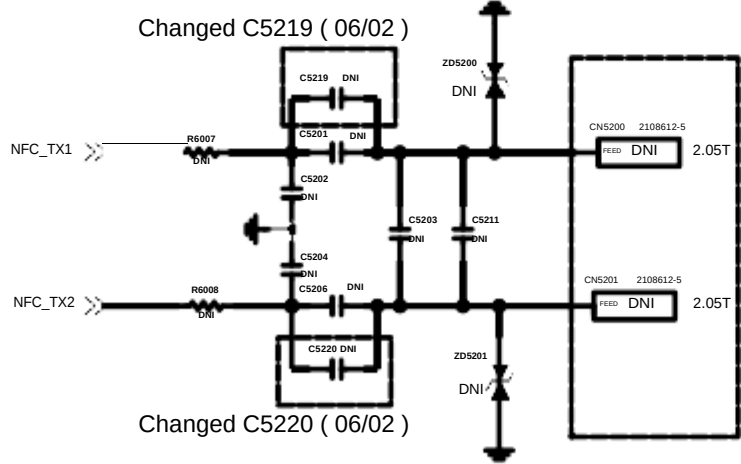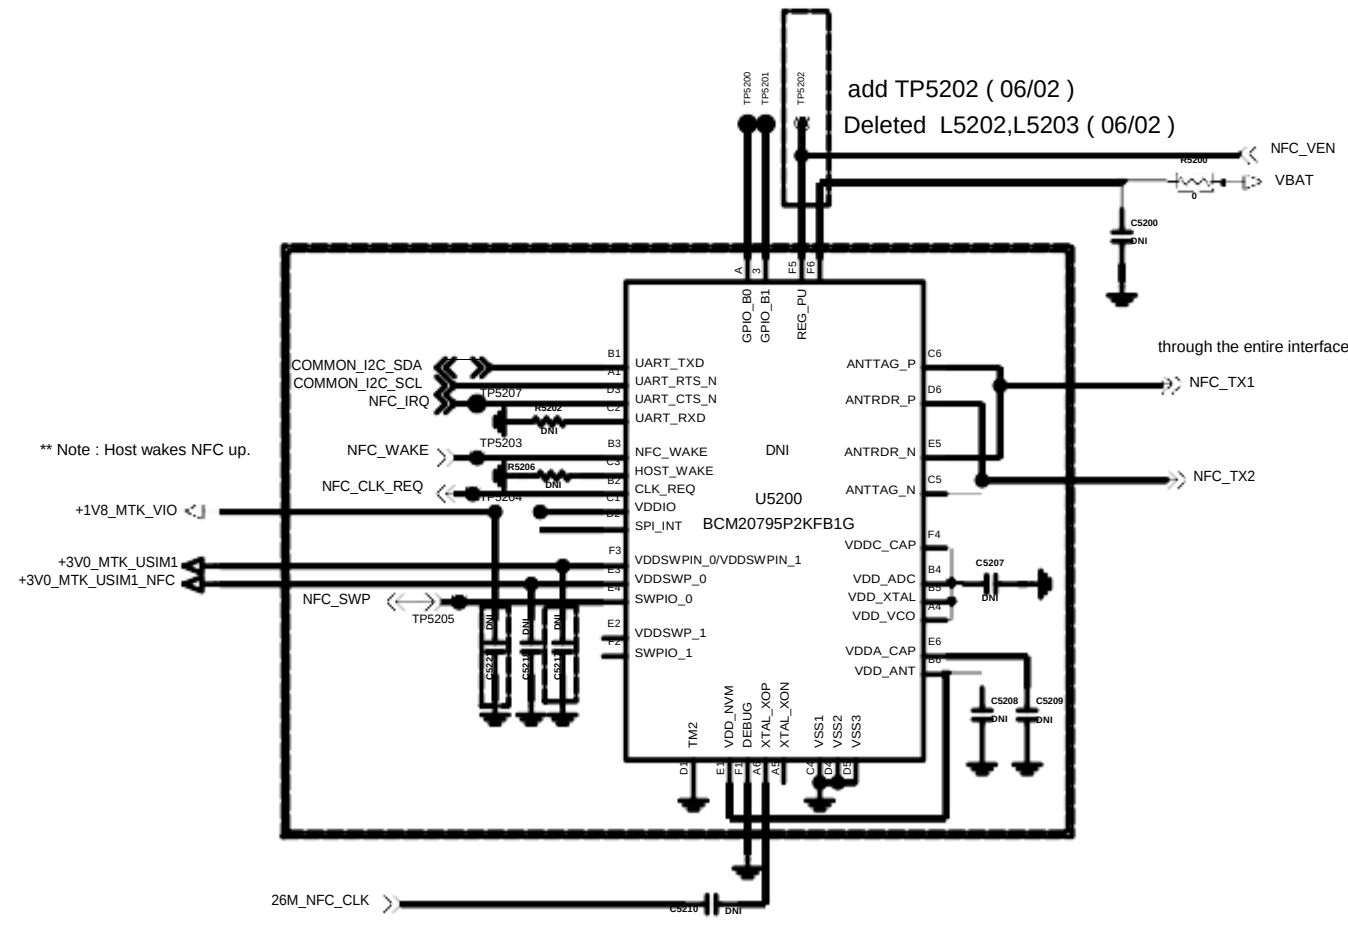

Schematic1

A2 PDMNUMBER Rev

User Name 8 8 Drawing Date

<5-3-1-6_One_SEG_FC8180> Rev_1.0


The schematic diagram illustrates the electrical connections for the One_SEG_FC8180 module. Key components and connections include:

- Antenna Interface:** The 1SEG_ANT input is connected through a series of components (L5401, DNI, C5401, DNI, L5402, DNI) to a matching network (L5403, DNI, C5403, DNI, L5404, DNI).
- Power Supply:** The +1V8_MTK_VIO supply is connected to the FC8180 chip. Decoupling capacitors (C5404, C5405, C5406, C5407, DNI) are used to filter the supply voltage.
- Signal Connections:** The FC8180 chip is connected to various signals, including 1SEG_EN, 1SEG_CLK (via MT6169 BufferClock), 1SEG_INT, 1SEG_SPI_CS, 1SEG_SPI_MISO, 1SEG_SPI_MOSI, and 1SEG_SPI_CLK.
- Test Points:** Several test points (TP5400, TP5401, TP5402, TP5403, TP5404) are provided for signal monitoring and debugging.


CIS_DNI

CIS_DNI


<4-4-3_LCD_Backlight_IC_RT8542> Rev_1.2

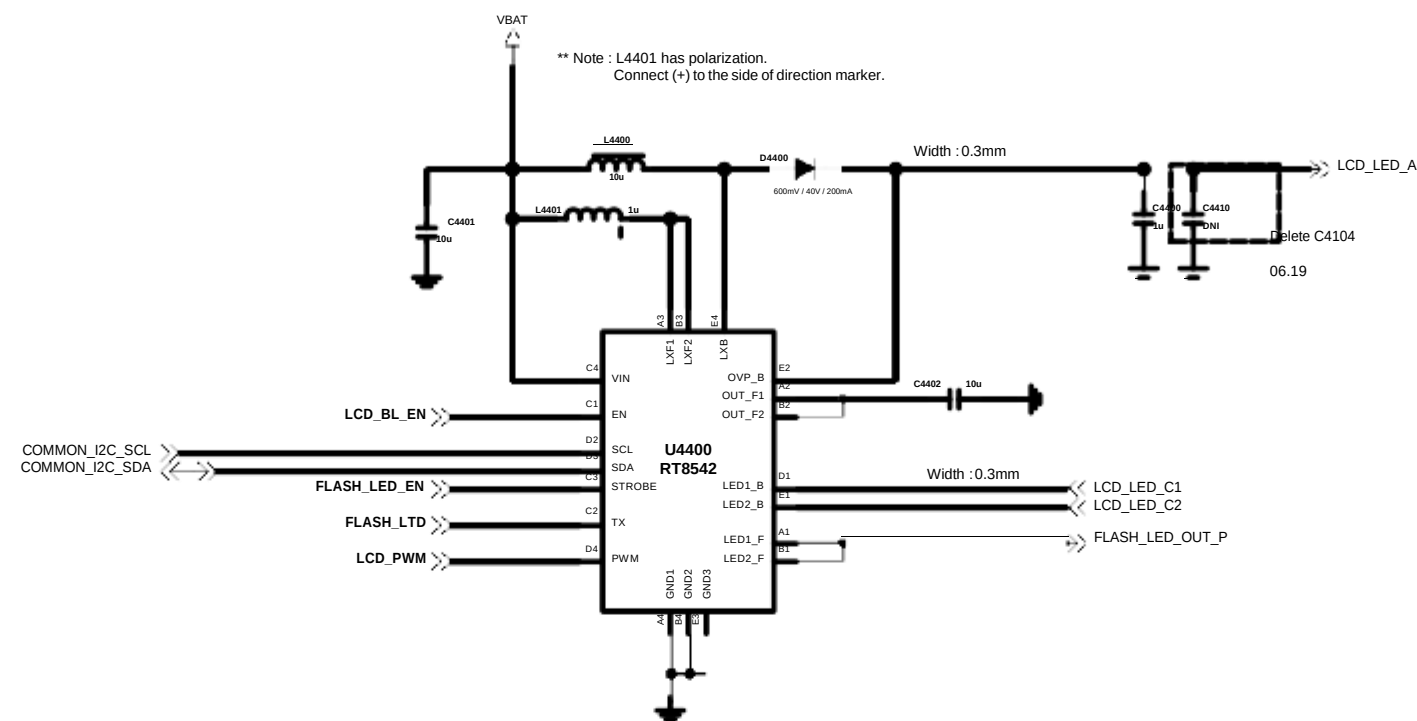


< Camera Flash LED >

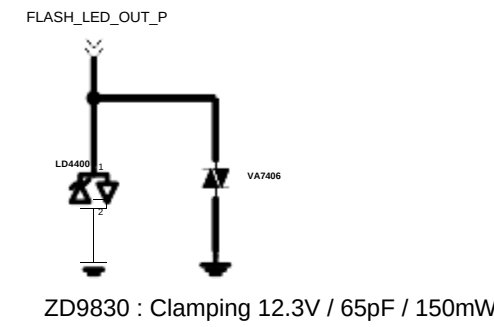


<DSV_SM5107>

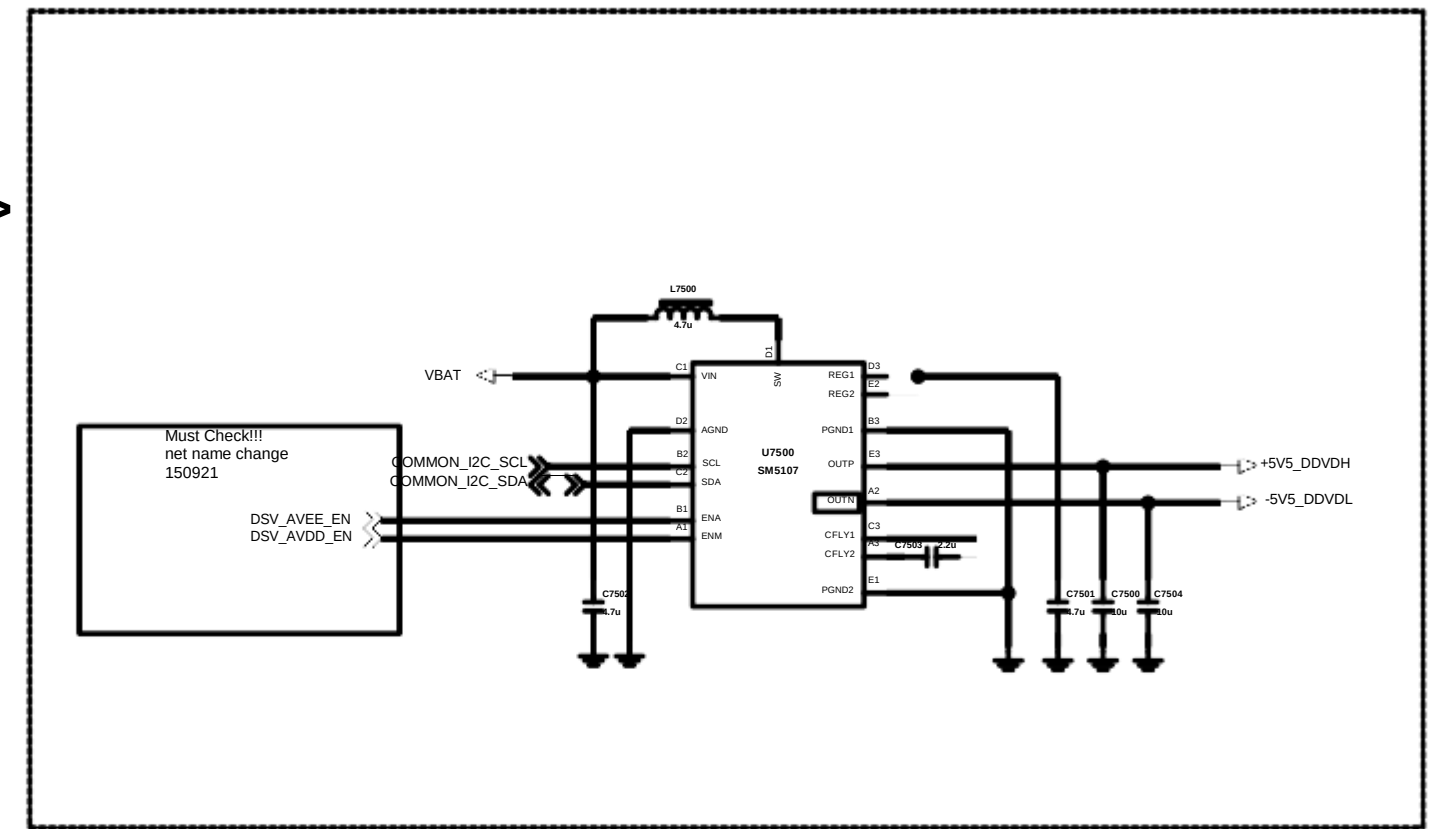

5.3" Incell LCD Connector

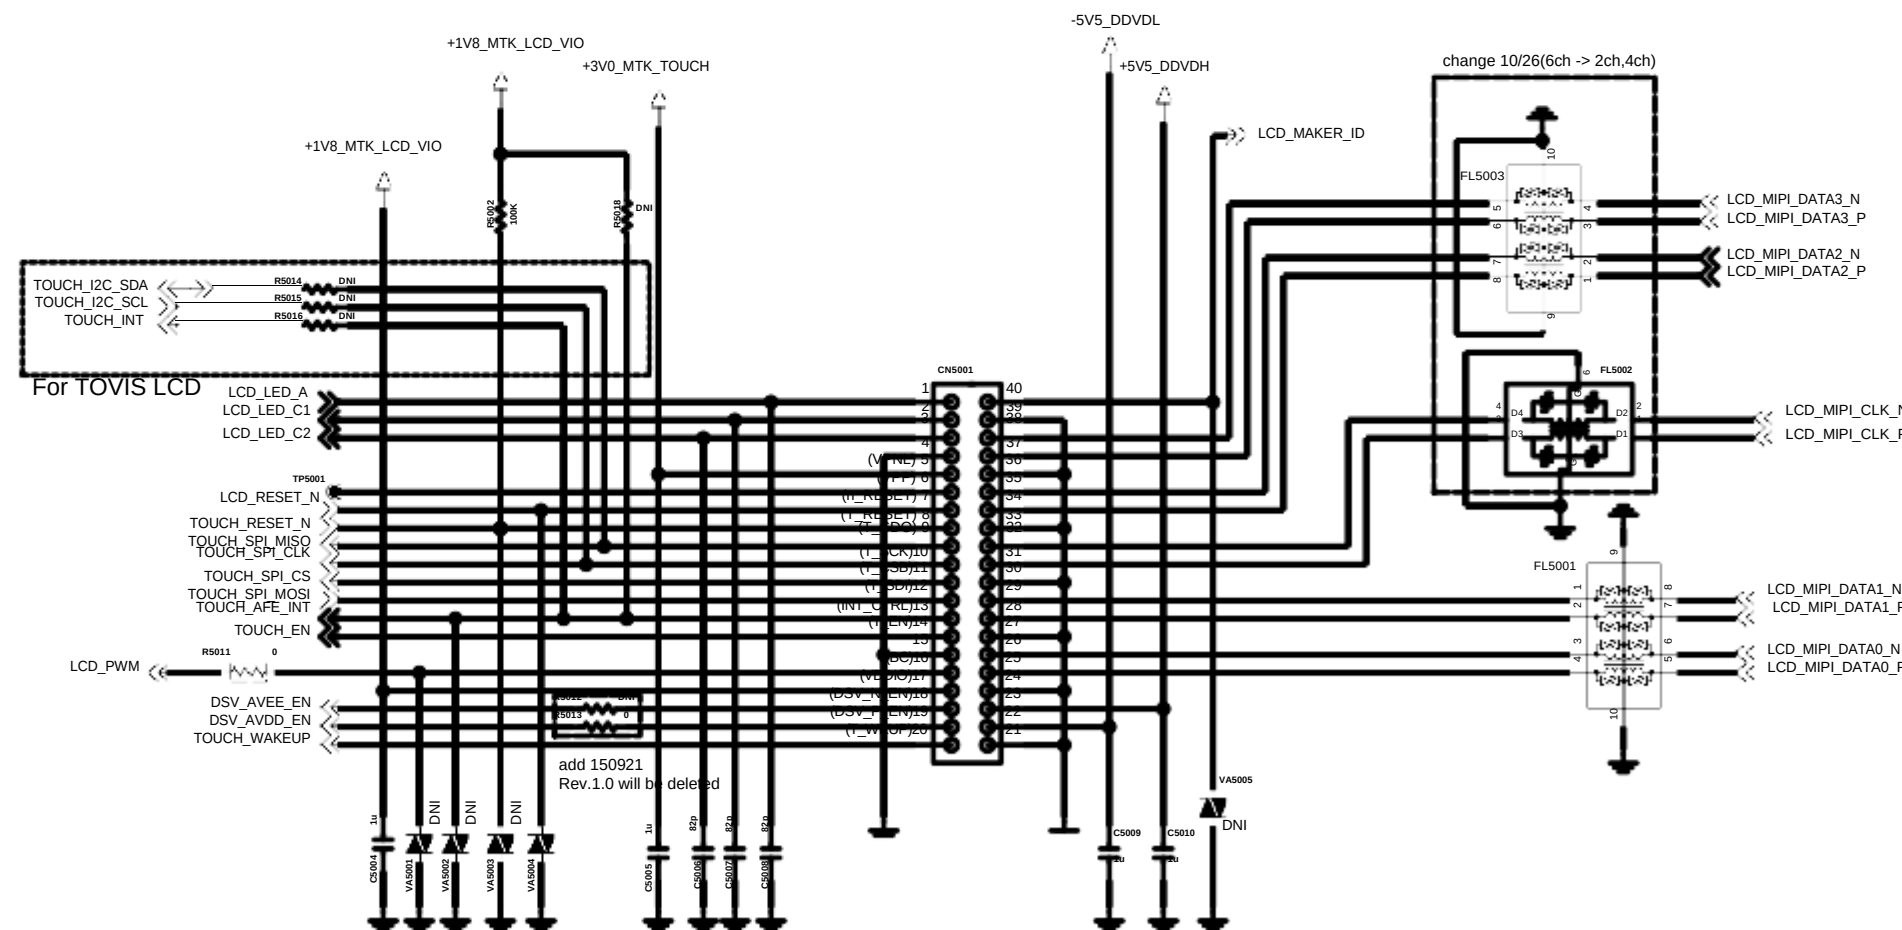

TOUCH IC


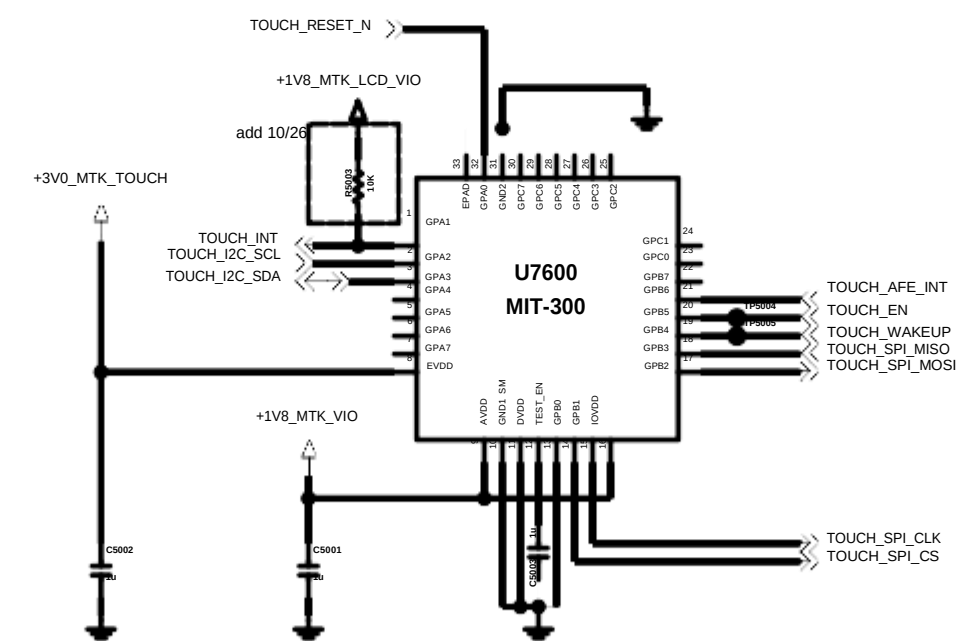


< 7-3_Main_Camera > Rev_1.2


<VT Camera>

Camera 5. 30pin 8M & 13 AF


Option 5M/8M Change Pin Map(30Pin)

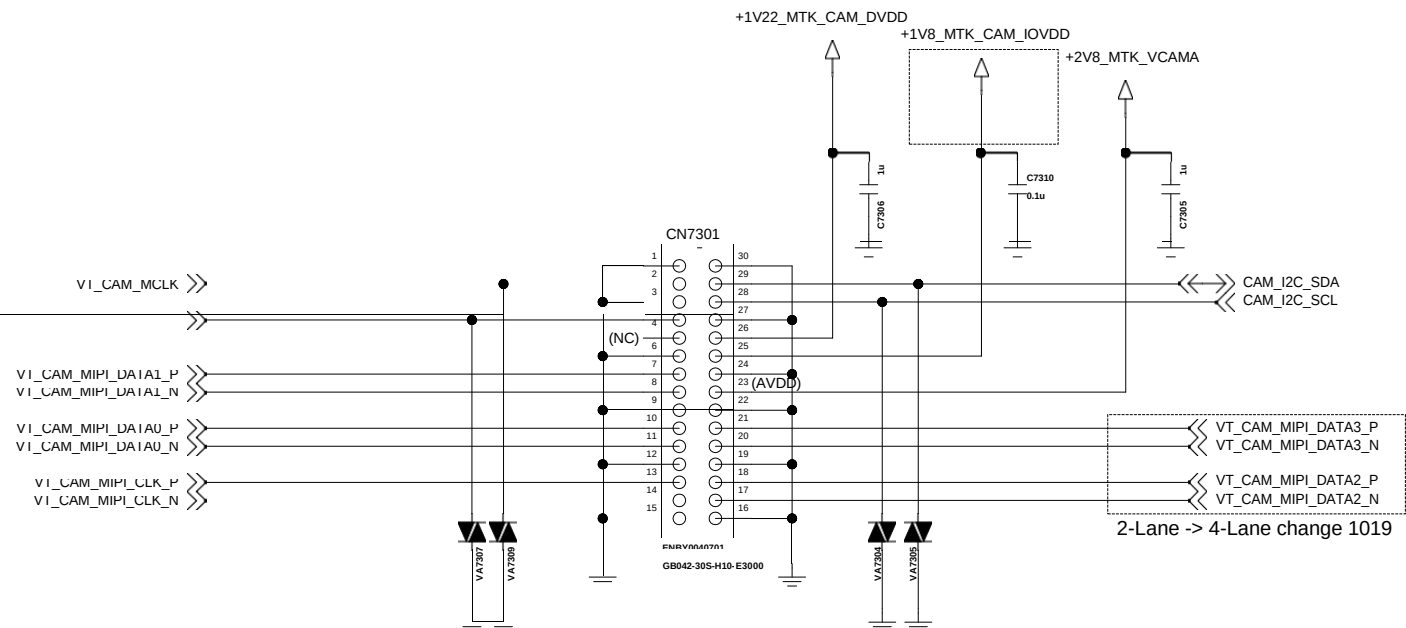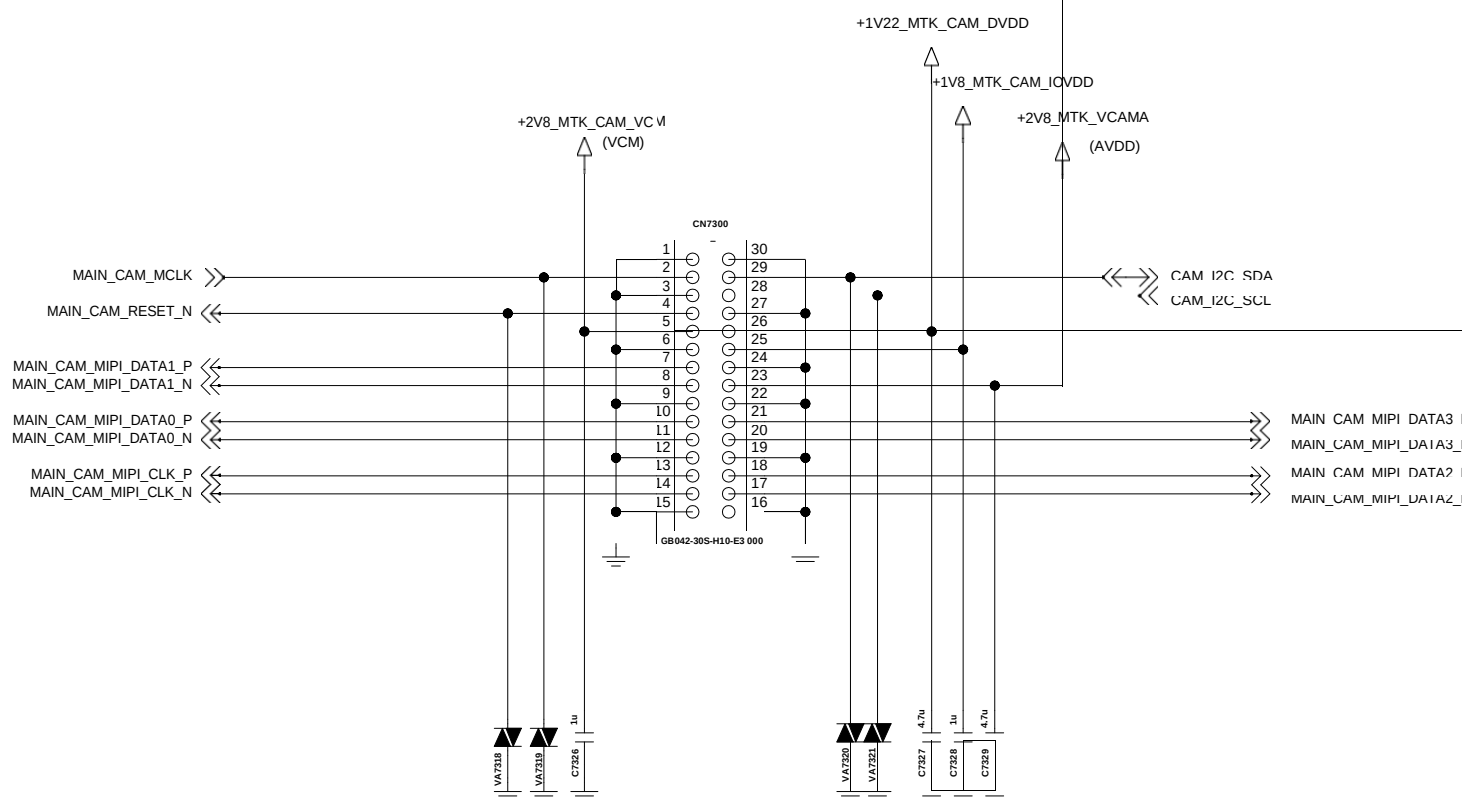


< 6-7-1_Speaker > Rev_1.2

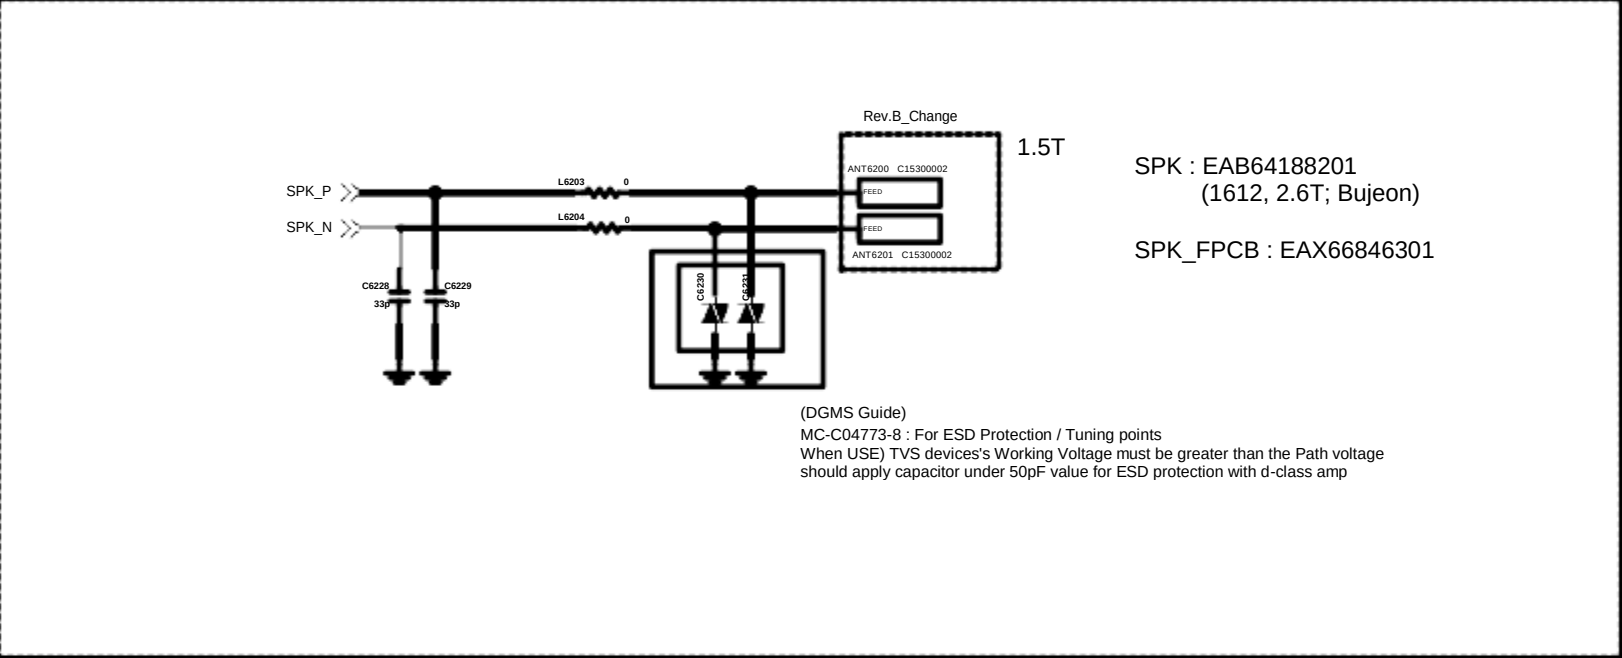


< 6-6-1_Earjack >

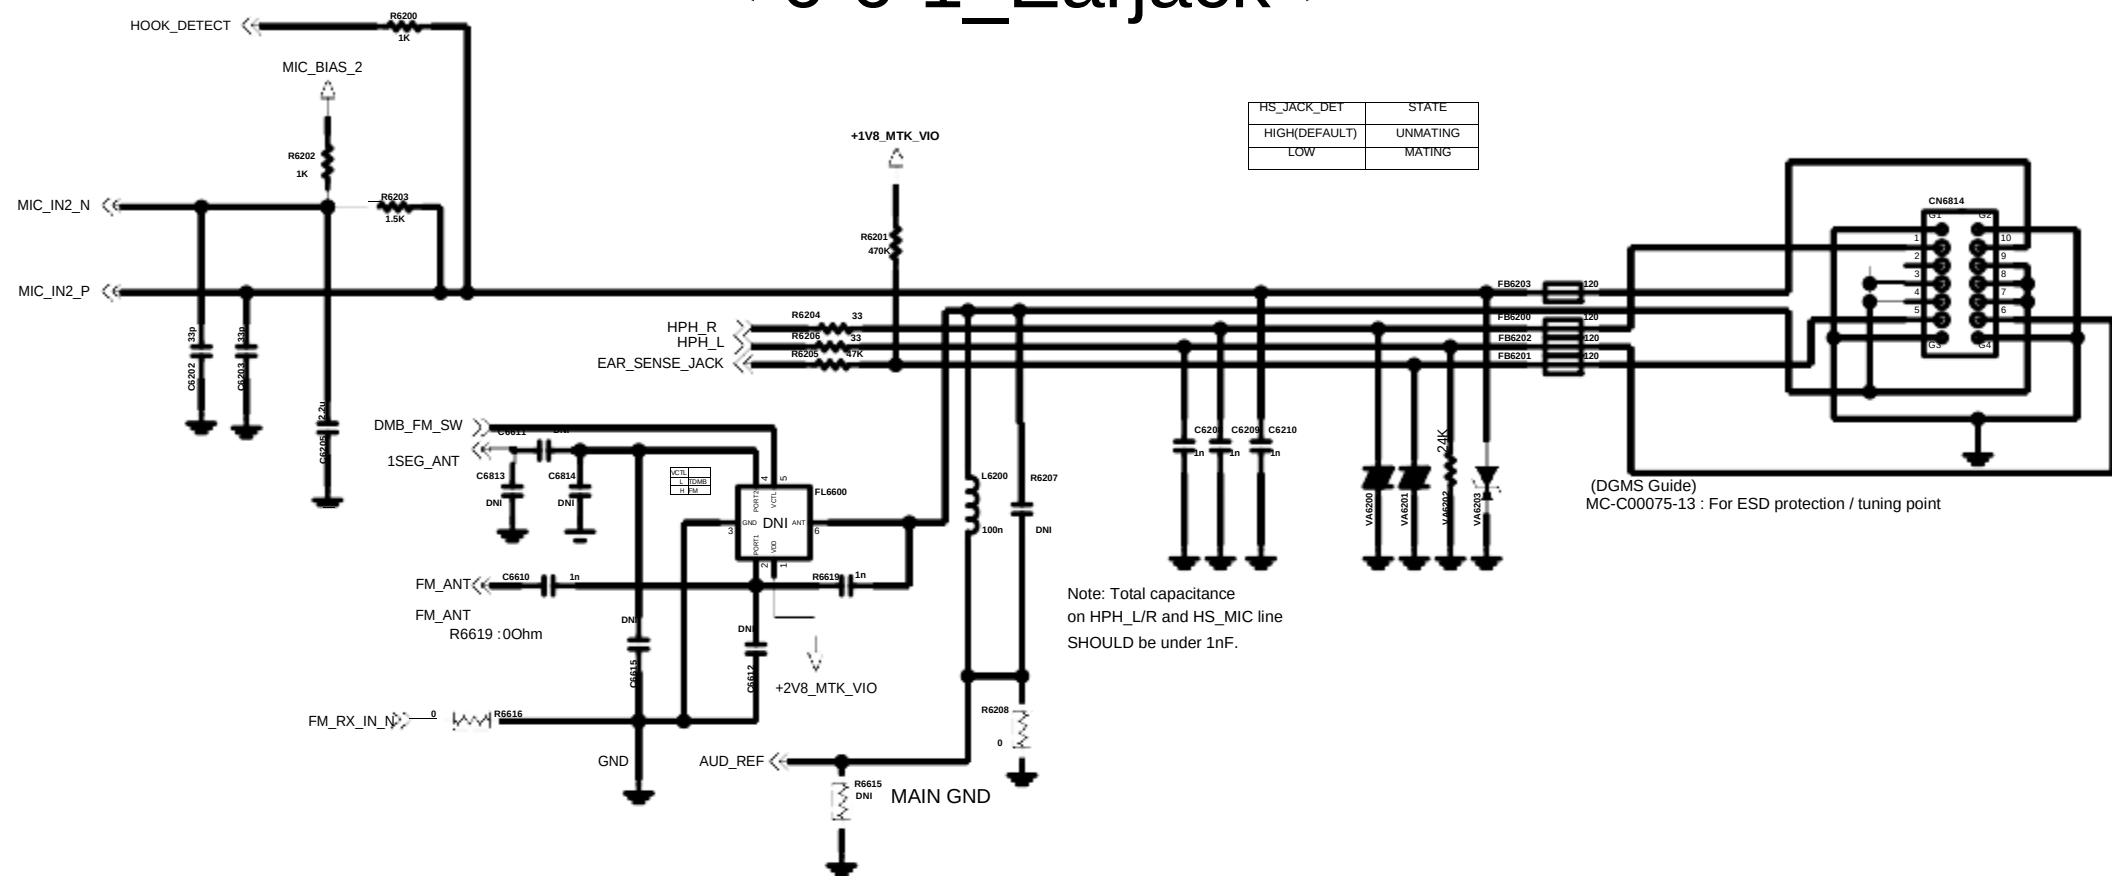


< 6-9-1_MIC > Rev_1.0

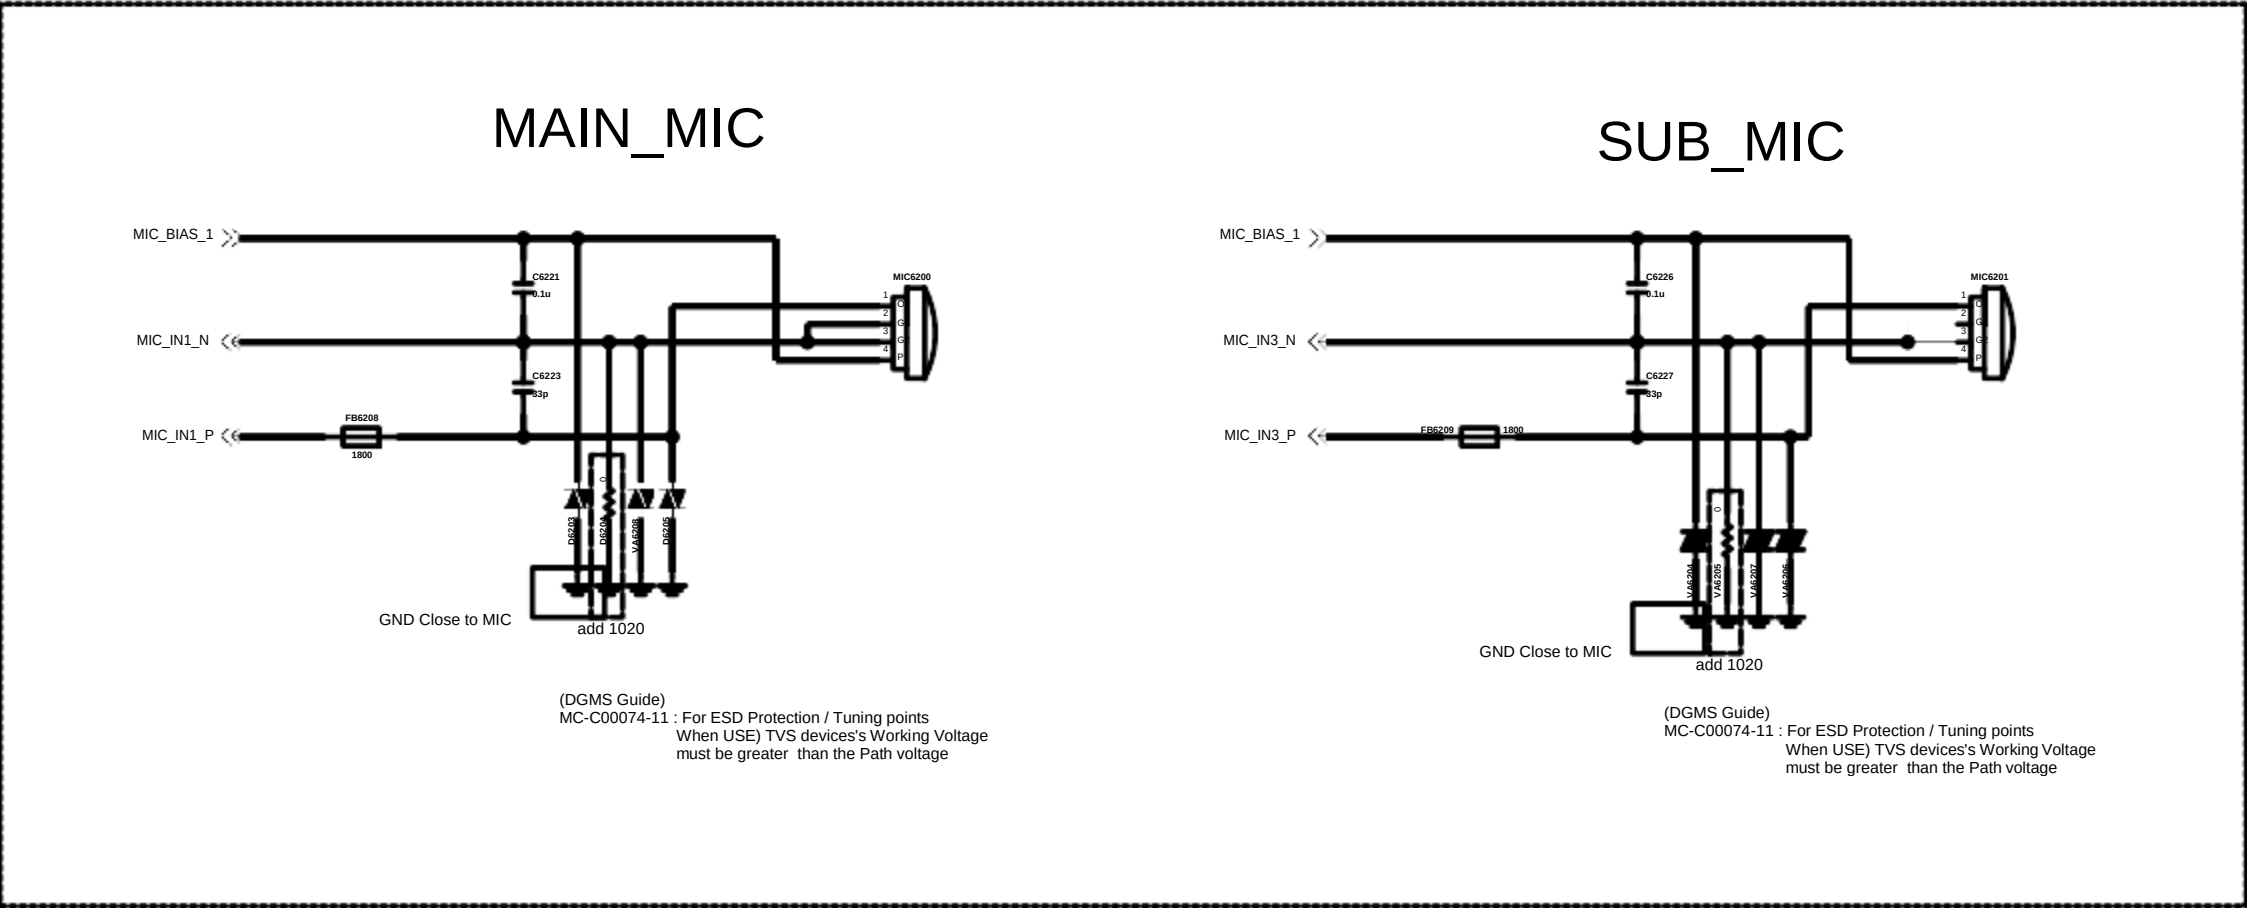

< 6-8-1_Receiver > Rev_1.1

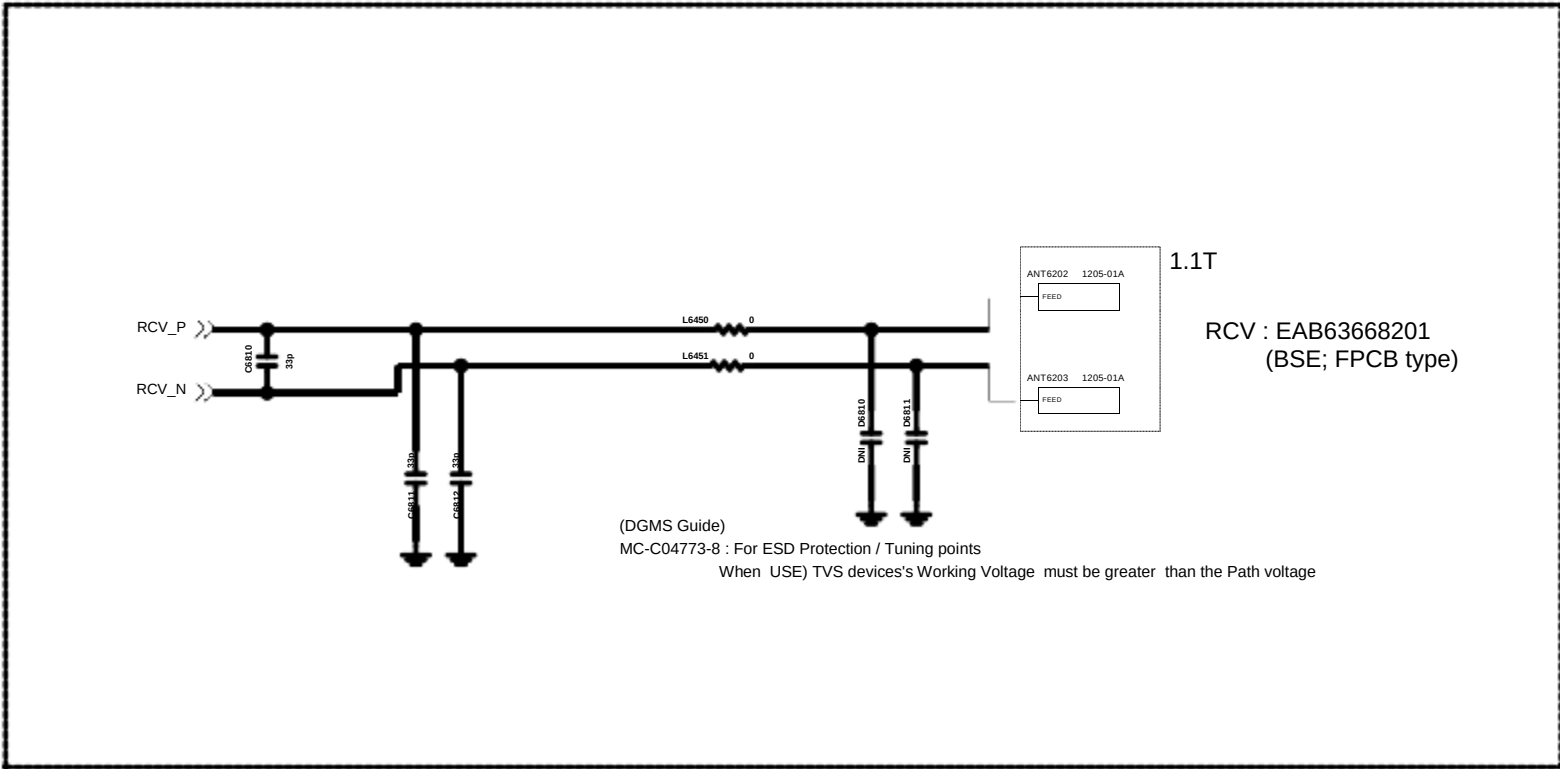

<8-1-2-1_Accel_Compass_BMC150> Rev_1.0

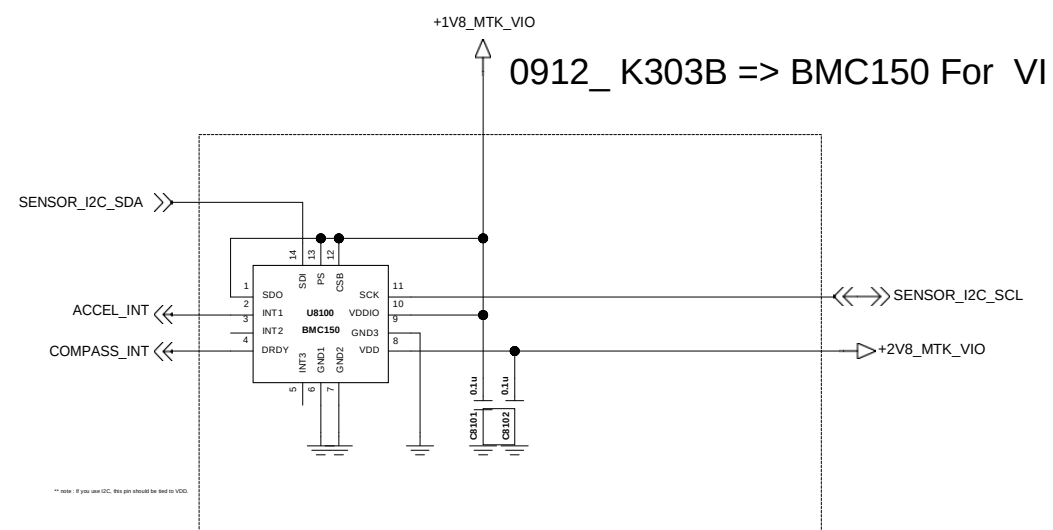

The schematic diagram illustrates the BMS configuration for the CN9101 module. It shows the connection of the BMS to the battery pack and the module. Key components and annotations include:

- VBAT**: Connected to the battery pack. Routing Width 2mm.
- CS_N**: Connected to the battery pack. 0.1mm trace with good shielding (Differential). 6.3V.
- CS_P**: Connected to the battery pack. 0.1mm trace with good shielding (Differential). R6414 150Ω. changed 150921.
- BAT_ID_PULLUP**: Connected to the battery pack. R6408 5.7K.
- BAT_ID**: Connected to the battery pack. R6407 100.
- Internal Components**: C5401, C5402, C5403 (1000pF), V6640 (DNI), R6405 (62K), R6406 (1K), R6413 (DNI).
- Routing Width**: 2mm.
- Trace Length**: 0.1mm.

NOTE1
646mA (Need to change 1%)

NOTE2
I2C Setting
2K ohm 10% : 85mA
3.3K ohm 16.5% : 140.25mA

820 ohm : 646mA

05.13 change
EAG64149801 --> EAG63510401

D6401 CAD Library Update (With 2513 PAD size)

15.09.20

USB_D_M
USB_D_P

90 ohm impedance

1V8_MTK_VIO

USB_ID

NORMAL(OFFSET)

VAG602

ZD6401

ZD6400

re413 060K TOL=0.01

re512 330K TOL=0.01

re513 22p

re514 22p

re515 22p

re516 22p

re517 22p

re518 22p

re519 22p

re520 22p

re521 22p

re522 22p

re523 22p

re524 22p

re525 22p

re526 22p

re527 22p

re528 22p

re529 22p

re530 22p

re531 22p

re532 22p

re533 22p

re534 22p

re535 22p

re536 22p

re537 22p

re538 22p

re539 22p

re540 22p

re541 22p

re542 22p

re543 22p

re544 22p

re545 22p

re546 22p

re547 22p

re548 22p

re549 22p

re550 22p

re551 22p

re552 22p

re553 22p

re554 22p

re555 22p

re556 22p

re557 22p

re558 22p

re559 22p

re560 22p

re561 22p

re562 22p

re563 22p

re564 22p

re565 22p

re566 22p

re567 22p

re568 22p

re569 22p

re570 22p

re571 22p

re572 22p

re573 22p

re574 22p

re575 22p

re576 22p

re577 22p

re578 22p

re579 22p

re580 22p

re581 22p

re582 22p

re583 22p

re584 22p

re585 22p

re586 22p

re587 22p

re588 22p

re589 22p

re590 22p

re591 22p

re592 22p

re593 22p

re594 22p

re595 22p

re596 22p

re597 22p

re598 22p

re599 22p

re600 22p

re601 22p

re602 22p

re603 22p

re604 22p

re605 22p

re606 22p

re607 22p

re608 22p

re609 22p

re610 22p

re611 22p

re612 22p

re613 22p

re614 22p

re615 22p

re616 22p

re617 22p

re618 22p

re619 22p

re620 22p

re621 22p

re622 22p

re623 22p

re624 22p

re625 22p

re626 22p

re627 22p

re628 22p

re629 22p

re630 22p

re631 22p

re632 22p

re633 22p

re634 22p

re635 22p

re636 22p

re637 22p

re638 22p

re639 22p

re640 22p

re641 22p

re642 22p

re643 22p

re644 22p

re645 22p

re646 22p

re647 22p

re648 22p

re649 22p

re650 22p

re651 22p

re652 22p

re653 22p

re654 22p

re655 22p

re656 22p

re657 22p

re658 22p

re659 22p

re660 22p

re661 22p

re662 22p

re663 22p

re664 22p

re665 22p

re666 22p

re667 22p

re668 22p

re669 22p

re670 22p

re671 22p

re672 22p

re673 22p

re674 22p

re675 22p

re676 22p

re677 22p

re678 22p

re679 22p

re680 22p

re681 22p

re682 22p

re683 22p

re684 22p

re685 22p

re686 22p

re687 22p

re688 22p

re689 22p

re690 22p

re691 22p

re692 22p

re693 22p

re694 22p

re695 22p

re696 22p

re697 22p

re698 22p

re699 22p

re700 22p

re701 22p

re702 22p

re703 22p

re704 22p

re705 22p

re706 22p

re707 22p

re708 22p

re709 22p

re710 22p

re711 22p

re712 22p

re713 22p

re714 22p

re715 22p

re716 22p

re717 22p

re718 22p

re719 22p

re720 22p

re721 22p

re722 22p

re723 22p

re724 22p

re725 22p

re726 22p

re727 22p

re728 22p

re729 22p

re730 22p

re731 22p

re732 22p

re733 22p

re734 22p

re735 22p

re736 22p

re737 22p

re738 22p

re739 22p

re740 22p

re741 22p

re742 22p

re743 22p

re744 22p

re745 22p

re746 22p

re747 22p

re748 22p

re749 22p

re750 22p

re751 22p

re752 22p

re753 22p

re754 22p

re755 22p

re756 22p

re757 22p

re758 22p

re759 22p

re760 22p

re761 22p

re762 22p

re763 22p

re764 22p

re765 22p

re766 22p

re767 22p

re768 22p

re769 22p

re770 22p

re771 22p

re772 22p

re773 22p


re774 22p

re775 22p


re

< 9-6_u_SDCARD_Socket > Rev_1.2


Circuit 1. u-SDCARD SIM Combo for QMC /w Low Detection

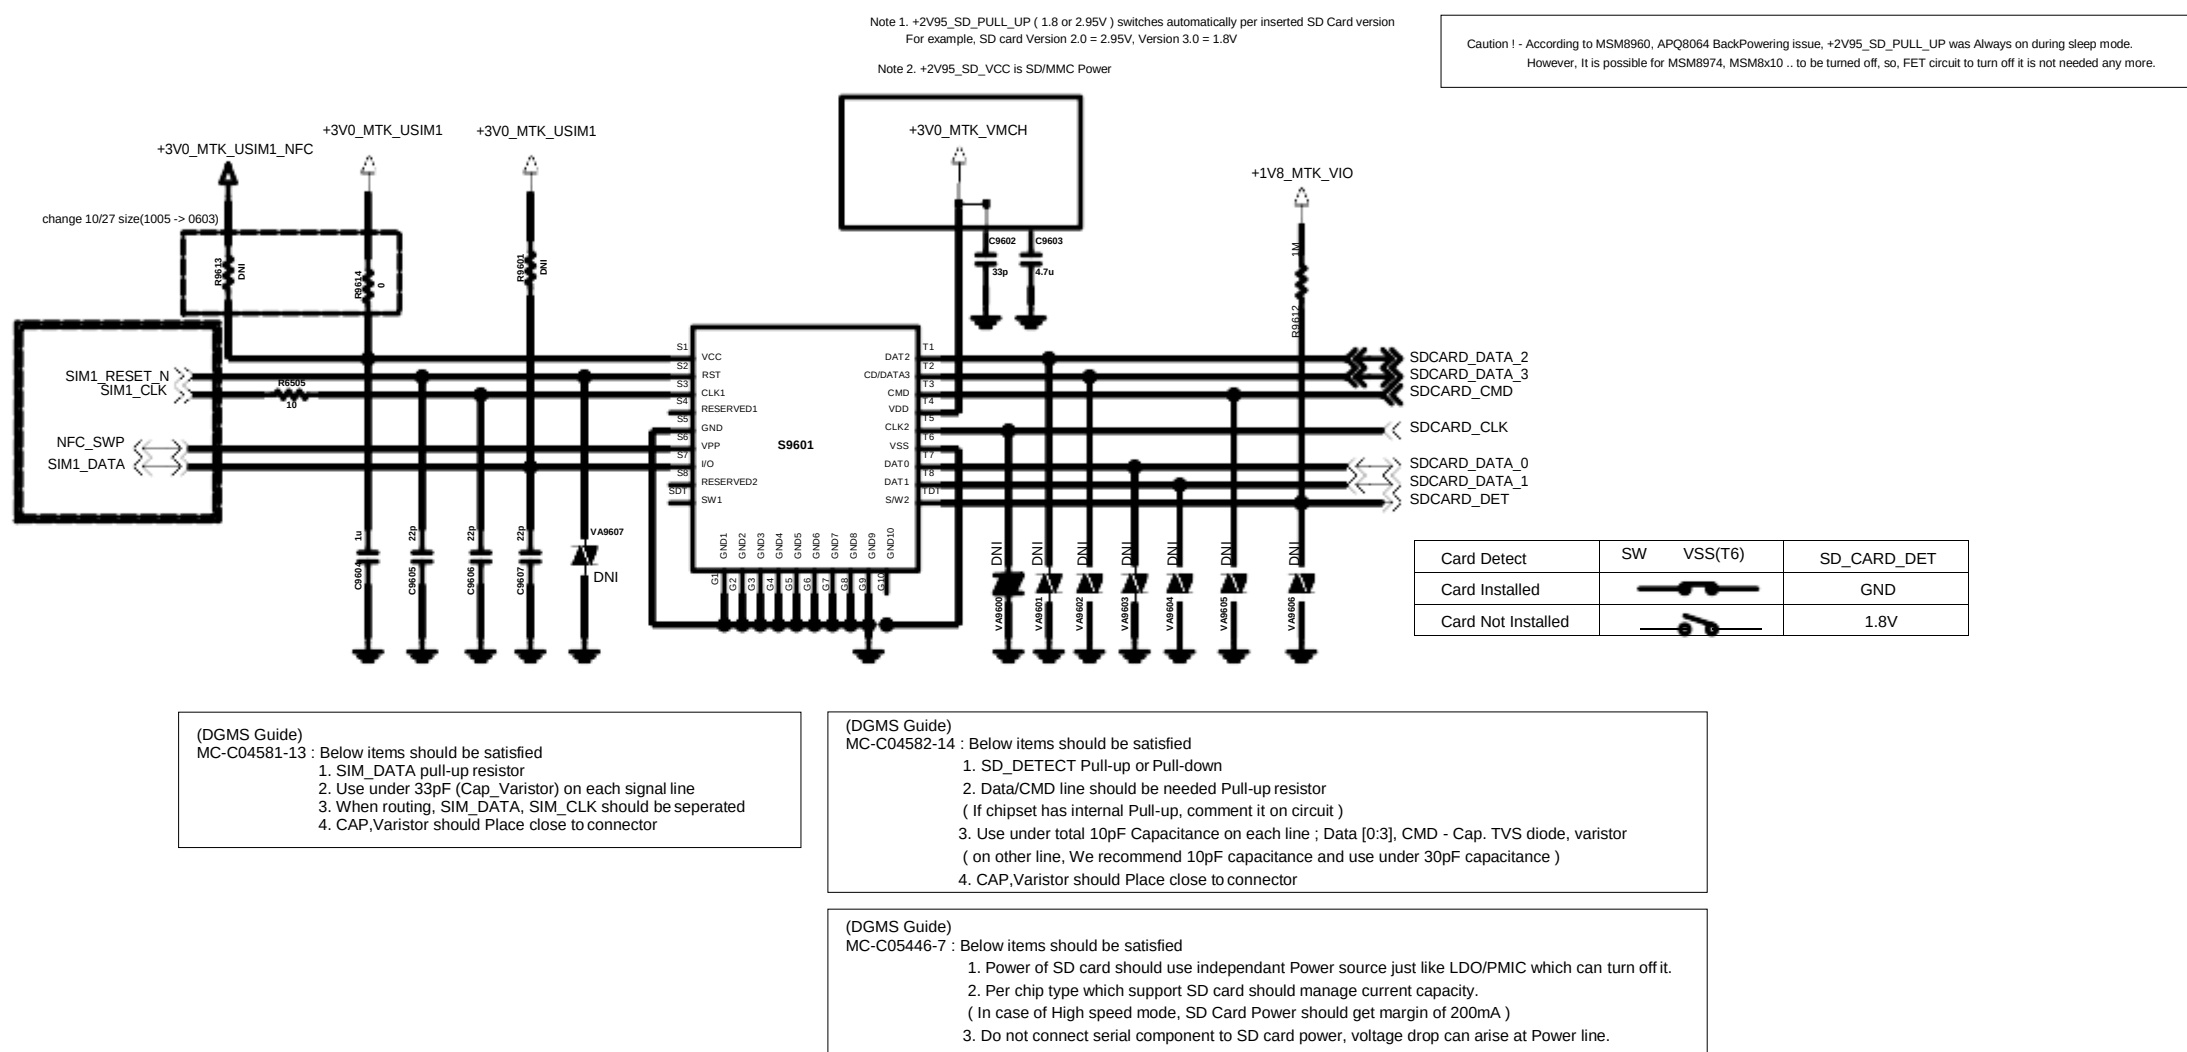


Nano SIM(EAG64650901)

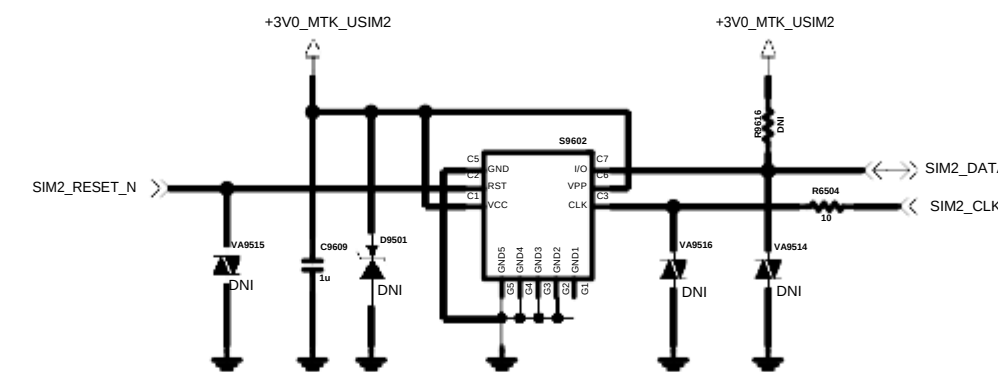


BACK KEY CONNECTOR

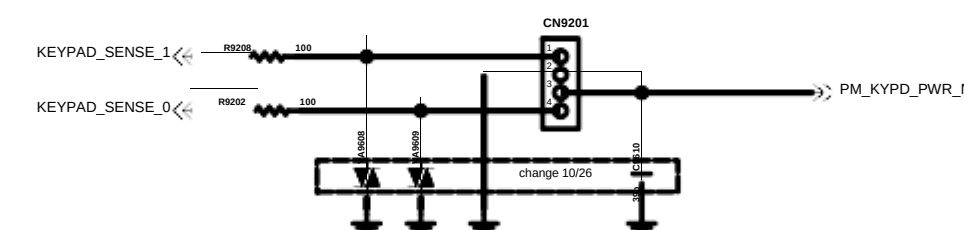


<TOP SHIELD CAN CLIP>

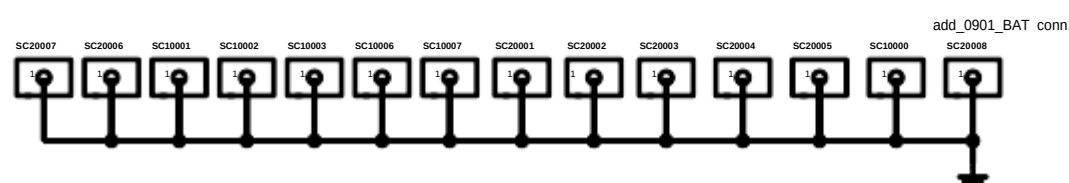

<BOT SHIELD CAN >

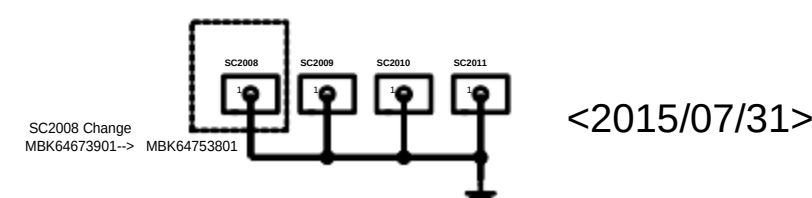


PID 6x6

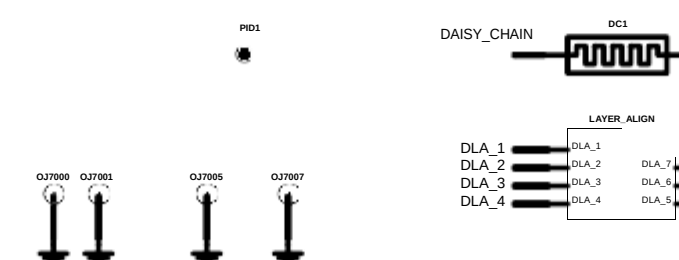

6. BGA PIN MAP


U2100_MT6732_IC,Digital Baseband Processor(Top View)

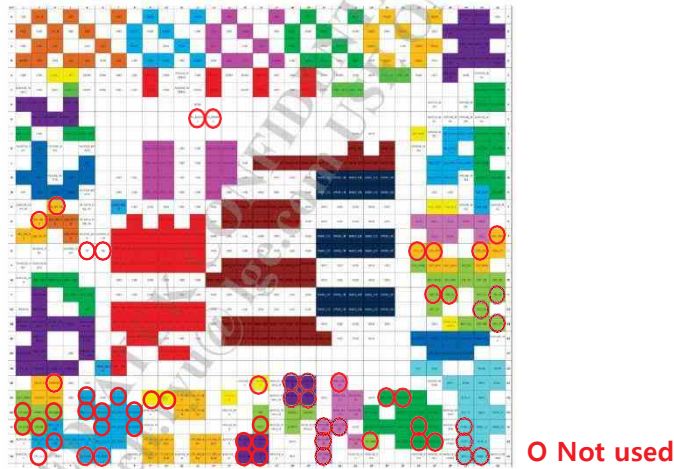


U3300_KMQ72000SMB-316,IC,MCP.eMMC4905(Top View)




U4100_MT6325_IC,PMIC (Top View)

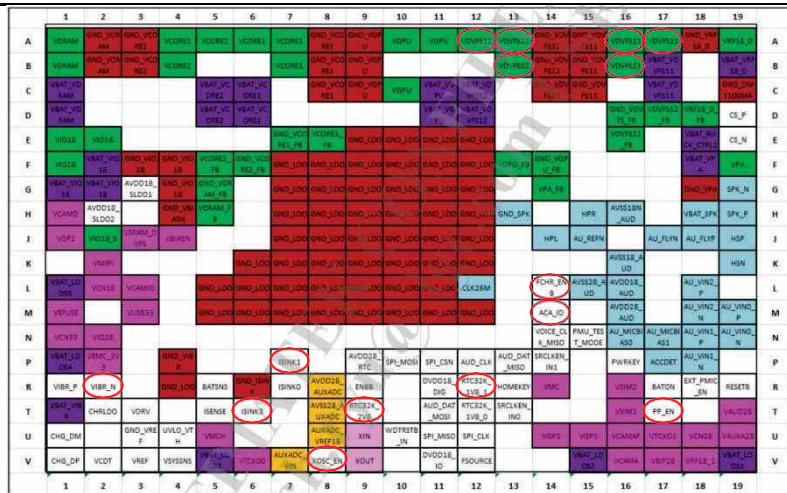


U4200_MT6311_IC,2nd PMIC (Top View)

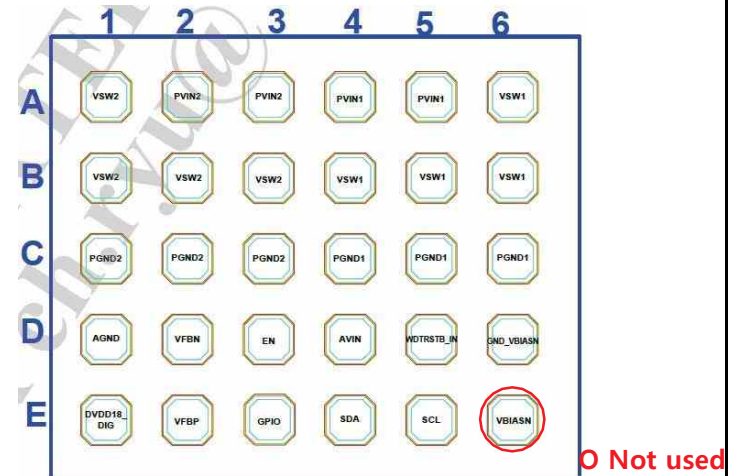

LG-K430dsF-MAIN_TOP-1

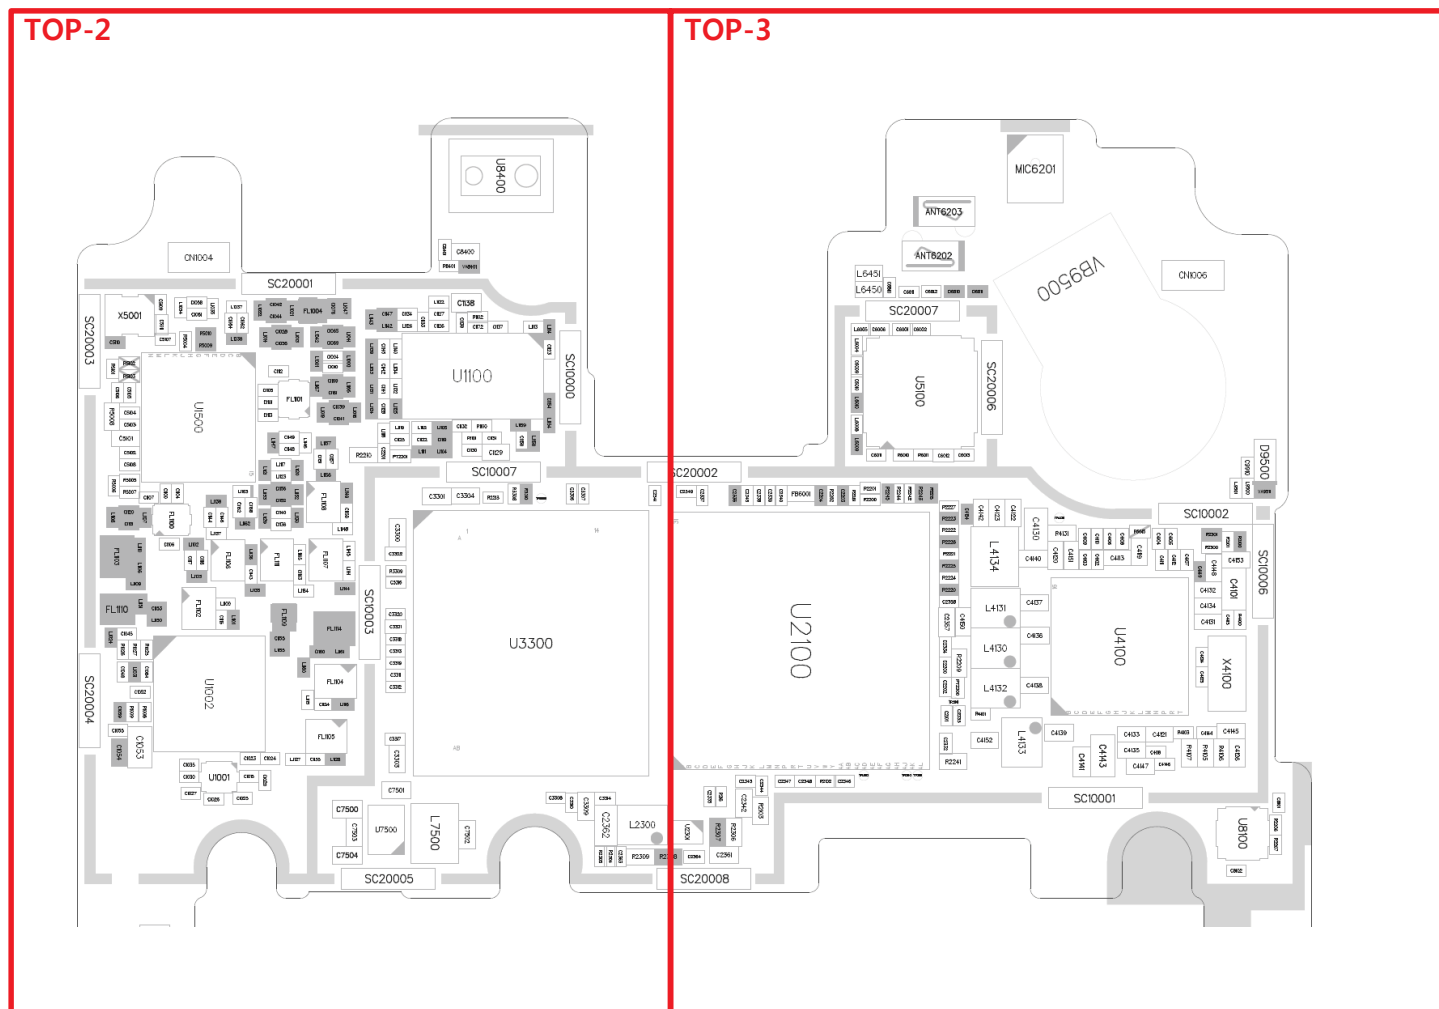

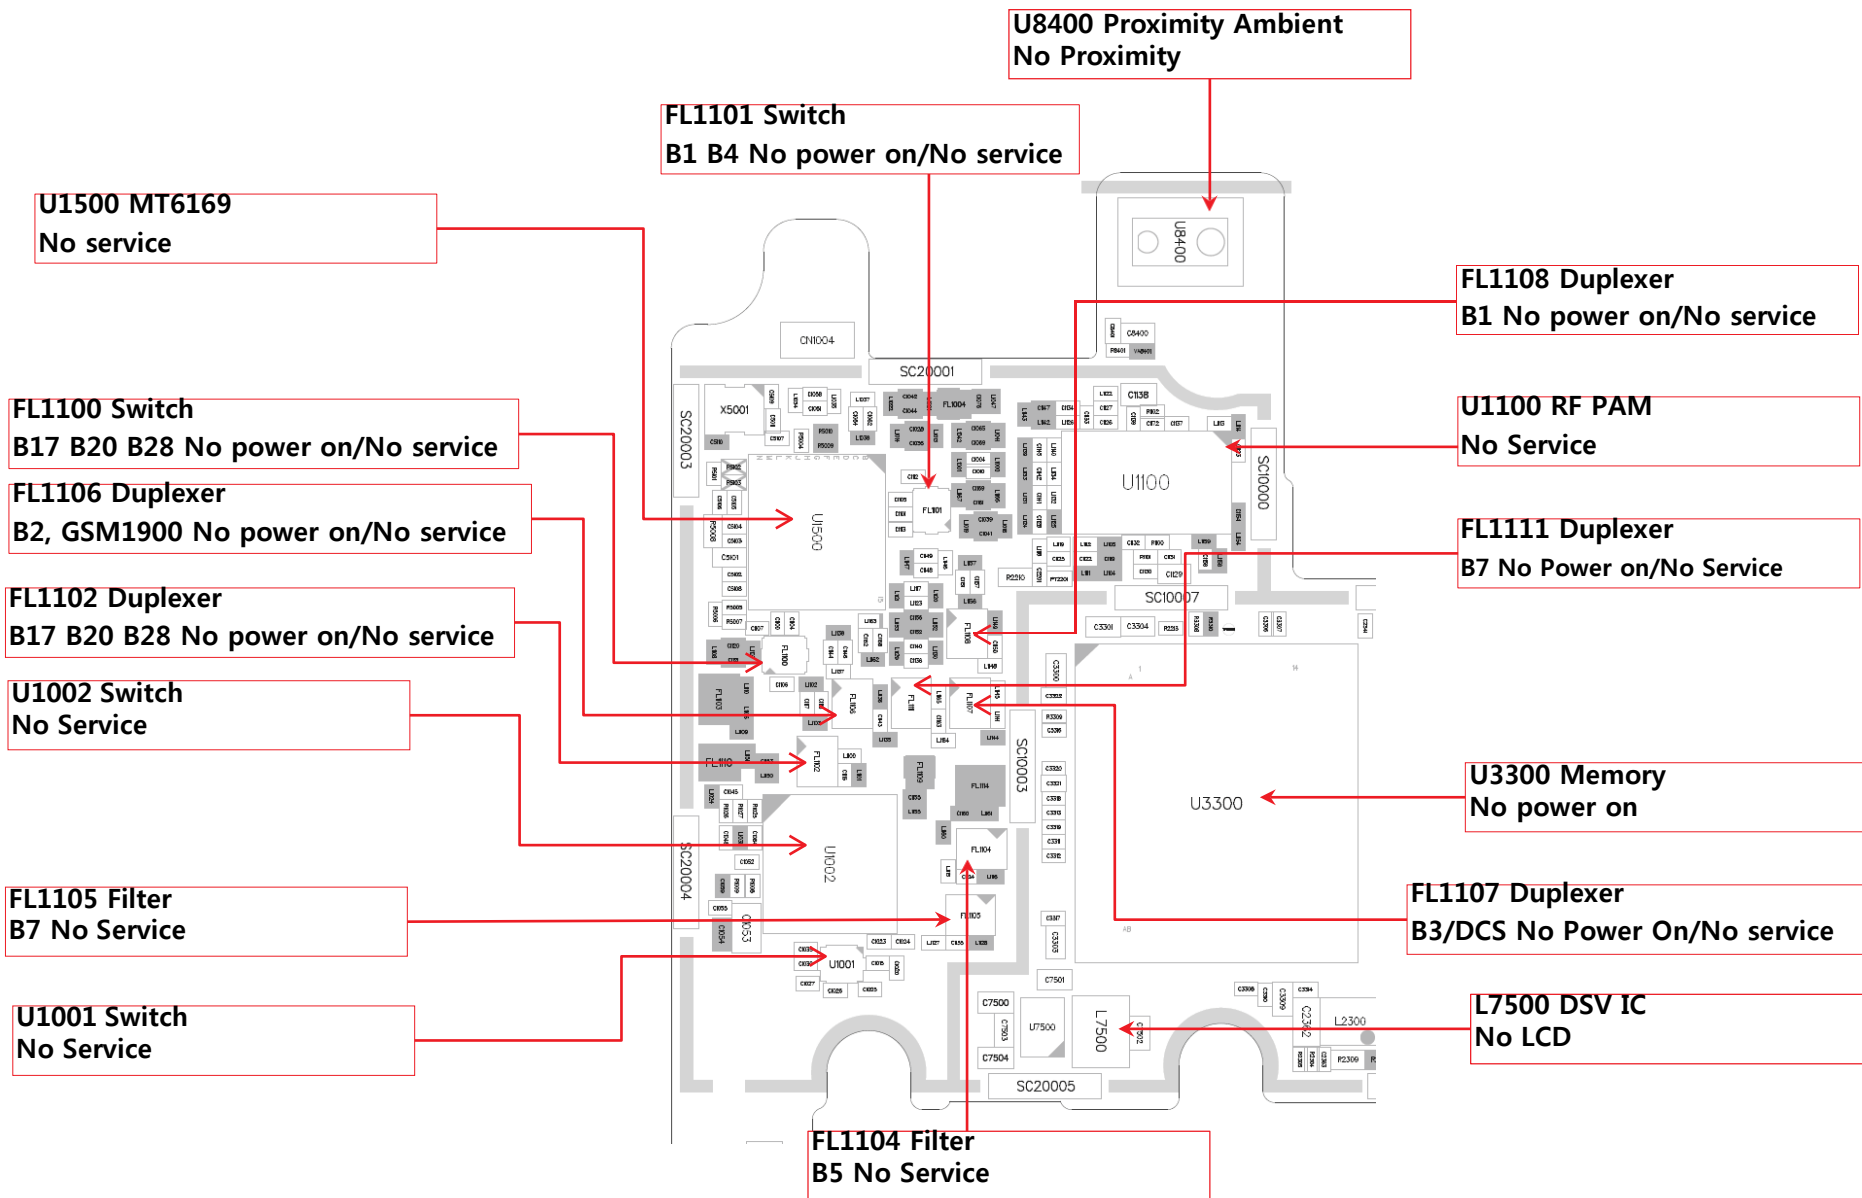


LG-K430dsF-MAIN_TOP-3




7. PCB LAYOUT

LG-K430dsF-MAIN_BOT-1

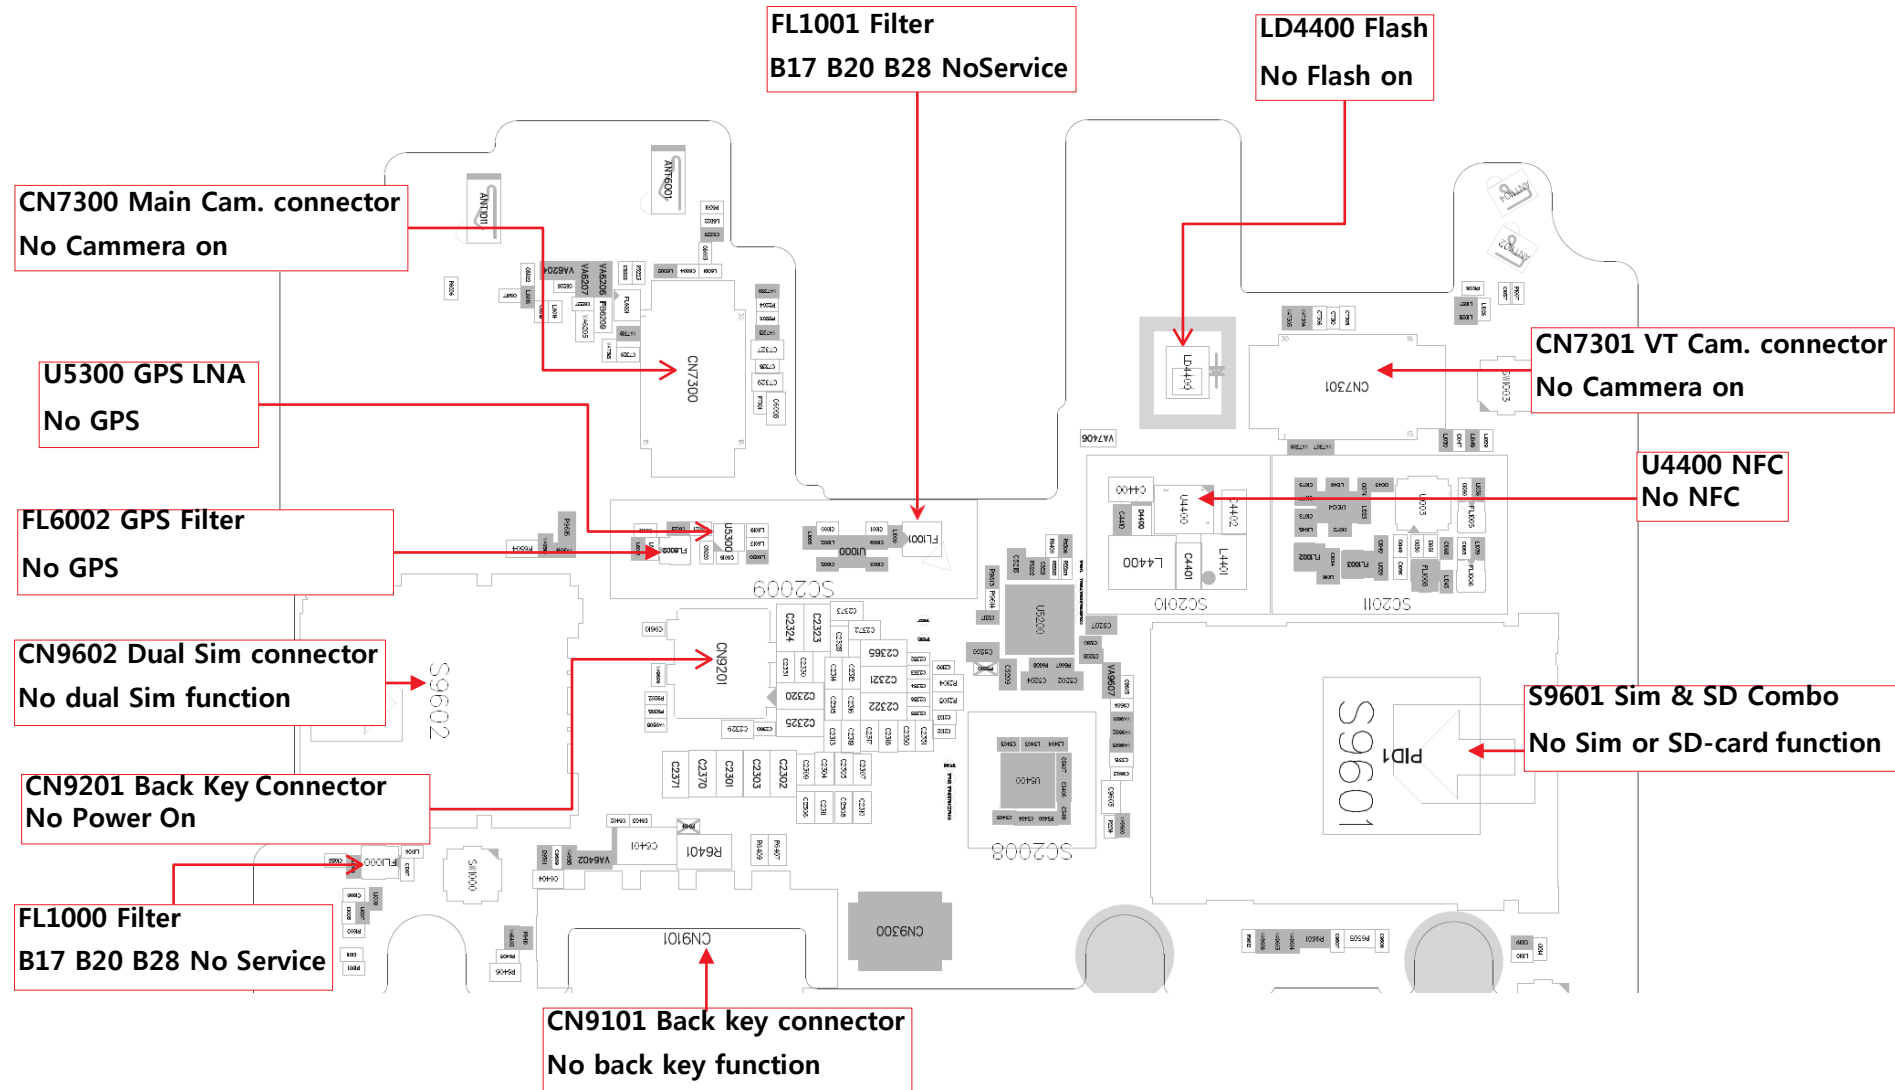


1. Hidden Menu Start

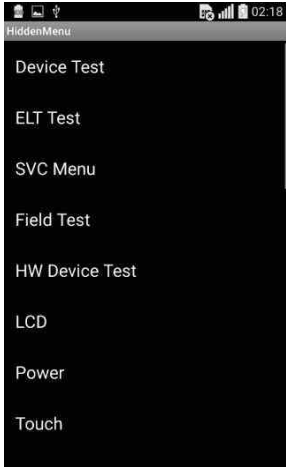

- Start shortcut key:
*#546368#*430#
- Hidden Menu List
- : Start the desired menu, click

2. Device Test

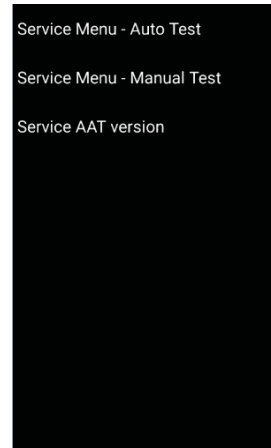


- Service Menu – Auto Test
- Service Menu – Manual Test
- Service AAT version
- Hidden Menu version Display

2. Device Test









- Service Menu – Auto Test
- All Test Items are continued one after another.
- Continuous information on the menu, giving you ability test.


3. Device test List

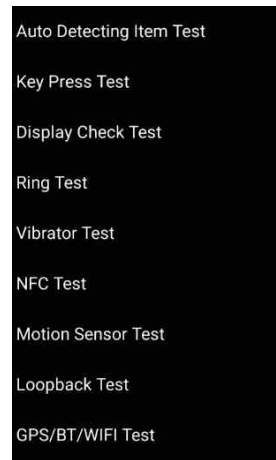

- Service Menu – Manual Test
- Each test item can be selected and performed by user.

8. HIDDEN MENU

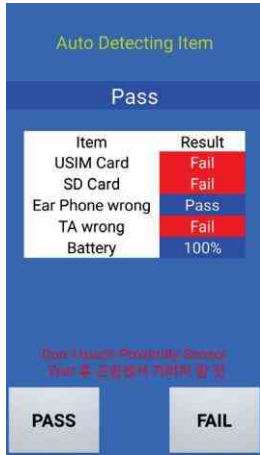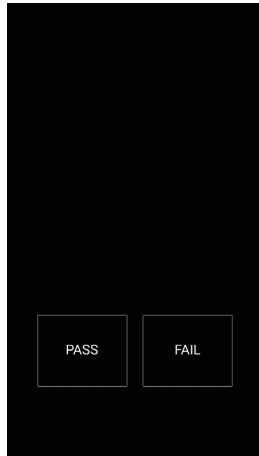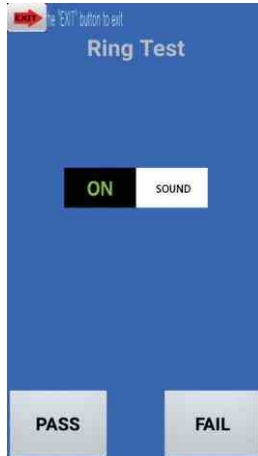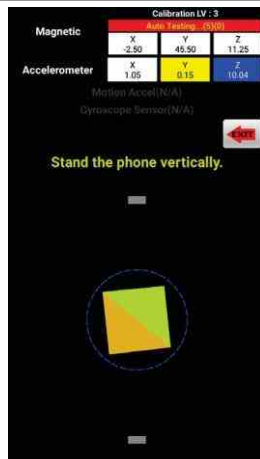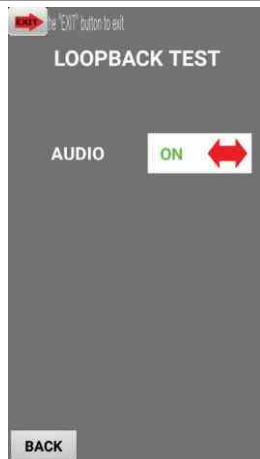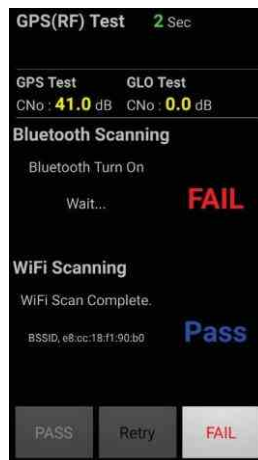1. Auto Detecting Item Test	2. Key Press Test	3. Display Check Test	4. Ring Test												
 <table><thead><tr><th>Item</th><th>Result</th></tr></thead><tbody><tr><td>USIM Card</td><td>Fail</td></tr><tr><td>SD Card</td><td>Fail</td></tr><tr><td>Ear Phone wrong</td><td>Pass</td></tr><tr><td>TA wrong</td><td>Fail</td></tr><tr><td>Battery</td><td>100%</td></tr></tbody></table> Don't touch Proximity Sensor 손을 가까이하지 않습니다 PASS FAIL	Item	Result	USIM Card	Fail	SD Card	Fail	Ear Phone wrong	Pass	TA wrong	Fail	Battery	100%	 Proximity Cal Pass:0 Block the sensor with your hand Proximity : FAR ALC sensor N/A	 PASS FAIL	 ON SOUND PASS FAIL
Item	Result														
USIM Card	Fail														
SD Card	Fail														
Ear Phone wrong	Pass														
TA wrong	Fail														
Battery	100%														
5. Vibrator Test	6. Motion Sensor Test	7. Loop Back Test	8. GPS/BT/WIFI Test												
 ON VIBRATION PASS FAIL	 Calibration LV : 3 <table><thead><tr><th></th><th>X</th><th>Y</th><th>Z</th></tr></thead><tbody><tr><td>Magnetic</td><td>-2.50</td><td>45.50</td><td>11.25</td></tr><tr><td>Accelerometer</td><td>1.05</td><td>0.15</td><td>10.94</td></tr></tbody></table> Motion Accel(N/A) Gyroscope Sensor(N/A) Stand the phone vertically.		X	Y	Z	Magnetic	-2.50	45.50	11.25	Accelerometer	1.05	0.15	10.94	 LOOPBACK TEST AUDIO ON BACK	 GPS(RF) Test 2 Sec GPS Test GLO Test CNo : 41.0 dB CNo : 0.0 dB Bluetooth Scanning Bluetooth Turn On Wait... FAIL WiFi Scanning WiFi Scan Complete. BSSID, e8:cc:18:f1:90:b0 Pass PASS Retry FAIL
	X	Y	Z												
Magnetic	-2.50	45.50	11.25												
Accelerometer	1.05	0.15	10.94												

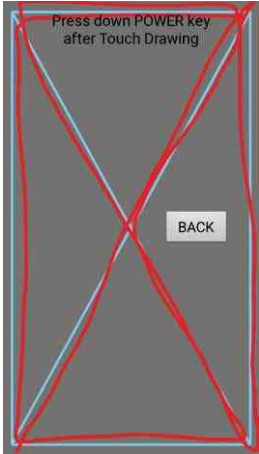9. Touch Draw -Manual	10. Camera(Main) Test	11. Camcorder Test	12. Camera(VT) Test
			

9. DOWNLOAD

1. Summary

Tool Version	DLL name	USB Driver	
LG flash tool 2.0.1.5	LGK430ds_20160128_LGFLAS Hv215.dll	LGUnitedMobileDriver_S50MAN311AP22_ML_WHQL_Ver_3.11.3	
Please Check the Version to "B2B"			
H/W			
	Name	Part No.	SW
D/L Cable	Micro 5P (56-open-910K) USB DLC		TOT/KDZ




2. . USB COM port Setting



3. USB D/L Cable setting




4. Flash tool D/L setting

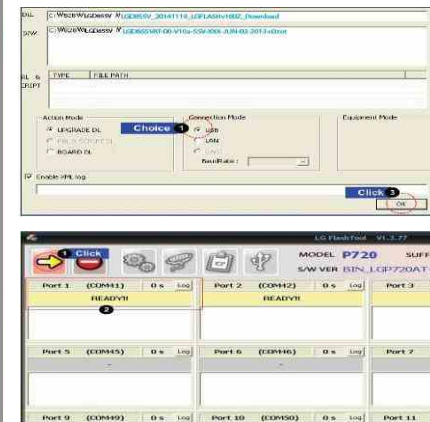


※ If you want more information, please refer B2B's Notification "Download User Guide".

1. Summary


CAL INFORMATION		
S/W VERSION		
Please Check the Version to "B2B"		
H/W	Name	Part No.
PIF	PIF200	BJAY0024021
USB Cable	USB Cable	RAD32247898
Power Cable	DC Power Cable	RAD32247878
I/O Cable		
RF Cable Main		
Power Supply PIF		
Power Supply Phone	Power supply 5.0V	
PF Test Equipment		
Notice	1. Use the Battery (Refer to Attached ppt) 1) Phone states: Power off 2) If do not use the battery, TX fails. 2. Port Setting (Refer to Attached ppt) 1) Uart Port1 : Use the "LGE Mobile USB Serial Port"	
CMW 500 RF Cable connection		

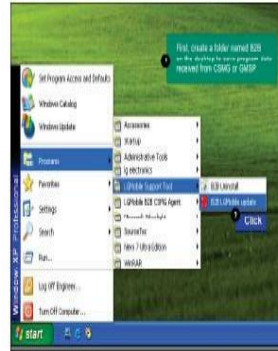


2. . USB COM port Setting

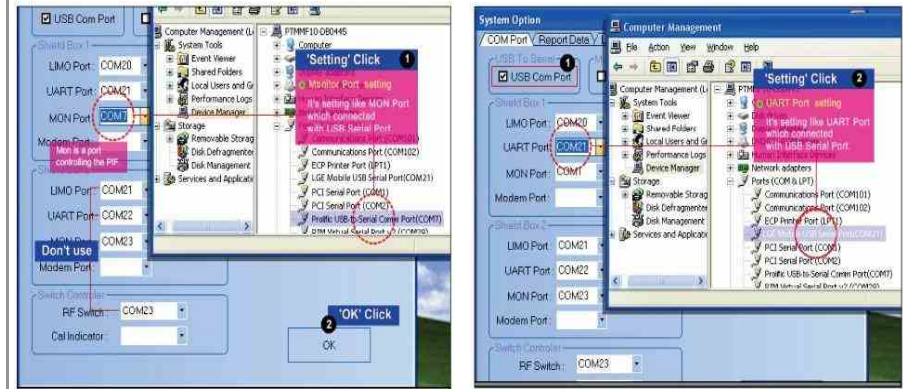

3. Calibration Cable setting

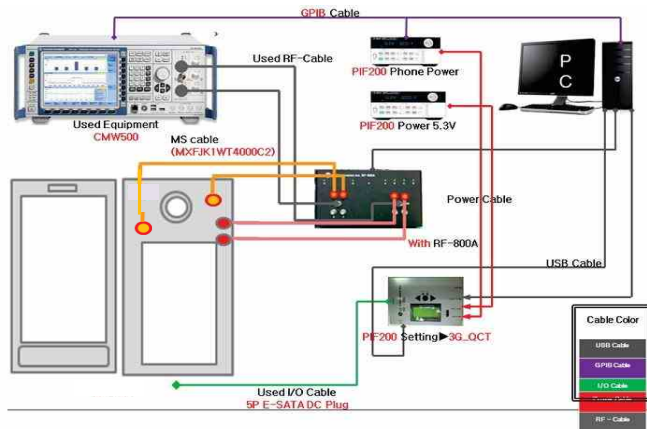

4. Calibration Tool

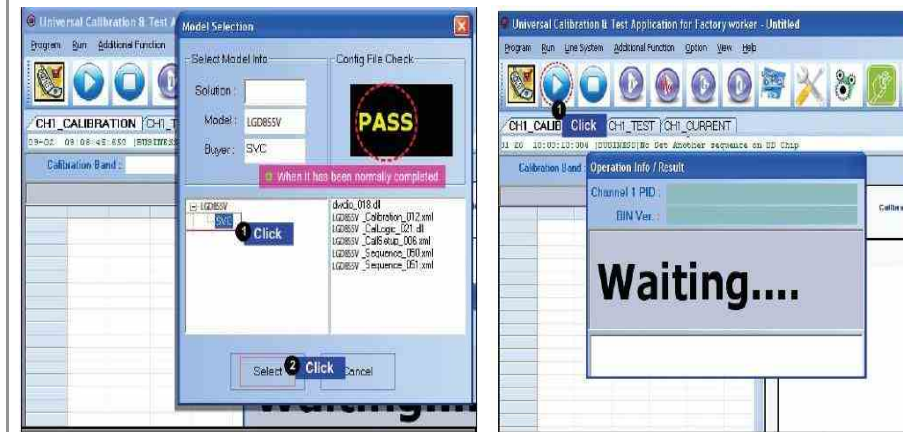

11. DISASSEMBLE GUIDE

Removal of Battery Cover



Removal of battery cover using nail nick shown in red circle



Removal of Battery



Removal of battery using nail nick shown in red circle



Removal of Rear Cover


1) Unfastening of 11 screws shown in red circle



2) Disassembly of hooks on left, right and top sides (Left figure) with the directions shown in right figure.




3) Moving of rear cover in the direction shown in figure without disassembly of bottom side of the rear cover

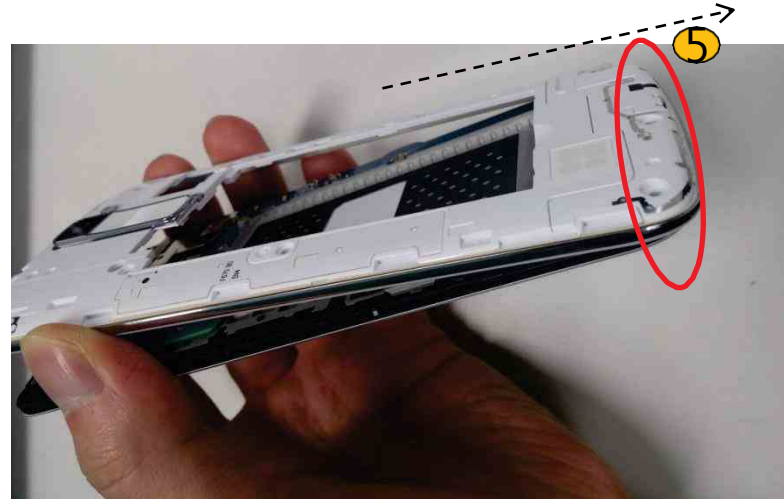

PCB Remove

Disconnection of connectors
shown in red circle



-Total 4 points

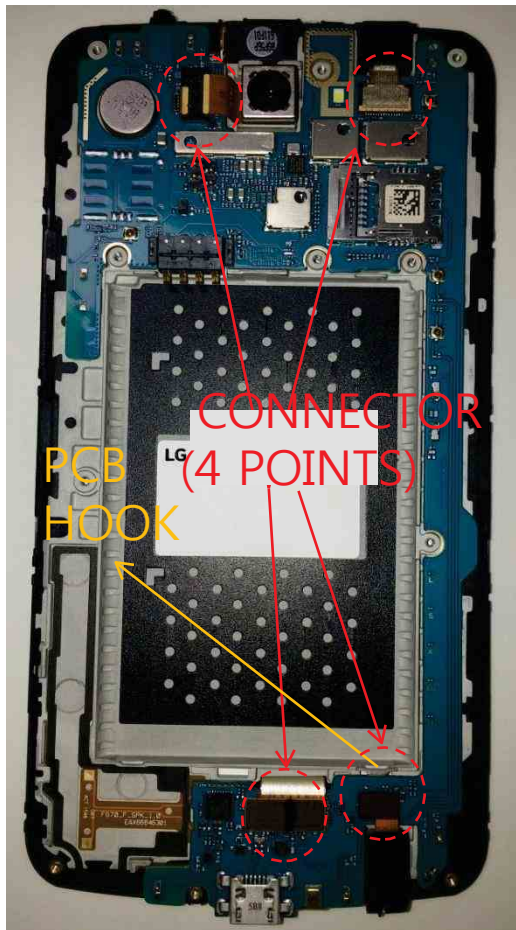


Removal step of PCB

1. Bottom side hook


2. Top side hook

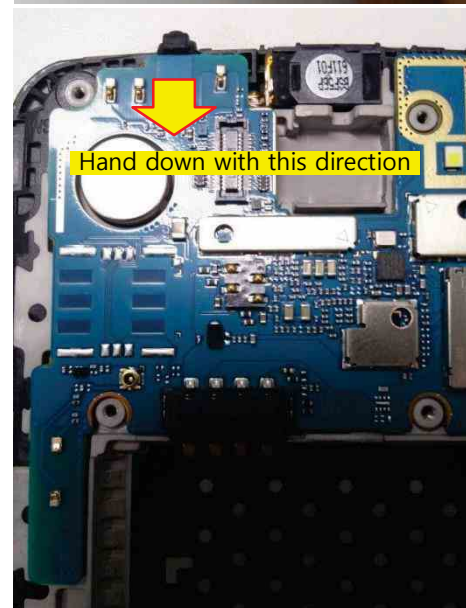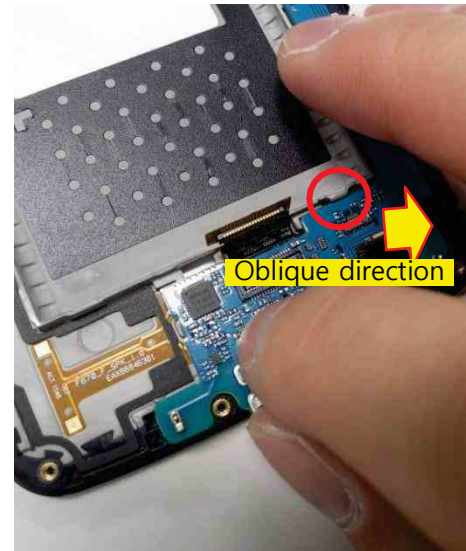

11. DISASSEMBLE GUIDE

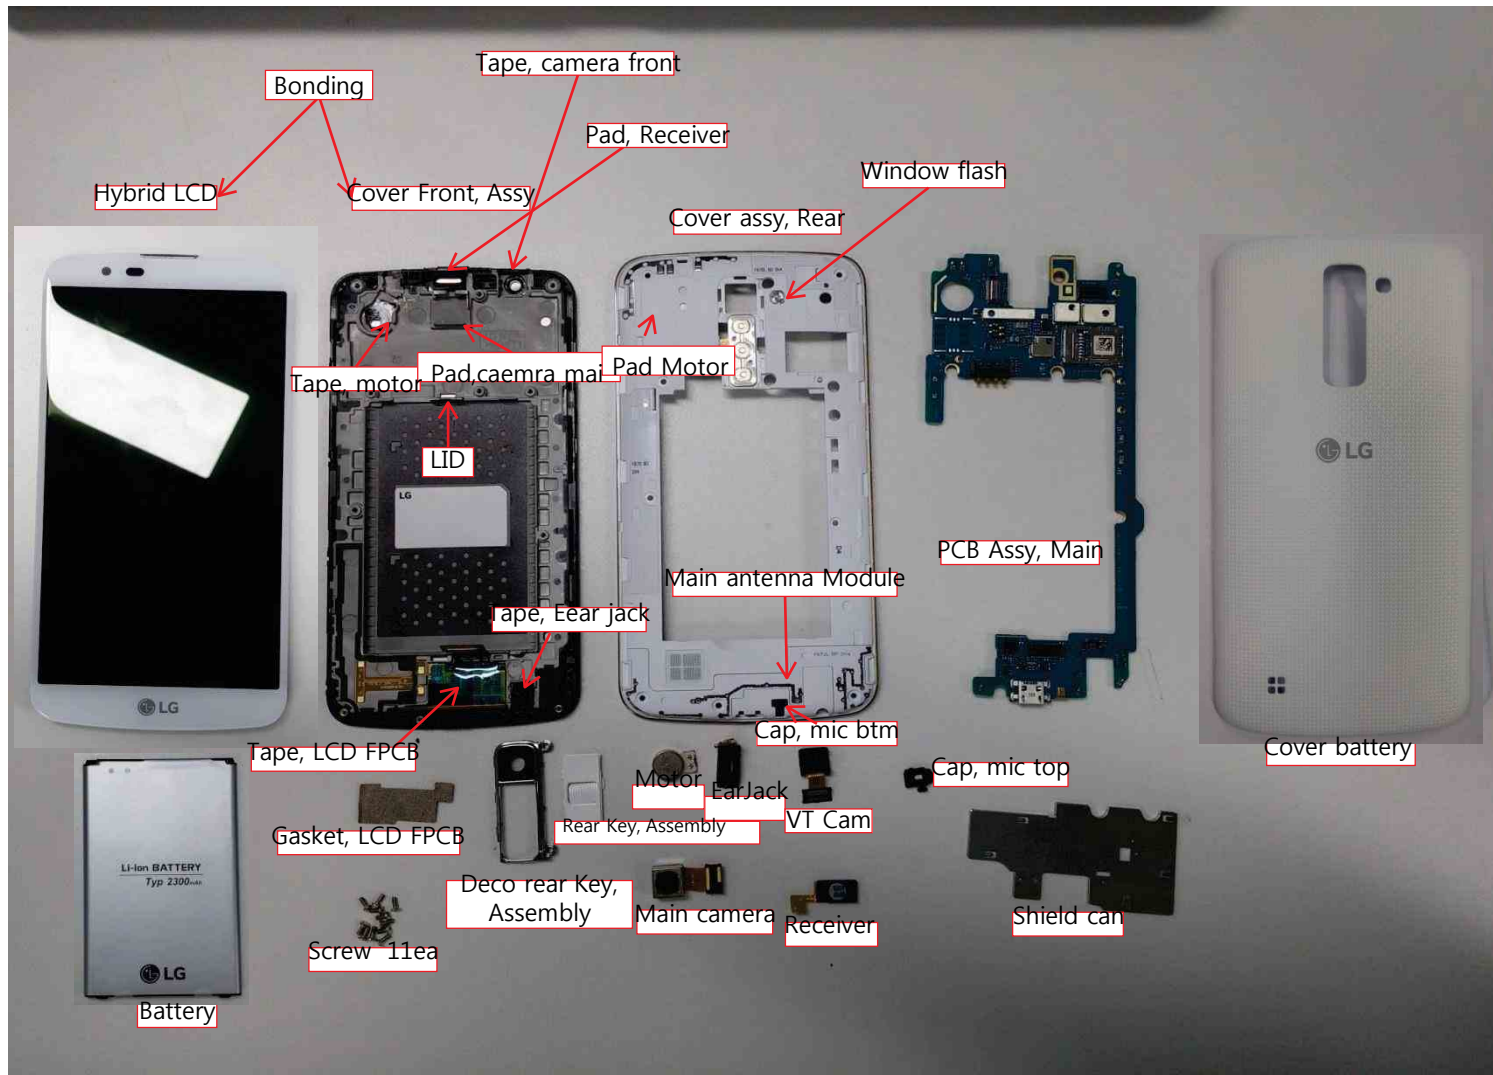

12. EXPLODED VIEW

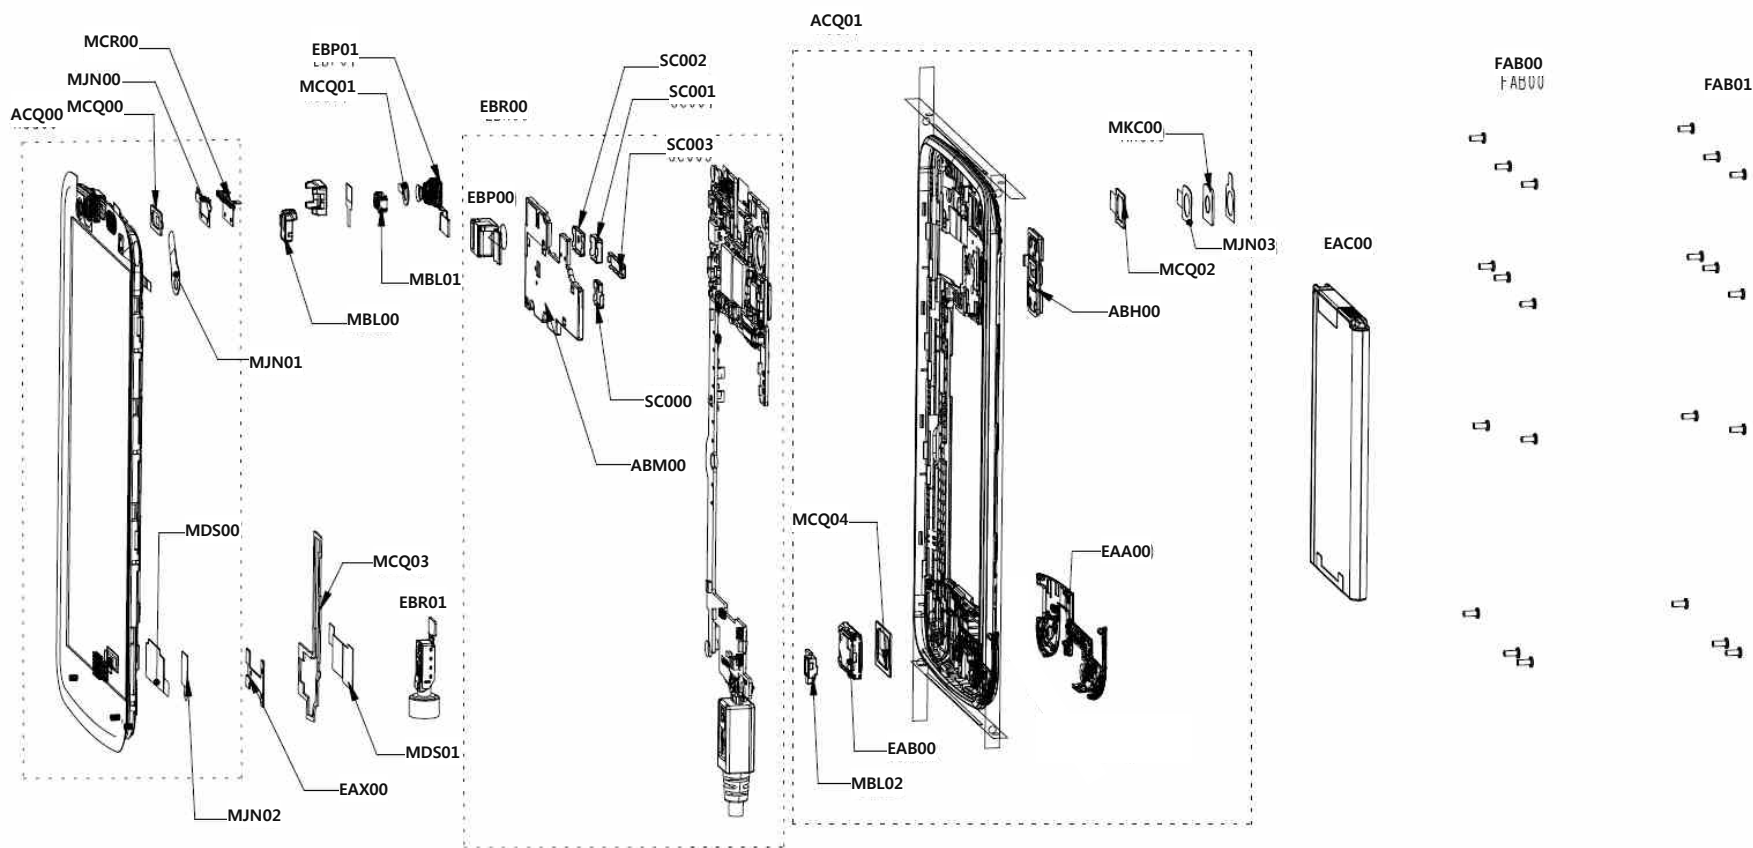

Location	Description	Location	Description	Location	Description	Location	Description
EBR00	PCB Assembly,Main	MDS01	Gasket	EBR01	PCB Assembly,Flexible	EAA00	PIFA Antenna,Multiple
SC000	Can,Shield	MCQ00	Damper	MBL00	Cap	FAB00	Screw,Machine
SC001	Can,Shield	MCR00	Decor	ACQ01	Cover Assembly,Rear	FAB01	Screw,Tapping
SC002	Can,Shield	MDS00	Gasket	MCQ04	Damper,Speaker	EAC00	Rechargeable Battery,Lithium Ion
SC003	Can,Shield	MJN01	Tape	MBL02	Cap		
ABM00	Can Assembly,Shield	MJN02	Tape	ABH00	Button Assembly		
EBP00	Camera Module	MJN00	Tape	MKC00	Window,Camera		
ACQ00	Cover Assembly	MCQ01	Damper,Camera	MCQ02	Damper,Camera		
MCQ03	Damper,Speaker	MBL01	Cap	MJN03	Tape,Window		
EAX00	PCB,Sub	EBP01	Camera Module	EAB00	Speaker,Dual Mode		

13. REPLACEMENT PART LIST

P/N	Location no	Description
EBR82267401	EBR00	PCB Assembly,Main
EXXY0018701	X4100	Crystal
MBV62321701	SC10000,SC10001,SC10002,SC10003,SC10006,SC10007,SC20001,SC20002,SC20003,SC20004,SC20005,SC20006,SC20007,SC20008	Clip
SFBH0008102	FB6208	Filter,Bead
EAB62950801	MIC6201	Microphone,Condenser
EAG64389801	ANT6202,ANT6203	C-Clip
EAG64451301	CN1003,CN1009	Connector,Terminal
EAG64451501	CN1001,CN1002,CN1004,CN1005,CN1006,CN1007,CN1008	Connector,Terminal
EAG64851501	ANT6200,ANT6201	C-Clip
EAM62792601	FL1100,FL1101	Filter,Separator,Switch
EAM63950301	FL1108	Filter,Duplexer
EAM63290701	FL1103	Filter,Duplexer
EAM63431001	FL1102	Filter,Duplexer
EAM63950001	U1001	Filter,Separator,Switch
EAM63950601	FL1111	Filter,Duplexer
EAM63950701	FL1105	Filter,Duplexer
EAM63990101	FL1107	Filter,Duplexer
EAM63990401	FL1106	Filter,Duplexer
EAM63990501	FL1104	Filter,Duplexer
EAN62637201	U8100	IC,Acceleration Sensor
EAN62867201	U8700	IC,Hall Effect Switch
EAN63406501	U1500	IC,RF Transceiver,4G
EAN63486501	U5100	IC,WiFi
EAN63748001	U4100	IC,PMIC
EAN64089201	U8400	IC,Proximity
EAN64089501	U7500	IC,DC,DC Converter
EAN64106301	U2100	IC,Digital Baseband Processor,4G
EAN64107501	U1100	IC,Power Amplifier
EAT63233201	U1002	Module,Tx Module
EAW62983801	X5001	Oscillator,VCTCXO
EBG62665701	PT2200,PT2201	Thermistor,NTC
EDSY0010501	D9500	Diode,Switching
EAN64227201	U3300	IC,MCP,eMMC
EAM63450301	FL1001	Filter,Saw
EAM63491001	FL1000	Filter,Saw
EAB62950801	MIC6201	Microphone,Condenser
EAG63772101	SW1000,SW1001,SW1002,SW1003	Connector,RF
EAG64051601	CN9101	Connector,Terminal Block
EAG64149801	CN9200	Connector,I/O

13. REPLACEMENT PART LIST

EAG64370001	CN9201	Connector,Terminal Block
EAG64389801	ANT6202,ANT6203	C-Clip
EAG64650901	S9602	Socket,DIMM/SIMM
EAH61992801	D4400	Diode,Schottky
EAG64672301	ANT1100,ANT1101,ANT1102,ANT1104	C-Clip
EAG64729801	CN6814	Connector,BtoB
EAG64850201	S9601	Socket,DIMM/SIMM
EAH62033201	VA6203	Diode,TVS
EAH63092501	D6401	Diode,TVS
EAM63130101	FL6002	Filter,Saw
EAM63510201	U1003	Filter,Separator,Switch
EAM63670001	FL6001	Filter,Saw
EAM63930901	FL1006	Filter,Saw
EAM63992001	FL1007	Filter,Separator,Switch
EAN62677301	U4700	IC,Charger
EAN62736101	U5300	IC,RF Amplifier
EAN62766201	U4400	IC,DC,DC Converter
EAN64011501	U7600	IC,Capacitive Touch Sensor
EAV62991901	LD4400	LED,Flash
ENBY0036001	CN5001	Connector,BtoB
ENBY0040701	CN7300,CN7301	Connector,BtoB
MBK64753801	SC000	Can,Shield
MBK64633901	SC001	Can,Shield
MBK64674001	SC002	Can,Shield
MBK64693101	SC003	Can,Shield
SEVY0003601	VA7406	Varistor
SEVY0008102	VA7318	Varistor
SEVY0008901	C6230,C6231,VA5004	Varistor
SFBH0007101	FB6200,FB6201,FB6202,FB6203	Filter,Bead
SFBH0008102	FB6208	Filter,Bead
SFEY0015301	FL6400	Filter,EMI/Power
EAM63390601	FL1005	Filter,Saw
EAM62570201	FL5002	Filter,EMI/Power
EAM62630501	FL5001,FL5003	Filter,EMI/Power
SEVY0007902	VA9608,VA9609	Varistor
SEVY0005402	VA6401	Varistor
ABM75276402	ABM00	Can Assembly,Shield
EBP62762101	EBP00	Camera Module
ACQ88868302	ACQ00	Cover Assembly
MCQ68825501	MCQ03	Damper,Speaker

13. REPLACEMENT PART LIST

EAX66846301	EAX00	PCB,Sub
MDS65591201	MDS01	Gasket
MCQ68825301	MCQ00	Damper
MCR66452001	MCR00	Decor
MDS65591001	MDS00	Gasket
MJN69967701	MJN01	Tape
MJN69948501	MJN02	Tape
MJN69928601	MJN00	Tape
MCQ68825401	MCQ01	Damper,Camera
MBL66859701	MBL01	Cap
EAB63668201	EAB010400	Receiver
EAU63423301	EAU010000	Motor,DC
EBP62722001	EBP01	Camera Module
EBR81629201	EBR01	PCB Assembly,Flexible
MBL66859601	MBL00	Cap
MJN69932101	MJN061100	Tape,Protect
ACQ88635702	ACQ01	Cover Assembly,Rear
MCQ68806101	MCQ04	Damper,Speaker
MBL66841601	MBL02	Cap
EAX66728101	EBR070500	PCB,Flexible
ABH75839802	ABH00	Button Assembly
MKC65940601	MKC00	Window,Camera
MJN69949101	MJN061100	Tape,Protect
MCQ68805601	MCQ02	Damper,Camera
MJN69988901	MJN03	Tape,Window
EAB64188201	EAB00	Speaker,Dual Mode
EAA64286401	EAA00	PIFA Antenna,Multiple
GMEY0014301	FAB00	Screw,Machine
FAB32218901	FAB01	Screw,Tapping
MEZ66387422	MEZ002100	Label,Approval
EAB64228801	EAB010200	Earphone,Stereo
EAD62377902	EAD010000	Cable,Assembly
EAY62751801	EAY060000	Adapters
MCK69135204	MCK004100	Cover,Battery
MJN69928806	MJN107400	Tape,USP Film
MBM65438701	MBM062600	Card,Quick Reference
EAC63158307	EAC00	Rechargeable Battery,Lithium Ion