

A



I2C0

	<u>DEVICE</u>	<u>BINARY</u>	<u>7-BIT HEX</u>	<u>8-BIT HEX</u>
	ADI PMU:	1110100X	0X74	0XE8
	LM3534 BL DRIVER:	1100011X	0X63	0XC6
	TRISTAR:	0010101X	0XA1	0X34
	CHESTNUT:	0100111X	0X27	0X4E

I2C1

	TIGRIS CHARGER:	1110101X	0X75	0XE8
	LINEAR VIBE:	1011010X	0X5A	0XB4
	CS35L19B AMP:	1000000X	0X40	0X80
MESA EEPROM (MEMORY):		1011101X	0X56	0XAC
MESA EEPROM (ID):		1011110X	0X5E	0XBC

I2C2

	CT814 ALS:	0101001X	0X29	0X52
	*DISPLAY EEPROM:	1010001X	0X51	0XA2

*DISPLAY EEPROM HAS BEEN REMOVED. ADDRESS RESERVED FOR POSSIBLE USE IN THE FUTURE.

RCAM I2C

	OPEL STROBE DRIVER:	1100011X	0X63	0XC6
	REAR FACING CAM:	0010000X	0X10	0X20
	VCM AF DRIVER:	0001100X	0X0C	0X18

FCAM I2C

	FRONT FACING CAM:	0010000X	0X10	0X20
--	-------------------	----------	------	------

NOTE: ACCEL, GYRO, COMPASS ALL USING SPI (VIA OSCAR) FOR AP COMMUNICATION.

FIJI: DIGITAL I/O, BOOTSTRAPPING

D

C

B


A

D

C

B

A

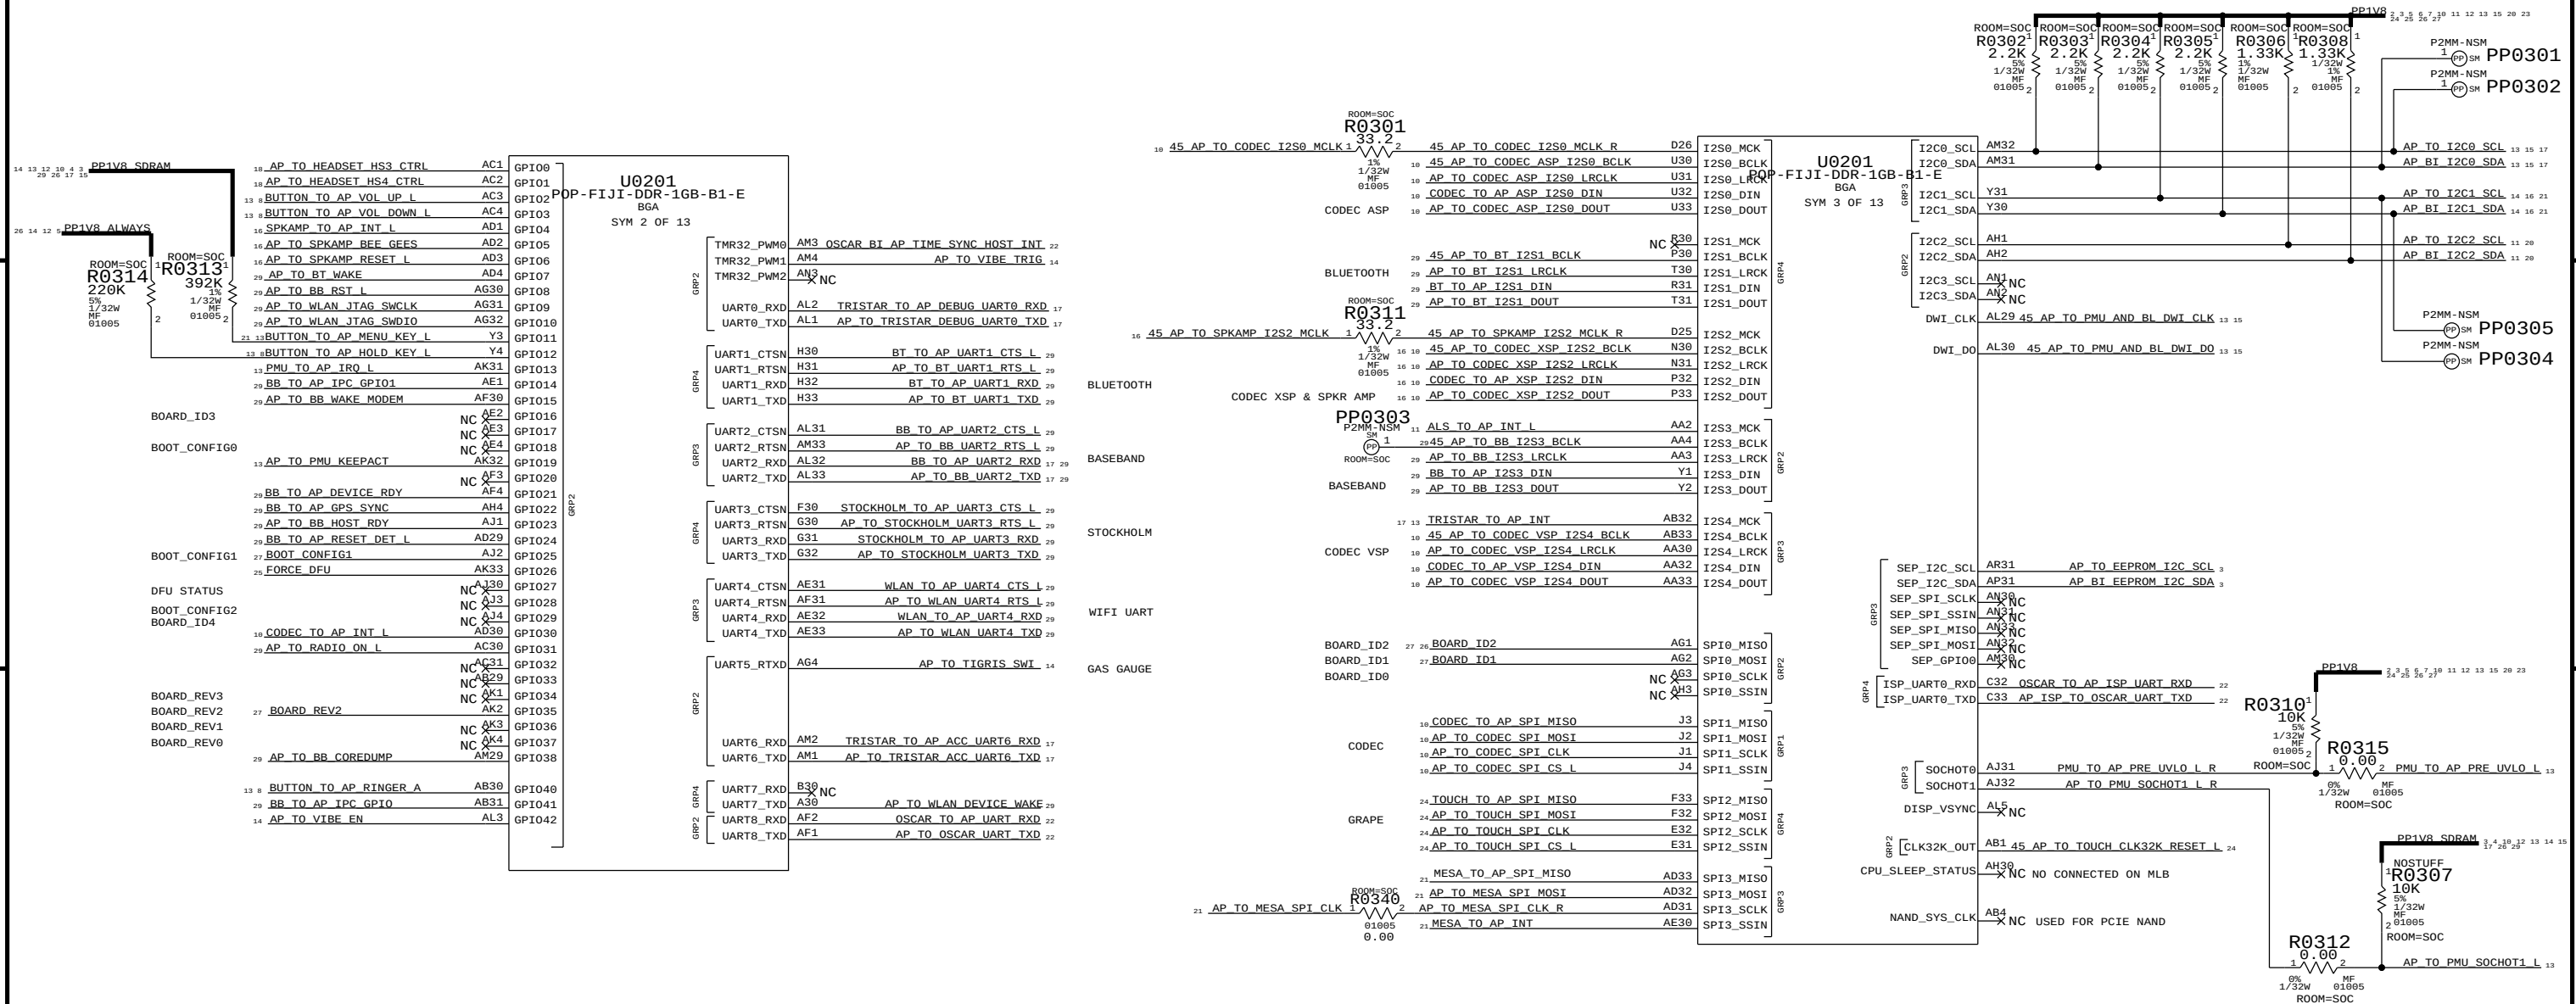

REMOVED HOLD + MENU KEY
BUFFERS SINCE NOT NEEDED FOR FIJI

[illegible]

FIJI: VDDCA, VDD1/2, VDDQ, VDD, VDD_FIXED, VDD_CPU, VDD_GPU

VDDCA, VDD1/2, VDDQ

VDD

VDD_CPU, VDD_GPU

NOTE: CKEIN CONFIRMED 1.8V TOLERANT


NOTE: SOME VENDORS HAVE INTERNAL DIVIDER CIRCUITS

4 OF 54

FIJI: VDDI0D, VDDI018, VDD_VAR_SOC


JUST A FEW GNDS

VDD_SRAM, VDD_SOC

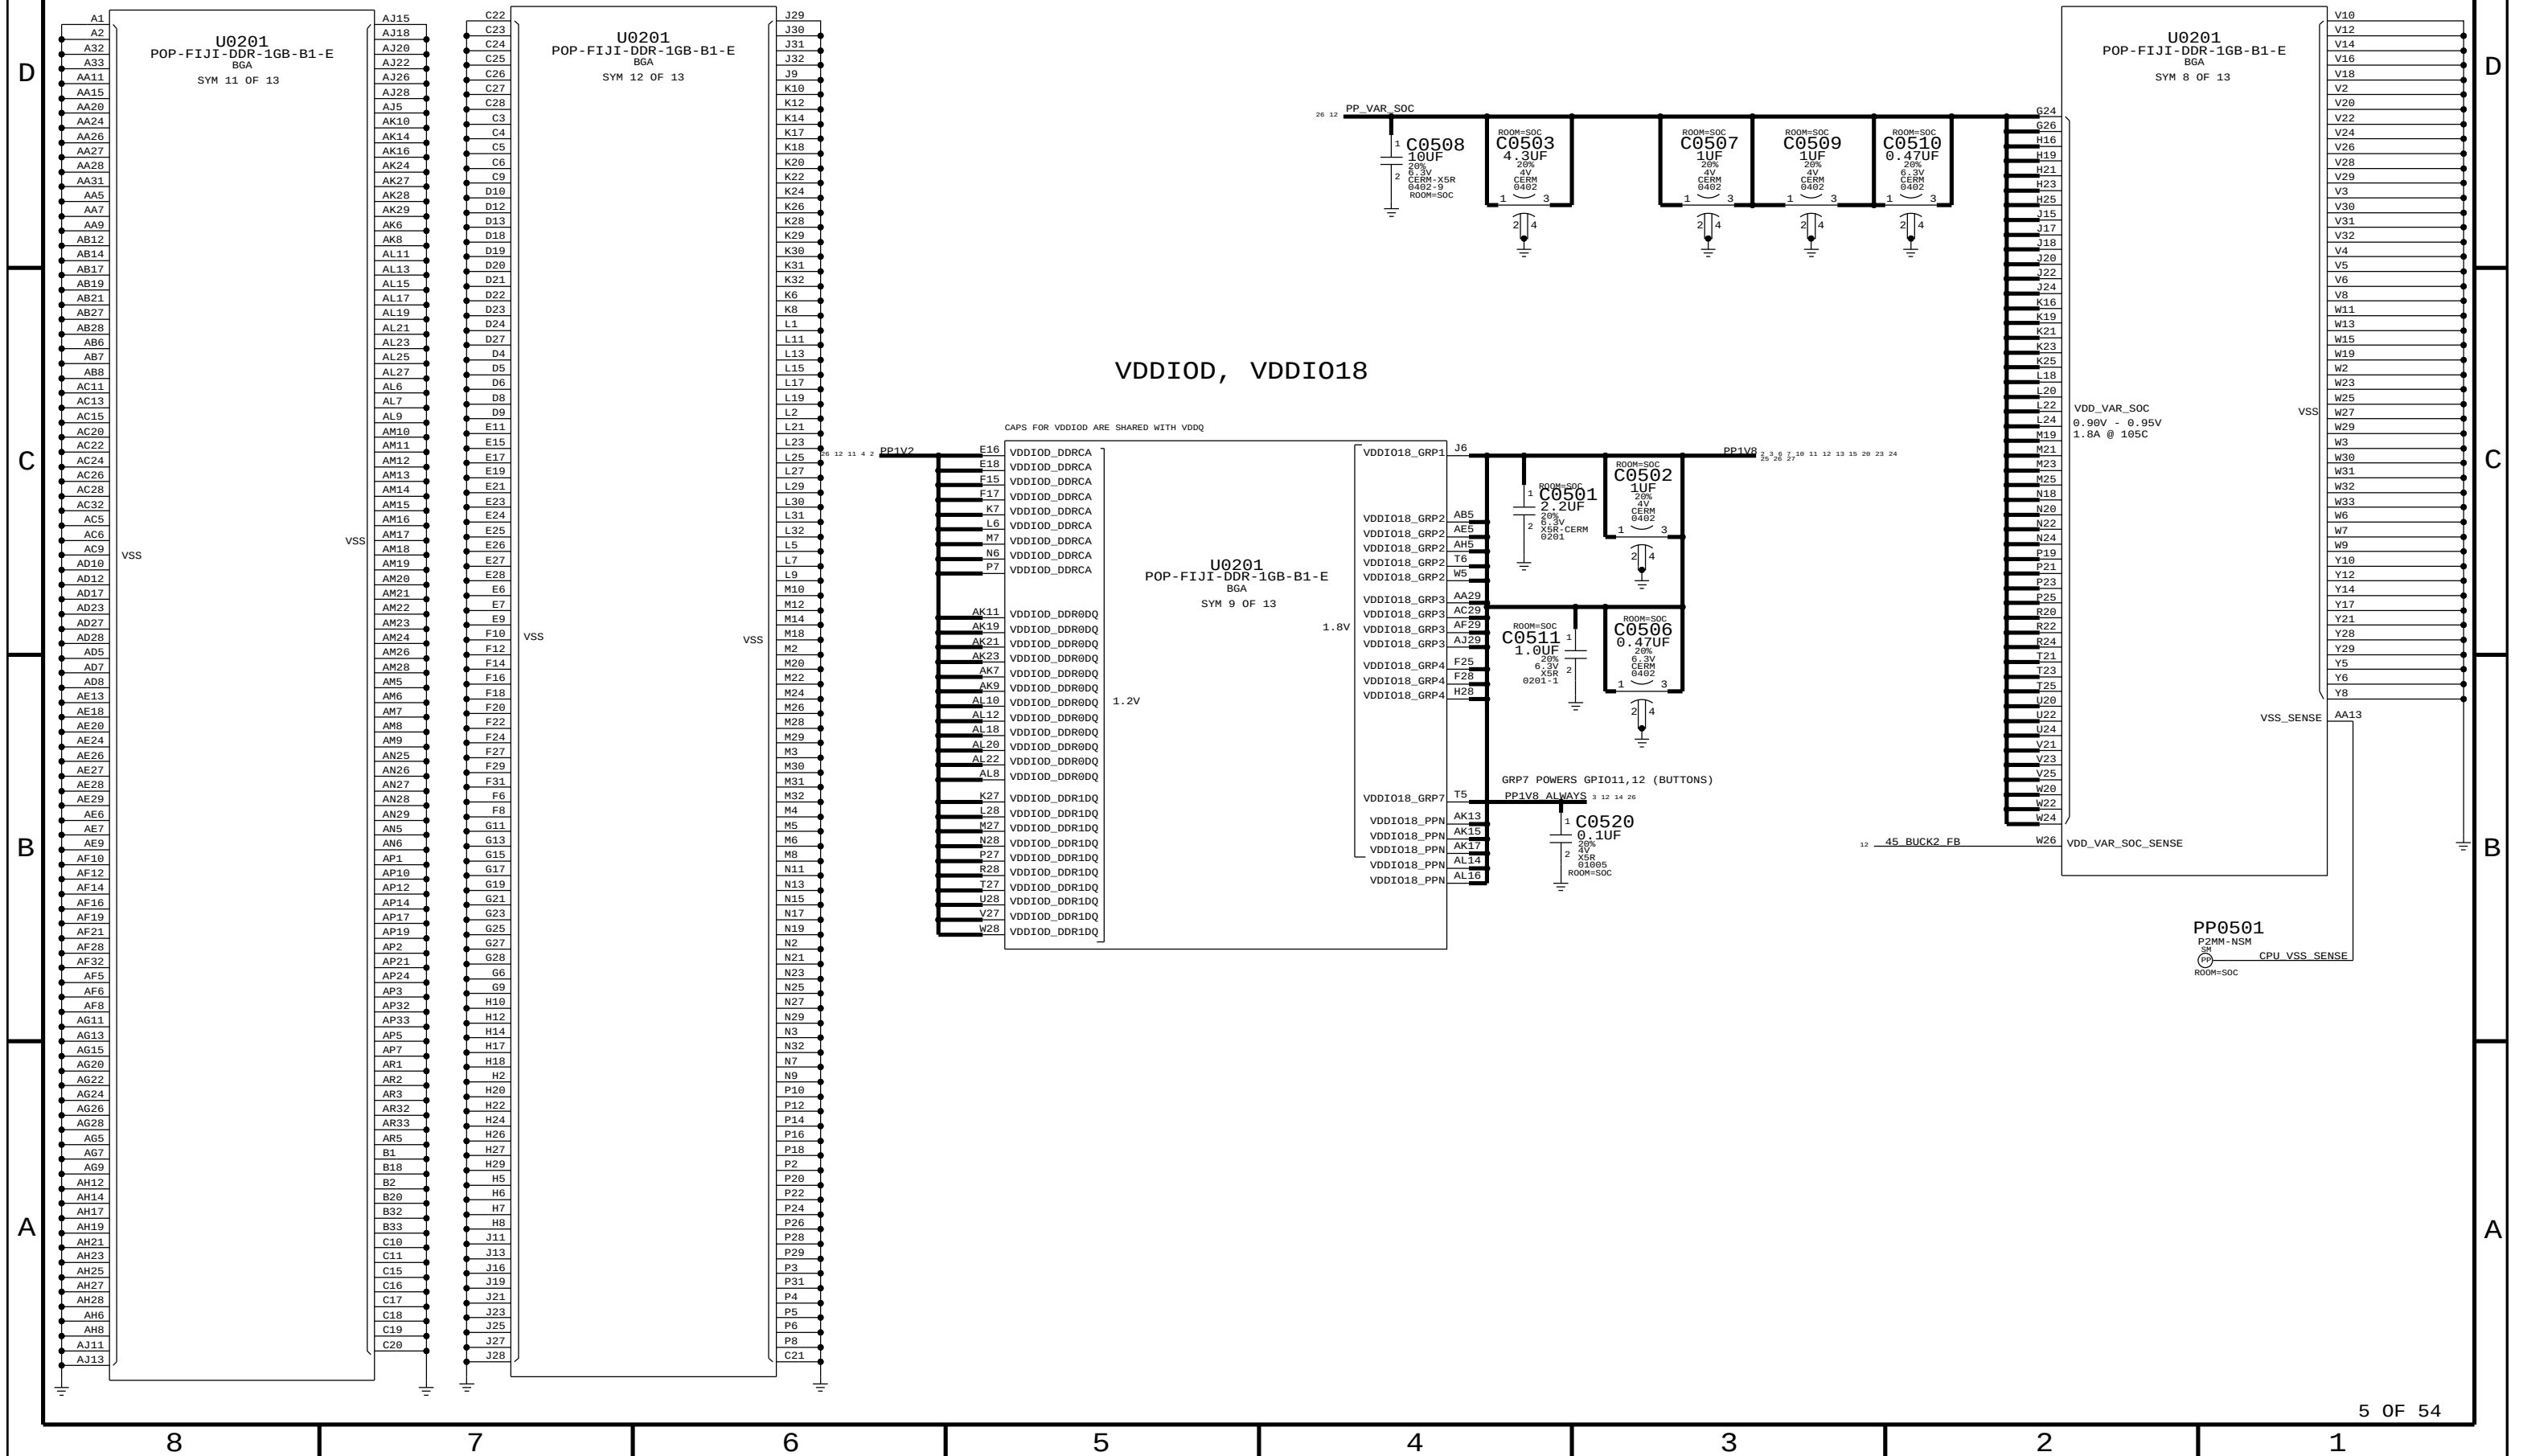

FIJI: NAND + 12X17 NAND PKG

SUPPORT FOR PPN1.5 (1.8V IO) ONLY

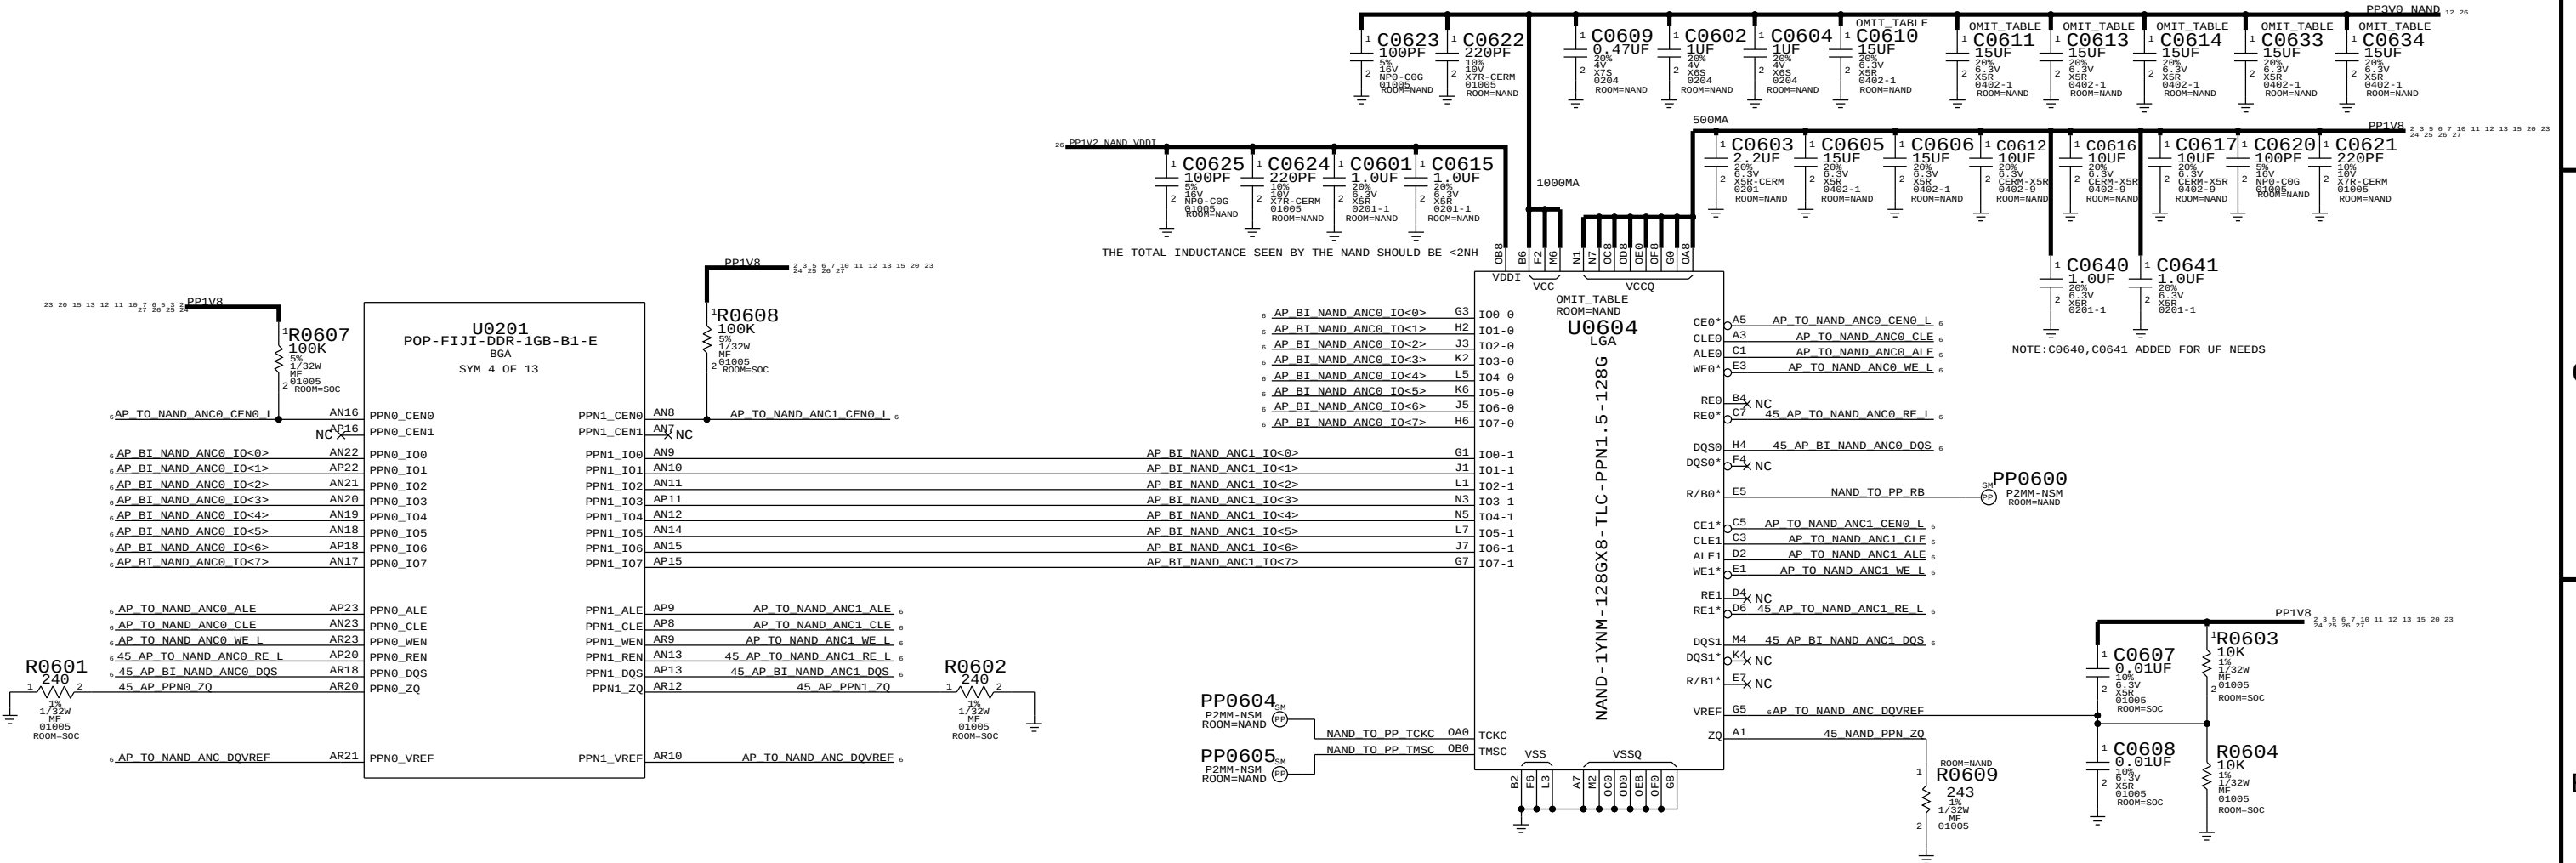

PP0601 P4MM-NSM
ROOM=SOC 1 1 AP BI NAND ANC0 IO<6> 6
PP0602 P4MM-NSM
ROOM=SOC 1 1 45 AP TO NAND ANC0 RE_L 6
PP0603 P4MM-NSM
ROOM=SOC 1 1 45 AP BI NAND ANC0 DQS 6

NOTE: IO<6> PREFERRED BY MATT BYOM (N51)
(IS A STATUS READY BIT)

D




8 7 6 5 4 3 2 1


BUTTON FLEX (BUTTONS, ANC REF MIC, STROBE, STROBE_NTC, WIFI FLEX PAC)

MIC2 (ANC REF MIC):
MIC2/4 BIAS,
MIC2_P,_N


BUTTONS:
RINGER, HOLD,
VOL_UP/DOWN,

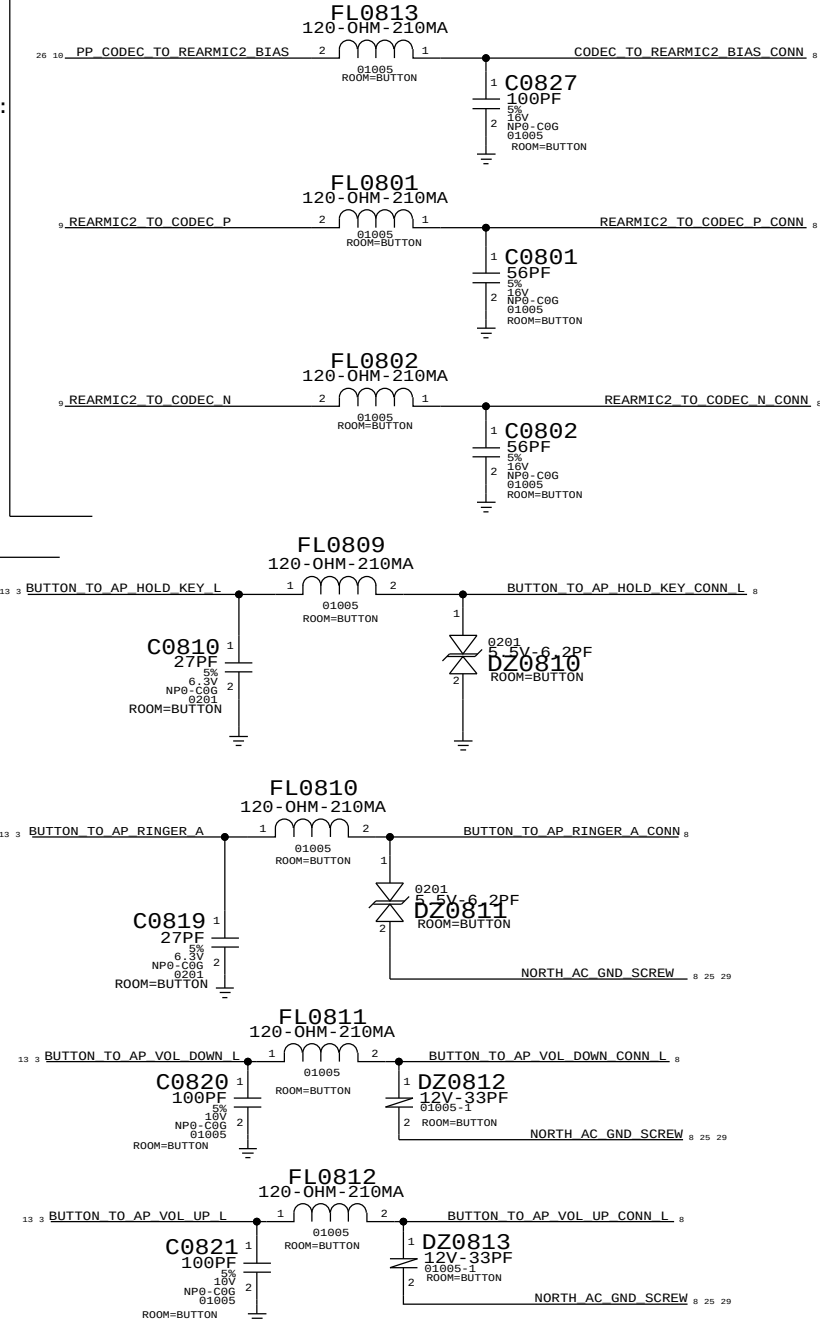


RIGHT BUTTON B2B

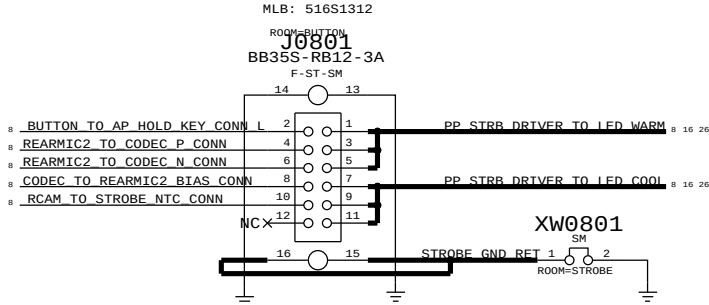


LEFT BUTTON B2B

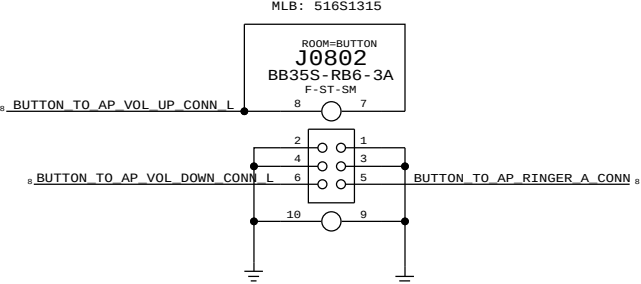


STROBE:
LED WARM



STROBE:
LED COOL




STROBE:
NTC

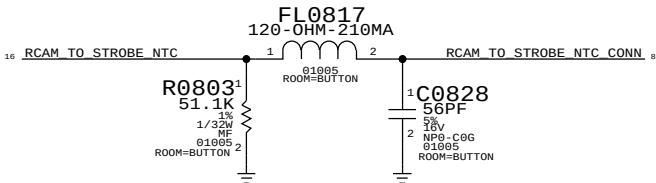

L67 AUDIO CODEC

AUDIO I/O



(ANALOG MIC IN, DIG MIC IN, HPOUT, LINEOUT, RECEIVER OUT, MIKEYBUS)

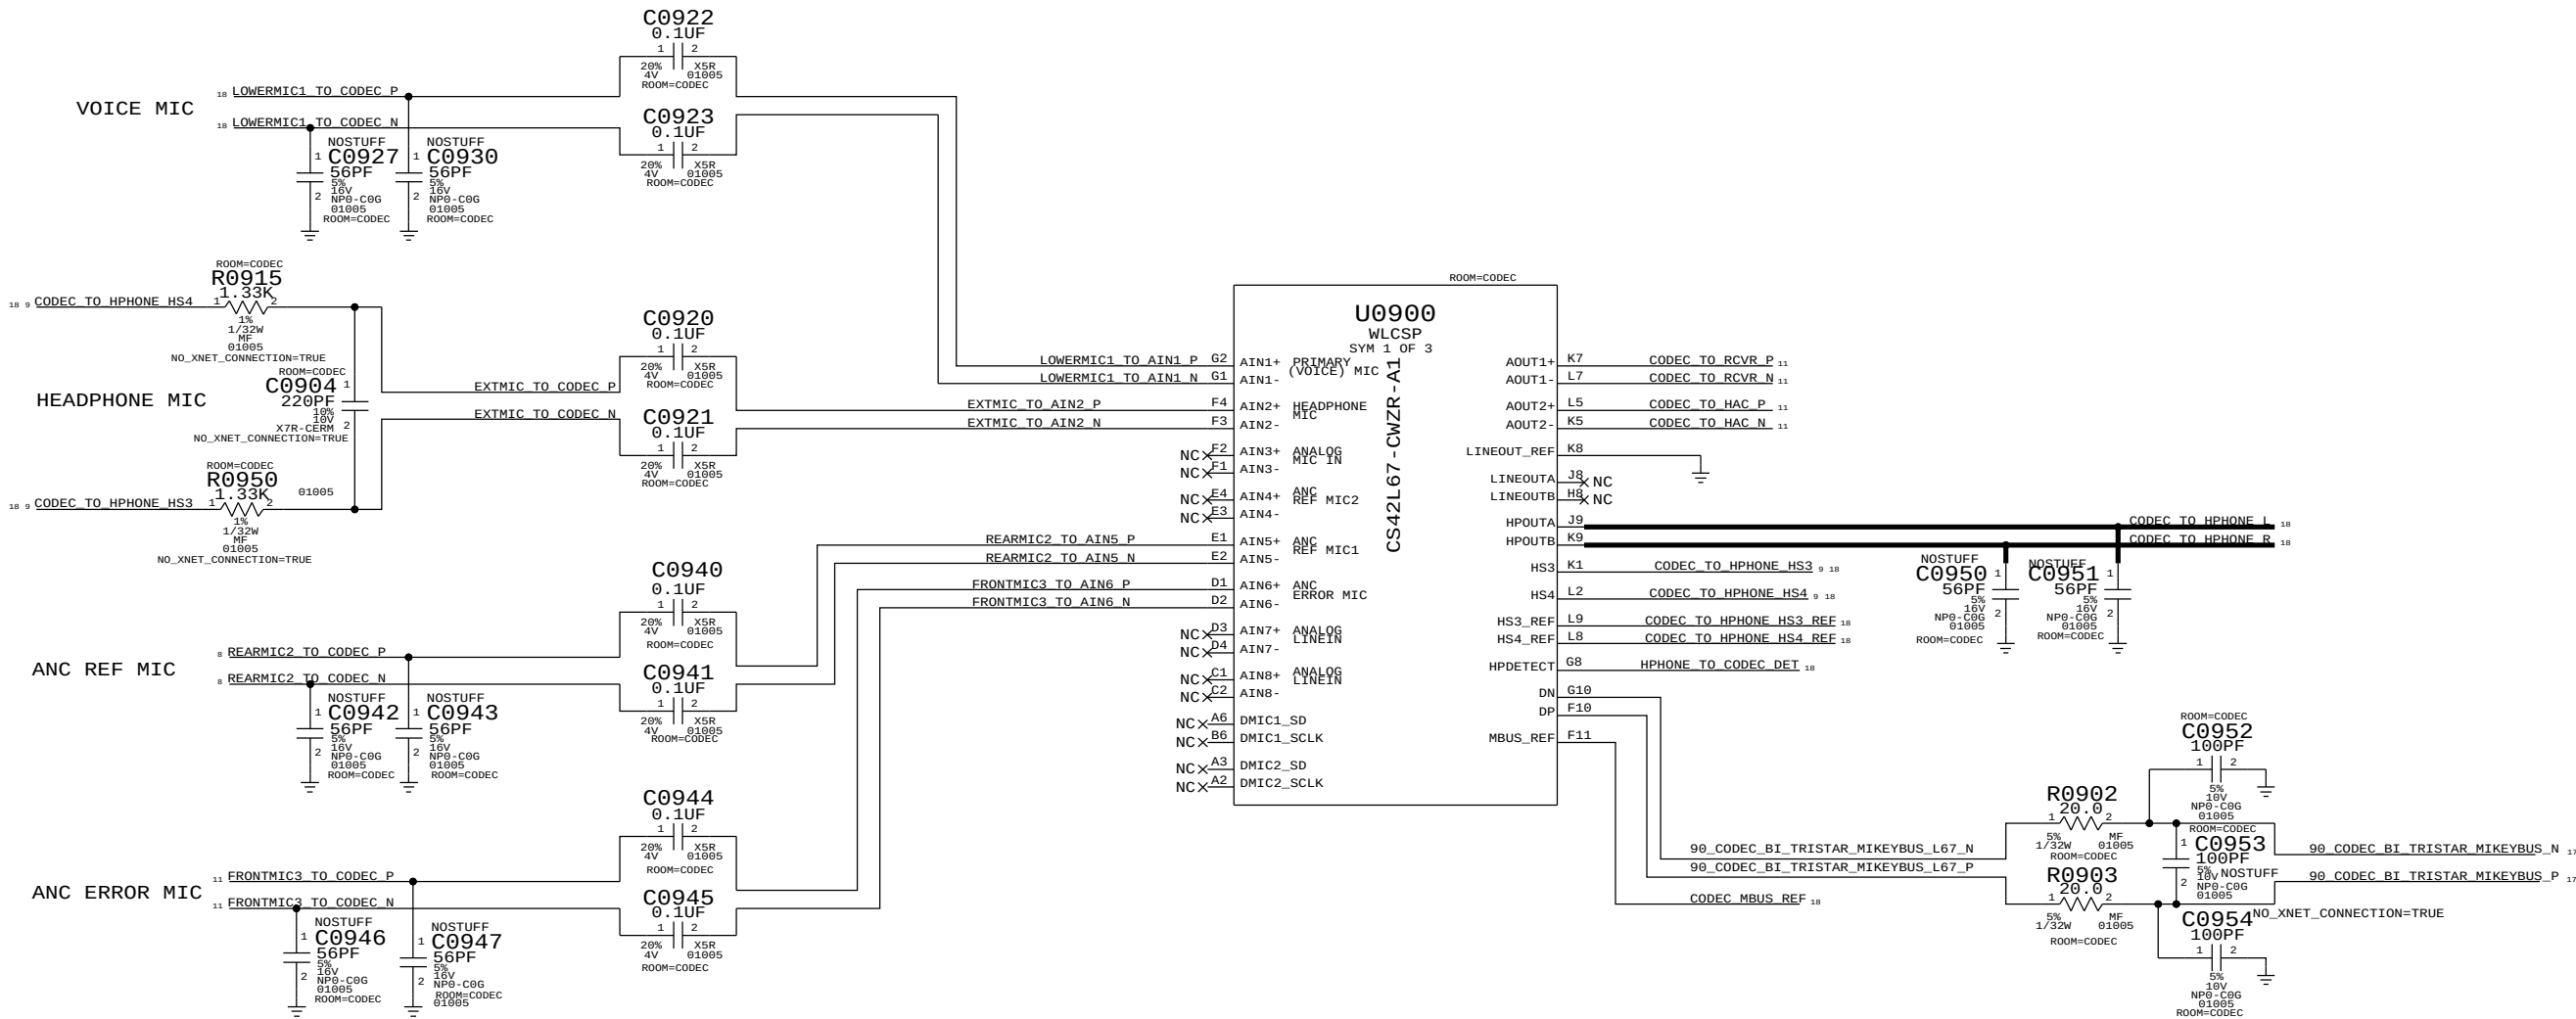


L67 AUDIO CODEC

POWER, MICBIAS

DIGITAL SYSTEM I/O

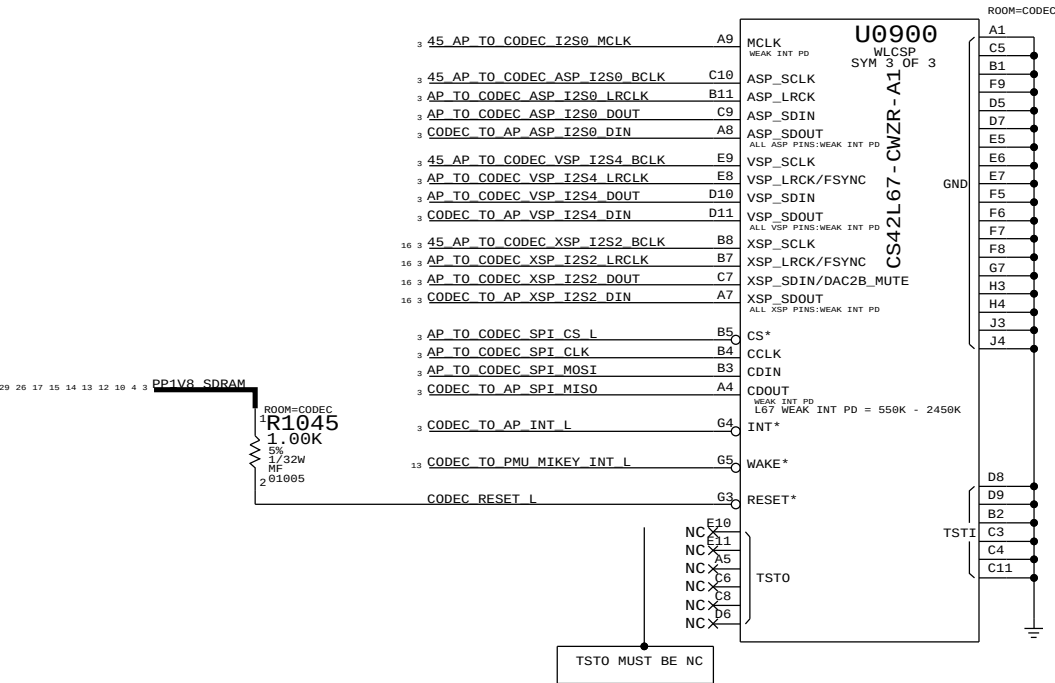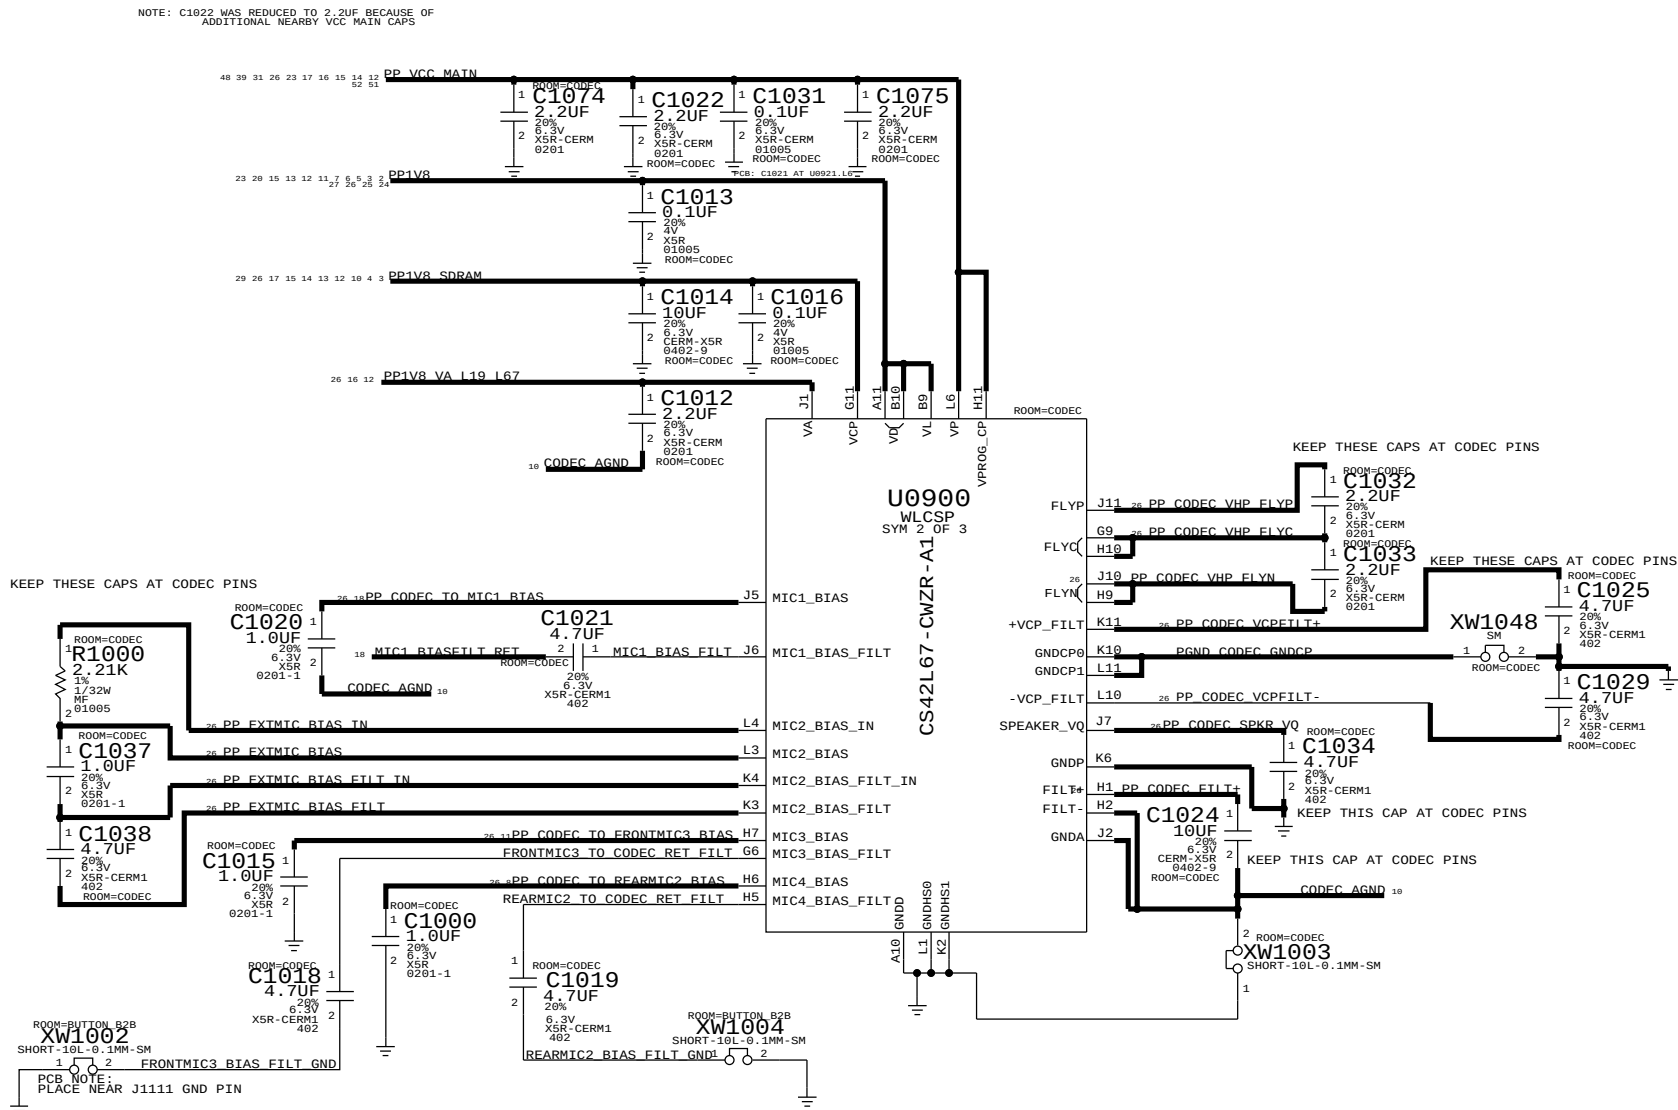

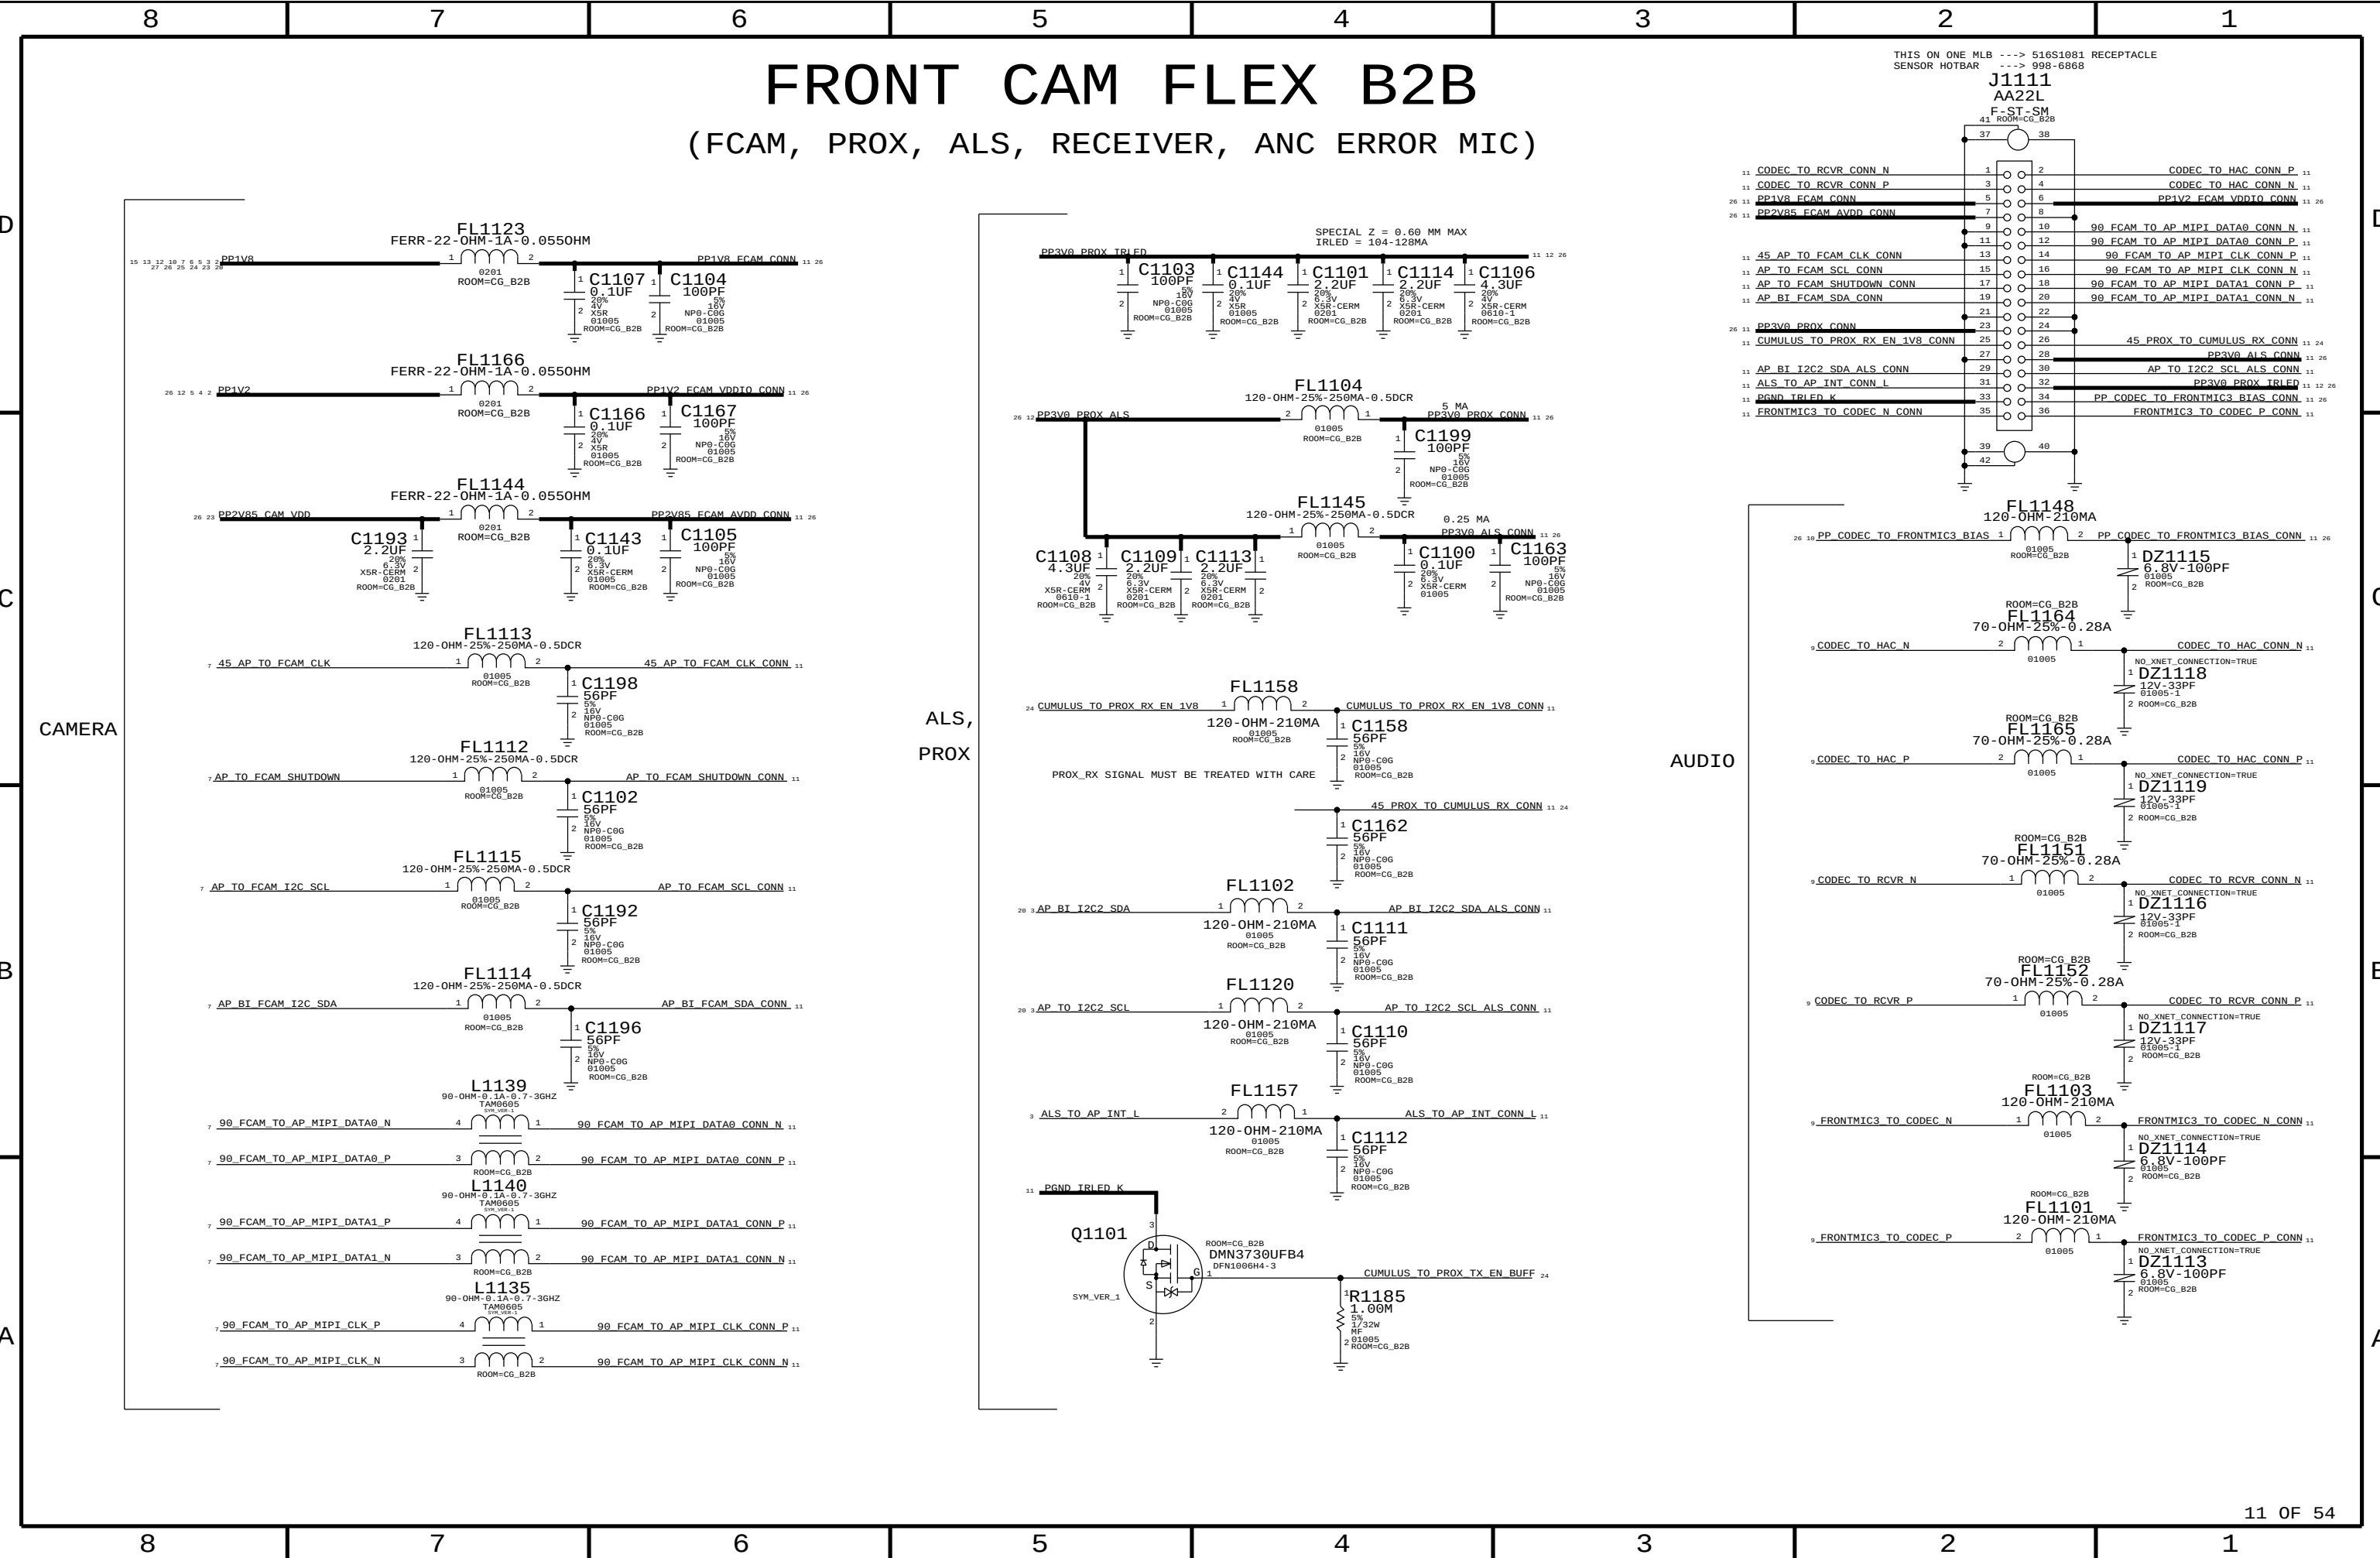

D



B

A

D

C


B

A

(AMUX, GPIO, BUTTONS, ADC, THERMISTORS, SYSTEM I/F, GND)




TIGRIS CHARGER & VIBE DRIVER


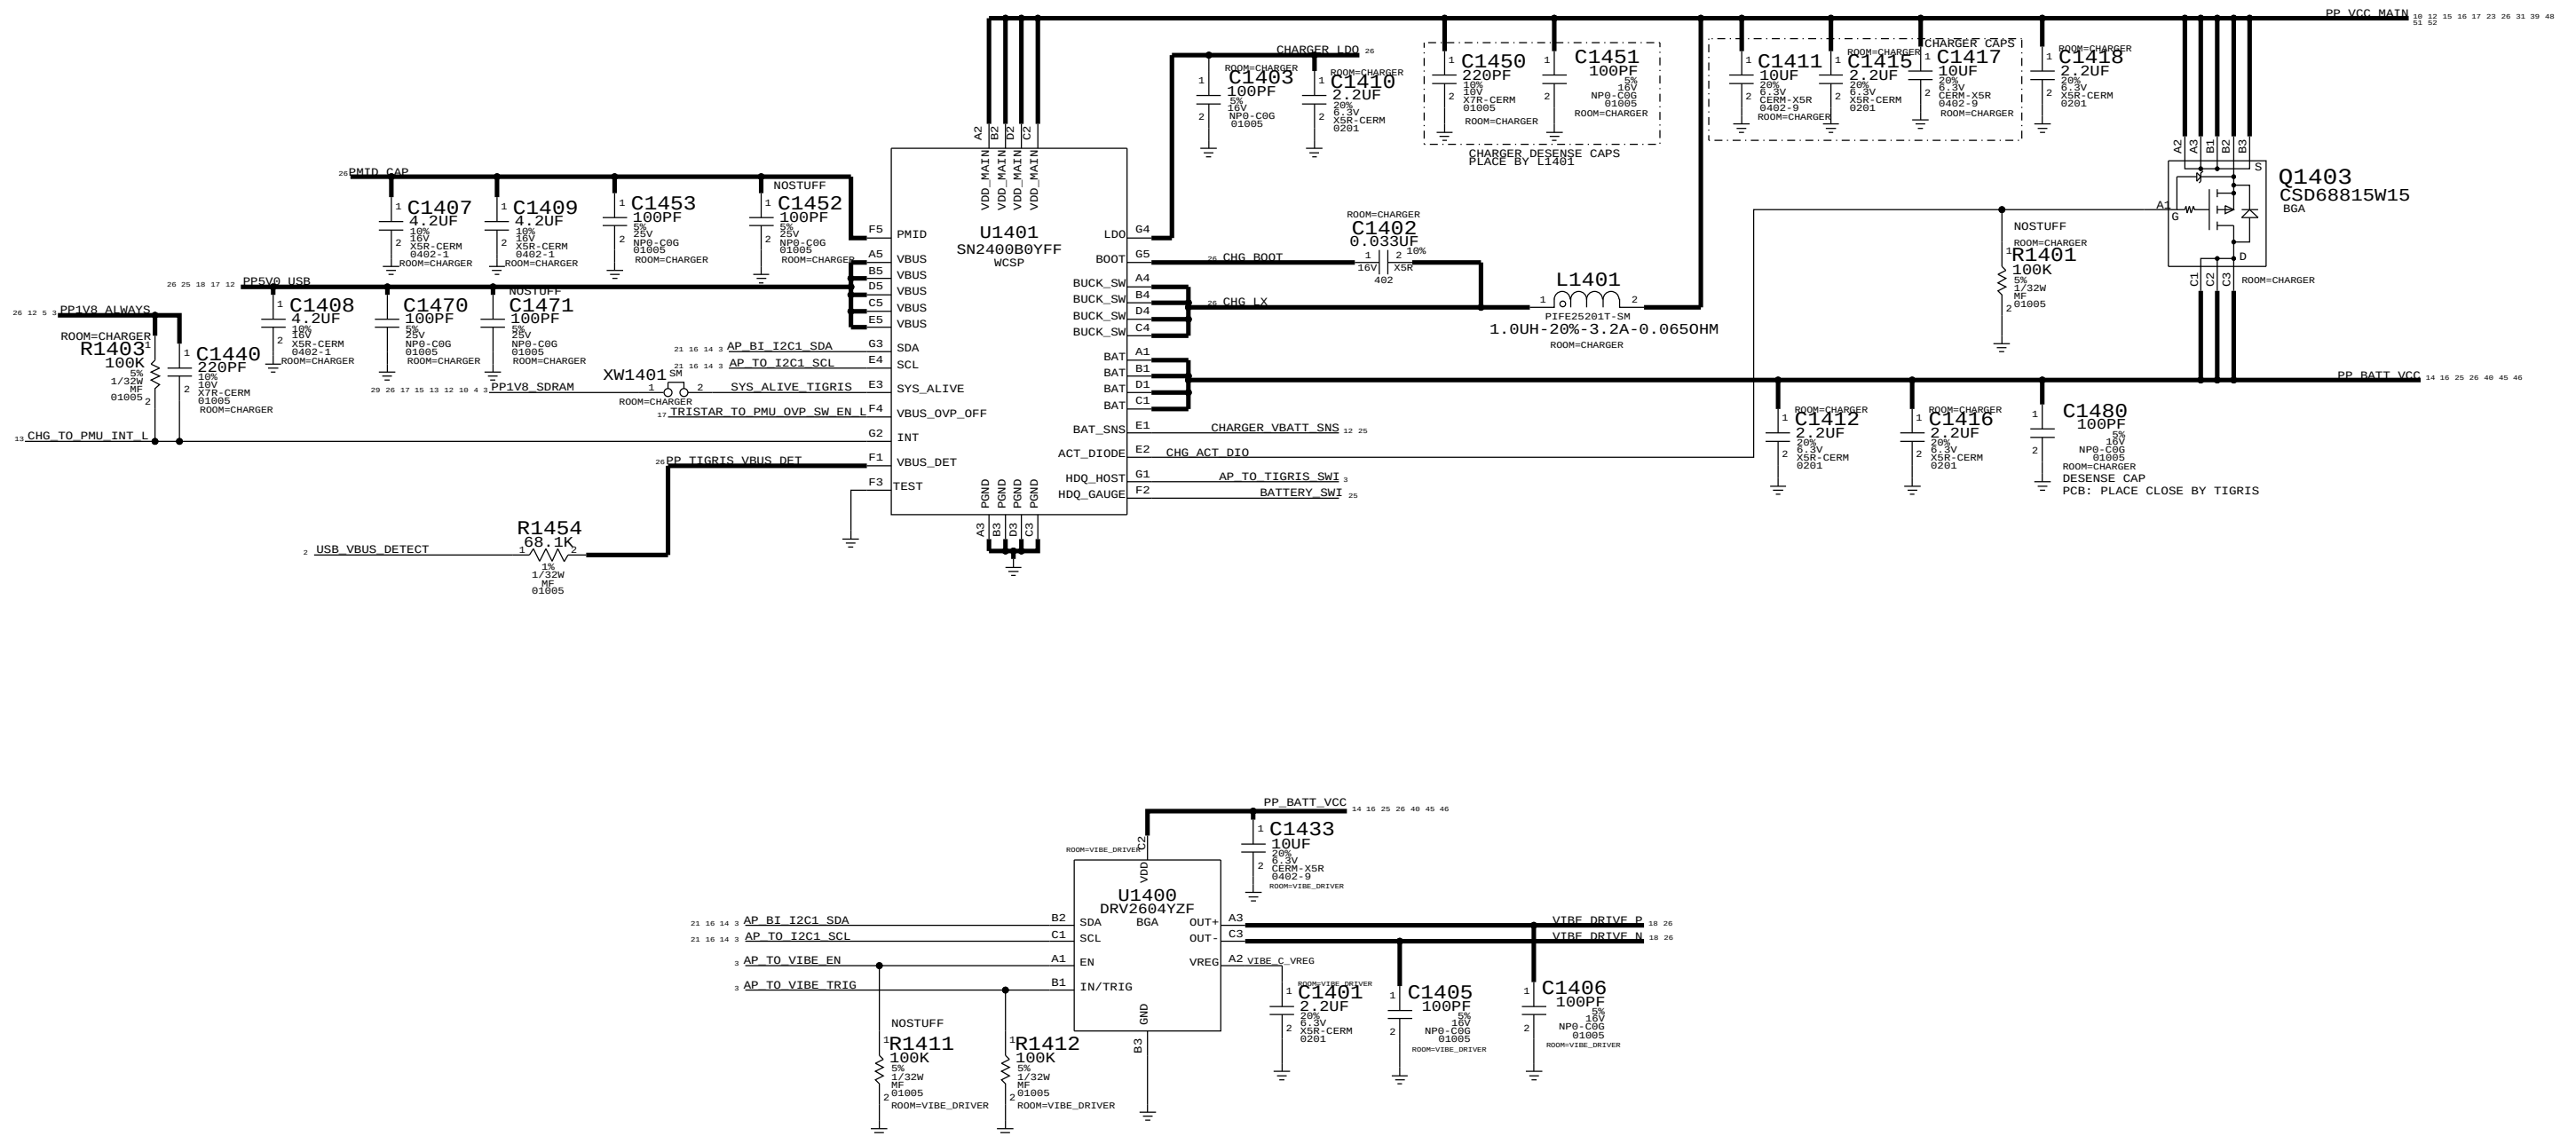


8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---

D | D

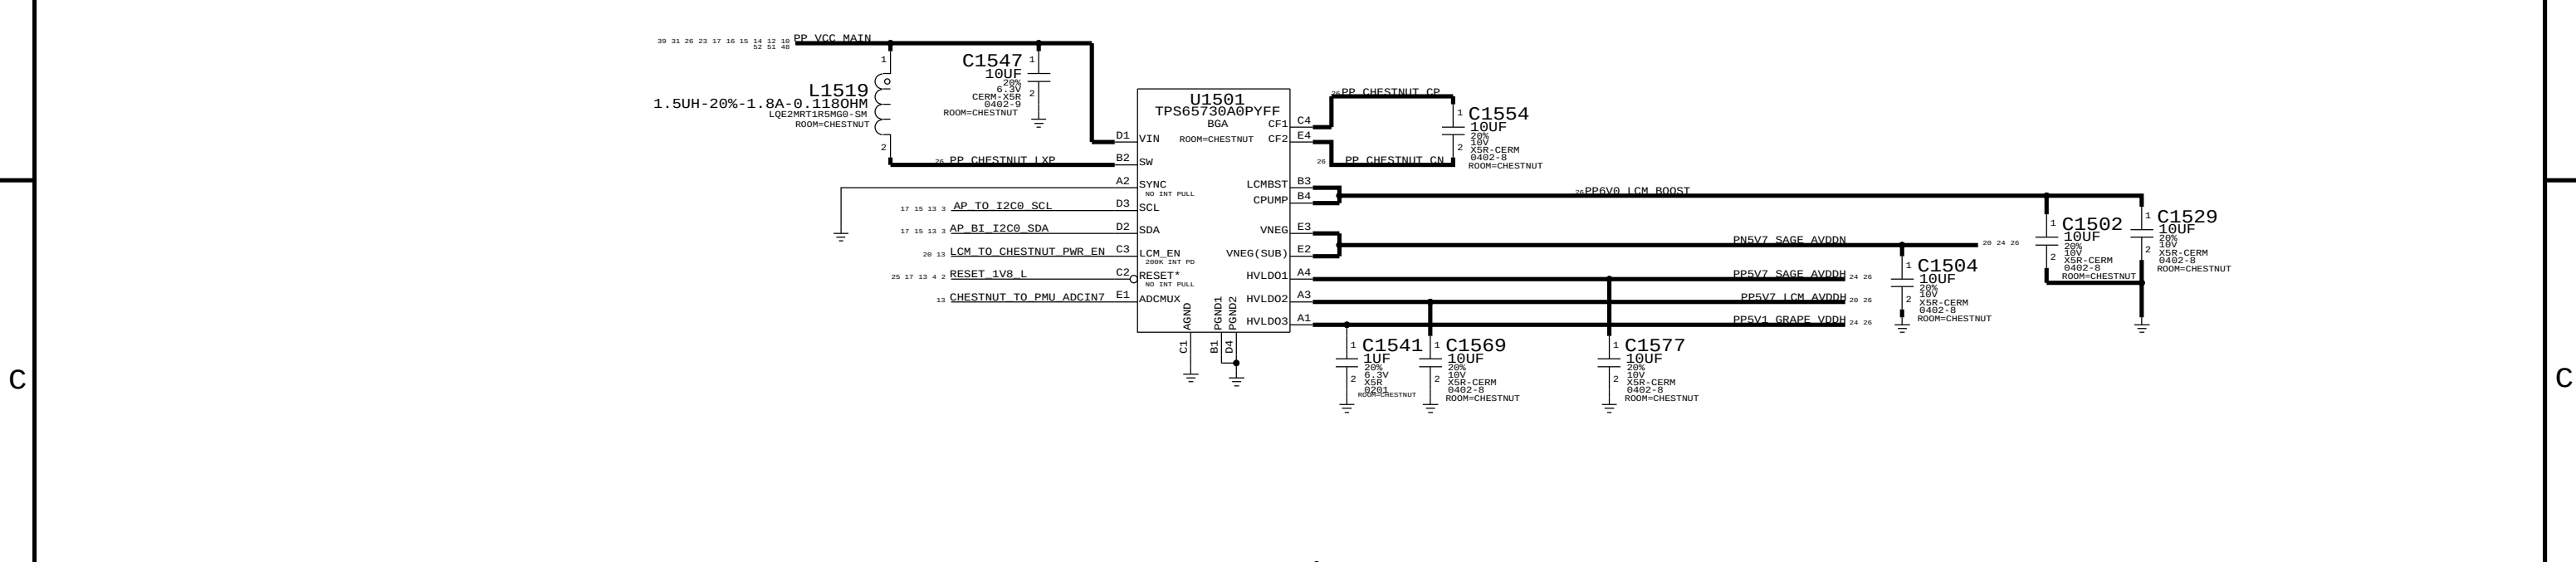


D500 BACKLIGHT DRIVER

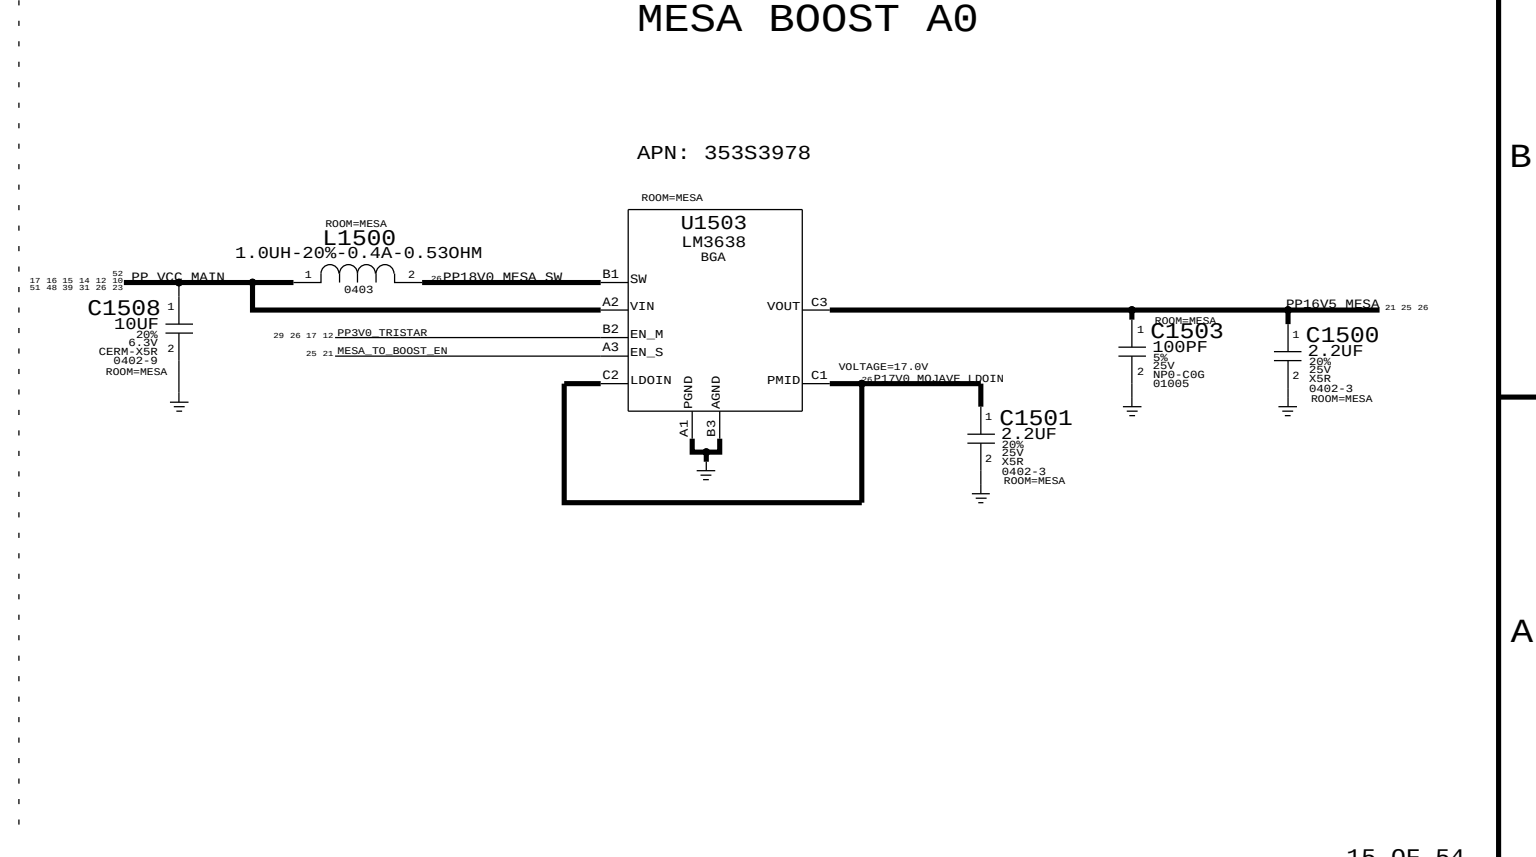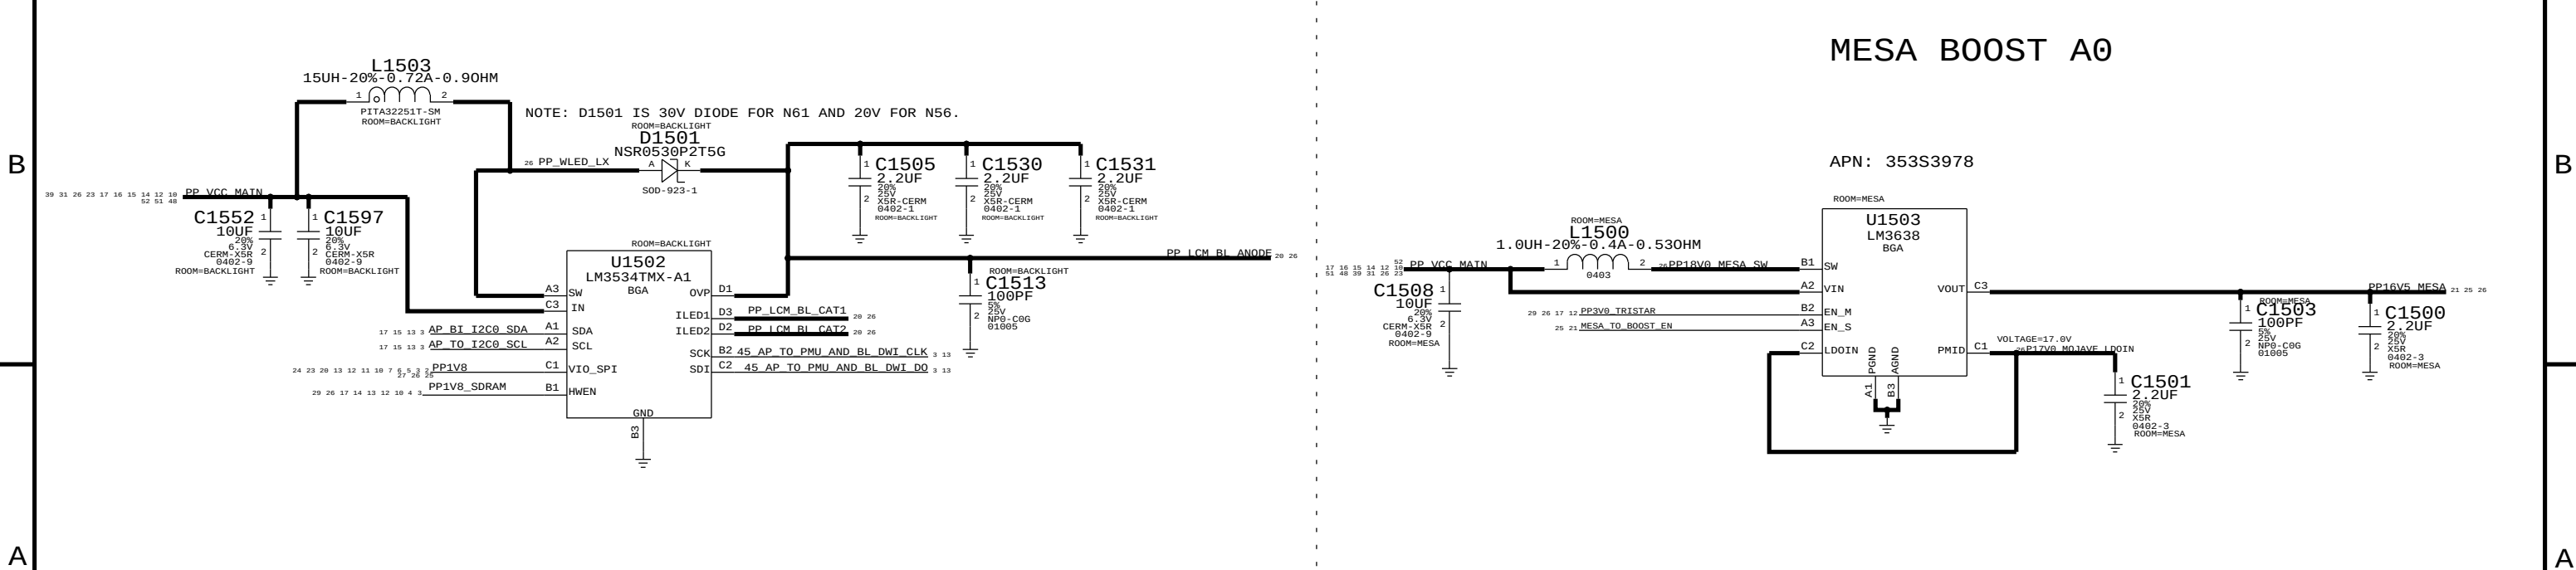

SPEAKER AMP, LED DRIVER


SPEAKER AMP

I2C ADDRESS: 1000000X

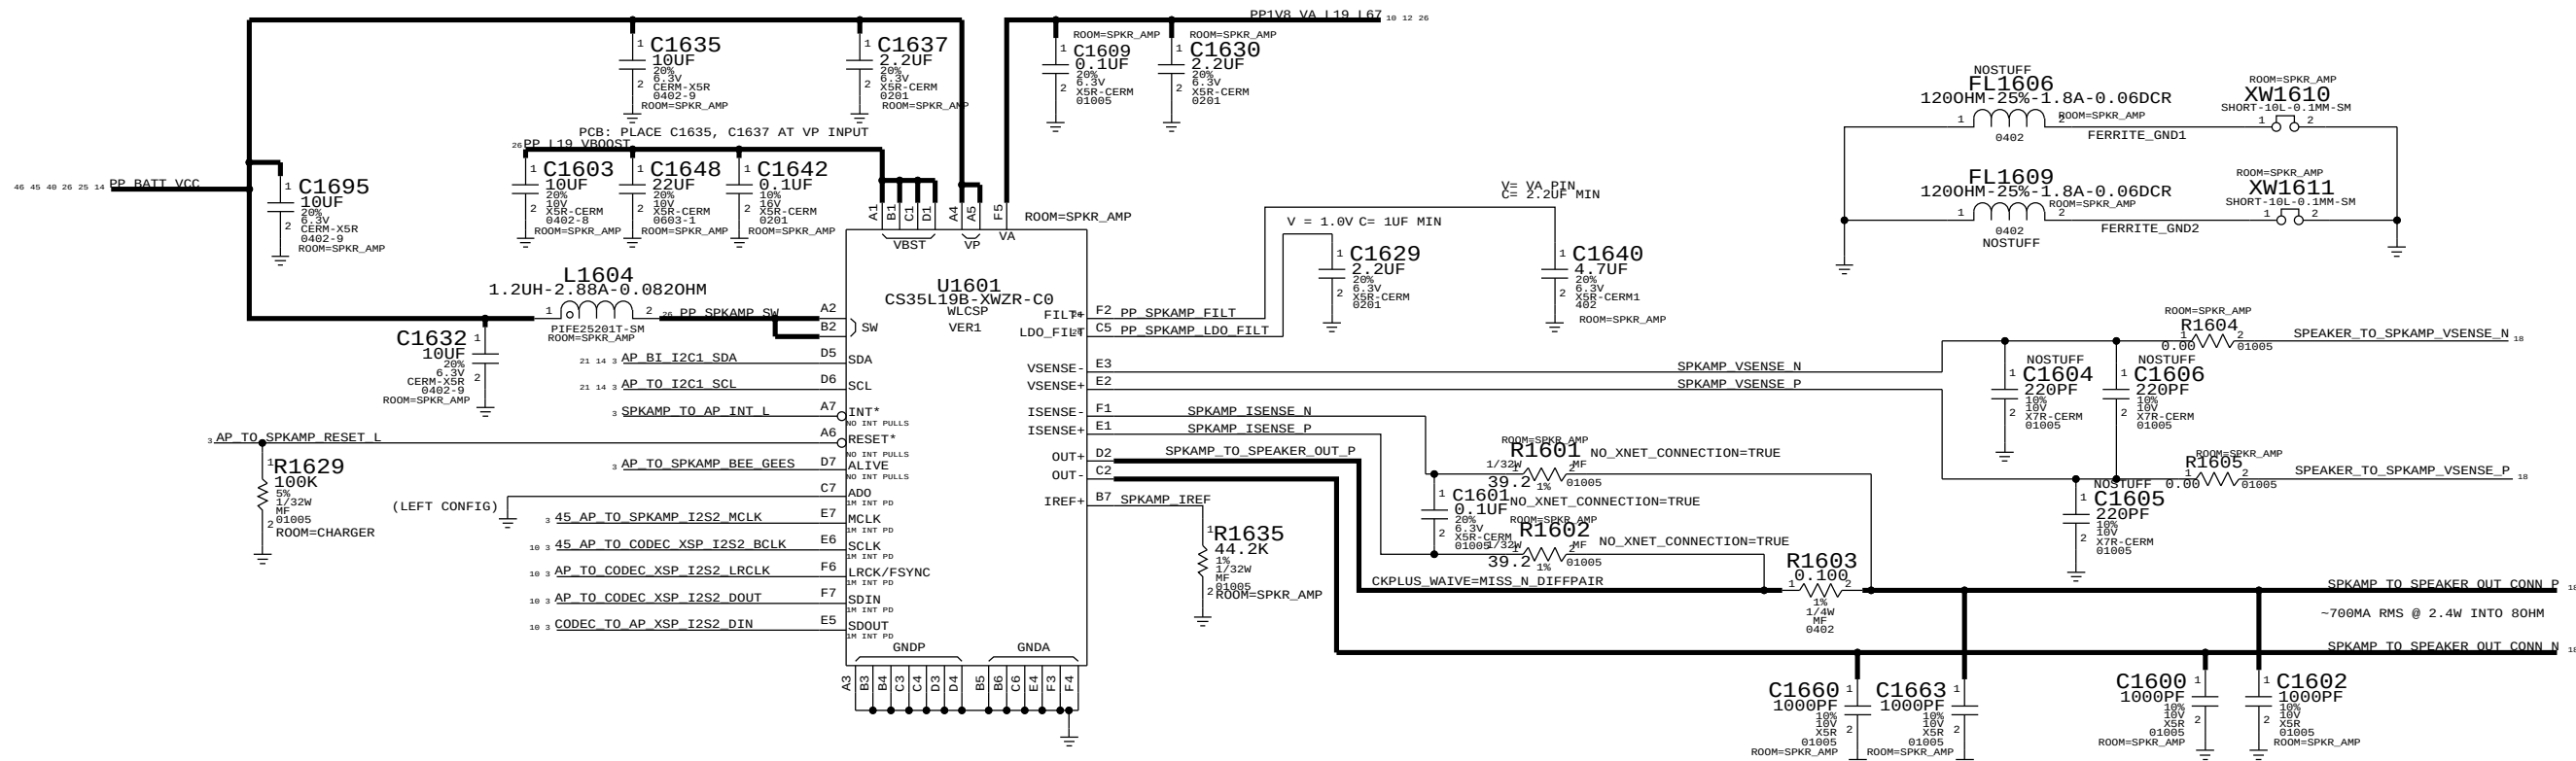


STROBE DRIVER

TI: APN 353S3899

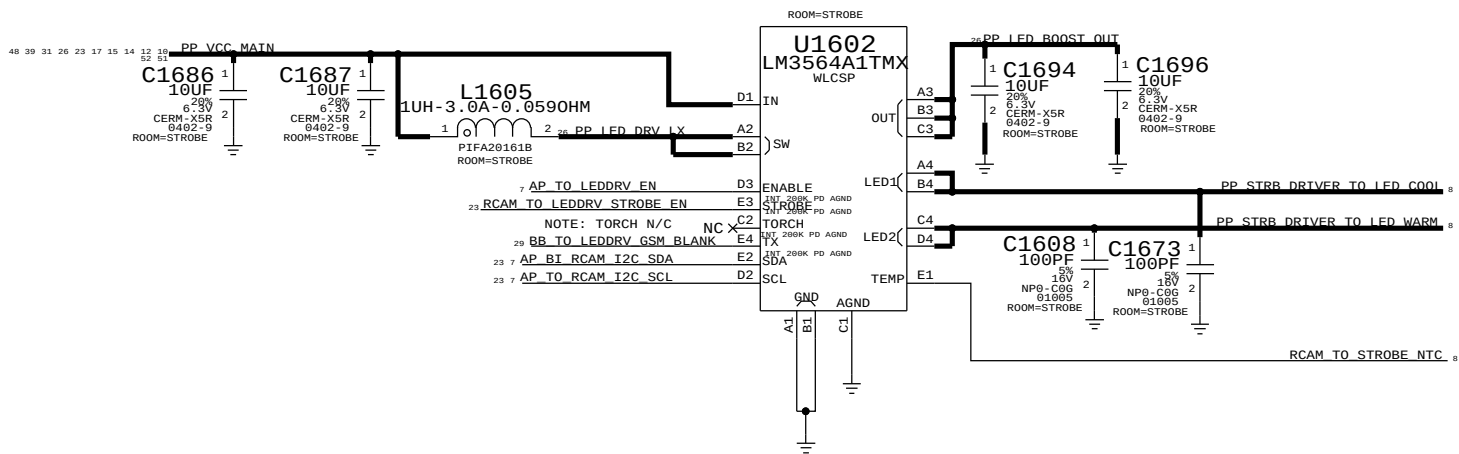

TRISTAR2

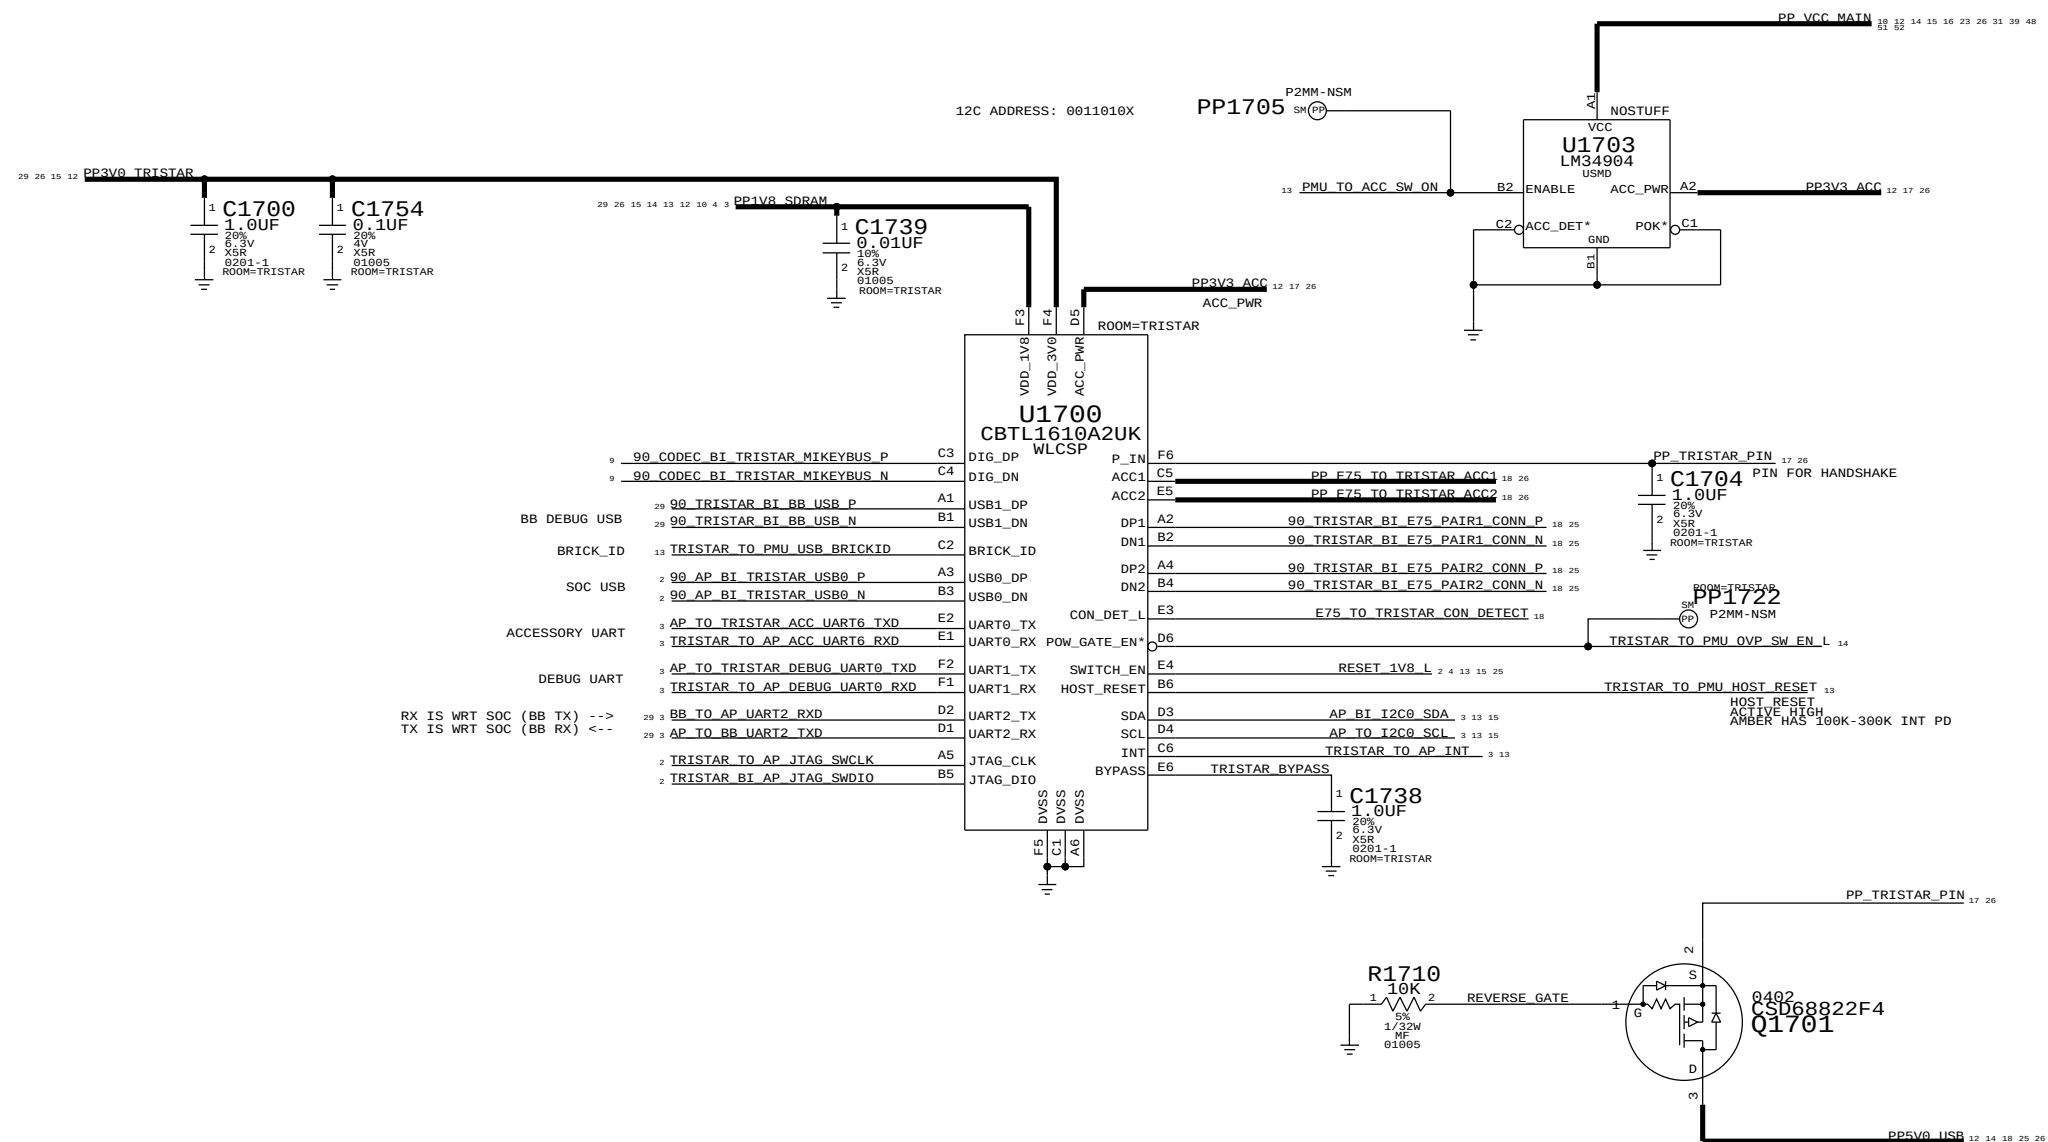

DOCKFLEX B2B (USB VBUS, SPEAKER, ANTENNA LAT SW CTRL, MIC1 (PRIMARY MIC), ACC DET/ID/PWR, E75 DIFFPAIRS)

D

LOWER MIC1
(PRIMARY
VOICE MIC)

C

HEADPHONE

B

CODEC TO
HEADPHONE

A

ACCESSORY:
VIBE
DRIVE

SPEAKER:
LEADS,
VSENSE

TRISTAR


USB
VBUS

ANTENNA

MLB: 516S1281 (RCPT)
ROOM=DOCK_B2B
J1817
24-5859-036-201-829
F-ST-SM

COMPASS - AKM COMPASS IN POR LOCATION

COMPASS CSP: 338S1014

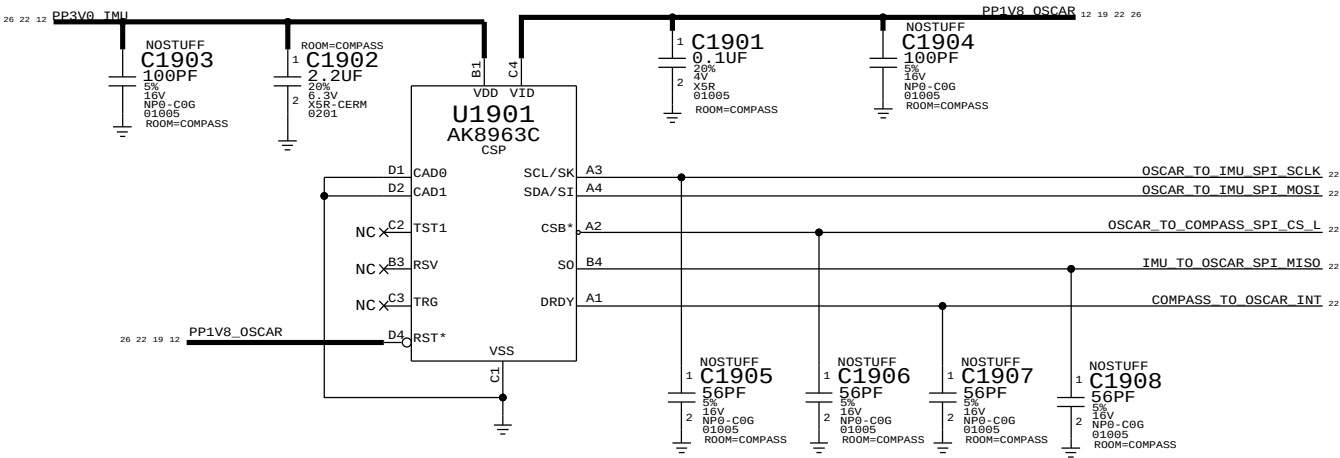

8 7 6 5 4 3 2 1

LCD B2B

Backlight
(N56 HAS A 2ND SET OF BL SIGNALS ON P. 19).

FL2024
240-OHM-0.2A-0.8-OHM

PP LCM BL ANODE

PP LCM BL ANODE CONN

C2017
100PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

FL2025
240-OHM-0.2A-0.8-OHM

PP LCM BL CAT1

PP LCM BL CAT1 CONN

C2018
100PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

FL2026
240-OHM-0.2A-0.8-OHM

PP LCM BL CAT2

PP LCM BL CAT2 CONN

C2019
100PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

LCM Supplies

PP1V8

PP1V8 LCM CONN

C2039
0.1UF
16V
X5R-CERM
0201
ROOM=LCM_B2B

C2040
100PF
16V
NP0-C0G
01005
ROOM=LCM_B2B

FL2061
70-OHM-300MA

PN5V7 SAGE AVDDN

PN5V7 LCM AVDDN CONN

C2044
100PF
16V
NP0-C0G
01005
ROOM=LCM_B2B

FL2037
80-OHM-0.2A-0.4-OHM

PP5V7 LCM AVDDH

PP5V7 LCM AVDDH CONN

C2070
2.2UF
6.3V
X5R-CERM
0201
ROOM=LCM_B2B

C2051
2.2UF
6.3V
X5R-CERM
0201
ROOM=LCM_B2B

C2050
2.2UF
6.3V
X5R-CERM
0201
ROOM=LCM_B2B

C2071
2.2UF
6.3V
X5R-CERM
0201
ROOM=LCM_B2B

C2094
100PF
16V
NP0-C0G
01005
ROOM=LCM_B2B

THIS ONE ON MLB --> 516S1164

J2019
24-5857-030-001-829

PP LCM BL CAT2 CONN

PP LCM BL ANODE CONN

PP LCM BL CAT1 CONN

LCD TO AP PIFA CONN

PMU TO PHOTON ALIVE CONN

LCM TO AP HIFA BSYNC CONN

AP TO LCM RESET CONN L

LCM TO CHESTNUT PWR EN CONN

AP BI I2C2 SDA CONN

AP TO I2C2 SCL CONN

AP TO I2C2 SDA

AP TO I2C2 SCL

LCM TO CHESTNUT PWR EN

AP TO LCM RESET L

PMU TO PHOTON ALIVE

LCD TO AP PIFA CONN

MIPI Common Mode Chokes
(N56 HAS A 4TH MIPI LANE ON P. 19).

L2044
90-OHM-0.1A-0.7-3GHZ

90 AP TO LCM MIPI CLK P

90 AP TO LCM MIPI CLK CONN P

L2043
90-OHM-0.1A-0.7-3GHZ

90 AP TO LCM MIPI DATA0 P

90 AP TO LCM MIPI DATA0 CONN P

L2042
90-OHM-0.1A-0.7-3GHZ

90 AP TO LCM MIPI DATA1 P

90 AP TO LCM MIPI DATA1 CONN P

L2041
90-OHM-0.1A-0.7-3GHZ

90 AP TO LCM MIPI DATA2 P

90 AP TO LCM MIPI DATA2 CONN P

Sync/Reset/Debug

FL2034
120-OHM-210MA

LCM TO AP HIFA BSYNC

LCM TO AP HIFA BSYNC CONN

C2001
56PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

Touch

C2087
2.2UF
6.3V
X5R-CERM
0201
ROOM=LCM_B2B

C2088
2.2UF
6.3V
X5R-CERM
0201
ROOM=LCM_B2B

FL2001
120-OHM-210MA

TOUCH TO SAGE VCM IN

TOUCH TO SAGE VCM IN CONN

C2002
56PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

R2008
0.00
1/32W
01005
ROOM=LCM_B2B

R2009
0.00
1/32W
01005
ROOM=LCM_B2B

SAGE TO TOUCH VCPH REF

SAGE TO TOUCH VCPH REF CONN

SAGE TO TOUCH VCPL REF

SAGE TO TOUCH VCPL REF CONN

Digital Interfaces

FL2039
120-OHM-210MA

AP BI I2C2 SDA

AP BI I2C2 SDA CONN

C2089
56PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

FL2066
120-OHM-210MA

AP TO I2C2 SCL

AP TO I2C2 SCL CONN

C2090
56PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

FL2035
120-OHM-210MA

LCM TO CHESTNUT PWR EN

LCM TO CHESTNUT PWR EN CONN

C2093
56PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

FL2036
120-OHM-210MA

AP TO LCM RESET L

AP TO LCM RESET CONN L

C2000
56PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

R2052
100K
1/32W
01005
ROOM=LCM_B2B

FL2050
120-OHM-210MA

PMU TO PHOTON ALIVE

PMU TO PHOTON ALIVE CONN


C2095
56PF
5V
NP0-C0G
01005
ROOM=LCM_B2B

C2058
56PF
16V
NP0-C0G
01005
ROOM=LCM_B2B

20 OF 54

8 7 6 5 4 3 2 1




(N56 HAS A 2ND SET OF BL SIGNALS ON P. 19).

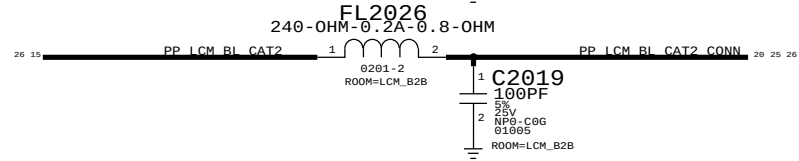

The schematic diagram illustrates the power supply section of the AD9548 evaluation board. It features three main input lines, each with a series resistor and a bypass capacitor connected to ground.

- PP1V8 Line:** This line is connected to the **PP1V8_LCM_CONN** pin. It includes a series resistor **FL2037** (80-0HM-0.2A-0.4-0HM) and a bypass capacitor **C2039** (0.1uF, 16V, CERM-X5R, 0201, ROOM=LCM_B2B). The capacitor is connected to ground.
- PN5V7_SAGE_AVDDN Line:** This line is connected to the **PN5V7_LCM_AVDDN_CONN** pin. It includes a series resistor **FL2061** (70-0HM-300MA) and a bypass capacitor **C2044** (100PF, 5V, 18V, NP0-C060, 01905, ROOM=LCM_B2B). The capacitor is connected to ground.
- PP5V7_LCM_AVDDH Line:** This line is connected to the **PP5V7_LCM_AVDDH_CONN** pin. It includes a series resistor **FL2067** (80-0HM-0.2A-0.4-0HM) and a bypass capacitor **C2094** (100PF, 5V, 18V, NP0-C060, 01905, ROOM=LCM_B2B). The capacitor is connected to ground.

The diagram also shows the internal connections of the capacitors to ground and the room assignments for the components.

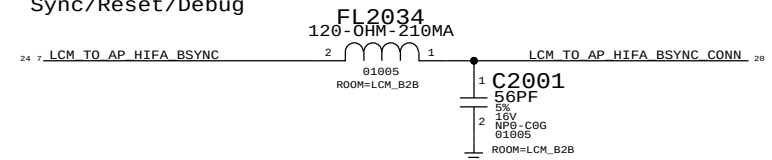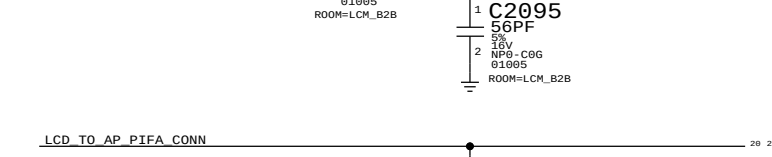

The schematic diagram illustrates the electrical connections for the Touch module, specifically the input channels for the VCM and VCPL signals. The diagram is organized into three horizontal sections, each representing a different input channel. The top section shows the TOUCH_TO_SAGE_VCM_IN channel, which includes a capacitor C2087 (2.2uF) and a capacitor C2088 (2.2uF) connected to a common ground. The middle section shows the SAGE_TO_TOUCH_VCPH_REF channel, which includes a resistor R2008 (0.00 ohms) connected to a common ground. The bottom section shows the SAGE_TO_TOUCH_VCPL_REF channel, which includes a resistor R2009 (0.00 ohms) connected to a common ground. The diagram also shows the connection of the TOUCH_TO_SAGE_VCM_IN channel to the TOUCH_TO_SAGE_VCM_IN_CONN pin. The components are labeled with their values and the room number LCM_B2B.

Top Section: TOUCH_TO_SAGE_VCM_IN

- Component: C2087, 2.2uF, 0.3V, X5R-CERM, 0201, ROOM=LCM_B2B
- Component: C2088, 2.2uF, 0.3V, X5R-CERM, 0201, ROOM=LCM_B2B
- Component: C2002, 56PF, 10V, NPO-C6G, 01005, ROOM=LCM_B2B
- Resistor: 120-0HM-210MA


Middle Section: SAGE_TO_TOUCH_VCPH_REF

- Component: R2008, 0.00, 1/2W, MF, 01005, ROOM=LCM_B2B


Bottom Section: SAGE_TO_TOUCH_VCPL_REF

- Component: R2009, 0.00, 1/2W, MF, 01005, ROOM=LCM_B2B

MESA CONNECTOR

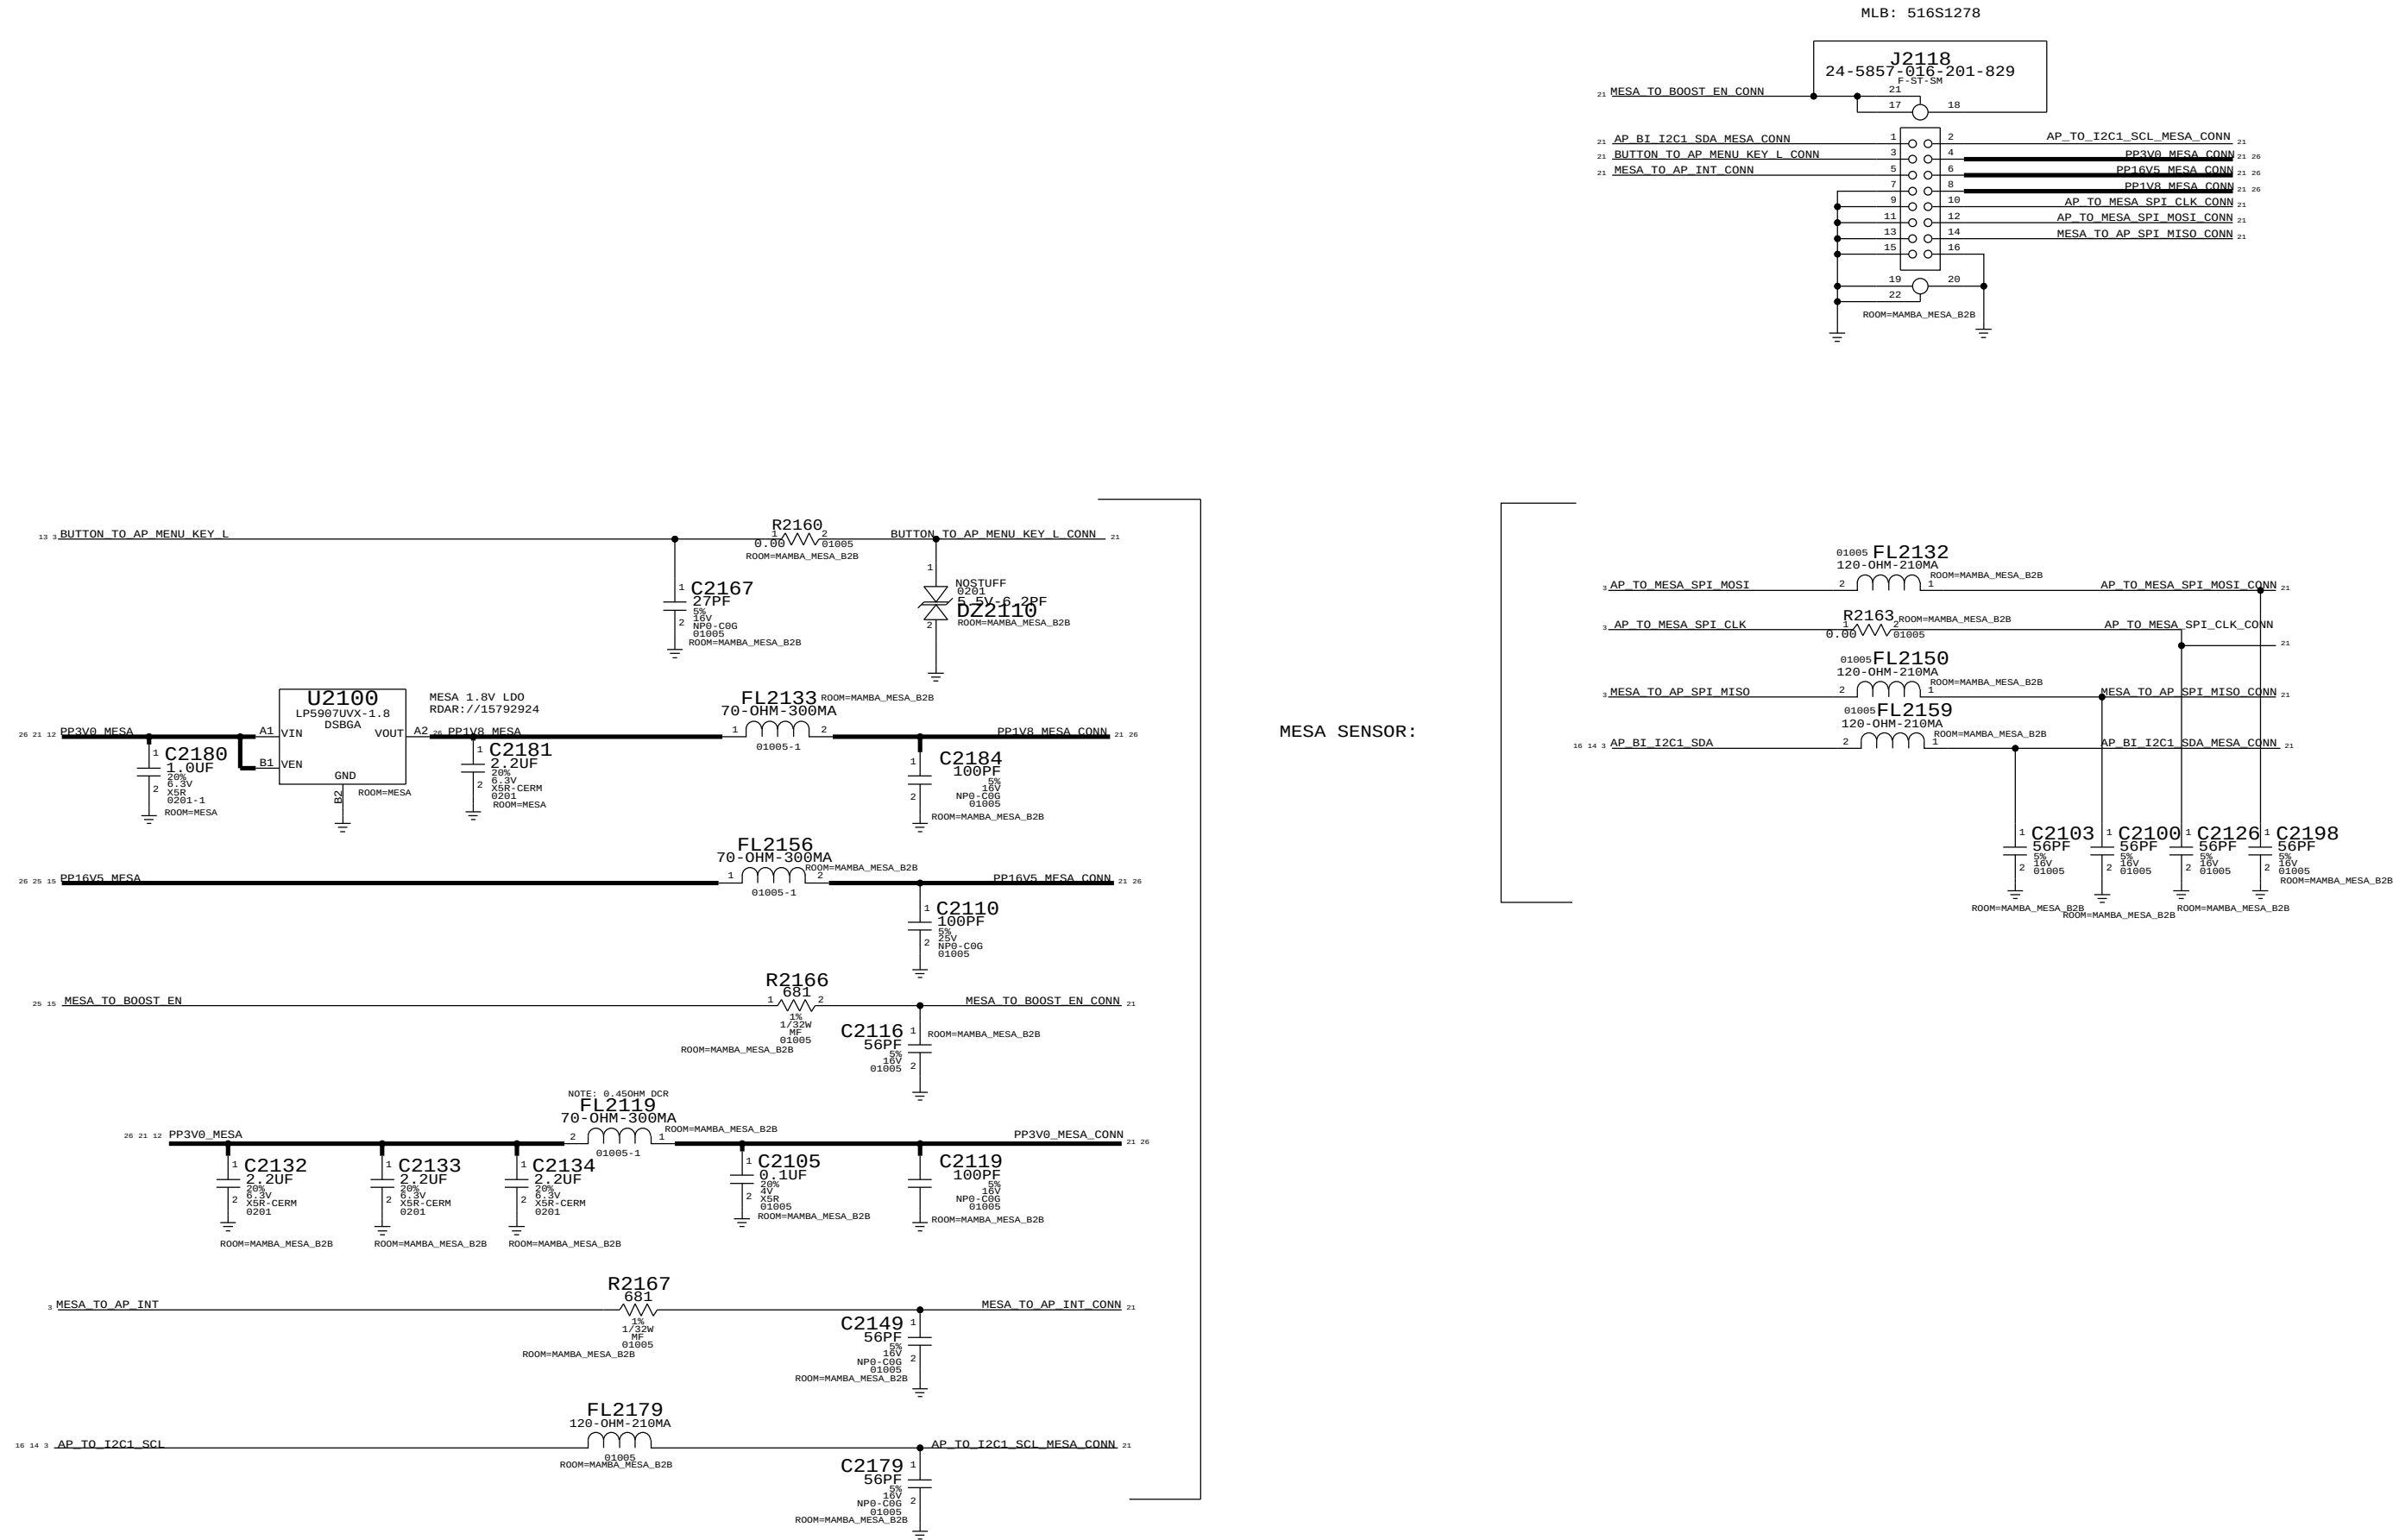


MESA SENSOR:


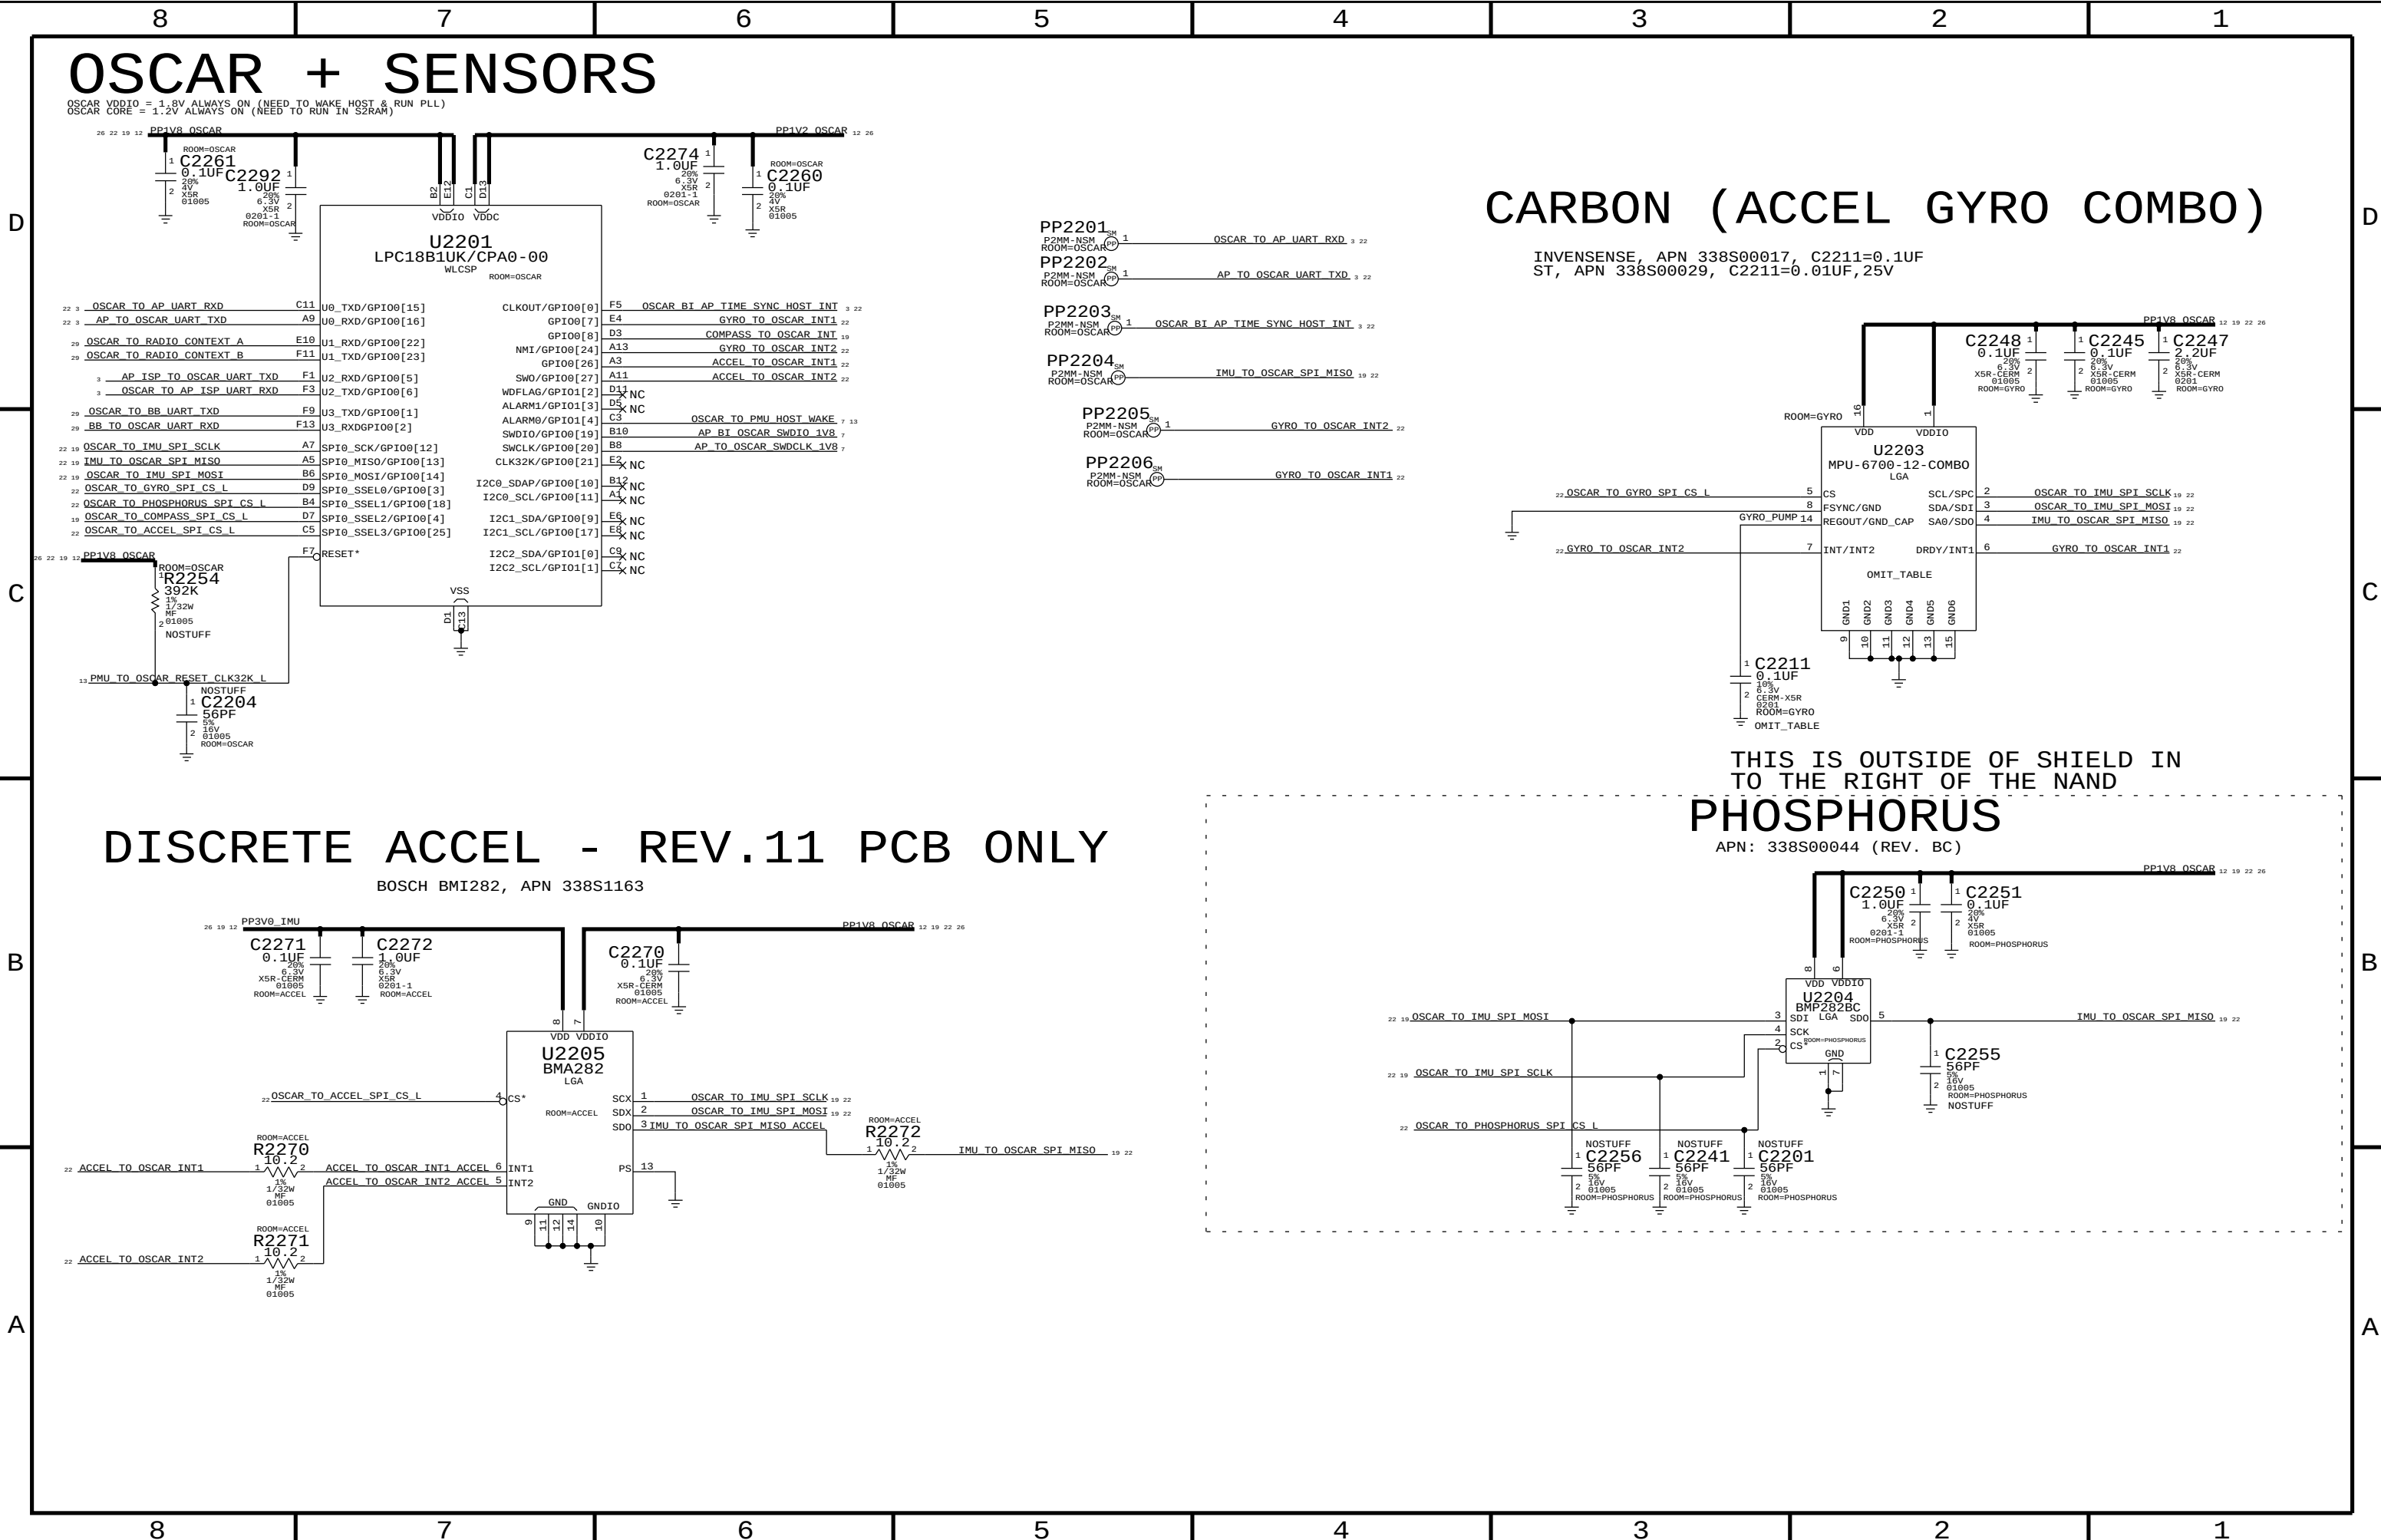


RCAM B2B (REAR CAMERA CONNECTOR)



RCAM:
4-LANE MIPI

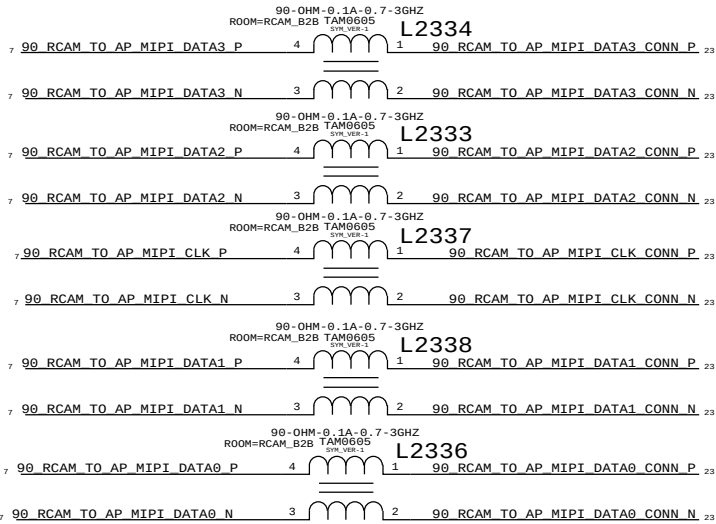

RCAM:
DIGITAL I/F
(I2C, CTRL, CLK)

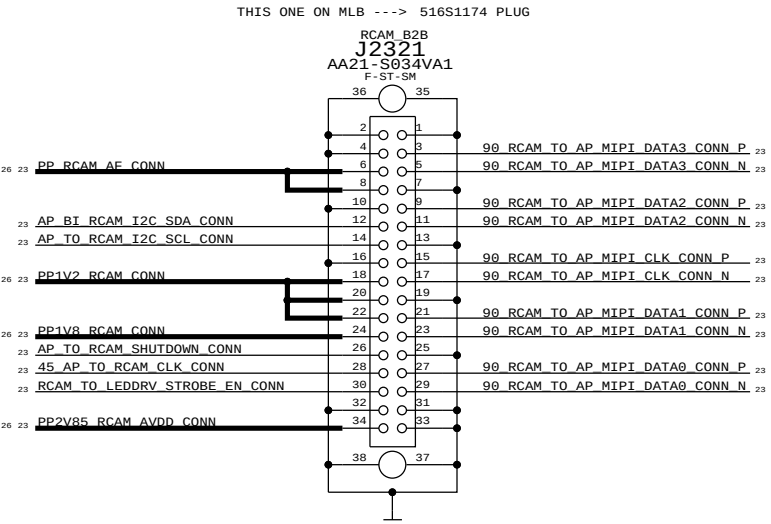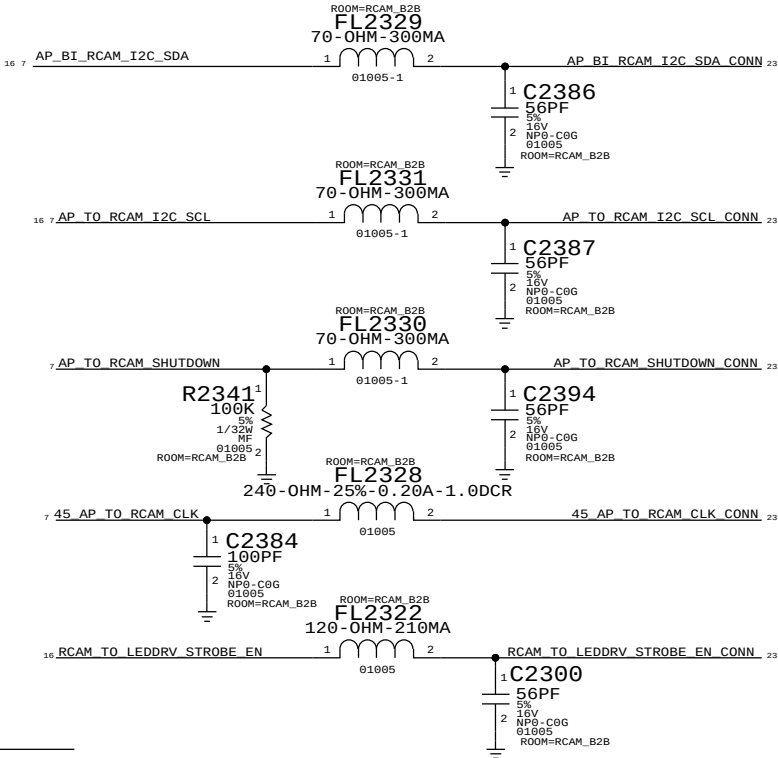

RCAM/FCAM AVDD RAIL EXT. LDO:

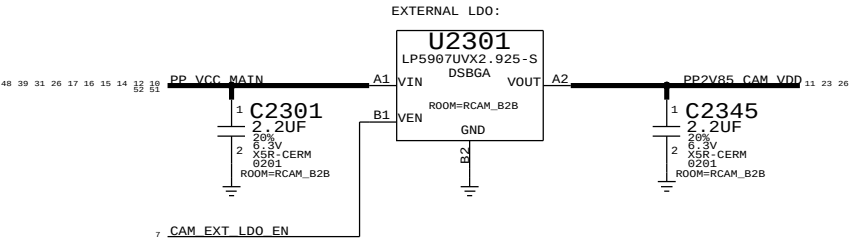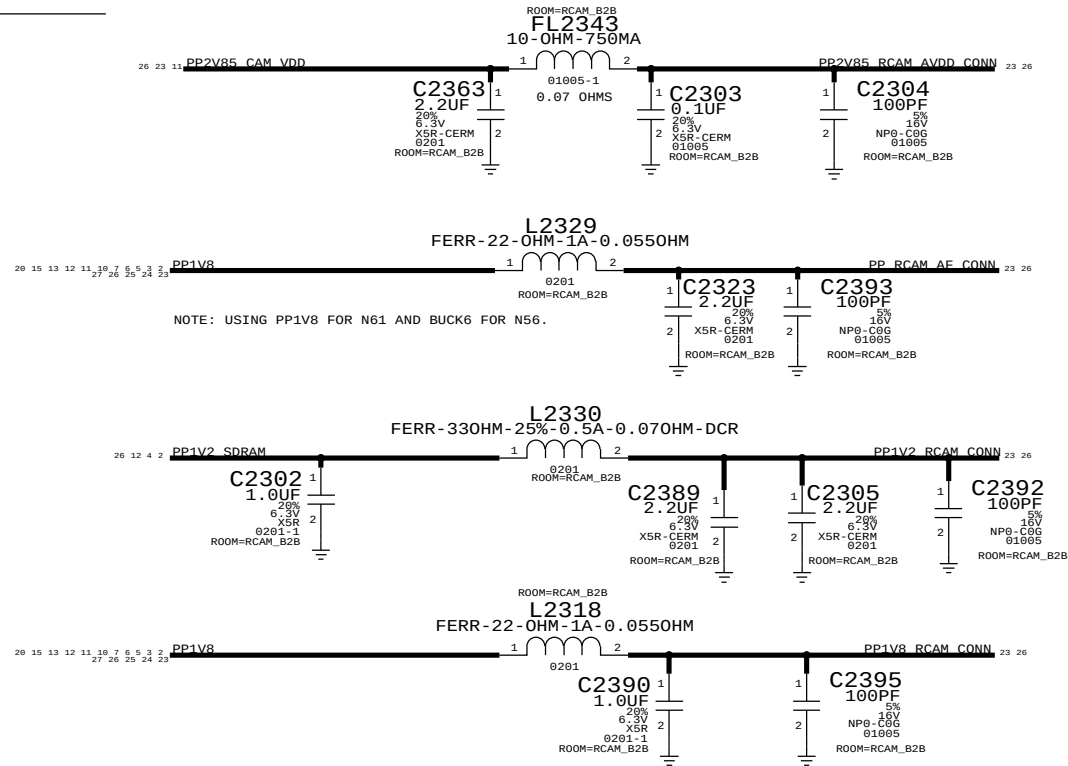

8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---

APN: 343S0638

D





B




8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---


8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---

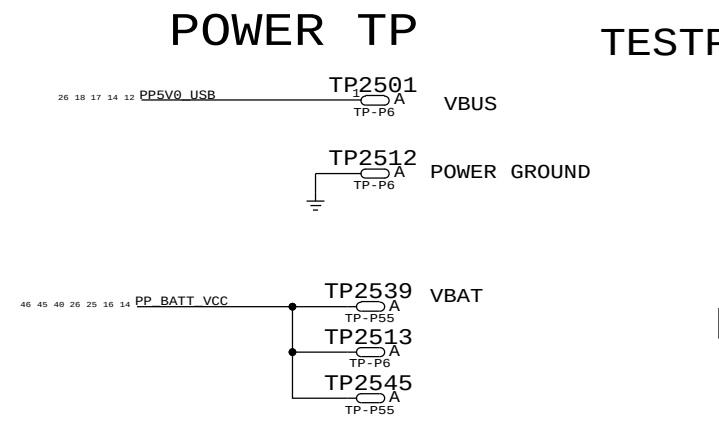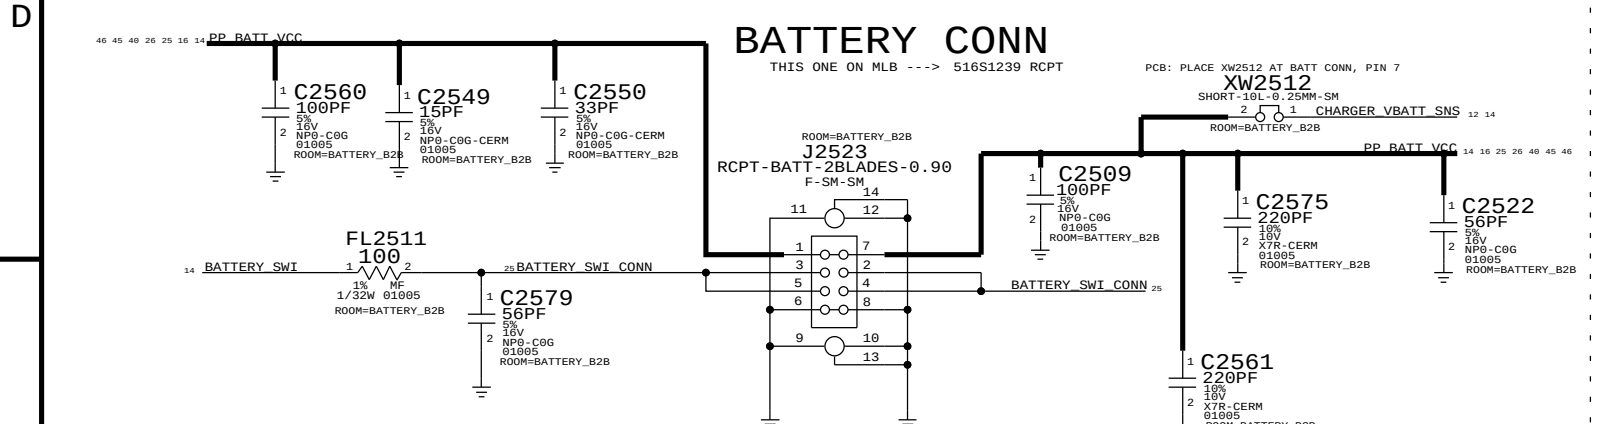


E75 - USB/UART/ID/POWER


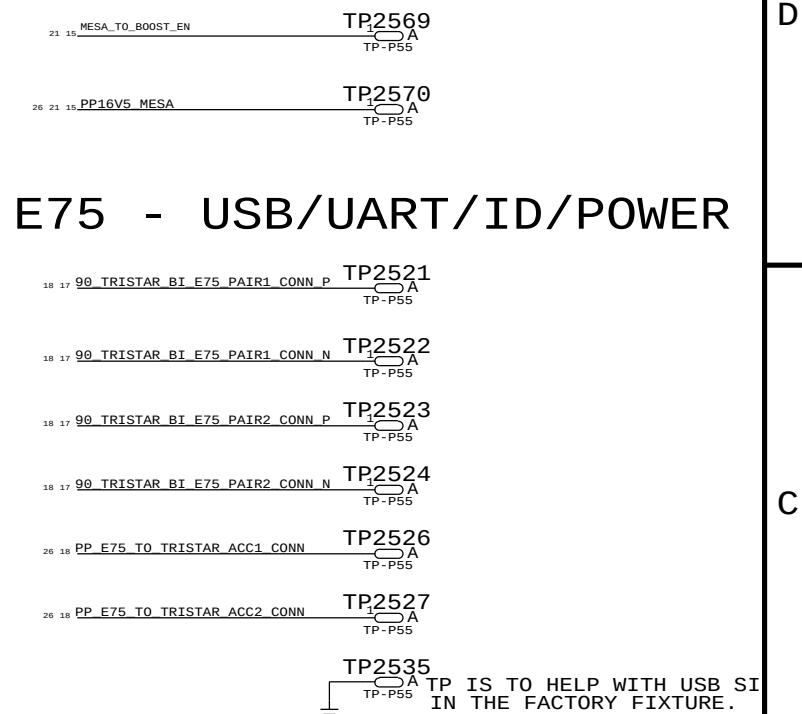


RESET

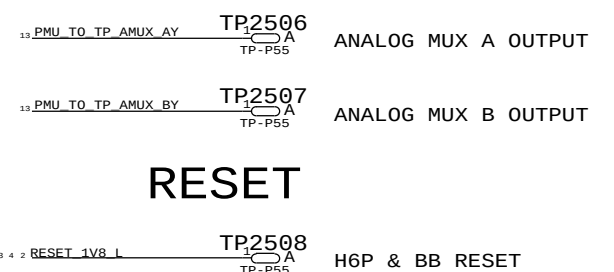

LCM BACKLIGHT

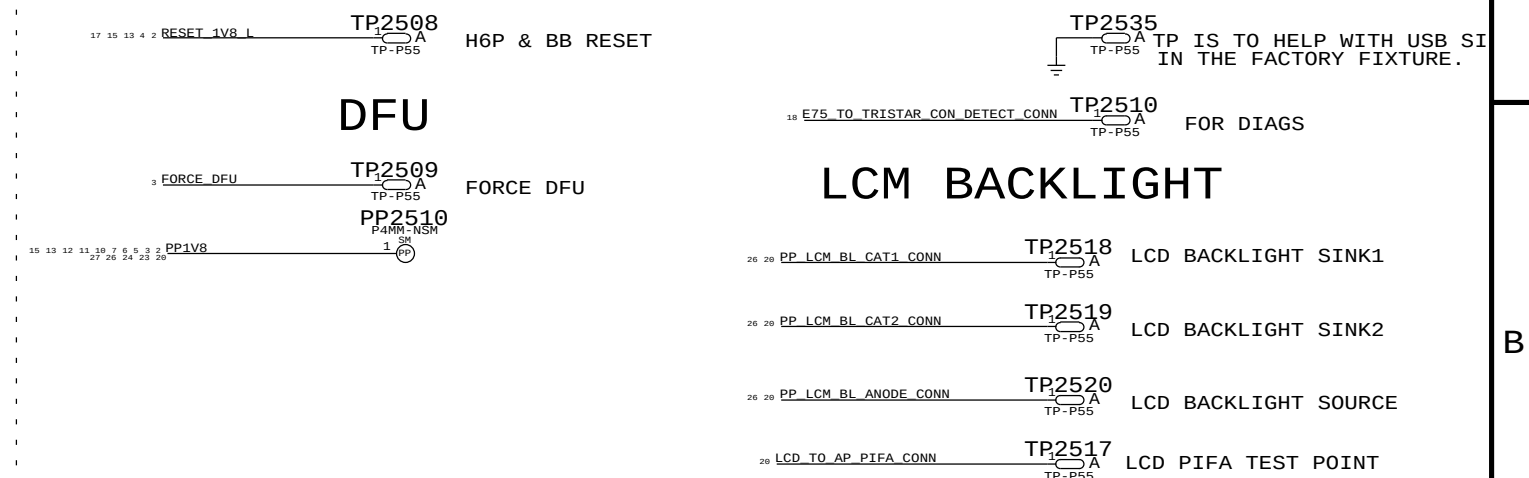

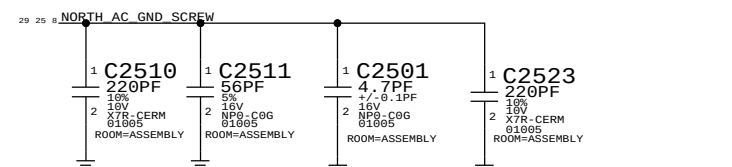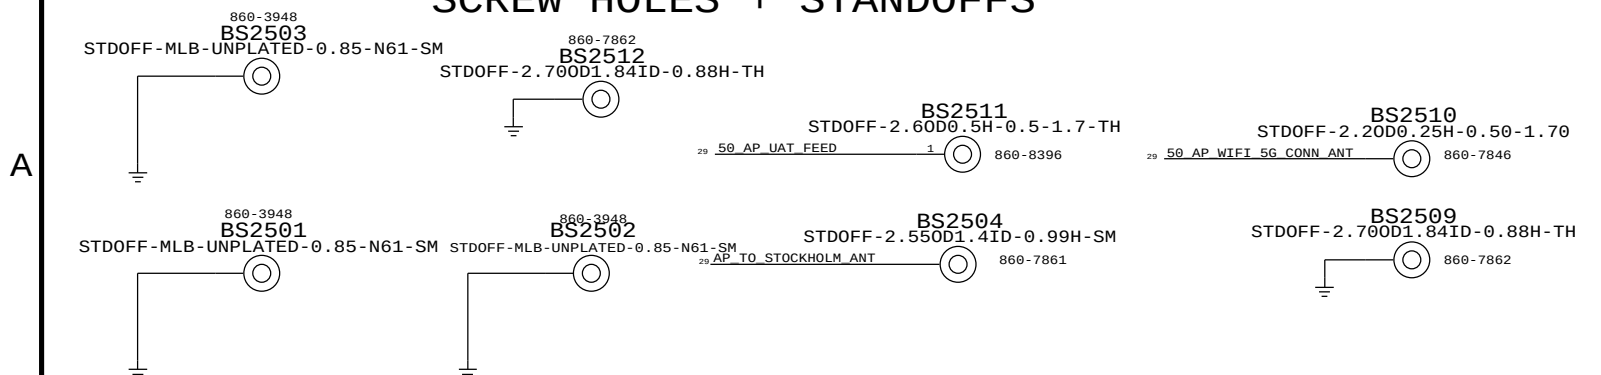

D

C

B


A

D

C

B |

A |

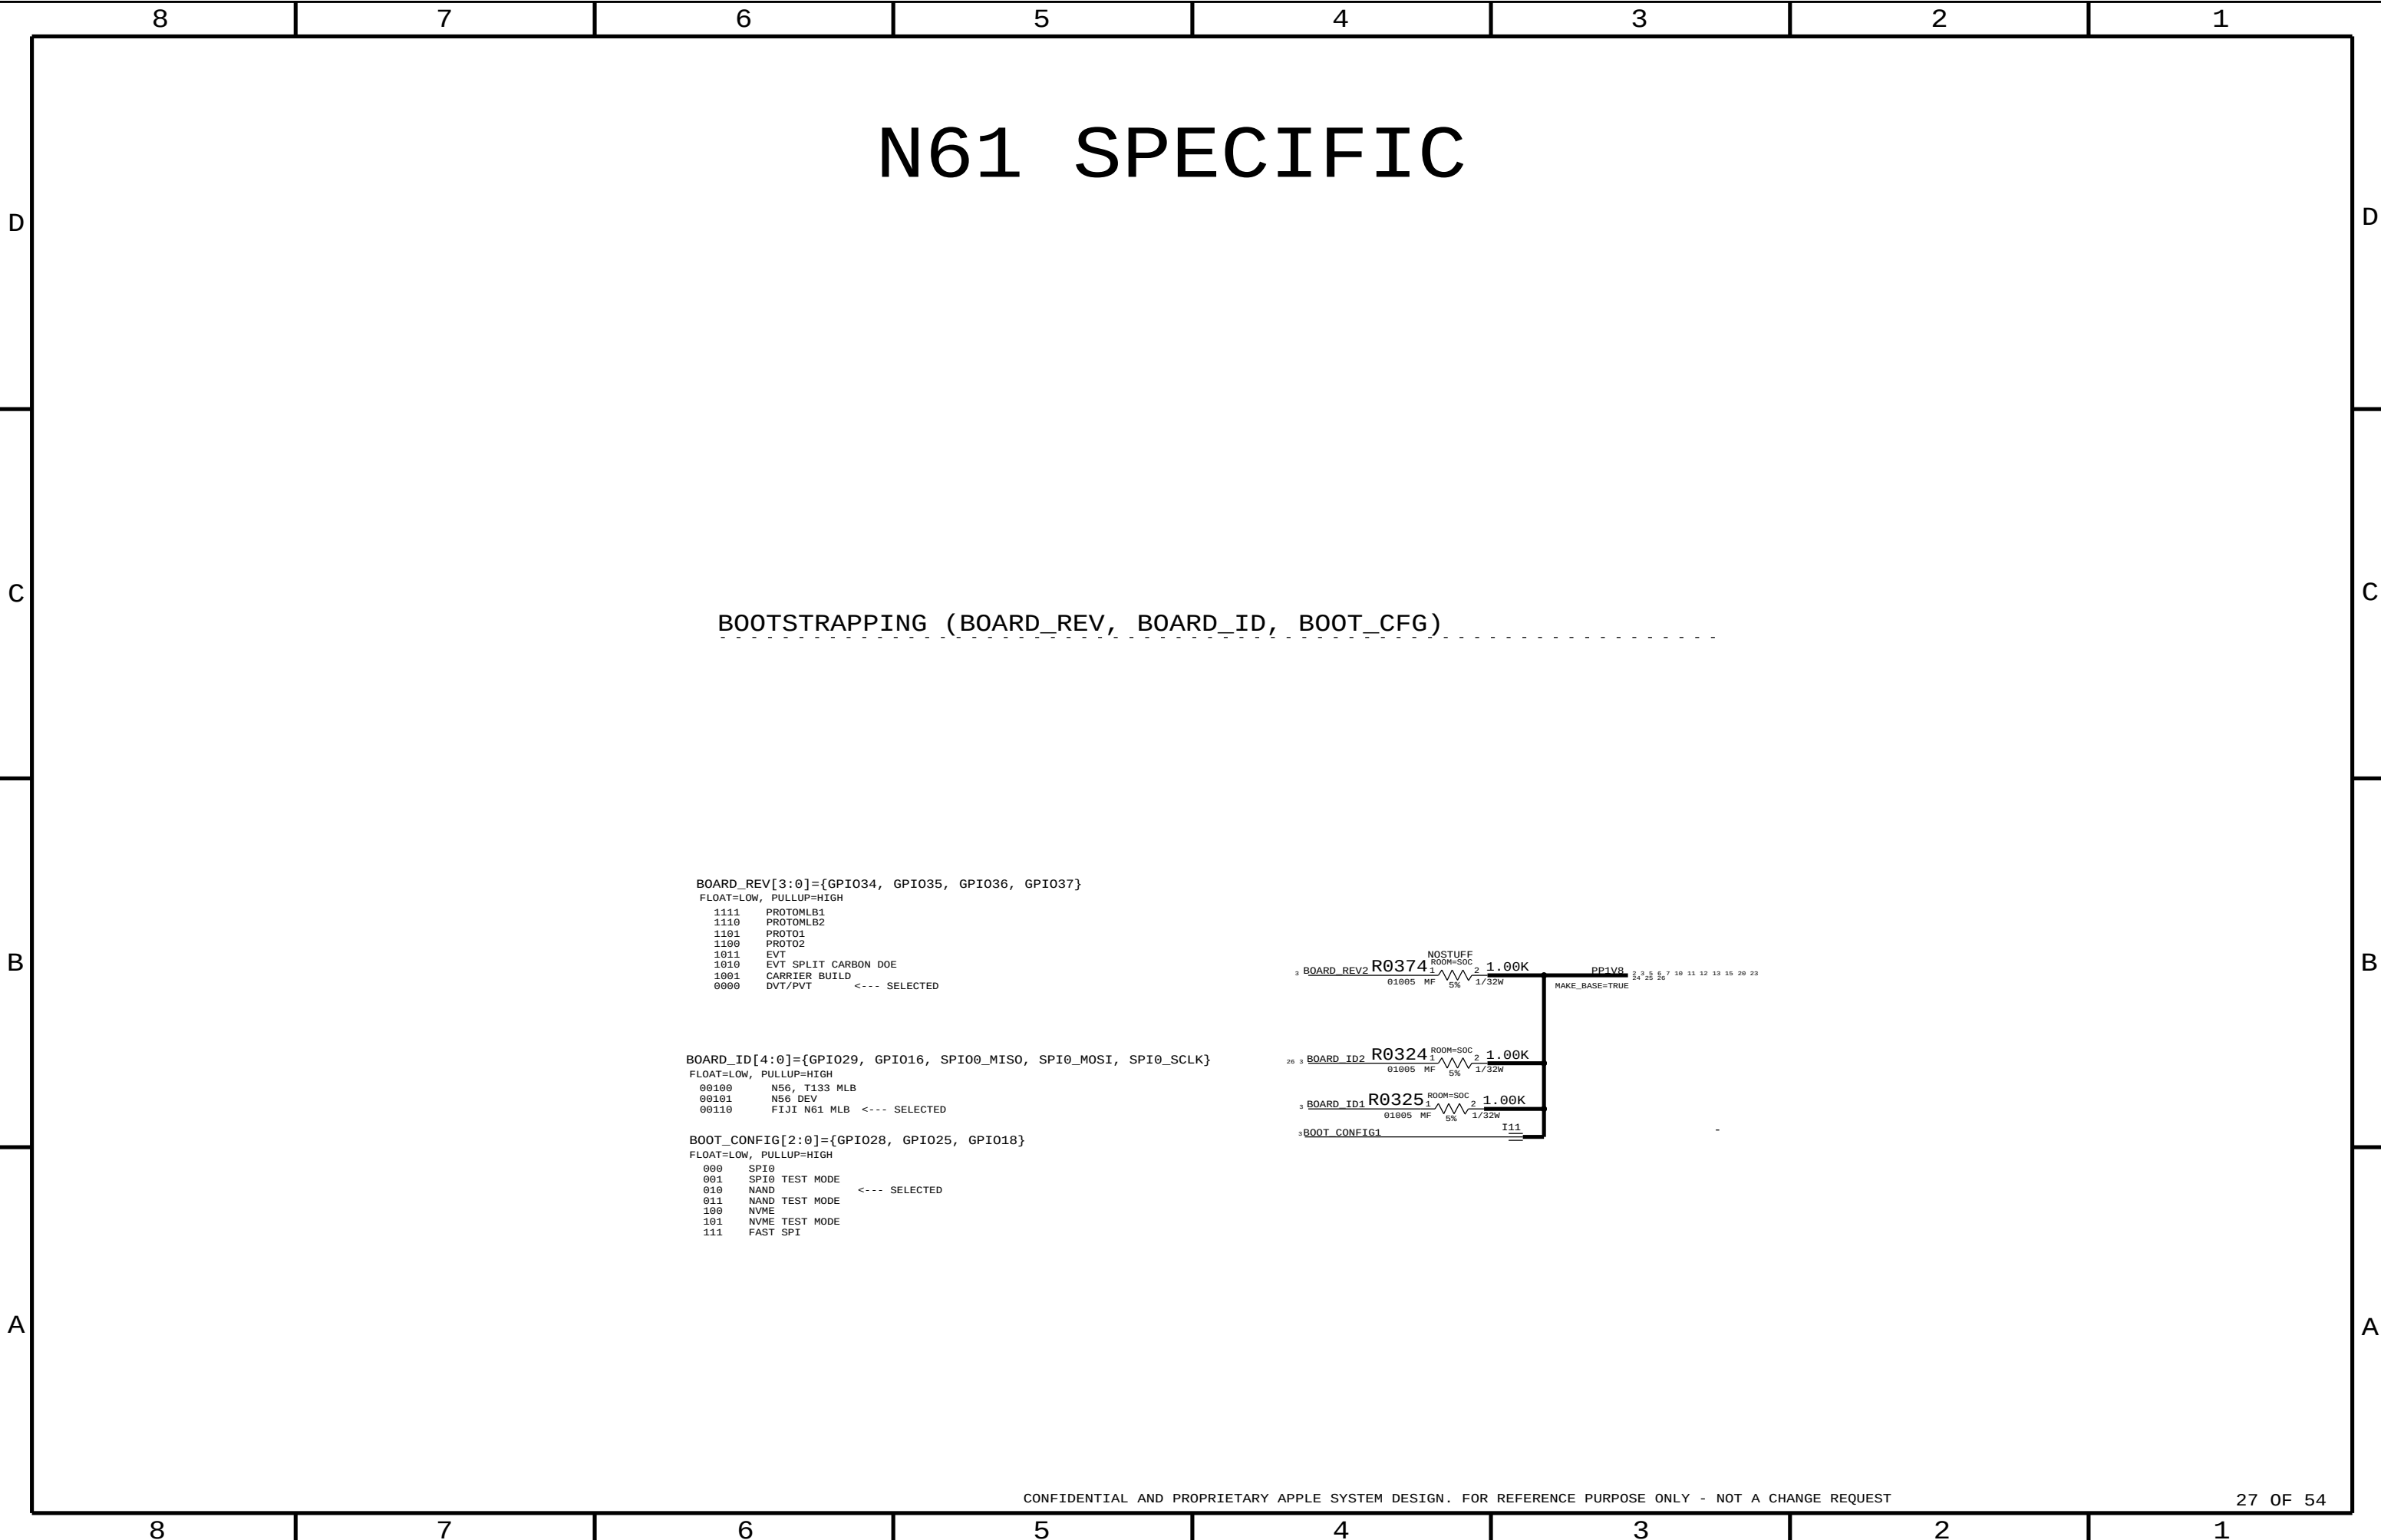

RADIO_MLB HIERARCHICAL SYMBOL

POWER

VCC_MAIN, VBAT GOES TO RADIO_MLB DIRECTLY
CHECK ALL PAGES IN RF SIDE!

CELLULAR HOUSE KEEPING

3	AP_TO_RADIO_ON_L	MAKE_BASE=TRUE	I325	RADIO_ON_L	30 32
3	BB_TO_AP_RESET_DET_L	MAKE_BASE=TRUE	I324	BB_RESET_DET_L	30 35
13	PMU_TO_BB_RST_L	MAKE_BASE=TRUE	I326	RF_PMIC_RESET_L	30 32
3	AP_TO_BB_RST_L	MAKE_BASE=TRUE	I327	BB_RST_L	30 32
3	AP_TO_BB_WAKE_MODEM	MAKE_BASE=TRUE	I329	AP_WAKE_MODEM	35
13	BB_TO_PMU_HOST_WAKE_L	MAKE_BASE=TRUE	I328	BB_WAKE_HOST_L	30 35
3	BB_TO_AP_IPC_GPIO	MAKE_BASE=TRUE	I394	BB_IPC_GPIO	35
16	BB_TO_LEDDRVR_GSM_BLANK	MAKE_BASE=TRUE	I398	GSM_TXBURST_IND	35
3	BB_TO_AP_GPS_SYNC	MAKE_BASE=TRUE	I392	BB_GPS_SYNC	30 35

HSIC IPC

2	50_AP_BI_BB_HSIC1_DATA	MAKE_BASE=TRUE	I368	50_BB_HSIC_DATA	30 34
2	50_AP_BI_BB_HSIC1_STB	MAKE_BASE=TRUE	I369	50_BB_HSIC_STROBE	30 34
3	AP_TO_BB_HOST_RDY	MAKE_BASE=TRUE	I371	BB_HOST_RDY	30 35
3	BB_TO_AP_DEVICE_RDY	MAKE_BASE=TRUE	I370	BB_DEVICE_RDY	30 35
3	BB_TO_AP_IPC_GPIO1	MAKE_BASE=TRUE	I372	BB_IPC_GPIO1	35

UART IPC

3	AP_TO_BB_UART2_RTS_L	MAKE_BASE=TRUE	I373	BB_UART_CTS_L	30 35
3	BB_TO_AP_UART2_CTS_L	MAKE_BASE=TRUE	I376	BB_UART_RTS_L	30 35
17 3	AP_TO_BB_UART2_TXD	MAKE_BASE=TRUE	I374	BB_UART_RXD	30 35
17 3	BB_TO_AP_UART2_RXD	MAKE_BASE=TRUE	I375	BB_UART_TXD	30 35

AUDIO I2S

3	45_AP_TO_BB_I2S3_BCLK	MAKE_BASE=TRUE	I377	BB_I2S_CLK	35
3	AP_TO_BB_I2S3_DOUT	MAKE_BASE=TRUE	I378	BB_I2S_RXD	30 35
3	BB_TO_AP_I2S3_DIN	MAKE_BASE=TRUE	I379	BB_I2S_TXD	30 35
3	AP_TO_BB_I2S3_LRCLK	MAKE_BASE=TRUE	I380	BB_I2S_WS	30 35

OSCAR UART

22	OSCAR_TO_BB_UART_TXD	MAKE_BASE=TRUE	I382	BB_OTHER_RXD	30 35
22	BB_TO_OSCAR_UART_RXD	MAKE_BASE=TRUE	I381	BB_OTHER_TXD	30 35

BB DEBUG INTERFACES

3	AP_TO_BB_COREDUMP	MAKE_BASE=TRUE	I384	BB_CORE_DUMP	30 35
13	PMU_TO_BB_VBUS_DET	MAKE_BASE=TRUE	I387	BB_USB_VBUS	30 34
17	90_TRISTAR_BI_BB_USB_N	MAKE_BASE=TRUE	I386	90_BB_USB_N	30 34
17	90_TRISTAR_BI_BB_USB_P	MAKE_BASE=TRUE	I388	90_BB_USB_P	30 34

RADIO ANTENNA CONTROL

18	PP_BB_VDD_2V7	MAKE_BASE=TRUE	I389	PP_LD014_RFSW	31 41 42
18	BB_GPIO0	MAKE_BASE=TRUE	I390	BB_LAT_GPIO0	35
18	BB_GPIO2	MAKE_BASE=TRUE	I391	BB_LAT_GPIO2	35
18	BB_GPIO3	MAKE_BASE=TRUE	I392	BB_LAT_GPIO3	35
18	BB_GPIO4	MAKE_BASE=TRUE	I394	BB_LAT_GPIO4	35

FCT TESTING

19	RADIO_TO_PMU_ADC_SMPS1	MAKE_BASE=TRUE	I395	ADC_SMPS1	30
19	RADIO_TO_PMU_ADC_PP_LD011_VDDIO	MAKE_BASE=TRUE	I396	ADC_PP_LD011	30
19	RADIO_TO_PMU_ADC_PP_LD05_SIM	MAKE_BASE=TRUE	I398	ADC_PP_LD05	30
19	RADIO_TO_PMU_ADC_SMPS4	MAKE_BASE=TRUE	I397	ADC_SMPS4	30

UPPER RADIO ANTENNA CONTROL

26	50_AP_WIFI_5G_CONN_ANT	MAKE_BASE=TRUE	I410	50_WIFI_5G_CONN_ANT	50
26	50_AP_UAT_FEED	MAKE_BASE=TRUE	I409	50_UPPER_ANT_FEED	50
	UAT_ANT_GND	MAKE_BASE=TRUE	I411	ANT_GND	50
26 17 15 12	PP3V0_TRISTAR	MAKE_BASE=TRUE	I404	PAC_VDD_3V0	53
25 8	NORTH_AC_GND_SCREW	MAKE_BASE=TRUE	I412	NORTH_ANT_GND	50

POWER

26 17 15 14 13 12 10 4 3	PP1V8_SDRAM	MAKE_BASE=TRUE	I314	PP_WL_BT_VDDIO_AP	51
			I315	PP_STOCKHOLM_1V8_S2B	52
			I407	REFE_VT0_S2B	53

WLAN/BT HOUSE KEEPING

19	45_PMU_TO_WLAN_CLK32K	MAKE_BASE=TRUE	I316	CLK32K_AP	30 51
13	PMU_TO_WLAN_REG_ON	MAKE_BASE=TRUE	I317	WLAN_REG_ON	30 51
13	WLAN_TO_PMU_HOST_WAKE	MAKE_BASE=TRUE	I318	HOST_WAKE_WLAN	30 51
13	PMU_TO_BT_REG_ON	MAKE_BASE=TRUE	I319	BT_REG_ON	30 51
3	AP_TO_BT_WAKE	MAKE_BASE=TRUE	I320	WAKE_BT	30 51
19	BT_TO_PMU_HOST_WAKE	MAKE_BASE=TRUE	I324	HOST_WAKE_BT	51

3	AP_TO_WLAN_JTAG_SWCLK	MAKE_BASE=TRUE	I333	WLAN_JTAG_SWCLK	30 51
3	AP_TO_WLAN_JTAG_SWDIO	MAKE_BASE=TRUE	I334	WLAN_JTAG_SWDIO	30 51
13	WLAN_TO_PMU_PCIE_WAKE_L	MAKE_BASE=TRUE	I335	WLAN_PCIE_WAKE_L	30 51
3	AP_TO_WLAN_DEVICE_WAKE	MAKE_BASE=TRUE	I336	PCIE_DEV_WAKE	30 51
7	99_WLAN_TO_AP_PCIE1_RXDP_P	MAKE_BASE=TRUE	I337	90_WLAN_PCIE_TDP	30 51
7	99_WLAN_TO_AP_PCIE1_RXDP_N	MAKE_BASE=TRUE	I340	90_WLAN_PCIE_TDN	30 51
7	99_AP_TO_WLAN_PCIE1_TXDP_P	MAKE_BASE=TRUE	I338	90_WLAN_PCIE_RDP	30 51
7	99_AP_TO_WLAN_PCIE1_TXDP_N	MAKE_BASE=TRUE	I339	90_WLAN_PCIE_RDN	30 51
7	99_AP_TO_WLAN_PCIE1_REFCLK1_P	MAKE_BASE=TRUE	I342	90_WLAN_PCIE_REFCLK_P	51
7	99_AP_TO_WLAN_PCIE1_REFCLK1_N	MAKE_BASE=TRUE	I341	90_WLAN_PCIE_REFCLK_N	51
7	WLAN_TO_AP_PCIE1_CLKREQ_L	MAKE_BASE=TRUE	I344	WLAN_PCIE_CLKREQ_L	30 51
7	AP_TO_WLAN_PCIE1_RST_L	MAKE_BASE=TRUE	I343	WLAN_PCIE_PERST_L	30 51

WLAN HSIC IPC

3	WLAN_TO_AP_UART4_RXD	MAKE_BASE=TRUE	I345	WLAN_UART_TXD	30 51
3	AP_TO_WLAN_UART4_TXD	MAKE_BASE=TRUE	I348	WLAN_UART_RXD	30 51
3	WLAN_TO_AP_UART4_CTS_L	MAKE_BASE=TRUE	I347	WLAN_UART_RTS_L	30 51
3	AP_TO_WLAN_UART4_RTS_L	MAKE_BASE=TRUE	I346	WLAN_UART_CTS_L	30 51

BT UART IPC

3	AP_TO_BT_UART1_RTS_L	MAKE_BASE=TRUE	I349	BT_UART_CTS_L	51
3	BT_TO_AP_UART1_CTS_L	MAKE_BASE=TRUE	I352	BT_UART_RTS_L	51
3	AP_TO_BT_UART1_TXD	MAKE_BASE=TRUE	I351	BT_UART_RXD	30 51
3	BT_TO_AP_UART1_RXD	MAKE_BASE=TRUE	I350	BT_UART_TXD	30 51

BT AUDIO PCM

3	45_AP_TO_BT_I2S1_BCLK	MAKE_BASE=TRUE	I354	BT_PCM_CLK	51
3	AP_TO_BT_I2S1_DOUT	MAKE_BASE=TRUE	I353	BT_PCM_IN	51
3	BT_TO_AP_I2S1_DIN	MAKE_BASE=TRUE	I355	BT_PCM_OUT	51
3	AP_TO_BT_I2S1_LRCLK	MAKE_BASE=TRUE	I356	BT_PCM_SYNC	51

OSCAR STATES

22	OSCAR_TO_RADIO_CONTEXT_A	MAKE_BASE=TRUE	I358	OSCAR_CONTEXT_A	51
22	OSCAR_TO_RADIO_CONTEXT_B	MAKE_BASE=TRUE	I357	OSCAR_CONTEXT_B	51








STOCKHOLM

3	STOCKHOLM_TO_AP_UART3_CTS_L	MAKE_BASE=TRUE	I359	STOCKHOLM_RTS_L	30 52
3	AP_TO_STOCKHOLM_UART3_RTS_L	MAKE_BASE=TRUE	I360	STOCKHOLM_CTS_L	30 52
3	STOCKHOLM_TO_AP_UART3_RXD	MAKE_BASE=TRUE	I361	STOCKHOLM_UART_TXD	30 52
3	AP_TO_STOCKHOLM_UART3_TXD	MAKE_BASE=TRUE	I363	STOCKHOLM_UART_RXD	30 52
7	AP_TO_STOCKHOLM_DWLD_REQ	MAKE_BASE=TRUE	I362	STOCKHOLM_FW_DWLD_REQ	52
13	STOCKHOLM_TO_PMU_HOST_WAKE	MAKE_BASE=TRUE	I364	STOCKHOLM_HOST_WAKE	30 52
7	AP_TO_STOCKHOLM_EN	MAKE_BASE=TRUE	I365	STOCKHOLM_ENABLE	52

26	AP_TO_STOCKHOLM_ANT	MAKE_BASE=TRUE	I406	STOCKHOLM_ANT	52
----	---------------------	----------------	------	---------------	----

AP INTERFACE & DEBUG CONNECTORS


PROBE POINTS

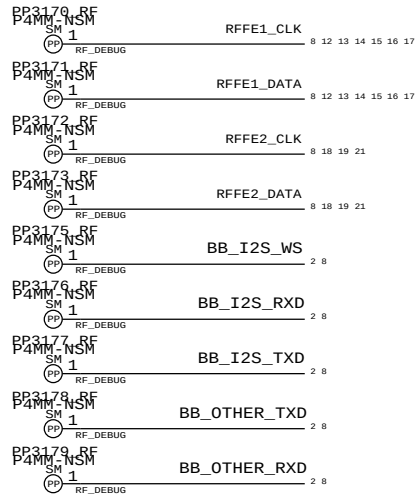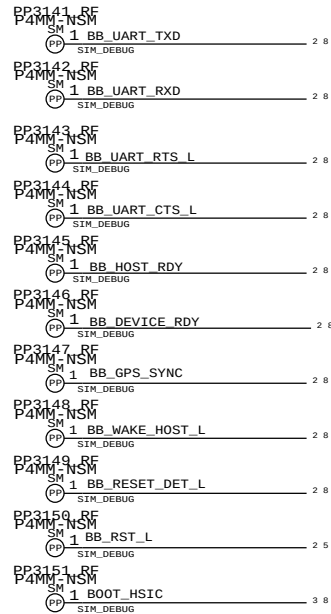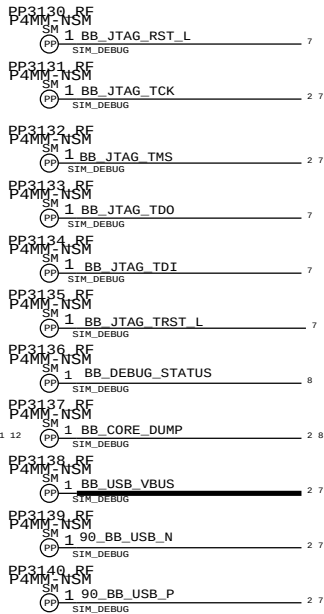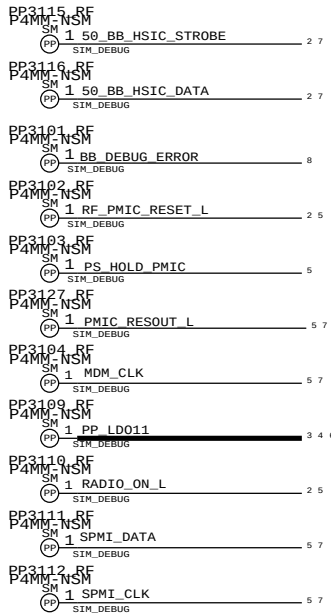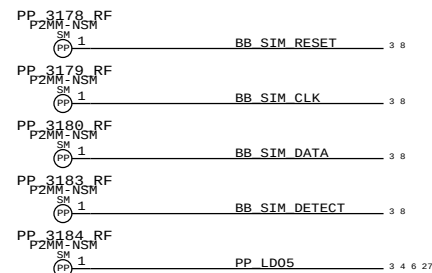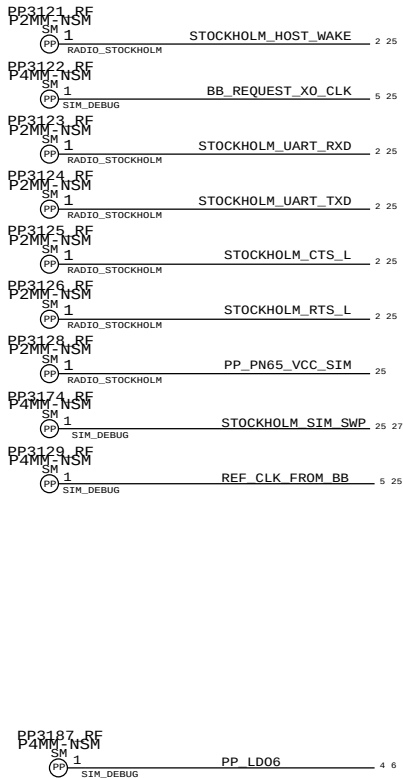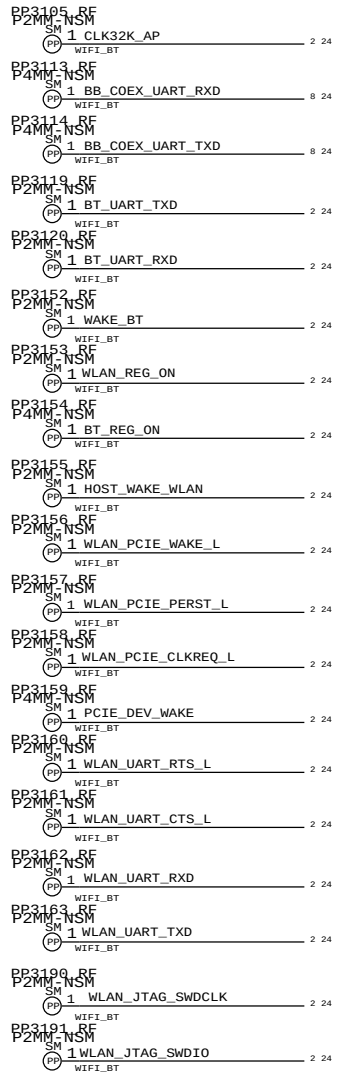


PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
197S0565	197S0593	ALTERNATE	Y3301_RF	KDS 19.2MHZ XTAL
197S0598	197S0593	ALTERNATE	Y3301_RF	AVX 19.2MHZ XTAL
138S0739	138S0706	ALTERNATE	C4207_RF	1.0UF CAPACITOR
138S0945	138S0706	ALTERNATE	C4207_RF	1.0UF CAPACITOR
138S1103	138S0719	ALTERNATE	C4007_RF	4.7UF CAPACITOR
155S0024	155S0950	ALTERNATE	F_TRI_RF	TRIPLEXER BIN2

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
339S0228	1	MODULE, WIFI/BT, CORONA45, LGA58	U5201_RF	Y	MODULE_MUR_WIFI_BT
131S0648	1	CAP, CER, C06, 0.3PF, +/-0.0PF, 16V, 01005	C5208_RF	Y	MODULE_MUR_WIFI_BT
152S1241	1	IND, FILM, 1.1NH, +/-0.1NH, 0.75A, HT-Q, 0201	R5215_RF	Y	MODULE_MUR_WIFI_BT
131S0366	1	CAP, CER, NP0, C06, 0.2PF, +/-0.1PF, 16V, 01005	C5212_RF	Y	NOSTUFF
339S0231	1	MODULE, WIFI/BT, CORONA45, LGA58	U5201_RF	Y	MODULE_USI_WIFI_BT
131S0648	1	CAP, CER, C06, 0.3PF, +/-0.0PF, 16V, 01005	C5208_RF	Y	NOSTUFF
117S0002	1	RES, MF 1A MAX, 0.00HM, 5, 0201, SMD	R5215_RF	Y	MODULE_USI_WIFI_BT
339S0242	1	MODULE, WIFI/BT, CORONA45, LGA58	U5201_RF	Y	MODULE_TDK_WIFI_BT
131S0648	1	CAP, CER, C06, 0.3PF, +/-0.1PF, 16V, 01005	C5208_RF	Y	NOSTUFF
117S0002	1	RES, MF 1A MAX, 0.00HM, 5, 0201, SMD	R5215_RF	Y	MODULE_TDK_WIFI_BT

SIM CARD CONNECTOR

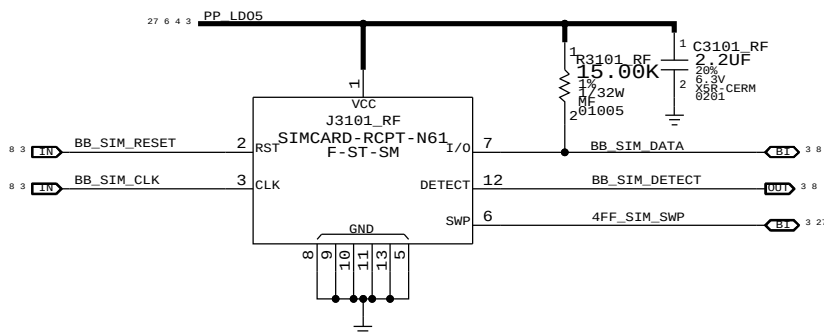


SIM CARD ESD PROTECTION

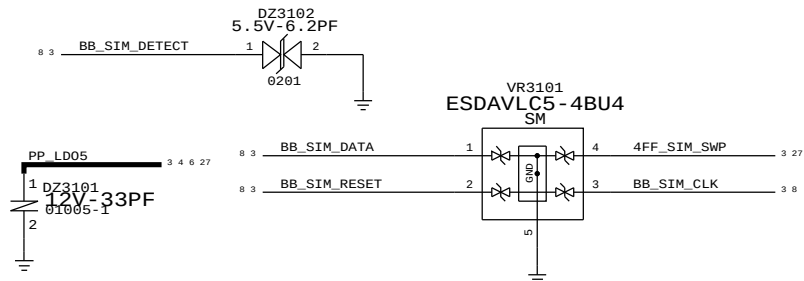

BASEBAND PMU (1 OF 2)


CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

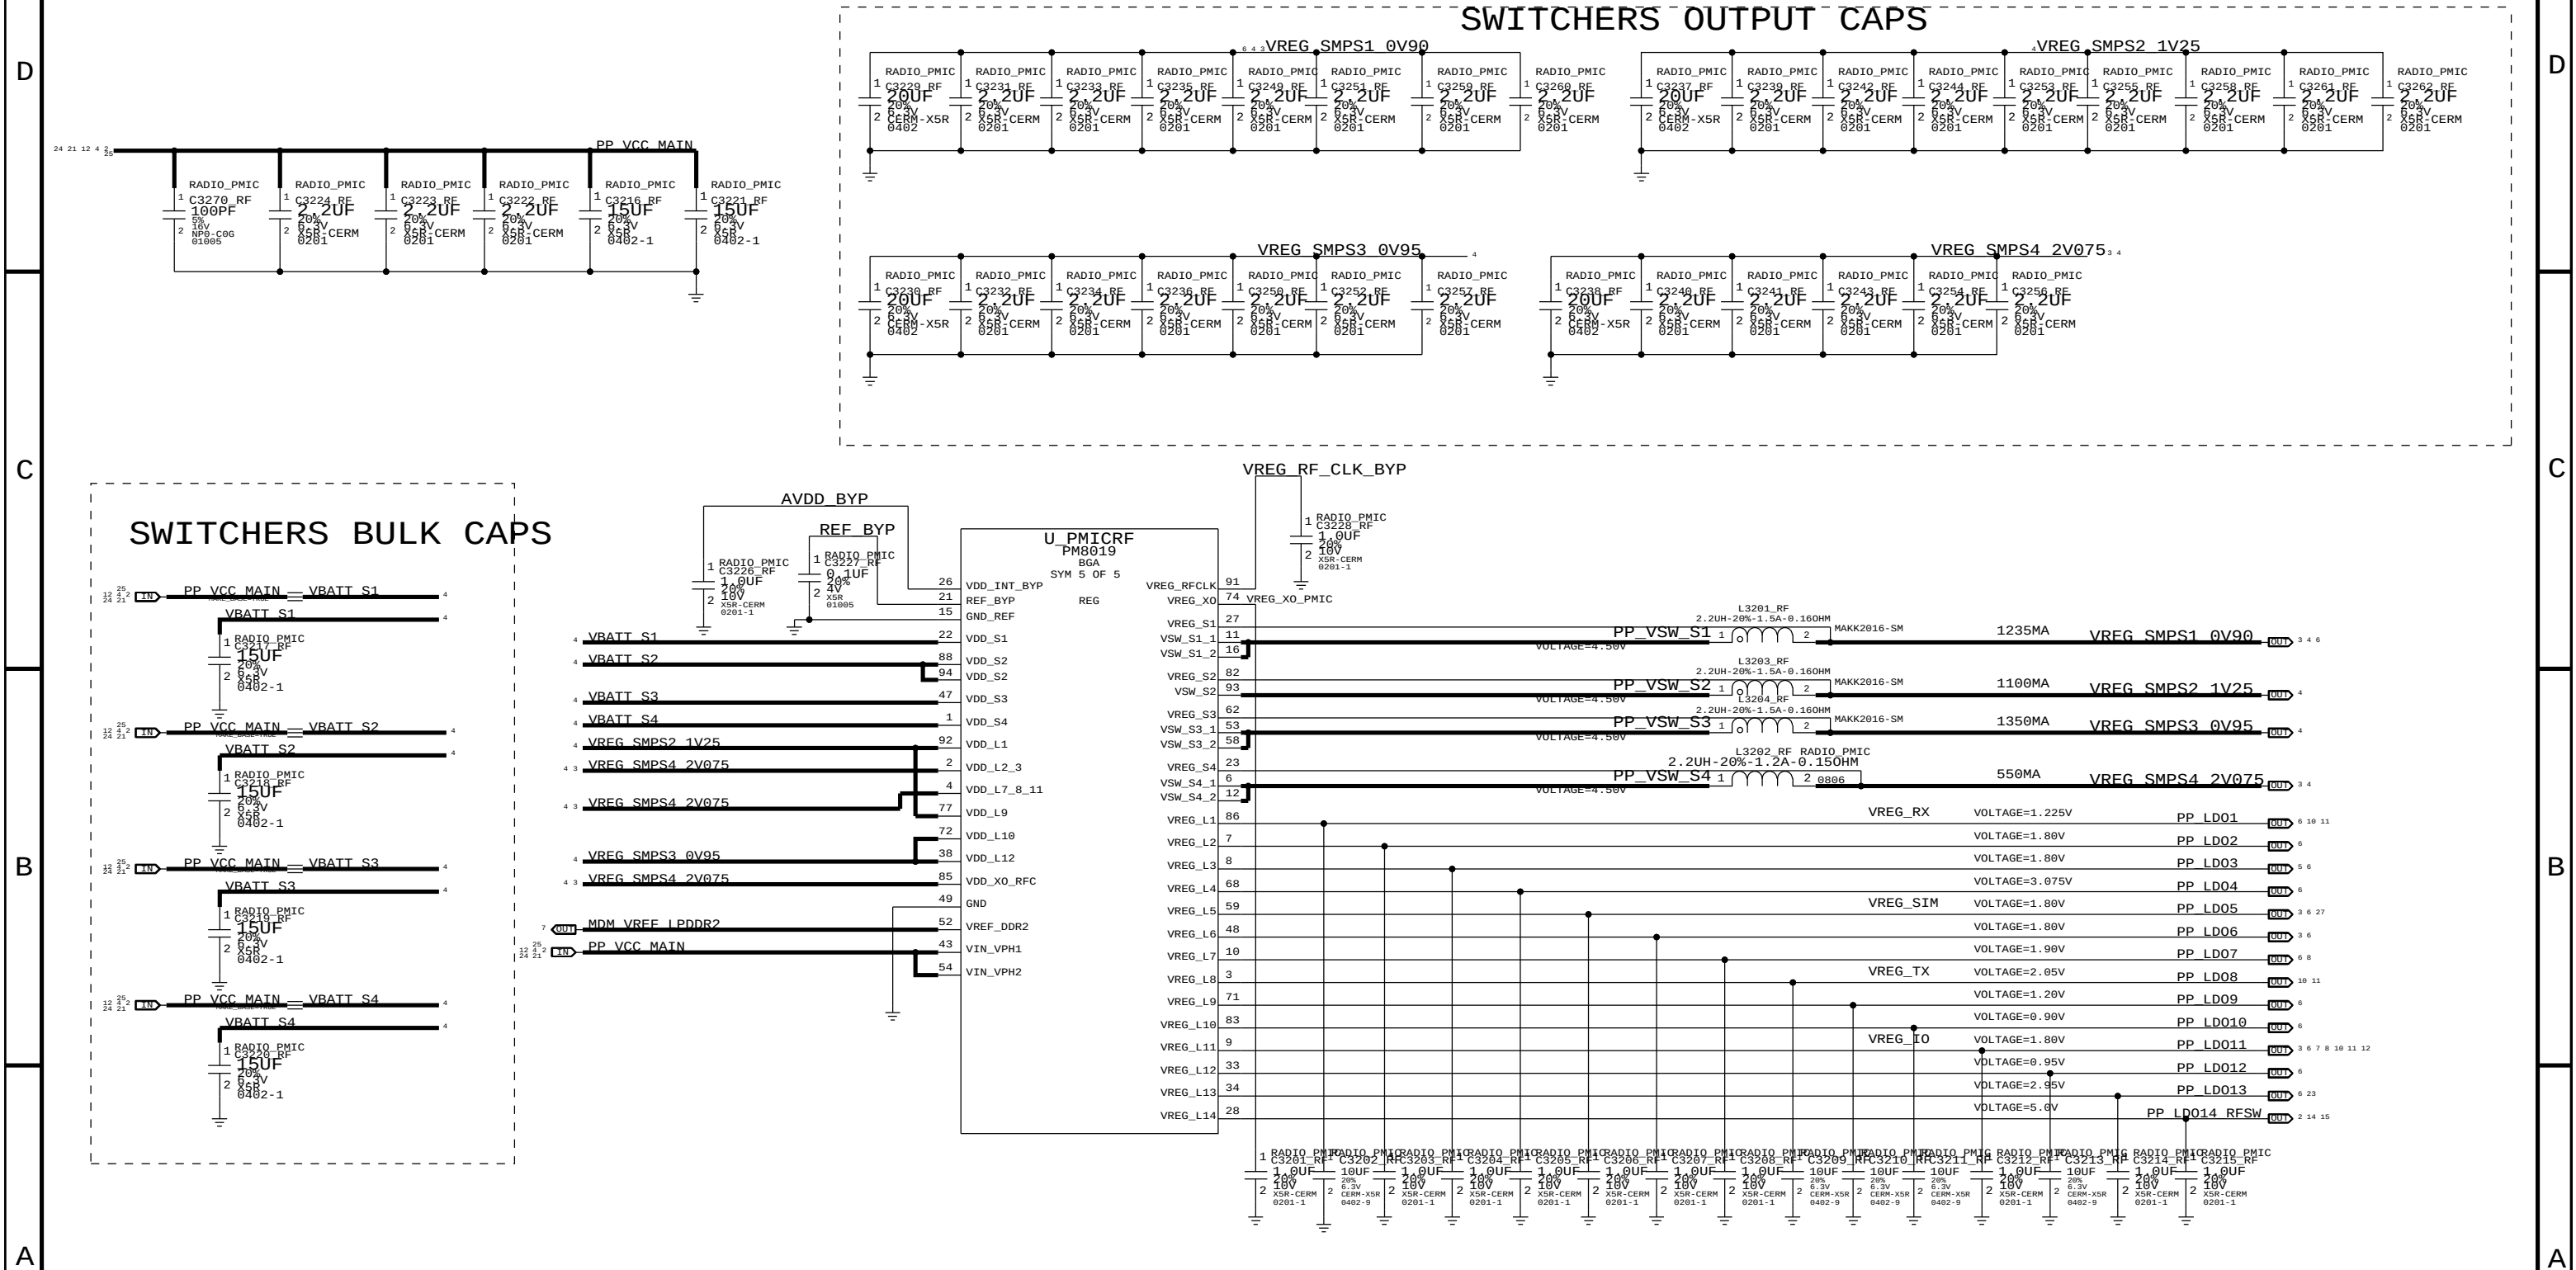

~~CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.~~

C401
R411
L400
U404

BOARD_ID	REVISION
0.00V	N61 PROTO_MLB1
0.50V	N61 DEV3
0.70V	N61 DEV4
0.90V	N61 PROTO_MLB2
1.10V	N61/N56 PROTO1
1.30V	N61/N56 PROTO2
1.40V	N61/N56 EVT1
1.50V	N61/N56 EVT2 (CARRIER)
1.60V	N61/N56 DVT
1.70V	N61/N56 PVT

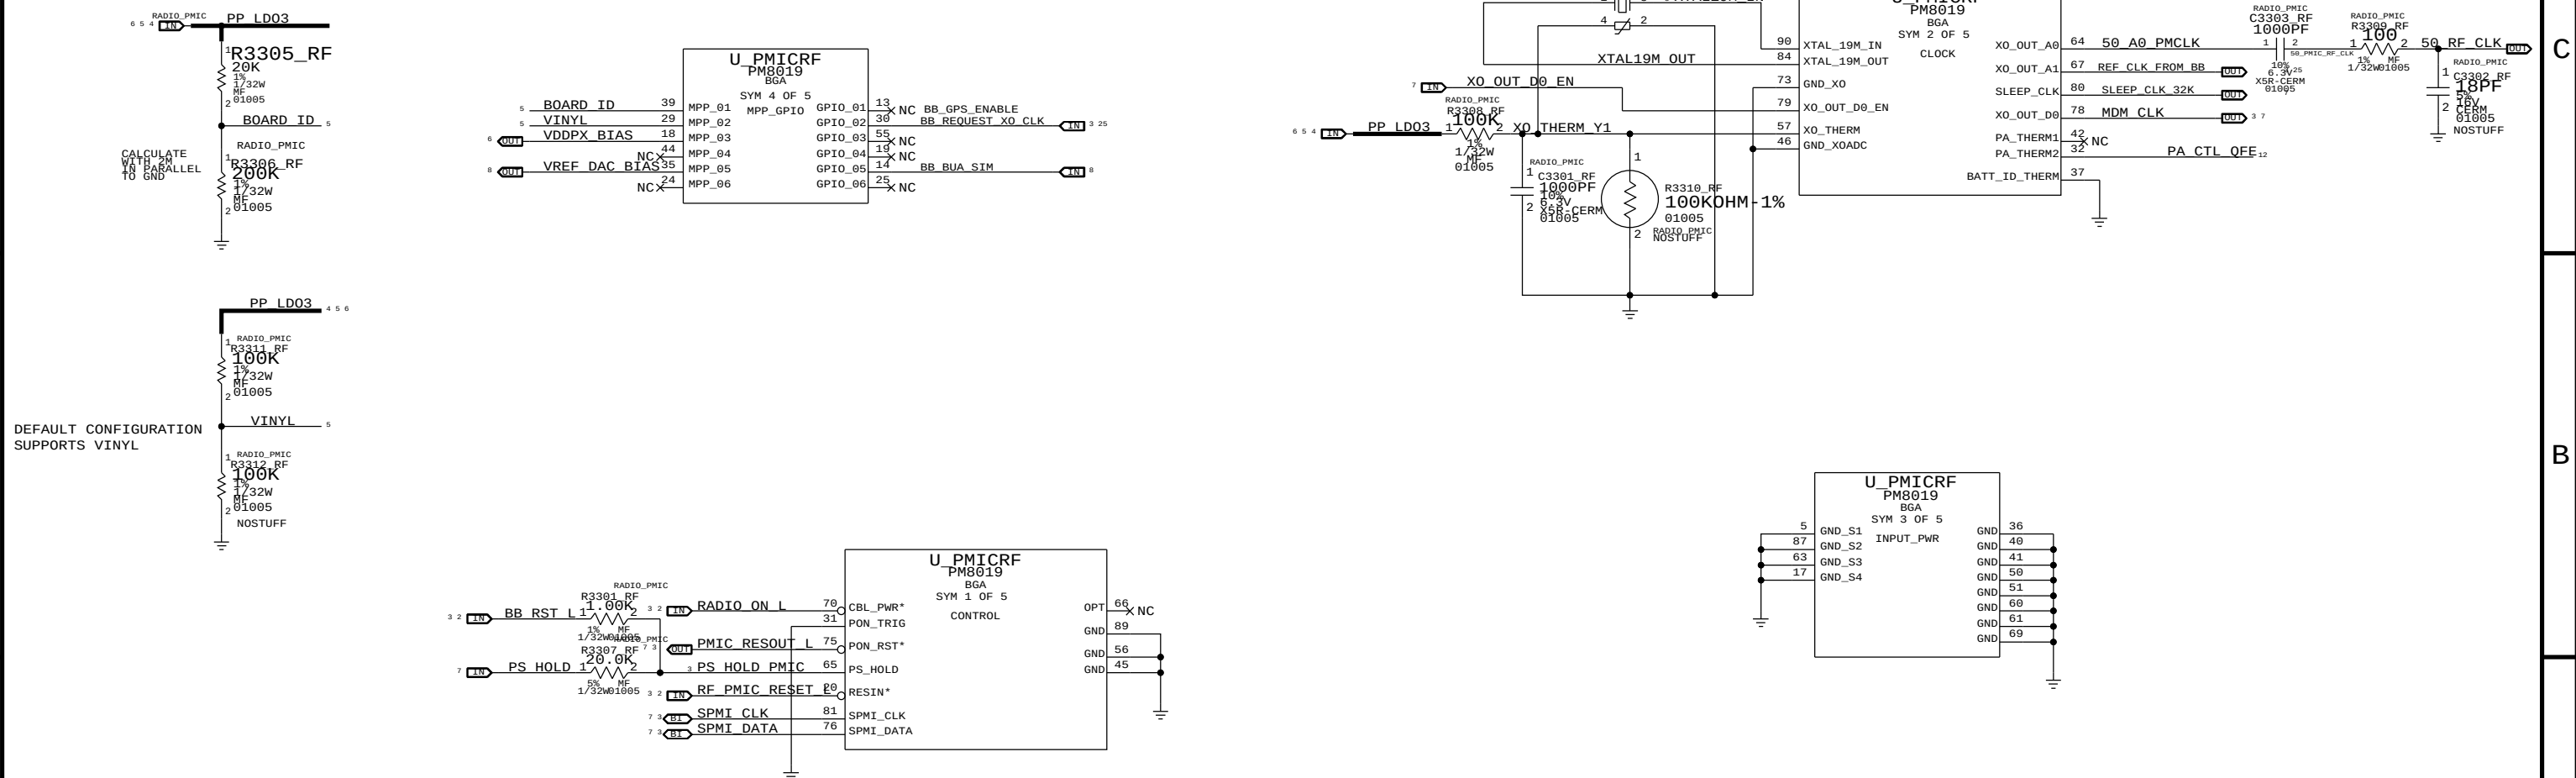

BASEBAND (1 OF 3)

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

C538
R500
L500
U502

D

C

B




A

D

C

B





A

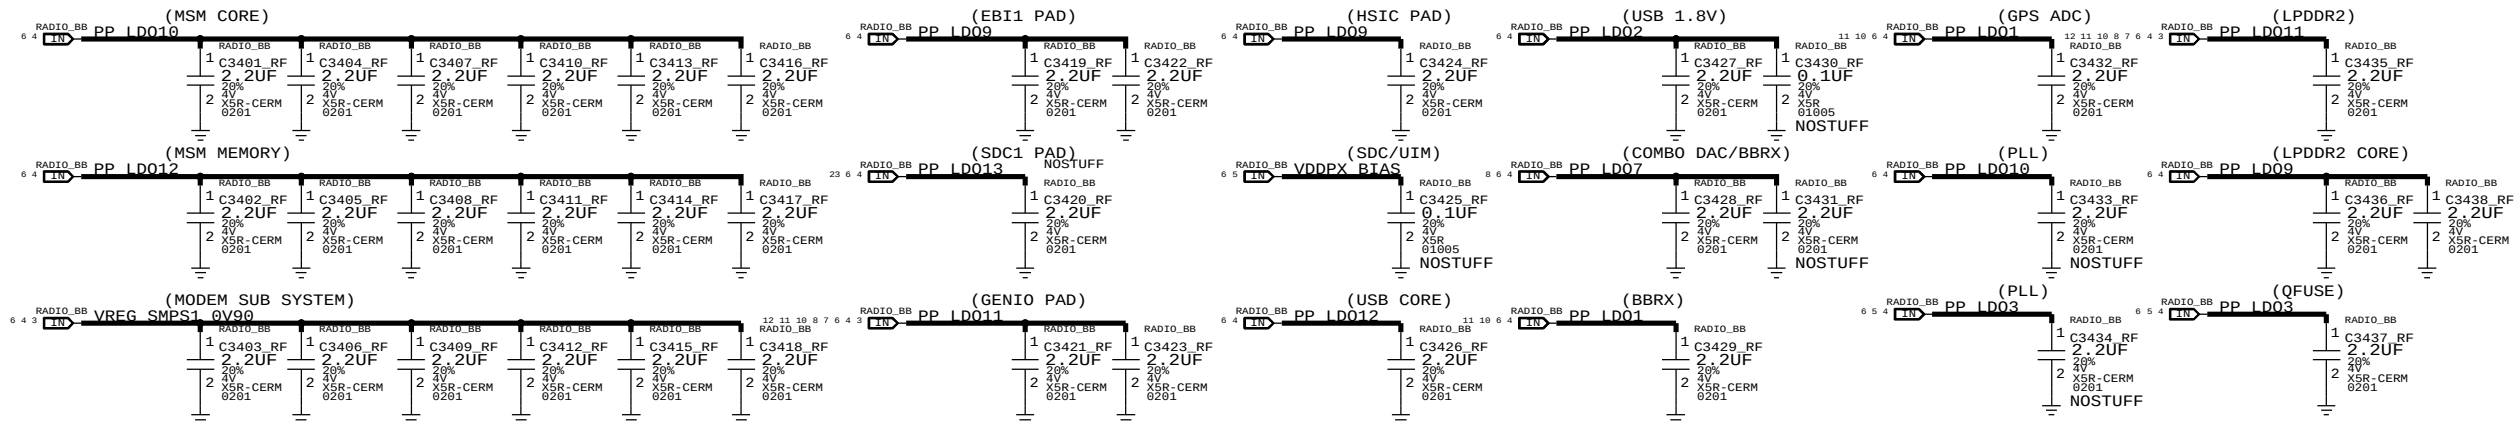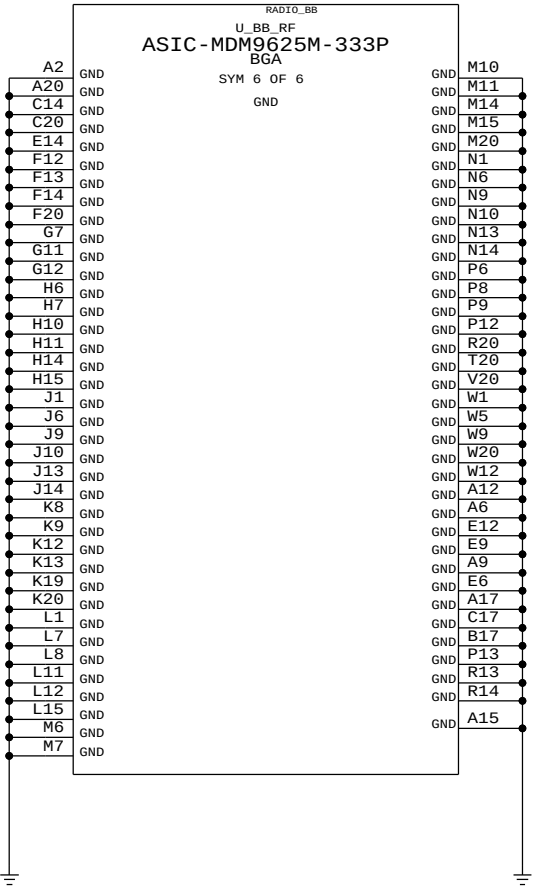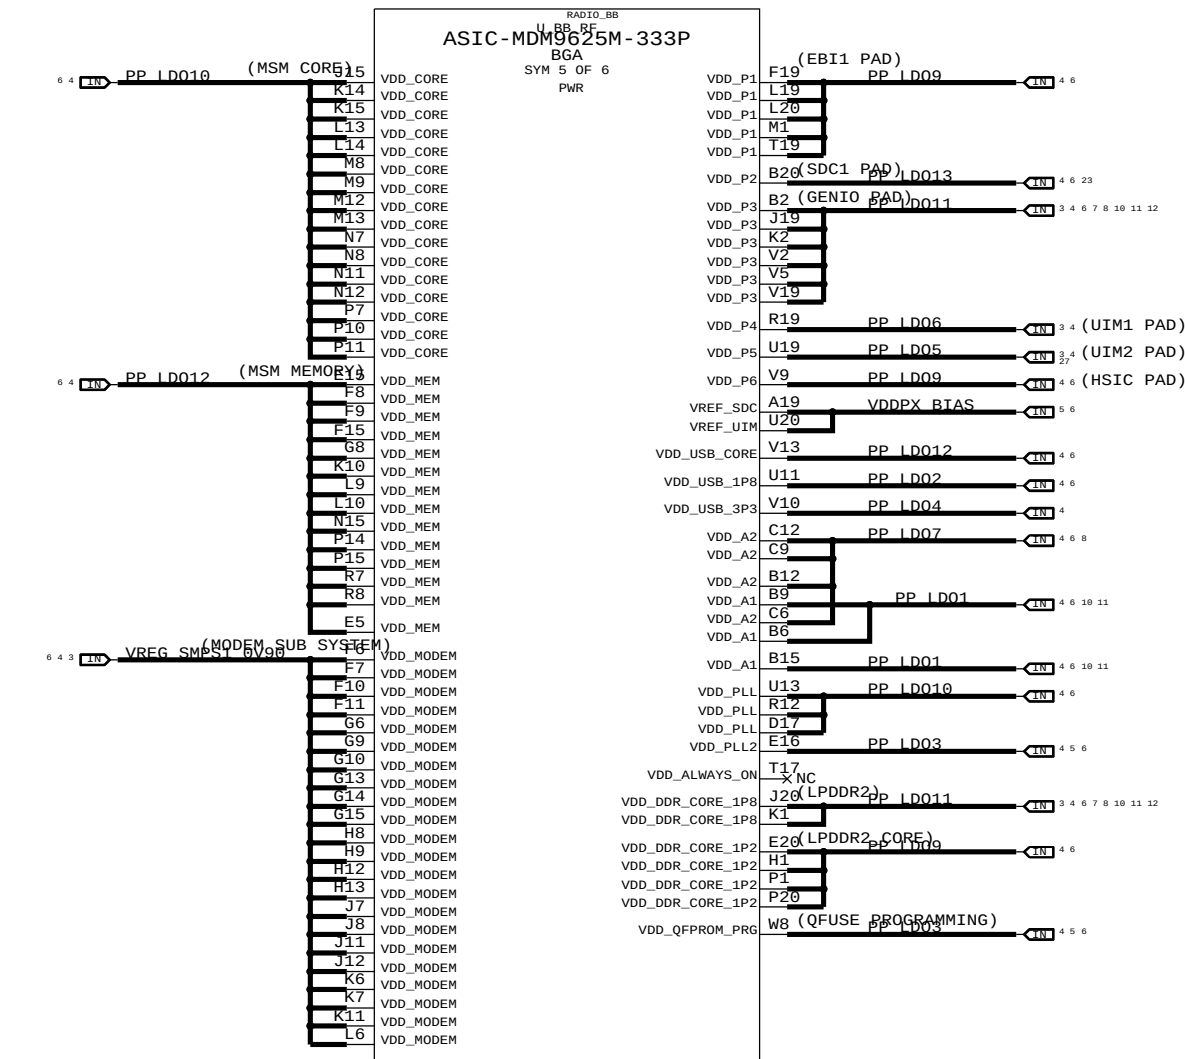

BASEBAND (3 OF 3)

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

C704
R700
L700
U702

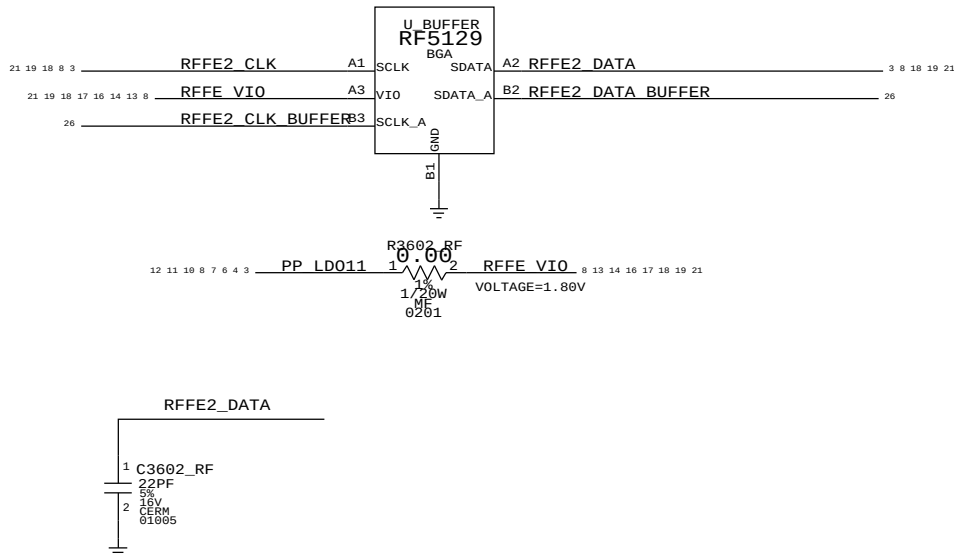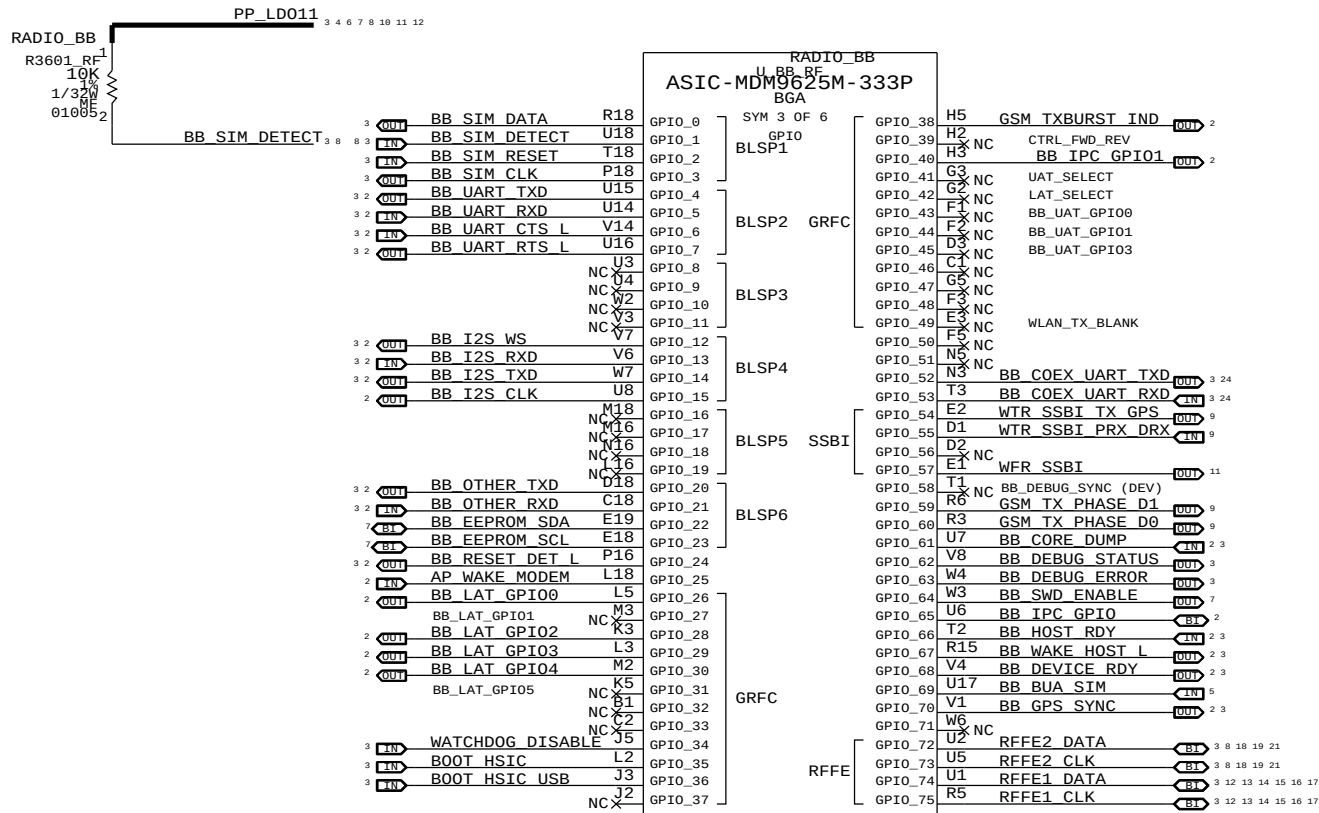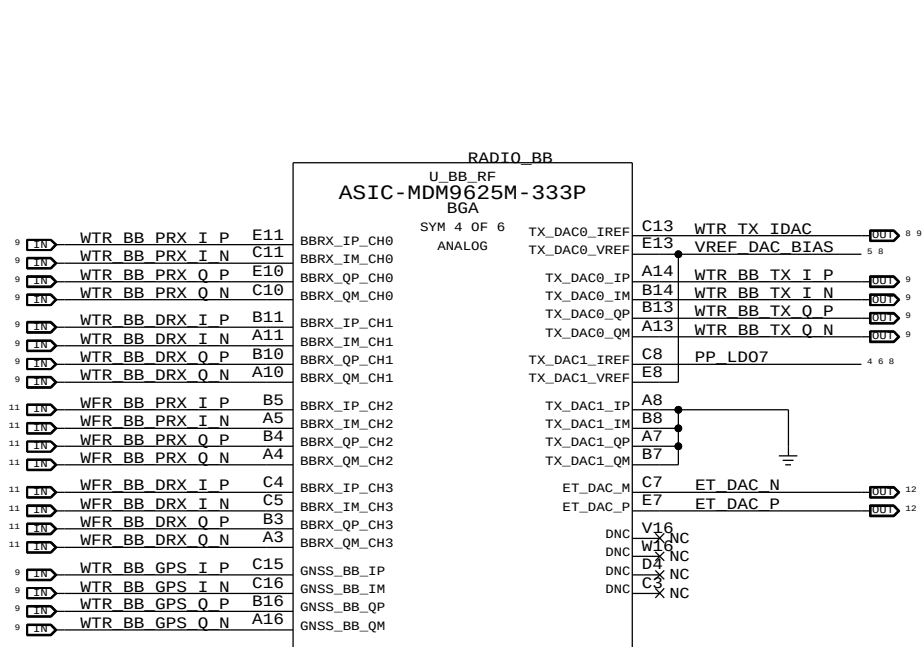

WTR TRANSCEIVER (1 OF 2)

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

C802
R802
L800
U803

LB1	DC
LB2	DC
LB3	DC
LB4	DC
MB1	NO DC
MB2	DC
MB3	DC
HB1	NO DC
HB2	DC
HB3	DC
HBMB4	NO DC

15	50 B8 PRX WTR IN	102	PRX_LB1_IN
15	50 B20 PRX WTR IN	92	PRX_LB2_IN
15	50 B26 PRX WTR IN	73	PRX_LB3_IN
14	50 B13 B17 B28 B29 PRX WTR IN	67	PRX_LB4_IN
11	50 WFR PRX LB CA IN	91	PRX_LB_CA_OUT
11	50 WFR PRX MB CA OUT	50	PRX_MB_CA_IN
18	50 B34 B39 PRX WTR IN	51	PRX_MB1_IN
28	50 DCS WTR IN	43	PRX_MB2_IN
28	50 PCS WTR IN	27	PRX_MB3_IN
19	50 B40A PRX WTR IN	19	PRX_HMB4_IN
19	50 B40B B38X PRX WTR IN	9	PRX_HB1_IN
19	50 B41A PRX WTR IN	17	PRX_HB2_IN
17	50 B7 PRX WTR IN	18	PRX_HB3_IN
		33	PRX_HB_CA_OUT

NC

U_WTR_RF
WTR1625
BGA

SYM 1 OF 5

PRX_BB_IP	99	WTR_BB_PRX_I_P	OUT
PRX_BB_IM	108	WTR_BB_PRX_I_N	OUT
PRX_BB_QP	107	WTR_BB_PRX_Q_P	OUT
PRX_BB_QM	97	WTR_BB_PRX_Q_N	OUT

LB1	DC
LB2	DC
LB3	DC
LB4	DC
MB1	NO DC
MB2	DC
MB3	DC
HB1	NO DC
HB2	DC
HB3	DC
HBMB4	NO DC

28	50 B8 B28B DRX WTR IN	5	DRX_LB1_IN
28	50 B13 B17 DRX WTR IN	15	DRX_LB2_IN
28	50 B26 B28A DRX WTR IN	16	DRX_LB3_IN
28	50 B20 B29 DRX WTR IN	7	DRX_LB4_IN
11	50 WFR DRX LB CA IN	32	DRX_LB_CA_OUT
11	50 WFR DRX MB CA OUT	29	DRX_MB_CA_IN
28	50 B34 DRX WTR IN	28	DRX_MB1_IN
28	50 B39 DRX WTR IN	20	DRX_MB2_IN
		1	DRX_MB3_IN
28	50 B40 DRX WTR IN	2	DRX_HMB4_IN
28	50 B38X DRX WTR IN	4	DRX_HB1_IN
28	50 B41A DRX WTR IN	12	DRX_HB2_IN
28	50 B7 DRX WTR IN	13	DRX_HB3_IN
		30	DRX_HB_CA_OUT
22	100 GPS WTR IN P	36	GNSS_RF_INP
22	100 GPS WTR IN N	44	GNSS_RF_INM

NC

NC


U_WTR_RF
WTR1625
BGA

SYM 2 OF 5

DRX_BB_IP	76	WTR_BB_DRX_I_P	OUT	RADIO_WTR
DRX_BB_IM	86	WTR_BB_DRX_I_N	OUT	RADIO_WTR
DRX_BB_QP	61	WTR_BB_DRX_Q_P	OUT	RADIO_WTR
DRX_BB_QM	68	WTR_BB_DRX_Q_N	OUT	RADIO_WTR
GNSS_BB_IP	60	WTR_BB_GPS_I_P	OUT	RADIO_WTR
GNSS_BB_IM	53	WTR_BB_GPS_I_N	OUT	RADIO_WTR
GNSS_BB_QP	67	WTR_BB_GPS_Q_P	OUT	RADIO_WTR
GNSS_BB_QM	85	WTR_BB_GPS_Q_N	OUT	RADIO_WTR

DNC

NC

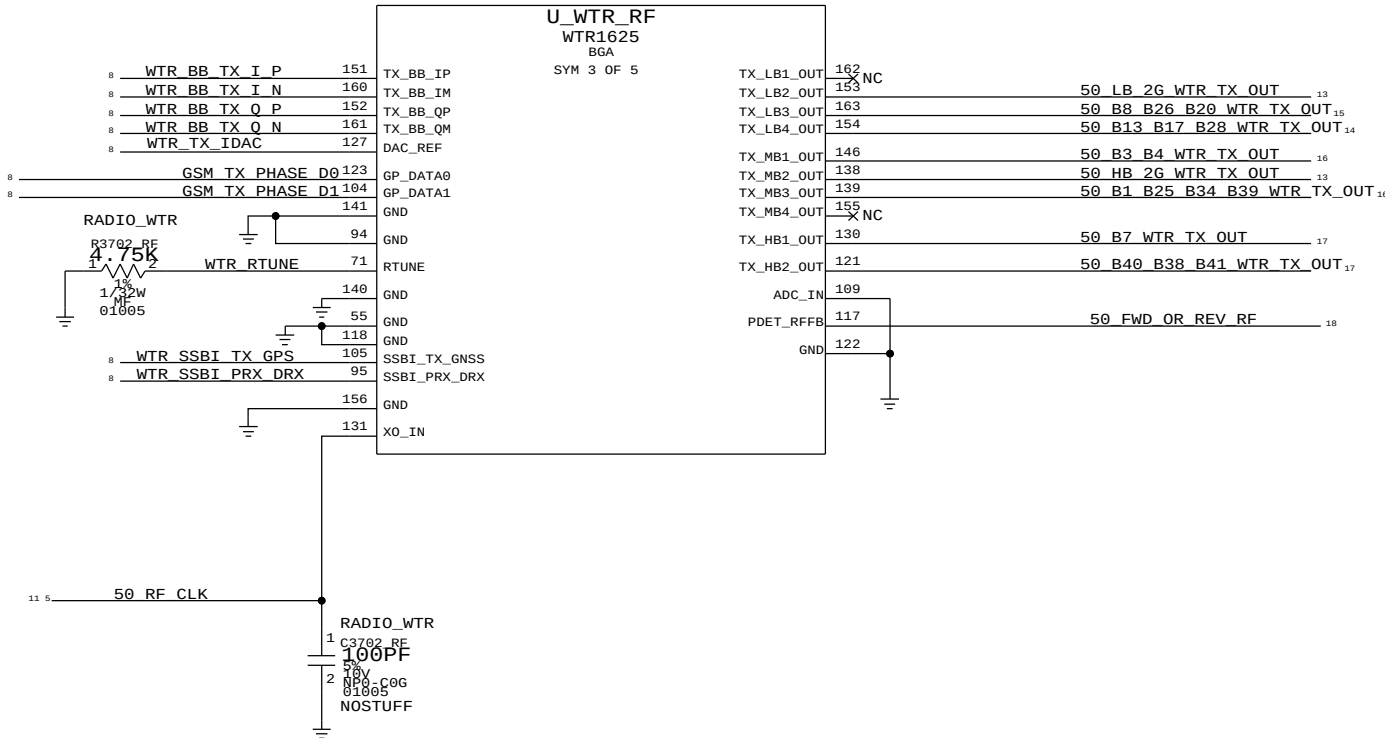


RF TRANSCEIVER (1 OF 3)

WTR TRANSCEIVER (2 OF 2)

~~CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.~~

C934
R926
L3802_RF
U902

WTR DECOUPLING CAPS

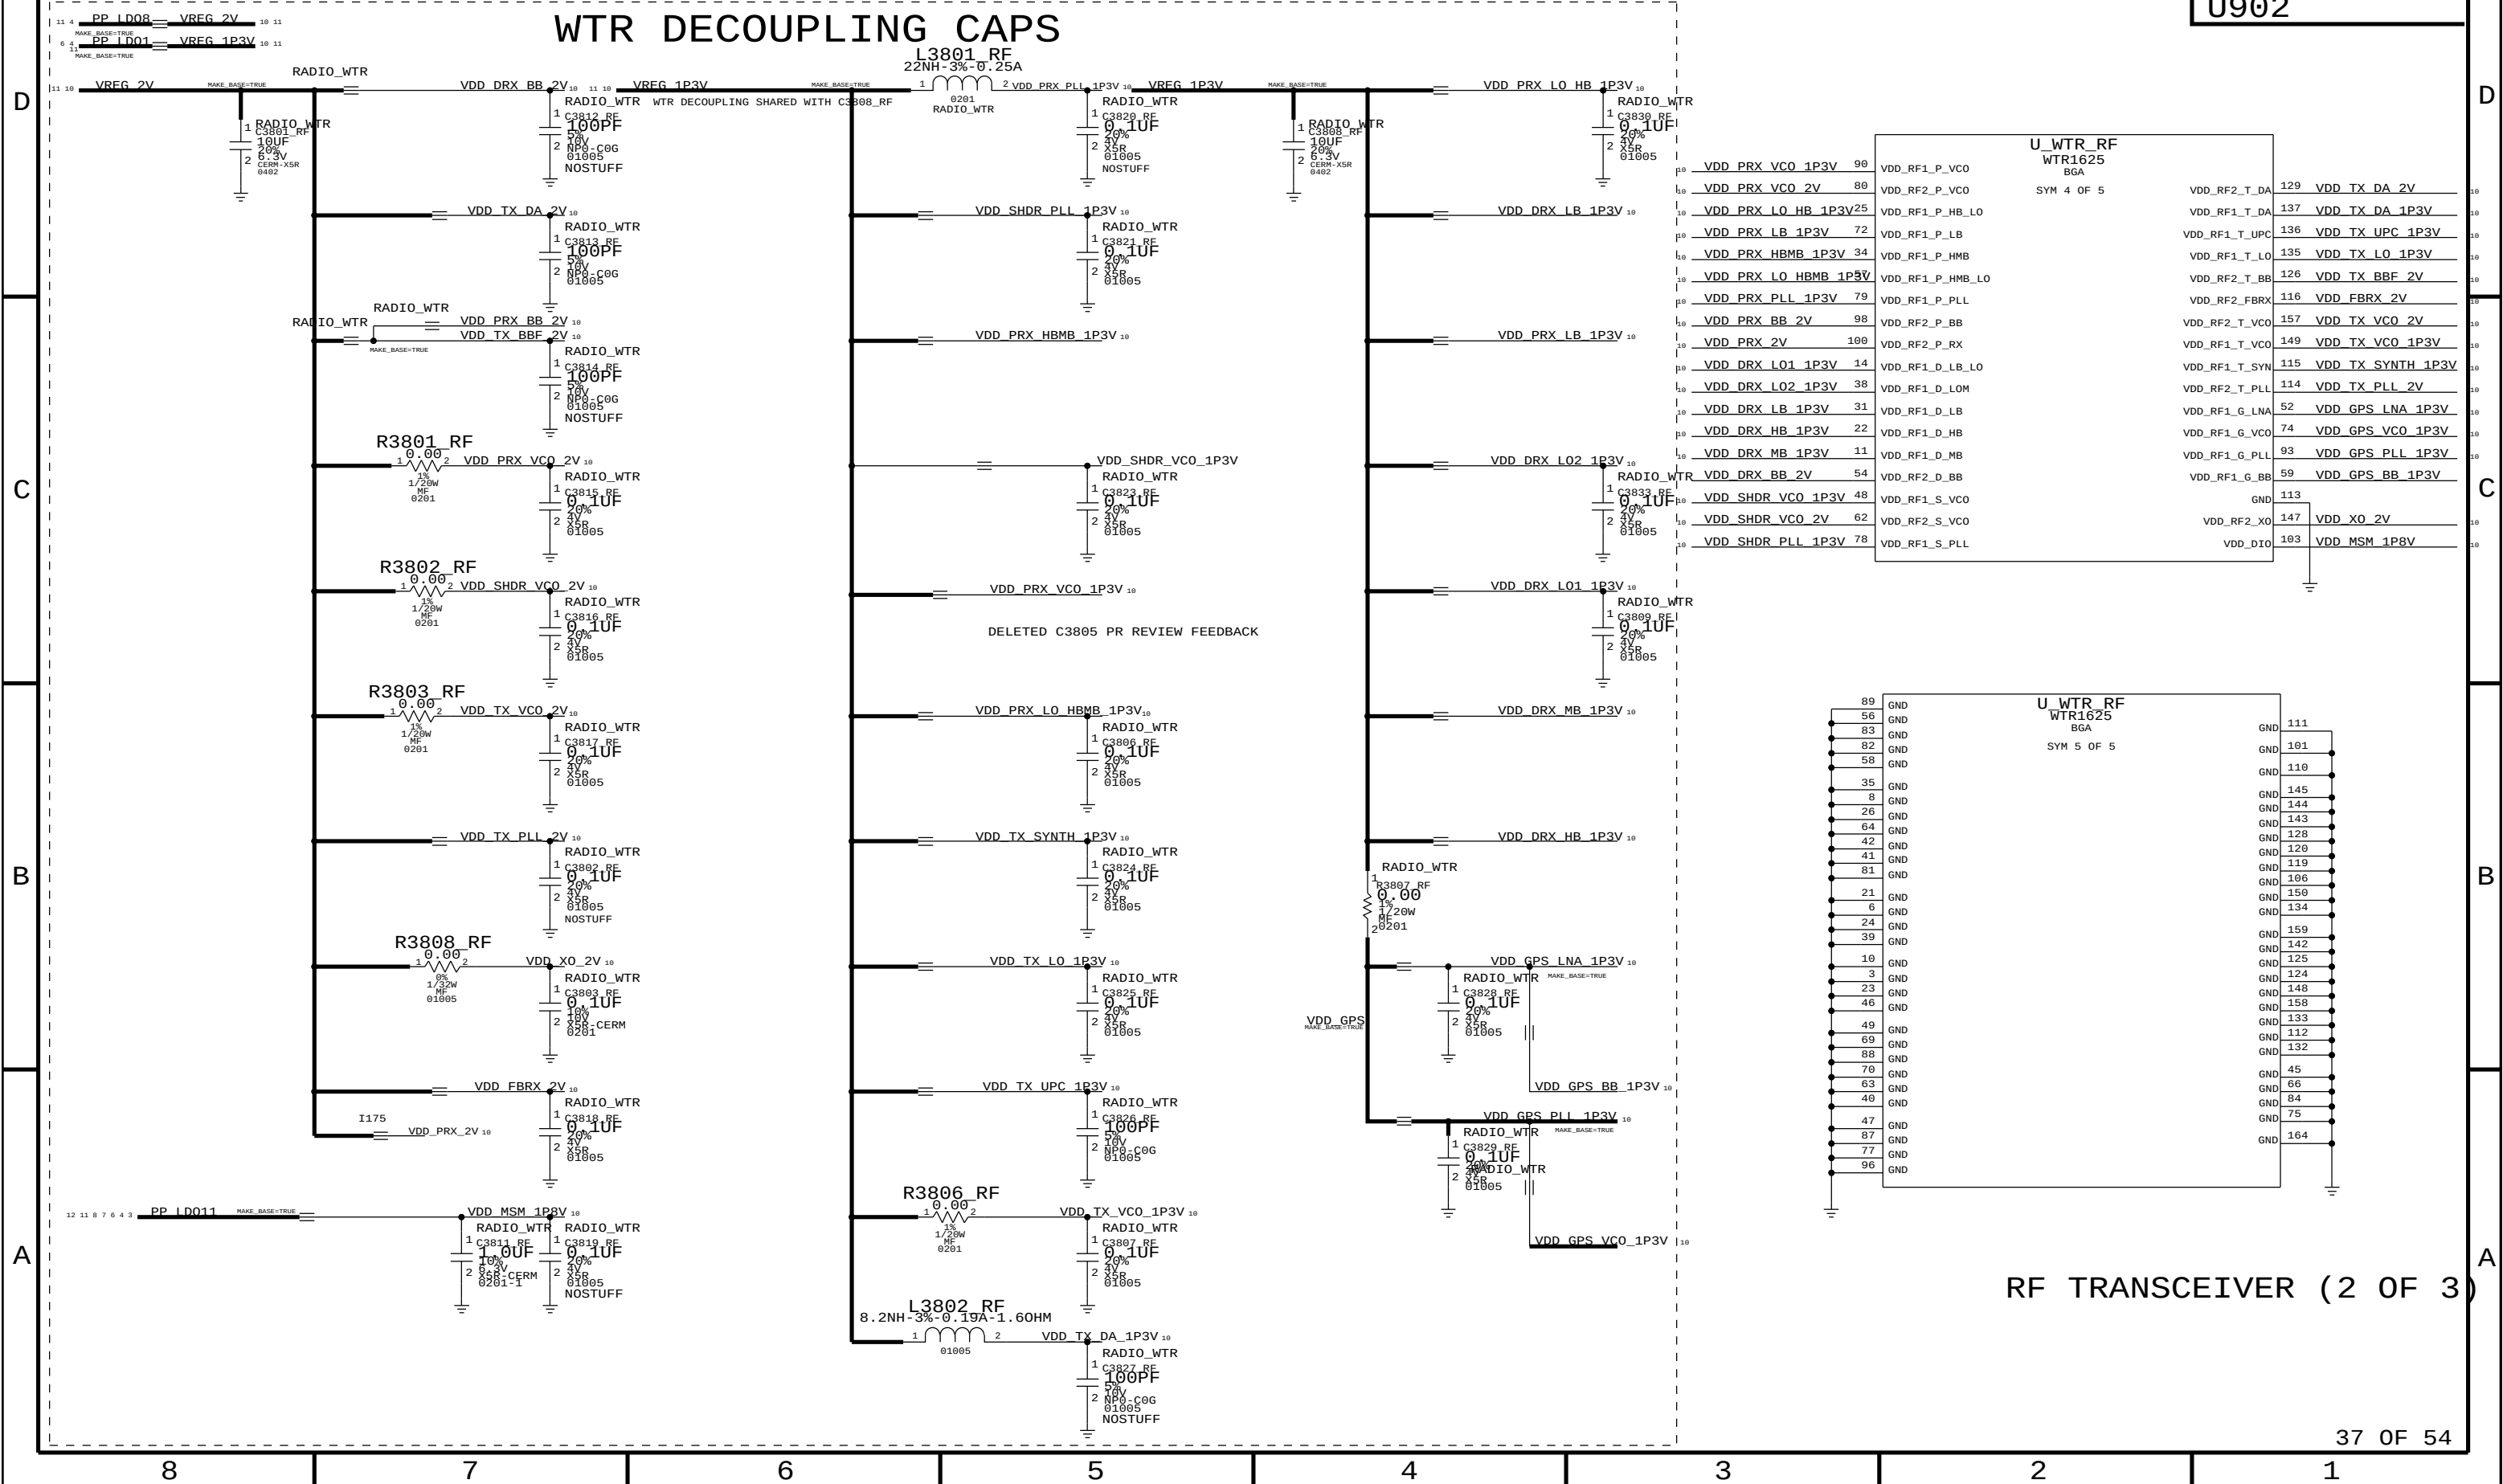


RF TRANSCEIVER (2 OF 3)

WFR TRANSCEIVER

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

C1019
R1016
L1000
U1002



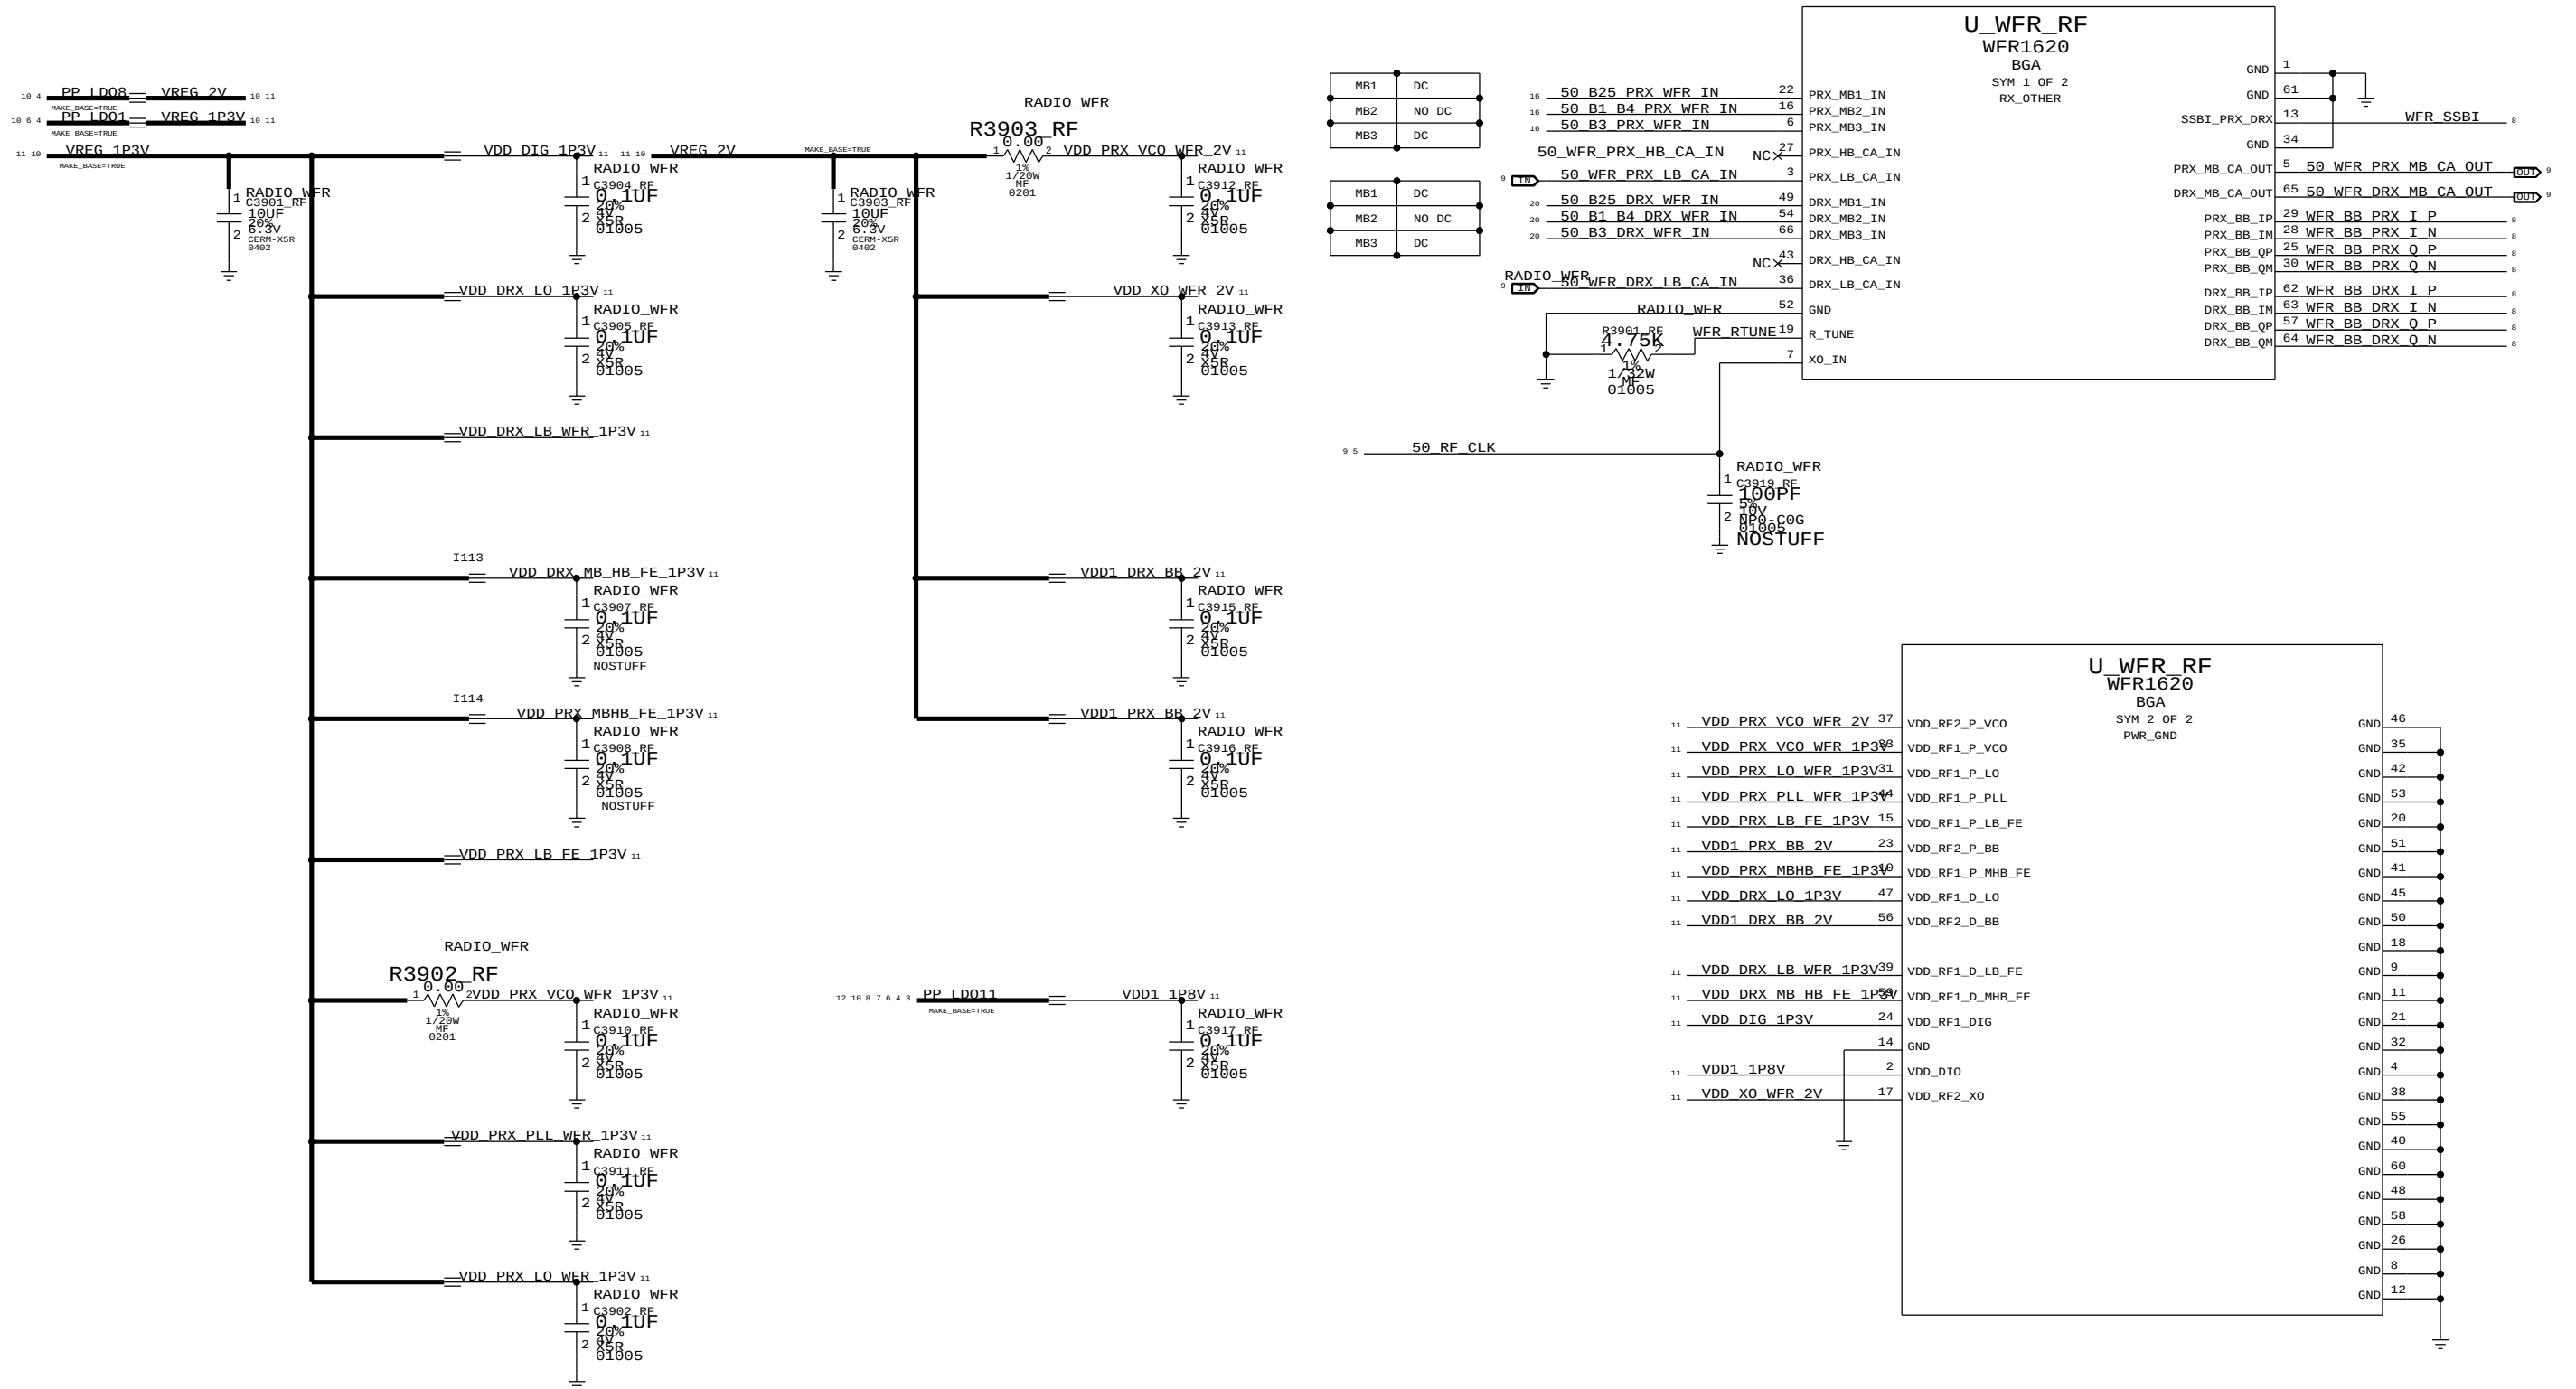


RF TRANSCEIVER (3 OF 3)

QFE DCDC

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

C1110
R1102
L1104
U1101

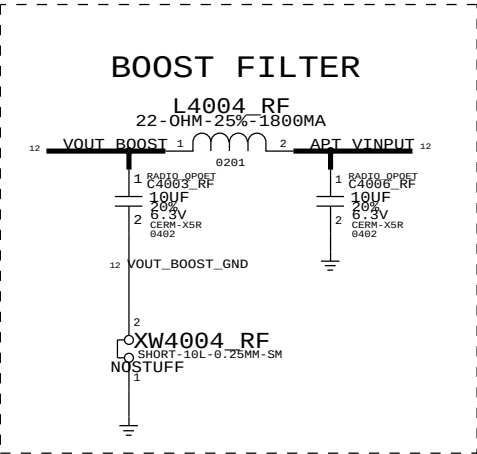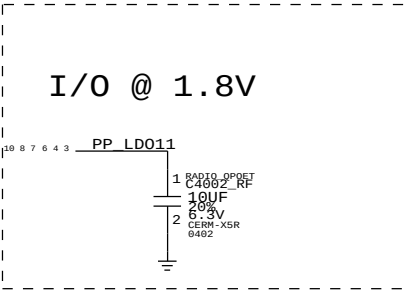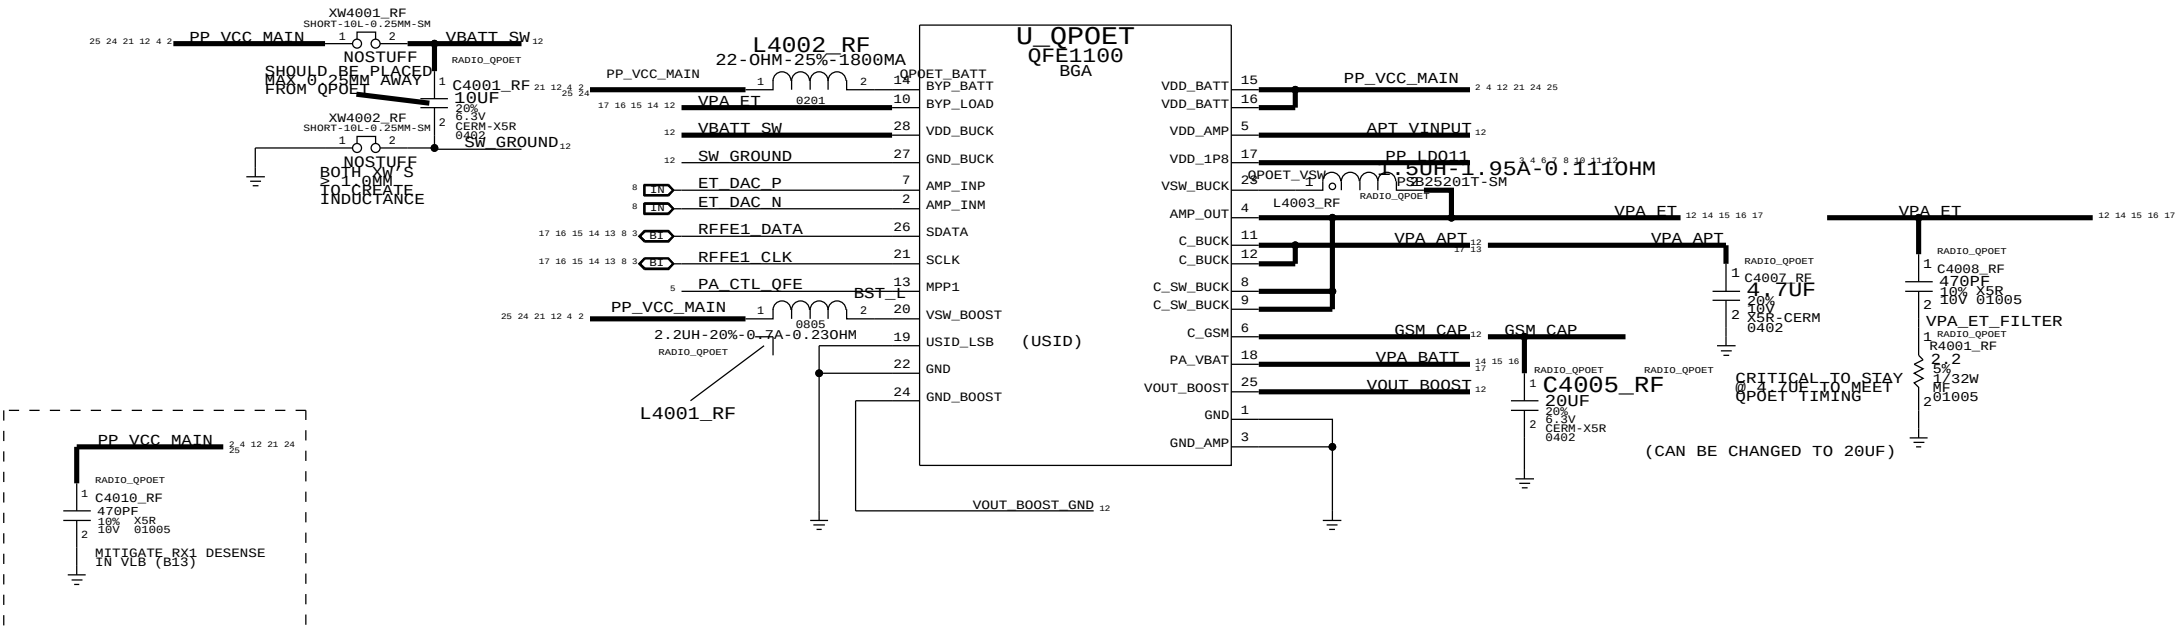

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

C1208
R1200
L1204
U1201



LOW BAND PAD (B8, B26, B20)

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST

C4318_RF
R1400
L4322_RF
U1402

D

C

B


A

D

C

B


A

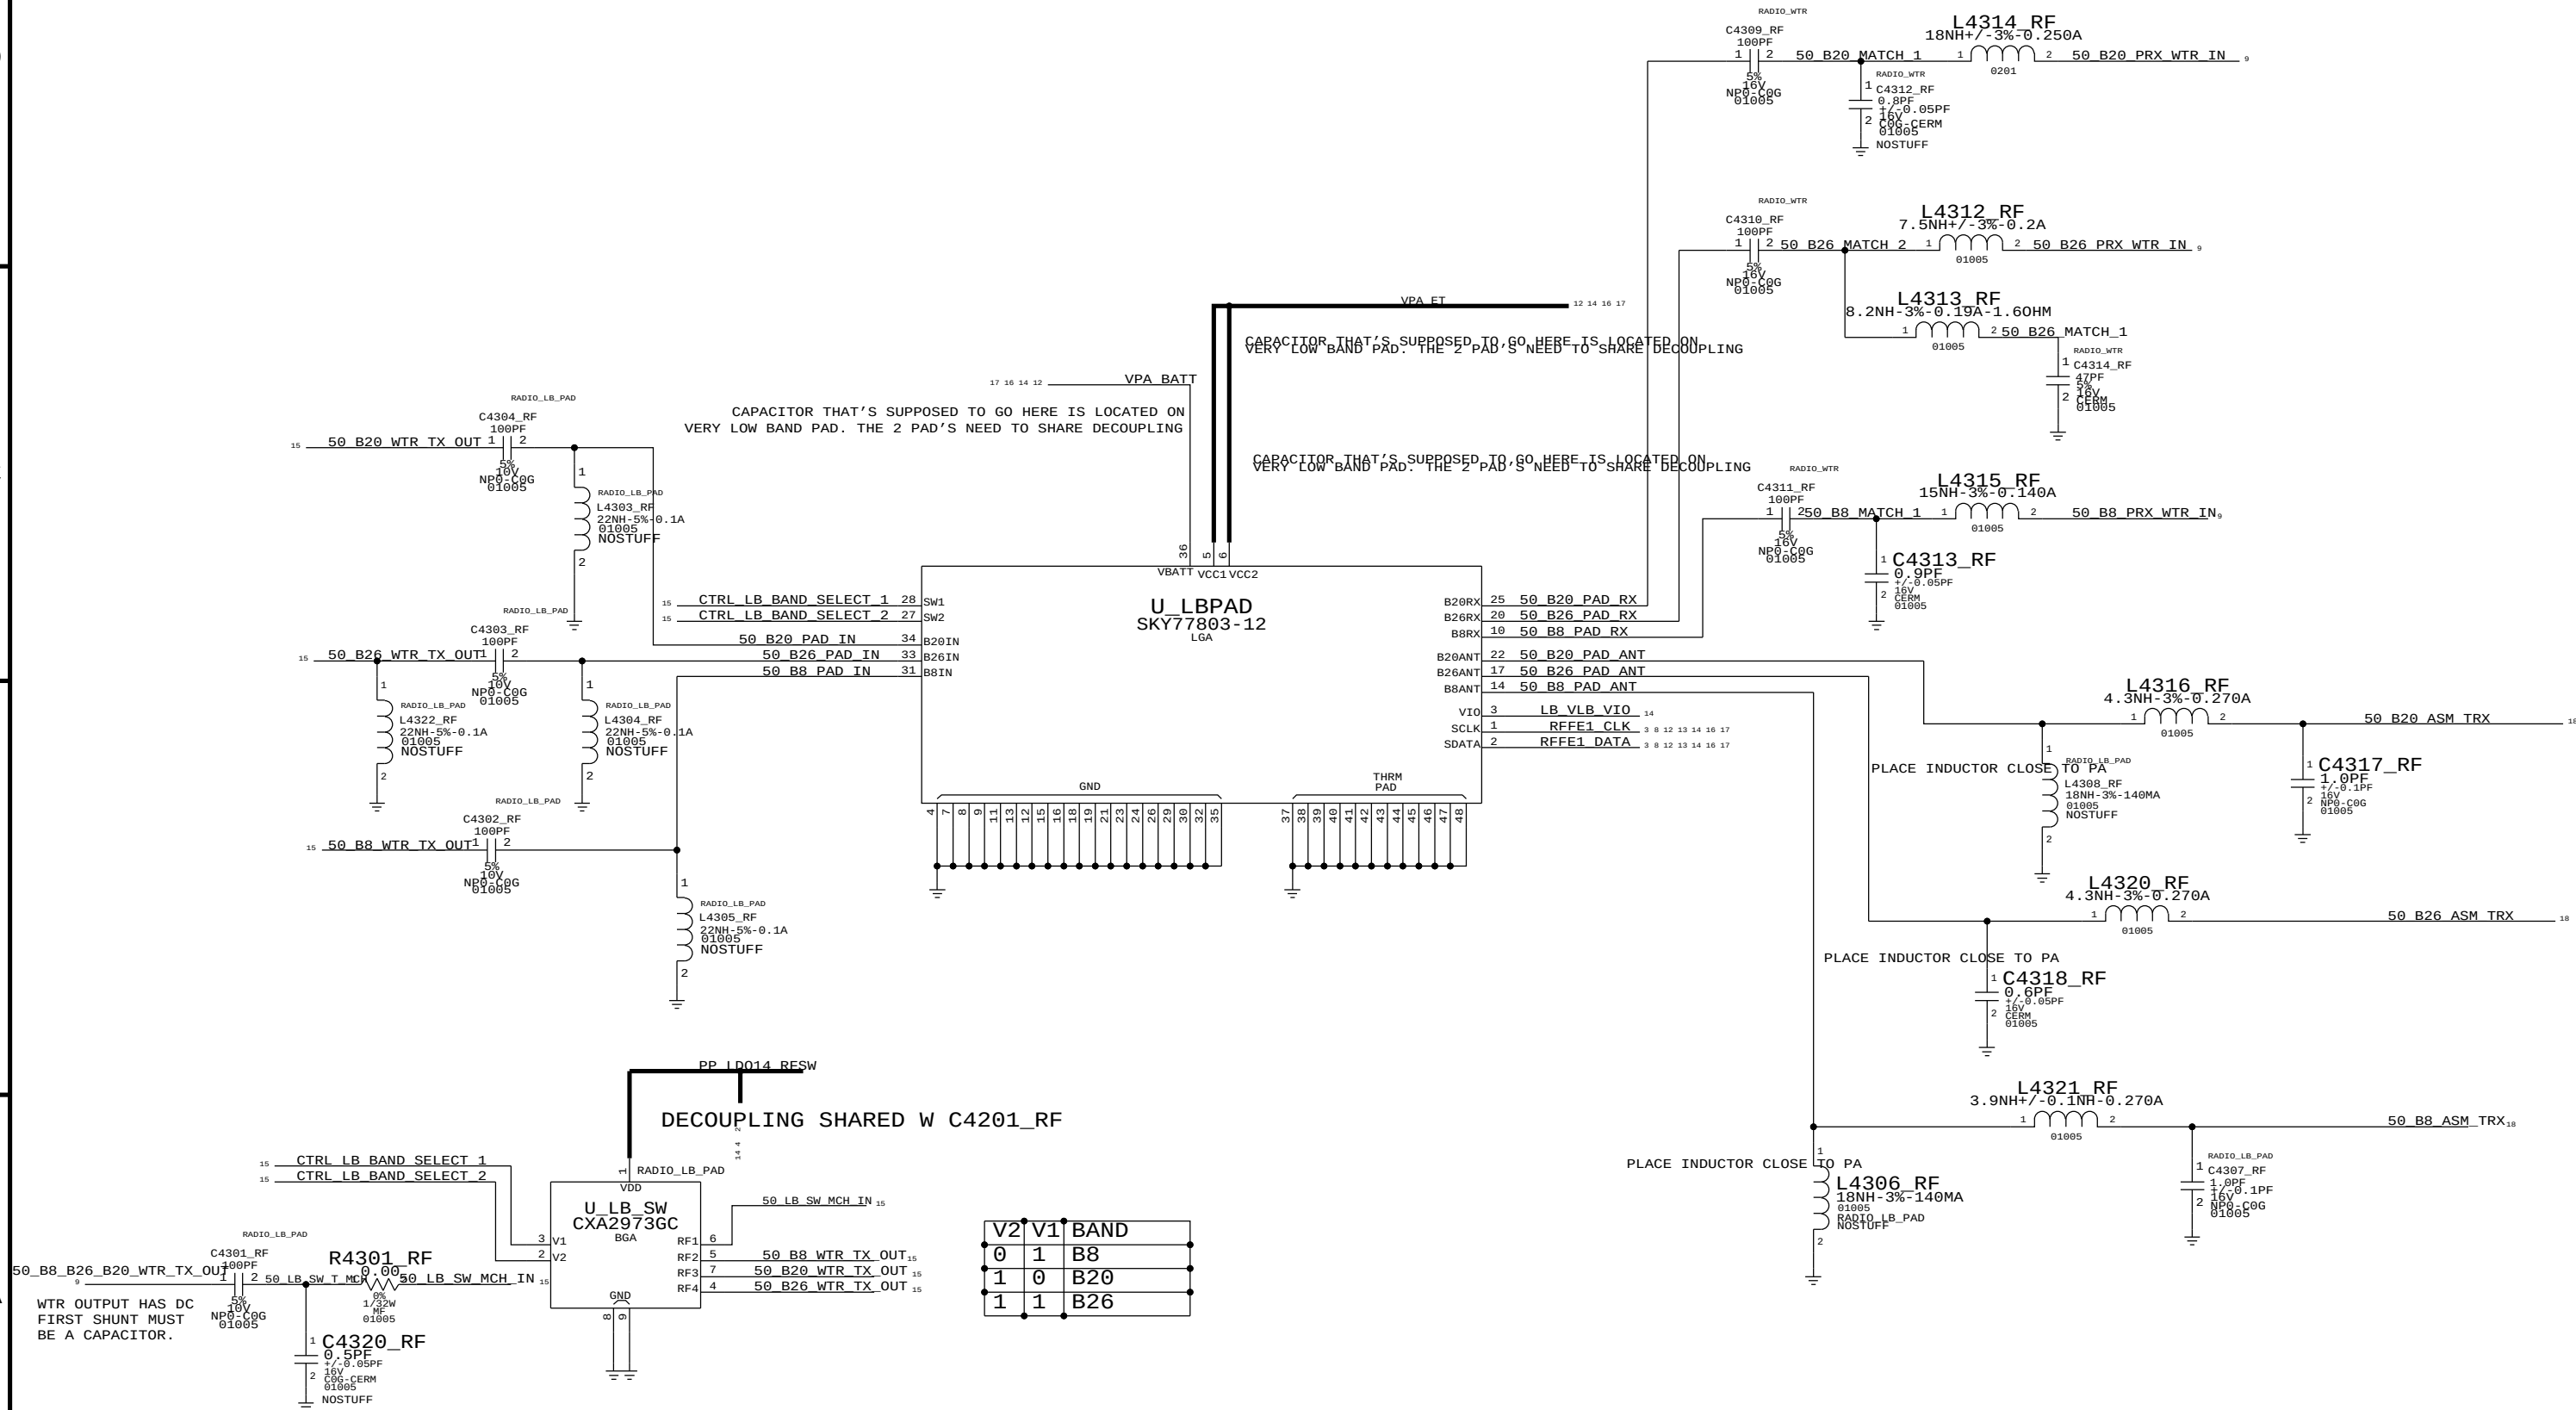

MID BAND PAD (B1, B25, B3, B4, B34, B39)

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.


C4426_RF
R1500
L4409_RF
U1501

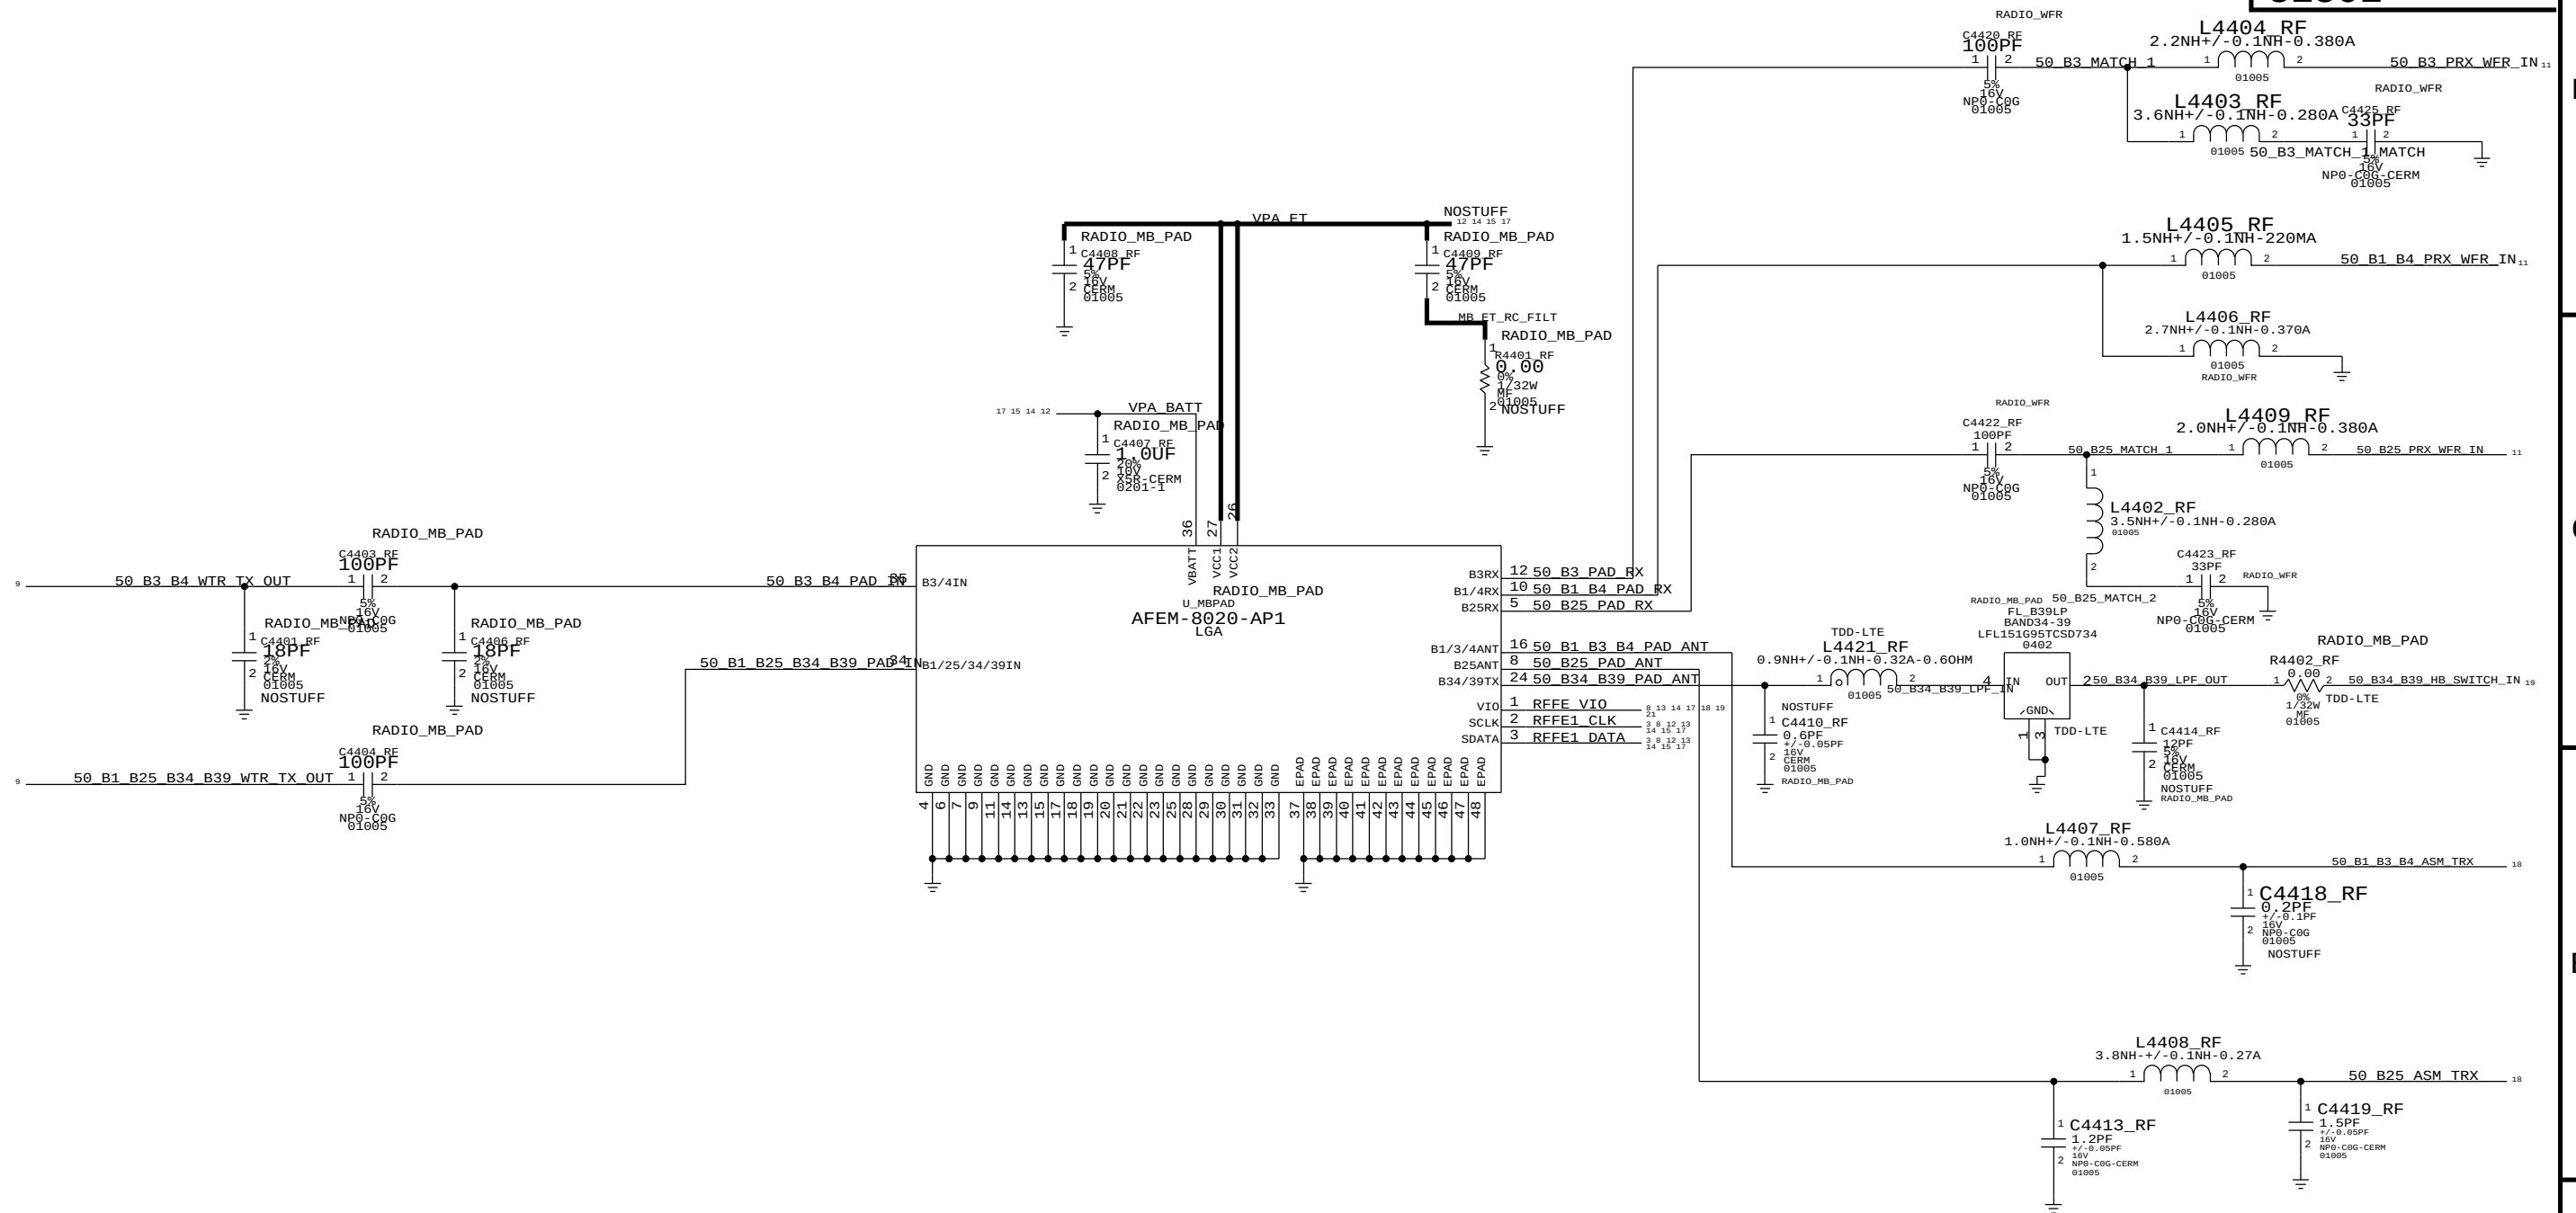

HIGH BAND PAD (B7, B38, B40, B41, XGP)

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.


C4533_RF
R1600
L1616
U1601

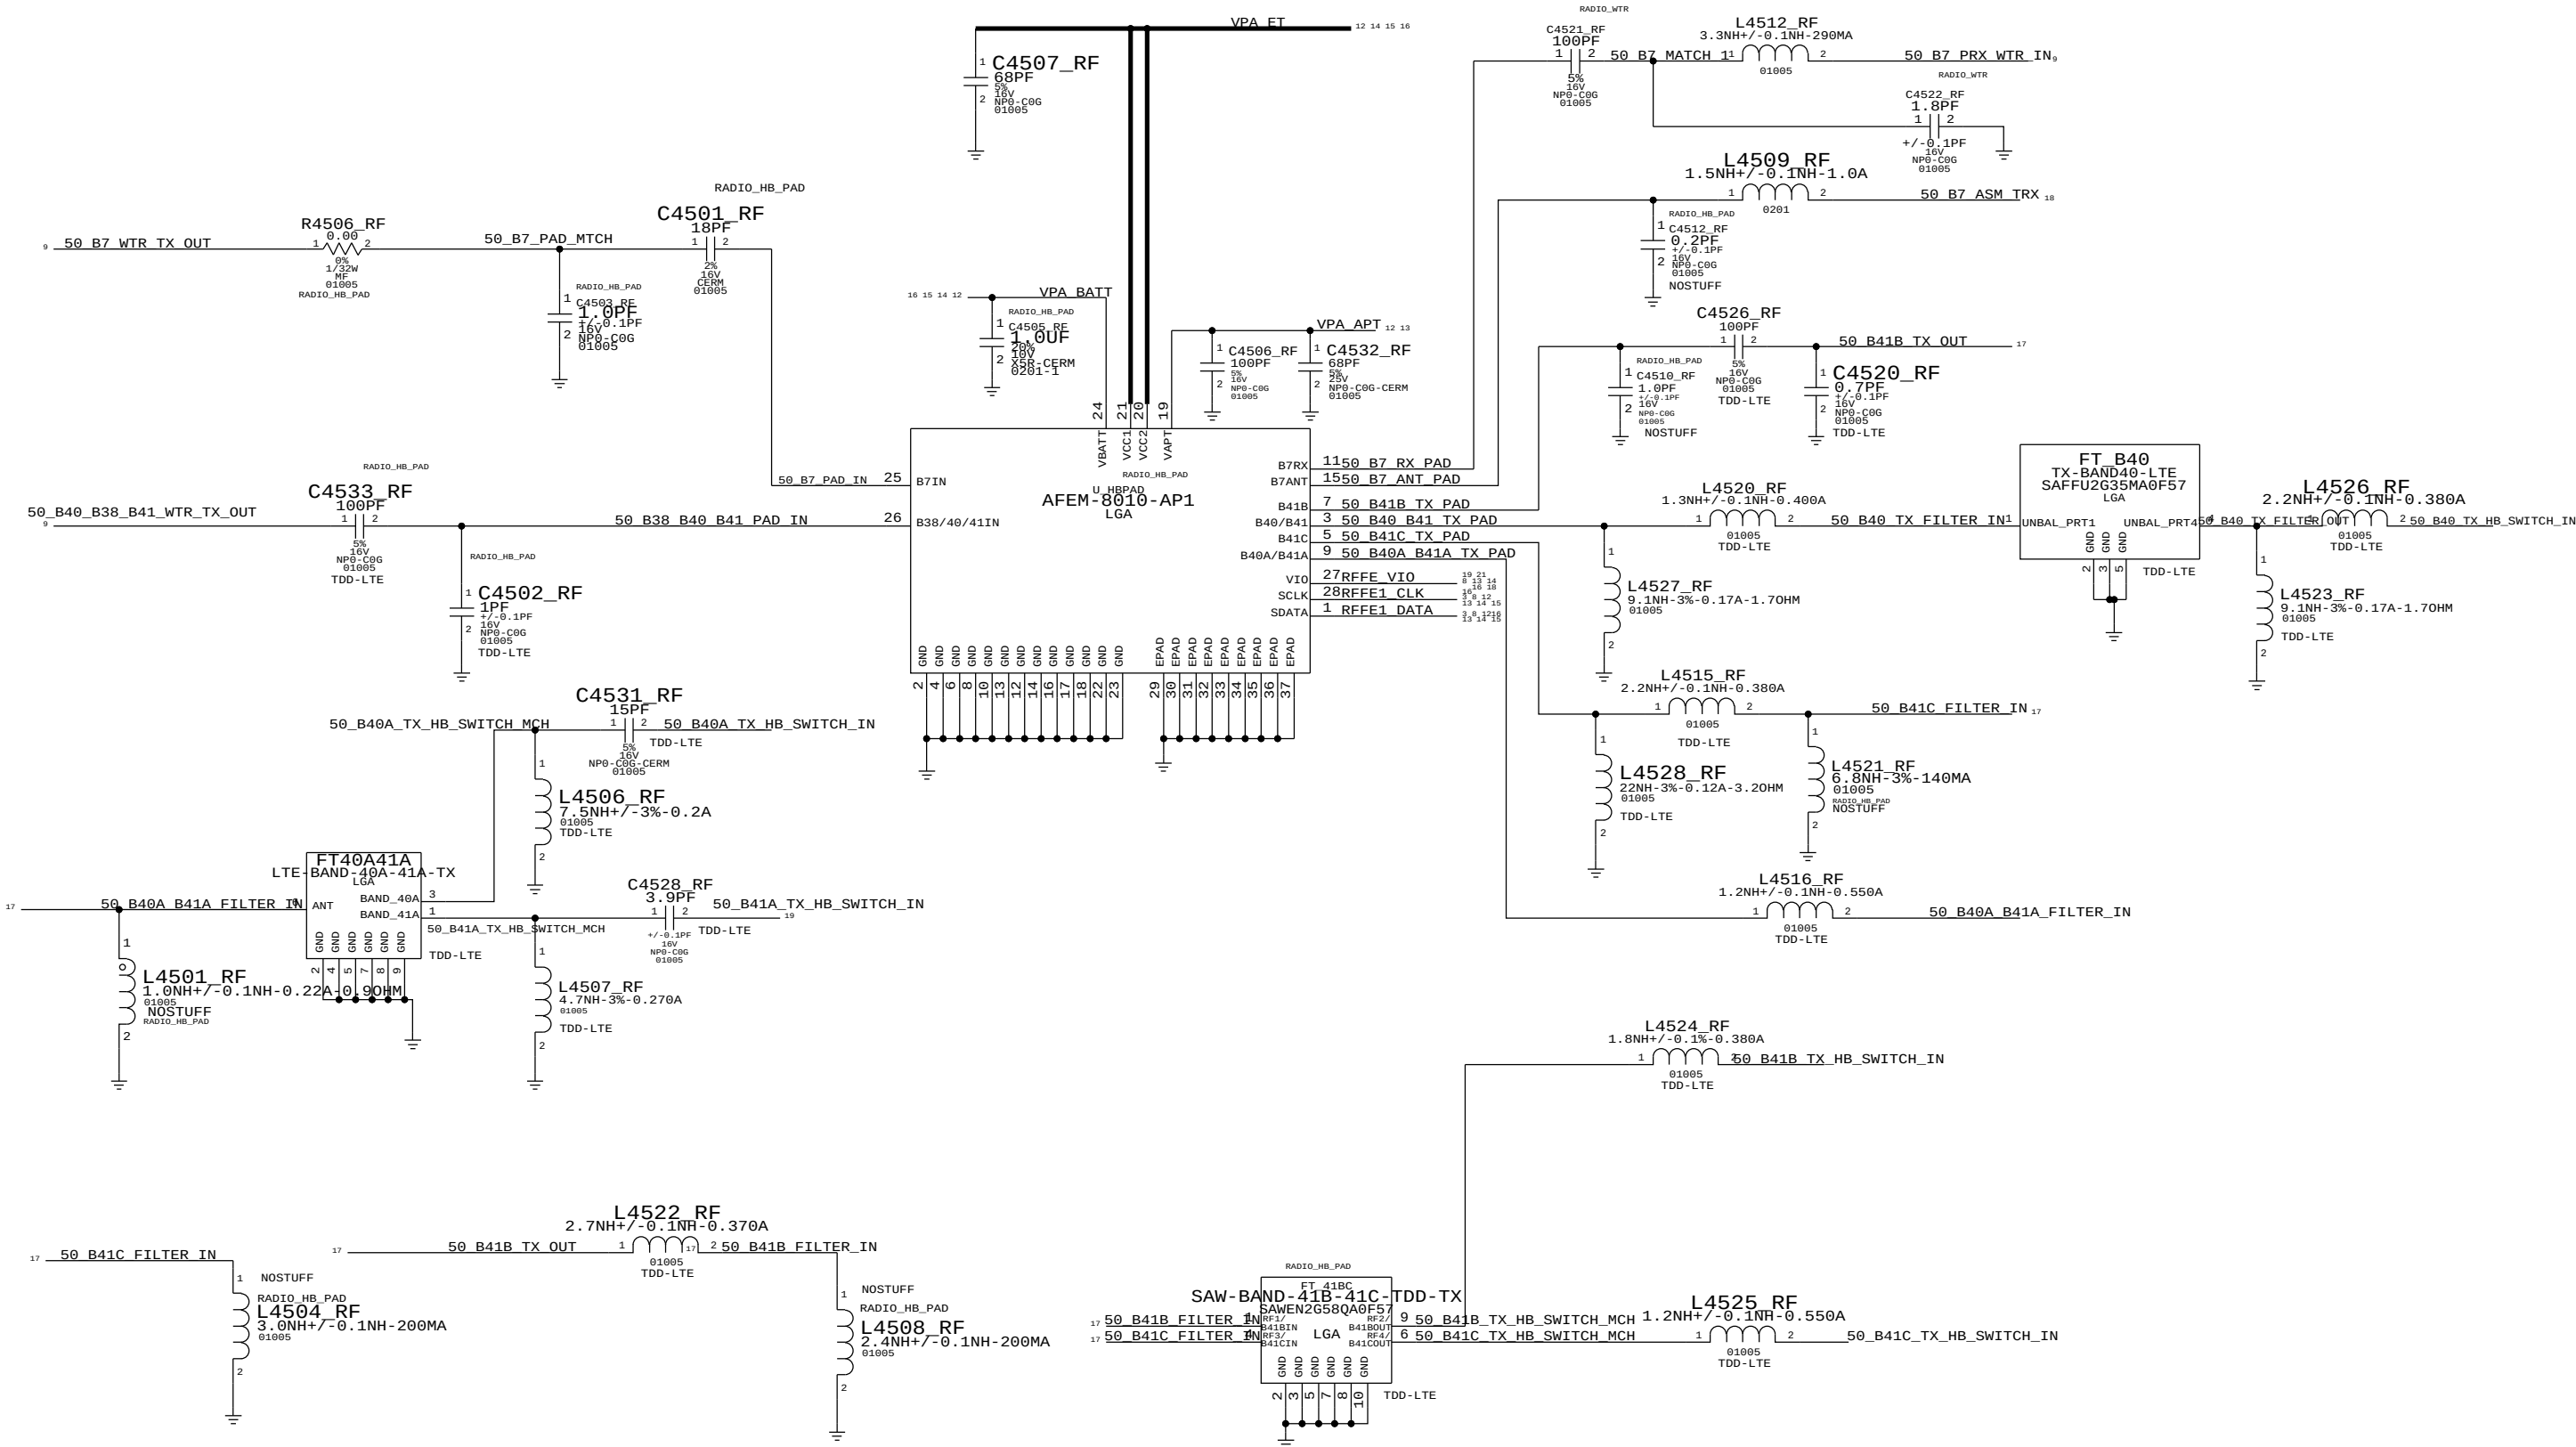

ANTENNA SWITCH


CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

C1702
R1700
L4608_RF
U1702

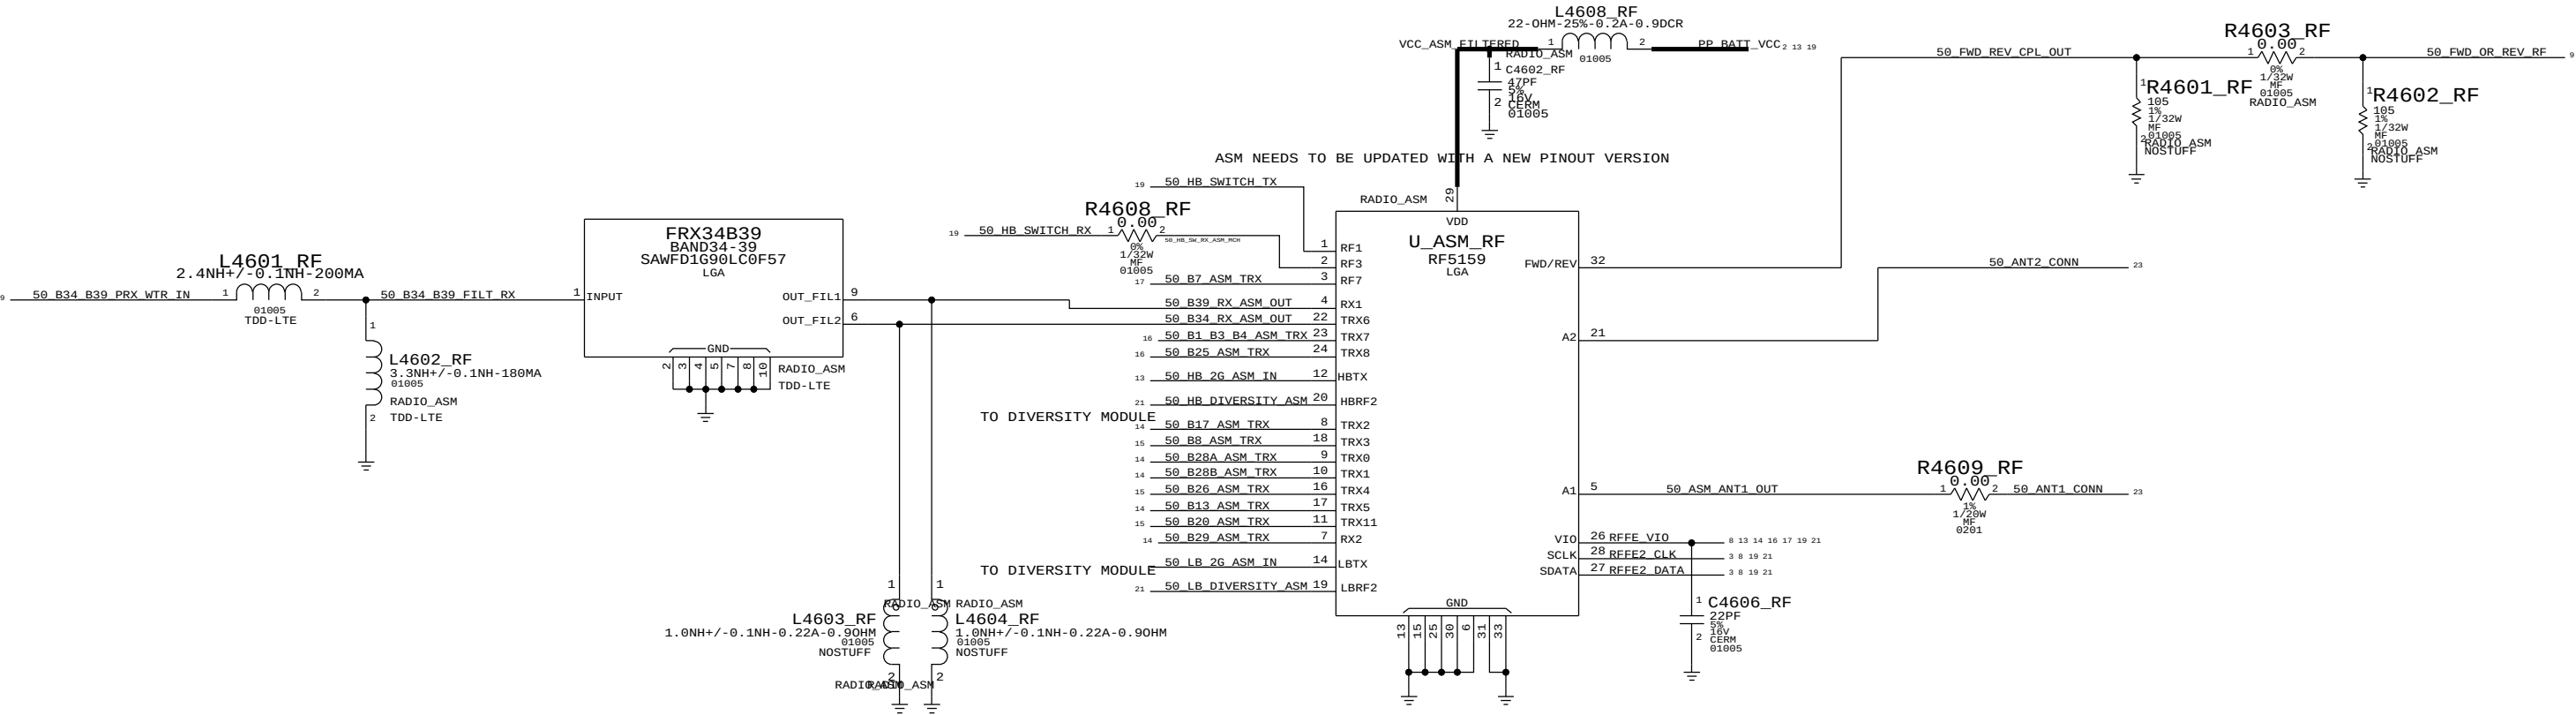

HIGH BAND SWITCH

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

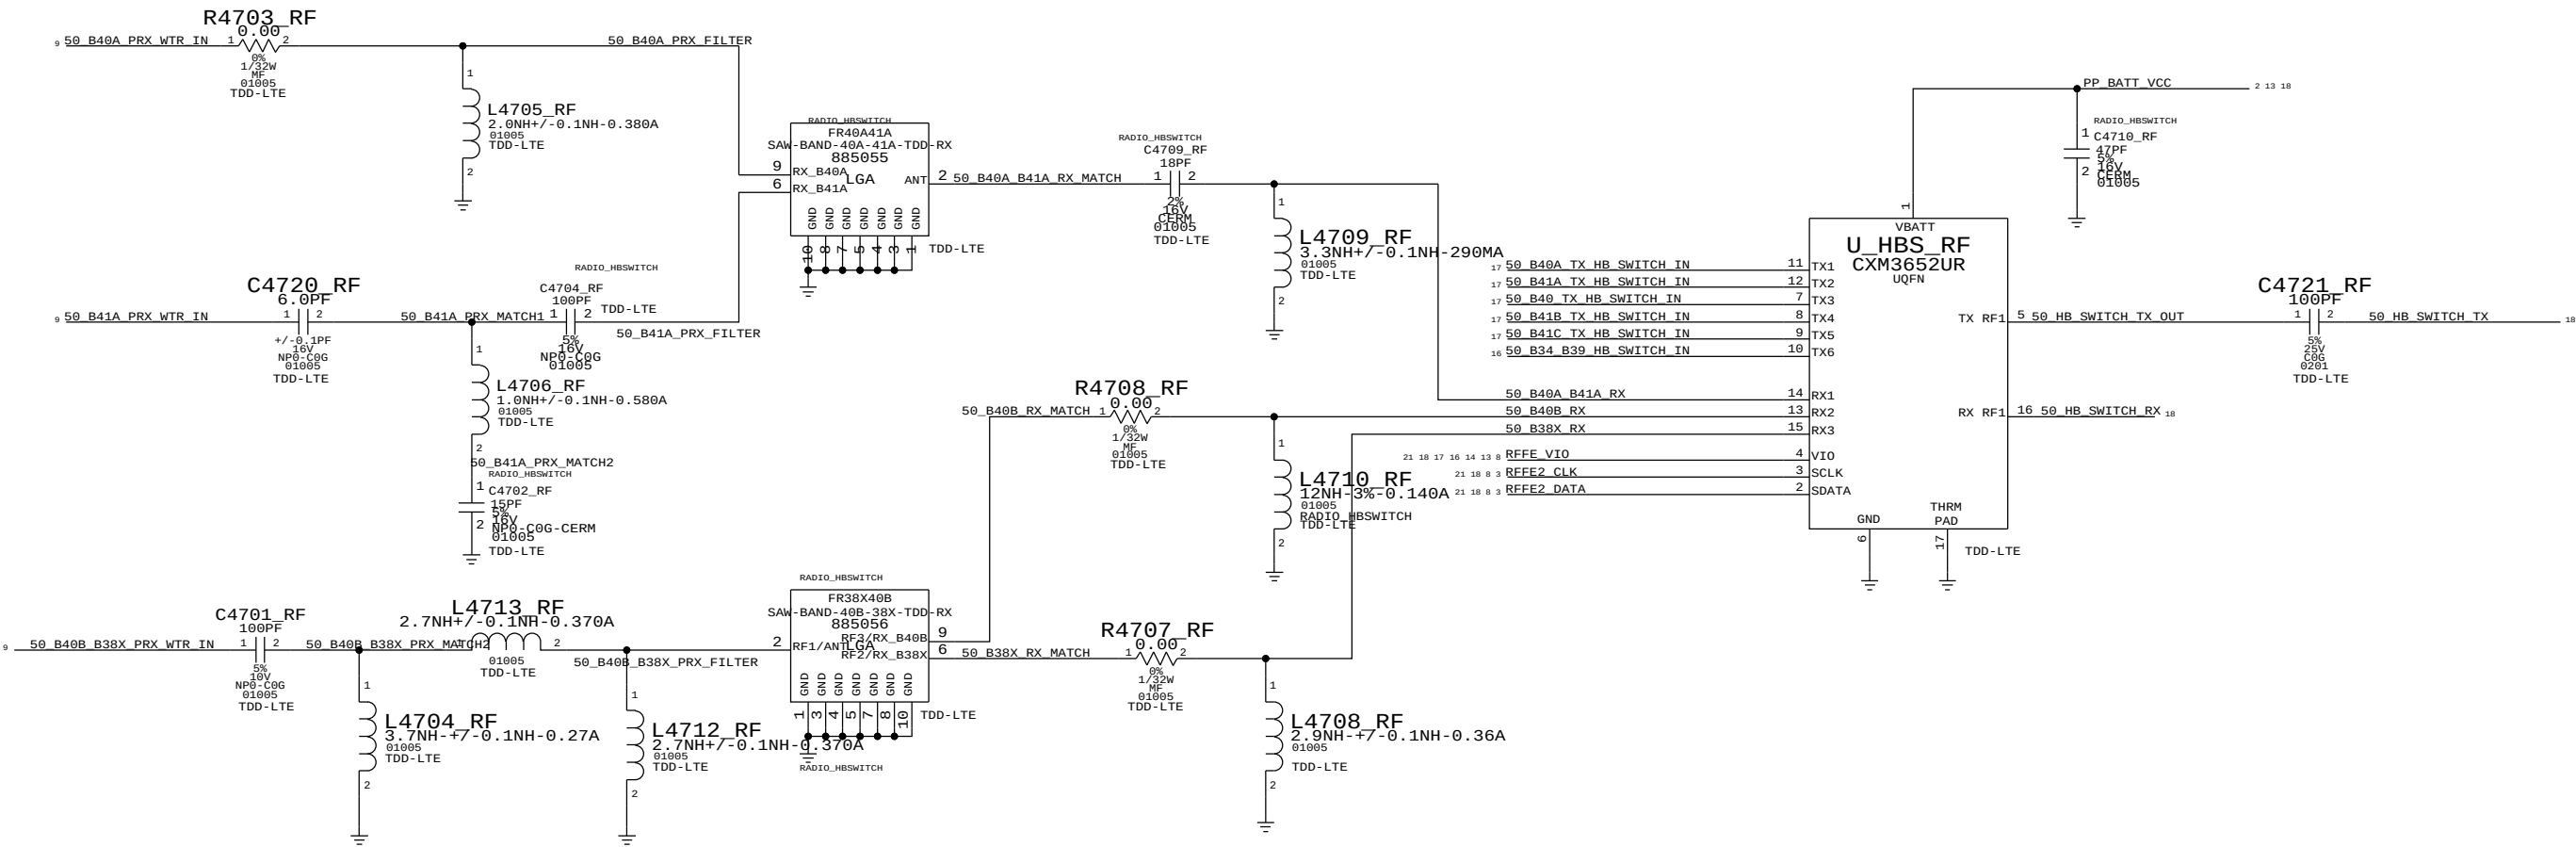

RX DIVERSITY (1)










CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

C4826_RF
R1800
L1829
U1801







MIDBAND MIDBAND DIVERSITY - WFR

HIGHBAND DIVERSITY - WTR

LOWBAND DIVERSITY - WTR

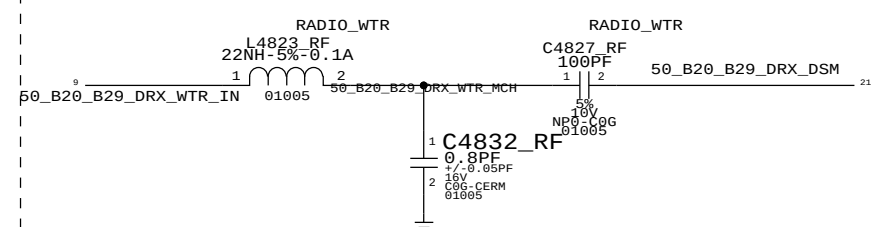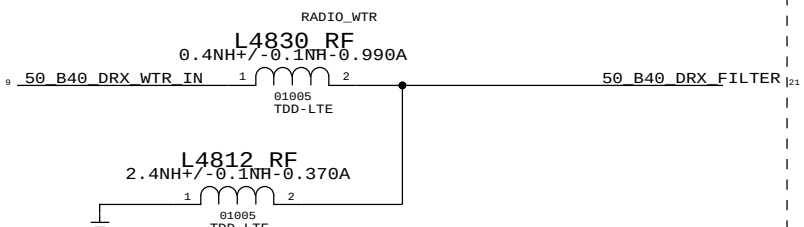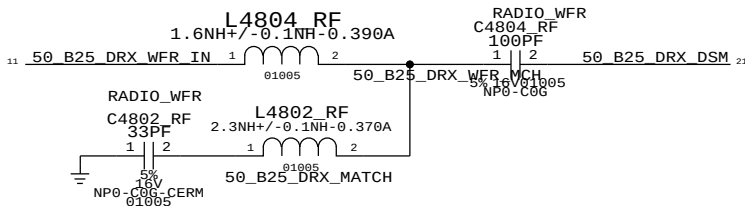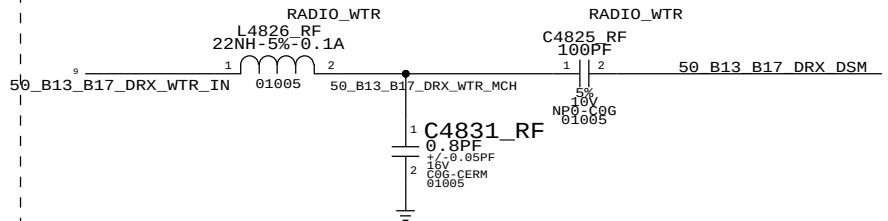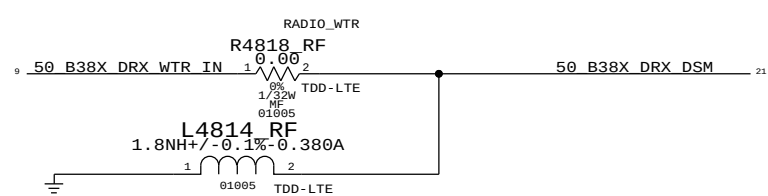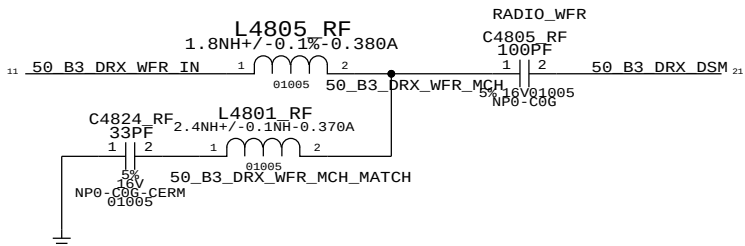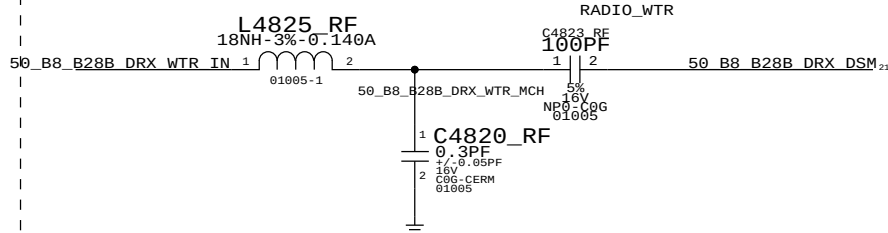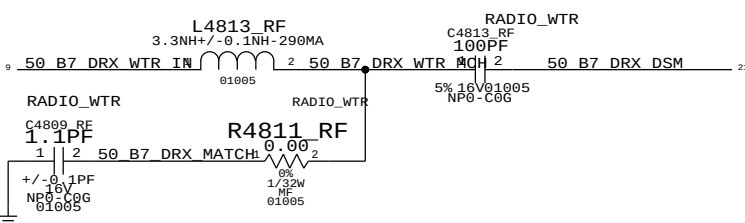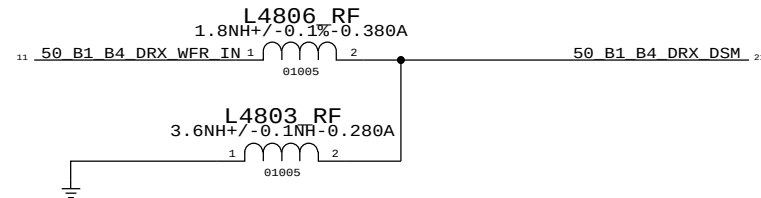


MIDBAND DIVERSITY - WTR

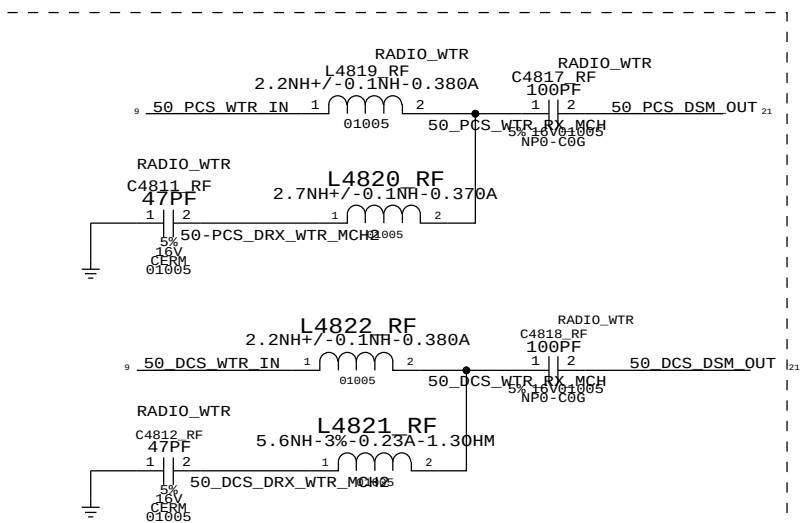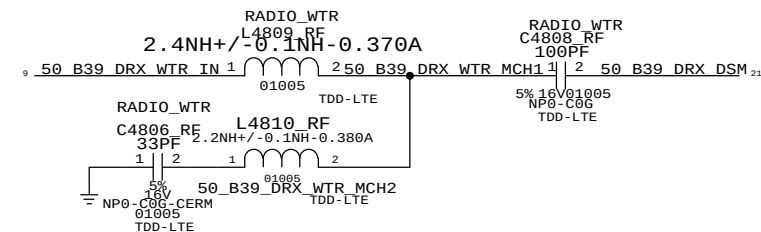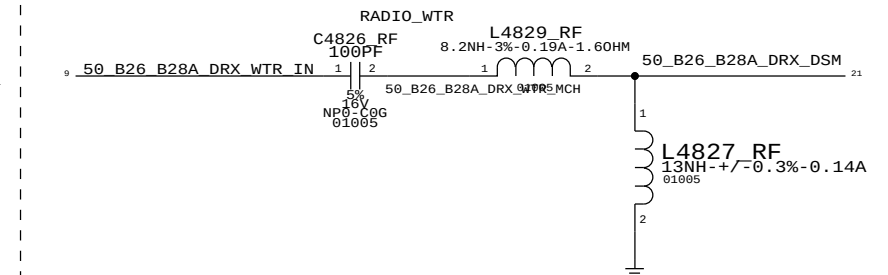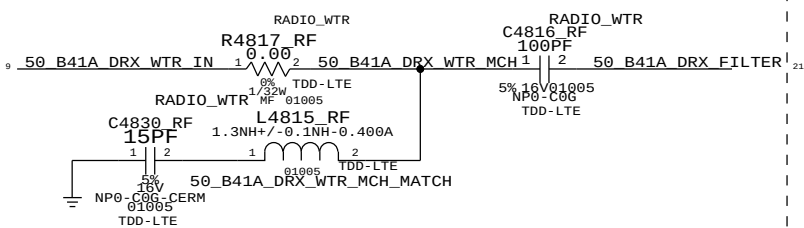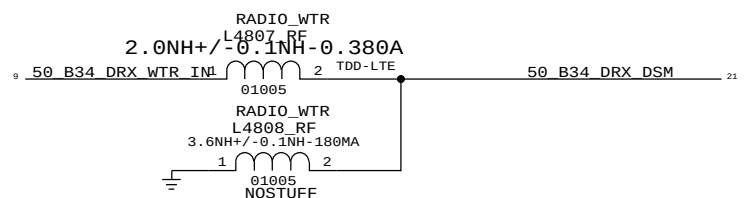

RX DIVERSITY (2)

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.


C1900
R1900
L1900
U1901

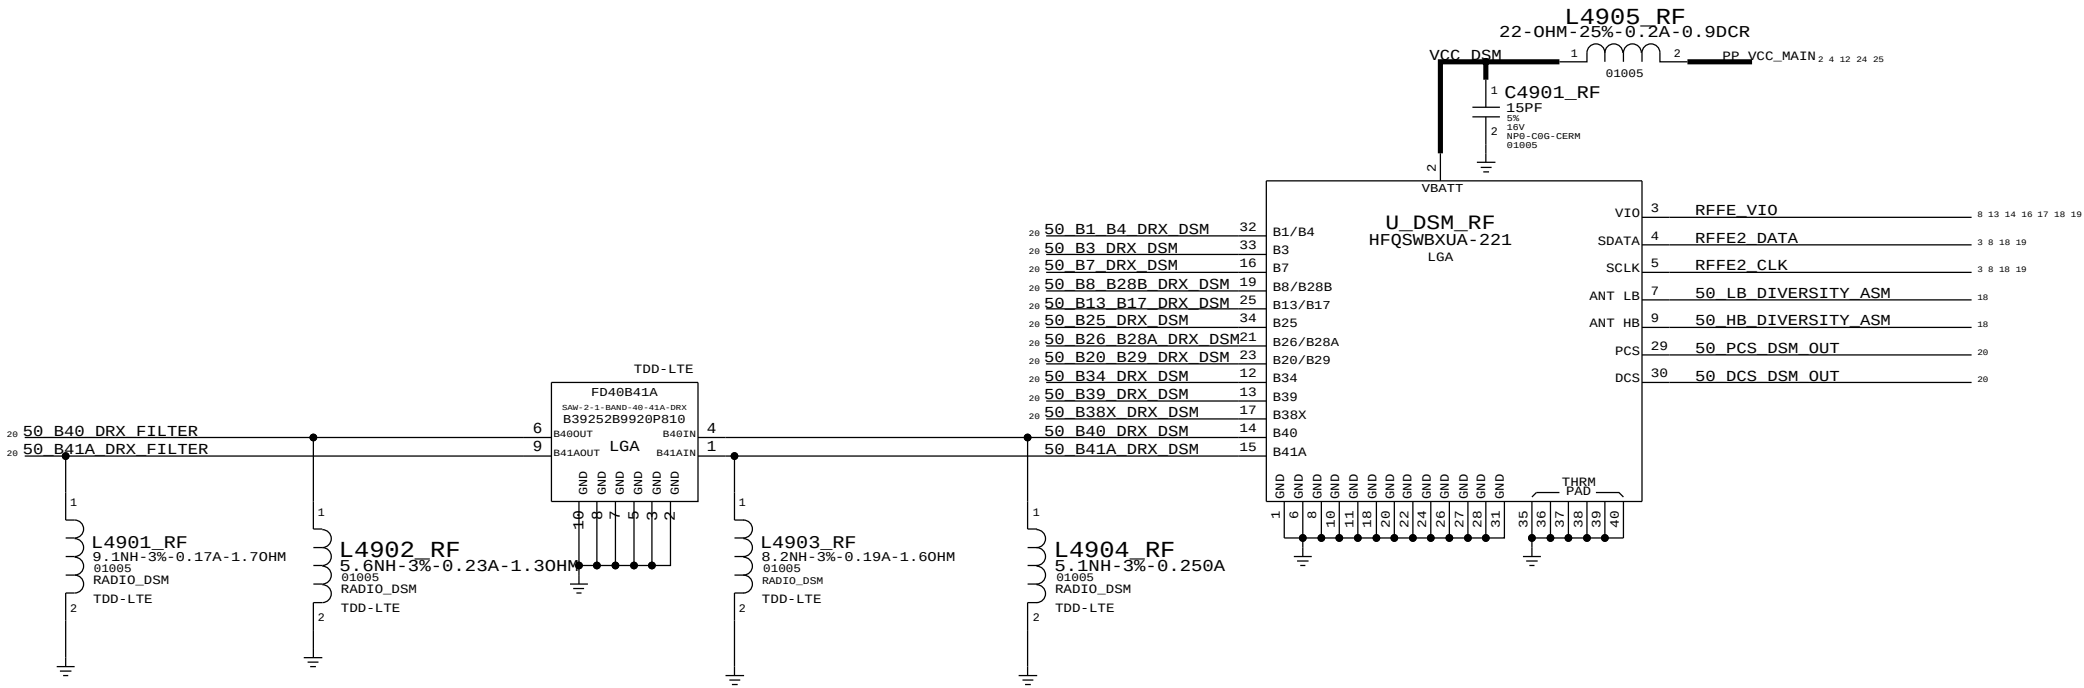

GPS

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.





- C1900
- R1900
- L1900
- U1901

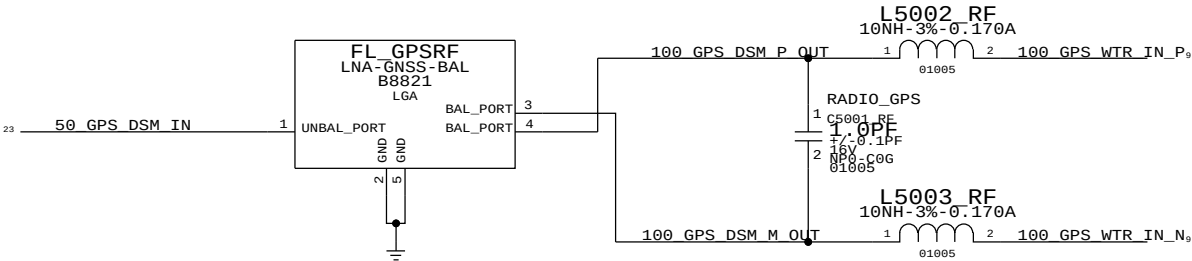


ANTENNA FEED'S

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.


TEST & COAX CONNECTOR FOR LOWER SECTION OF MLB

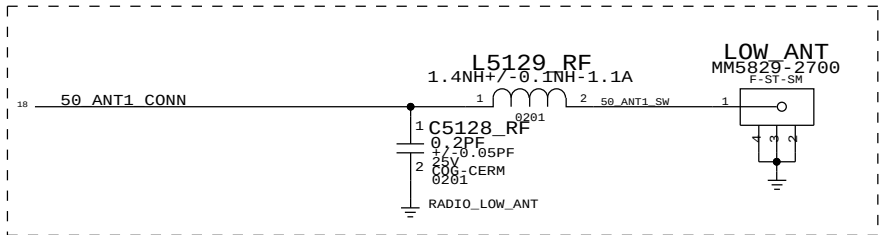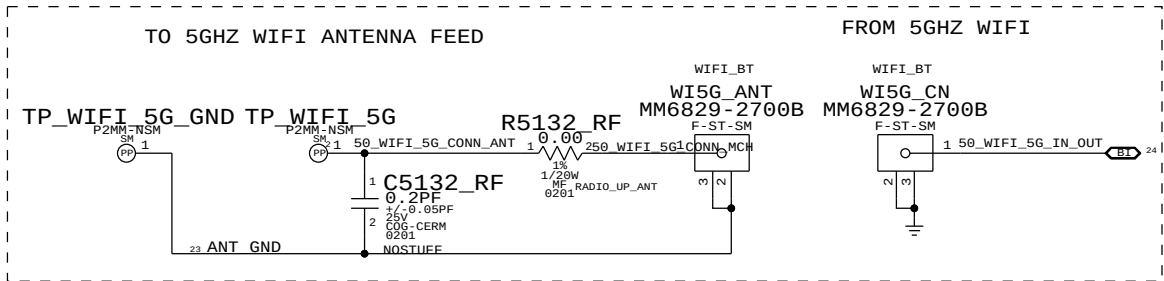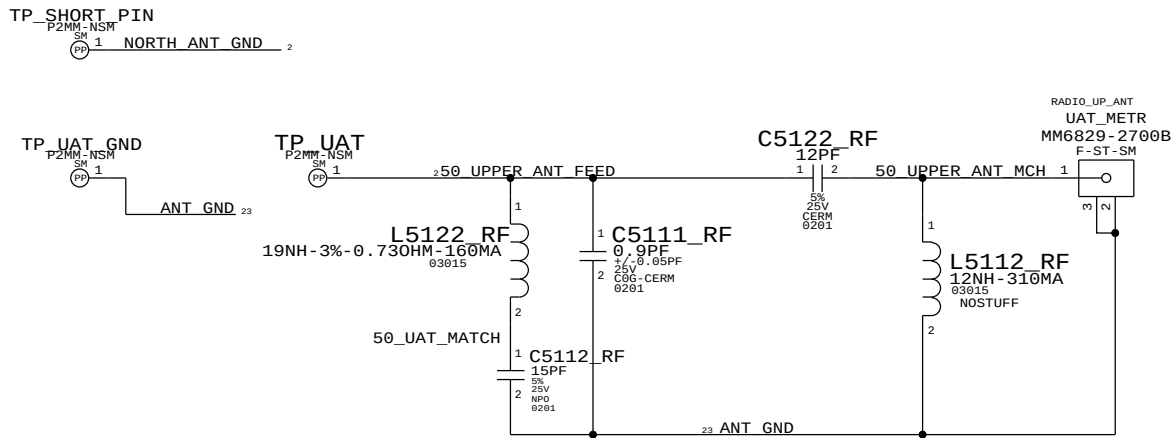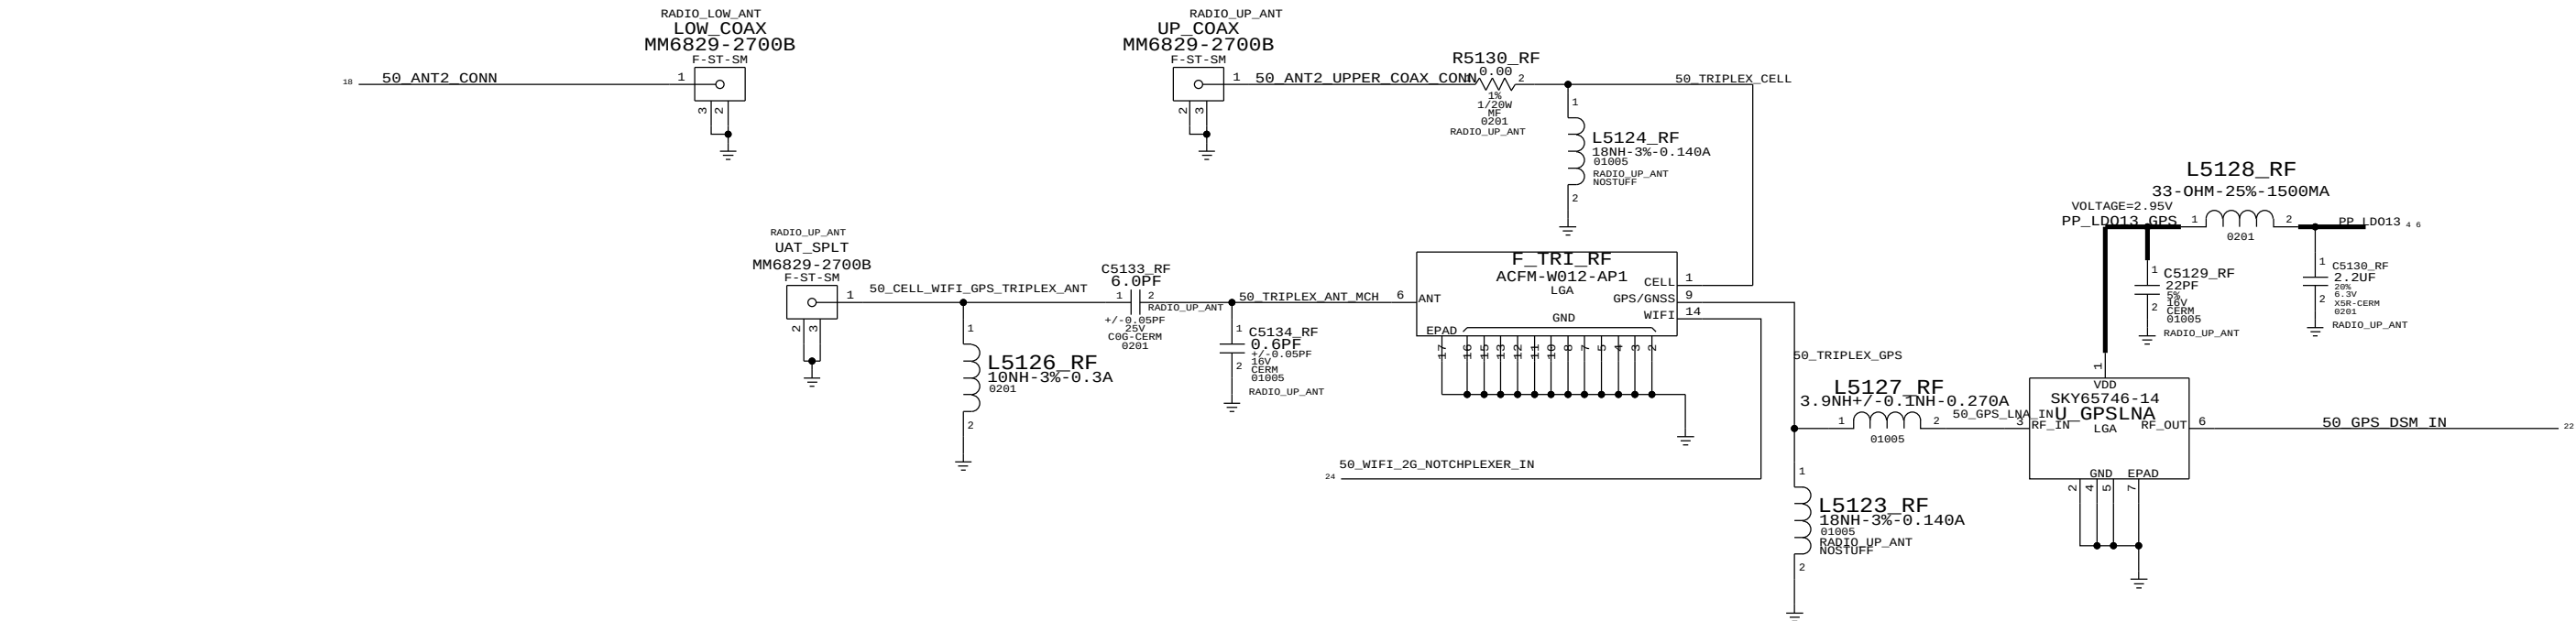

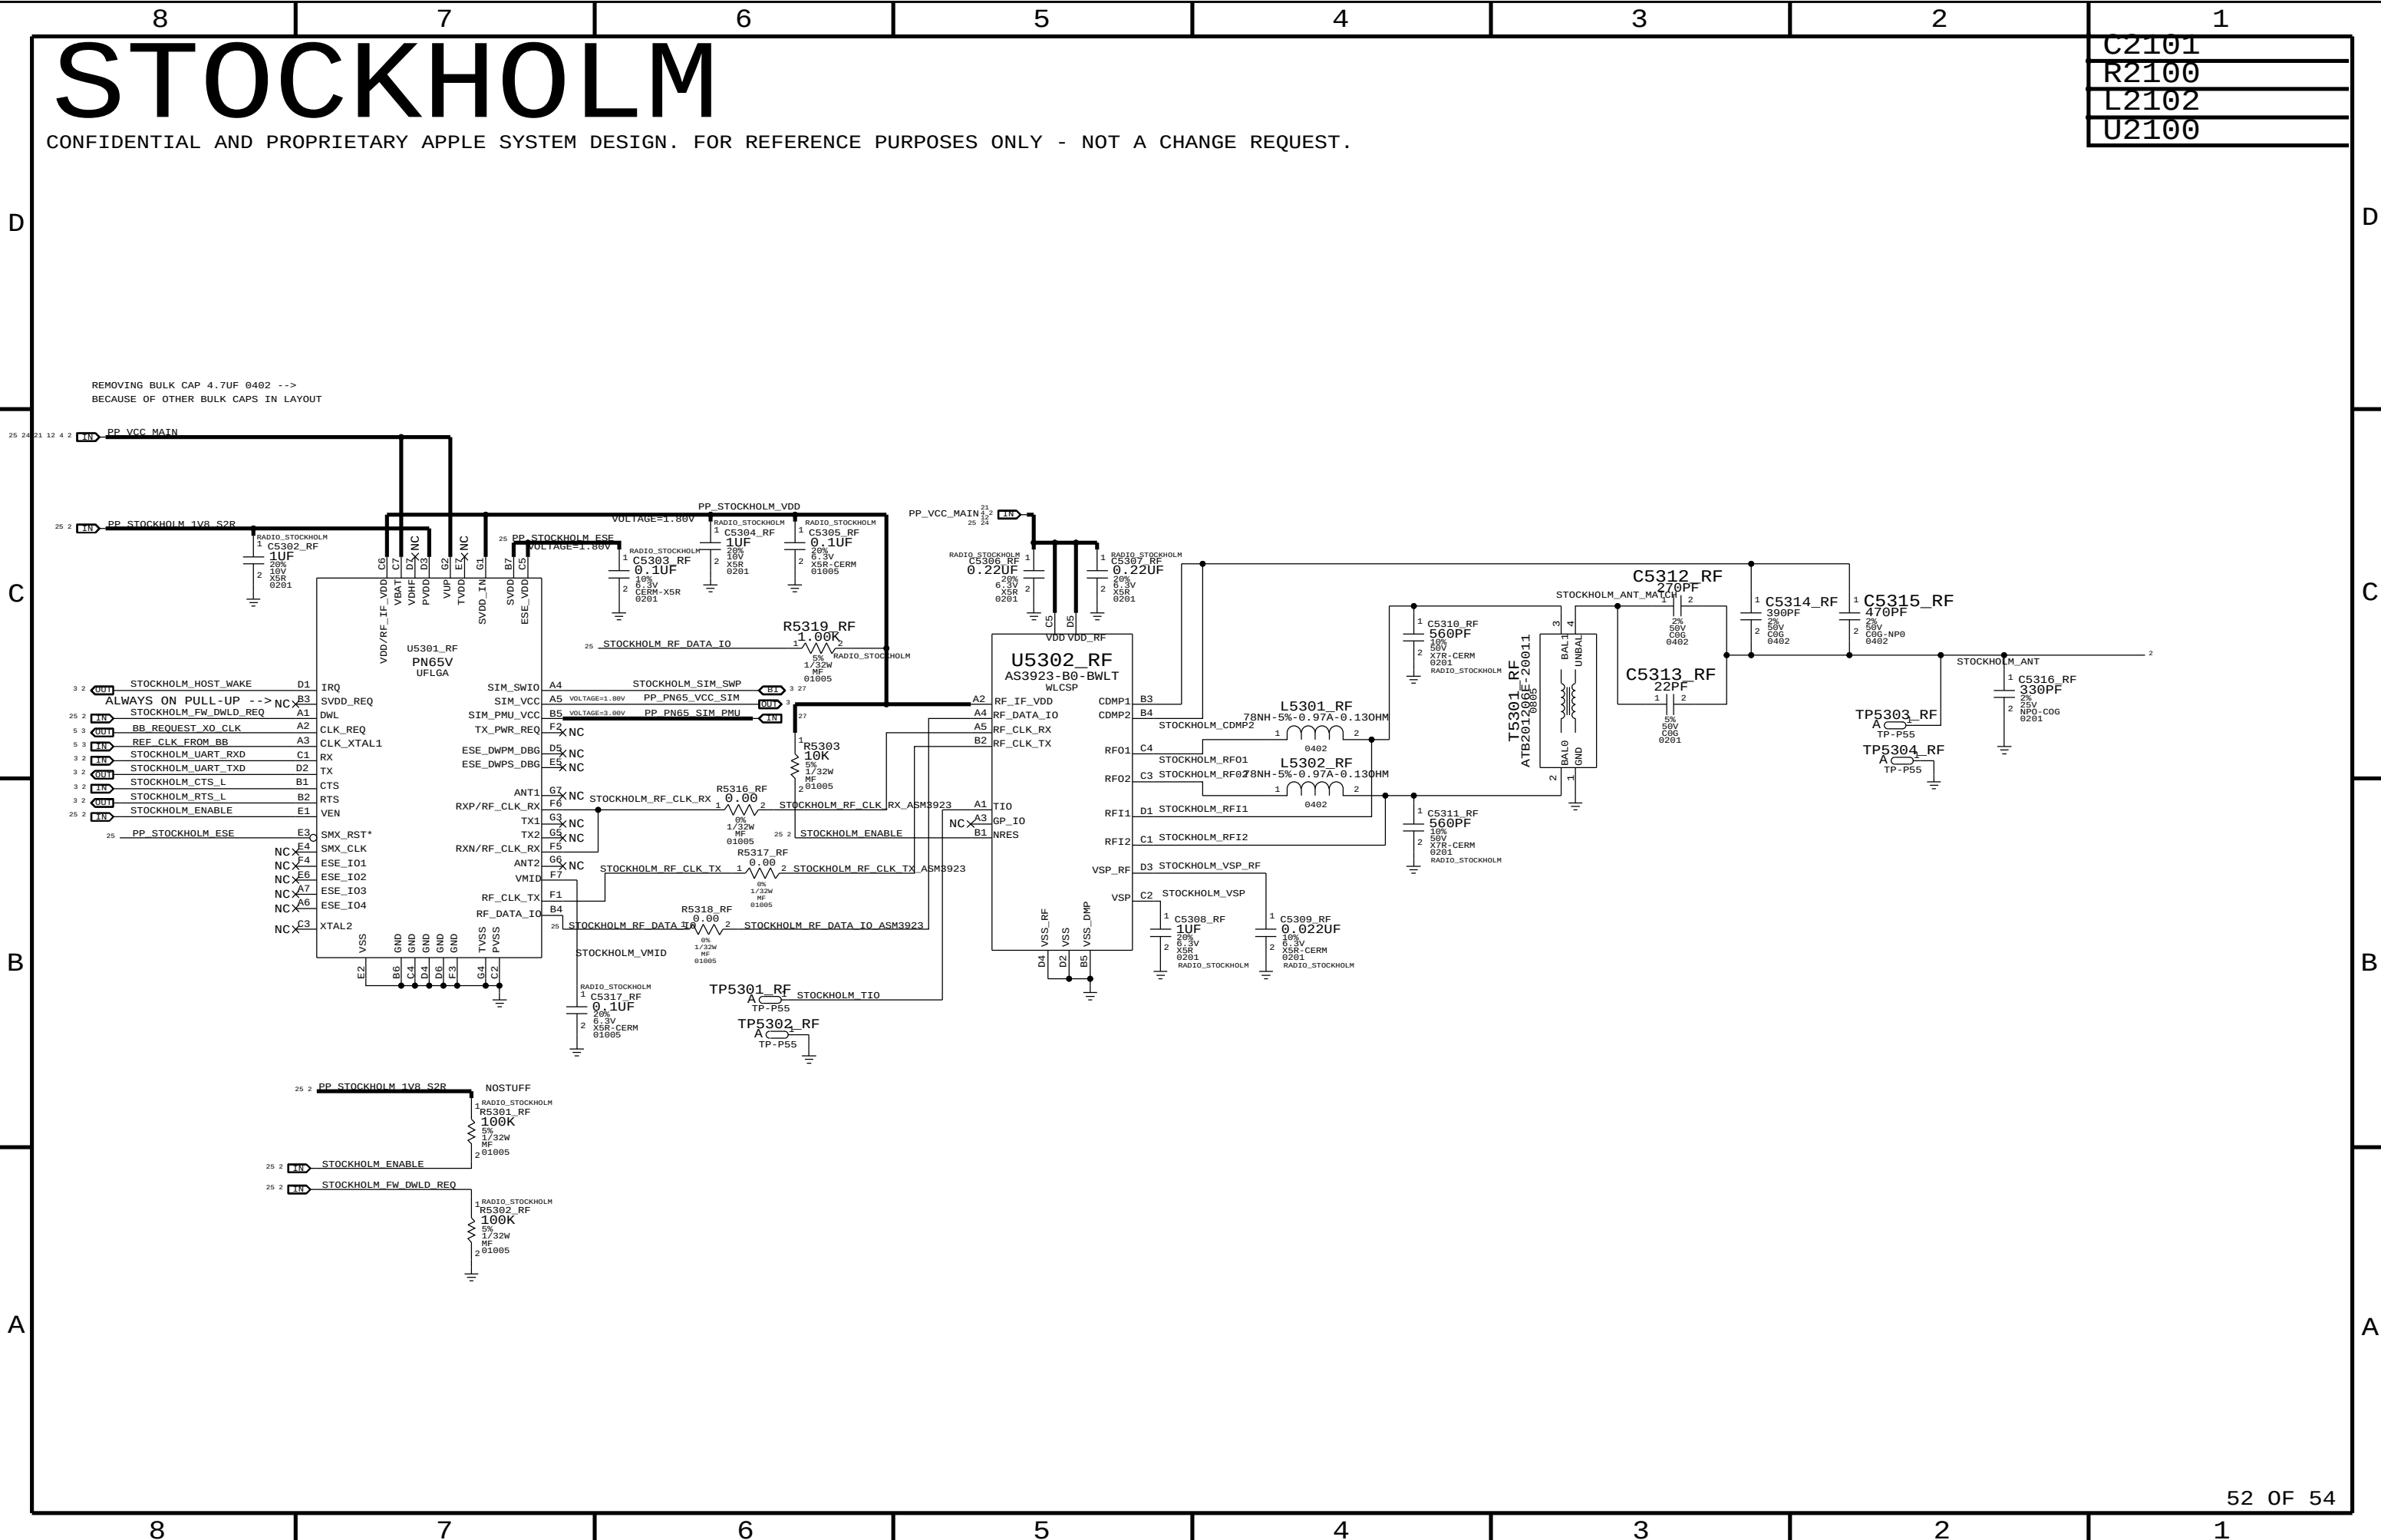[illegible][illegible][illegible]

ON-BOARD JUMPER FLEX

UAT JUMPER

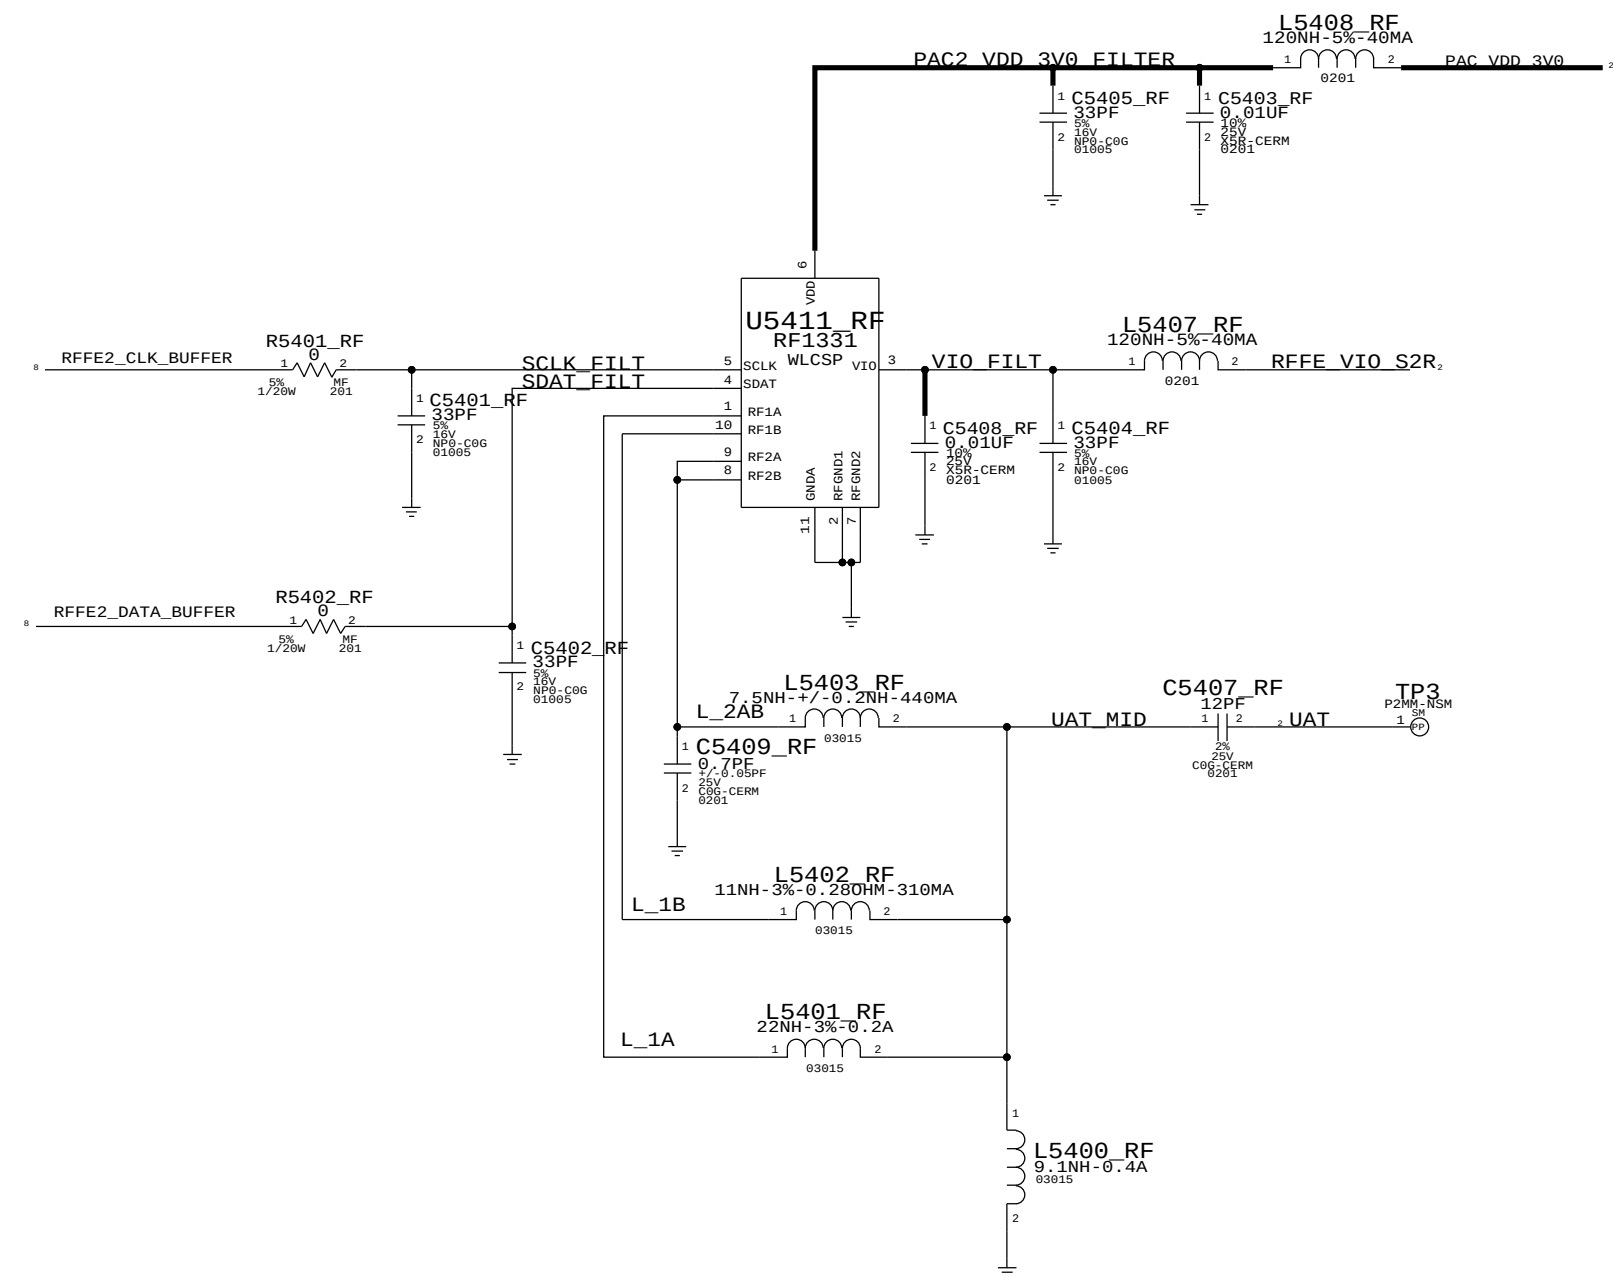

8	7	6	5	4	3	2	1
D							
C							
B							
A							
8	7	6	5	4	3	2	1

DSDS REMOVED - STILL KEEP RESISTOR

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

