


A schematic diagram of a four-stage rocket. The stages are labeled from left to right as L (Lifter), R (Roller), G (Gunner), and M (Motor). The Lifter stage is a simple cone. The Roller stage is a cylinder with a black band around its middle. The Gunner stage is a cylinder with four vertical lines. The Motor stage is a cylinder with a vertical line. The rocket is shown in profile, pointing to the right.

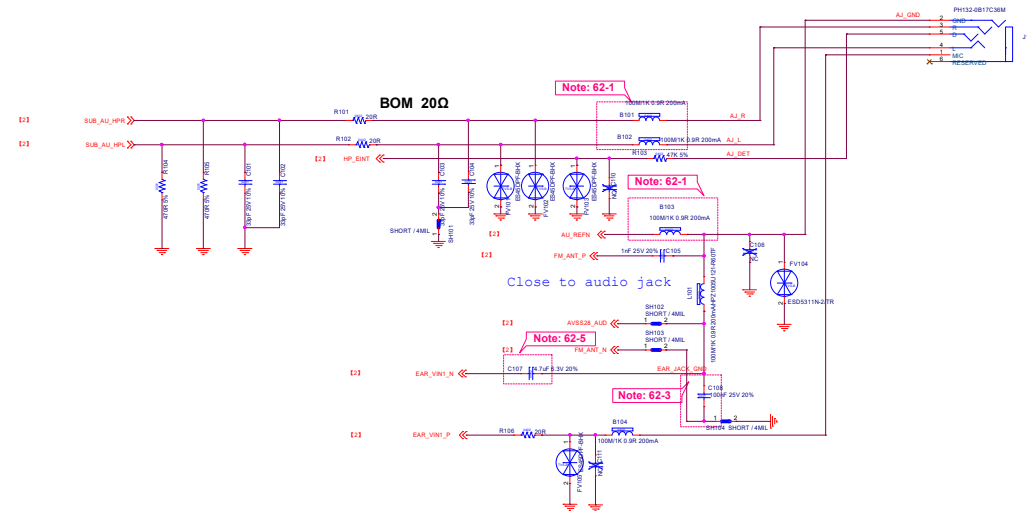

Note 62-1: Part # of BEAD6202, BEAD6203, BEAD6204 and BEAD6205 needs changed to "BLM18BD102SN1" for high THD performance (-90dB) but this BOM change will results in FM RSSI 10dB degraded .




Note 62-3:


	Earphone Jack @ Main board	Earphone Jack @ Sub board
C108	0 ohm	100nF

MT6357	UL mode	Min	Typ	Max	Unit
R_{in}	ACC	7K	-	-	ohm
C_{in}	DCC	-	-	11p	F

Note: 62-4

Platform	MT6357		
Mode	ACC mode	DCC mode	
EINT	HP_EINT	HP_EINT	
Key-Detection	ACDET	AD_VIN1_P	
C1912	10F	0 ohm	
C1913	1uF	0 ohm	
R1908	1K	NC	
R1912	1.5K	NC	
R1930	NC	2.49K	
C1915	4.7uF	0 ohm	
R1915	0 ohm	NC	
R1901	47K ohm	47K ohm	

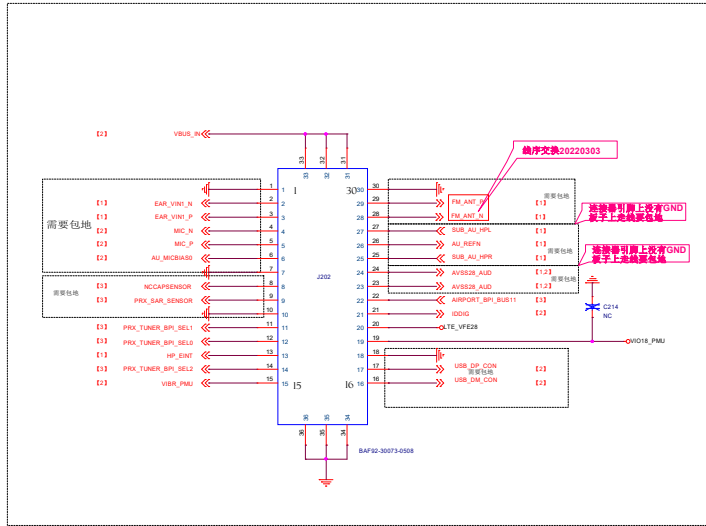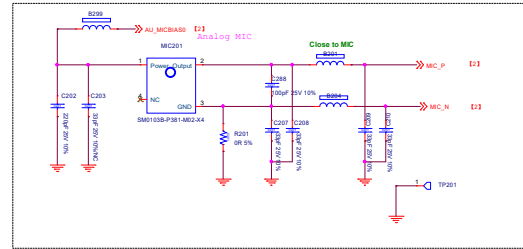

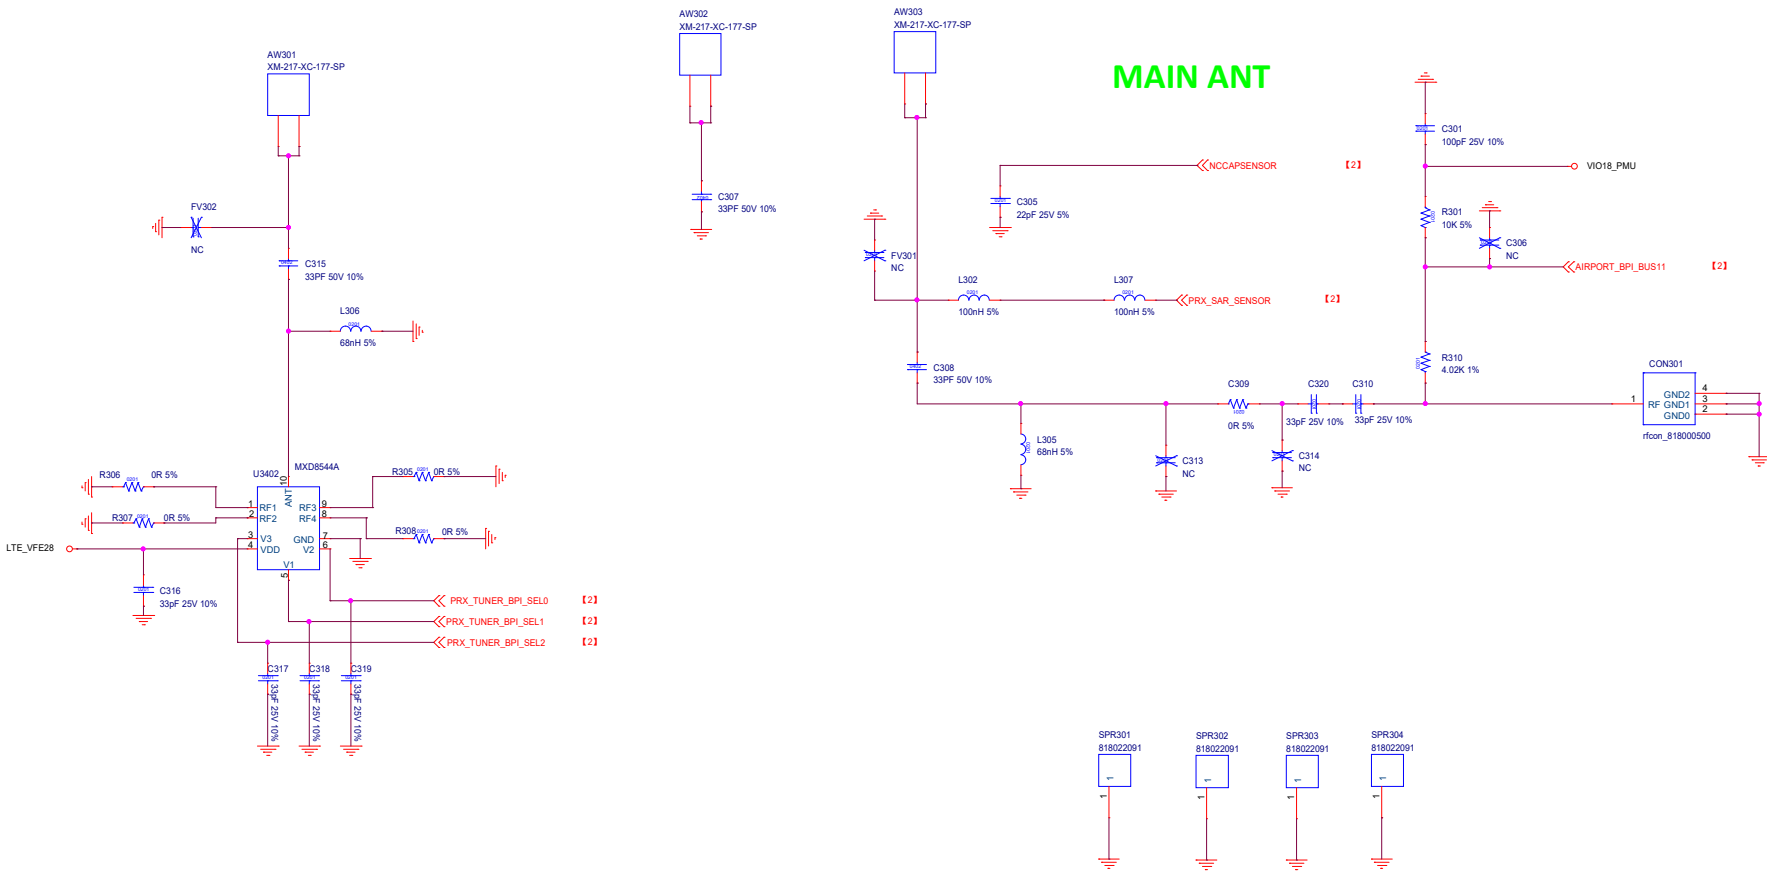

MAIN ANT

接地

Title			
M1060			
Size	Document Number		Rev
C	RF		<RevCode
Date:	Sunday, May 08, 2022	Sheet	3 of 3