

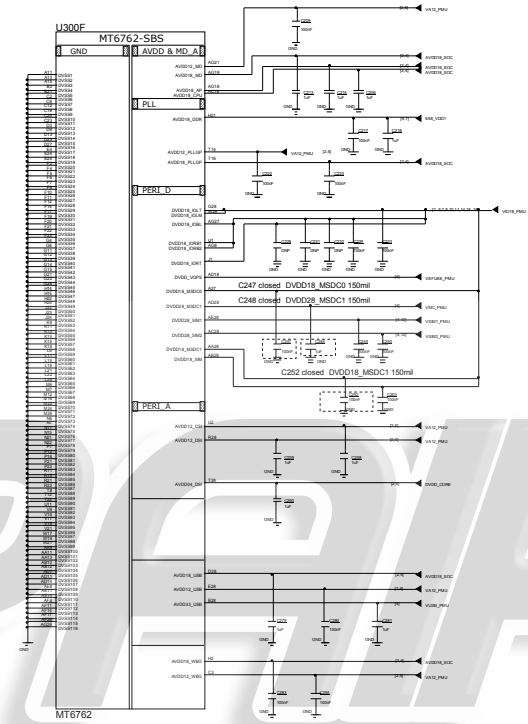
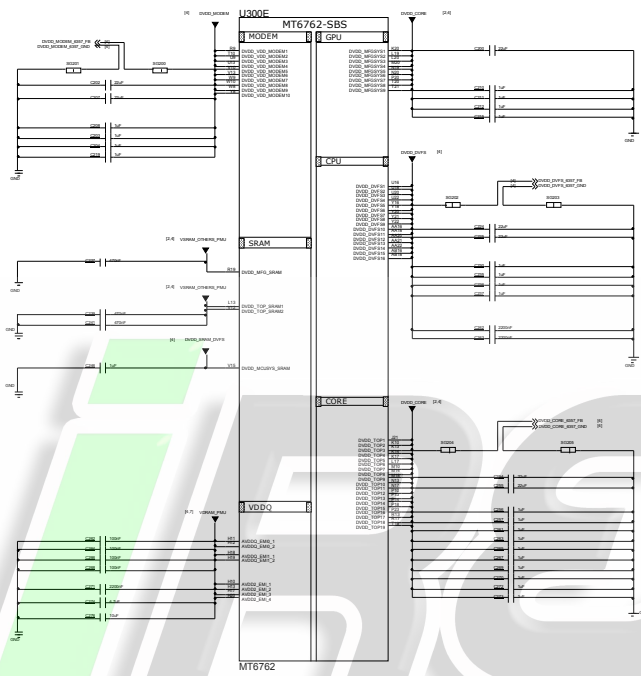
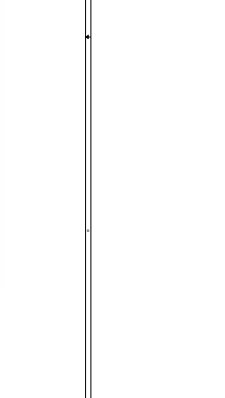
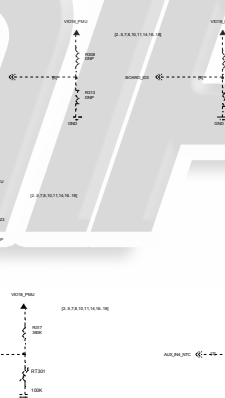
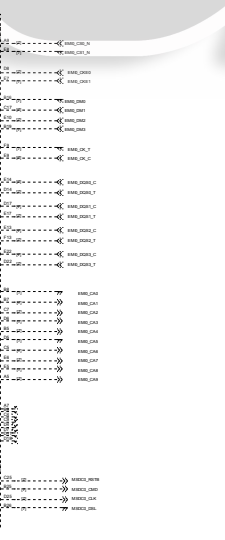




iREPAIR

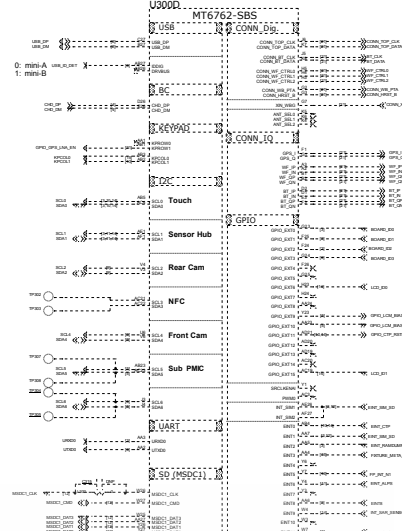

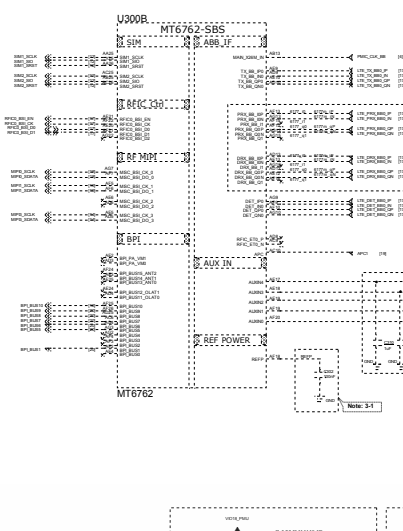






Thermistor to sense Board temperature

1. RCD02 must keep a distance about 6-8 mm away from AP and far from other heat sources 10 mm at least.
2. The distance is the shortest distance from package edge to edge.




UART




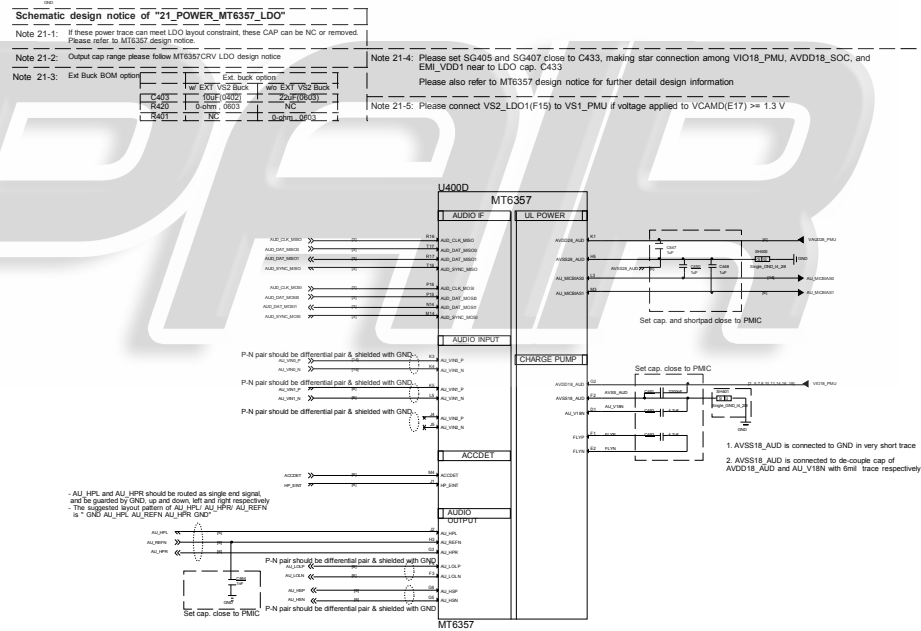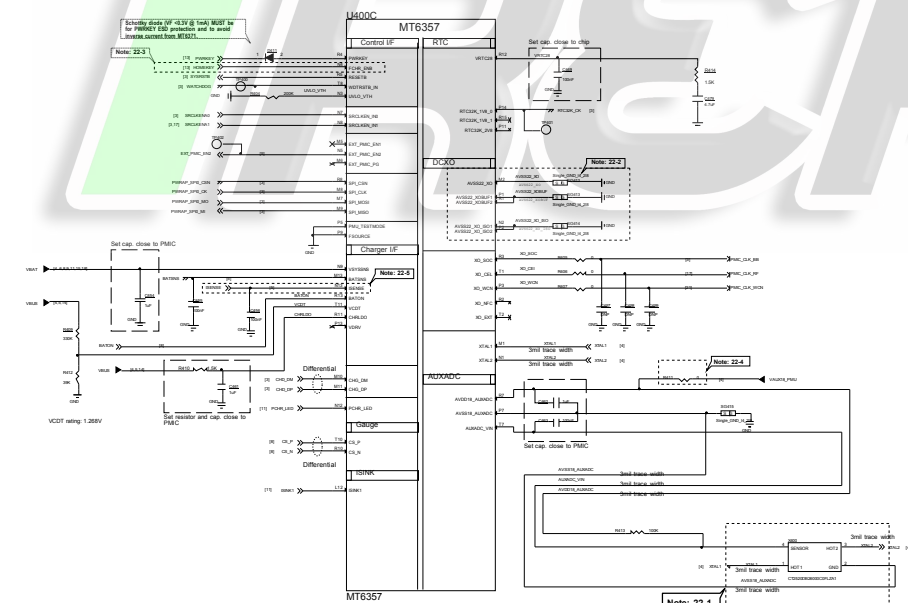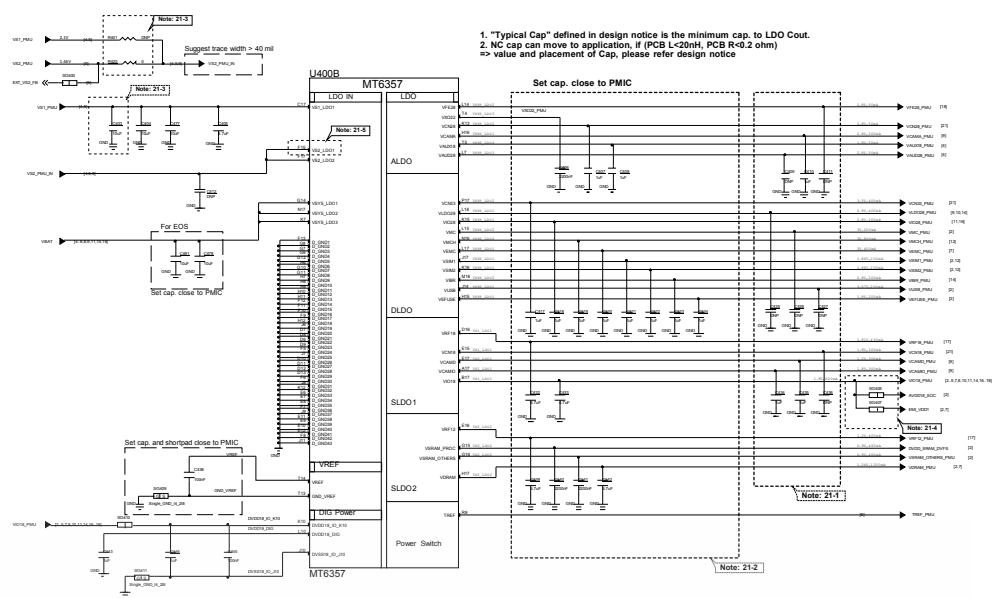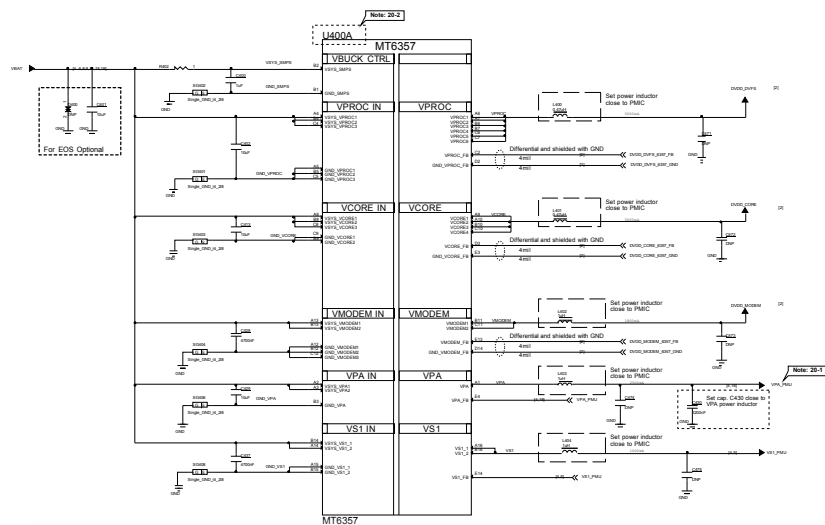


LCM Backlight LED driver

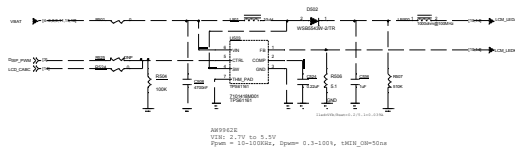


Charger

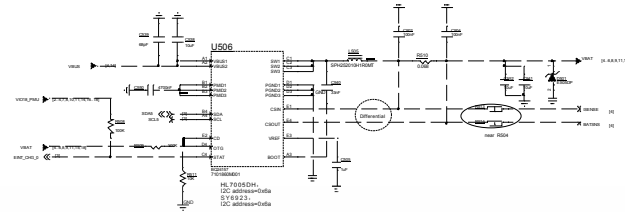


LCD Bias

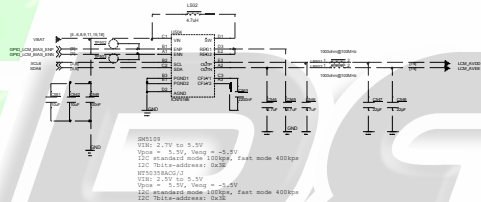

Flash LED 5V Boost

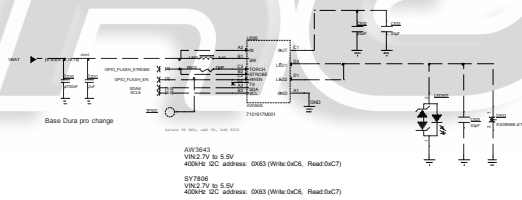

LDO for VA12



Ext. Bulk for VS2



Schematic design notice of "27_POWER_SubPMIC-HV powers" page:

Note 27-1: To minimize RF de-sense, it is recommended to reserve 0-ohm and 0402 cap for BOM fine tuning.

Note 27-2: To minimize RF de-sense, it is recommended to reserve 0-ohm and 0201 cap. for BOM fine tuning.

Note 27-3: C2705 could be replaced with $C/11 \mu F / 50V + C/11 \mu F / 50V$

Schematic design notice of "28_POWER_ThirdParty-Power"


Note 28-1: VA12 Layout placement please close to AP.

Note 28-2: VS2 Bulk Layout placement please close to PMIC MT6357


Note 28-3: VCN33 LDO Layout placement please close to MT6631

Handset 2nd Microphone


SPEAKER

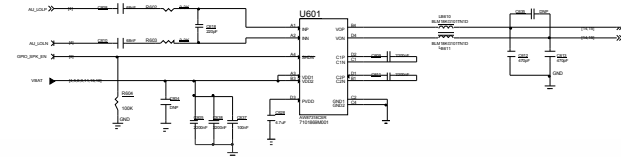


Earphone Audio

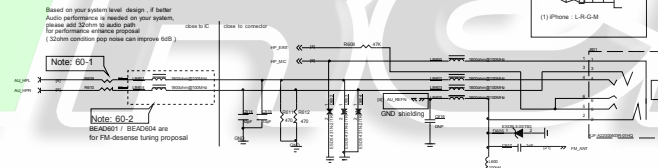




EAR PIECE




Earphone MICPHONE

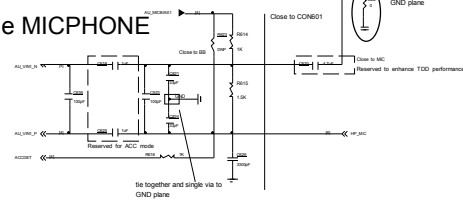

BATTERY CONNECTOR

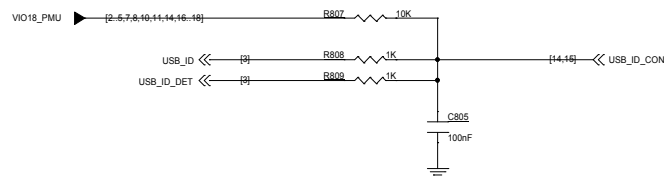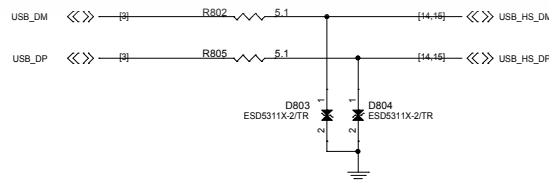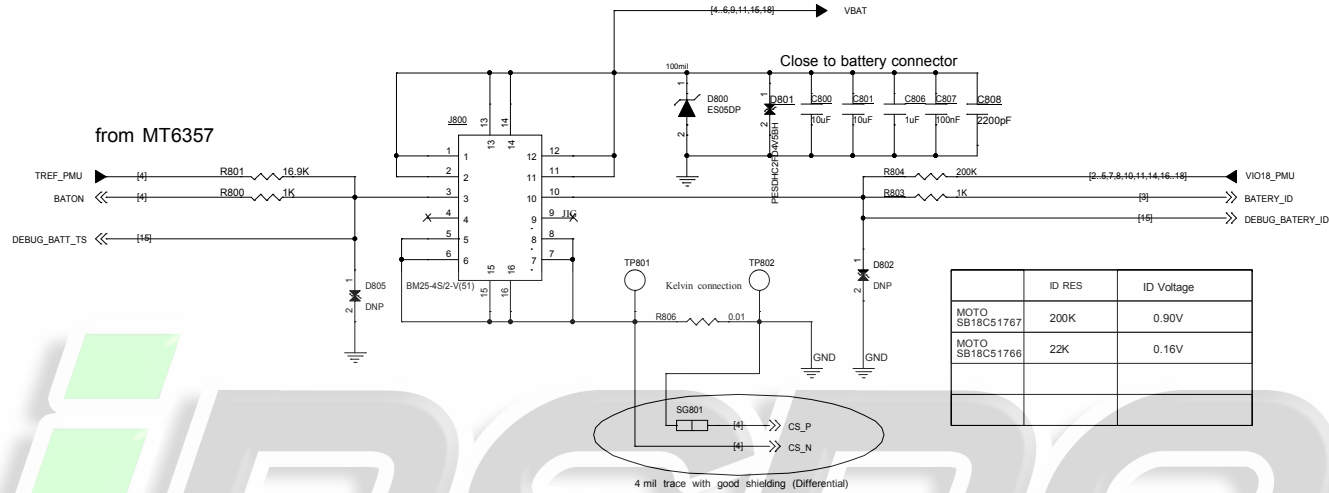


Rear-Main Camera(AF-13M)

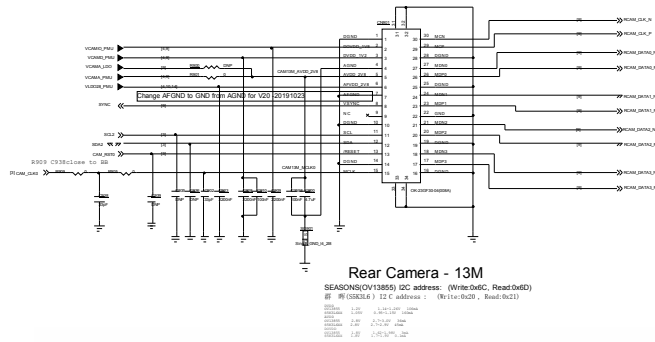


Rear Camera - 13M

SEASONS(OV13850) I2C address: (Write 0x6C, Read 0x6D)
 00 00 (0x0000) 12 C address: (Write 0x20, Read 0x21)
 0000 1200 0x0000 0000
 0000 1200 0x0000 0000
 0000 1200 0x0000 0000
 0000 1200 0x0000 0000




Rear-Slave Camera(FF-2M)

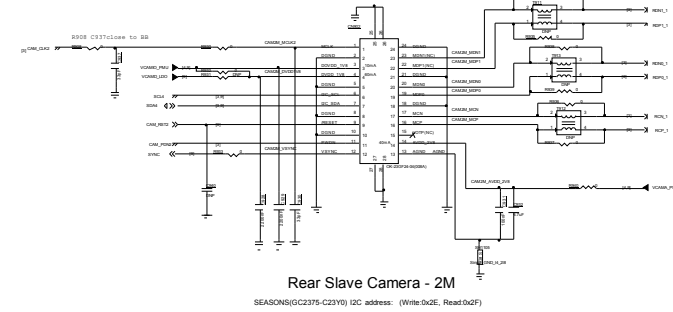

Rear Slave Camera - 2M


SEASONS(GC2375-G2370) I2C address: (Write 0x2E, Read 0x2F)


Front-FF-5M Camera Connector

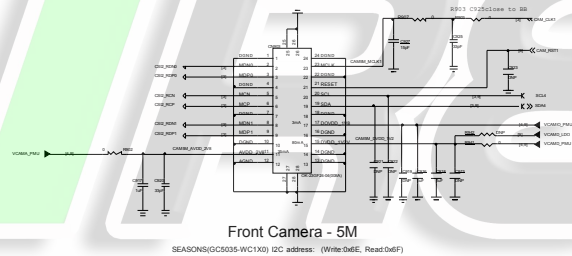





Front Camera - 5M

SEASONS(GC5035-WC1X0) I2C address: (Write 0x6E, Read 0x6F)





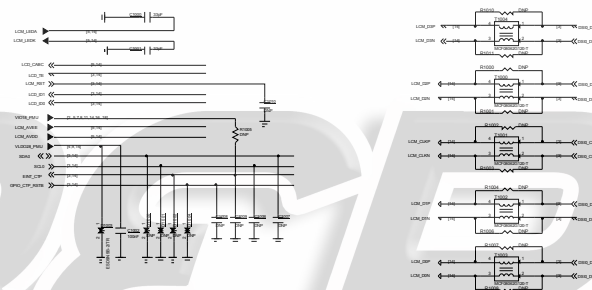

GT1151 I2C address: 0X5D (Write:0xBA, Read:0xBB)
or 0x14 (Write:0x28, Read:0x29)

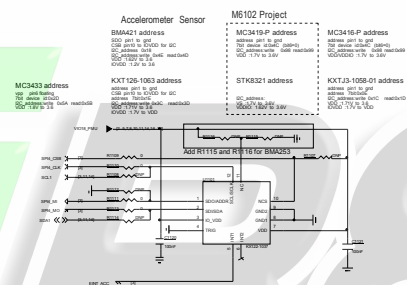


SIM and TE

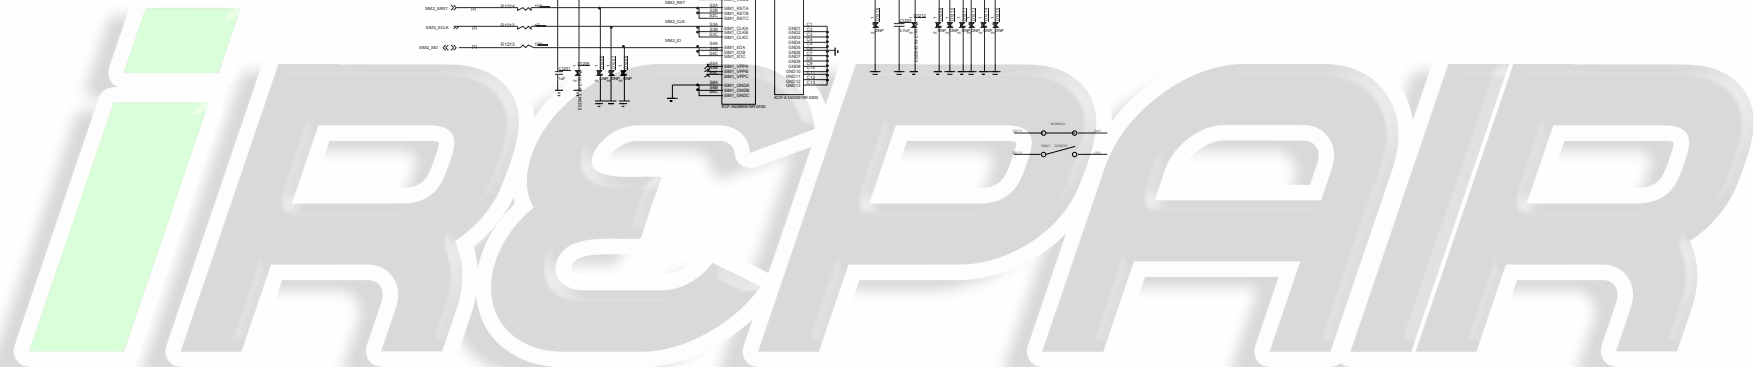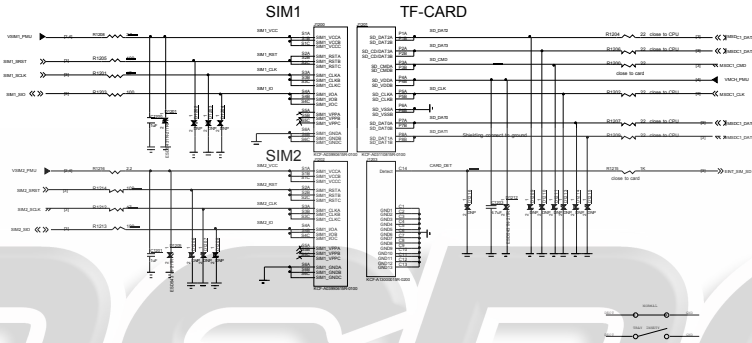

The background of the entire page is a detailed circuit board layout. The most prominent feature is the large, stylized text "iR&P AIR" in a light gray, outlined font. The "i" is lowercase and has a green vertical bar on its left side. The rest of the letters are in a bold, sans-serif font. Behind the text, various electronic components and traces are visible. At the top, there are labels like "BANK_LED1", "BANK_LED2", "BANK_LED3", and "BANK_LED4" connected to a common ground. There are also labels for "BANK_LED5" and "BANK_LED6". In the center, there are labels for "BANK_LED7" and "BANK_LED8". At the bottom, there are labels for "BANK_LED9" and "BANK_LED10". The circuit board is populated with numerous components, including resistors, capacitors, and integrated circuits. The overall design is clean and professional, reflecting the technical nature of the company.


KEY

Volume Up : HOME Key / GND
Volume Down : KPCOL1GND
DO NOT put pull-up resistor on PWRKEY

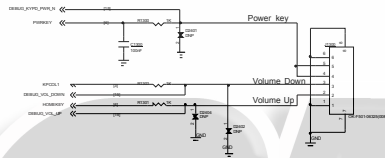


iREPAIR

OVP




Sub Connector

0xXX (Write:0xXX, Read:0xXX)


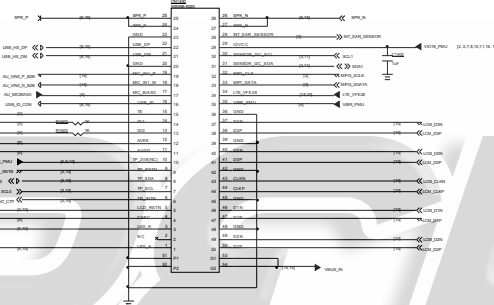


Download mode TP




USB Test point



Now TP size is 1.2, need?




KEY Test point



BATTERY Test point

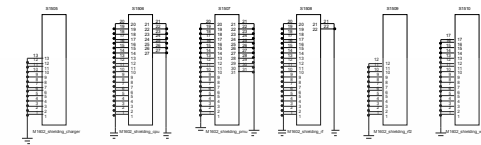


SPK Test point



iREPAIR

iREPAIR

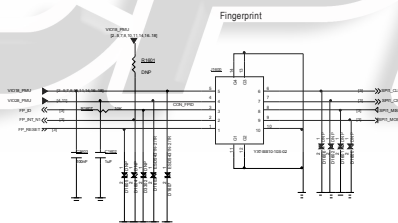




B28B/20 TX




B8 TX






B2 TX




B3 TX




B1 TX




B4 TRX




B40 TRX



B7 TX




B41 TRX




B28A TX



B5 TX







3G/4G_PAIN_LB



3G/4G_PAIN_MB



3G/4G_PAIN_HB

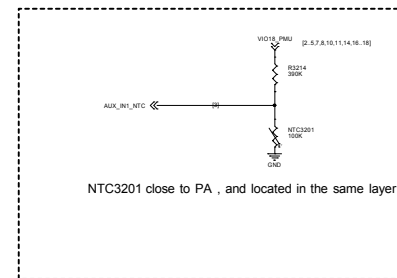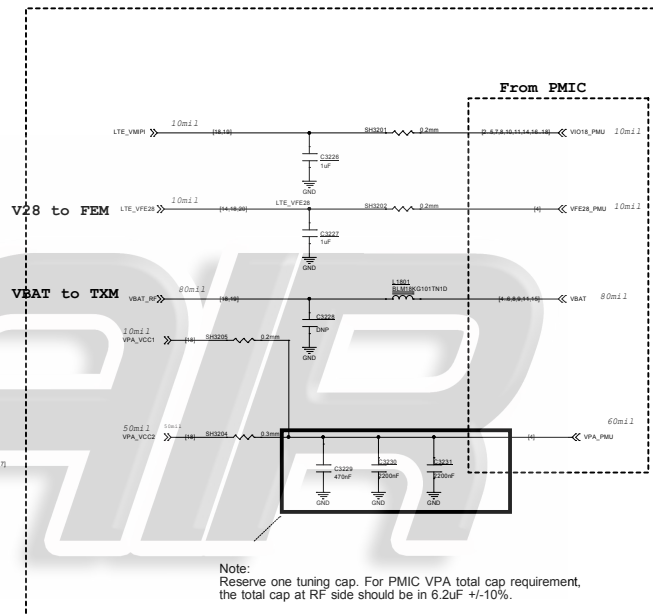

File	<File>
Doc	Document Number
D	M9102-F11
Rev	V10
Date	London, October 25, 2019
Sheet	18 of 21

