

[illegible][illegible]

ANT2

ANT4

ANT5

ANT6

ANT7

ANT8

[illegible]

鑫智造智能终端设备维修查询系统
XinZhiZao Maintenance Inquiry System

鑫智造智能终端设备维修查询系统
XinZhiZao Maintenance Inquiry System

鑫智造智能终端设备维修查询系统
XinZhiZao Maintenance Inquiry System

鑫智造智能终端设备维修查询系统
XinZhiZao Maintenance Inquiry System

鑫智造智能终端设备维修查询系统
XinZhiZao Maintenance Inquiry System










鑫智造智能终端设备维修查询系统
XinZhiZao Maintenance Inquiry System





鑫智造智能终端设备维修查询系统
XinZhiZao Maintenance Inquiry System

鑫智造智能终端设备维修查询系统
XinZhiZao Maintenance Inquiry System


鑫智造智能终端设备维修查询系统
XinZhiZao Maintenance Inquiry System


Title		
J11 MAIN		
Size	Document Number	Rev
A2	<Doc>	P0
Date: Thursday, September 08, 2022 Sheet 2 of 74		

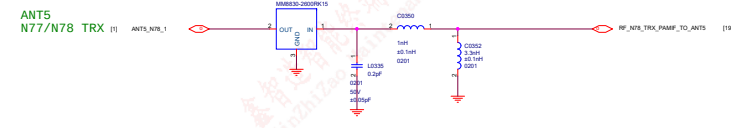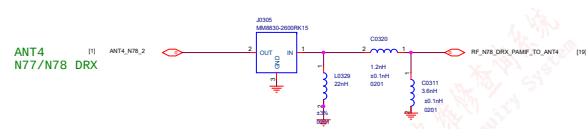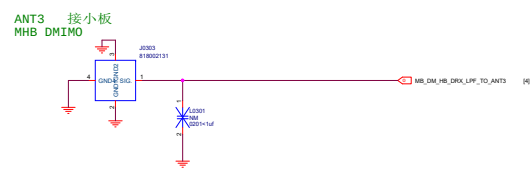

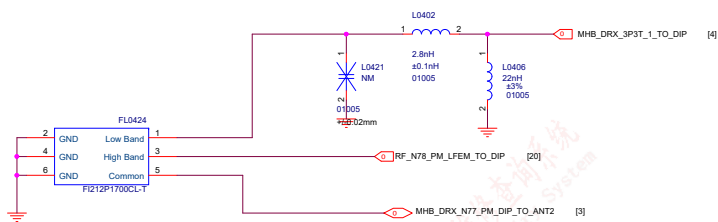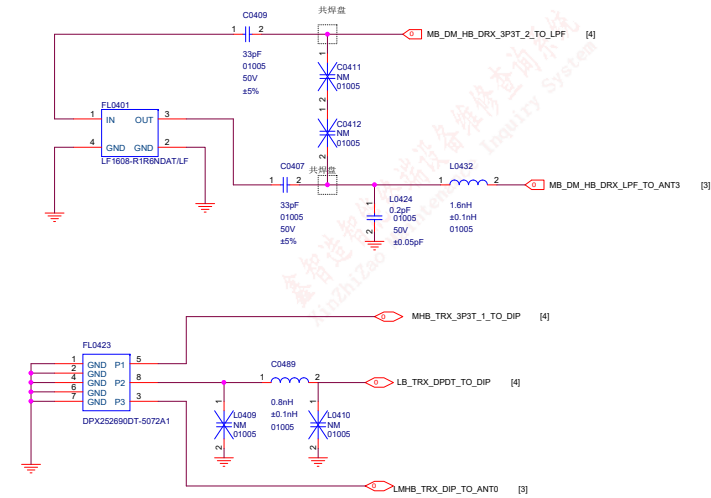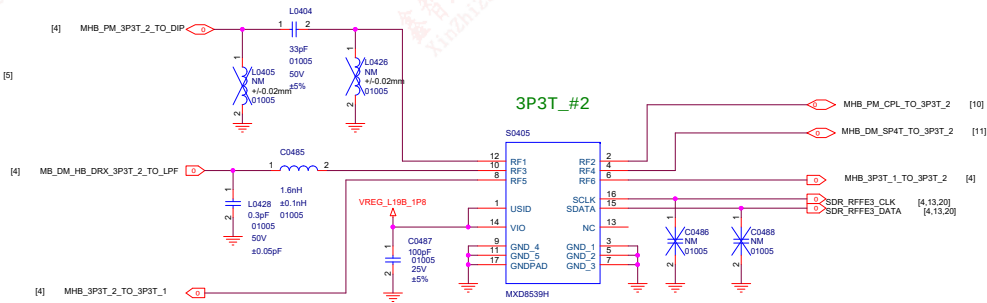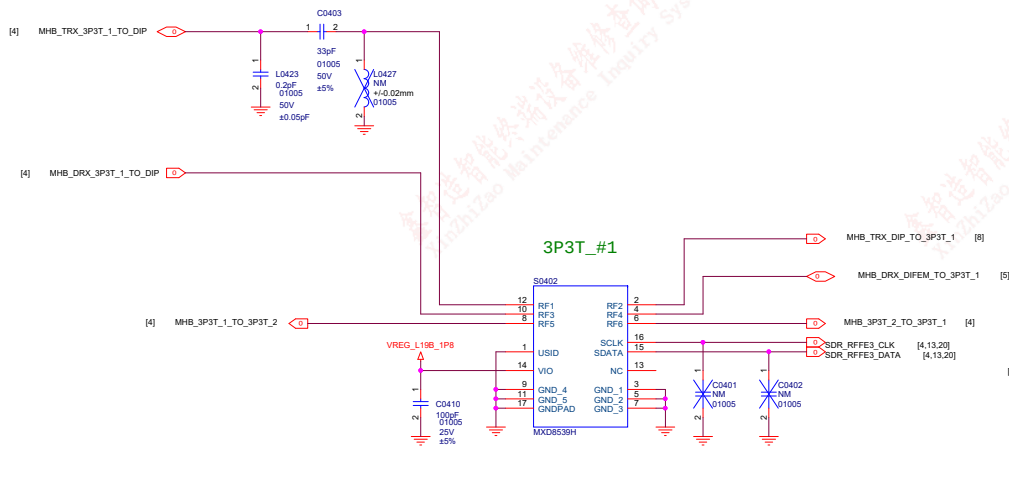


LB TAS DPDT

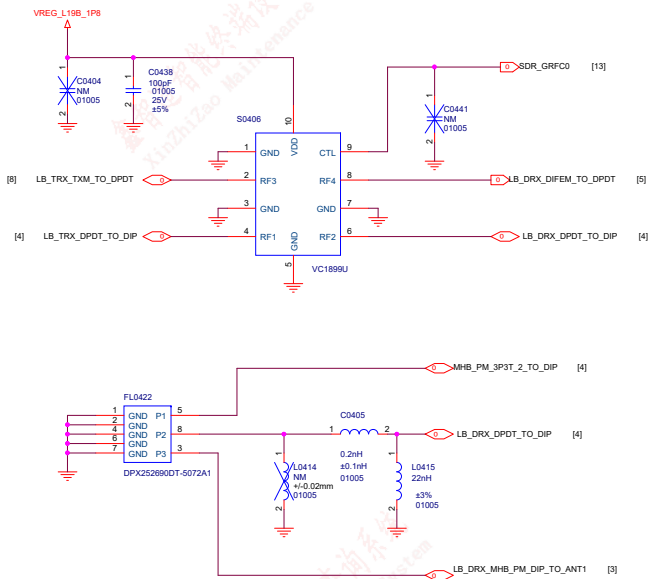


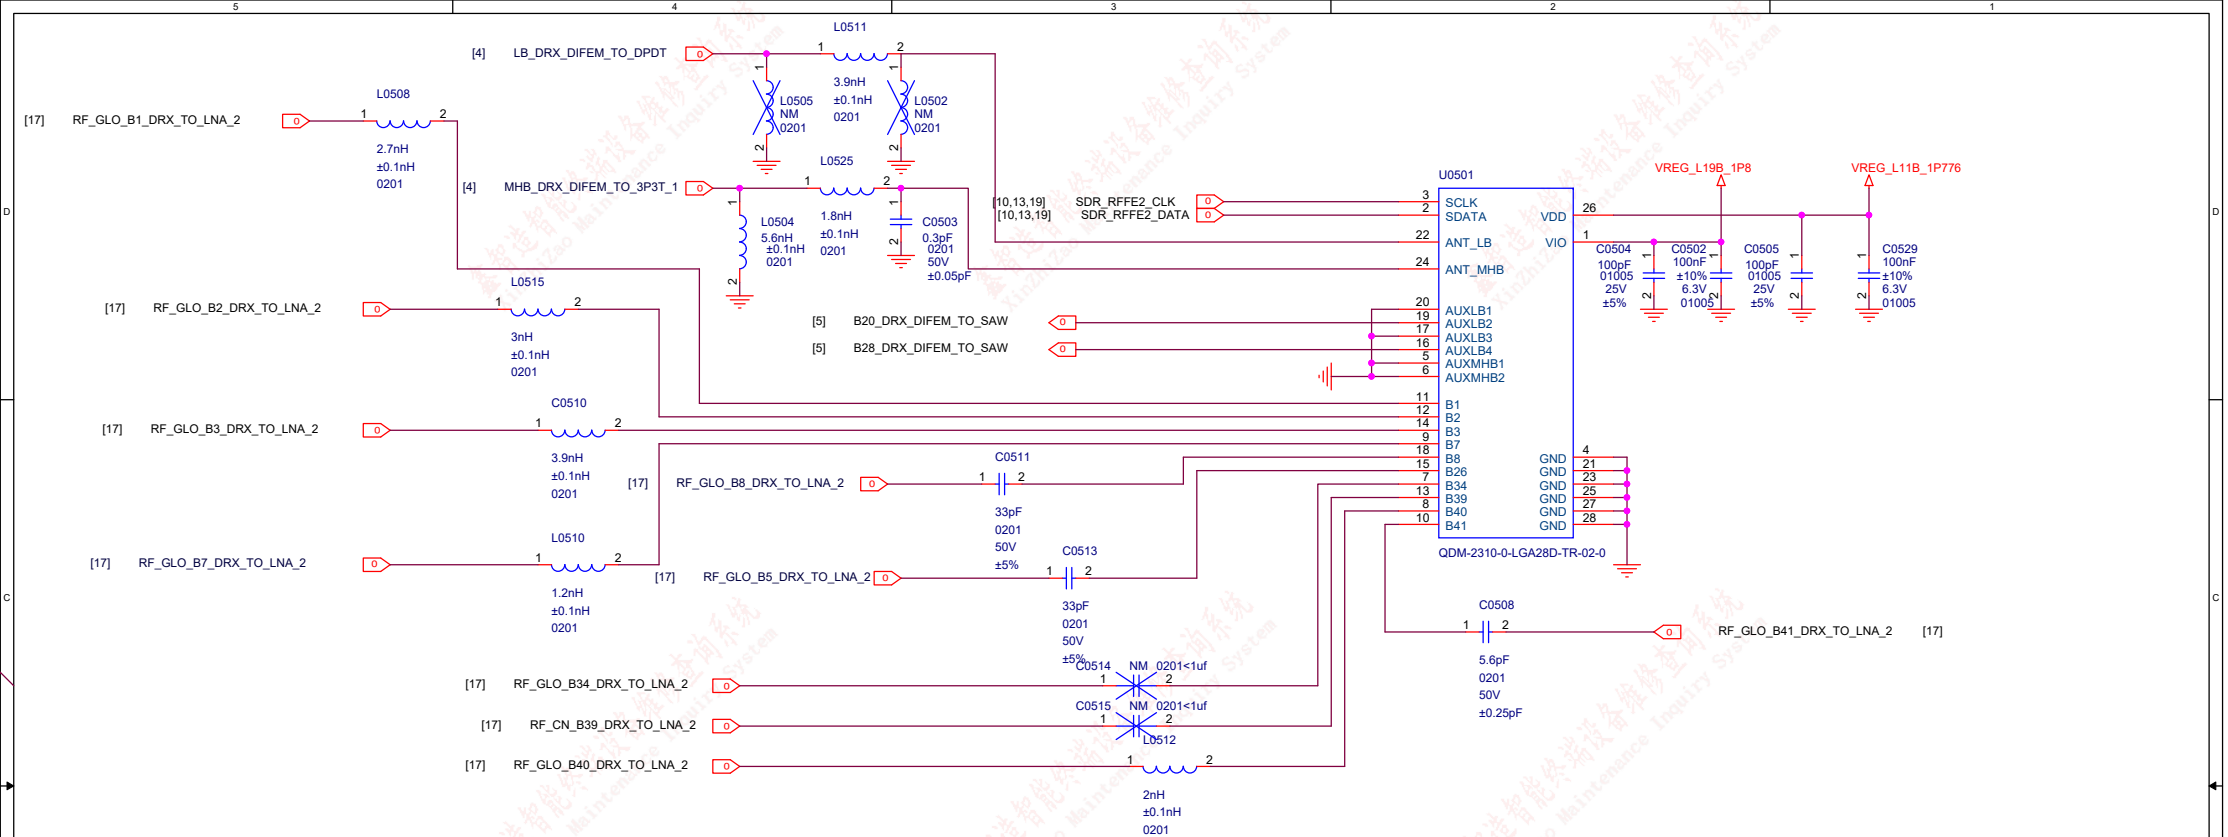

B20 RX SAW

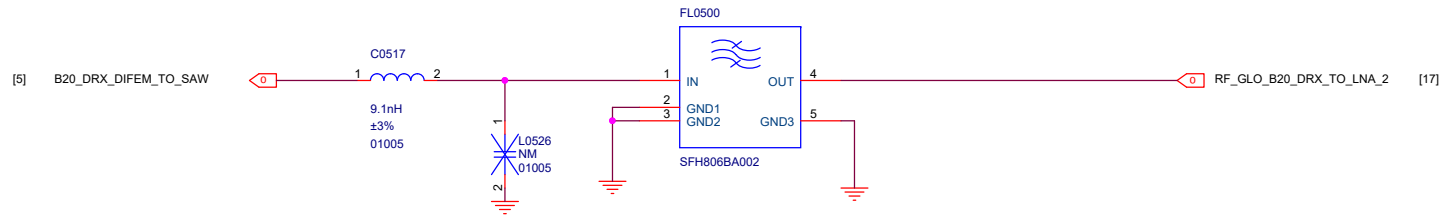


B28 RX SAW

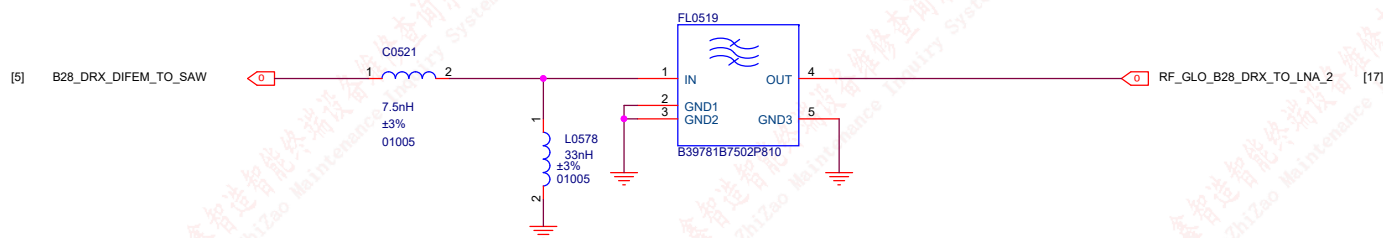


Title		
L9D/L13S_MAIN_TEST		
Size	Document Number	Rev
A3	DRX	P0
Date:	Thursday, September 08, 2022	Sheet 5 82


B7 TX

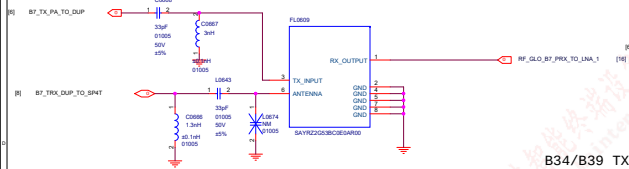


B41




B40 TX




B34/B39 TX




GL0: B1+B3 Quadplexer
CN: B1+B3 Dualplexer

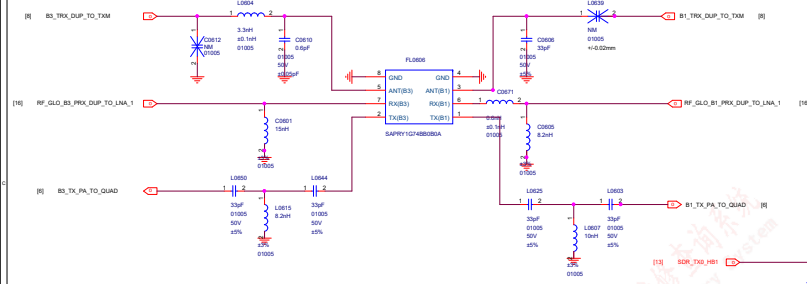


4G PA

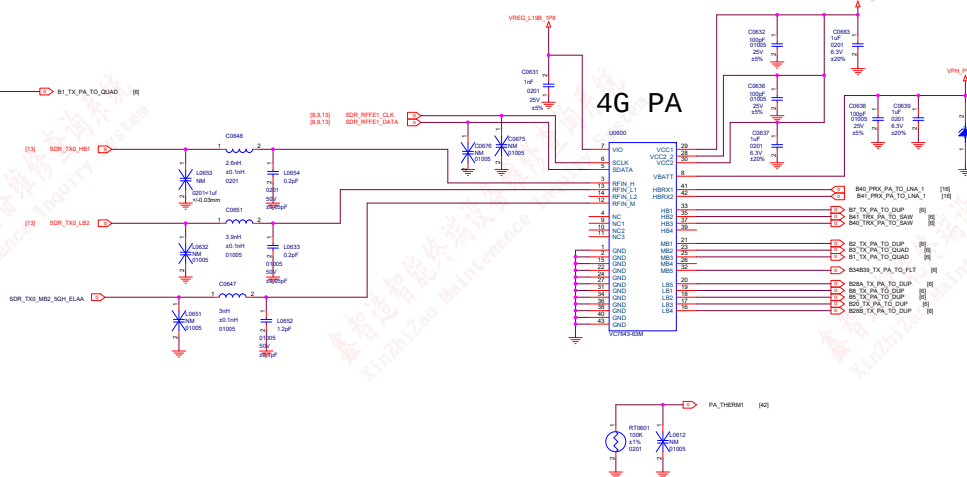


B5 TRX

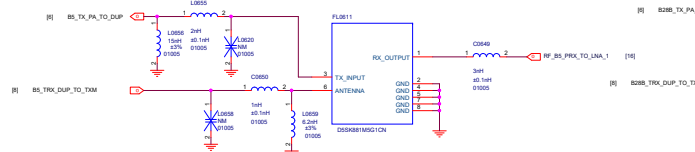


B28B TRX

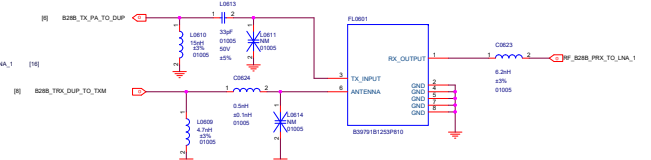


B20 TRX

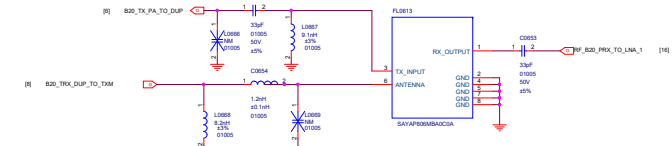


B8 TRX

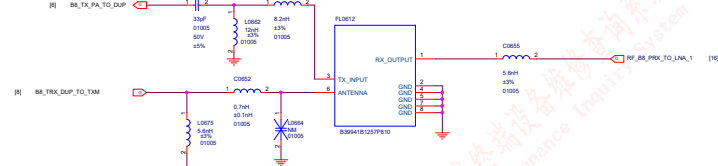


B28A TRX

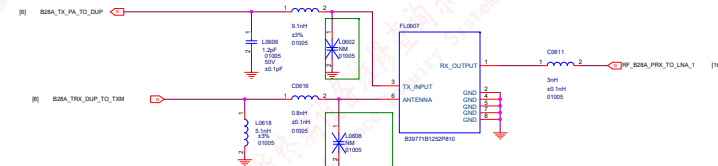


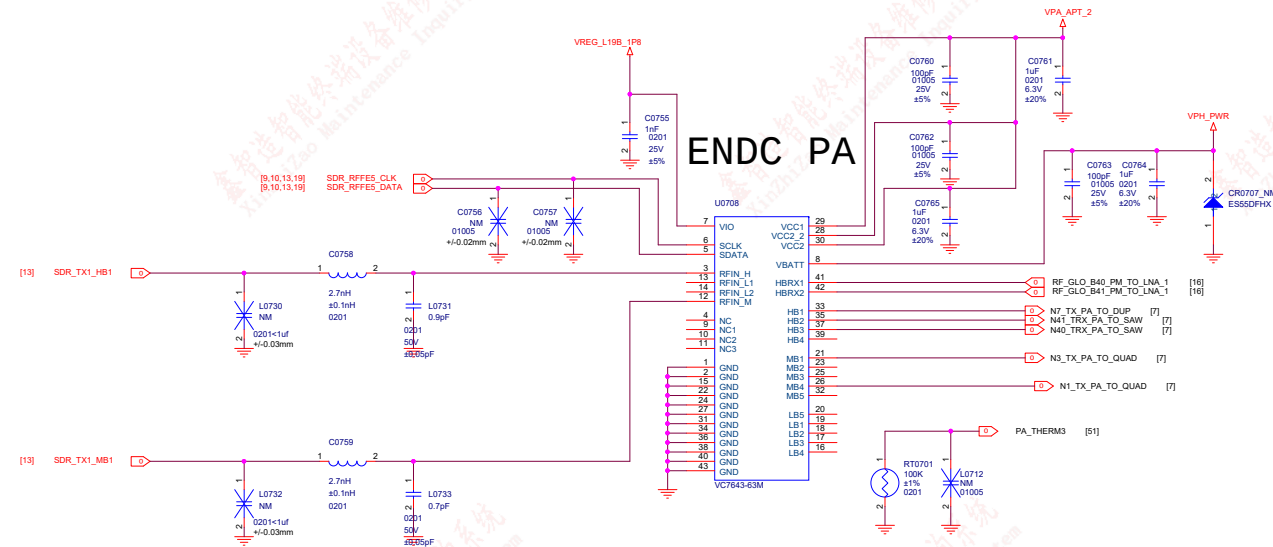


B1+B3 Dualplexer

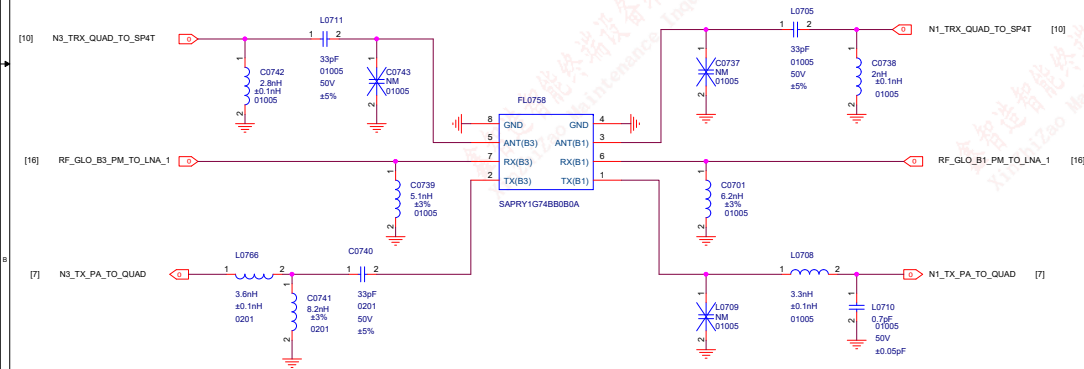


N7 TRX


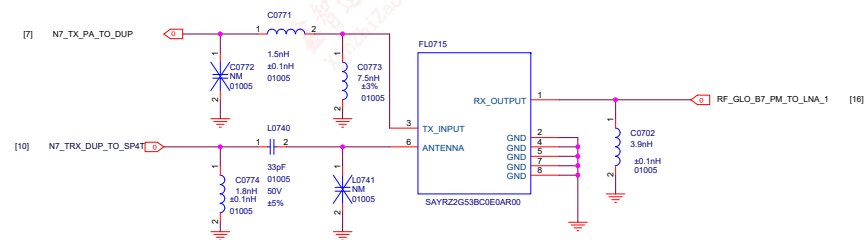



N41 TRX

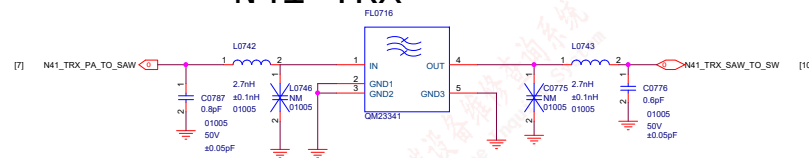


N40 TRX

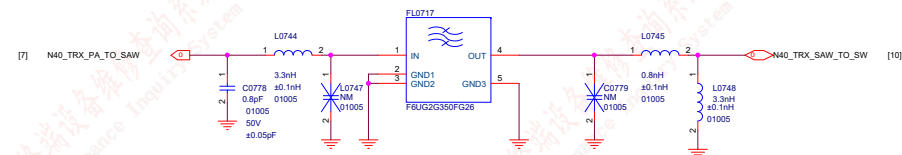




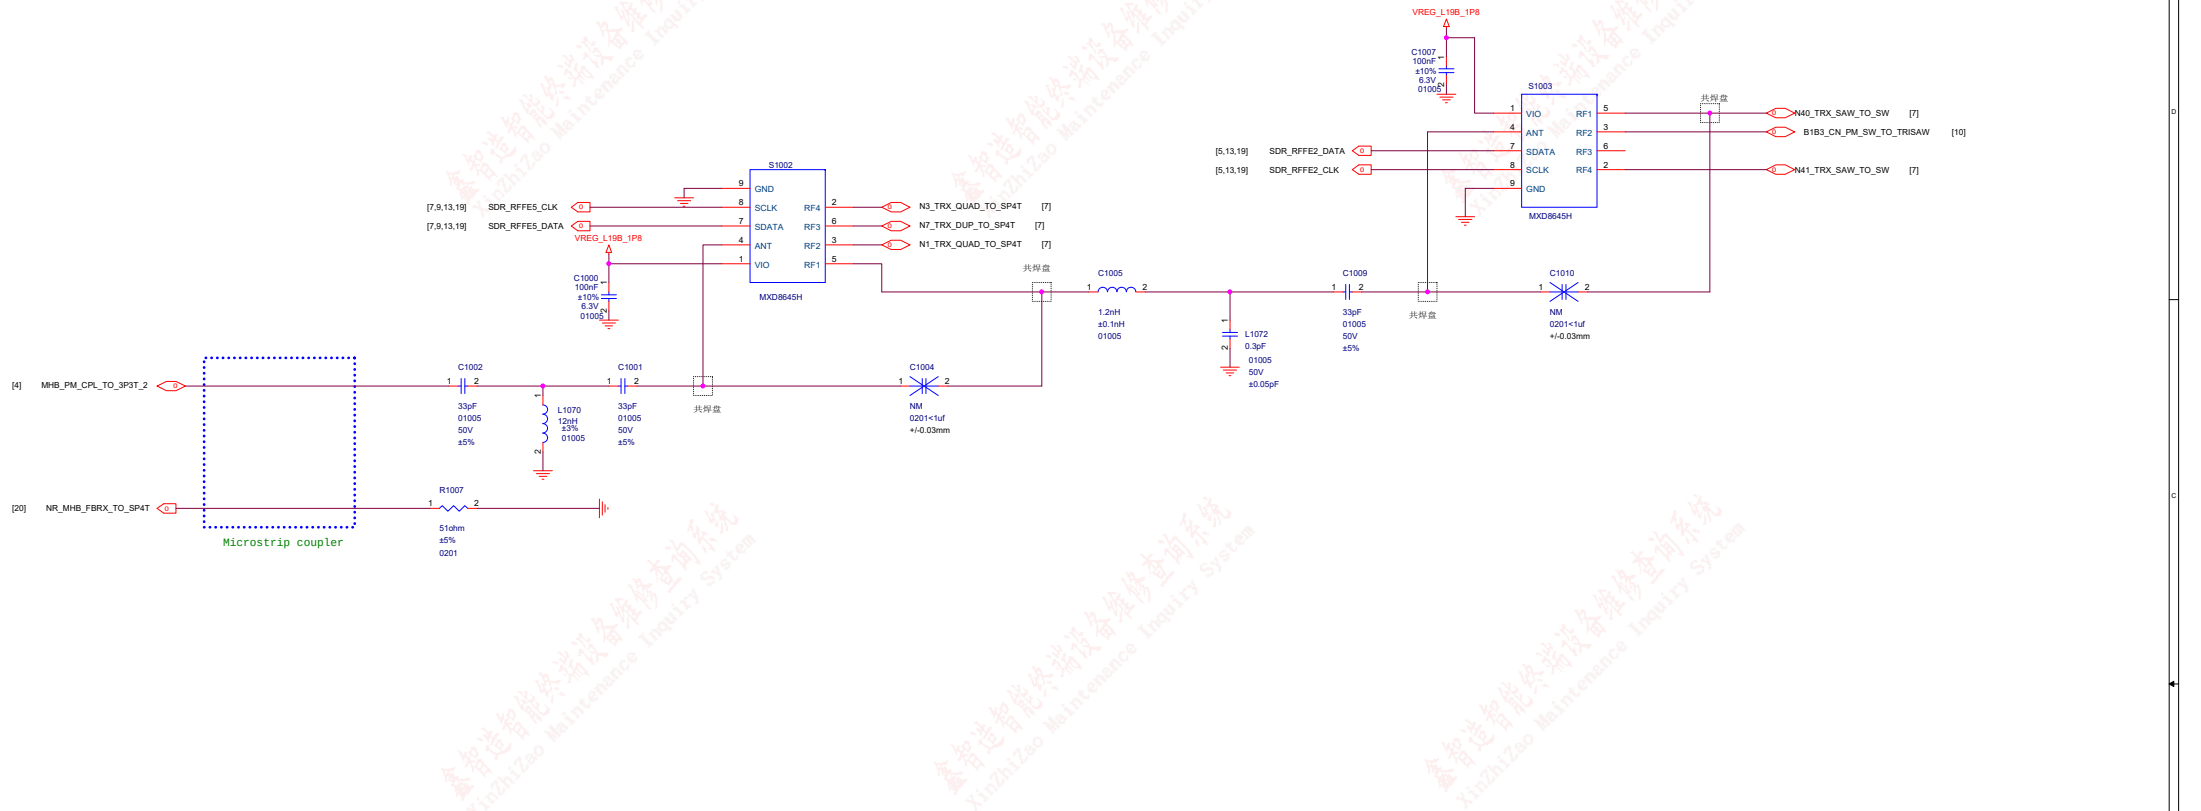


B1/B3 CN PM

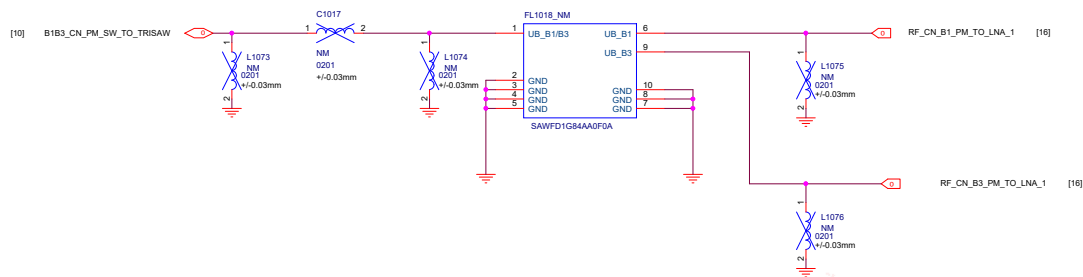


File			
L90M18S_MAIN_TEST			
Size	Document Number	Rev	
A2	PRX MIMO	P0	
Date:	Thursday, September 08, 2022	Sheet	10 82

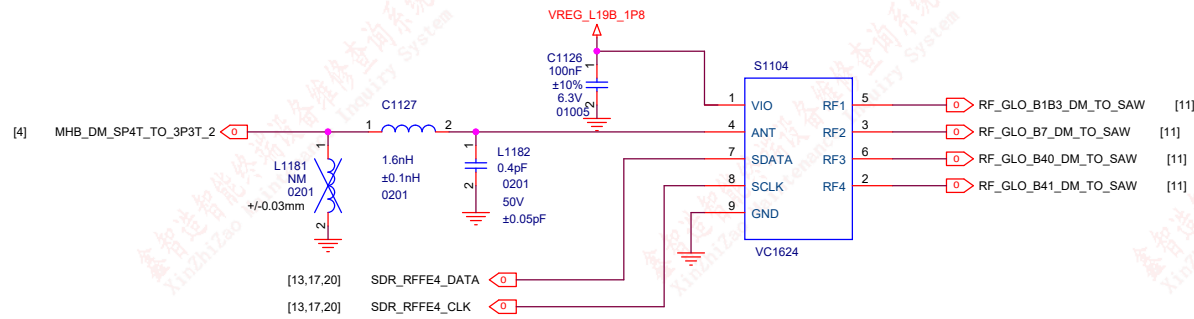


B1/B3 DM Dual-SAW

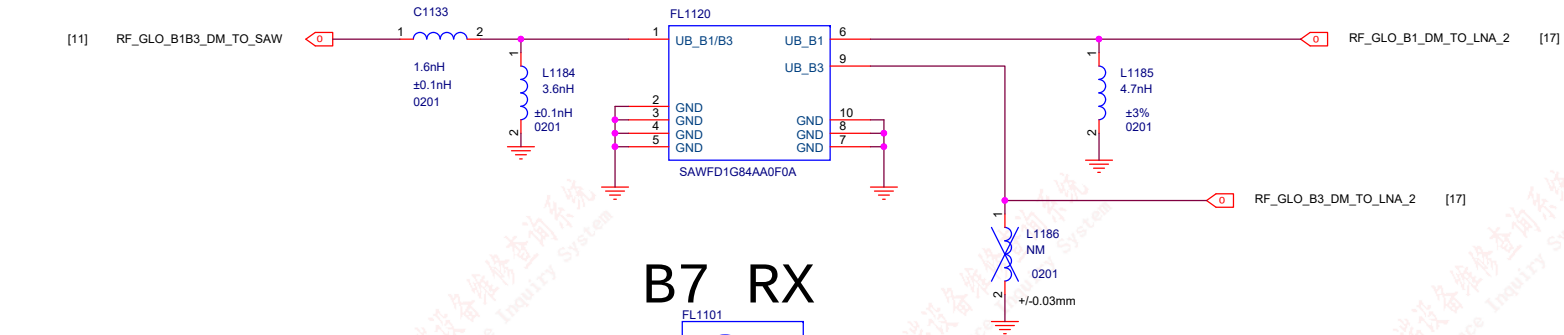


B7 RX

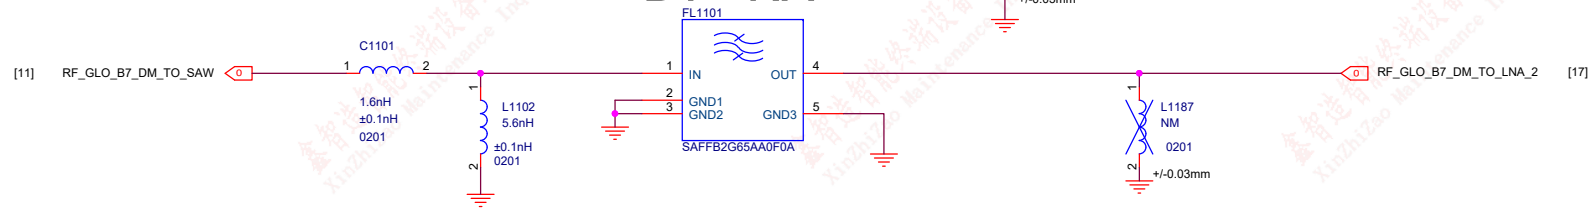


B40 RX

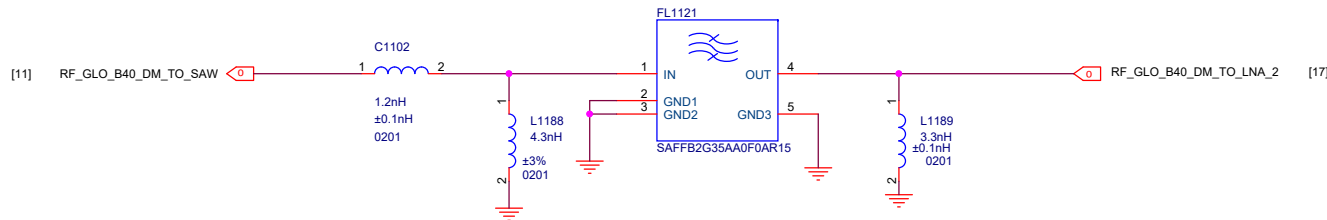



B41 RX

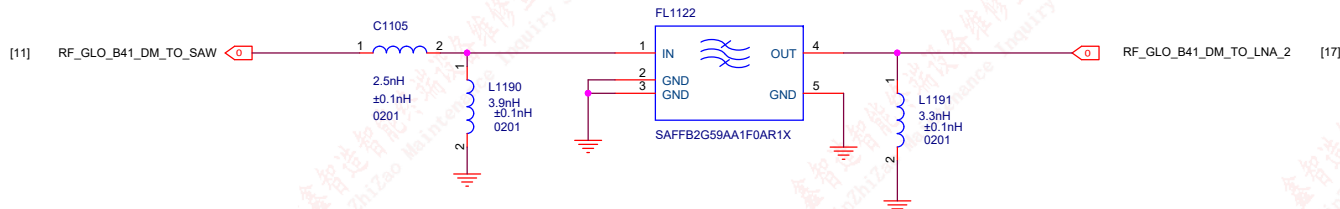




Title			L9D/L19S_MAIN_TEST
Size	Document Number	Rev	
A3	DRX MIMO	P0	
Date:	Thursday, September 08, 2022	Sheet	11 82

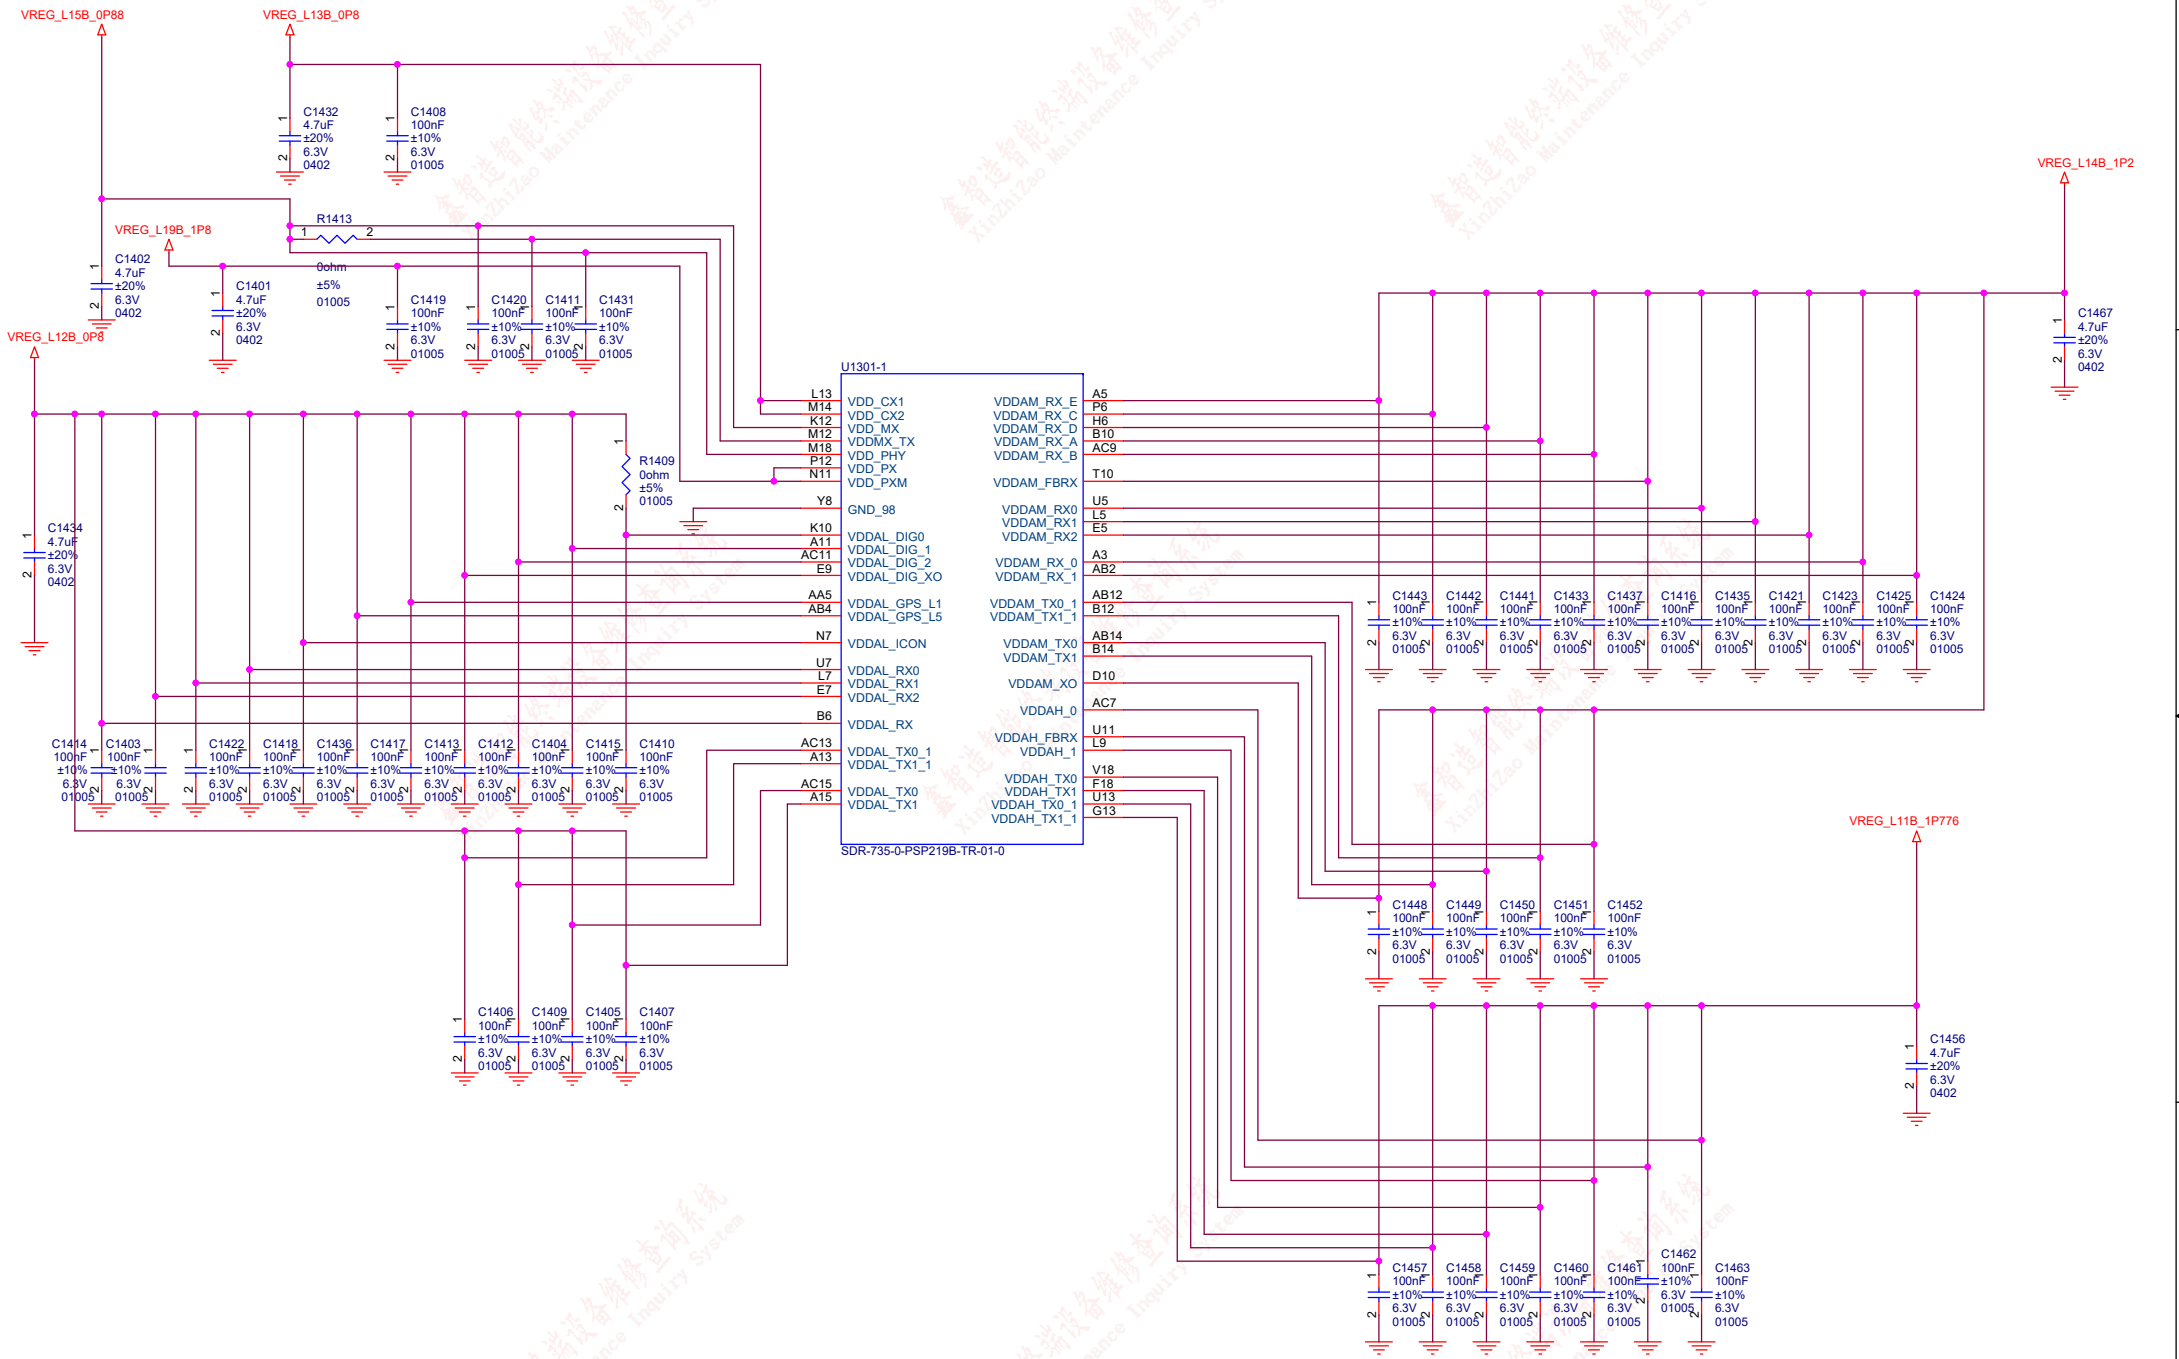


Title		
L9D/L22S_MAIN_TEST		
Size	Document Number	Rev
A3	WTR PWR	P0
Date:	Thursday, September 08, 2022	Sheet 14 82

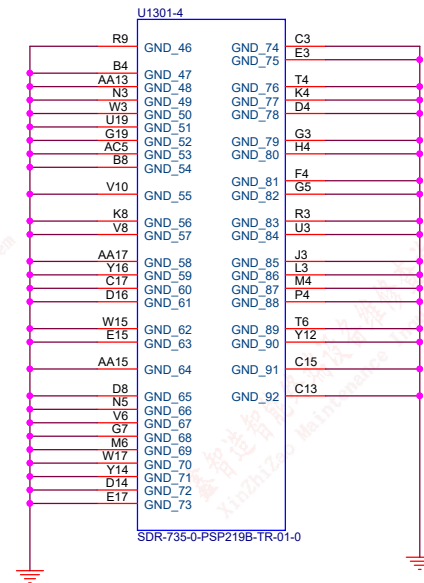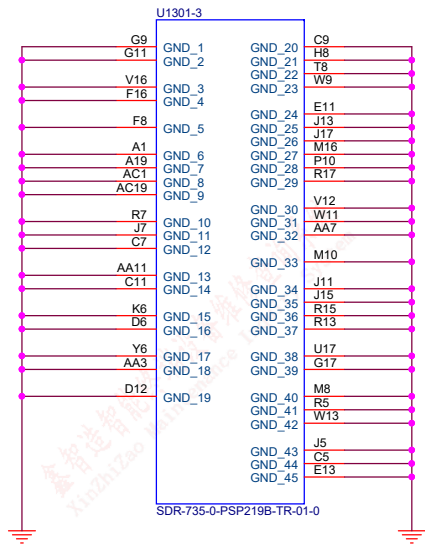


FBRX

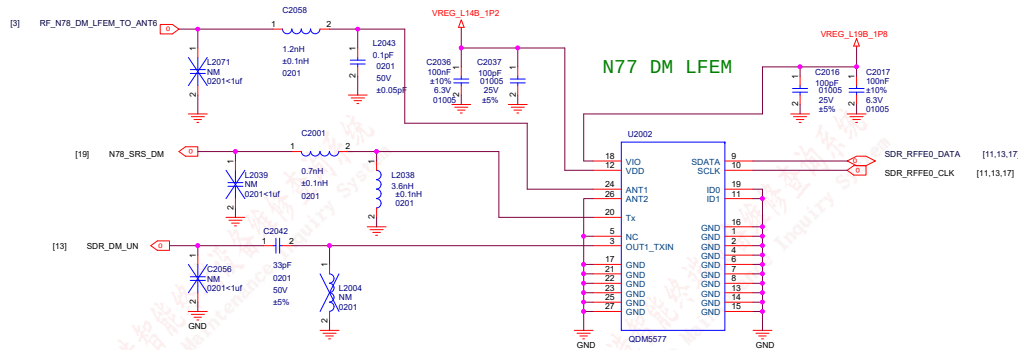
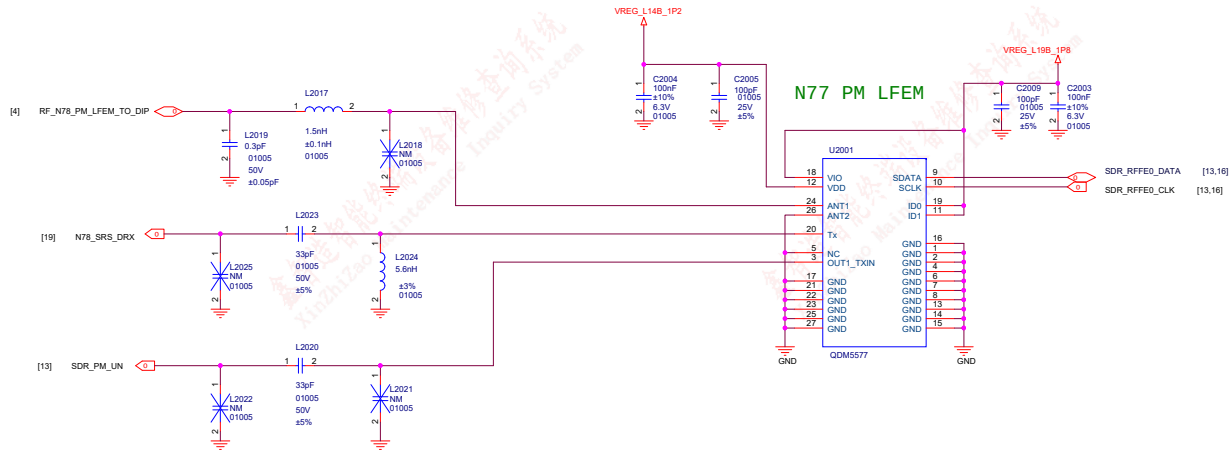
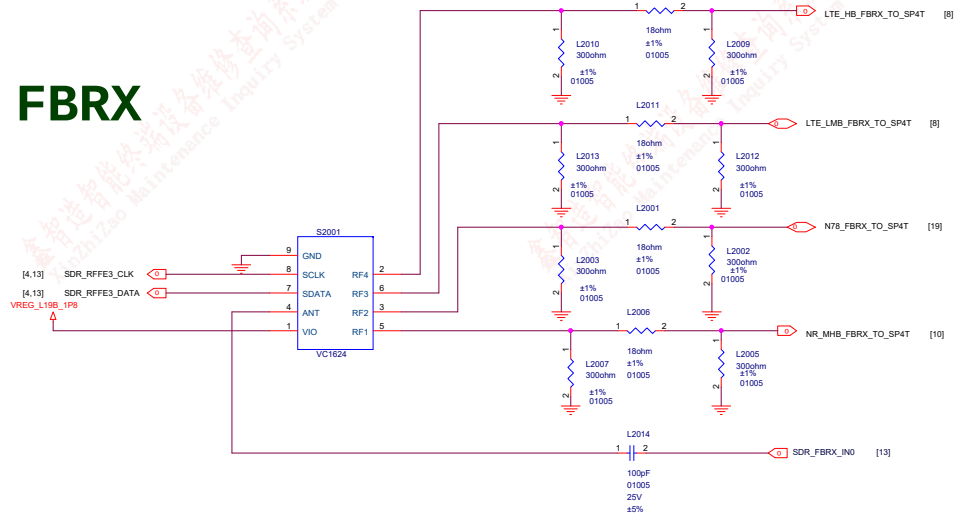


File			L9KM28S_MAIN_TEST
Size	Document Number	Rev	
A2	5G N77 N78 MIMO	P0	
Date	Thursday, September 08, 2022	Sheet	20 of 82

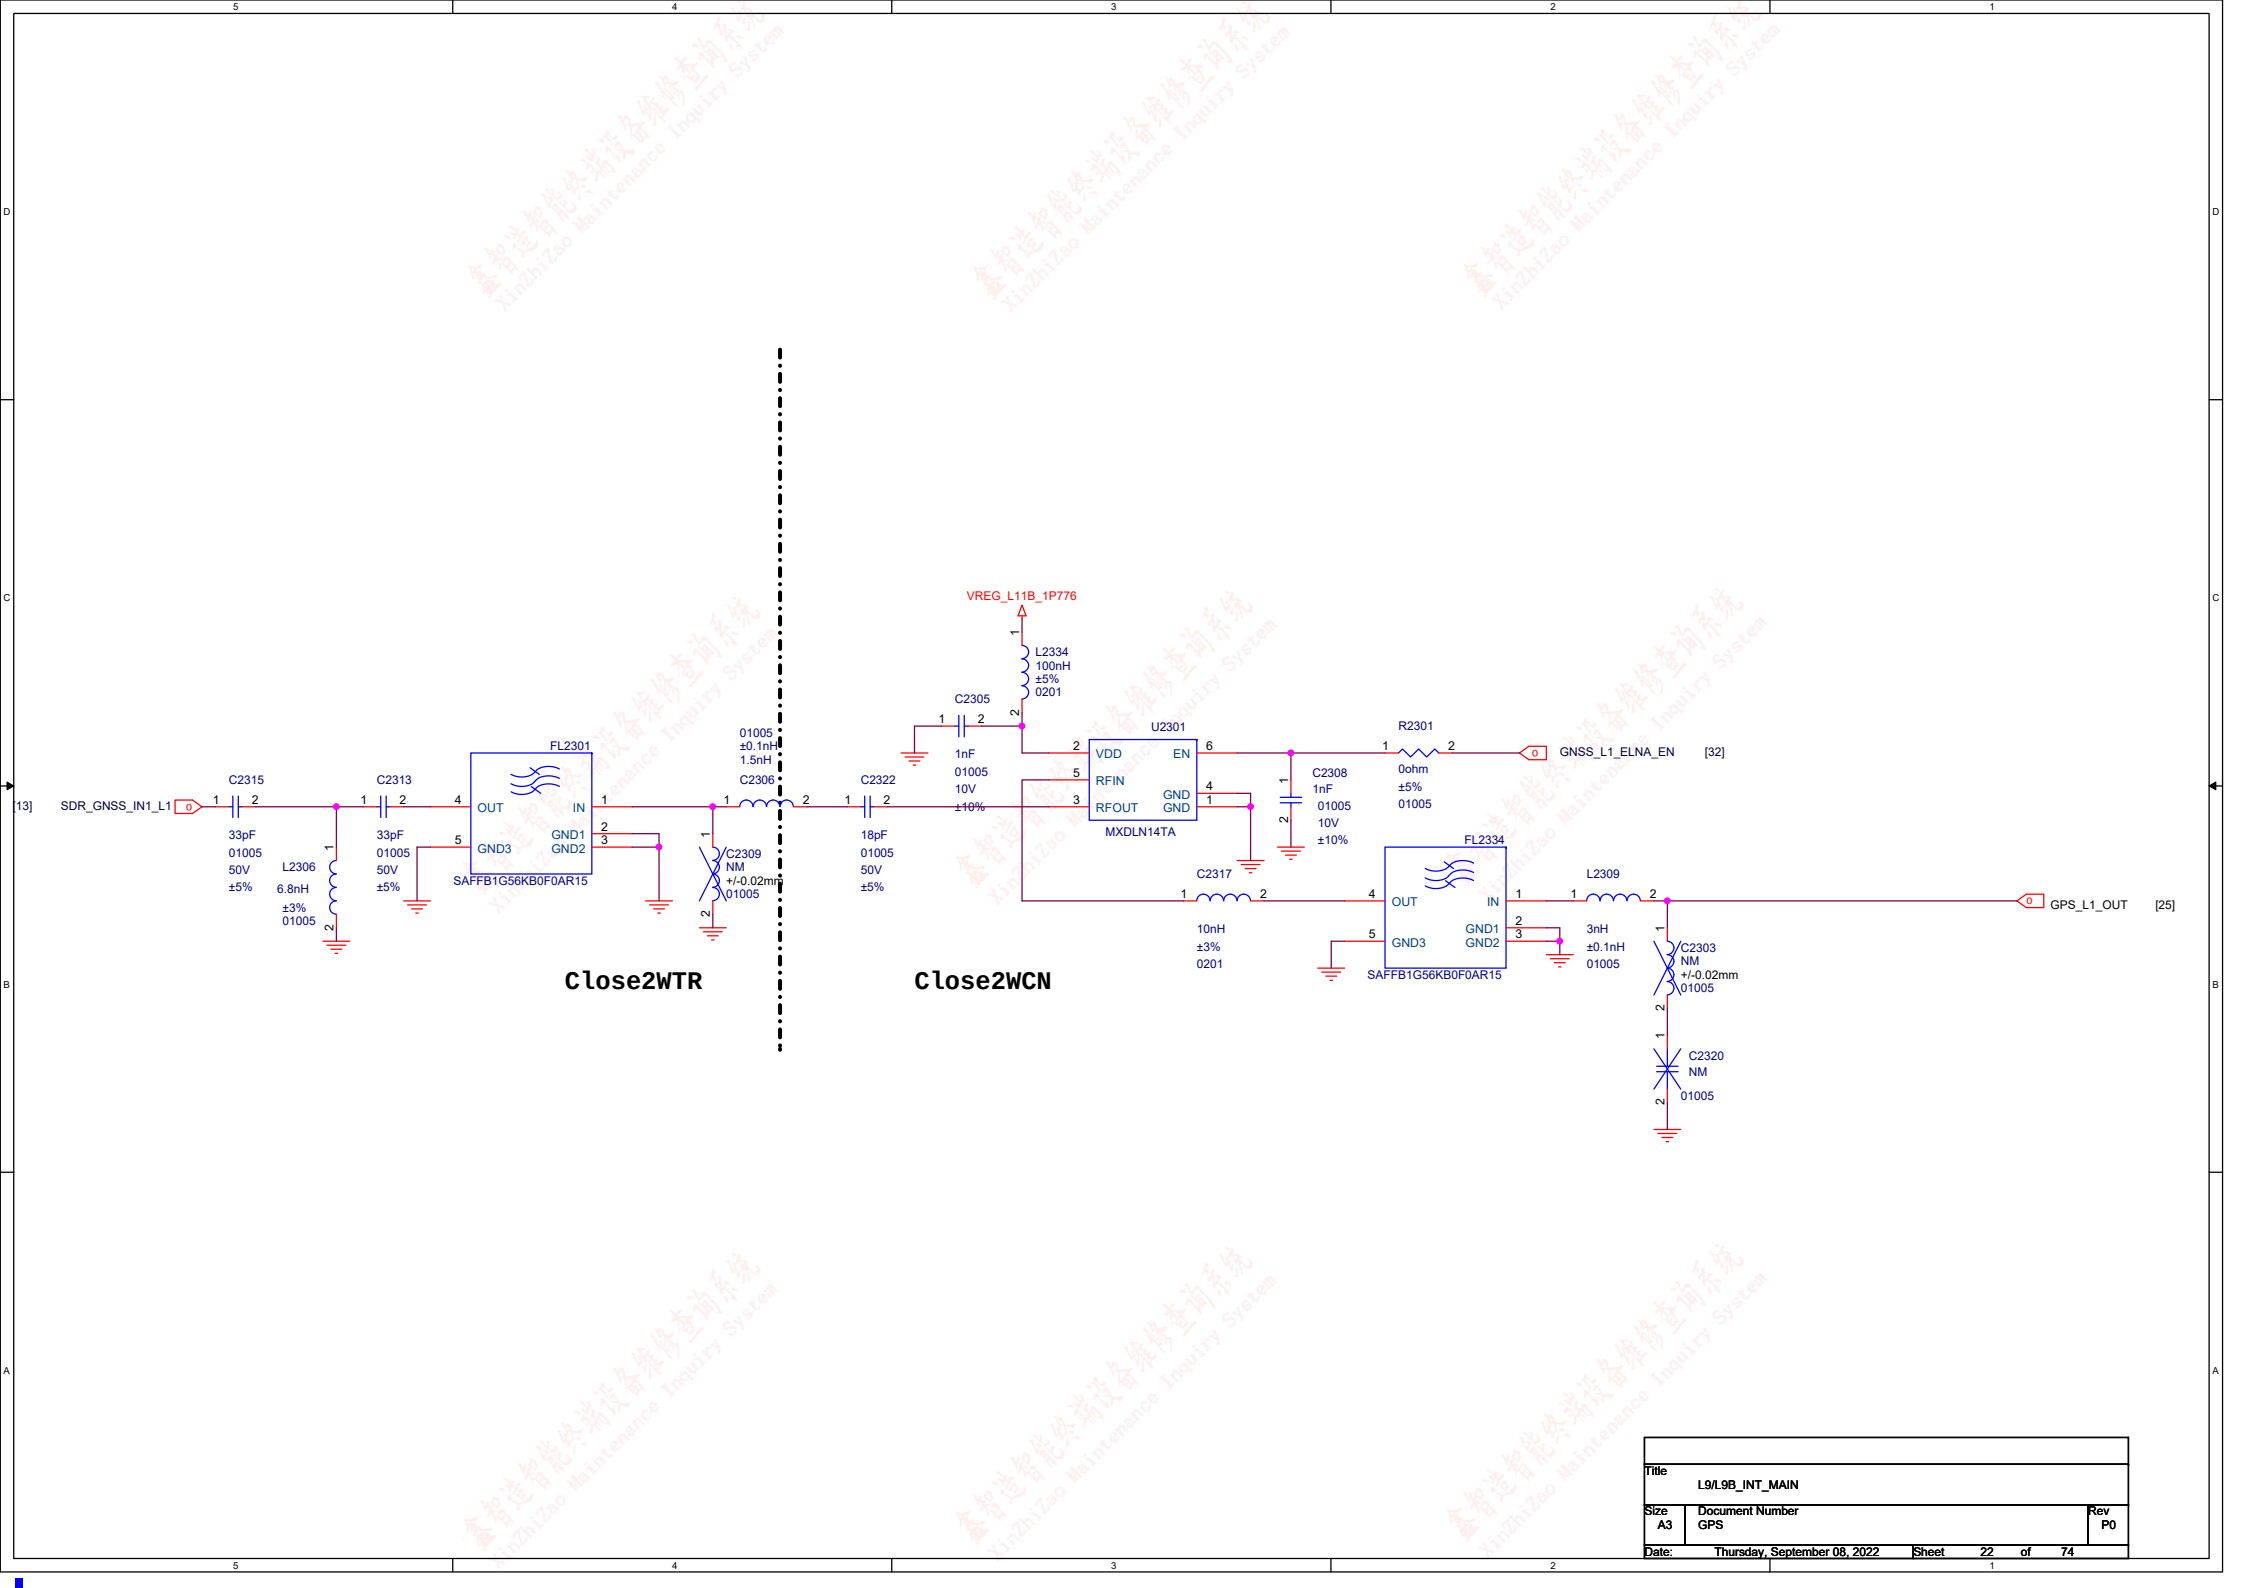


Title		
L9/L9B_INT_MAIN		
Size	Document Number	Rev
A3	GPS	P0
Date:	Thursday, September 08, 2022	Sheet 22 of 74

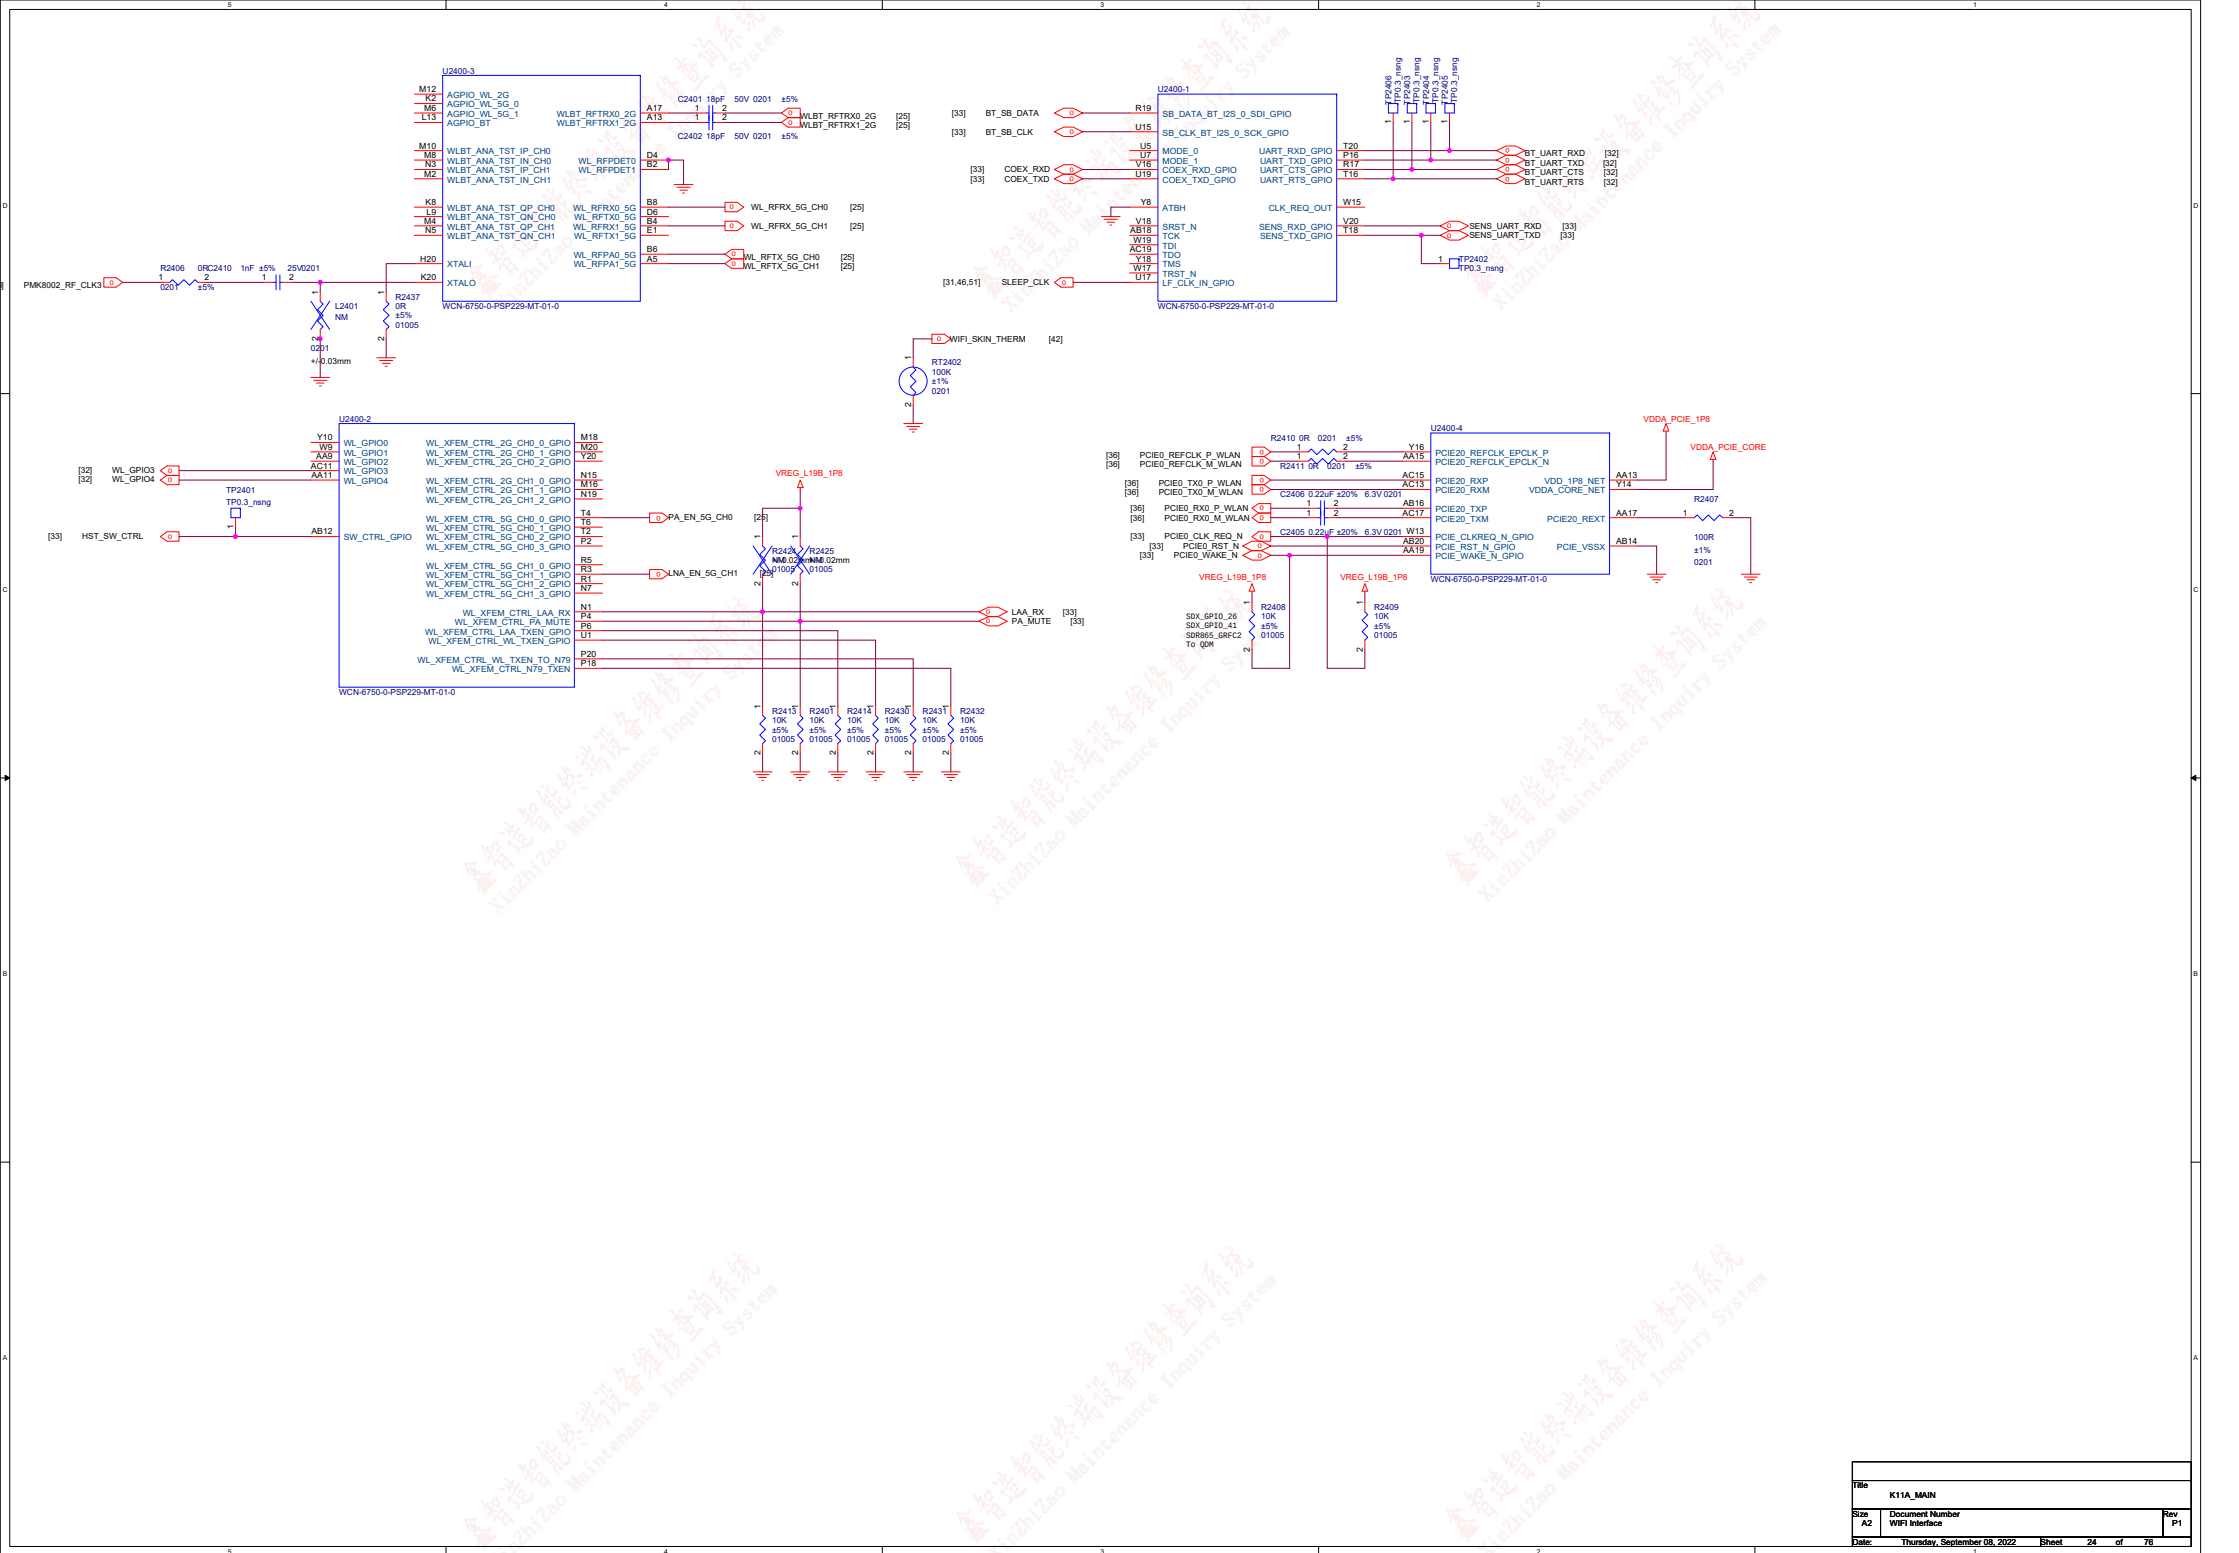


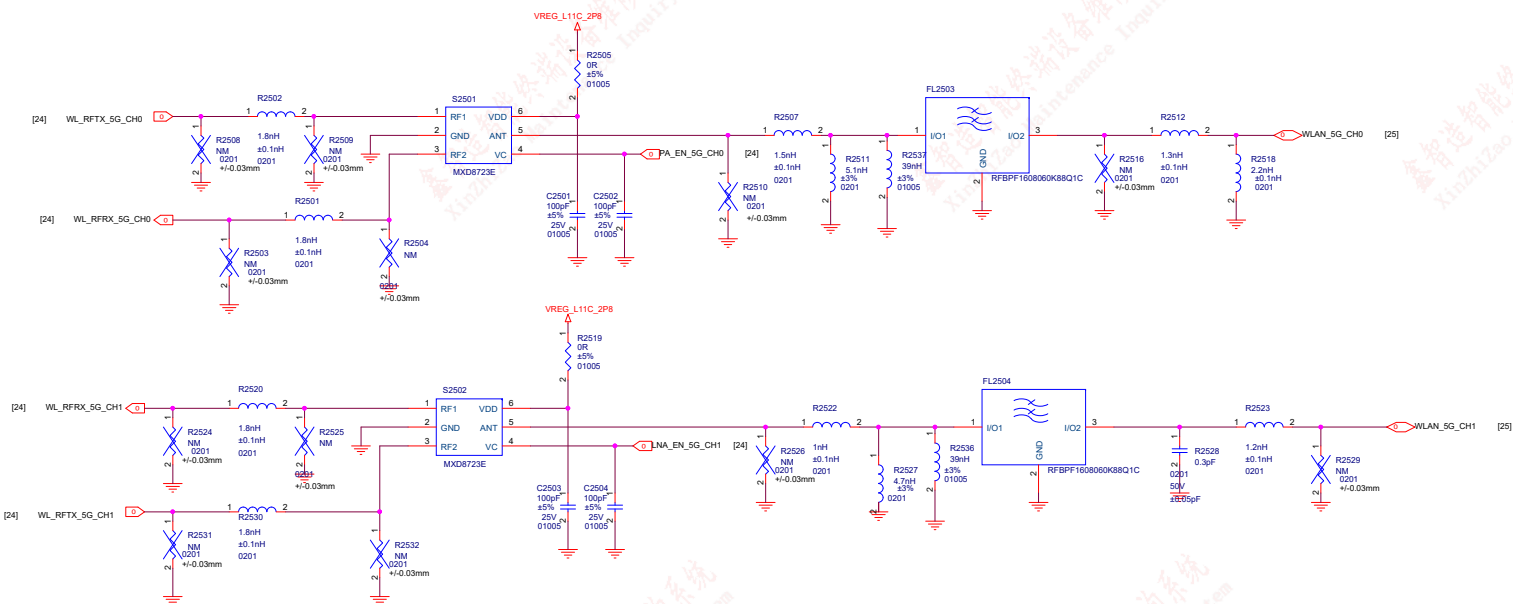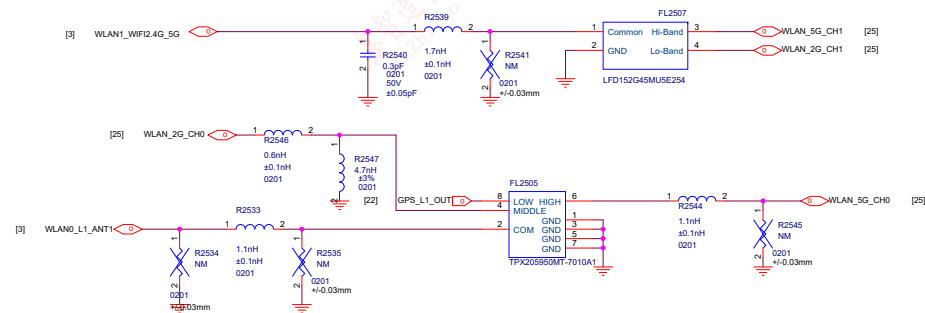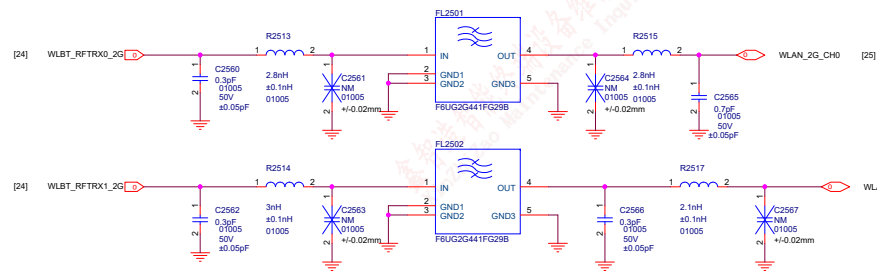

Title			K11A_MAIN
Size	Document Number	Rev	
A2	Reserved(for 11ad11ax)	P1	
Date:	Thursday, September 08, 2022	Sheet	26 of 76




Note: Add a placeholder cap to RESIN_N pin of SM7325 meeting its max transition (rise/fall) time of 200 ns

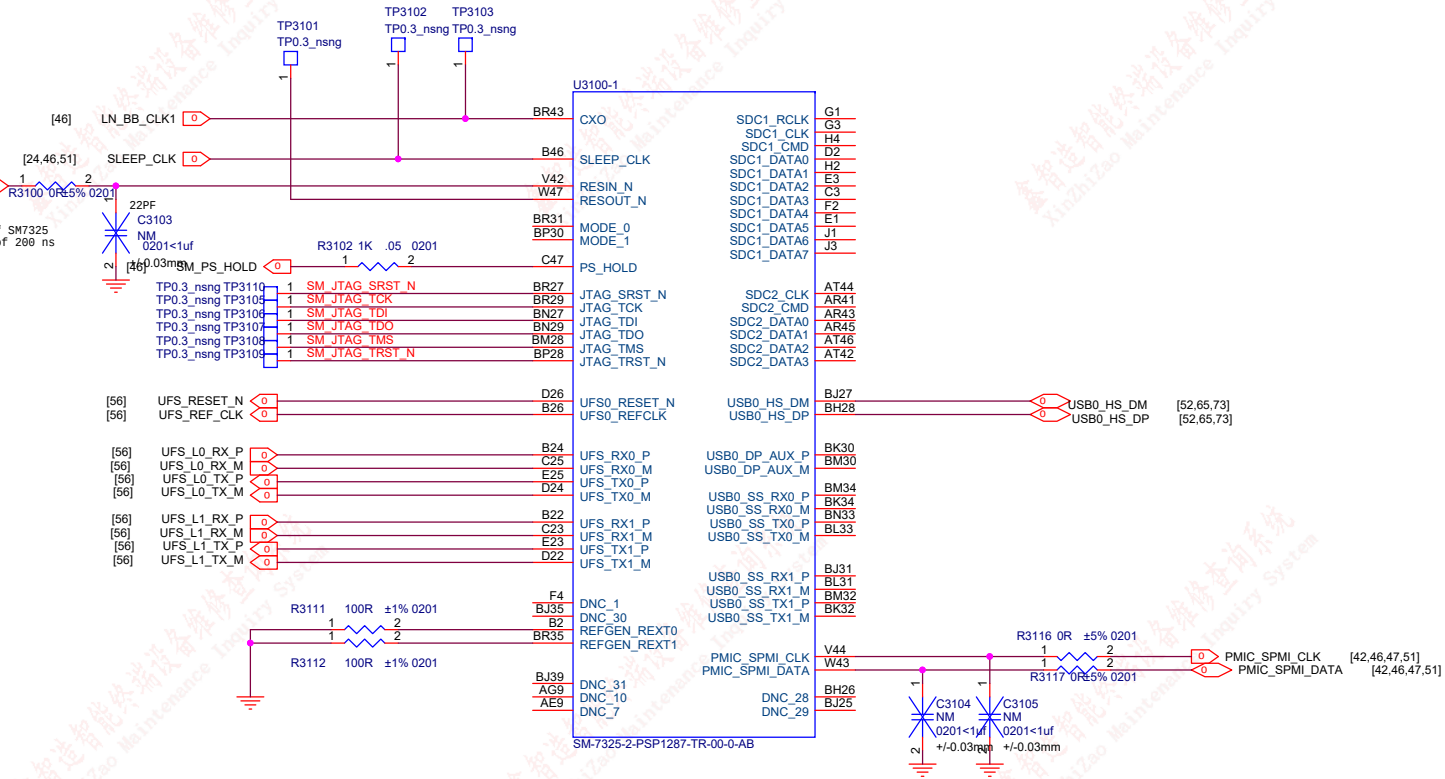


CAD Note: Place the resistors connected to the REXT pins near to MSM and route away from noisy signals.
 CAD Note: SM_RESIN_N and SM_RESOUT_N signals are to be routed as sensitive signals, away from noise sources/high speed signals.
 CAD Note: Route the SPMI signals in Daisy Chain/Start routing from MSM to the PMICS to avoid stub













MSM skin temperature thermistor





Quiet thermistor Place on a cool place



Title		
L9/L9B_INT_MAIN		
Size	Document Number	Rev
A3	SM8350 Control	P0
Date:	Thursday, September 08, 2022	Sheet 31 of 74

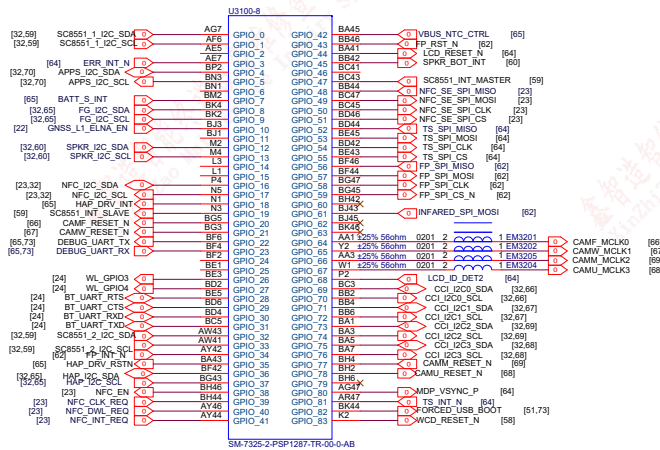


GPIO_118	BOOT_CONFIG(0)	WD0G_DISABLE
GPIO_120	BOOT_CONFIG(1)	FASTBOOT_SEL(0)
GPIO_122	BOOT_CONFIG(2)	FASTBOOT_SEL(1)
GPIO_124	BOOT_CONFIG(3)	FASTBOOT_SEL(2)
GPIO_82	N/A	FORCE_USB_BOOT
GPIO_139		FORCED_USB_BOOT_SELECT

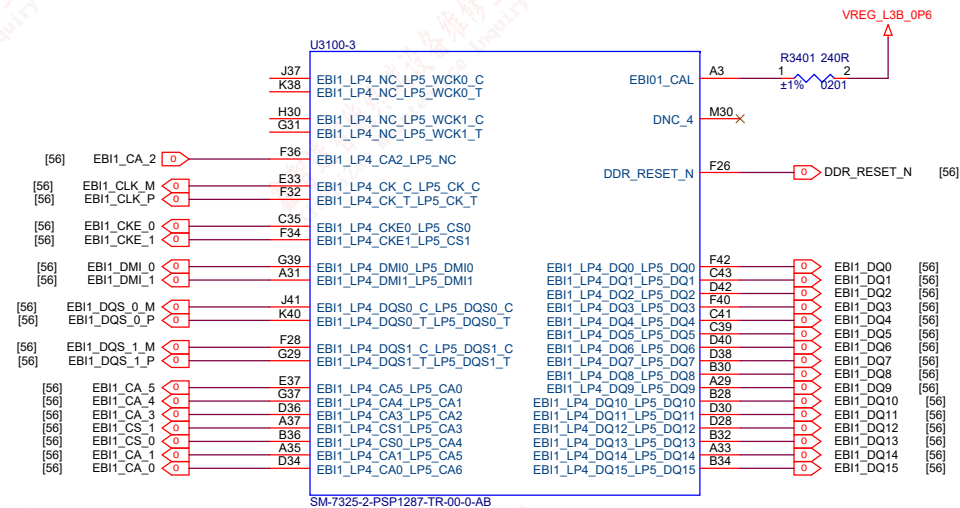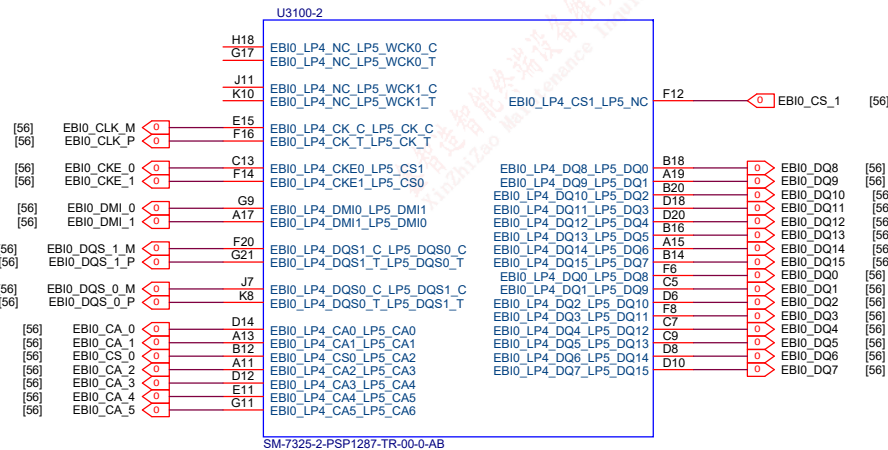


Front

Wide



Macro


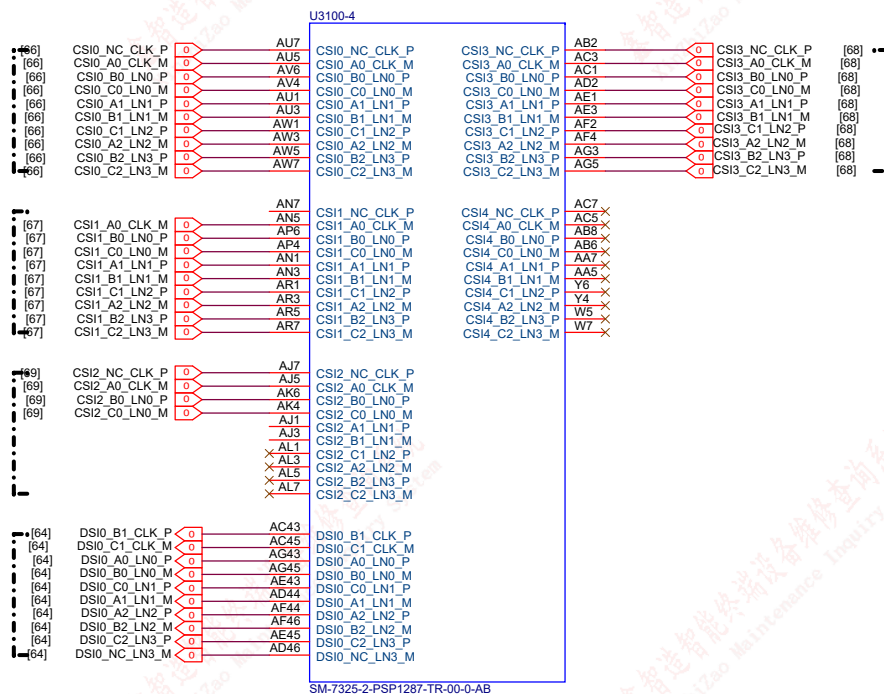



utra









Title			L9/L9B_INT_MAIN
Size	Document Number	Rev	
A3	SDM855 MPI1	P0	
Date:	Thursday, September 08, 2022	Sheet	34 of 74

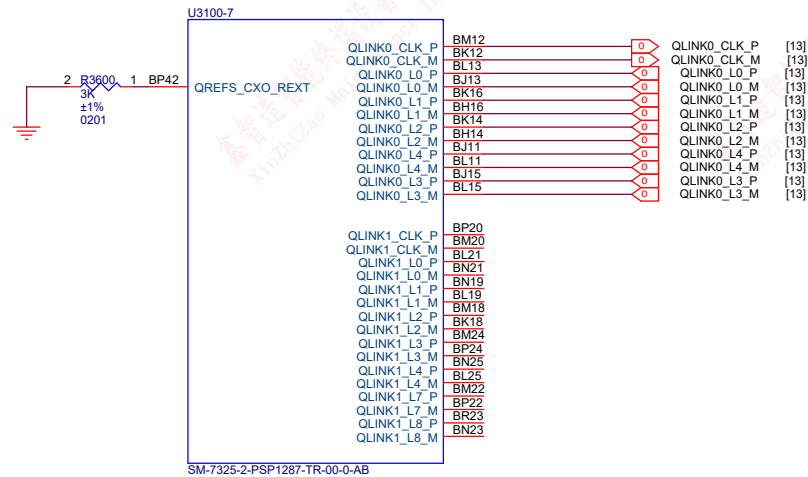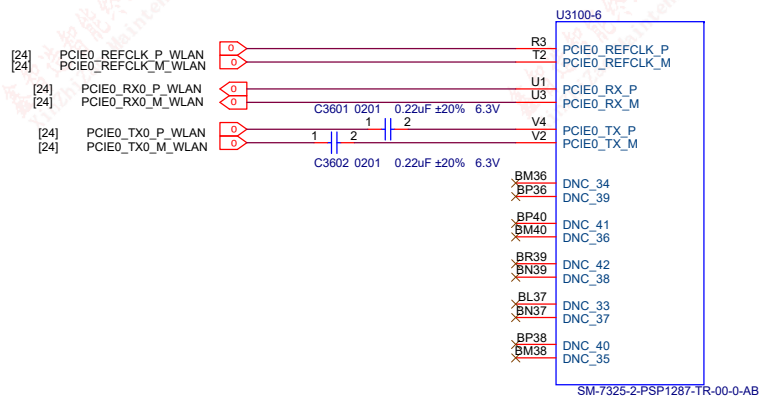


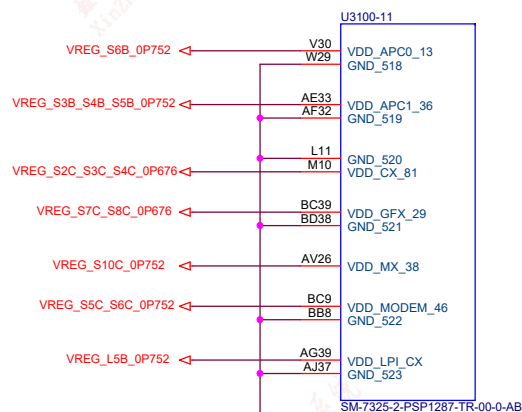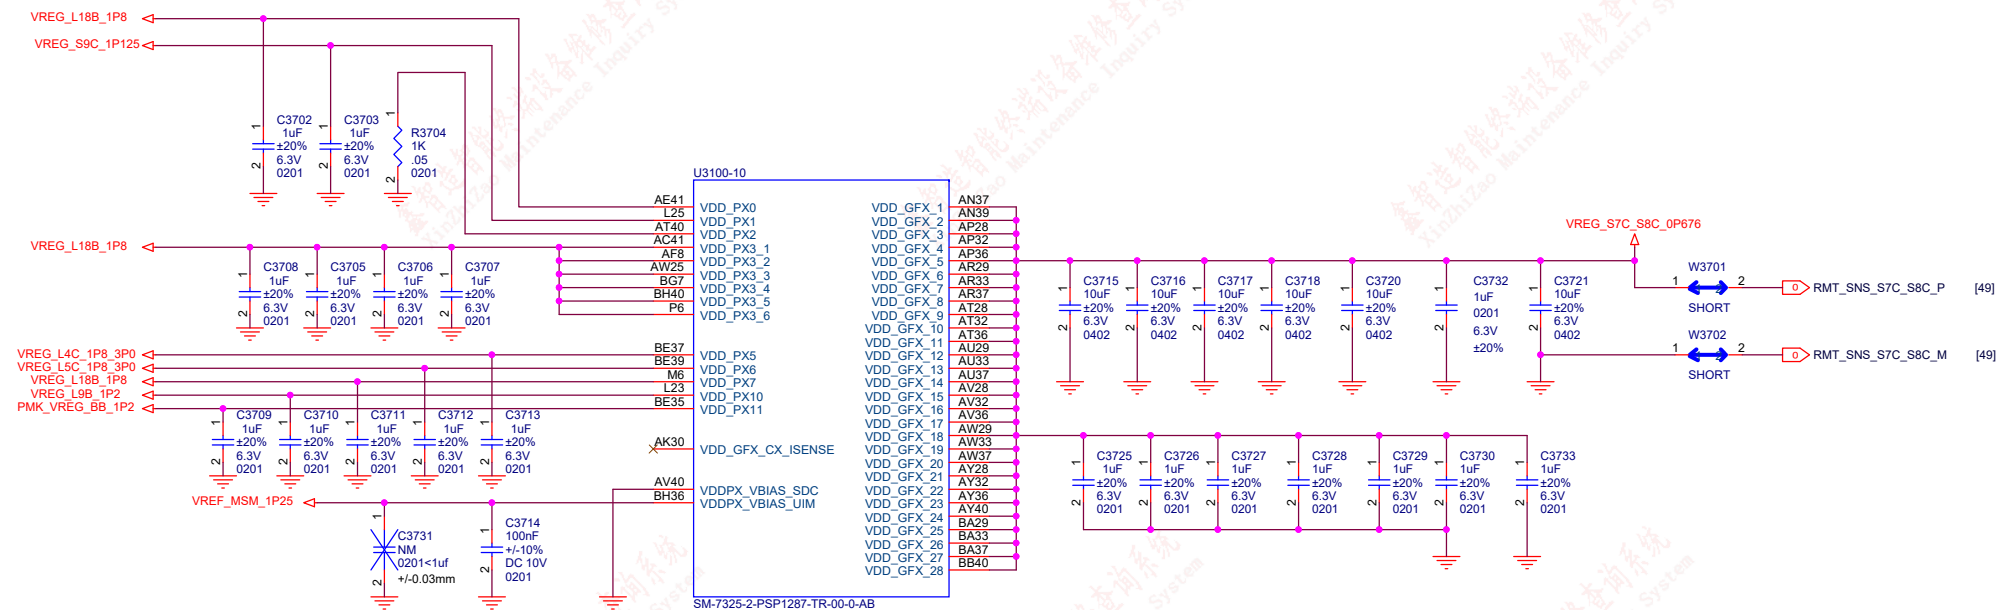

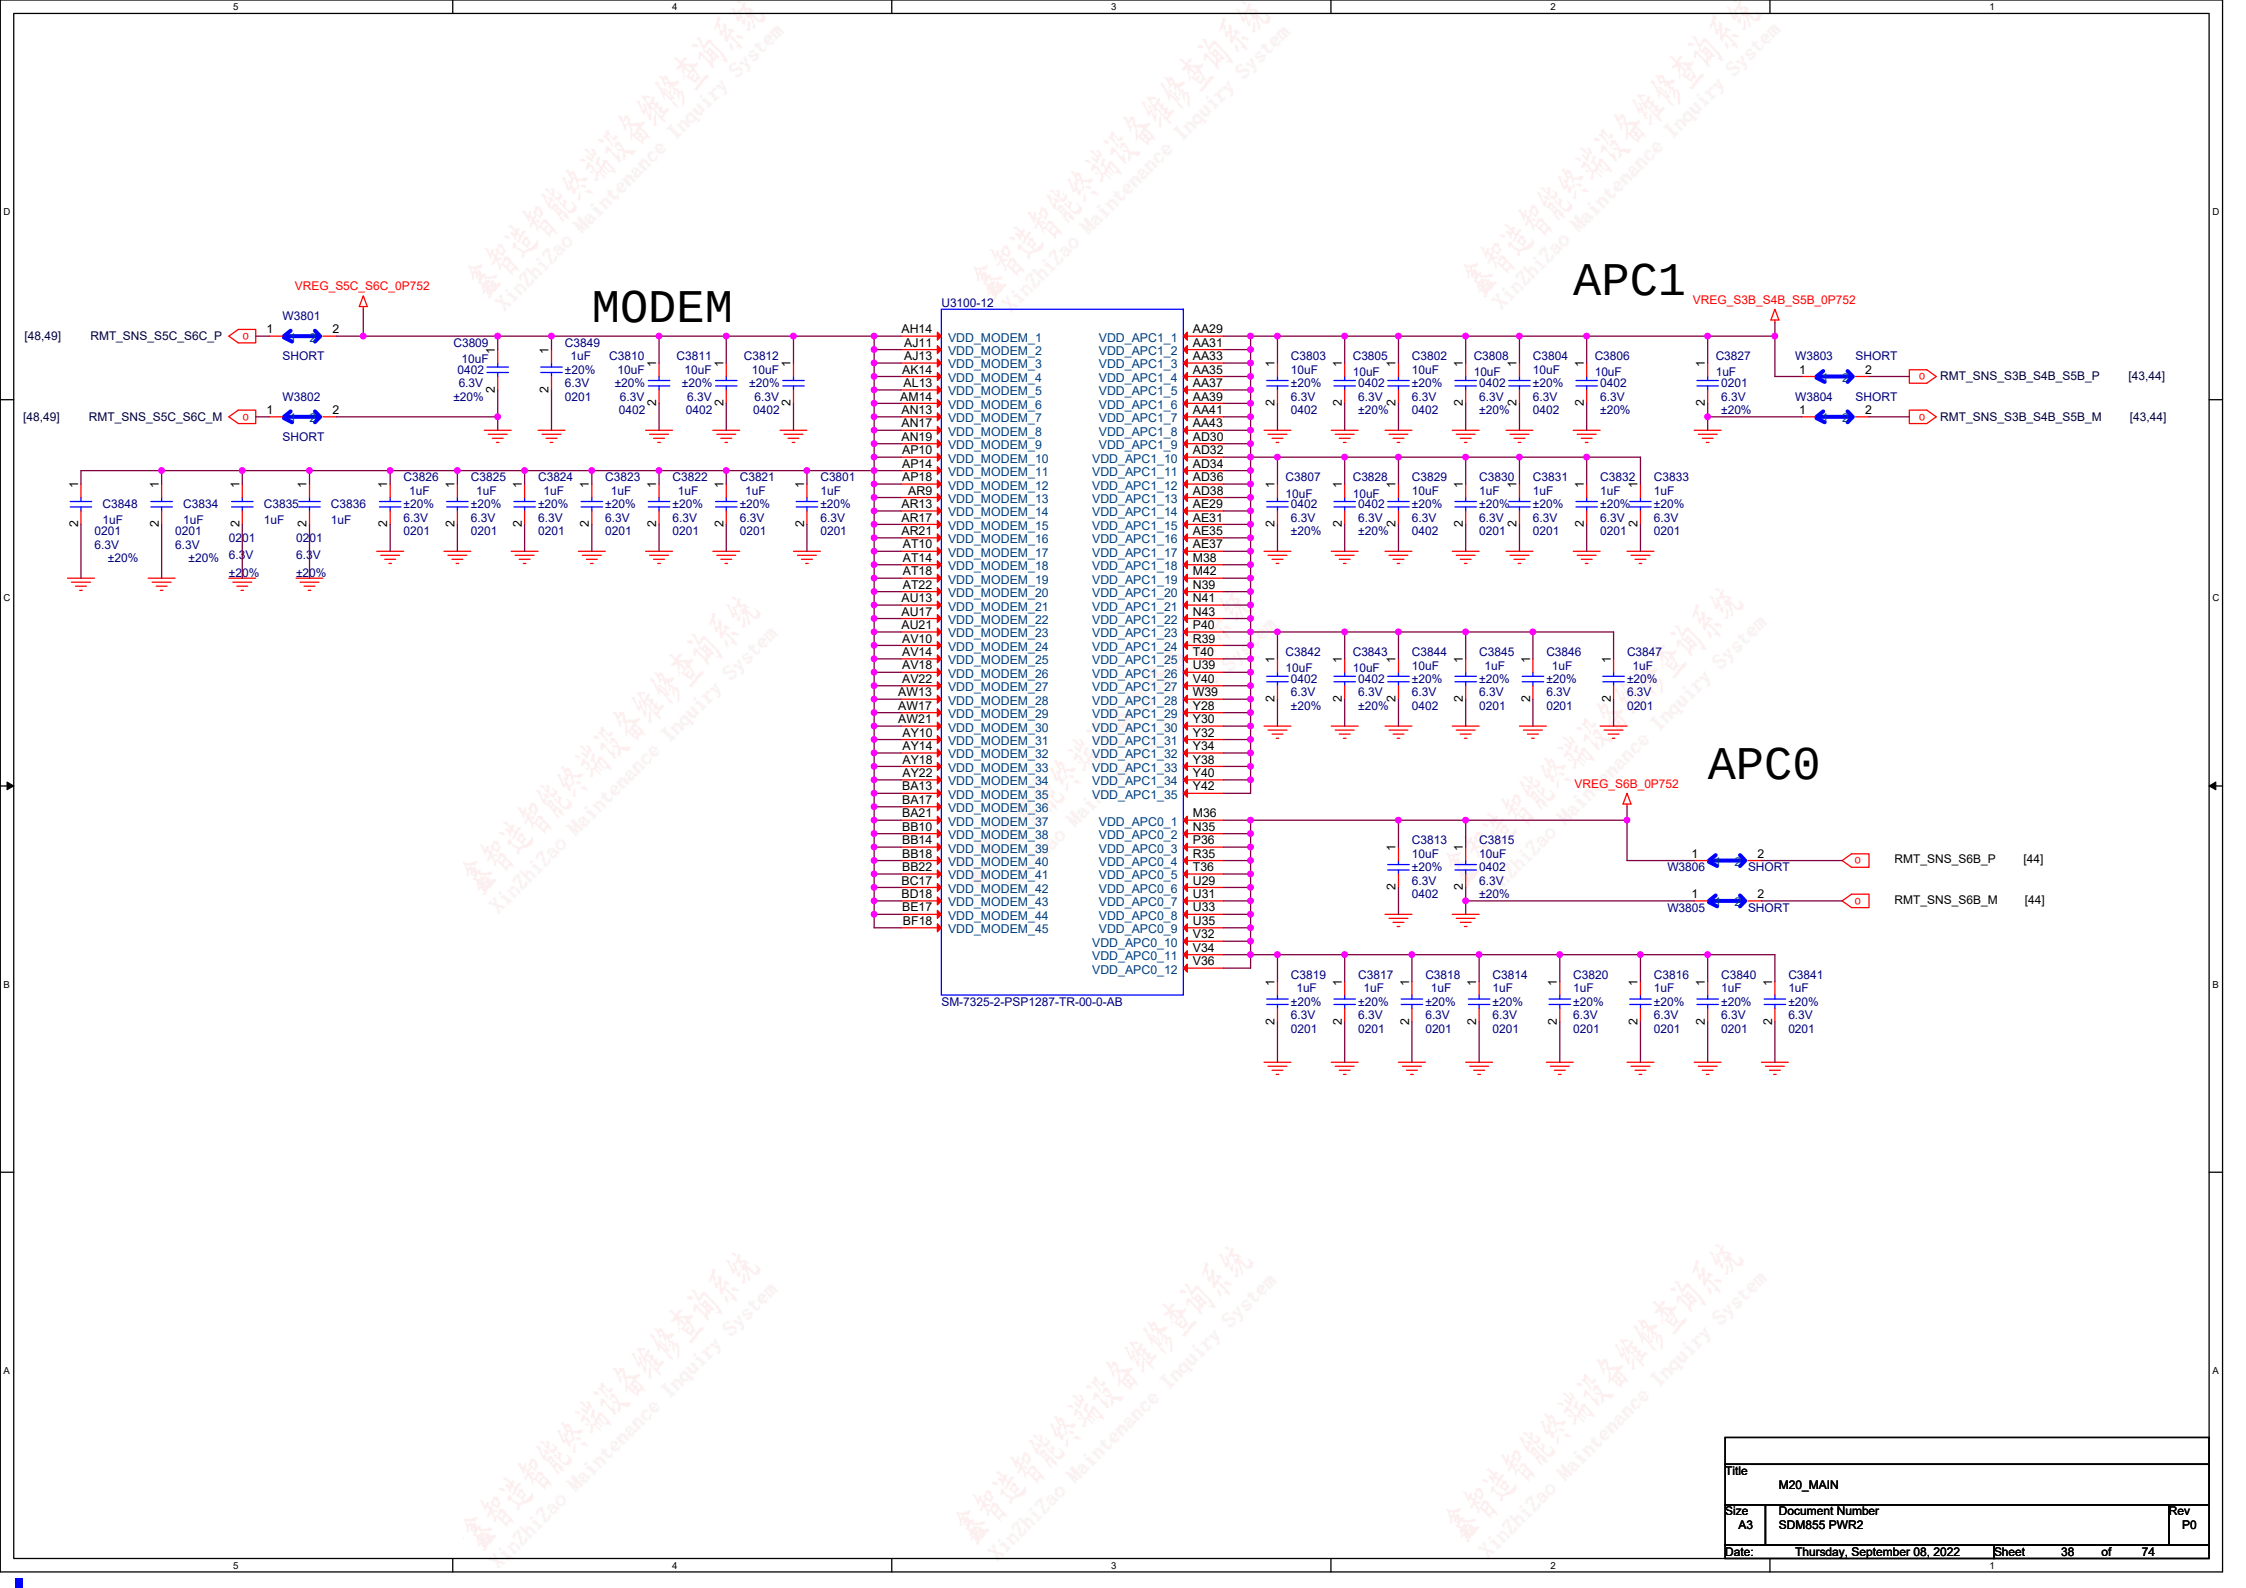


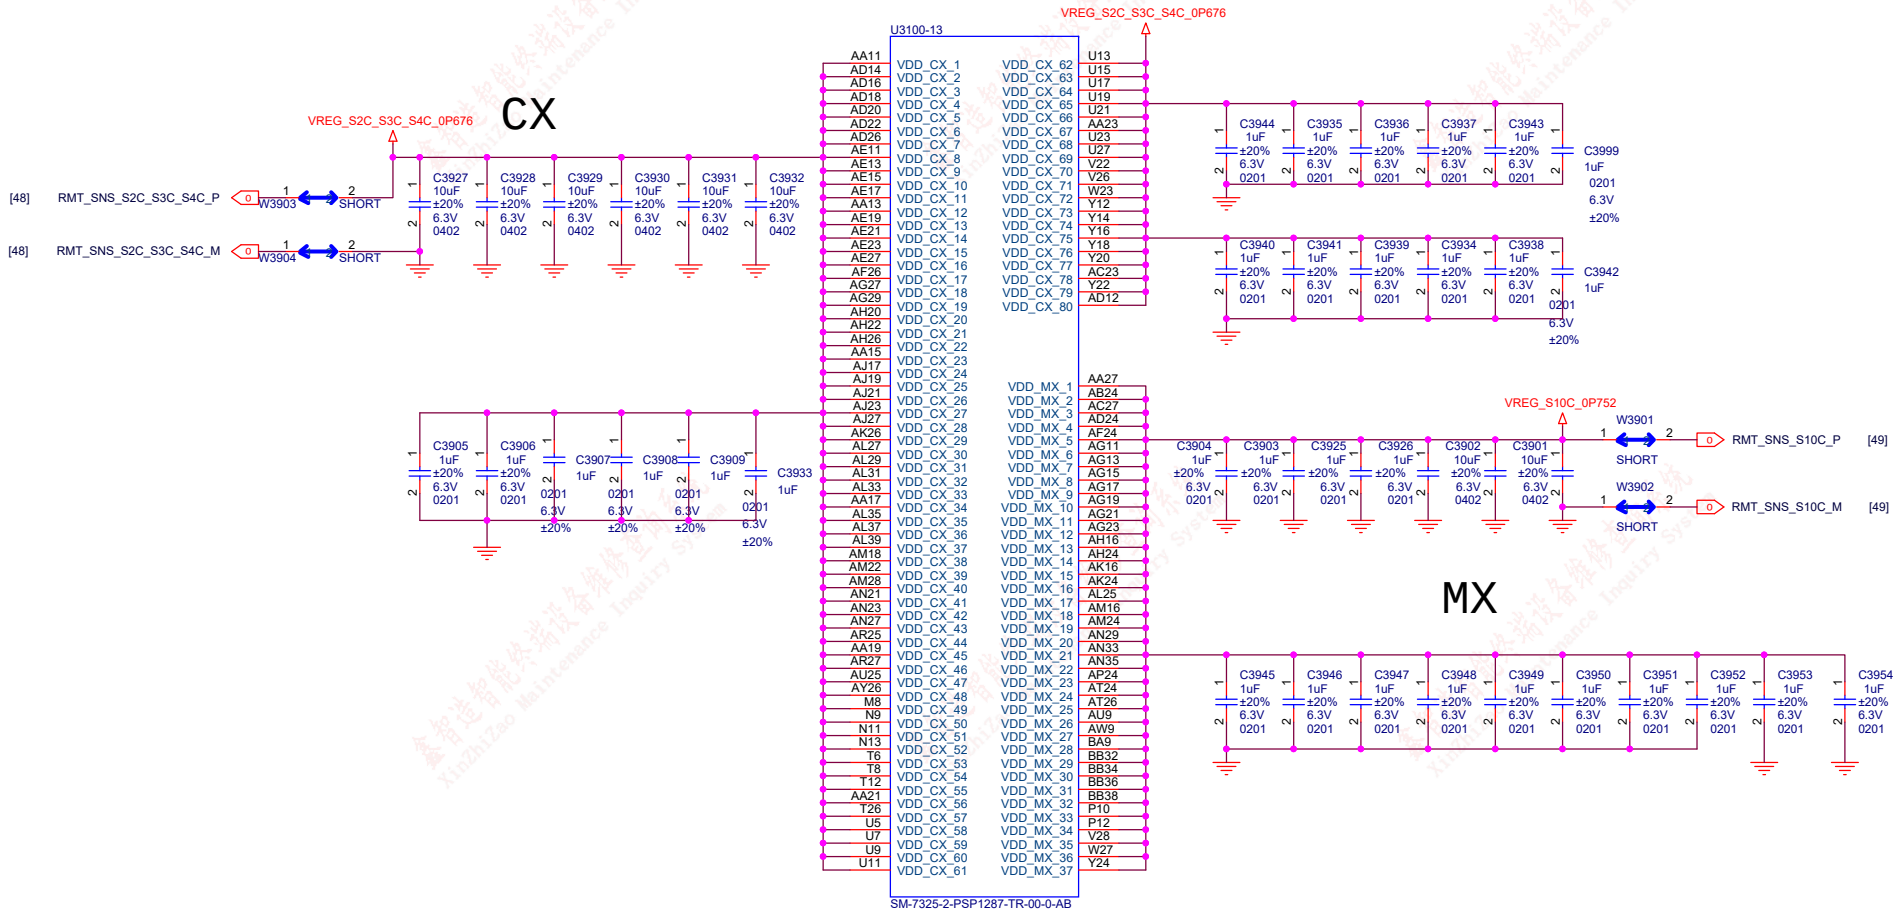

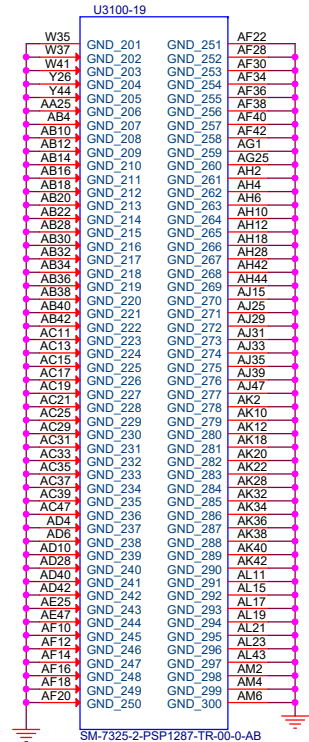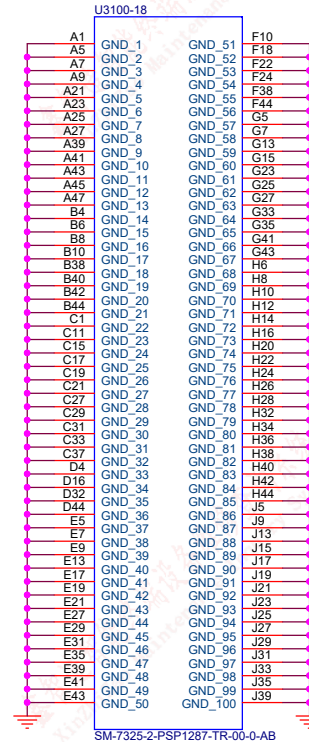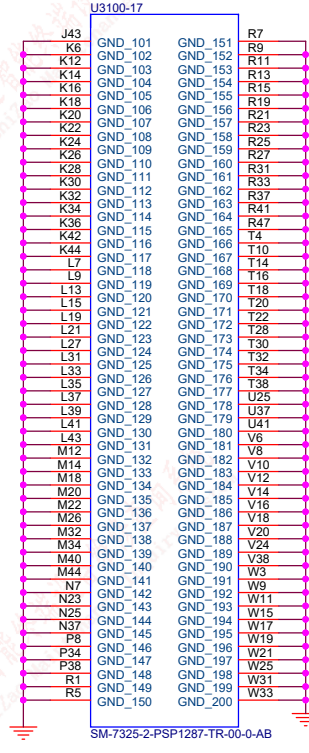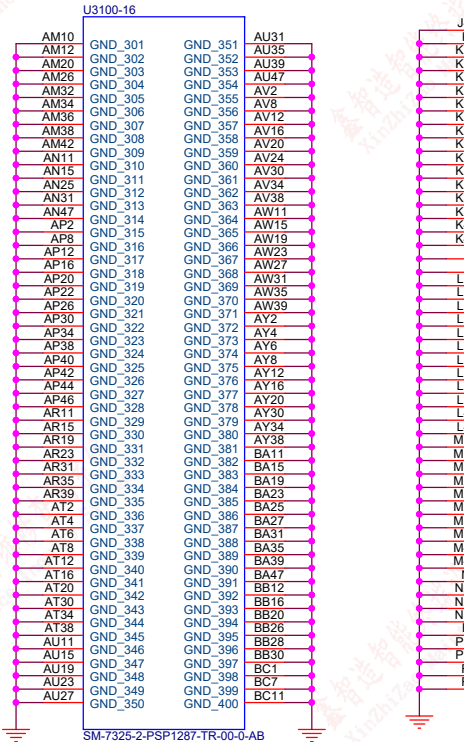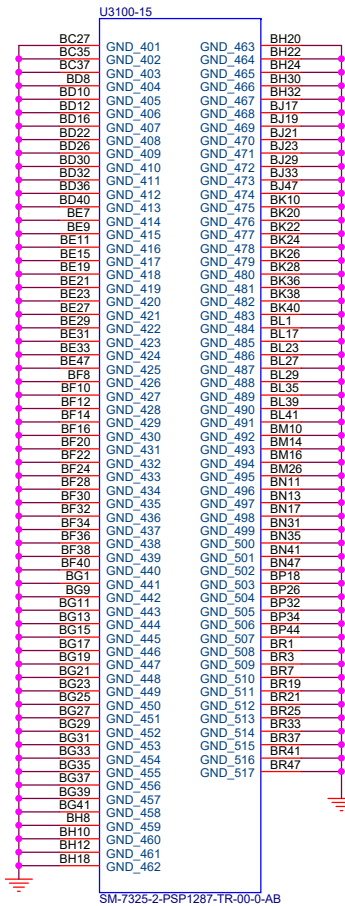

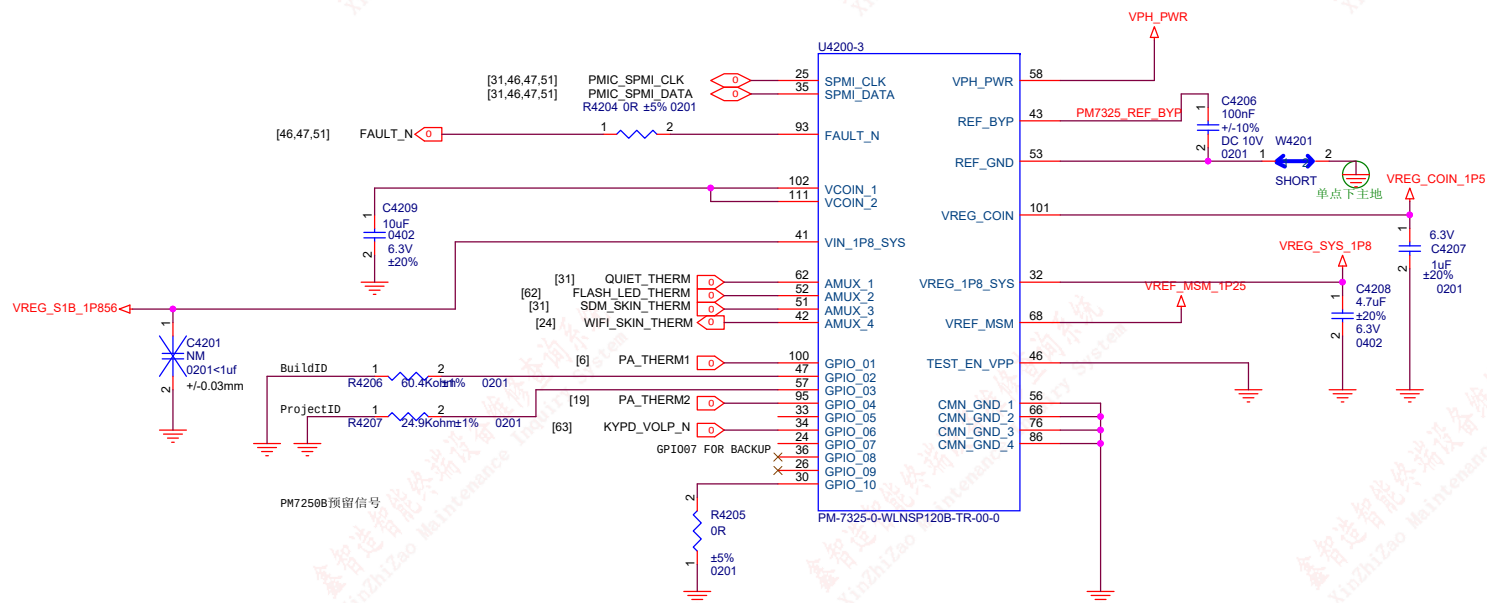


Title		
M20_MAIN		
Size	Document Number	Rev
A3	PM855 XO&CTRL	P0
Date:	Thursday, September 08, 2022	Sheet 42 74

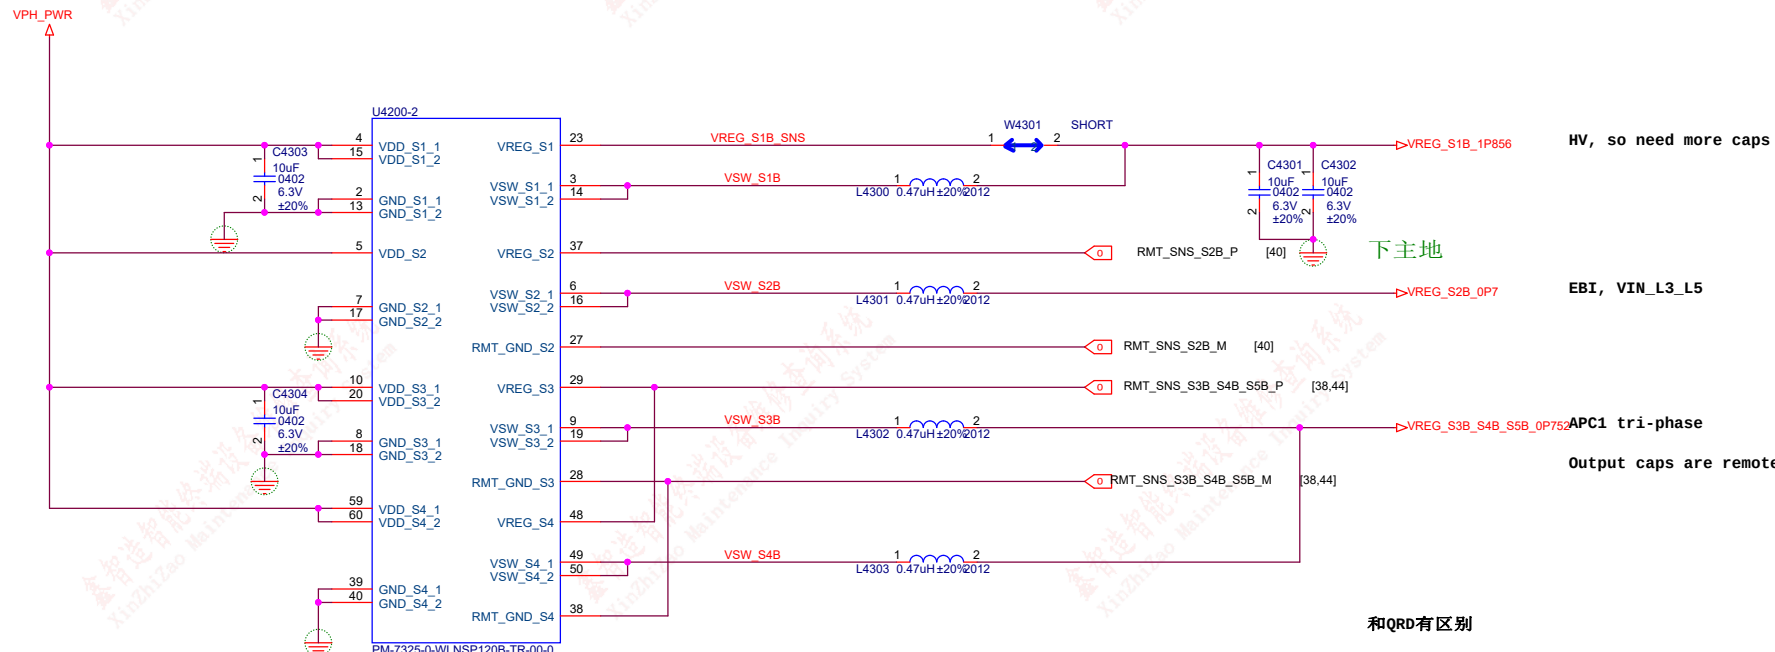

VDD_Sx pin 单个过孔下主VPH平面
buck输入电容两个过孔到主VPH平面

GND_Sx pin下主地


Title		
M20_MAIN		
Size	Document Number	Rev
A3	PM855 BUCK CONVERTER1	P0
Date:	Thursday, September 08, 2022	Sheet 43

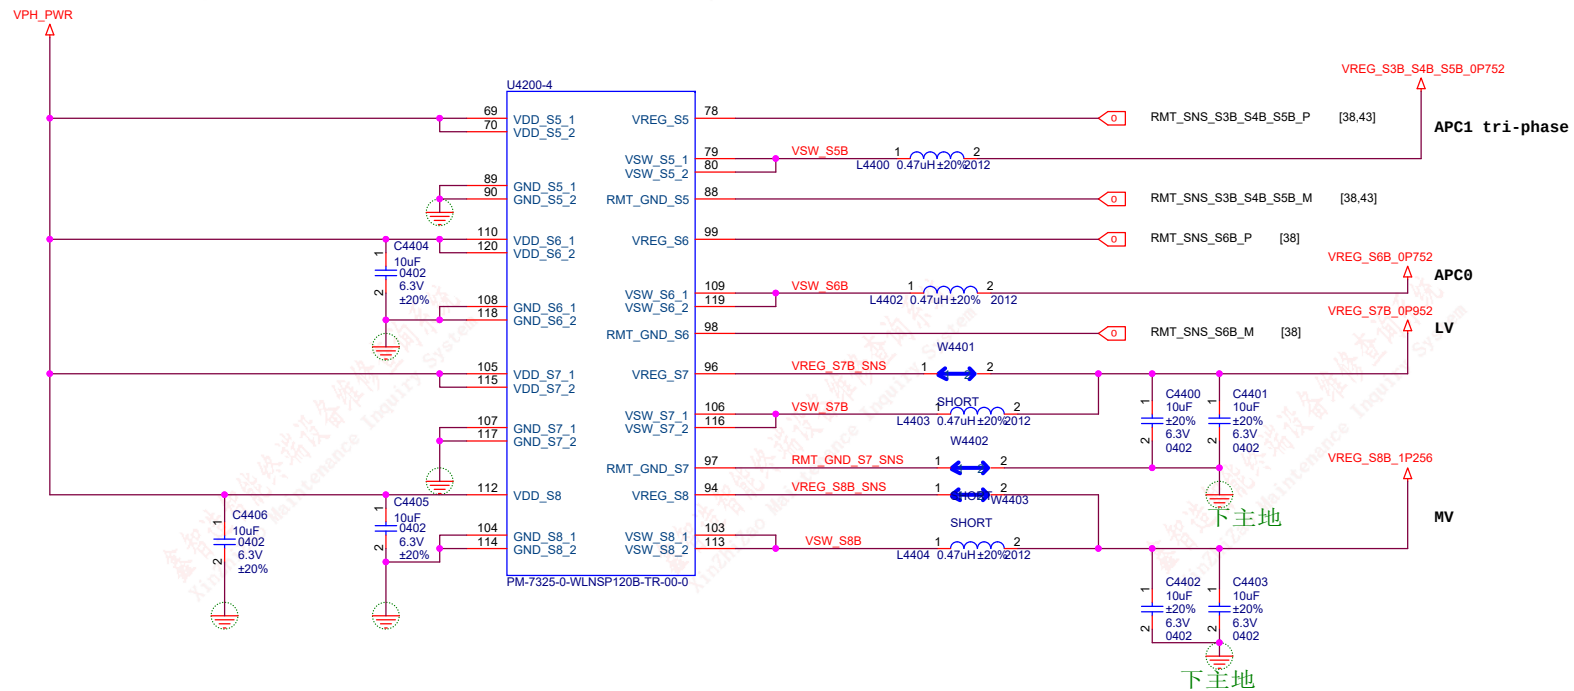



VDD_Sx pin 单个过孔下主VPH平面
buck输入电容两个过孔到主VPH平面

GND_Sx pin下主地


Title		
M20_MAIN		
Size	Document Number	Rev
A3	PM855 BUCK CONVERTER2	P0
Date:	Thursday, September 08, 2022	Sheet 44 of 74

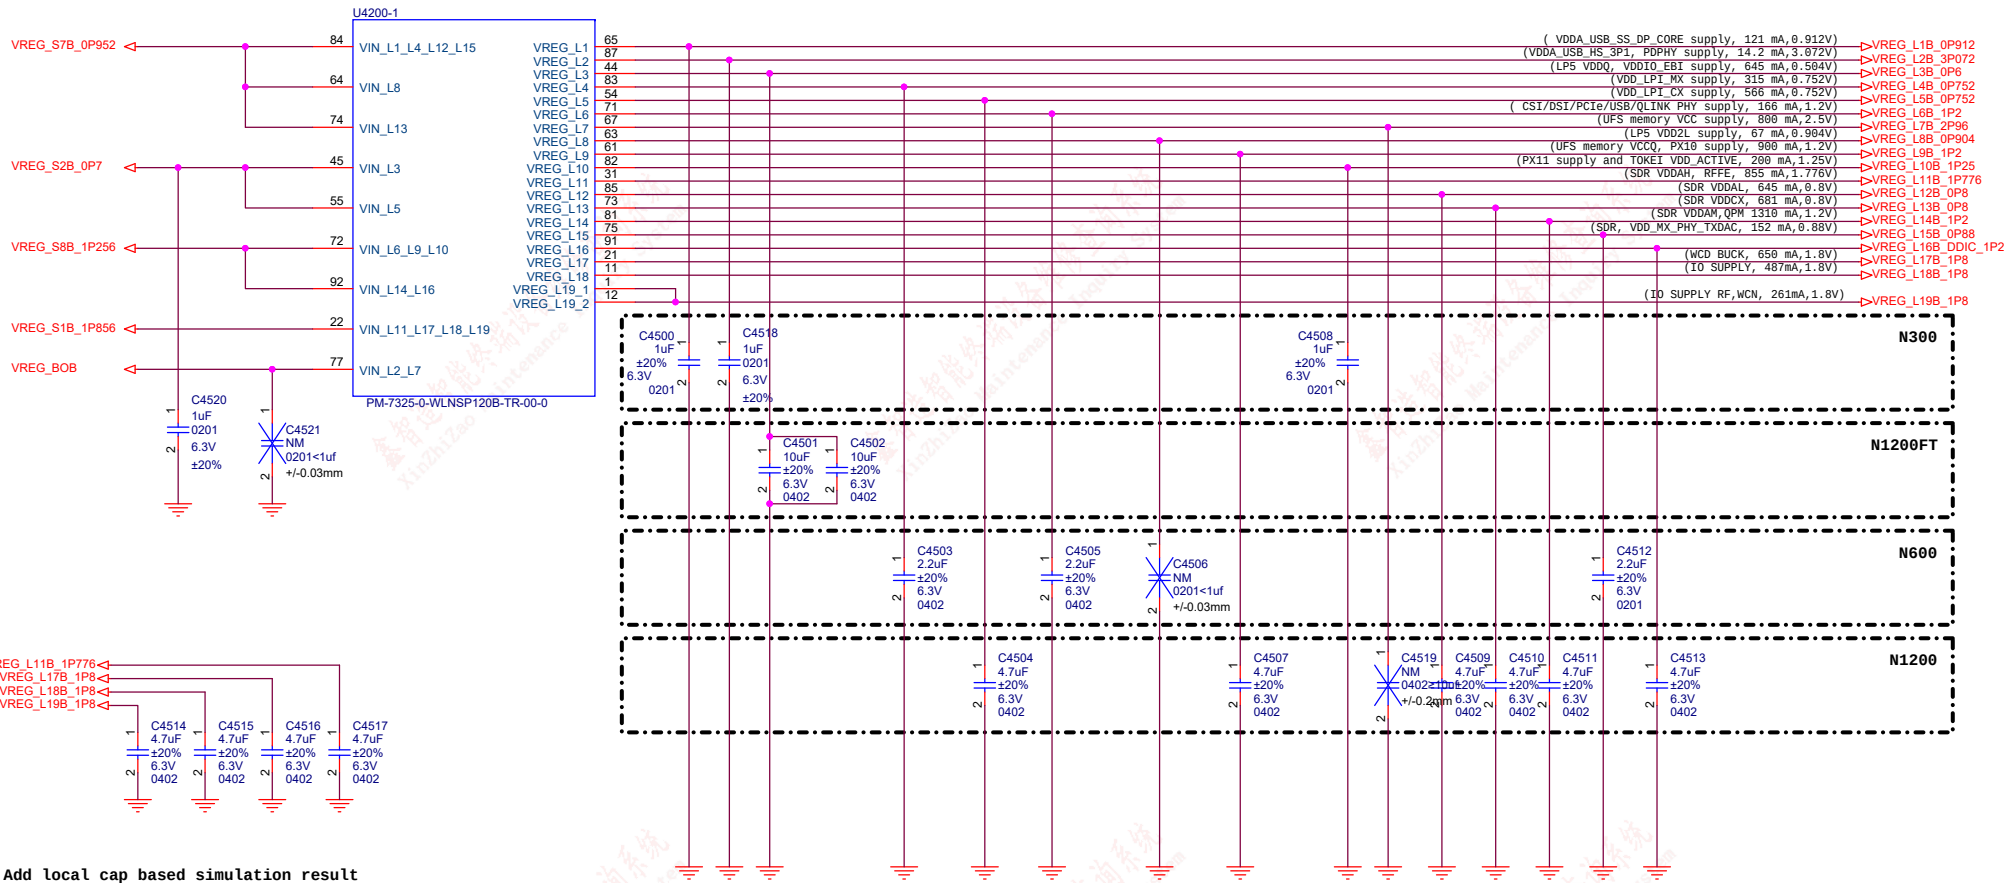

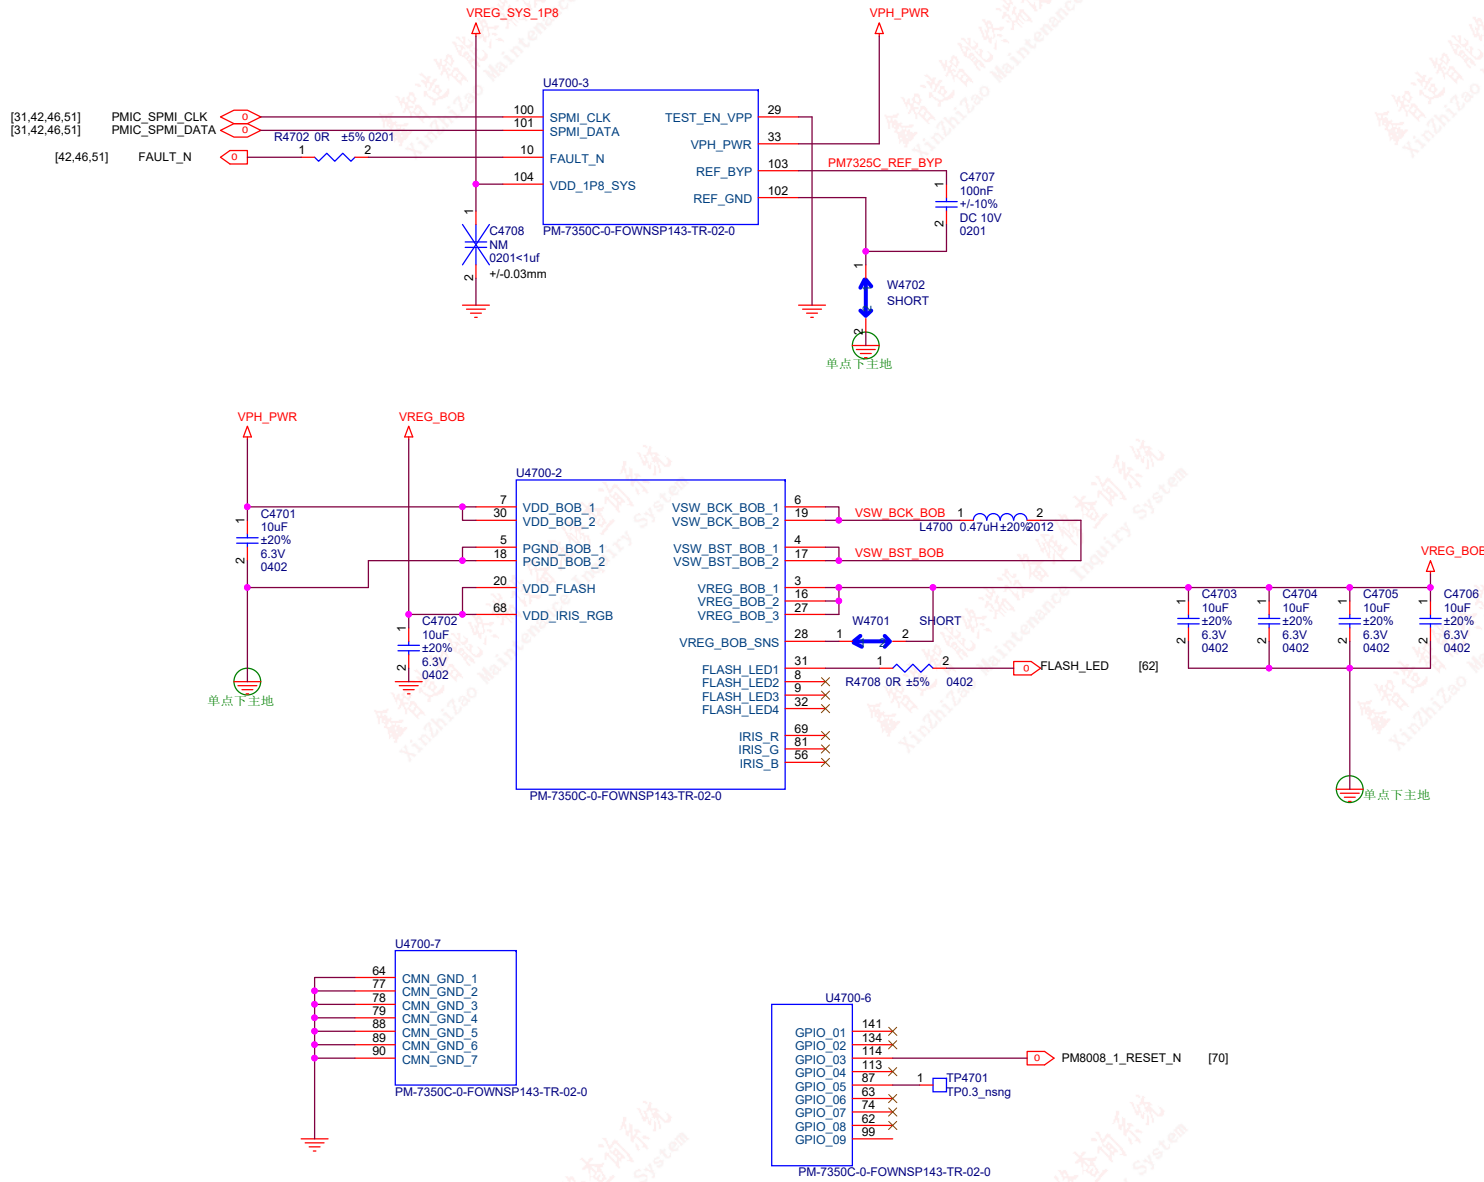

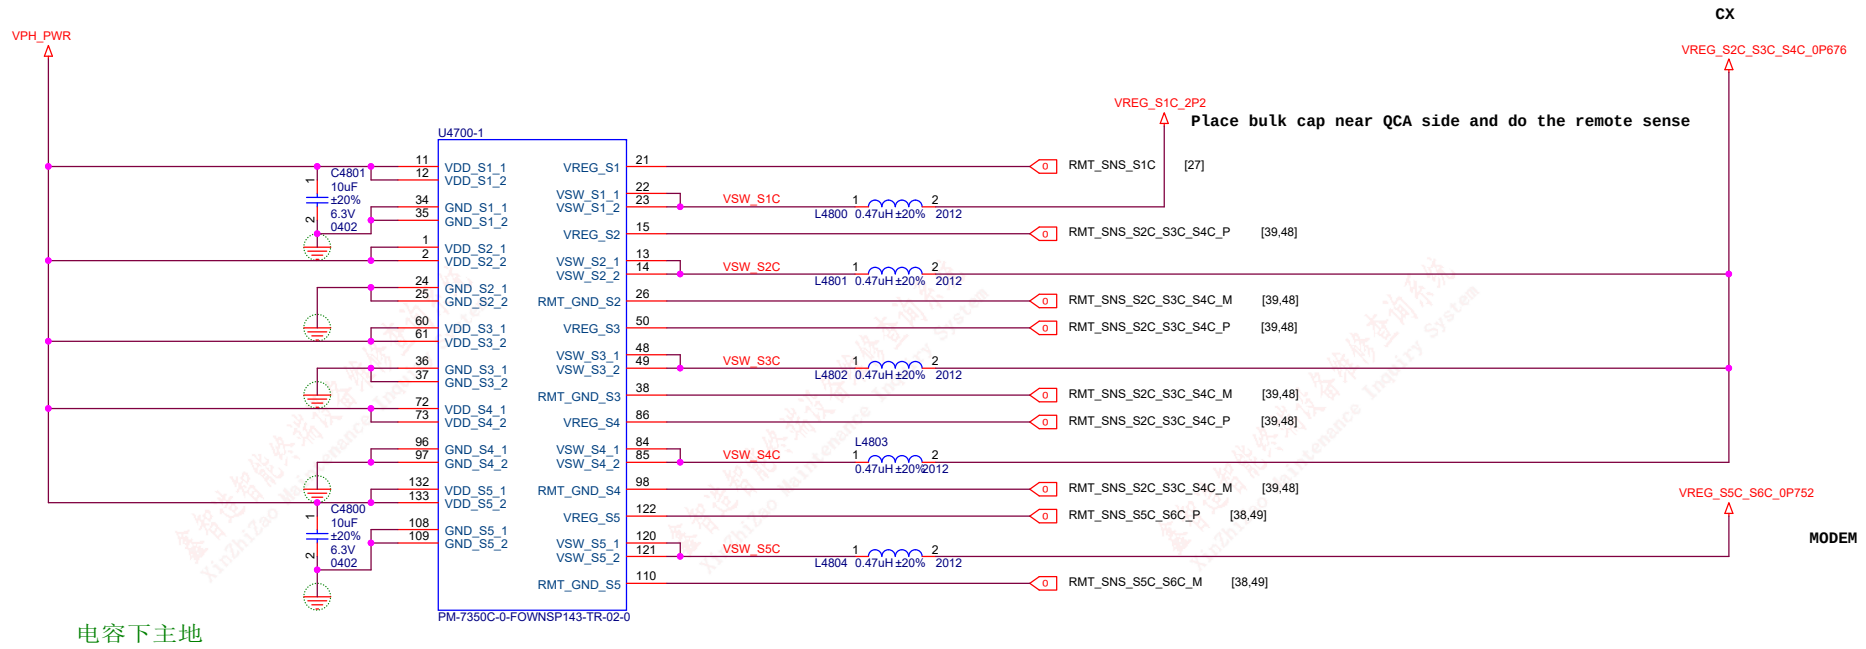


Title			M20_MAIN
Size	Document Number	Rev	
A3	PM855A BUCK CONVERTER1	P0	
Date:	Thursday, September 08, 2022	Sheet	48 of 74

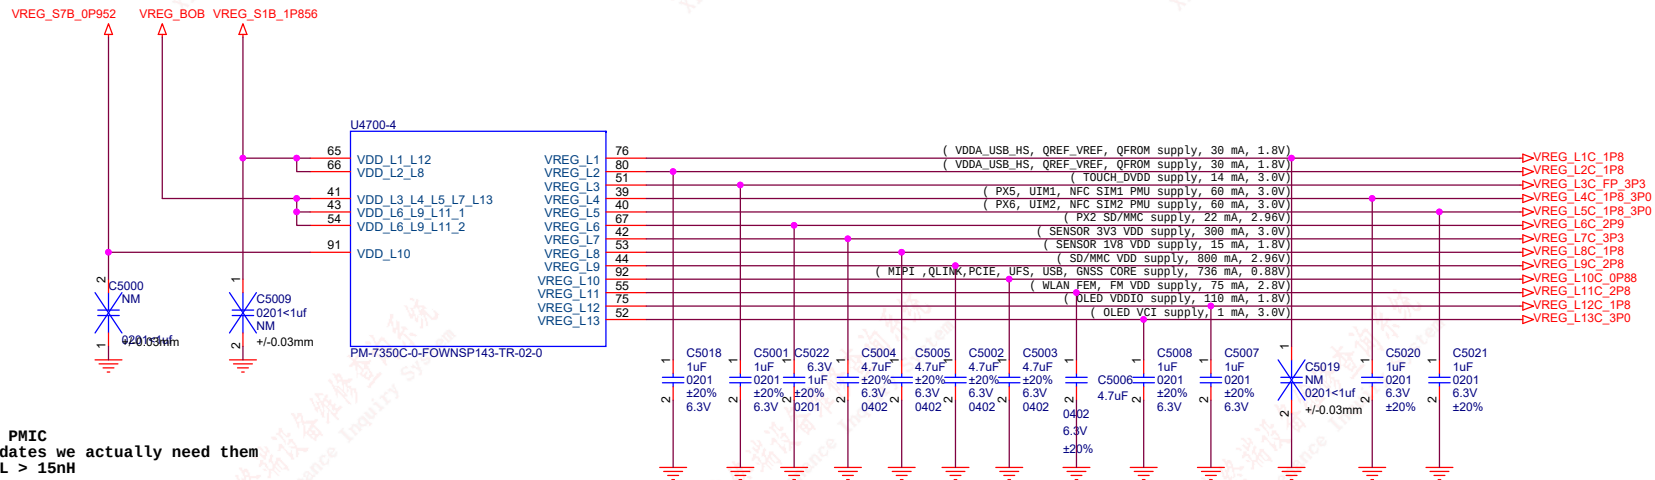


Pseudo capless allows users to place the LDO output capacitor physically/electrically far from the LDO output, near the load. The routing ESL/ESR between the PMIC pin and the remote Cout should meet the capless LDO spec. All PMOS LDOs are considered pseudo-capless, unless it has internal PMIC load. If an internal PMIC load, the output cap must be placed close to the PMIC. Required capacitance for each LDO type can be found in App Note: 80-VT310-125

If a LDO is not used in the system, terminate the VREG_Lx pin as follows.
" For non-default on LDO: Leave the output pin floating. Ensure SW/user never turns on the LDO
" For default on LDO:
o If input supplied from VPH_PWR or Boost Bypass: Connect to default output capacitance. Can NOT tie output to input because Vph and BBYP output are always powered as long as phone is powered. When PMIC turns off, the LDO peripheral gets reset and the strong pull-down gets enabled.
o If input supplied from SMPS or Buck-Boost: Tie LDO output to input (so PON does not get stuck); no output capacitance needed. Software needs to disable LDO and disable strong pull-down after power up.
Note: LDOs used internally by the PMIC are not unused by definition. Keep default output capacitance.


Title		
M20_MAIN		
Size	Document Number	Rev
A3	PM855A LDOs	P0
Date:	Thursday, September 08, 2022	Sheet 50 of 74

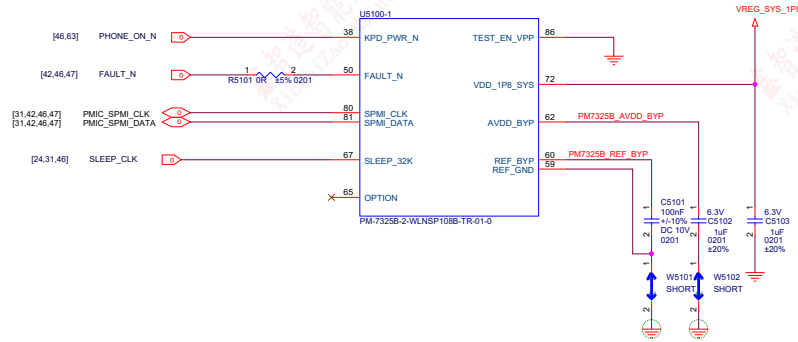





REF_BYP should be routed away from noisy traces

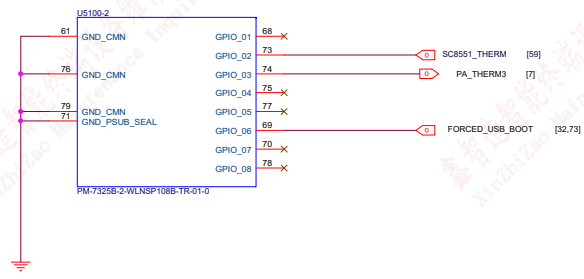


File		
M20_MAIN		
Size	Document Number	Rev
A2	PM7325B CTRL.GND	P0
Date:	Thursday, September 08, 2022	Sheet

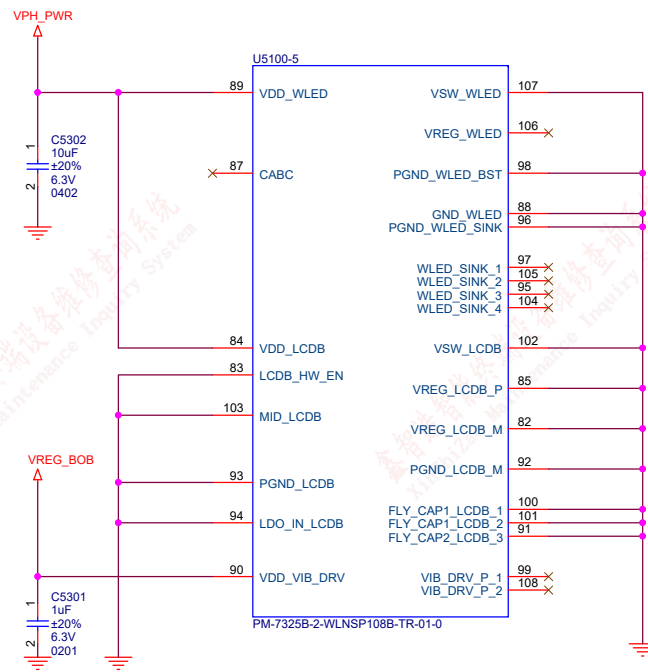


Title			M20_MAIN
Size	A3	Document Number	PM7325B LCD
Date:	Thursday, September 08, 2022	Sheet	53 of 80
Rev	P0		

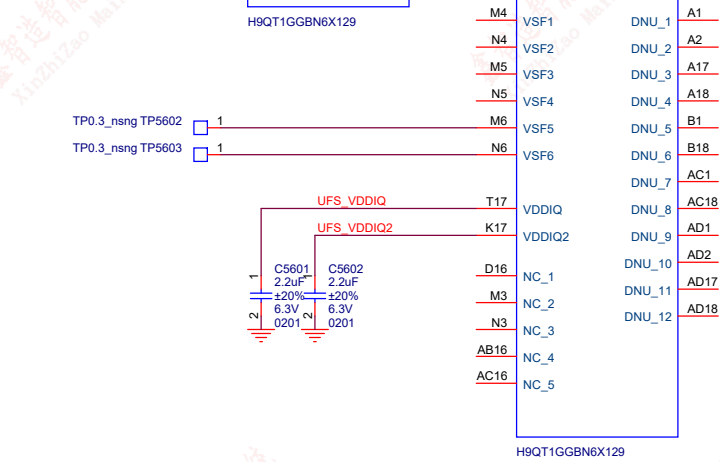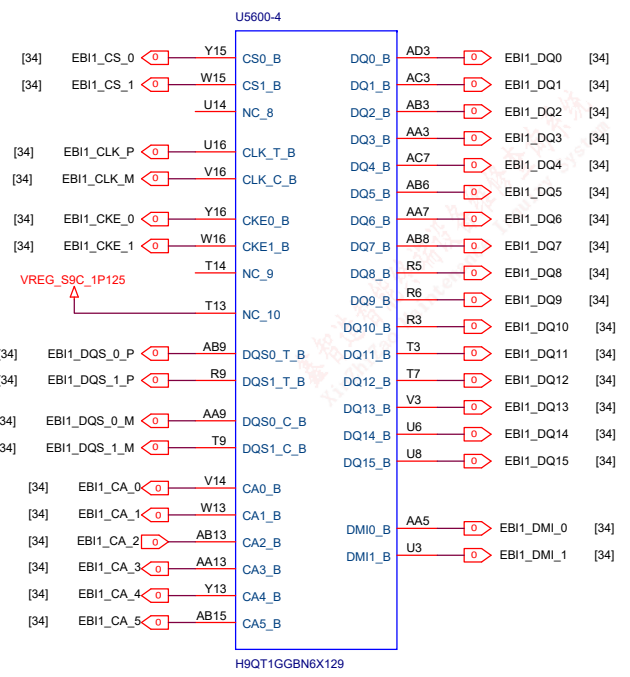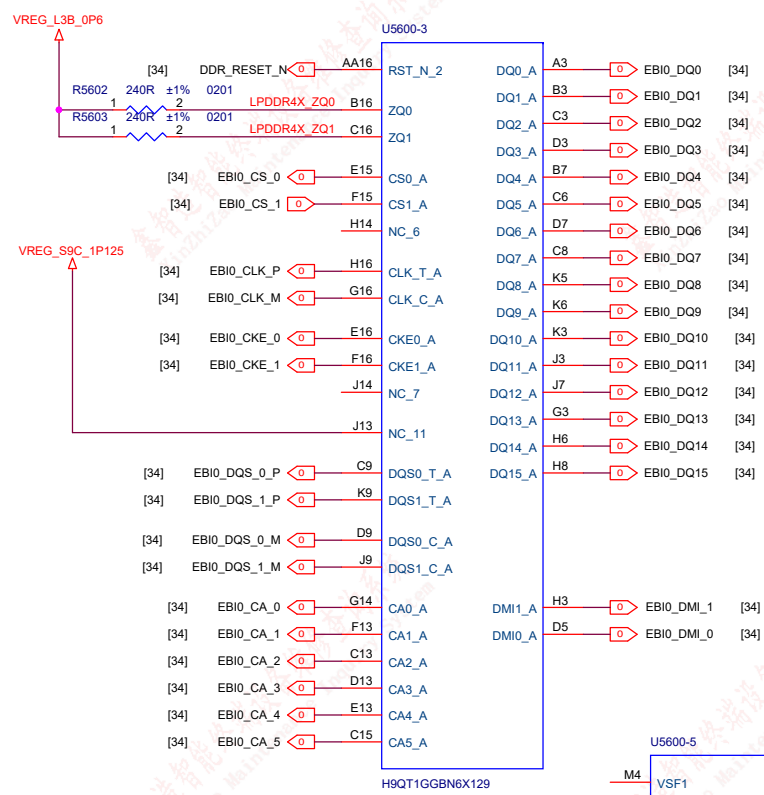
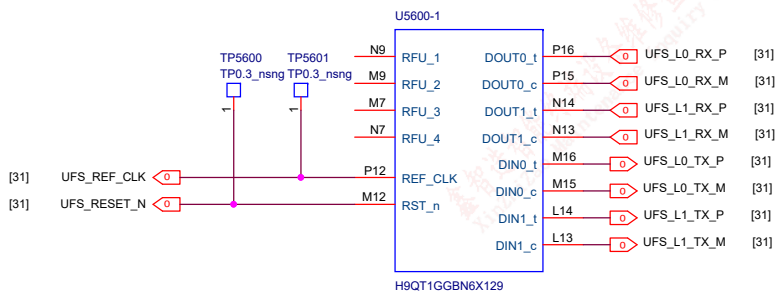


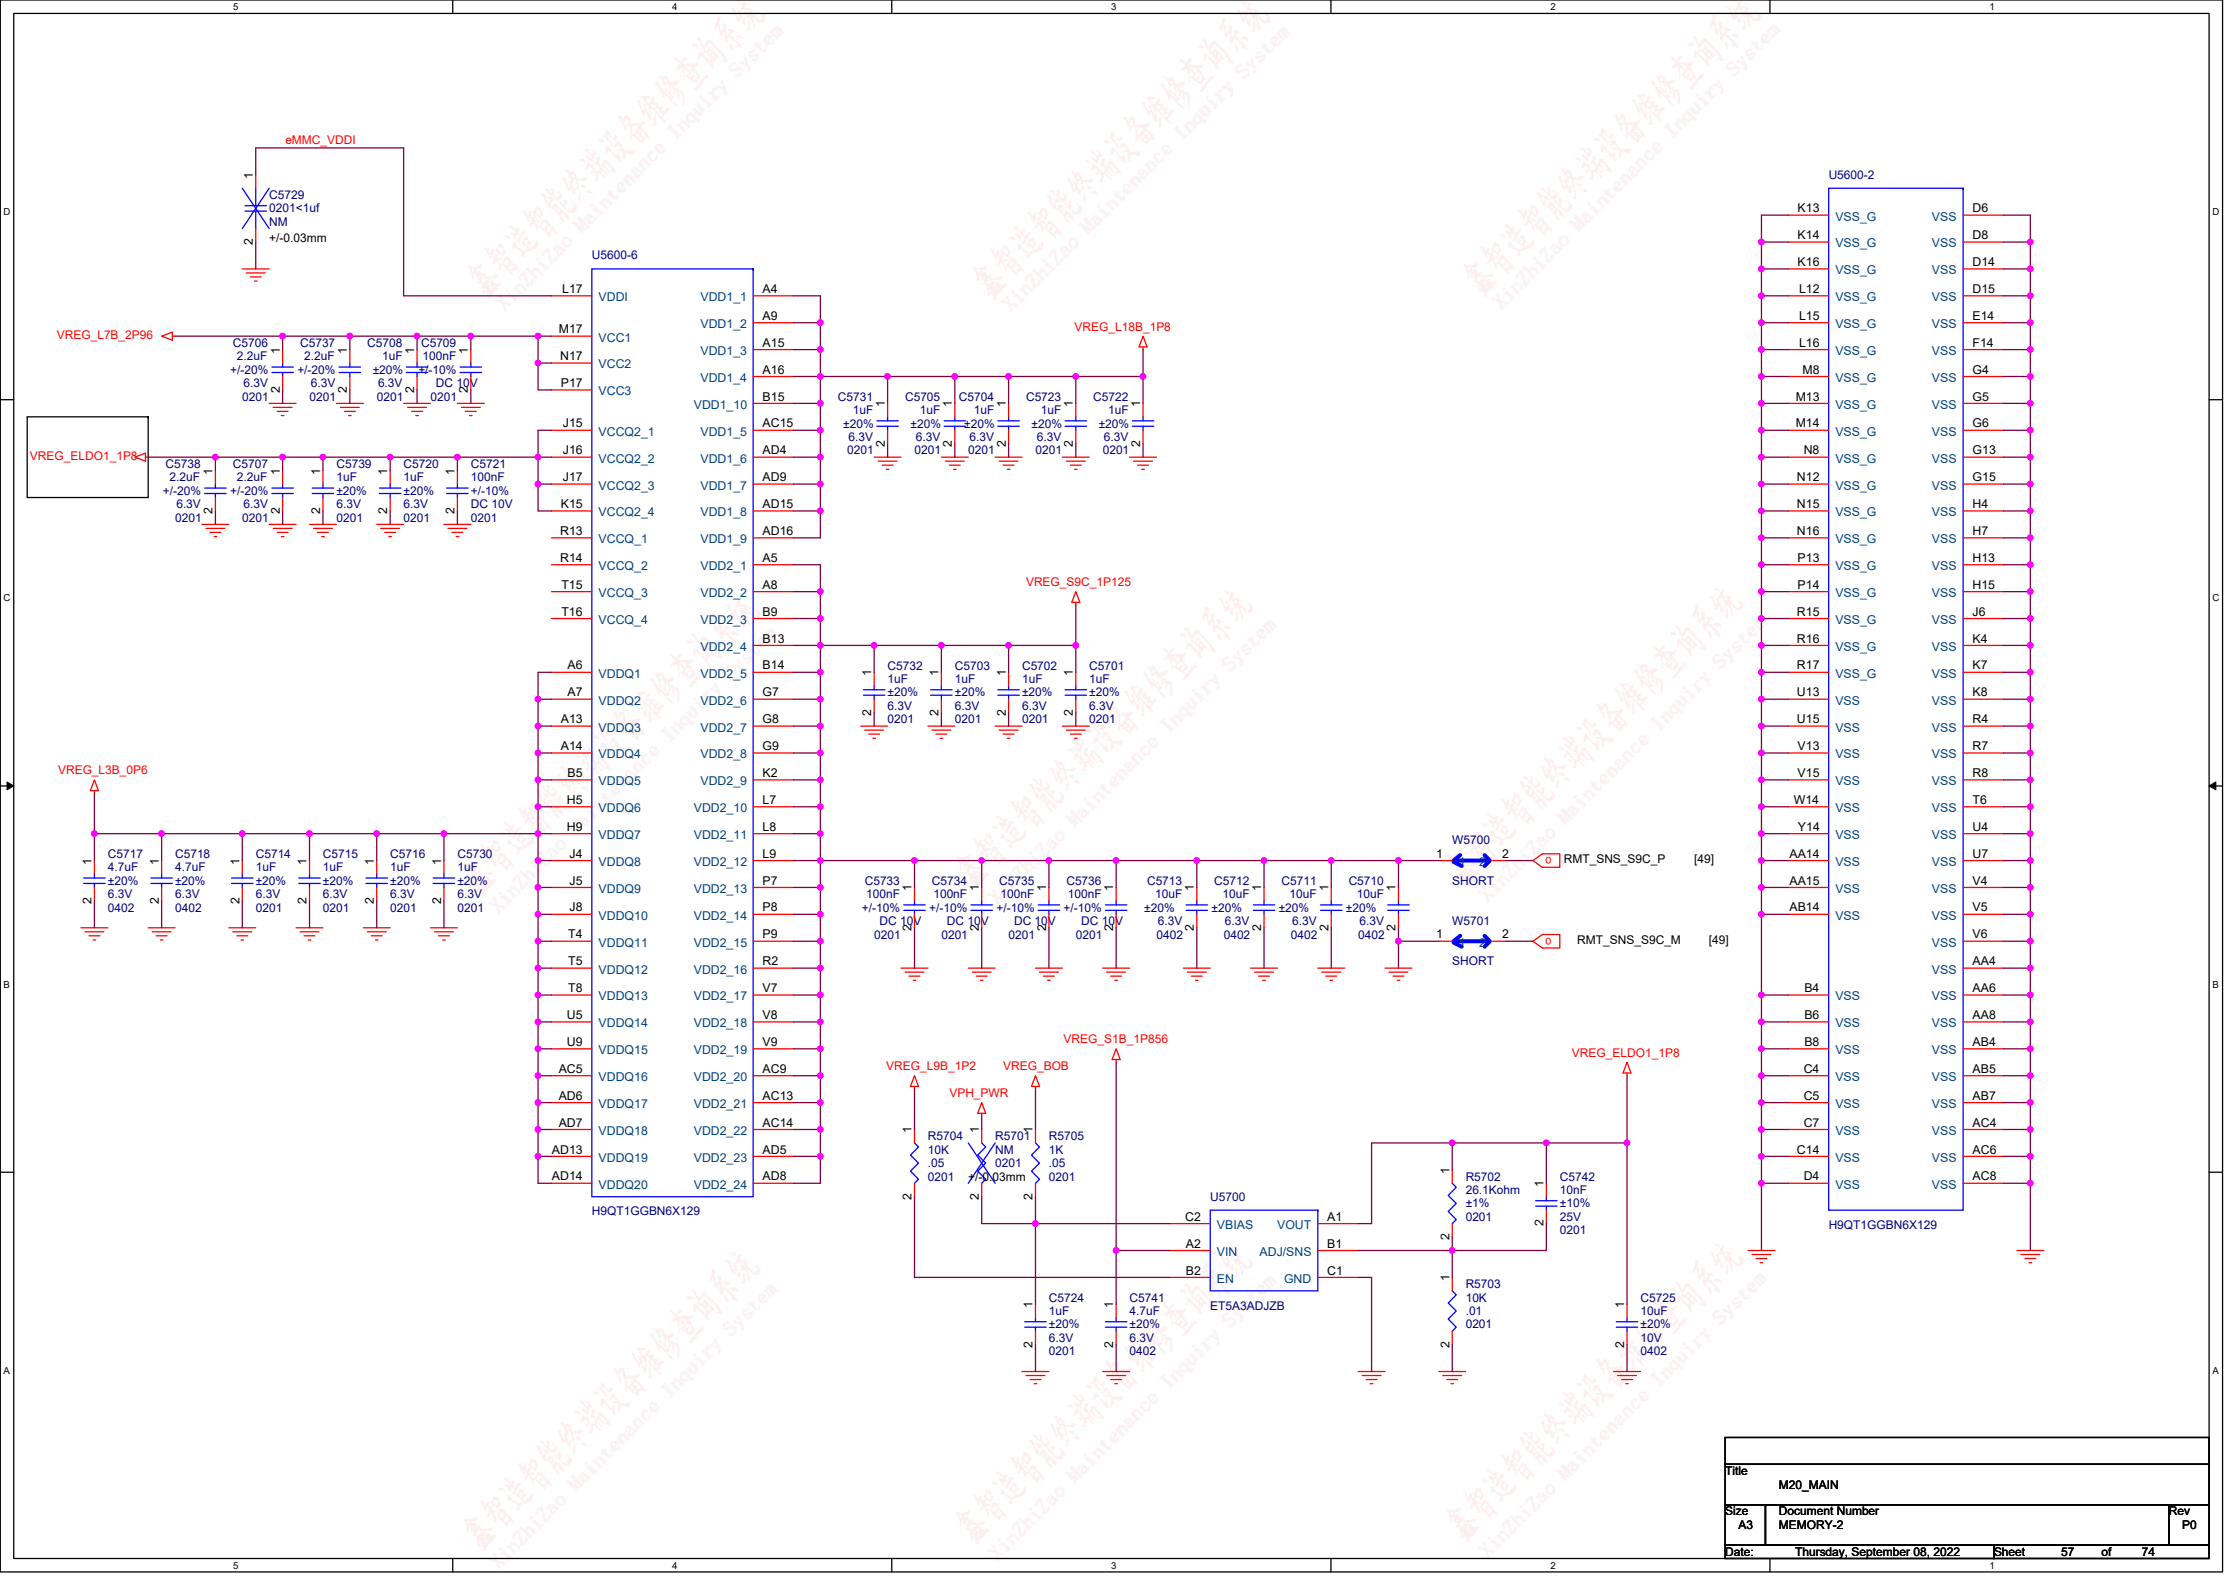


SPK

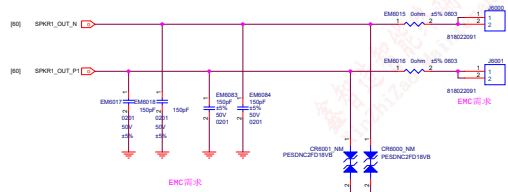


Second MIC

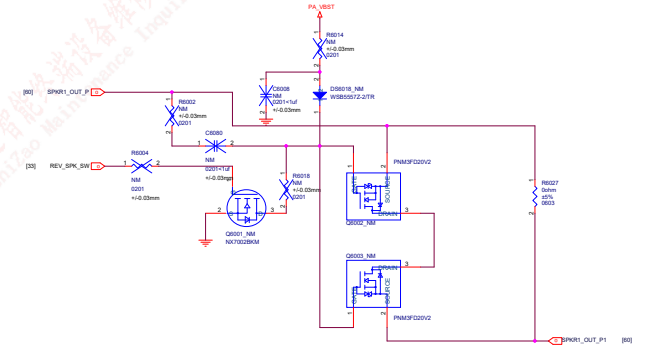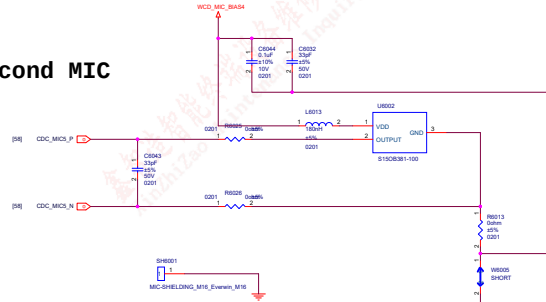




SPKR PA

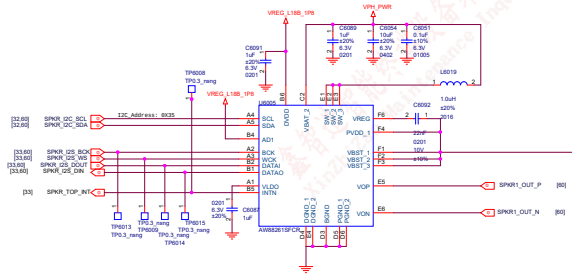

SPKR PA

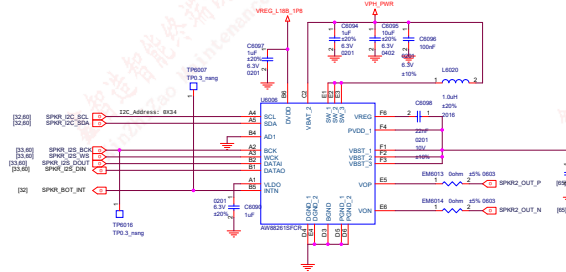

HEADSET

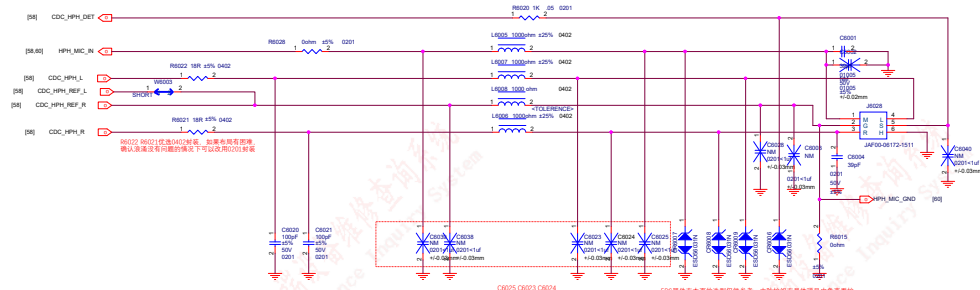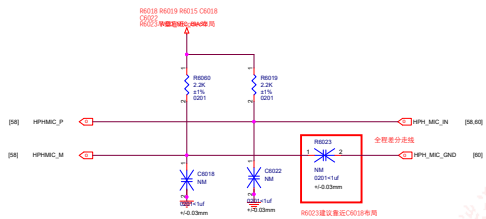


Note 1: CR5816/CR5817/CR5818 由印度项目使用ESD56031N
Note 2: 耳机通道差分转单端的接法;
Note 3: 高频滤波用,靠近Headset Jack, 电容直接下主地
Note 4: FM部分

C6025 C6023 C6024
C6026作为替換RS/CS认证
FAIL的电容调试预留位置。默认NM


EOS器件在本页的造型仅供参考，由防护组在具体项目中负责看护

IN PHONE			
File MT8873_5GA			
Site A1	Document Number AUDIO		Rev
Date:	Thursday, September 08, 2002	Sheet	60 of 74


A+G

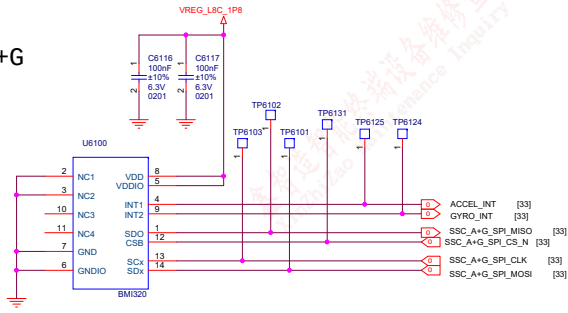


SAR LDO

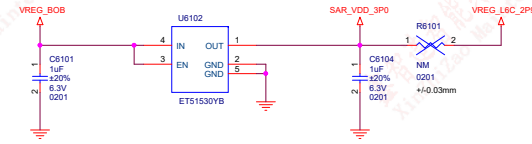


COMPASS

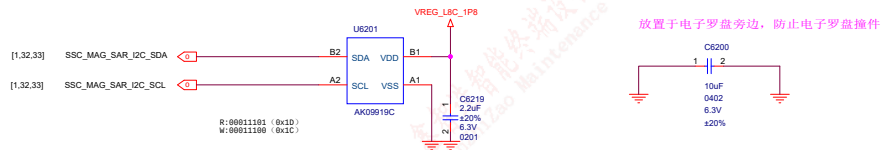


FP+PWRKEY

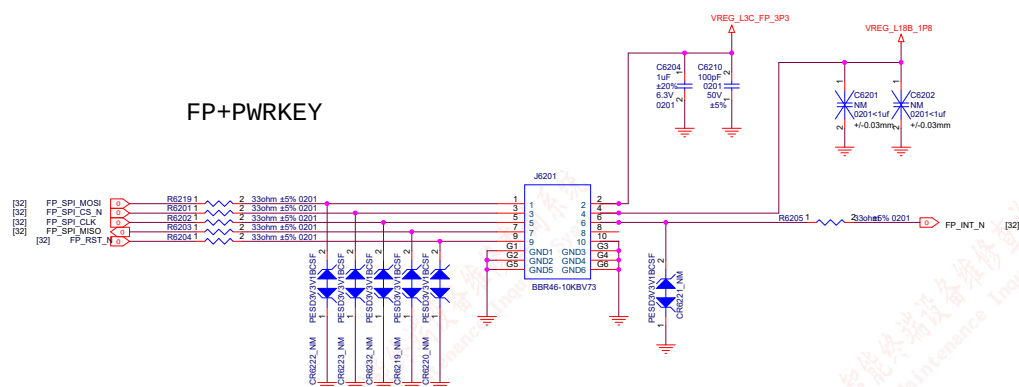


P L-sensor

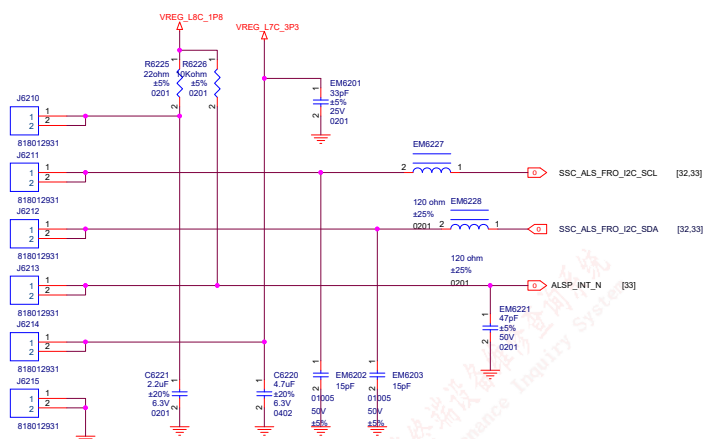

FLASH CON

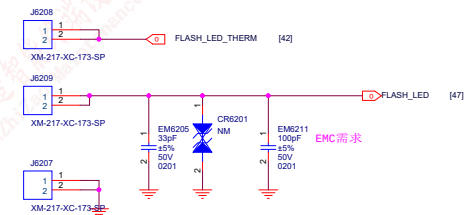


INFRARED

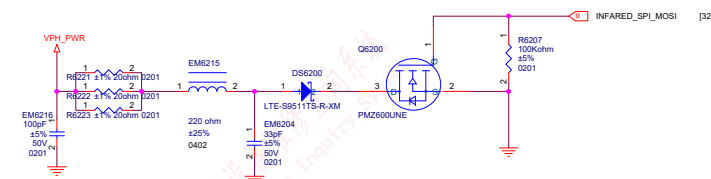

MI PHONE			
Title M20_MAIN			
Size A2	Document Number SENSOR-2		Rev P0
Date:	Thursday, September 08, 2022	Sheet	62 of 76




音量键PCB 上要加丝印 V+V-


音量键PCB 上要加丝印 V+V-

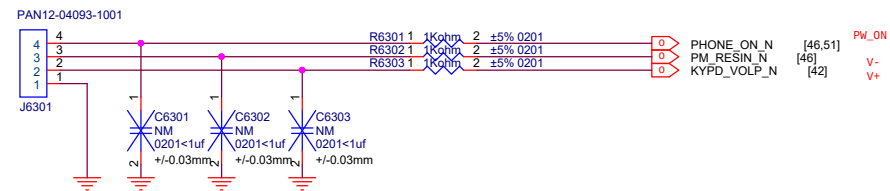

MI PHONE			
Title MT6873_5GA			
Size A3	Document Number SIM CONNECTOR		Rev P0
Date:	Sheet	63	of 74


$$V_{OUT} = 0.5(0.495 - 0.505) * (1 + R1/R2)$$

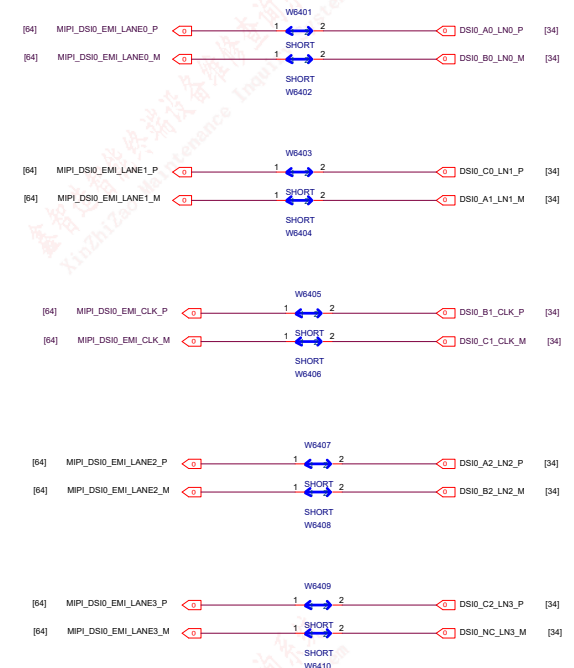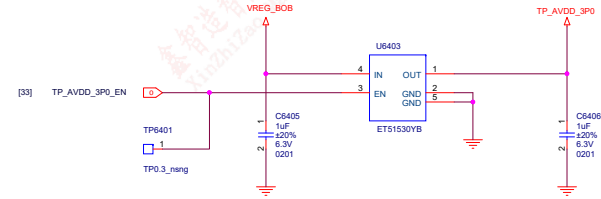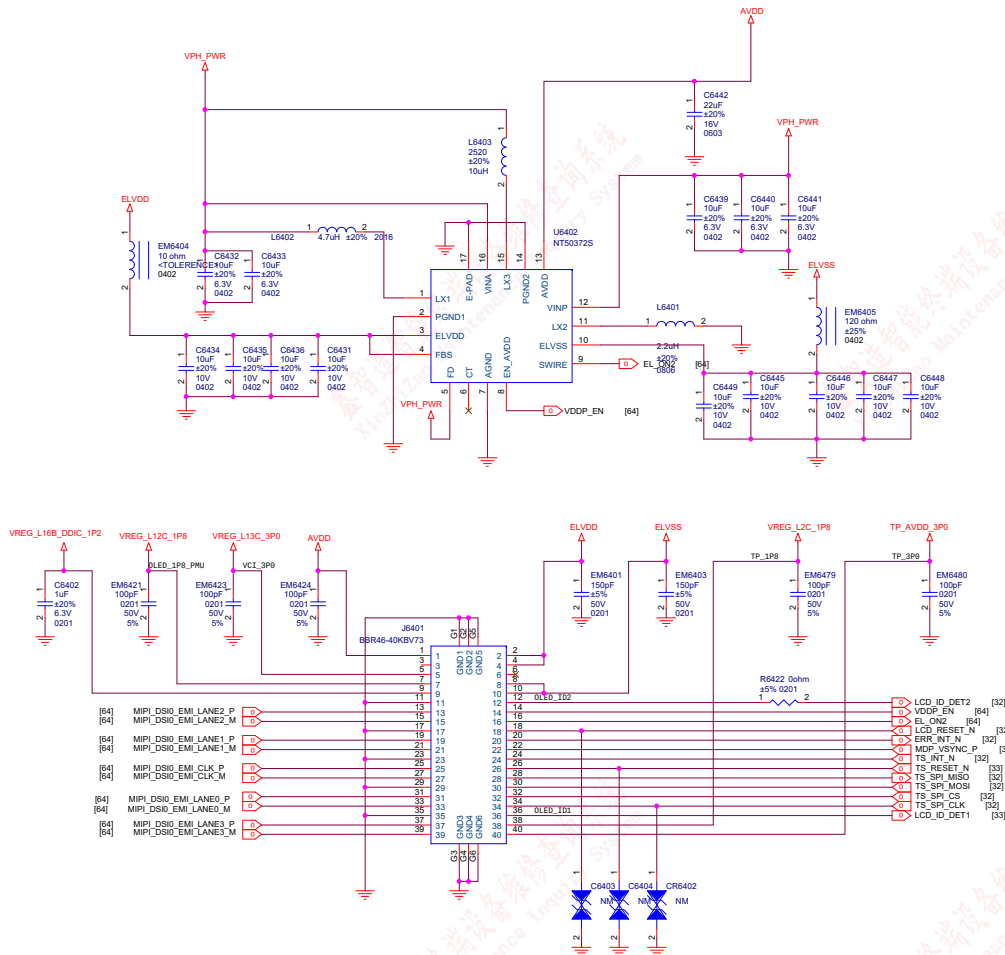

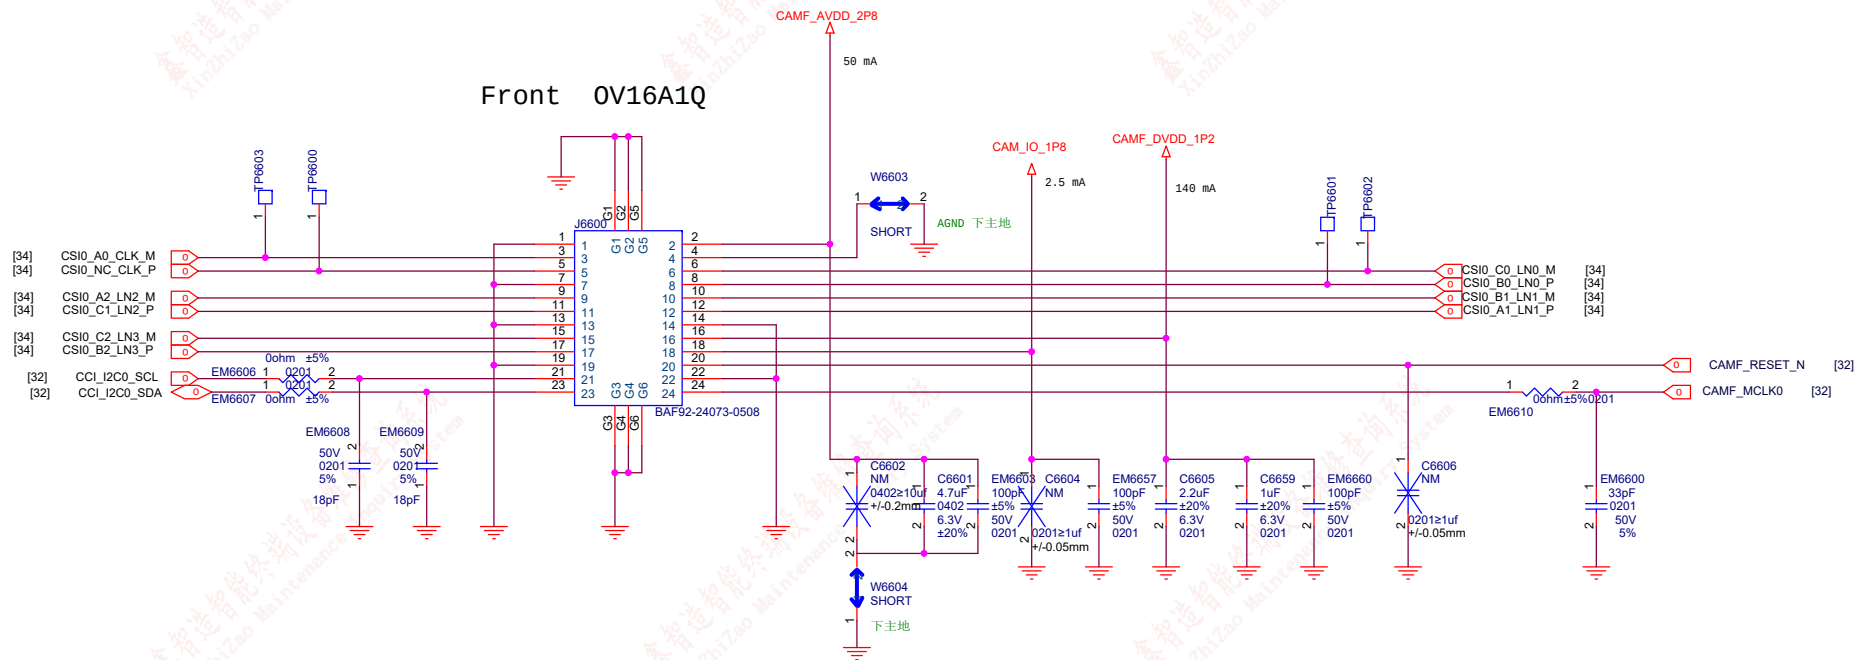


Title		
K16_MAIN		
Size	Document Number	Rev
A3	Reserved(for Analog FM)	P0
Date:	Thursday, September 08, 2022	Sheet 66 of 71

M20 WIDE 108M HM2SP & HM2SD

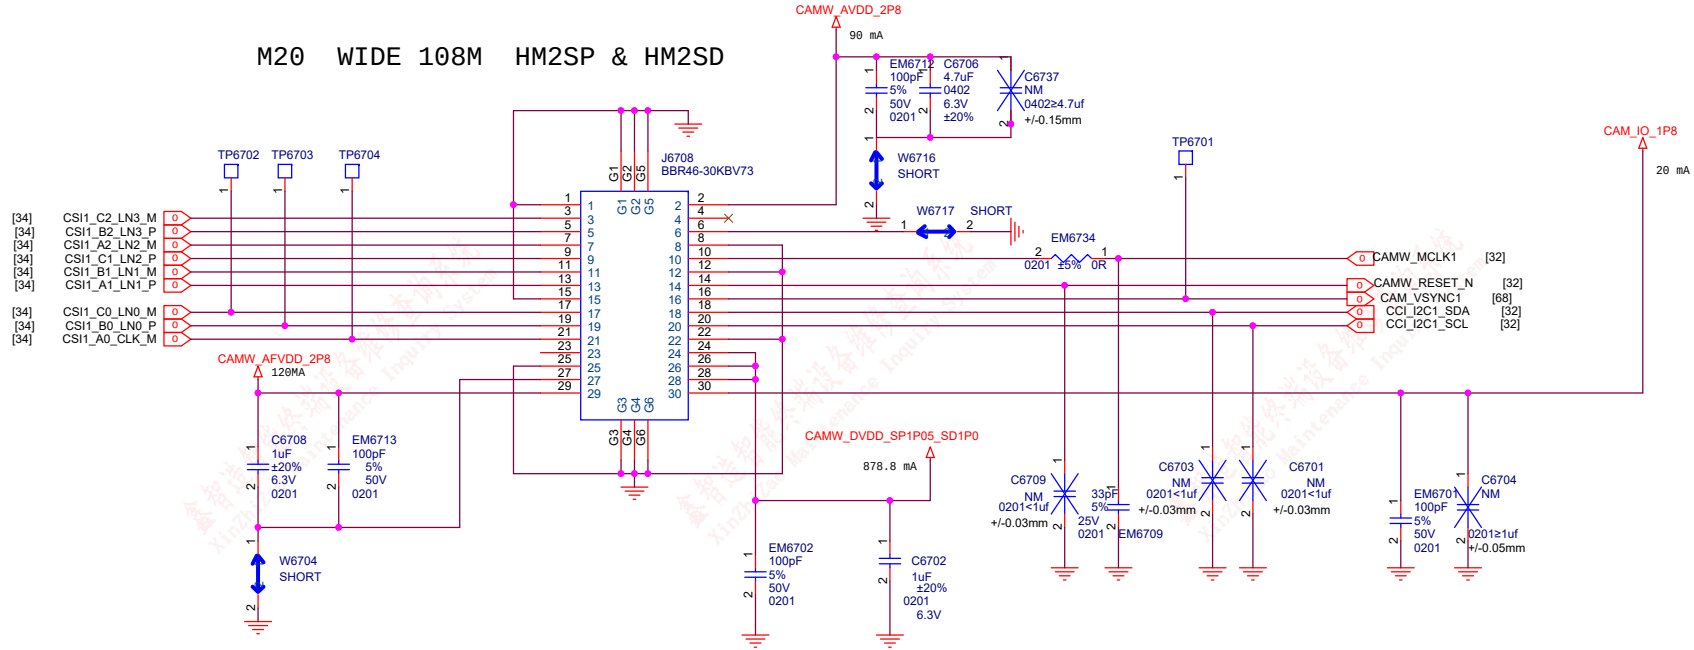


Title		
K16_MAIN		
Size	Document Number	Rev
A3	WIDE&TELE CAMERA	P0
Date:	Thursday, September 08, 2022	Sheet 67 74

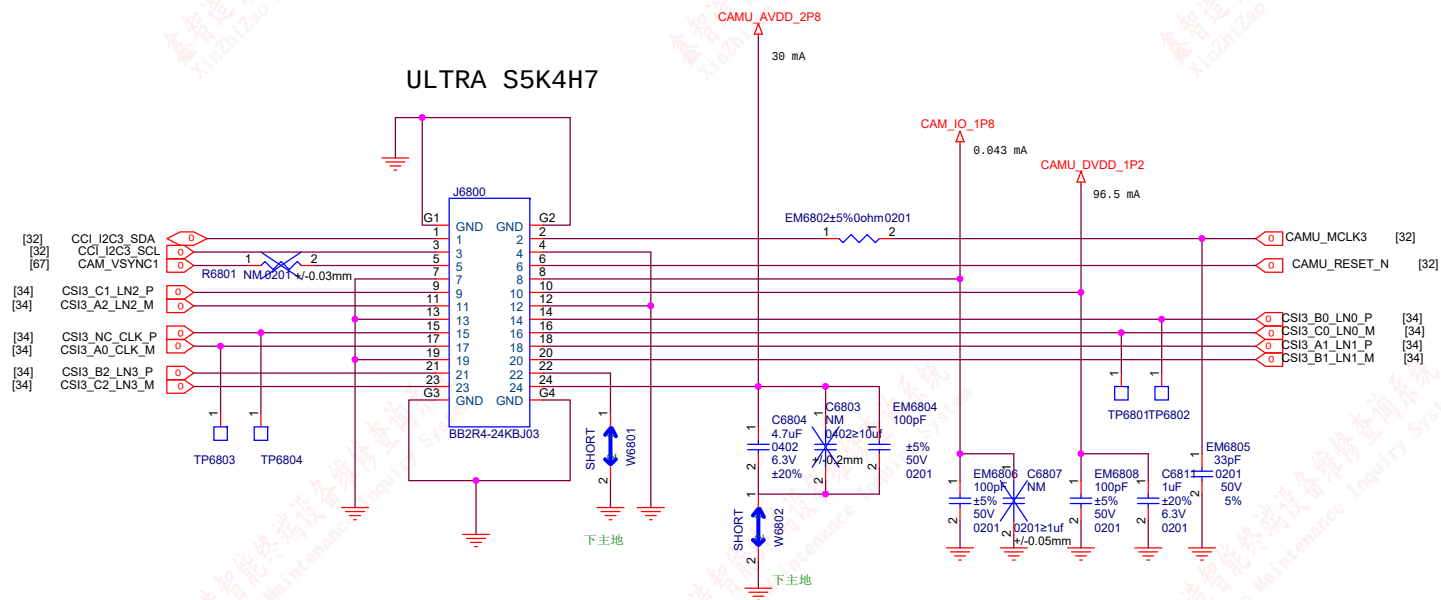


Title		
K16_MAIN		
Size	Document Number	Rev
A3	ULTRA CAMERA	P0
Date:	Thursday, September 08, 2022	Sheet 68 of 71




2M MACRO
first vendor: 0V02B10


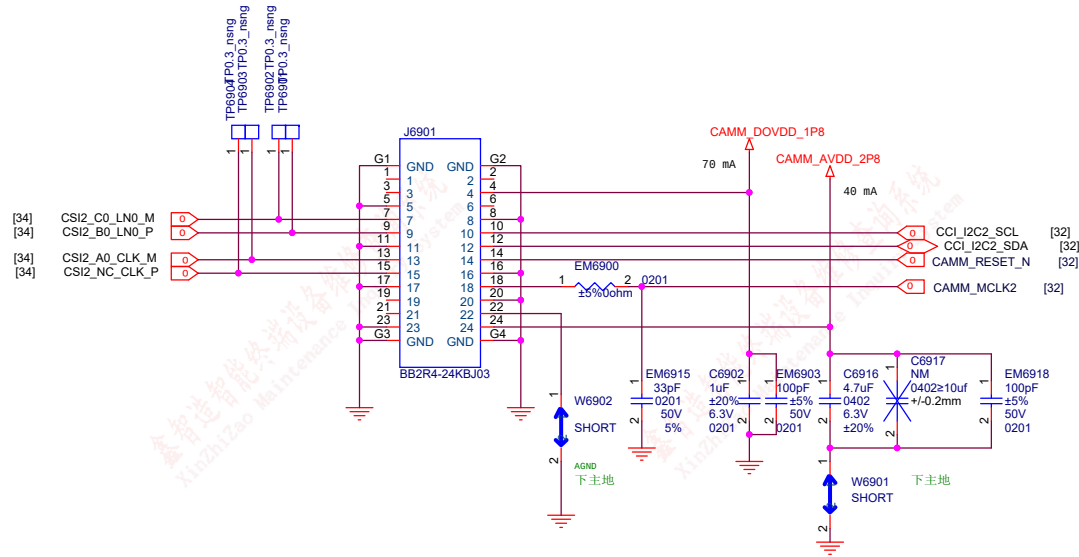


Title			K16_MAIN
Size	Document Number		Rev
A3	ULTRA CAMERA		P0
Date:	Thursday, September 08, 2022	Sheet	69 of 76

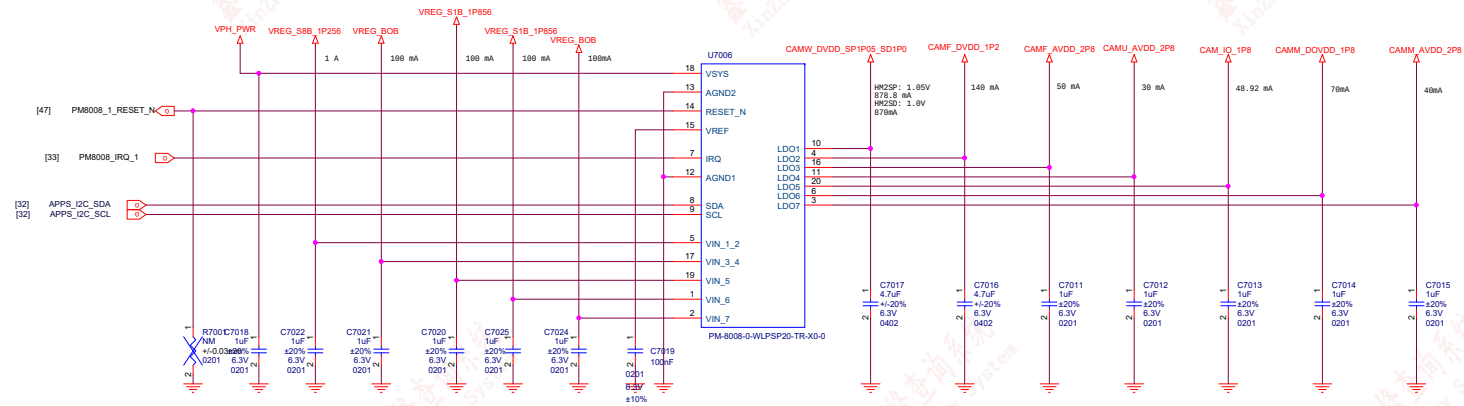

For Wide AFVDD 2P8

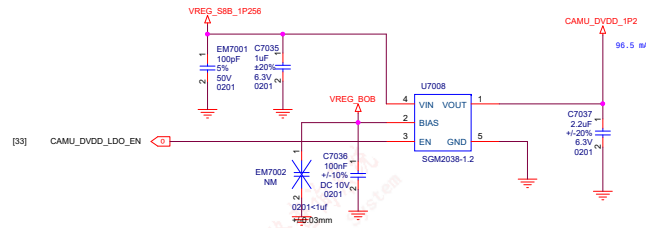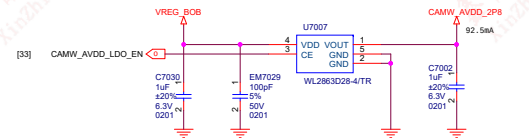

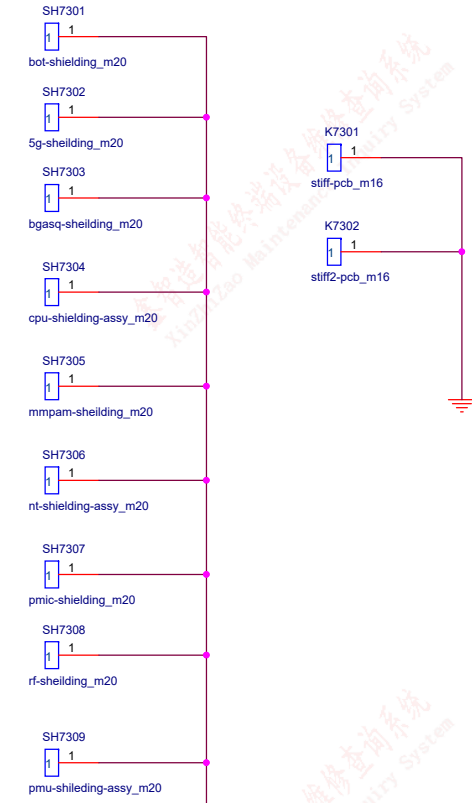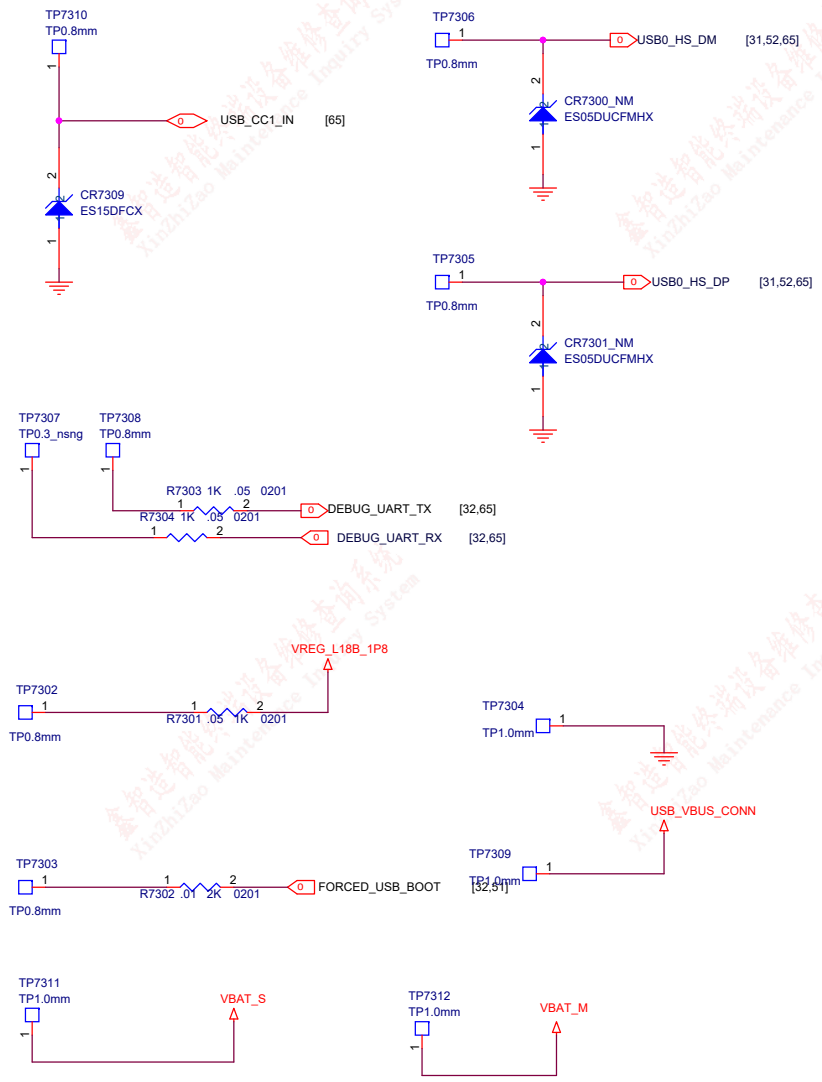

Title			L9/L9B_INT_MAIN
Size	A3	Document Number	PM8009
Date:	Thursday, September 08, 2022	Sheet	73 of 74
		Rev	P0