

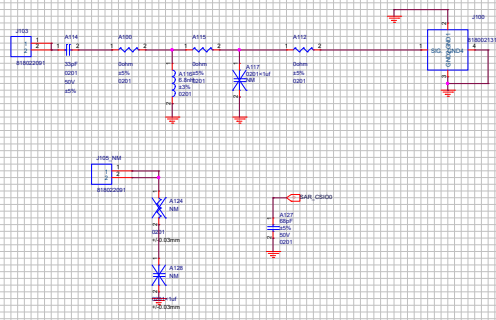
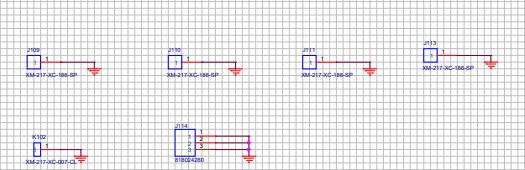


ANT0_2/3/4/5G LB1 & MHB1

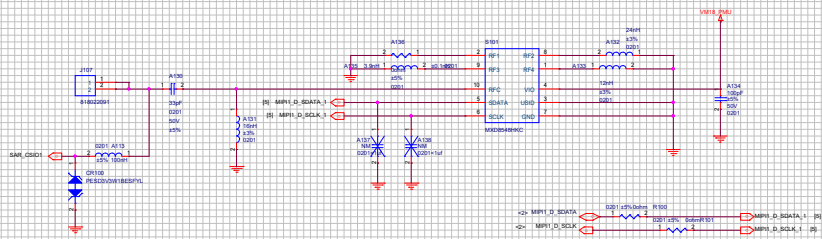


ANT3_2/3/4/5G MHB4

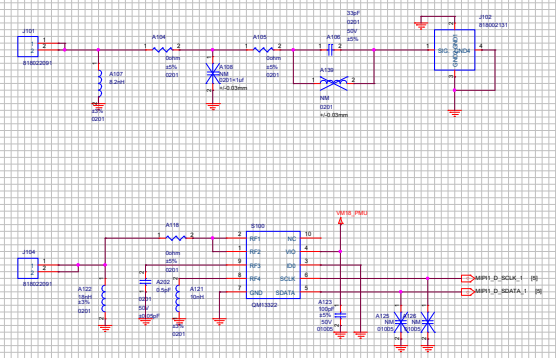


Rev	1	Rev	1
By	PT 1000	Rev	1
Chk	PT 1000	Rev	1
Appr	PT 1000	Rev	1
Rev	1	Rev	1

MAIN MIC


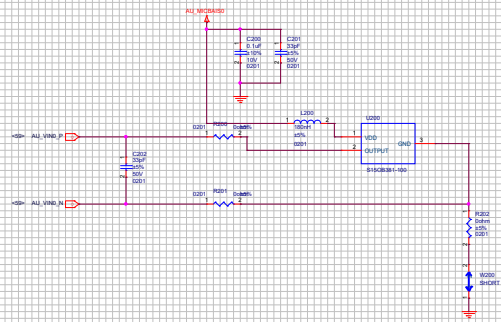


SPK2

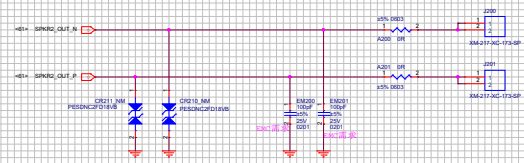

Title		F1 MAIN	
Size	A2	Document Number	SMBT350LW POWER
Date	Tuesday, June 14, 2022		Sheet

HAPTICS

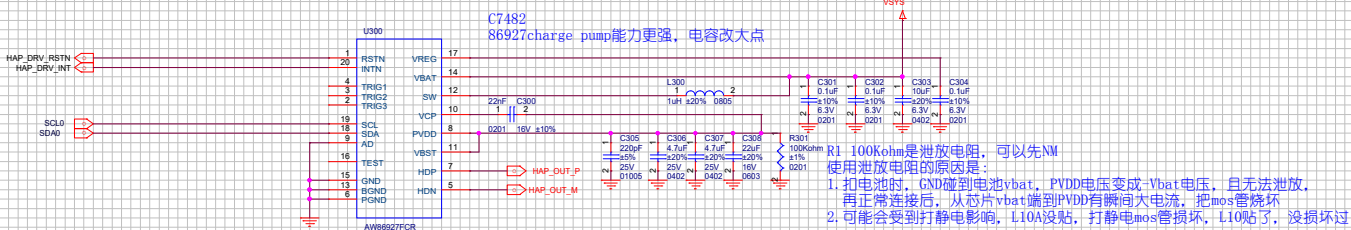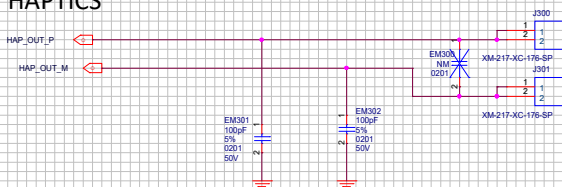

【注意】HAPTICS未来在小板上
L0201 限高1.0以上，使用240100000N79
限高0.8，则使用24V01R0P11E6

HAP_DRV_INT、HAP_DRV_RSTN还未接

File	F1 MAIN
Size	Document Number
A3	SM81380AWL POWER
Date	Thursday, May 26, 2022
Sheet	3
6	







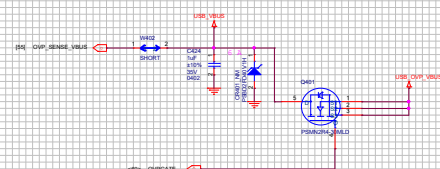


Diagram of a shielded cable. A blue rectangular shield is labeled "SHIELD". A red line representing the conductor is labeled "1". Below the shield, the text "charge-shielding-200w.m16" is visible.

Slave2 BAT CON

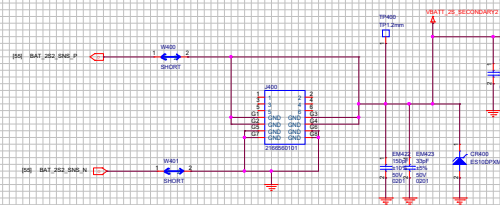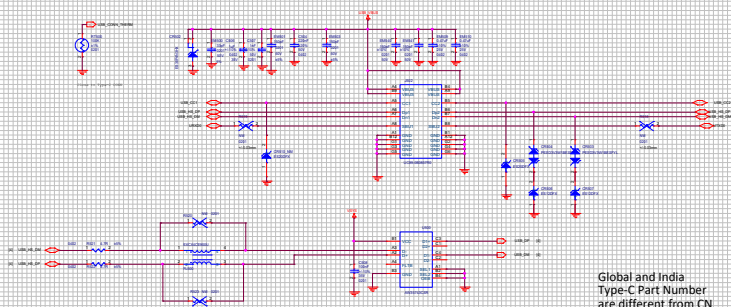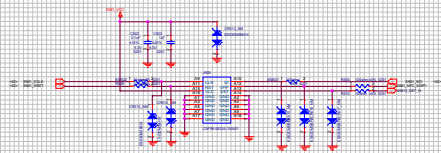

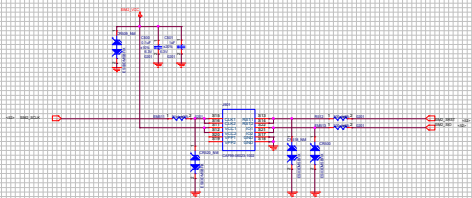

Global and India
Type-C Part Number
are different from CN

