


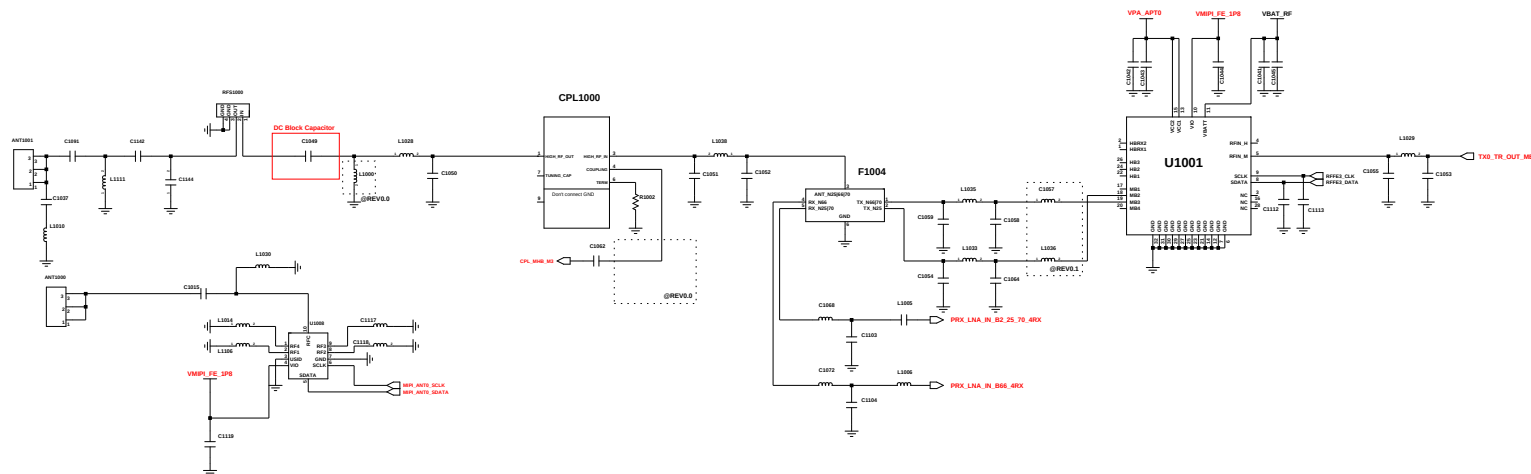
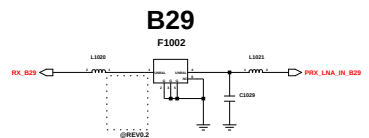


MIMO (4x4)	B2/4/25/41/48/66 n2/25/41/48/66/70/77/78
SRS	1T4R, n48/77/78
DL CA	
UL CA	41C/48C
HPUE	B41/N41/N77/N78


MAIN ANT1
LB TRX

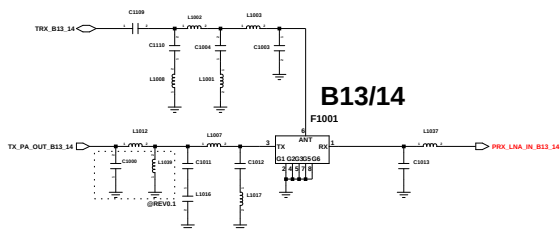

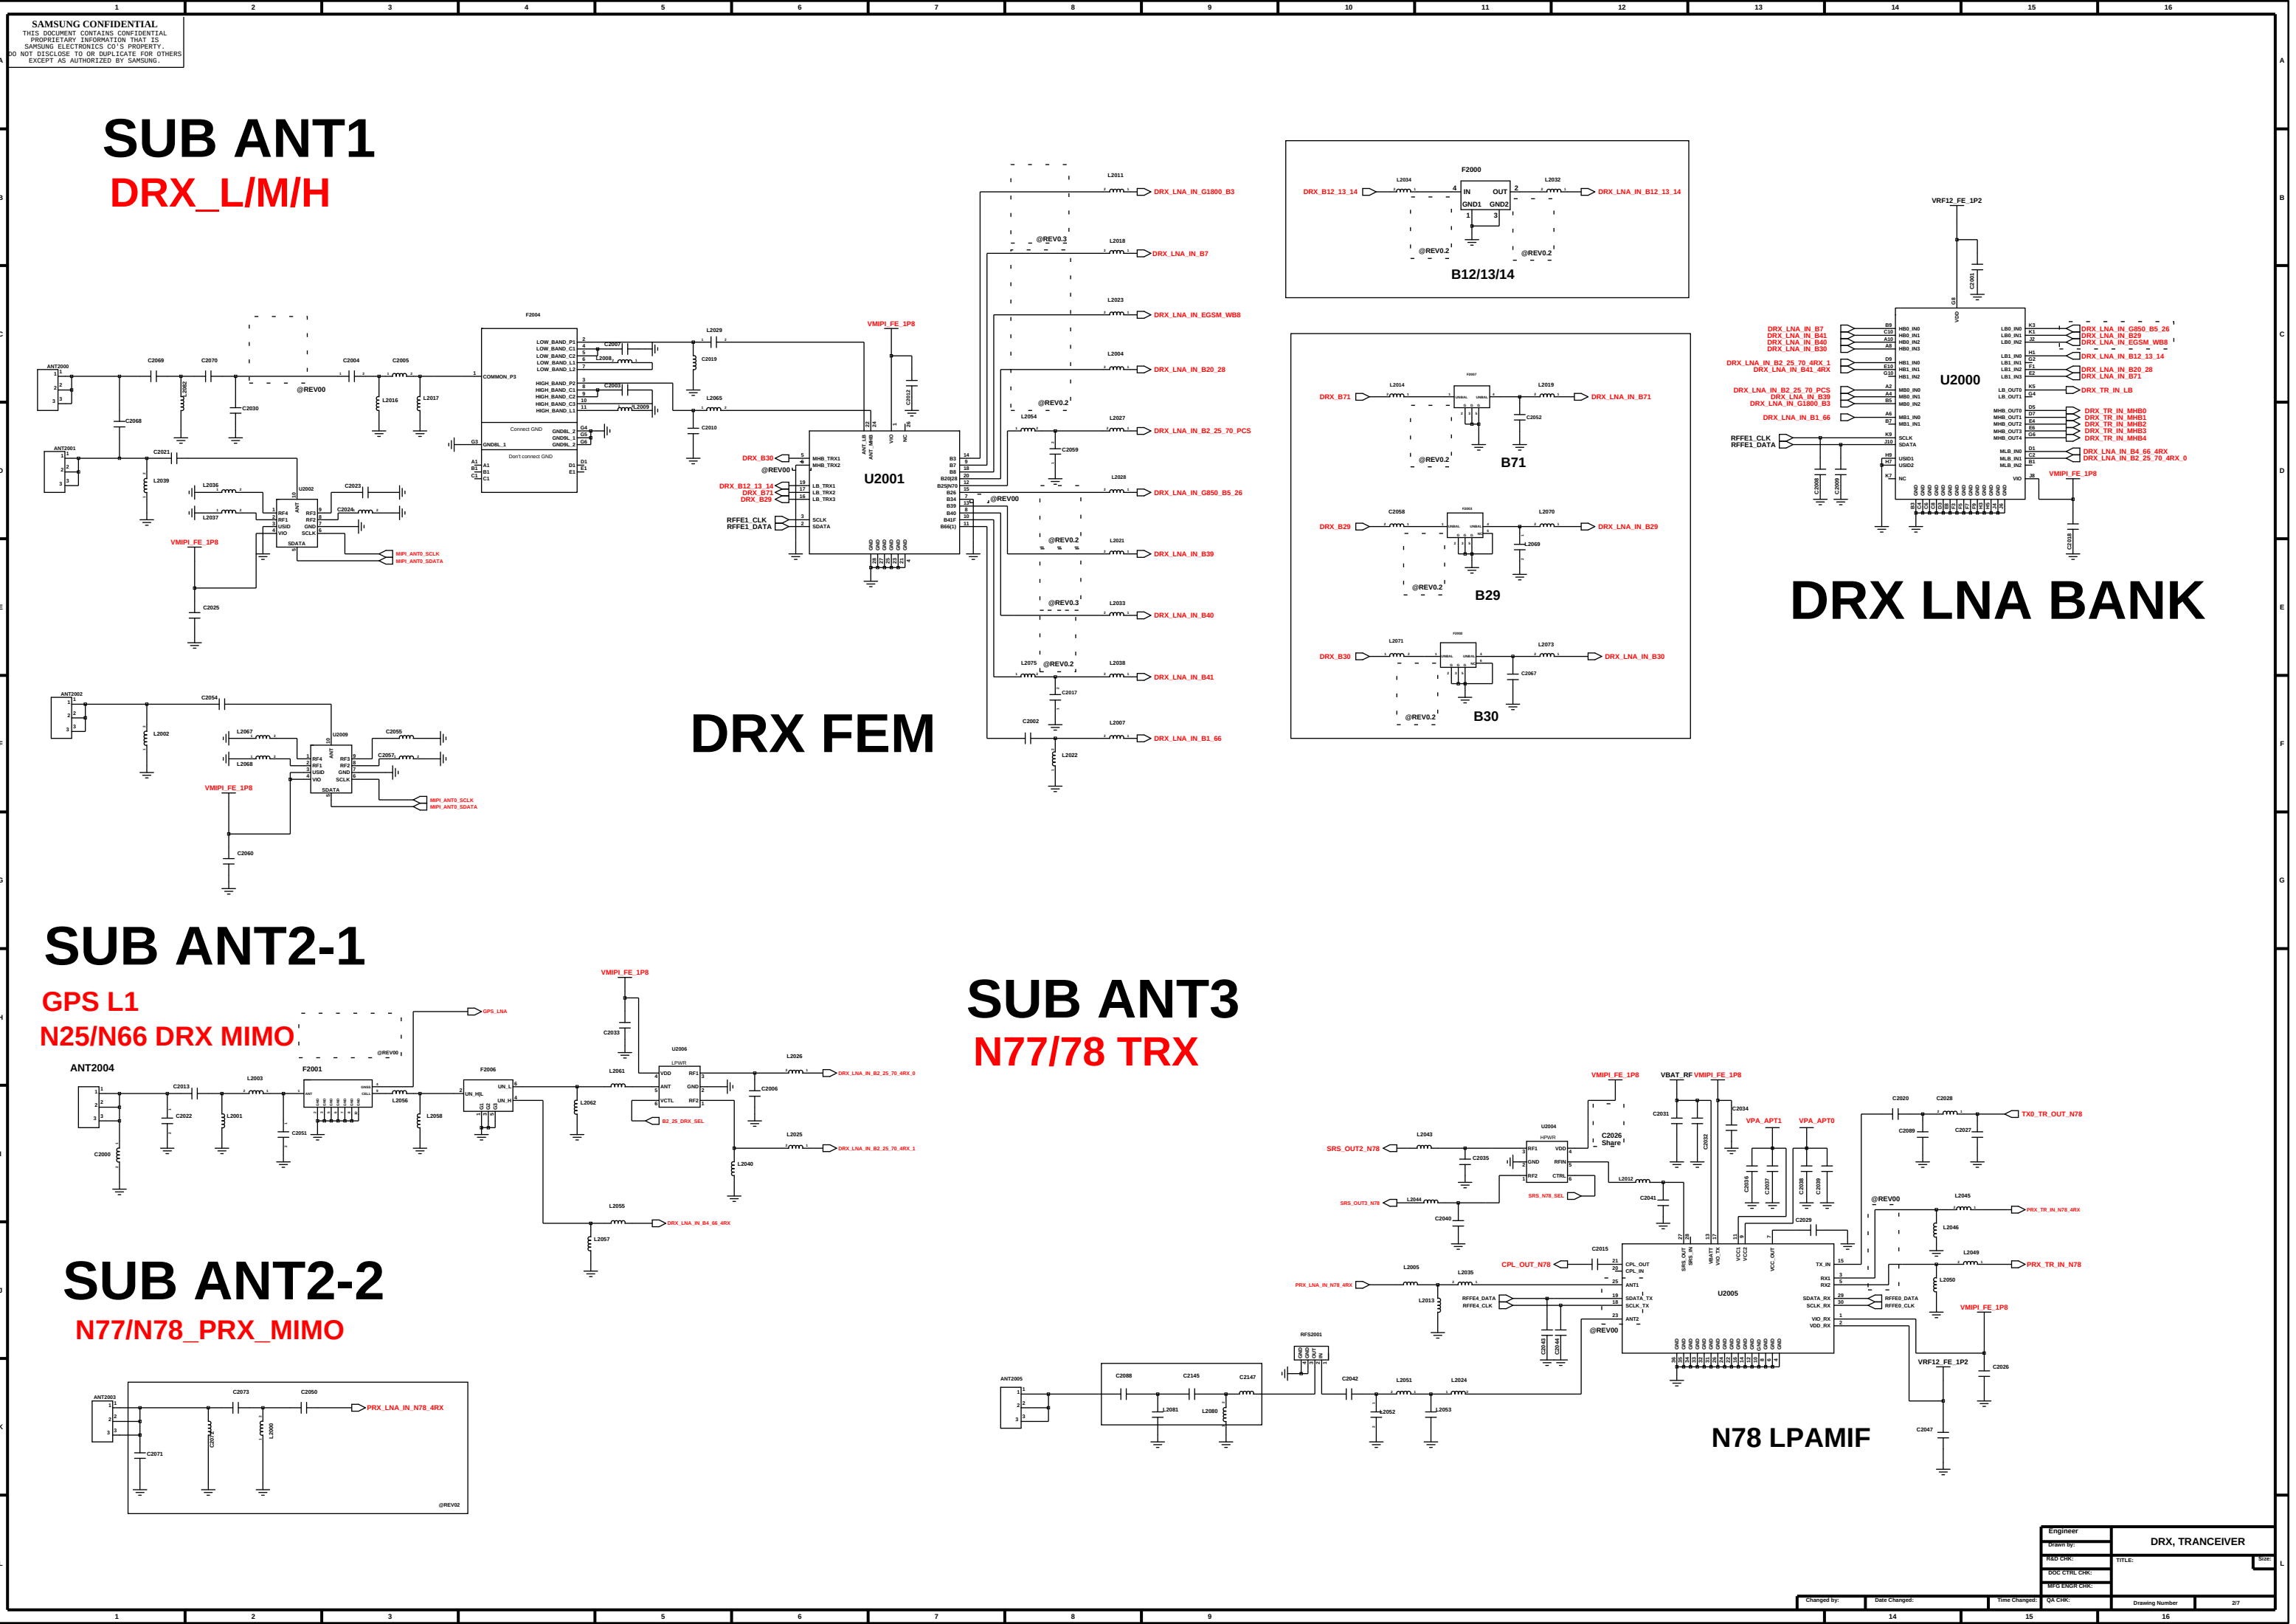




	16
--	----

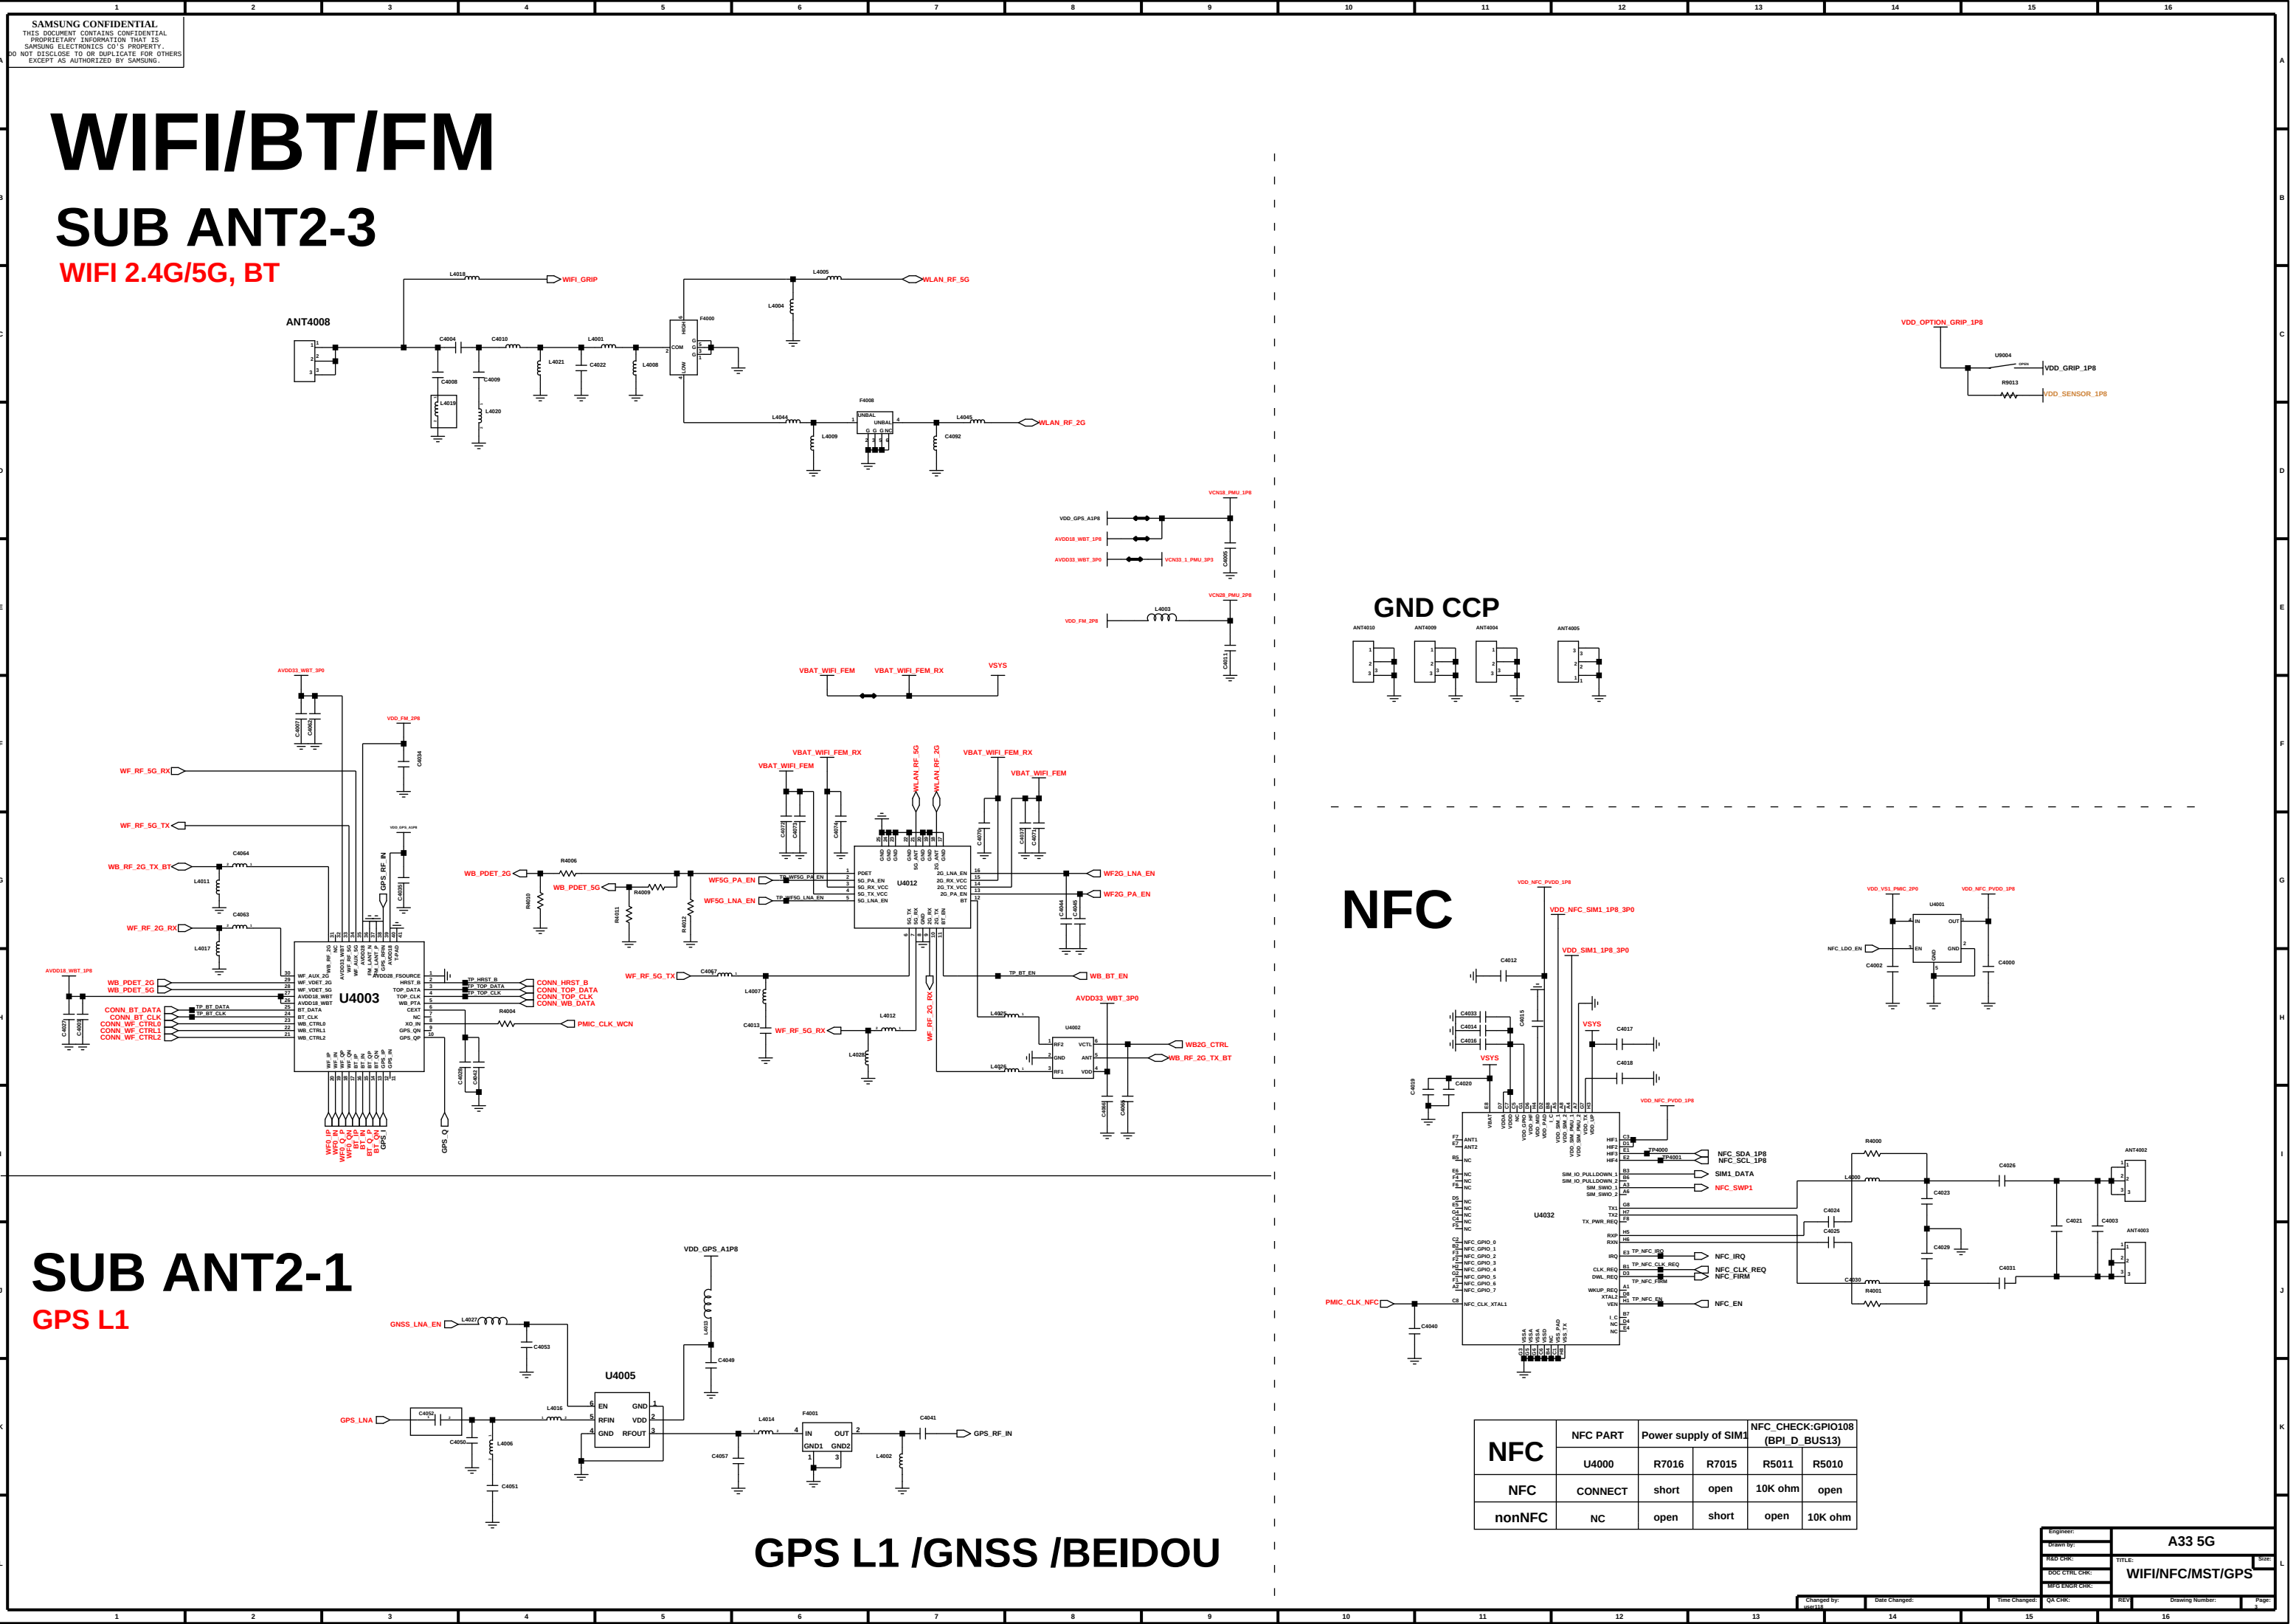


MT6835

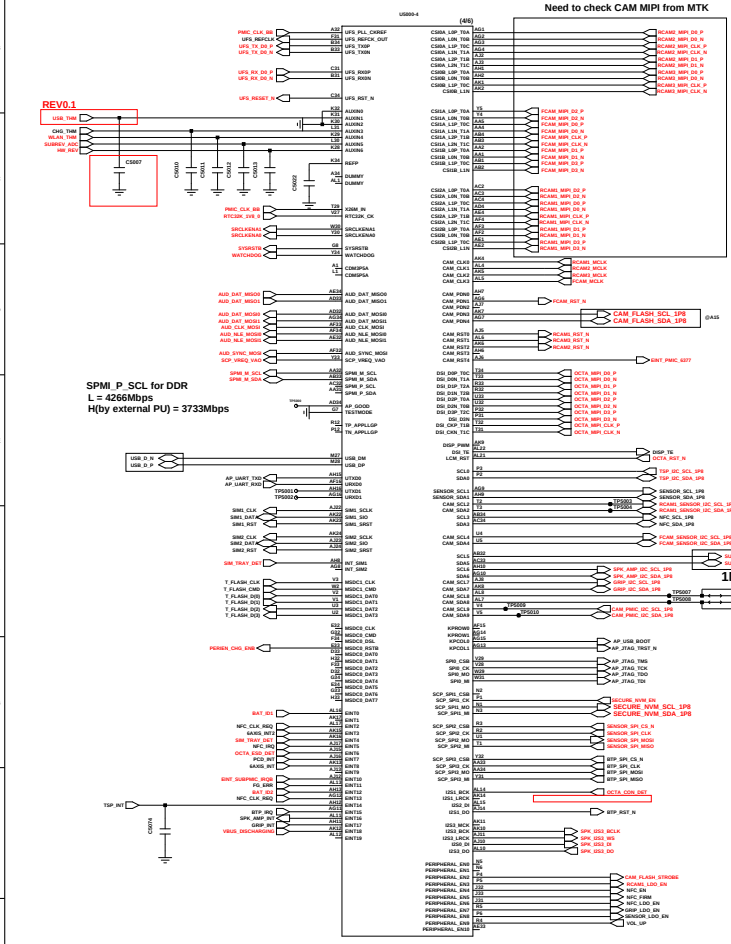



H/W ID TABLE (A156U)

HW ID	PCB REV	HW_REV1	R1	R2	VALUE	COMMENT
00	BringUp	L	100K	12K	0.19	BringUp
01	0.0	L	100K	20K	0.3	PreDV
02	0.1	L	100K	30K	0.42	DV1
03	0.2	L	100K	51K	0.61	DV2
04	0.3	L	100K	100K	0.82	PV1
05	0.4	L	100K	120K	0.98	PV2
06	0.4 (PVR)	L	100K	220K	1.24	PVR
07		L	100K	422K	1.45	
08			100K			
09			100K			
10			100K			
11			100K			
12			100K			

PCB JTAG

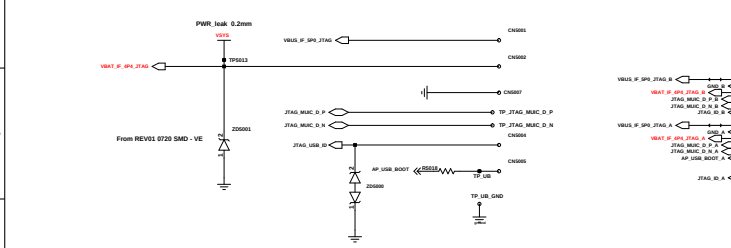


POWER OFF LEAKAG

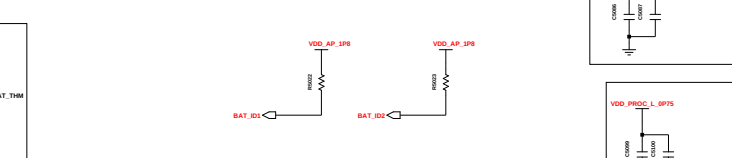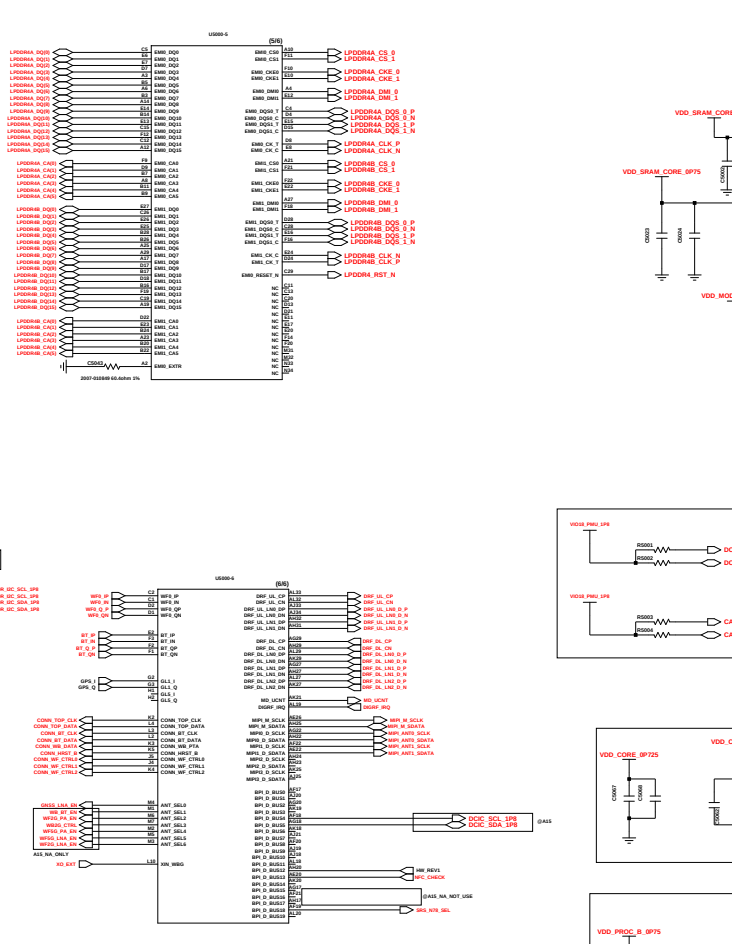



NFC OPTION

HW ID	PCB REV	HW_REV1	R1	R2	VALUE	COMMENT
00	BringUp	L	100K	12K	0.19	BringUp
01	0.0	L	100K	20K	0.3	PreDV
02	0.1	L	100K	30K	0.42	DV1
03	0.2	L	100K	51K	0.61	DV2
04	0.3	L	100K	100K	0.82	PV1
05	0.4	L	100K	120K	0.98	PV2
06	0.4 (PVR)	L	100K	220K	1.24	PVR
07		L	100K	422K	1.45	
08			100K			
09			100K			
10			100K			
11			100K			
12			100K			

PCB JTAG

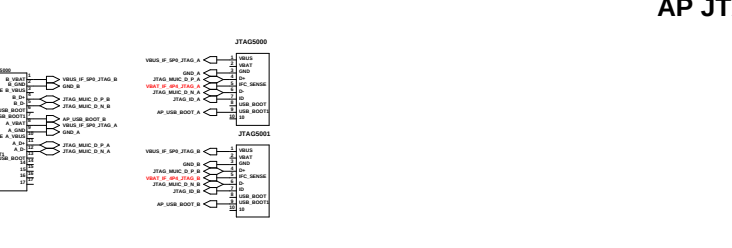


PCB JTAG

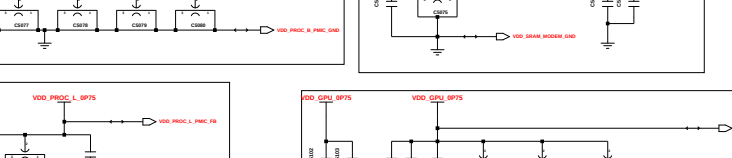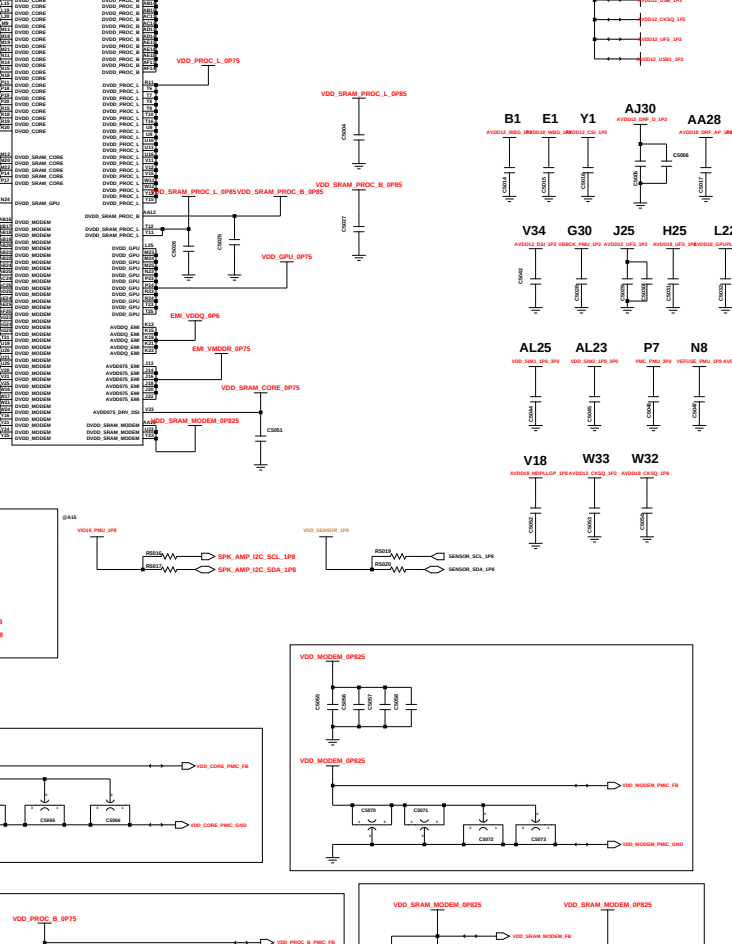



NFC OPTION

HW ID	PCB REV	HW_REV1	R1	R2	VALUE	COMMENT
00	BringUp	L	100K	12K	0.19	BringUp
01	0.0	L	100K	20K	0.3	PreDV
02	0.1	L	100K	30K	0.42	DV1
03	0.2	L	100K	51K	0.61	DV2
04	0.3	L	100K	100K	0.82	PV1
05	0.4	L	100K	120K	0.98	PV2
06	0.4 (PVR)	L	100K	220K	1.24	PVR
07		L	100K	422K	1.45	
08			100K			
09			100K			
10			100K			
11			100K			
12			100K			

PCB JTAG

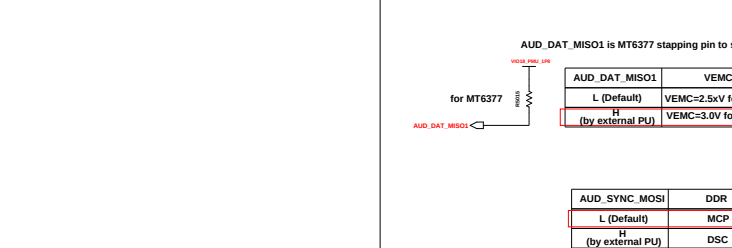

PCB JTAG

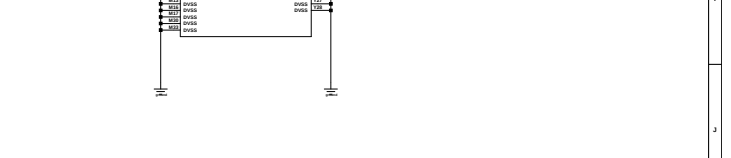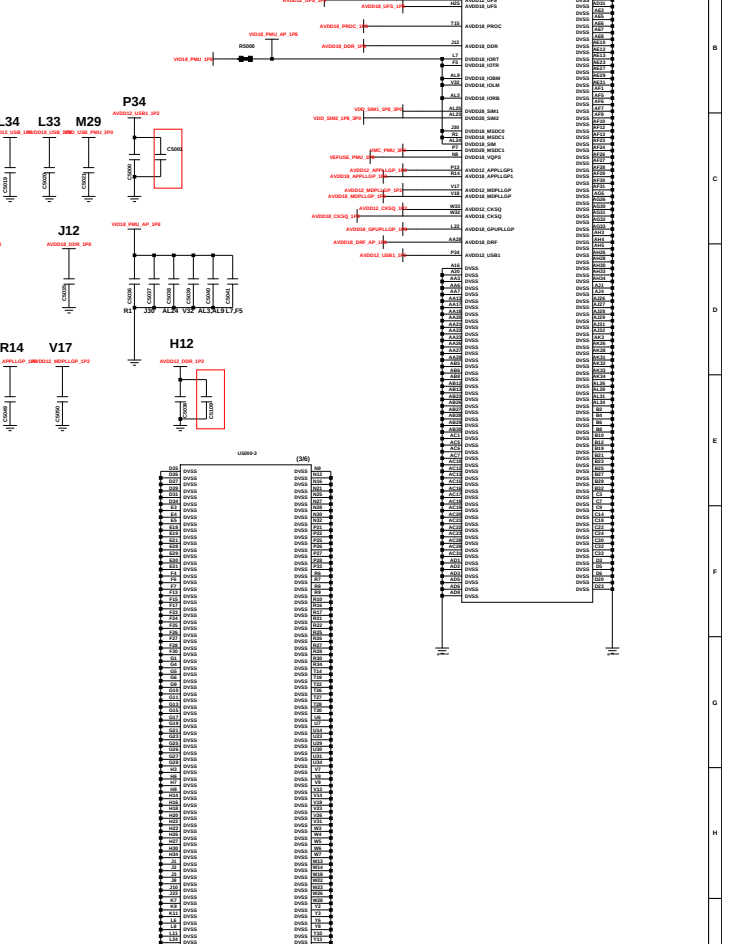

NFC OPTION

HW ID	PCB REV	HW_REV1	R1	R2	VALUE	COMMENT
00	BringUp	L	100K	12K	0.19	BringUp
01	0.0	L	100K	20K	0.3	PreDV
02	0.1	L	100K	30K	0.42	DV1
03	0.2	L	100K	51K	0.61	DV2
04	0.3	L	100K	100K	0.82	PV1
05	0.4	L	100K	120K	0.98	PV2
06	0.4 (PVR)	L	100K	220K	1.24	PVR
07		L	100K	422K	1.45	
08			100K			
09			100K			
10			100K			
11			100K			
12			100K			

PCB JTAG



PCB JTAG

Default meaning is AP internal setting, so no need external PU/ID


AUD_DAT_MISO0	AUD_DAT_MOSI1	AP JTAG	IO JTAG	DAP_SONIC/DAP_MD32
L (Default)	L (Default)	N/A	N/A	N/A
L (Default)	H (by external PU)	SPI0_CS, SPI0_CLK, SPI0_MO SPI0_MI, KPCOL1	N/A	N/A
H (by external PU)	L (Default)	SPI0_CS, SPI0_CLK, SPI0_MO SPI0_MI, KPCOL1	EINT[8:12]	N/A
H (by external P)	H (by external PU)	N/A	N/A	N/A

EINT1	PERIPHERAL_EN10	Storage Booting
L (Default)	L (Default)	only UFS boot
L (Default)	H (by external PU)	only eMMC boot
H (by external PU)	H (by external PU)	Reserved

AUD_DAT_MISO1 is MT6377 stapping pin to select VEMC Voltage

AUD_DAT_MISO1	VEMC Voltage
L (Default)	VEMC=2.5V for UFS3.1 device
H (by external PU)	VEMC=3.0V for UFS2.x device

AUD_SYNC_MOSI	DDR
L (Default)	MCP
H (by external PU)	DSC

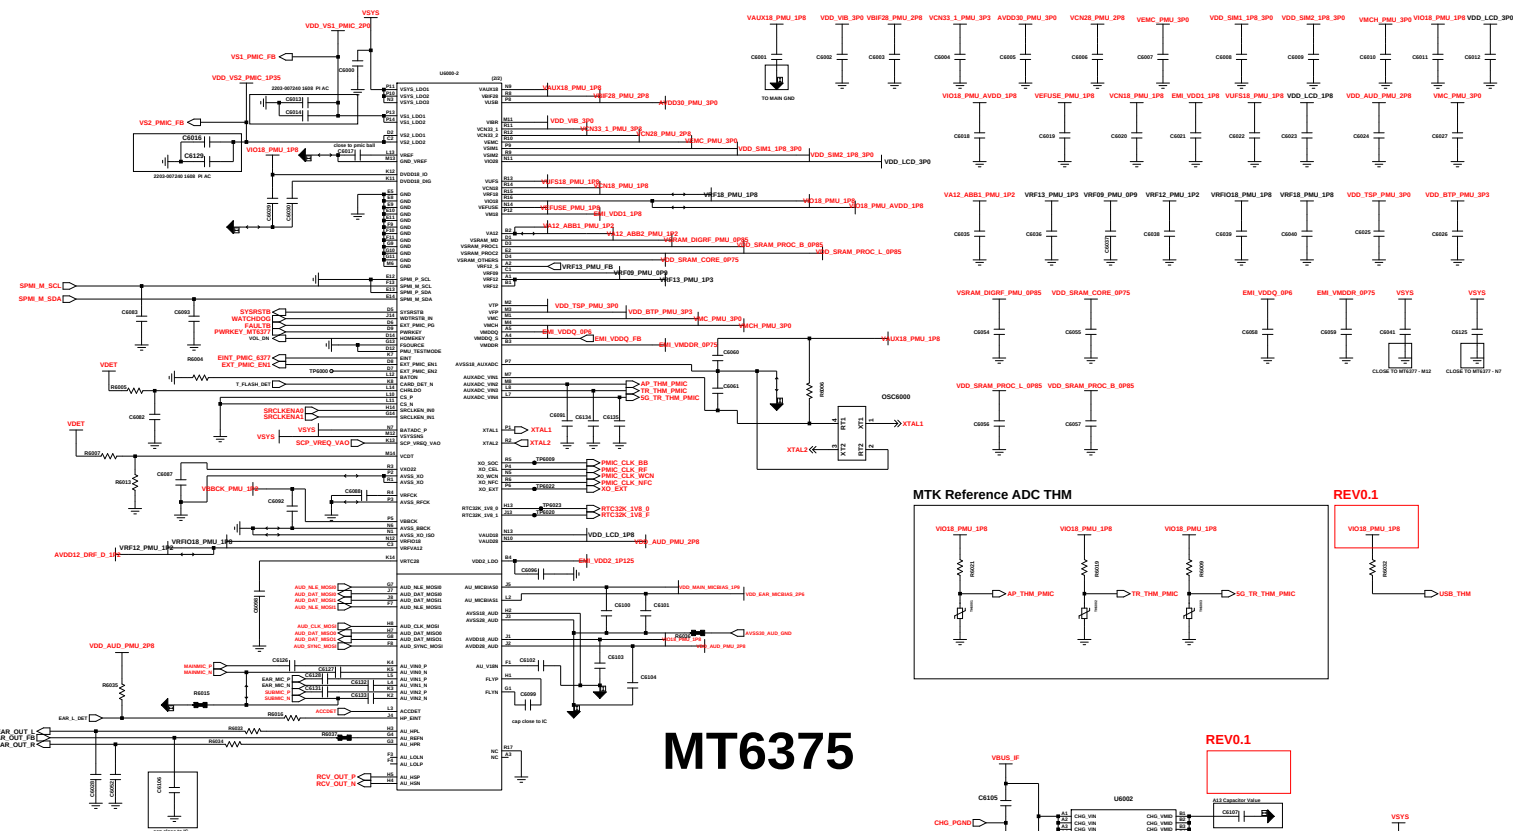
MT6377**MT6319**










UME6000







4GB + 128GB uMCP : 1108-000760 (SEC)
6GB + 128GB uMCP : 1108-000748 (SEC)
8GB + 128GB uMCP : 1108-000749 (SEC)
8GB + 256GB uMCP : 1108-000750 (SEC)

DIRECT CHARGER SM5461

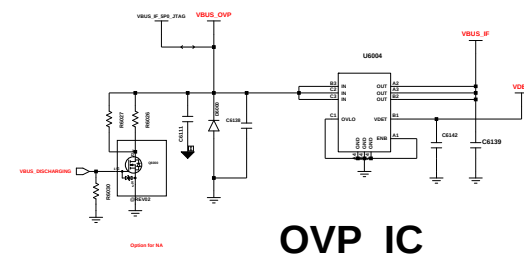

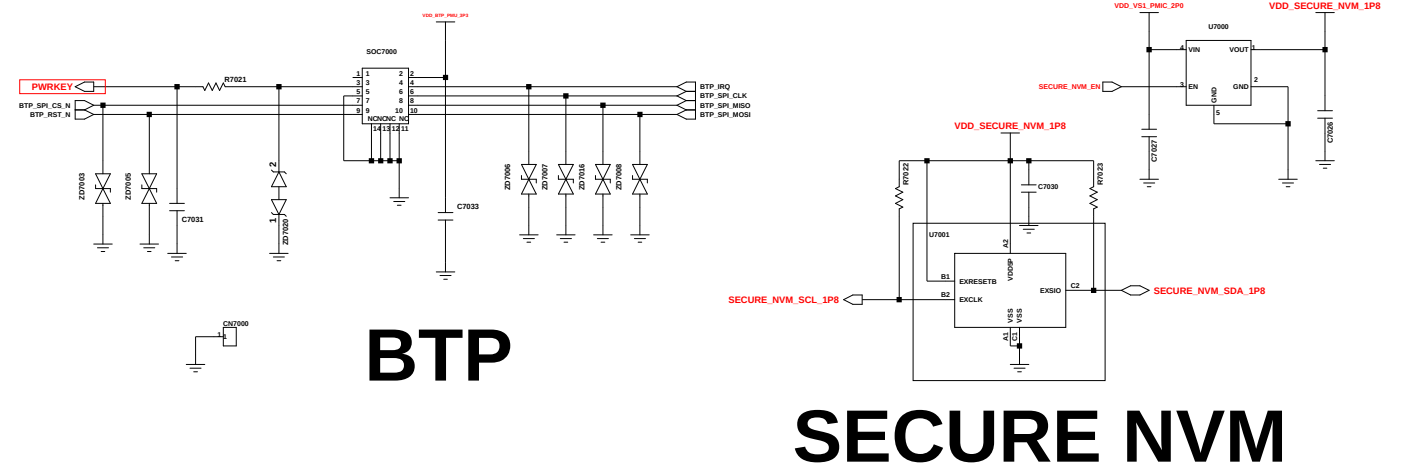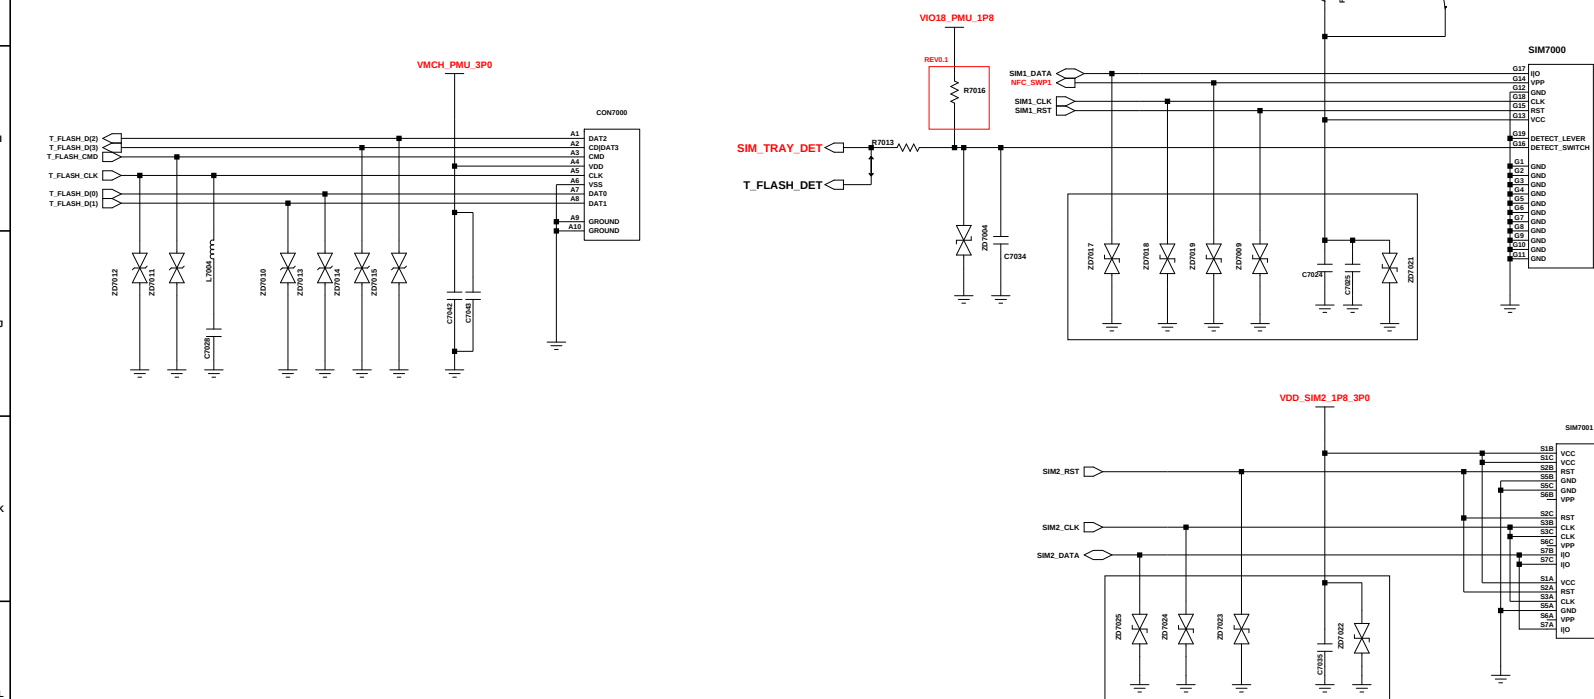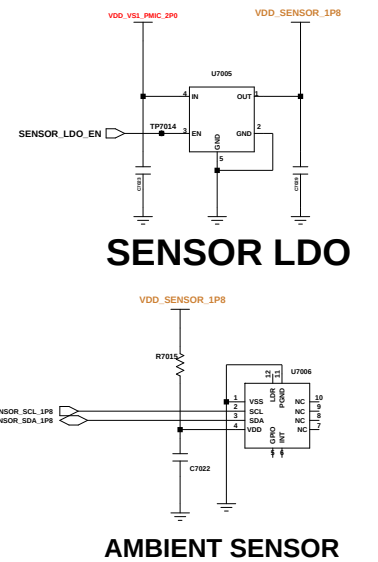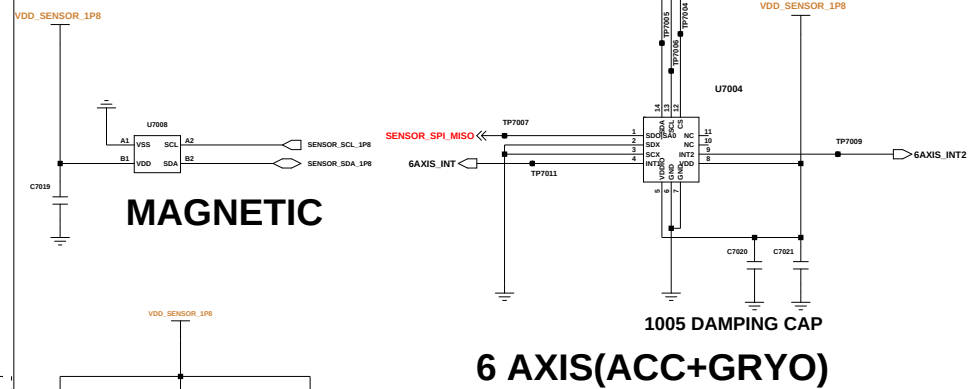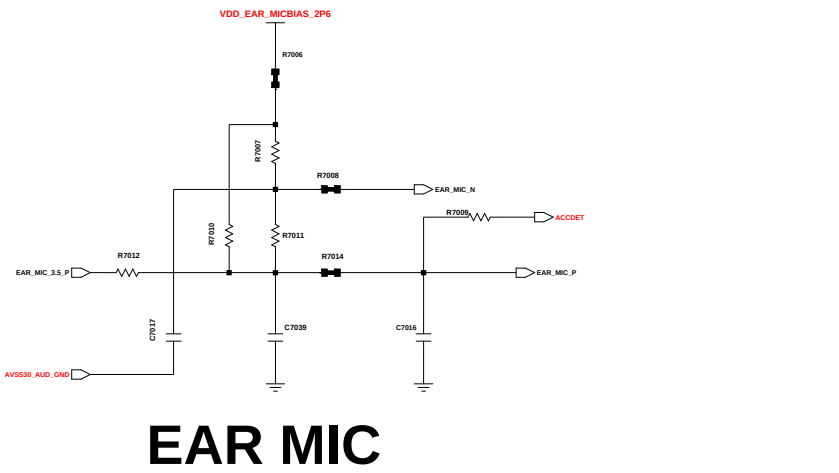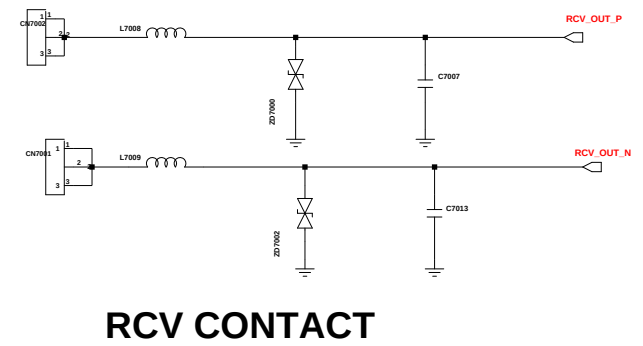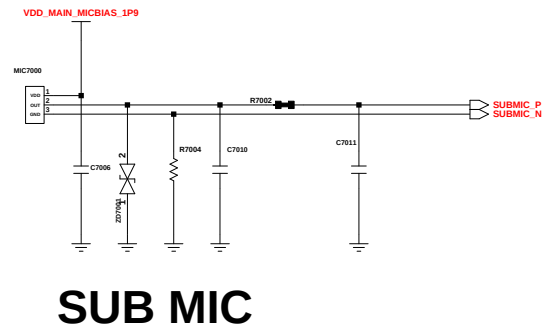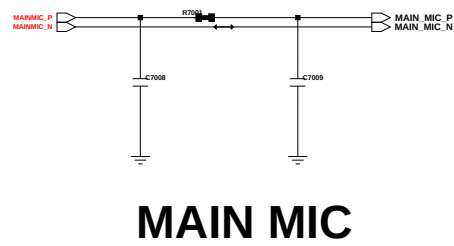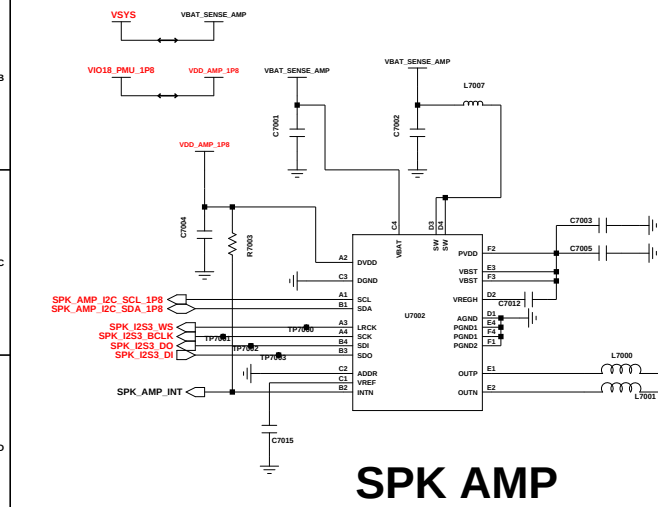

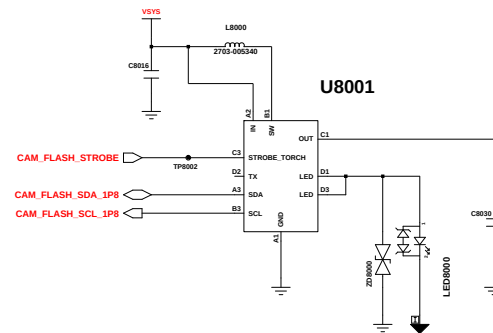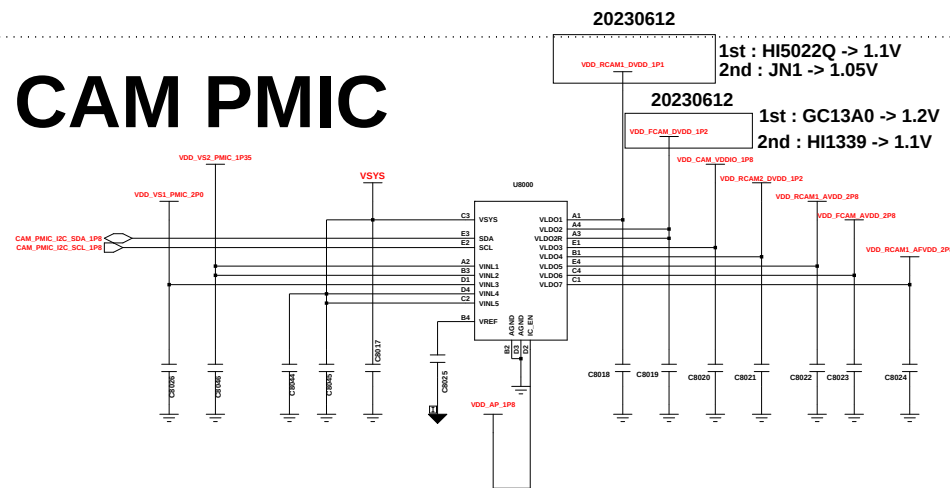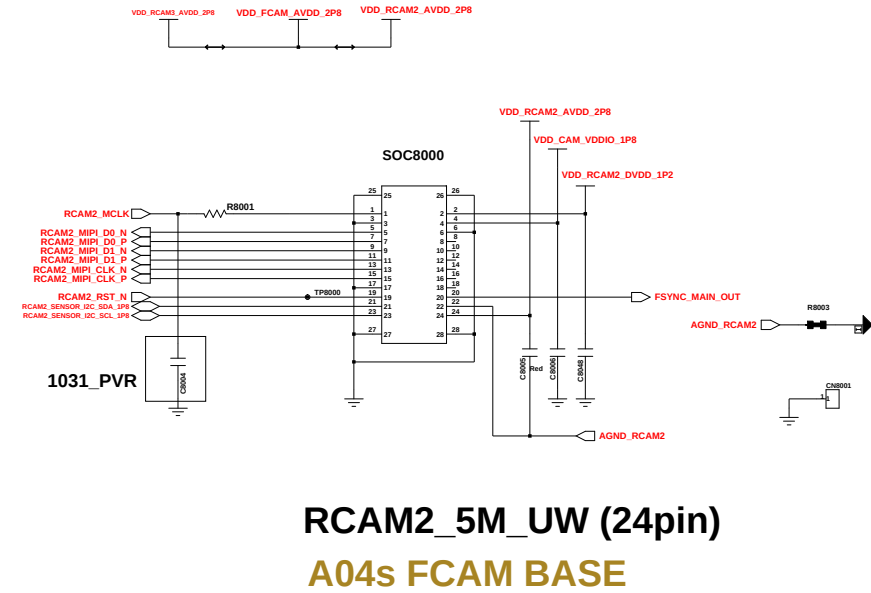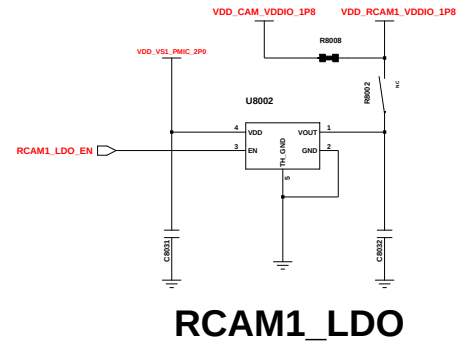


FLASH LED driver IC(new item)
COPY FROM A04s


Engineer:	A33 5G				
Drawn by:					
R&D CHK:				TITLE:	Size:
DOC CTRL CHK:				CAMERA	
MFG ENGR CHK:					
QA CHK:	REV	Drawing Number:	Page:		
			78		
	16				




SM-A156U/U1 Common

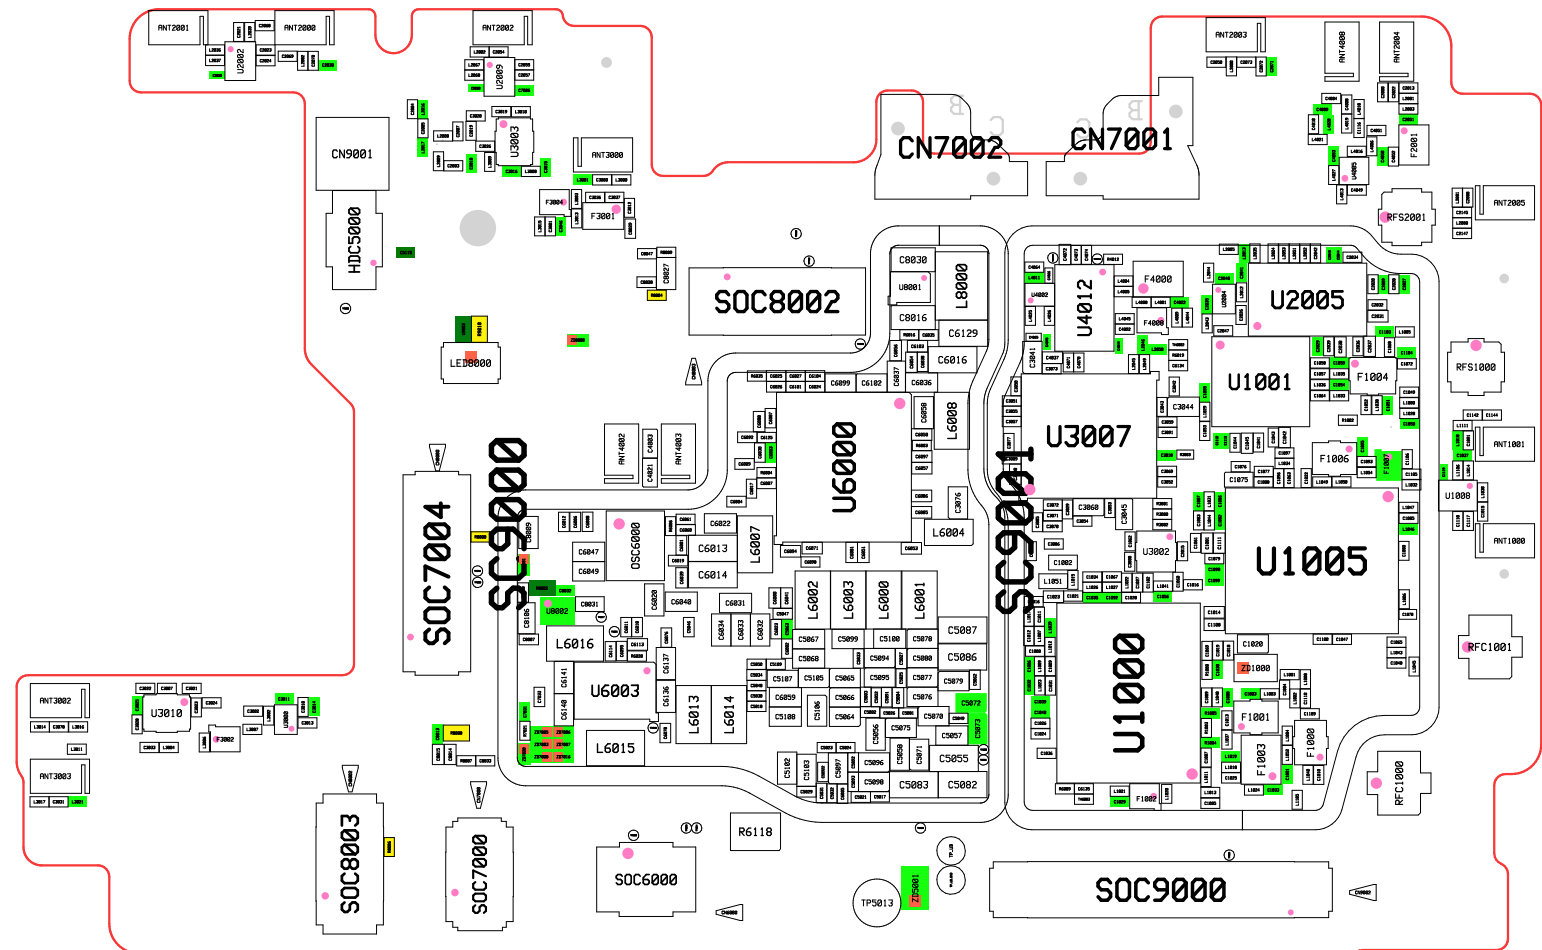

SM-A156U/U1 Common

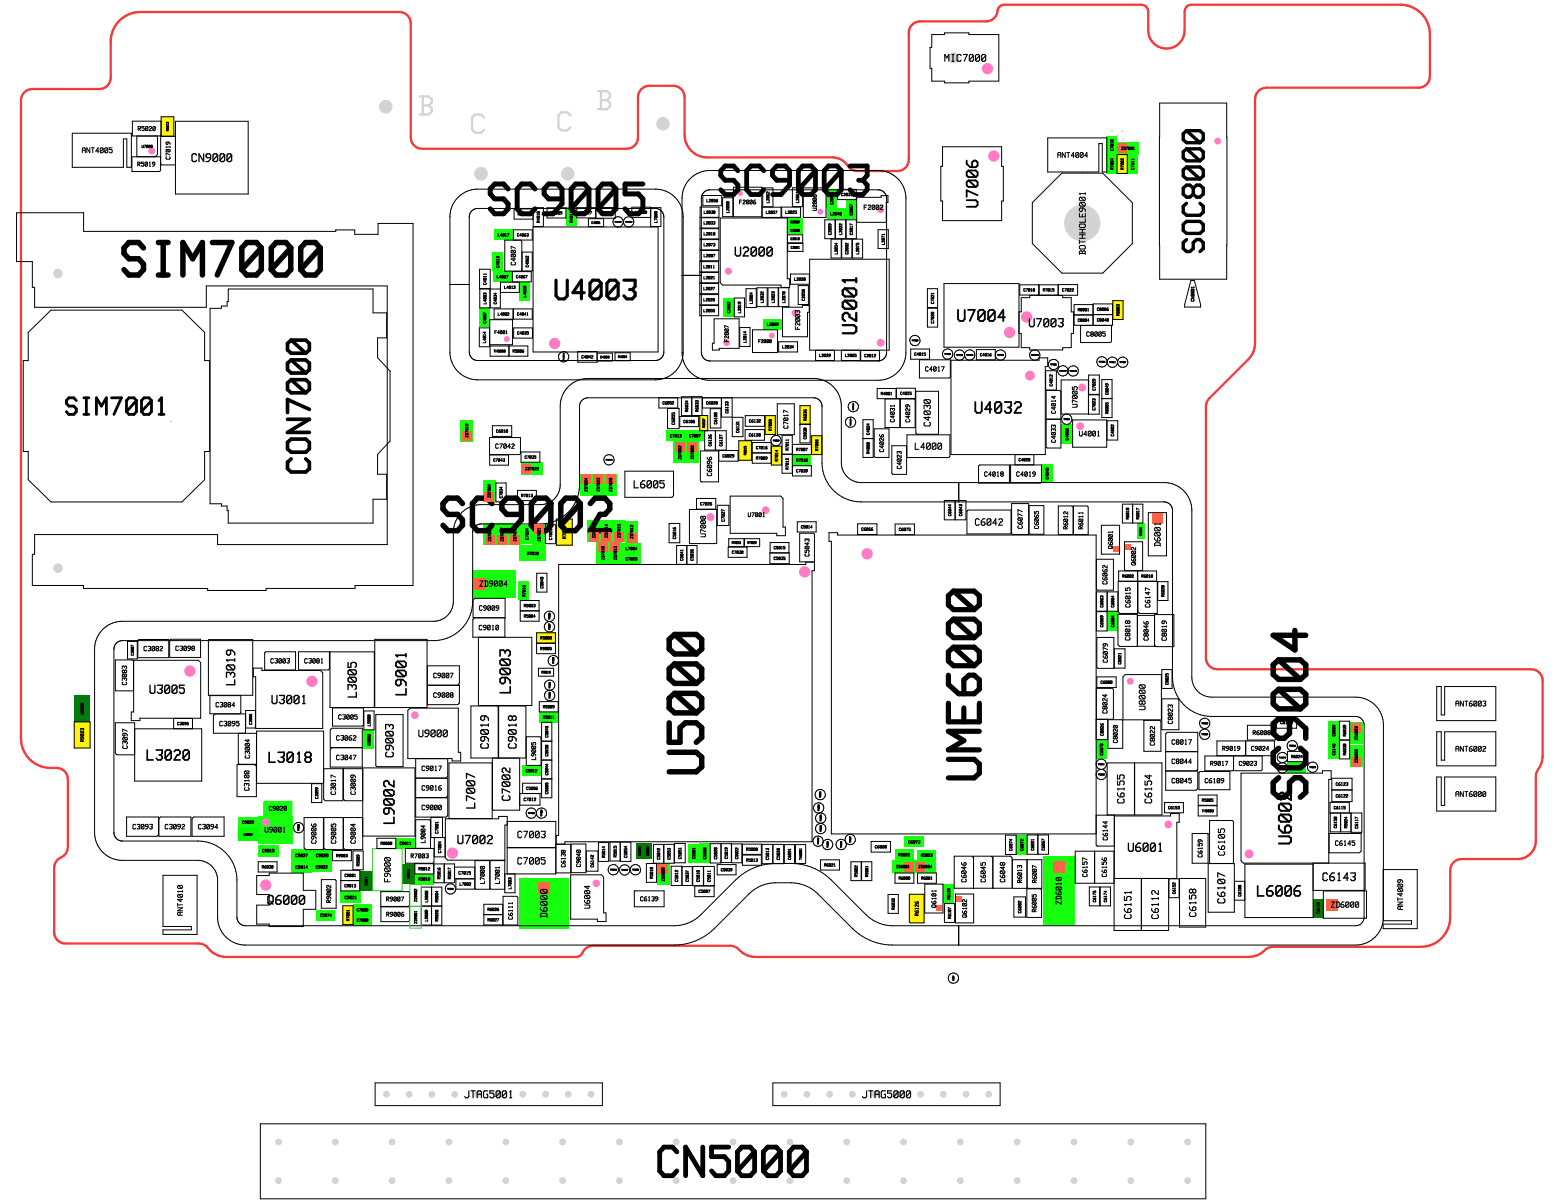

SM-A156U/U1 Common

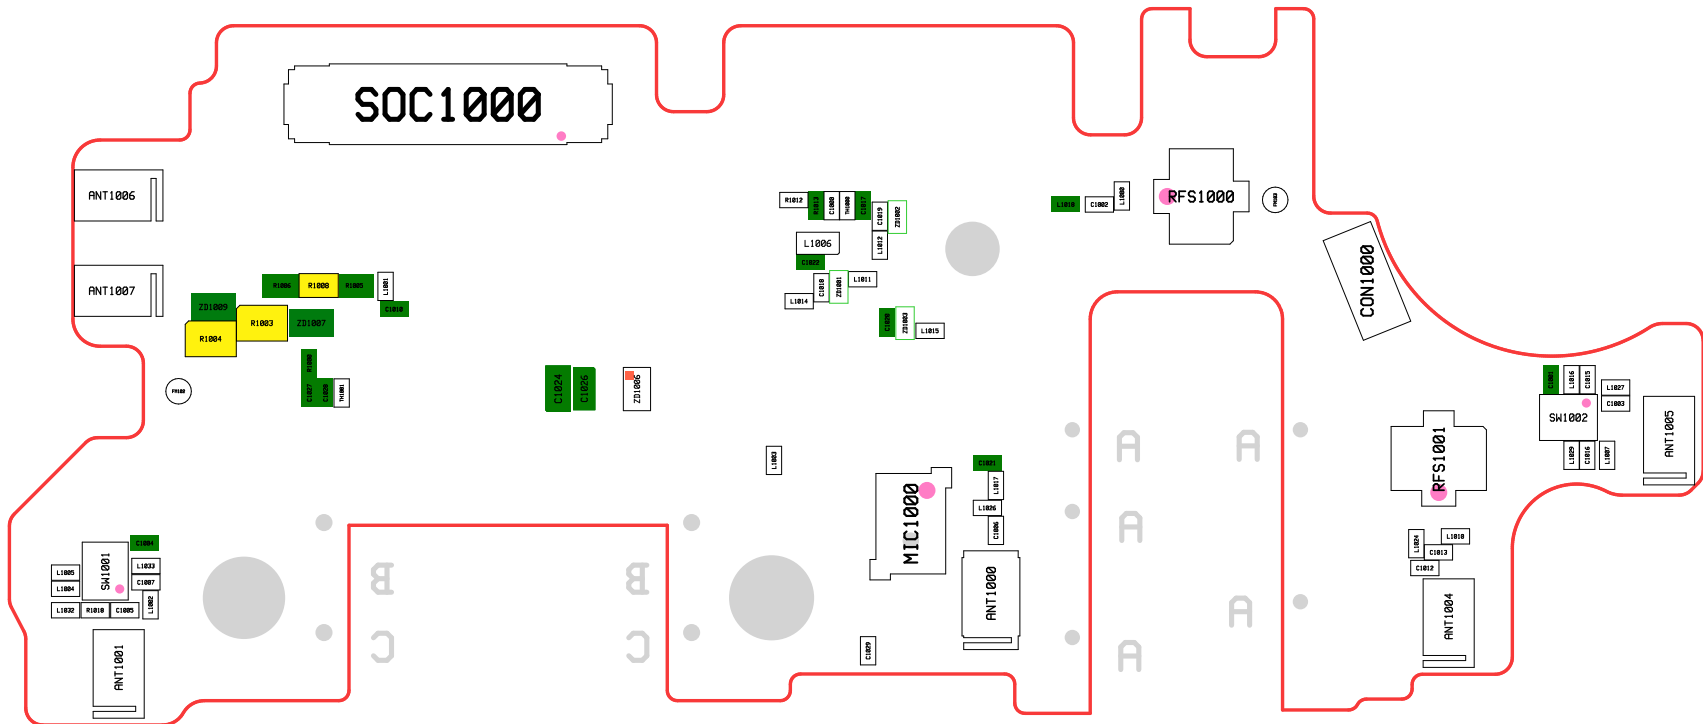

SM-A156U/U1 Common

