

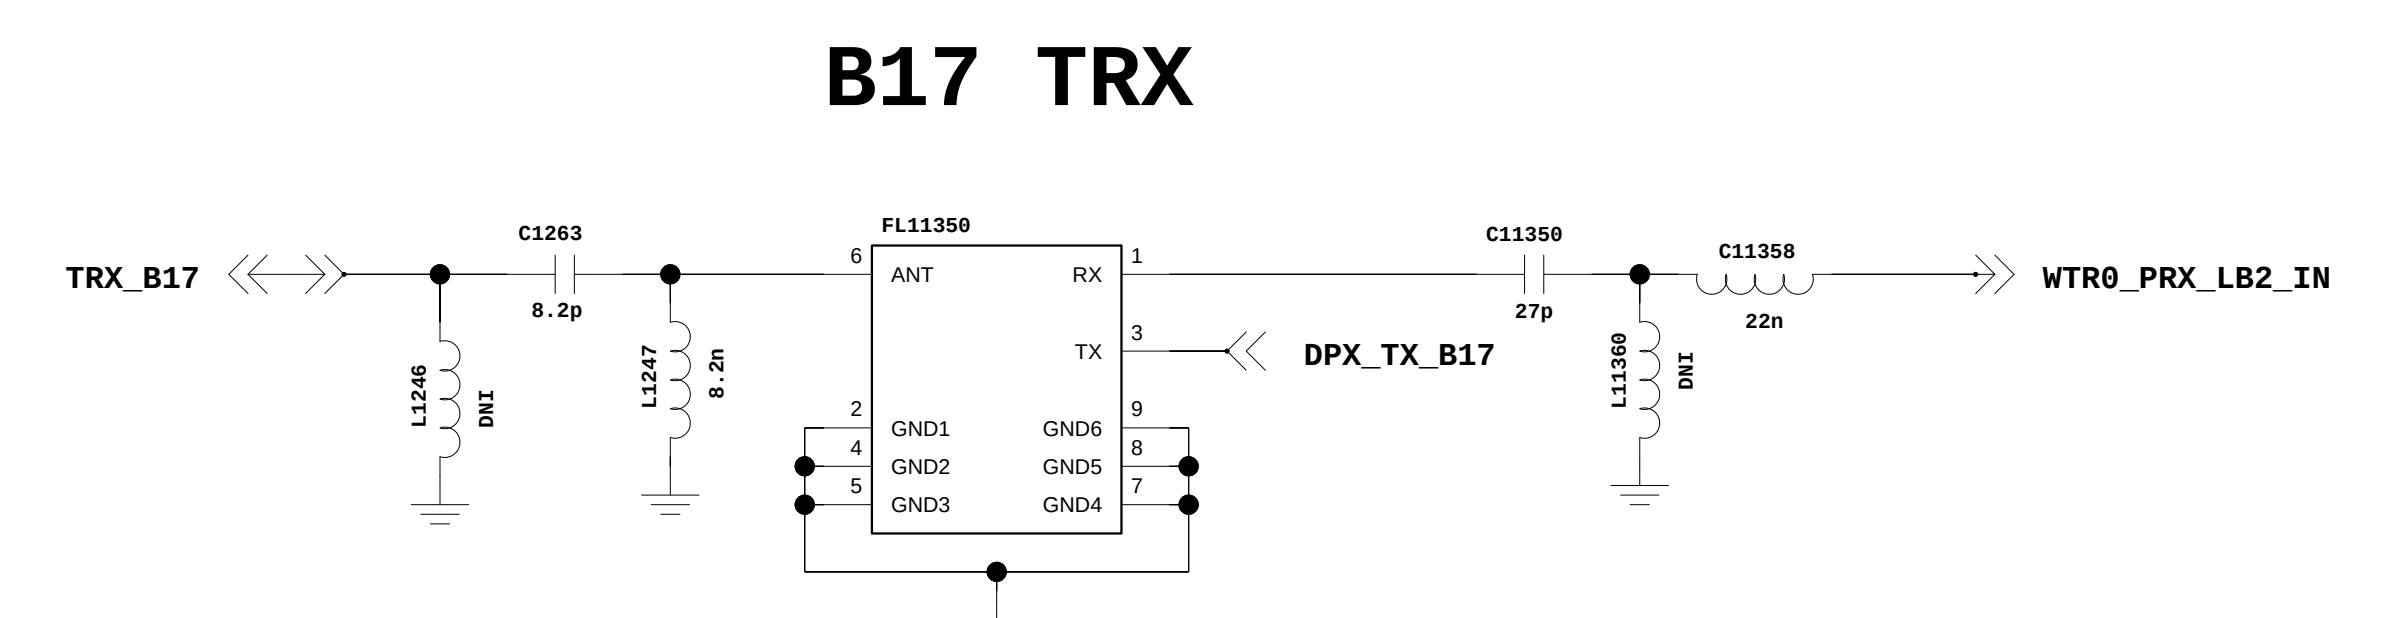
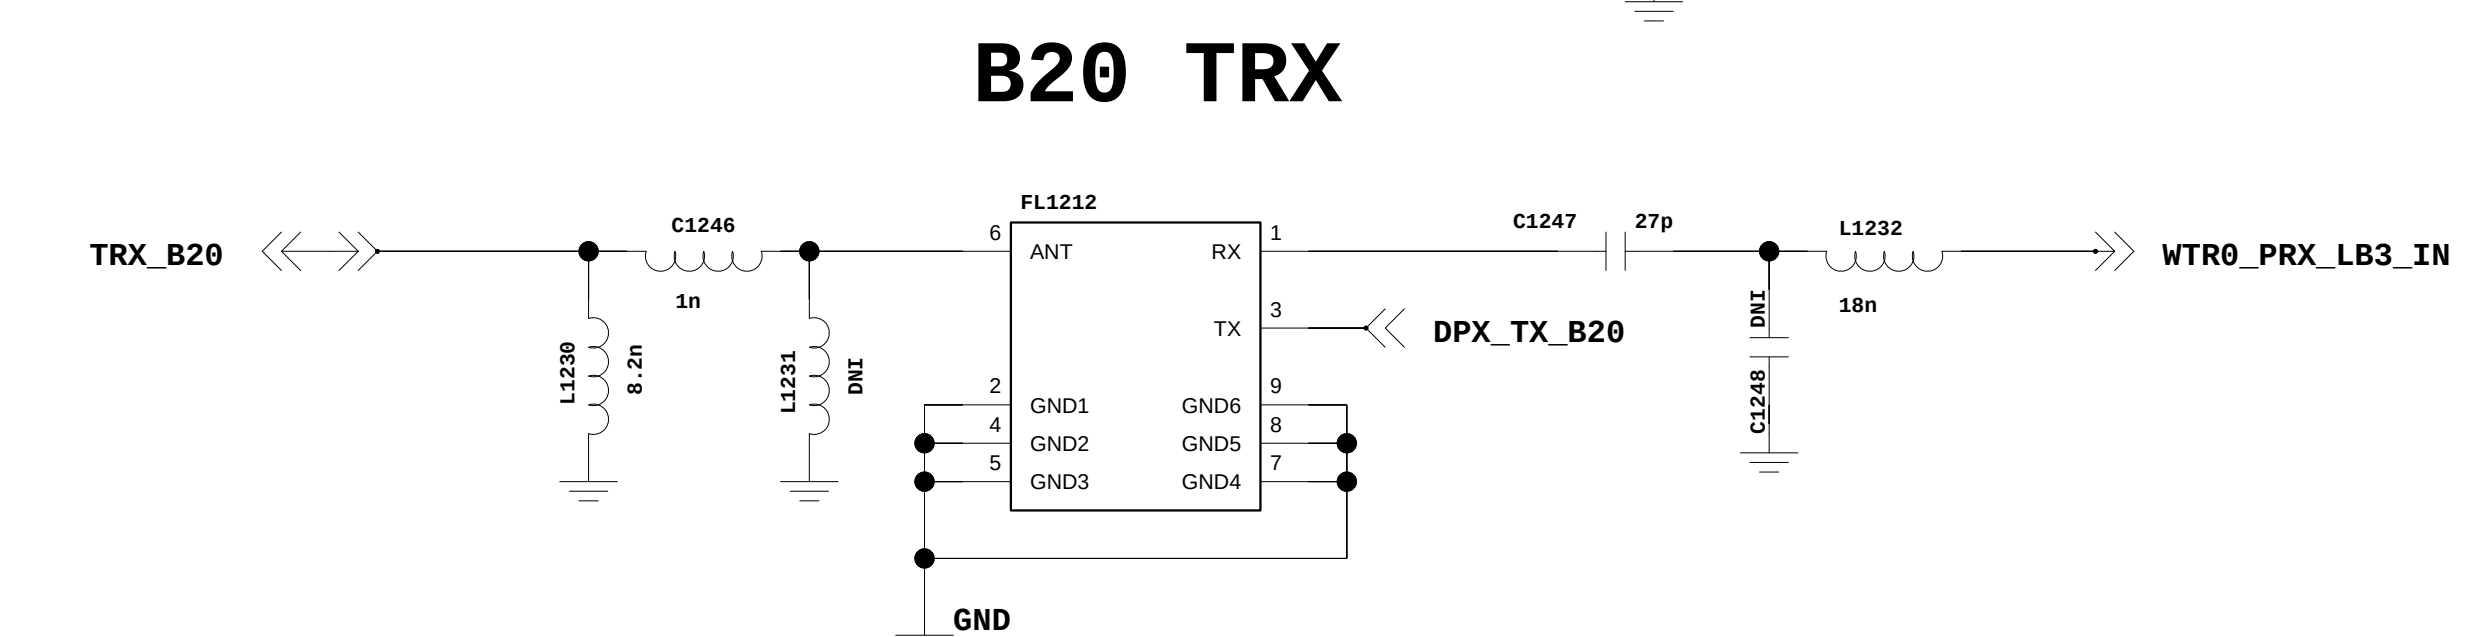
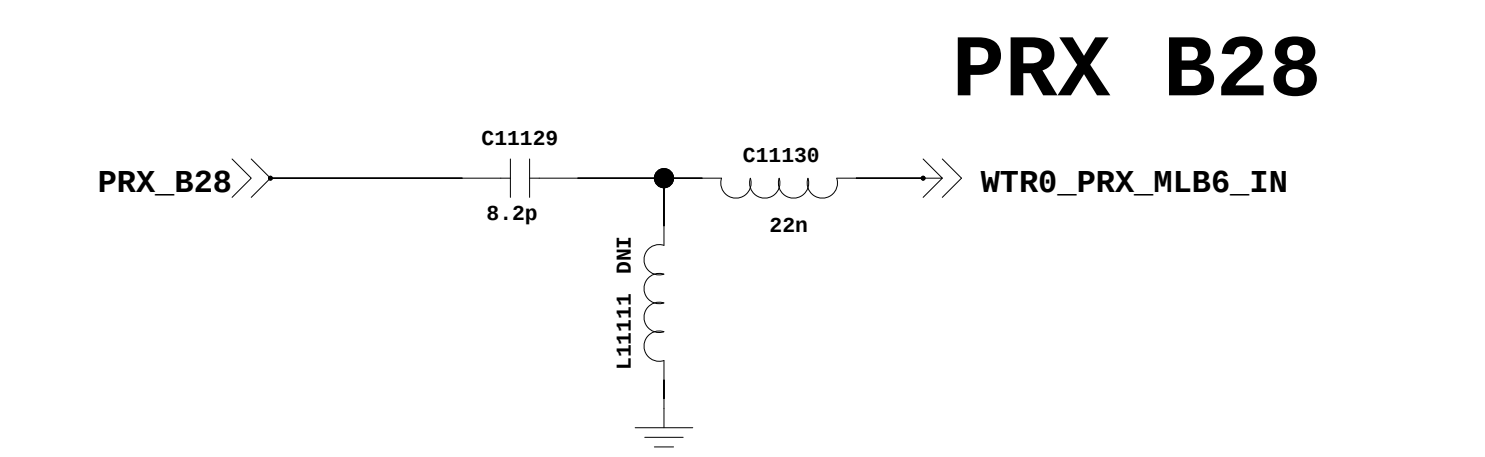
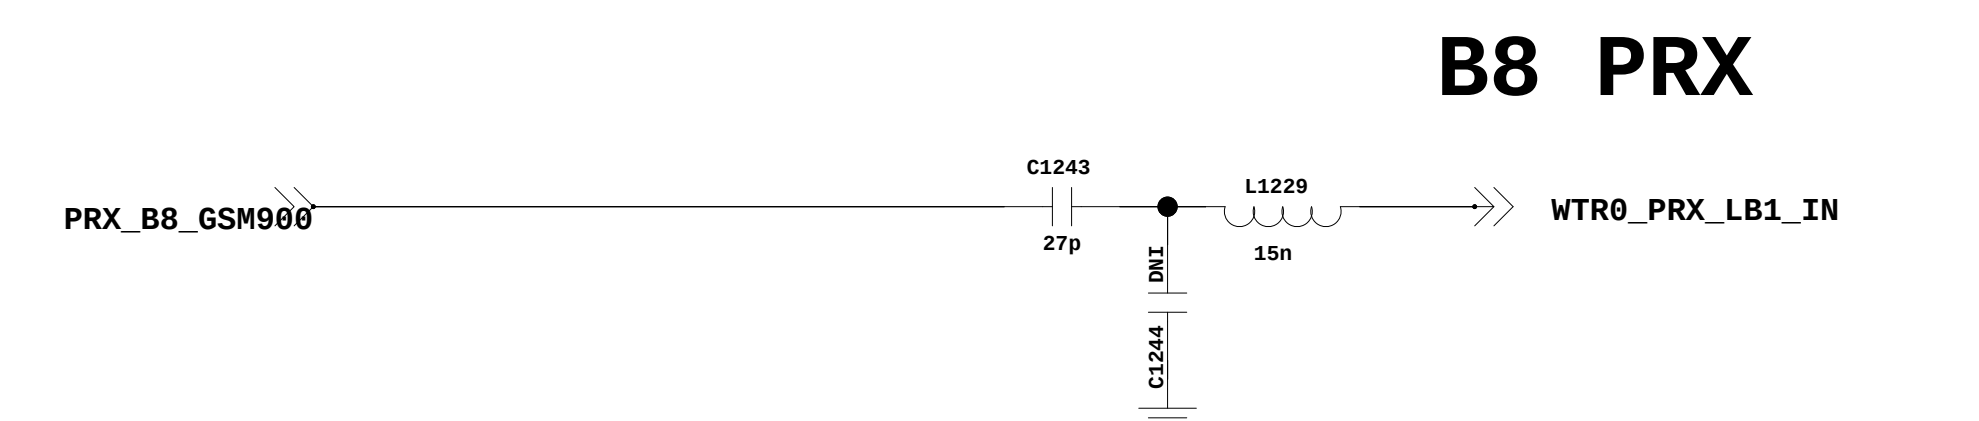
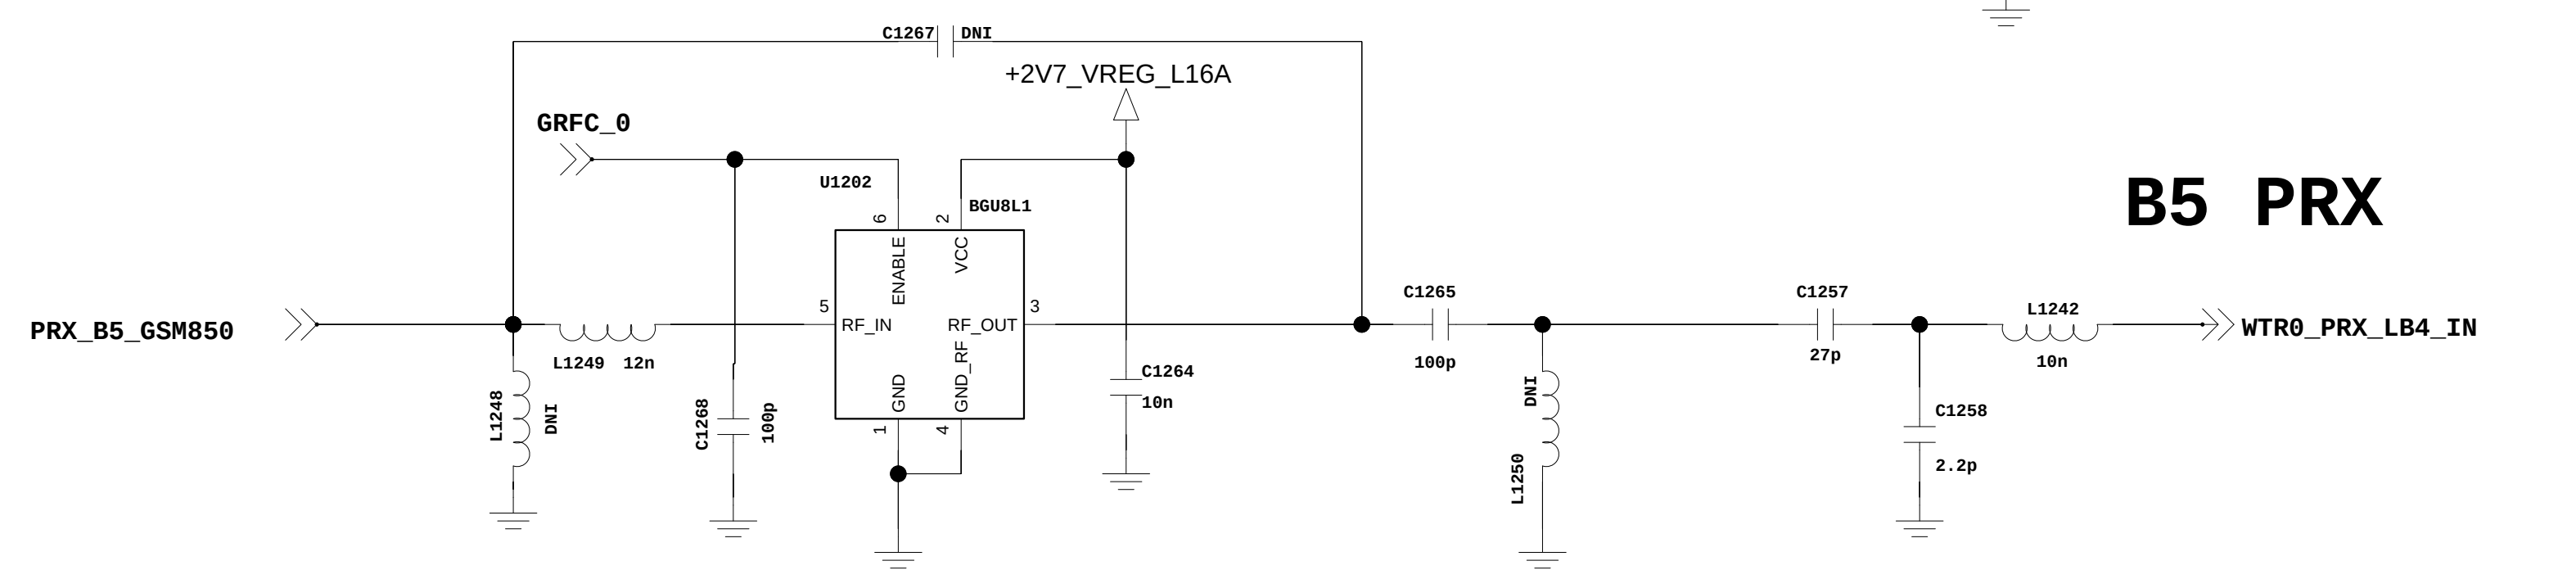
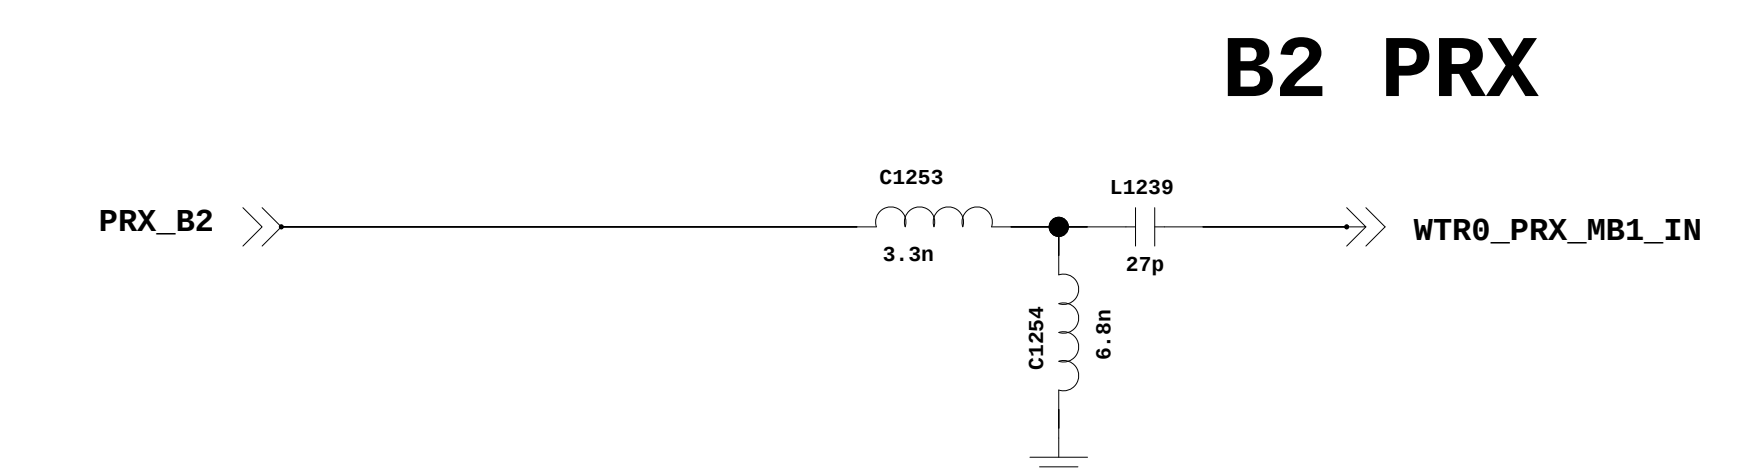
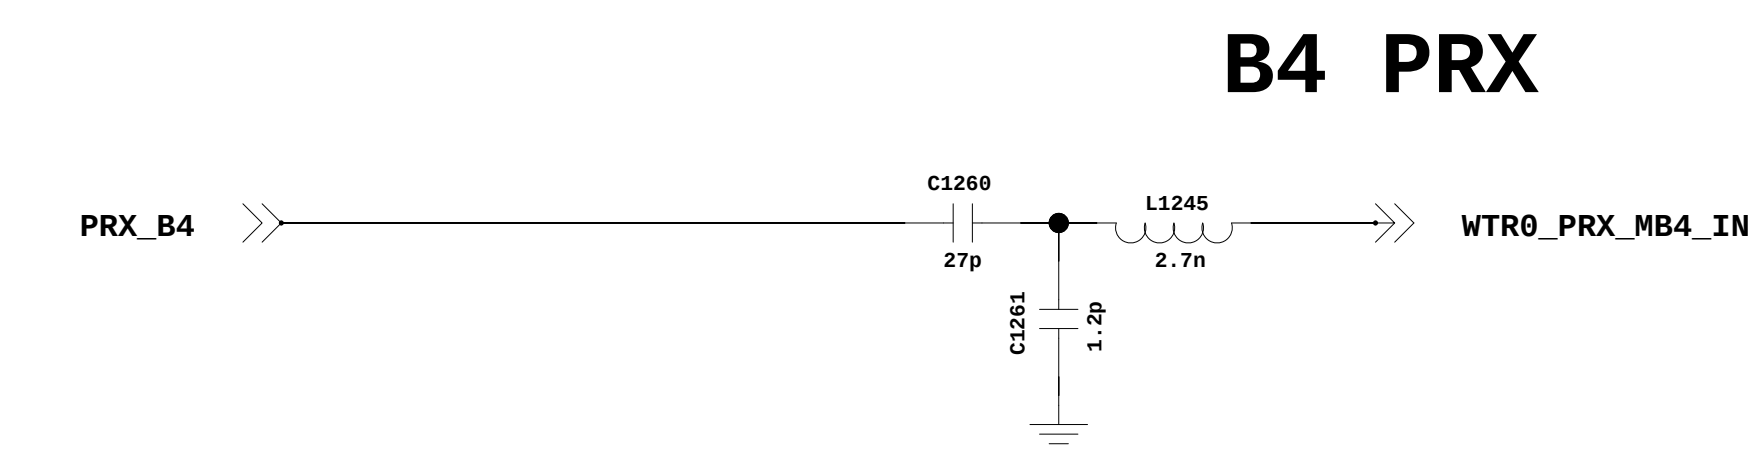
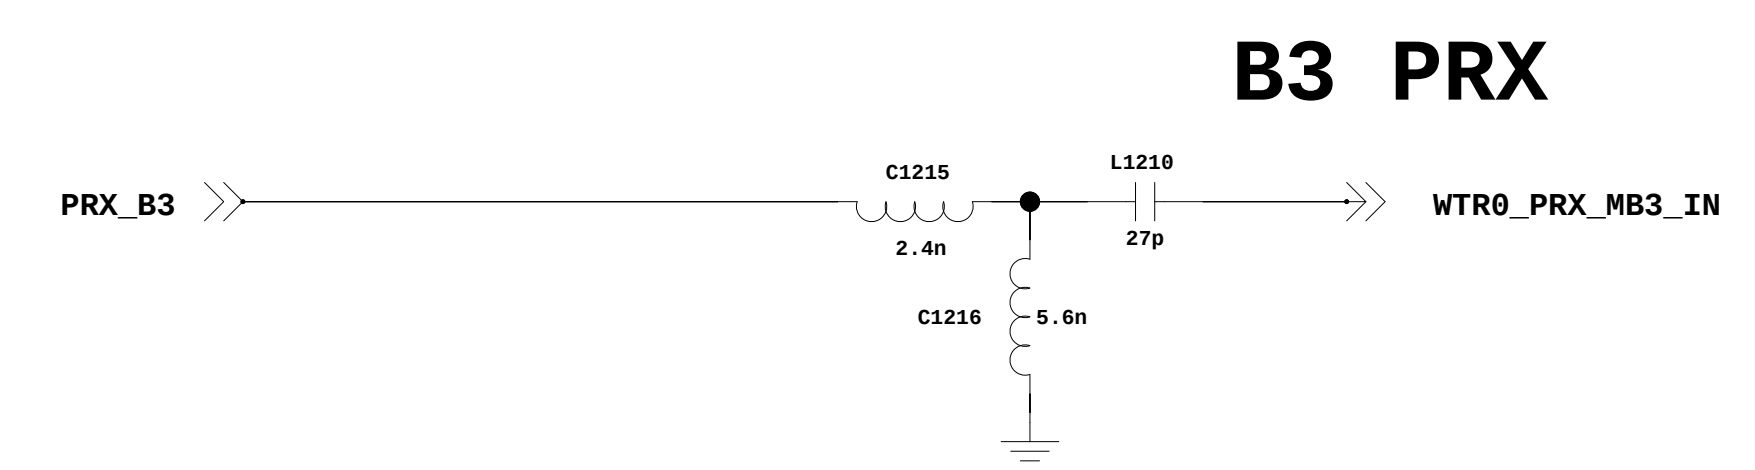
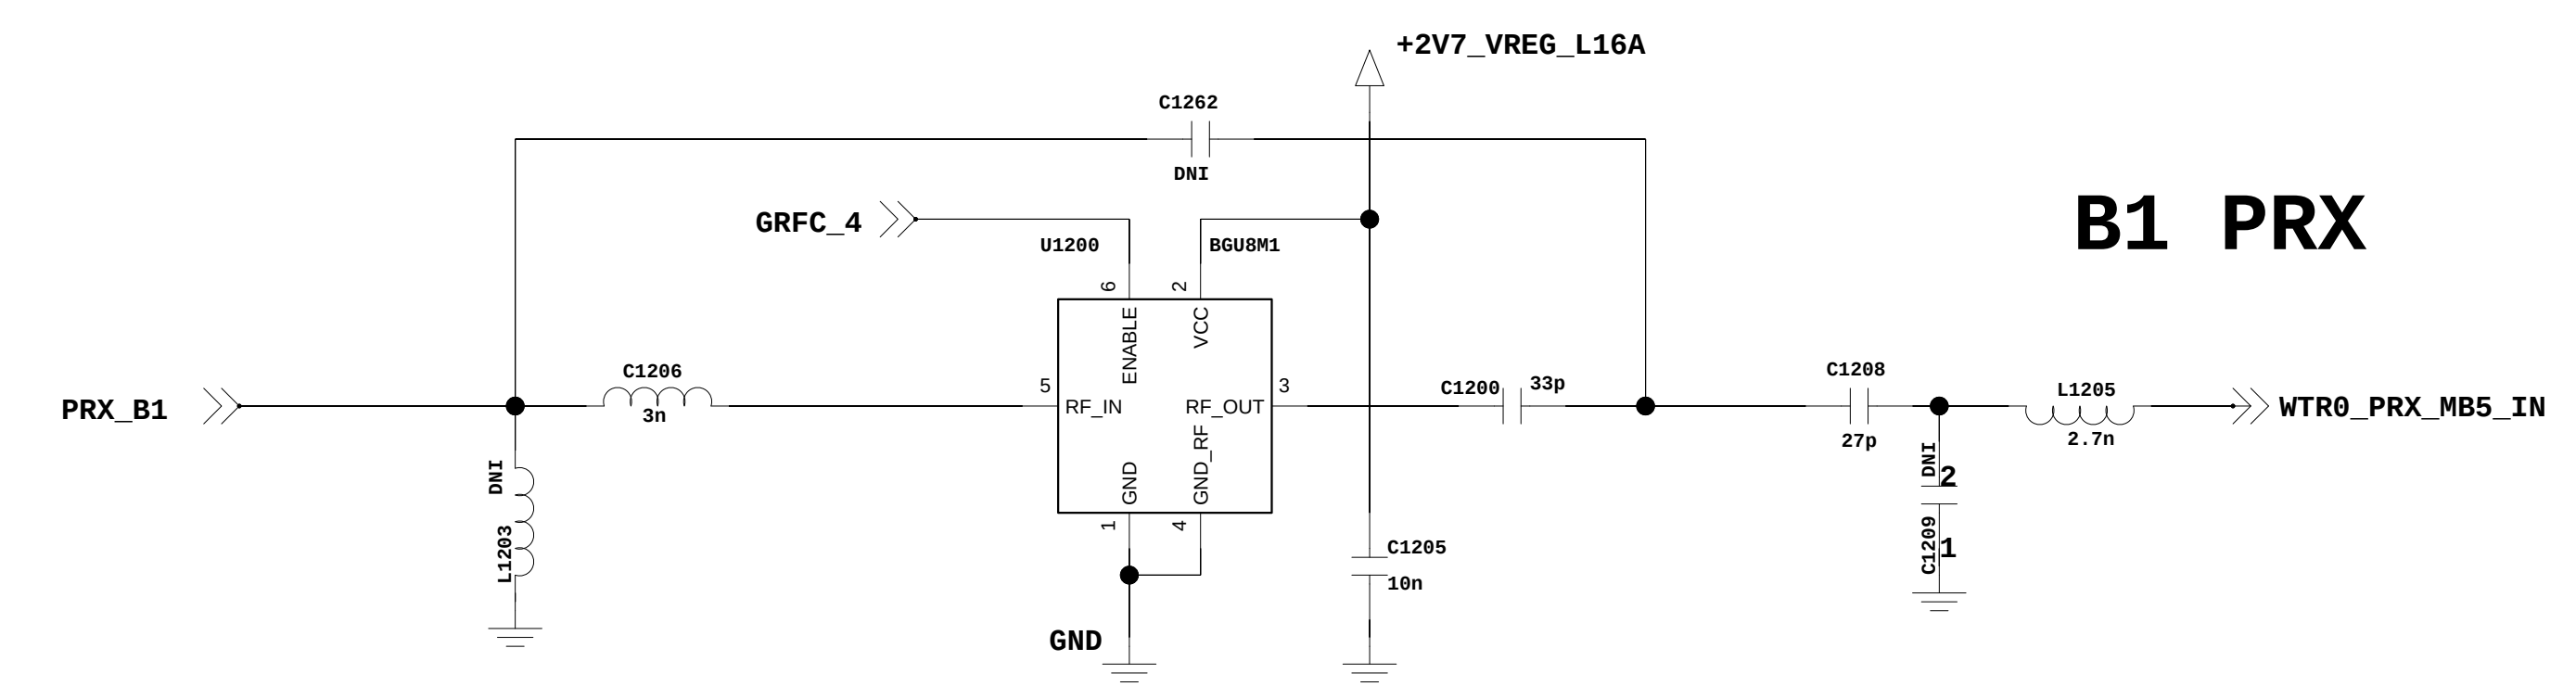


<1-3-2-24_SP8T_SP12T_CABRev_0.3

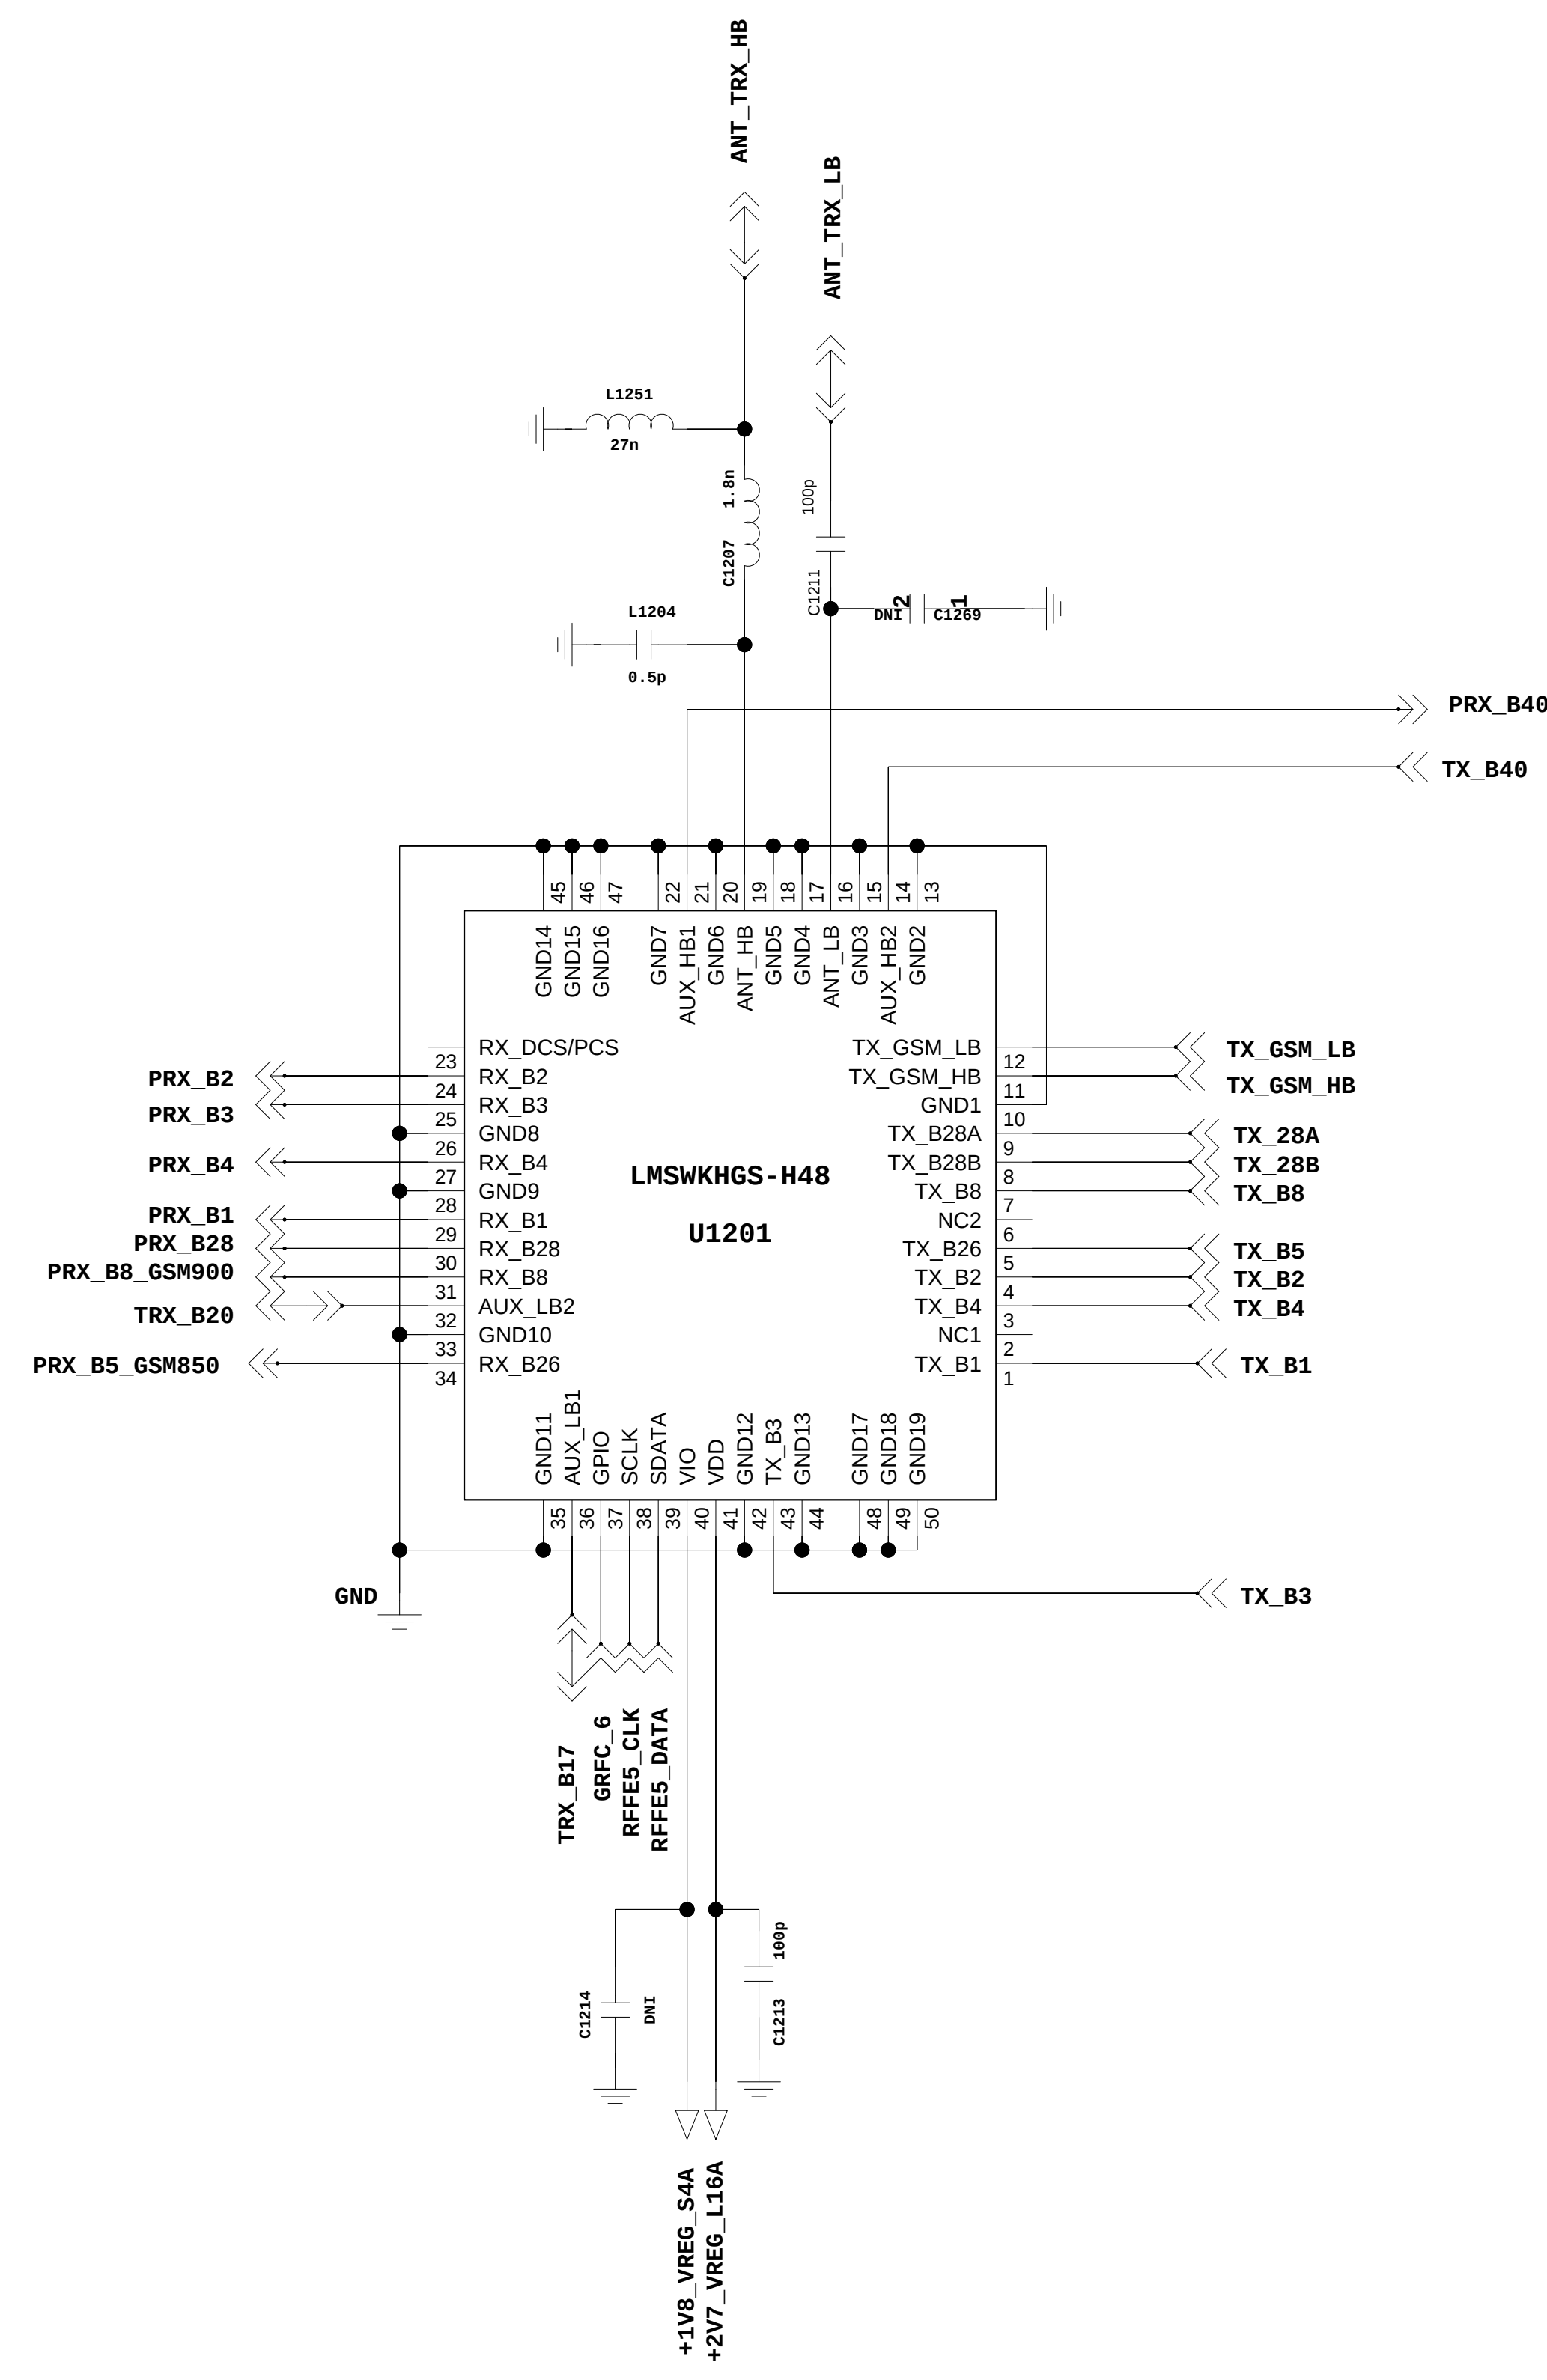


< 1-3-3-4_HCPA_ET_ACPM7617 >

Rev_0.3

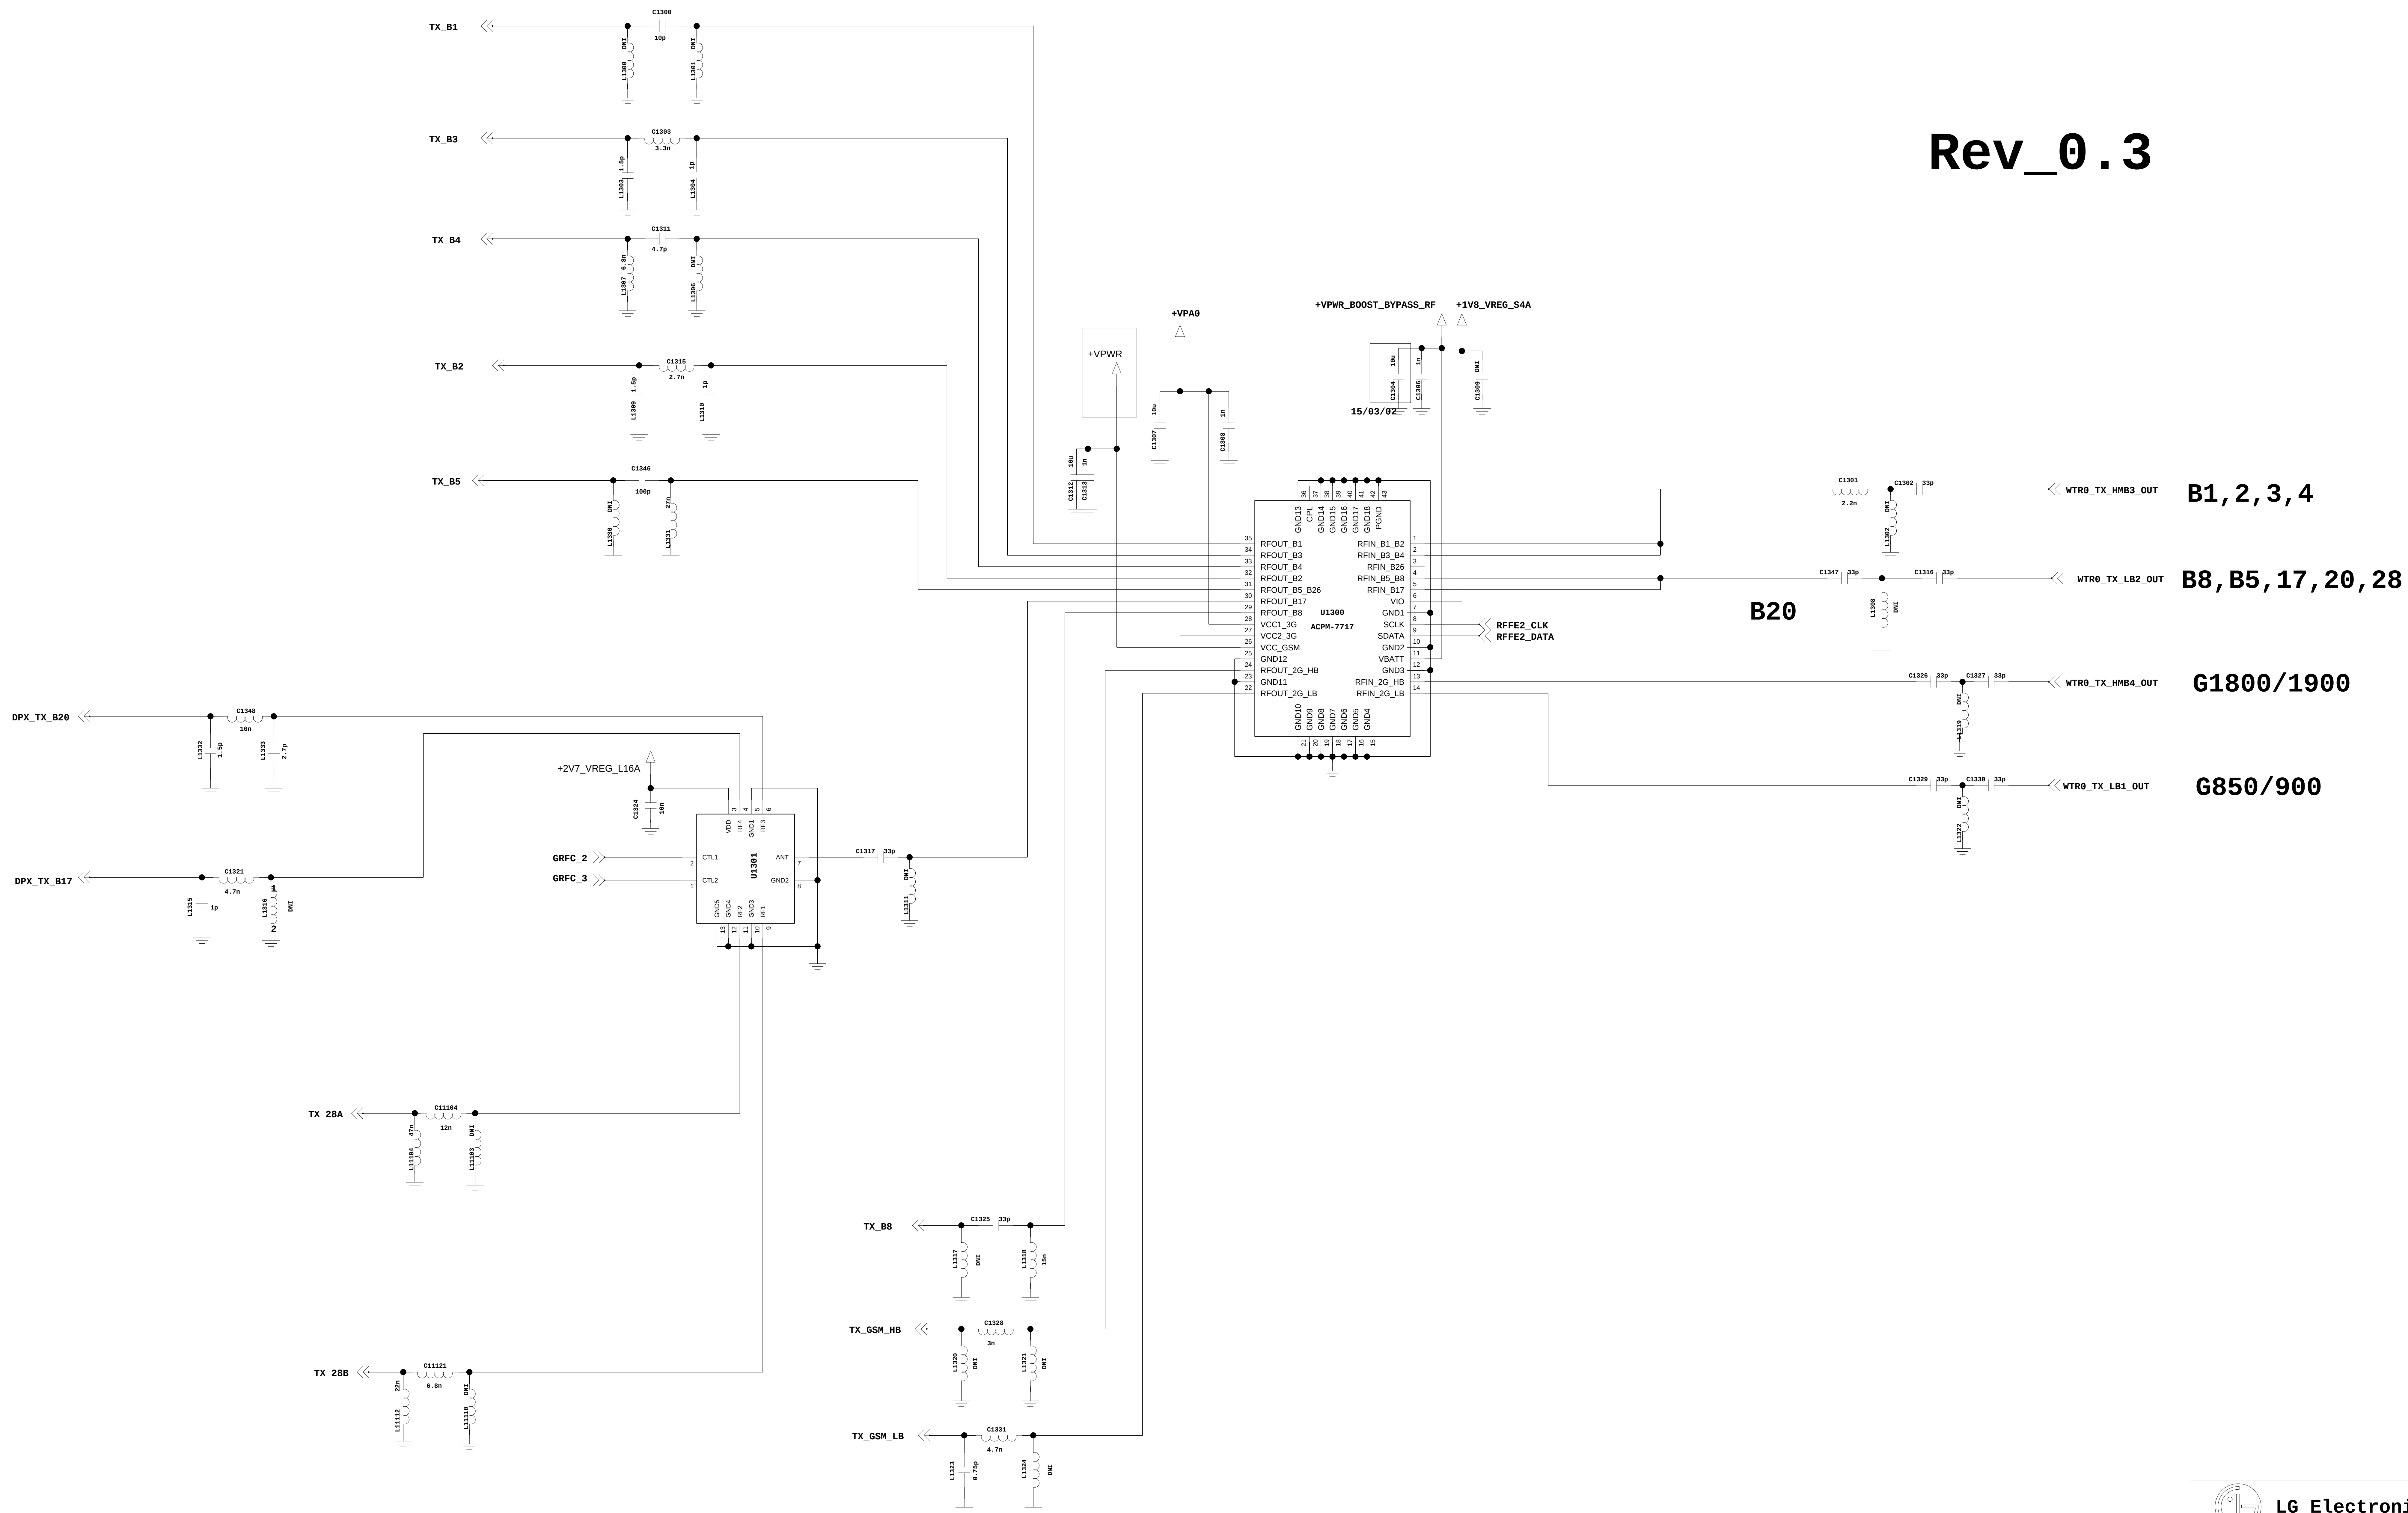

< 1-7-5-1_WTR3925 > Rev_0.3

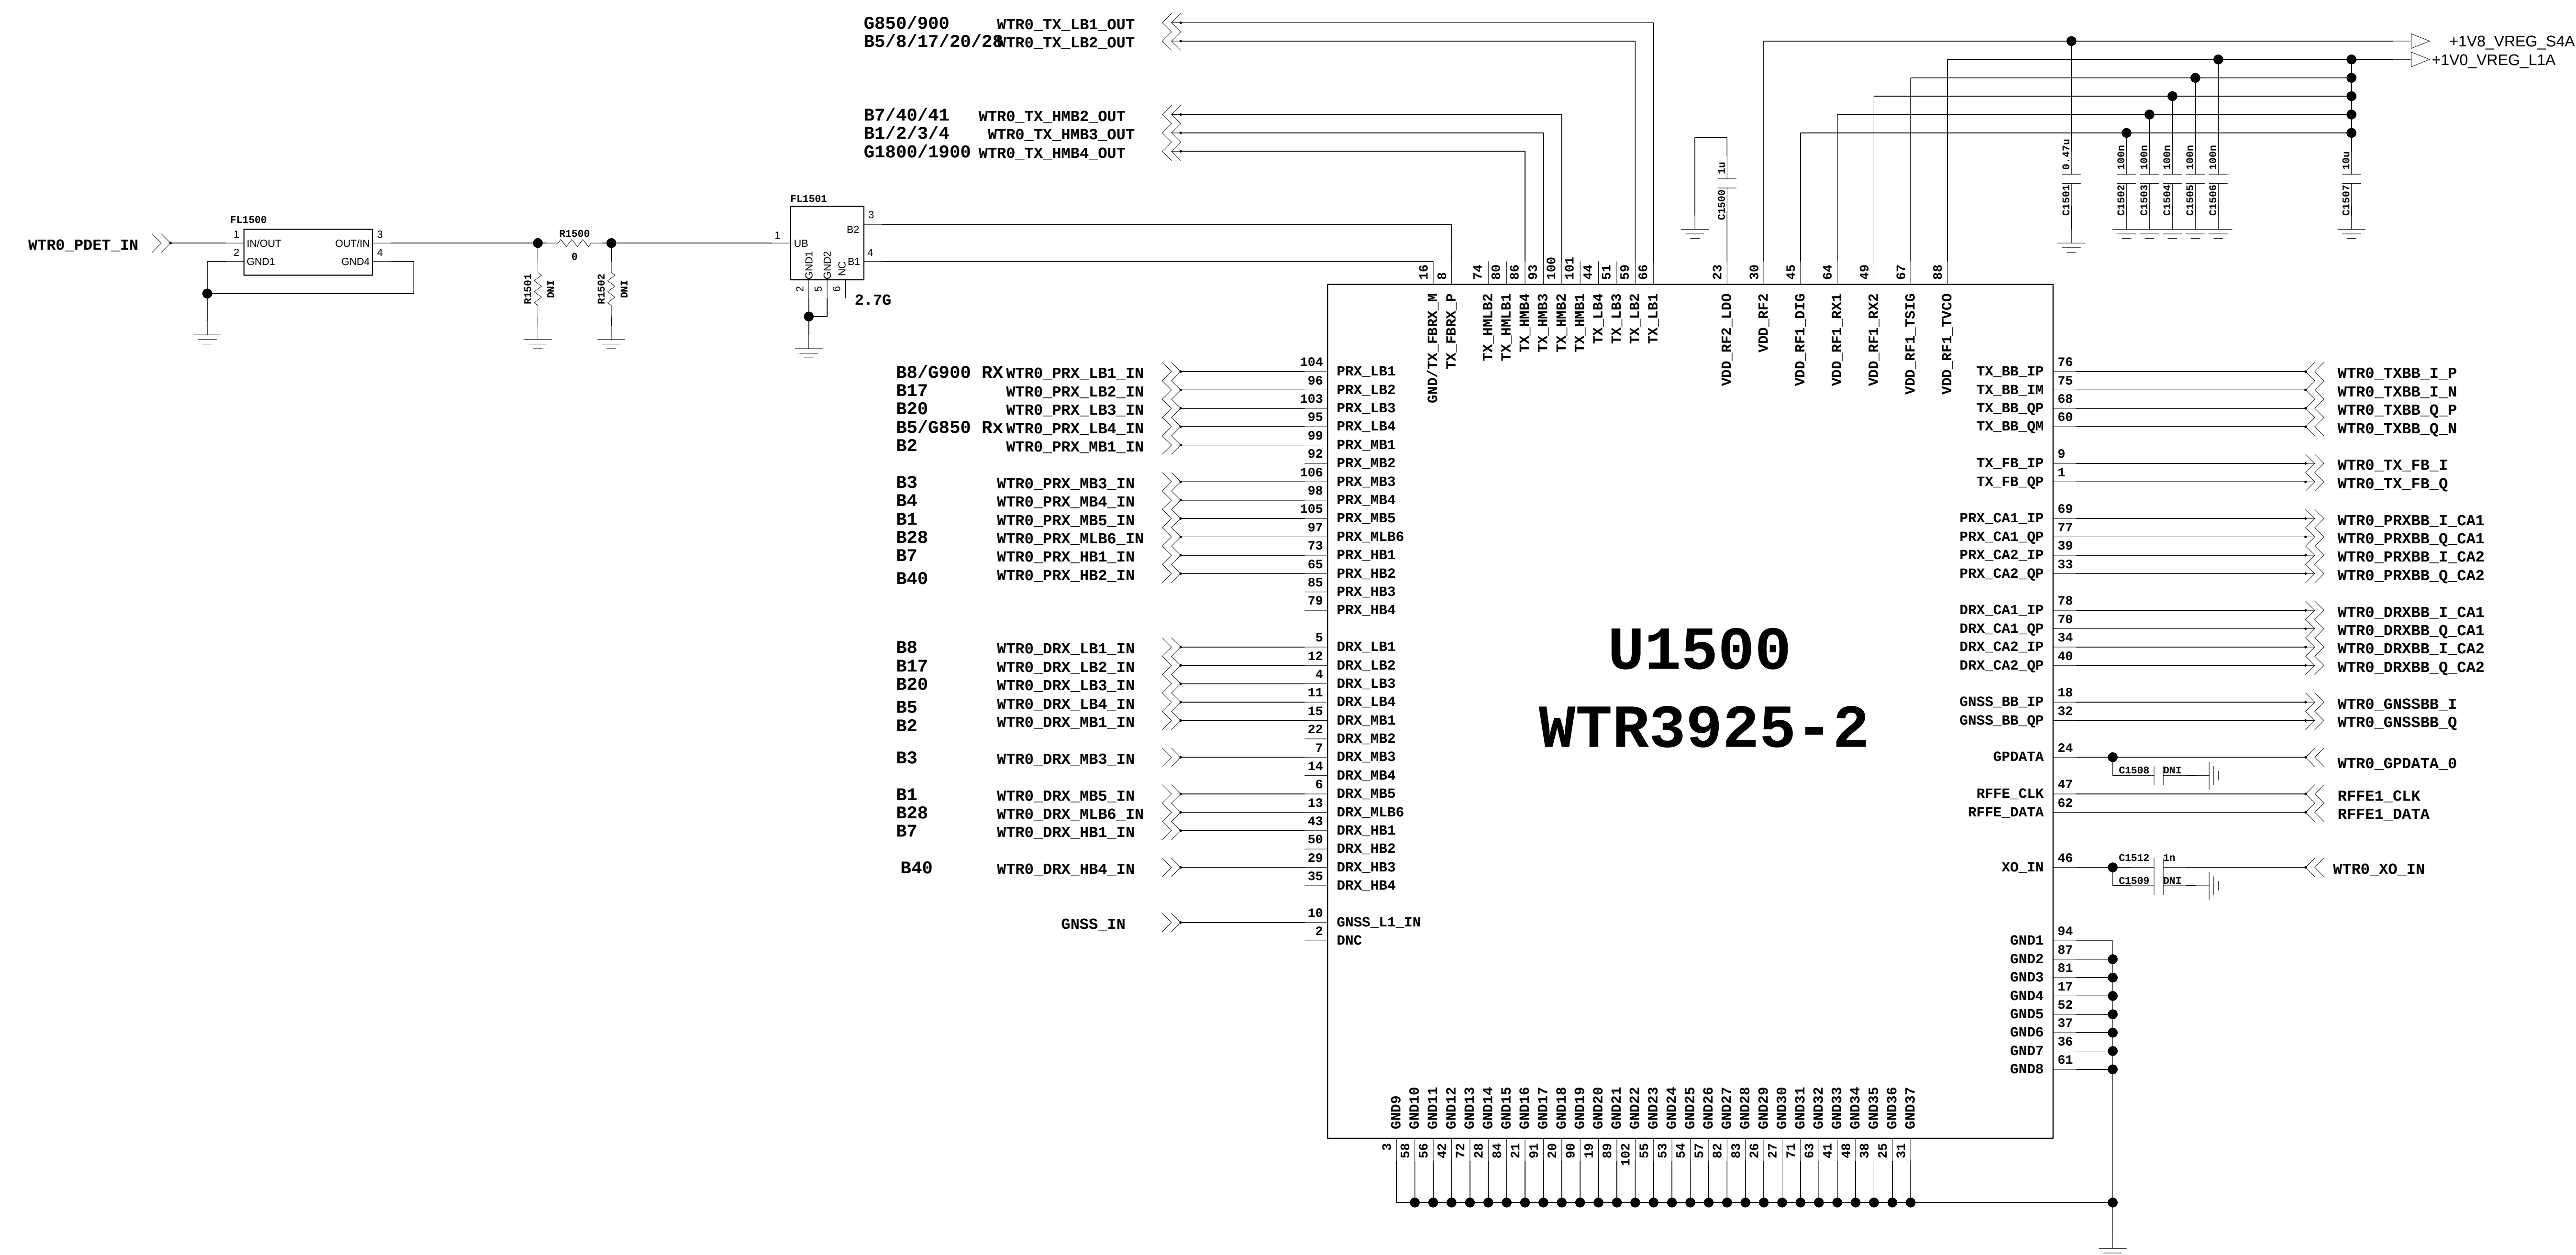


< 2-1-9-1-2 MSM8992 GPIO >

Rev.0.1


CCDS CARD Information	
Release Date	
Based on Reference Schematic	

FOR GLOBAL BSP ONE SOURCE

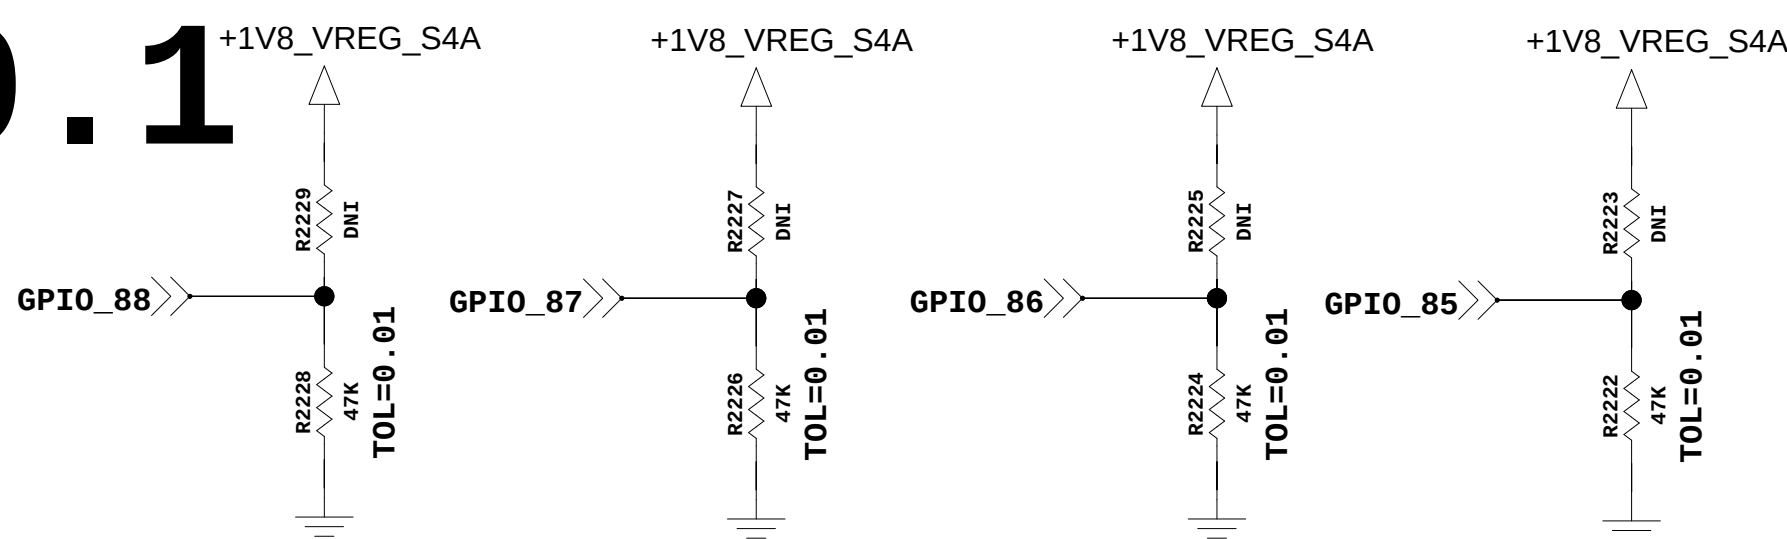


	GPIO88	GPIO87	GPIO86	GPIO85
H815	L	L	L	L
H815P	L	L	L	H
H815TR	L	L	H	L
H815K	L	L	H	H
H815L	L	H	L	L
H815AR	L	H	L	H
H815T	L	H	H	L
H815E	L	H	H	H


FOR PCB recognition (TOP)

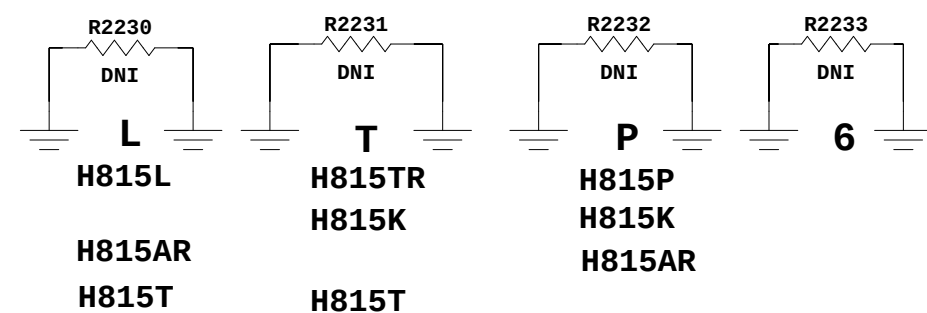

FOR PCB recognition(BOTTOM)

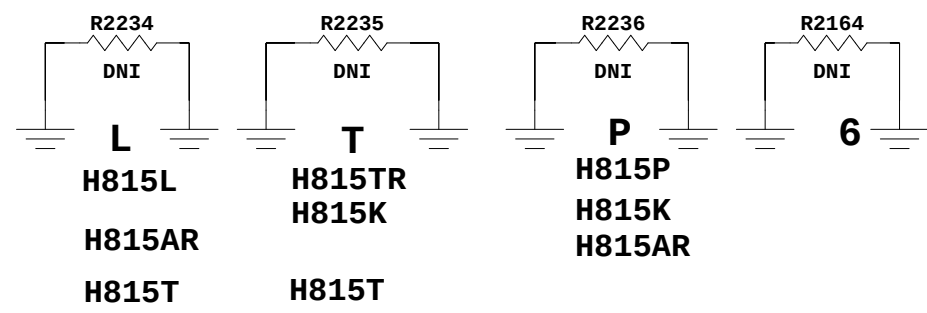

I2C Pull-Up

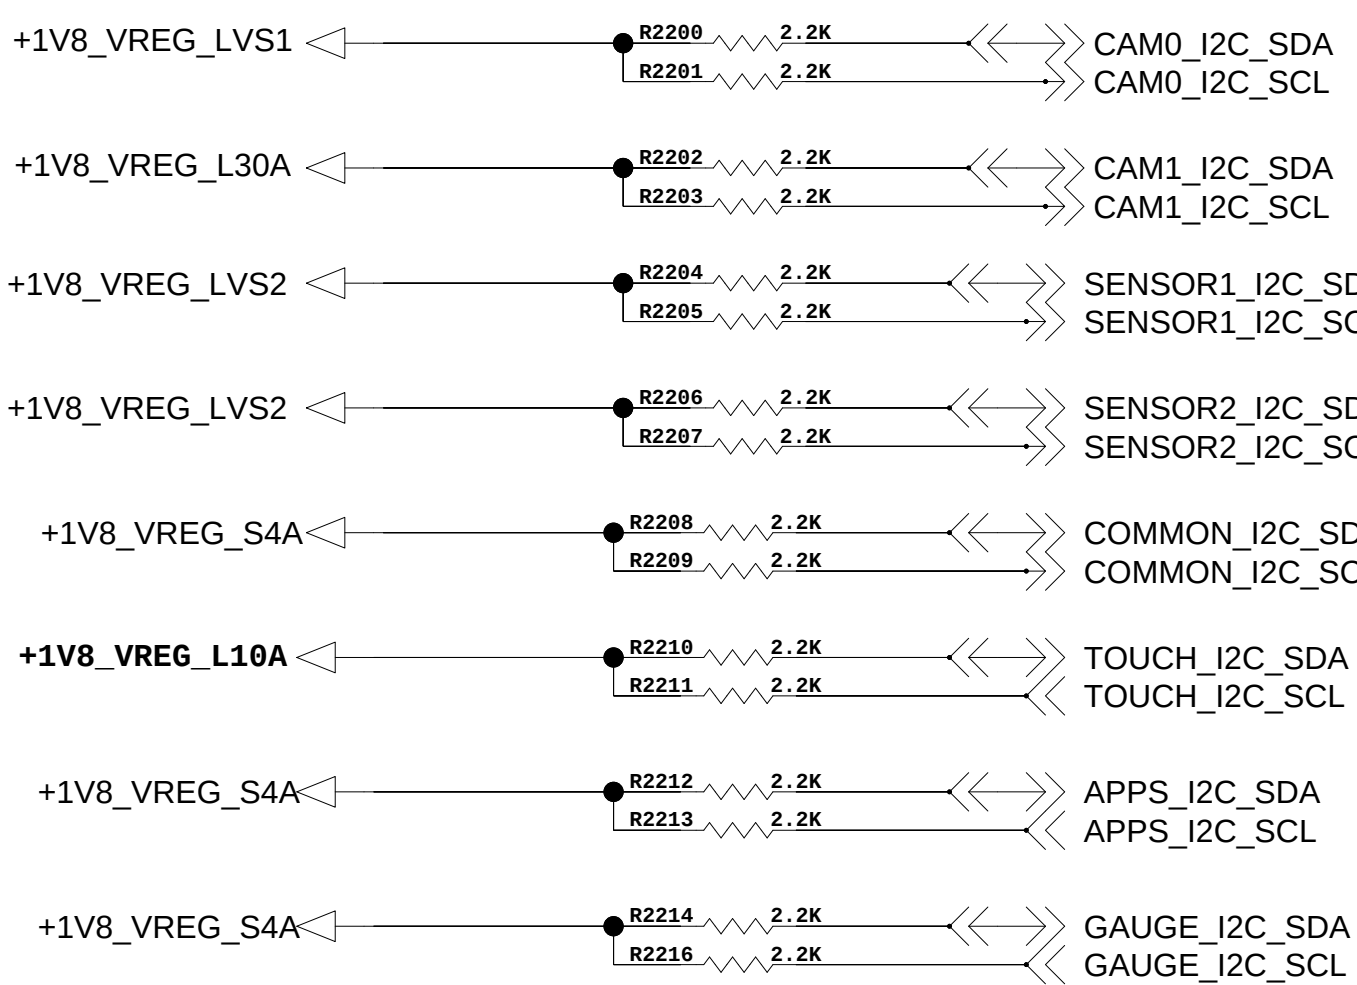


QCT Schematic Review (4/9)
- Recommended value for R2218 is 4.7k to minimize the leakage If Forced_USB_Boot feature is used.

Boot Configuration GPIOs

GPIO103	FORCED_USB_BOOT
GPIO119	WD0G_DISABLE
GPIO120	FASTBOOT_SELECT(0)
GPIO121	FASTBOOT_SELECT(1)
GPIO122	FASTBOOT_SELECT(2)
GPIO123	FASTBOOT_SELECT(3)
GPIO104	PK_HASH_INDEX_SRC
GPIO105	ALL_USE_SERIAL_NUMBER
GPIO106	MSA_PK_HASH_IN_FUSE
GPIO107	MSA_AUTH_EN
GPIO114	AP_PK_HASH_IN_FUSE
GPIO109	AP_AUTH_EN
GPIO110	FORCE_MSA_AUTH_EN

- Make sure there are no external pulls on these GPIOs.

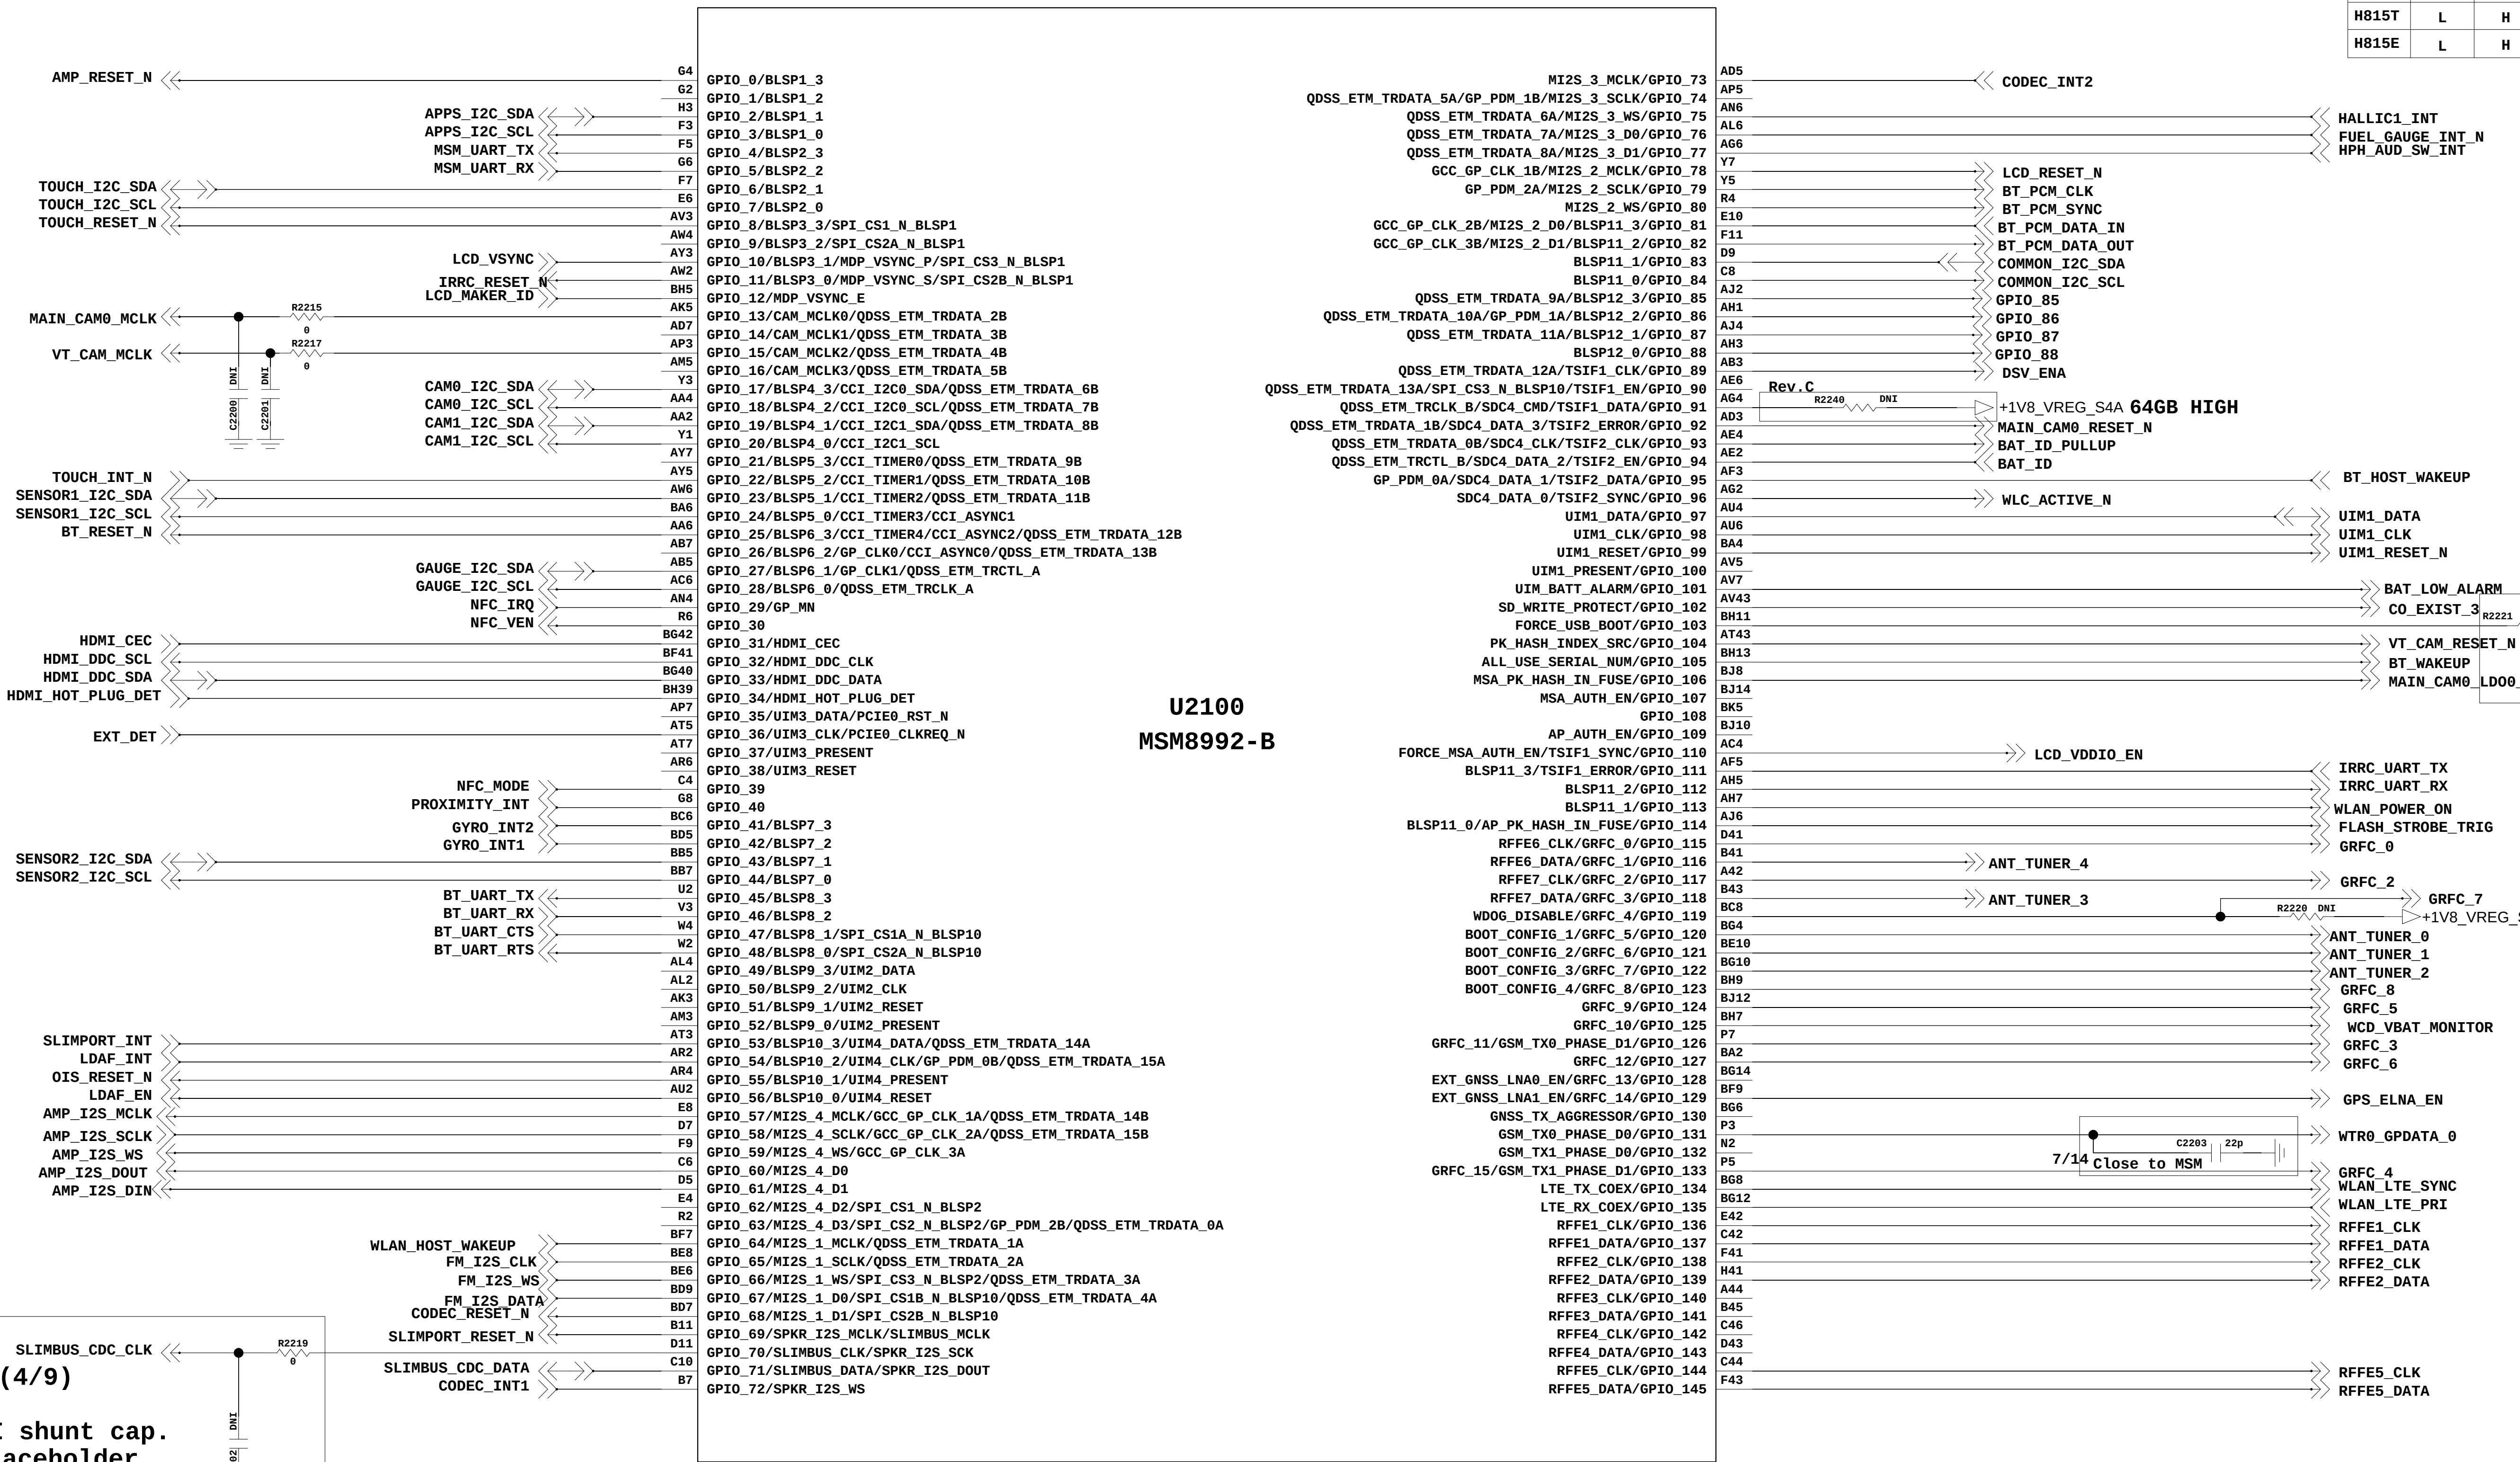

U2100
MSM8992-B


WD0G_Disable

QCT Schematic Review (4/9)

- Recommend to add DNI shunt cap. here for RC filter placeholder.

- to be filtered.
The placeholder components can be replaced with RC filter (51-ohm and 82 pF)
in case the SLIMBus clock output needs


Rev. 0.1




< 2-1-9-1-4 MSM8992 GND_NC > Rev.0.1

Rev. 0.1


CCDS CARD Information	
Release Date	
Based on Reference Schematic	

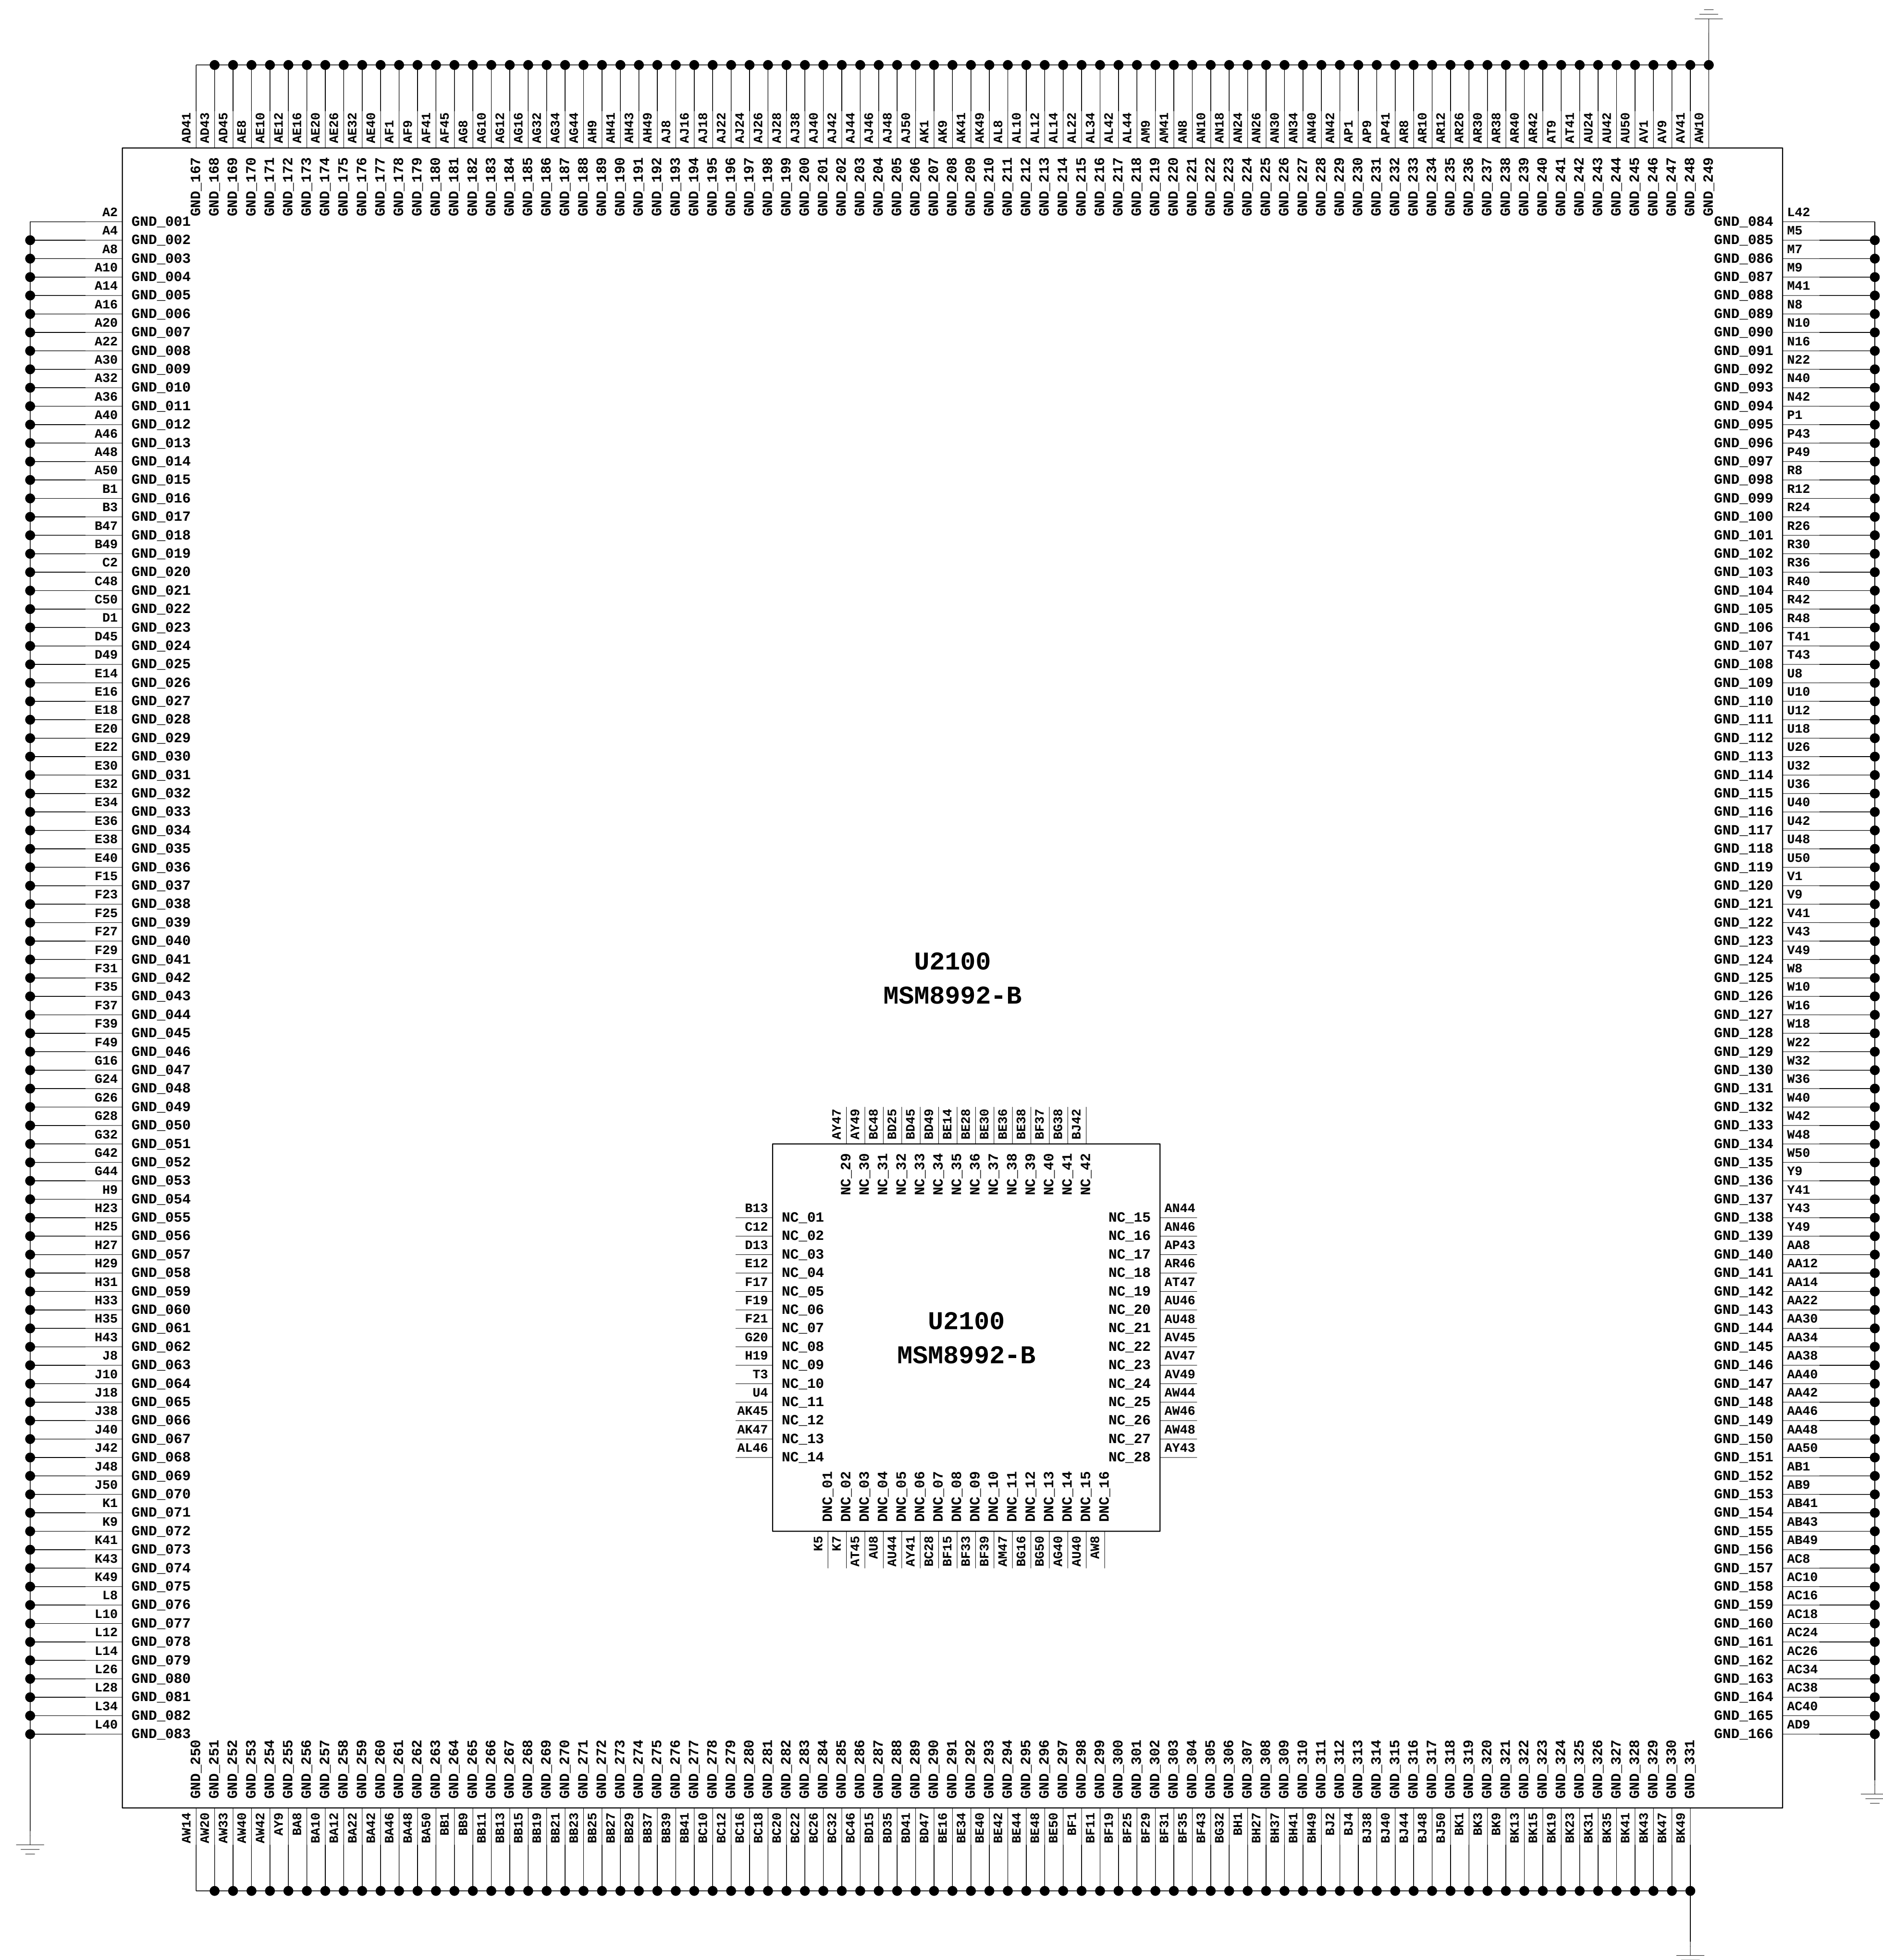

<LPDDR3_POP_933MHz>

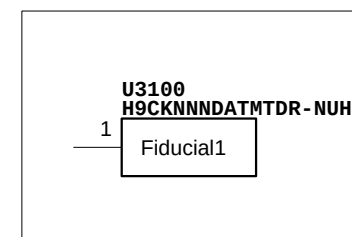
**Rev . C**

< eMMC_5_1_32Gbyte_Toshiba_15nm >

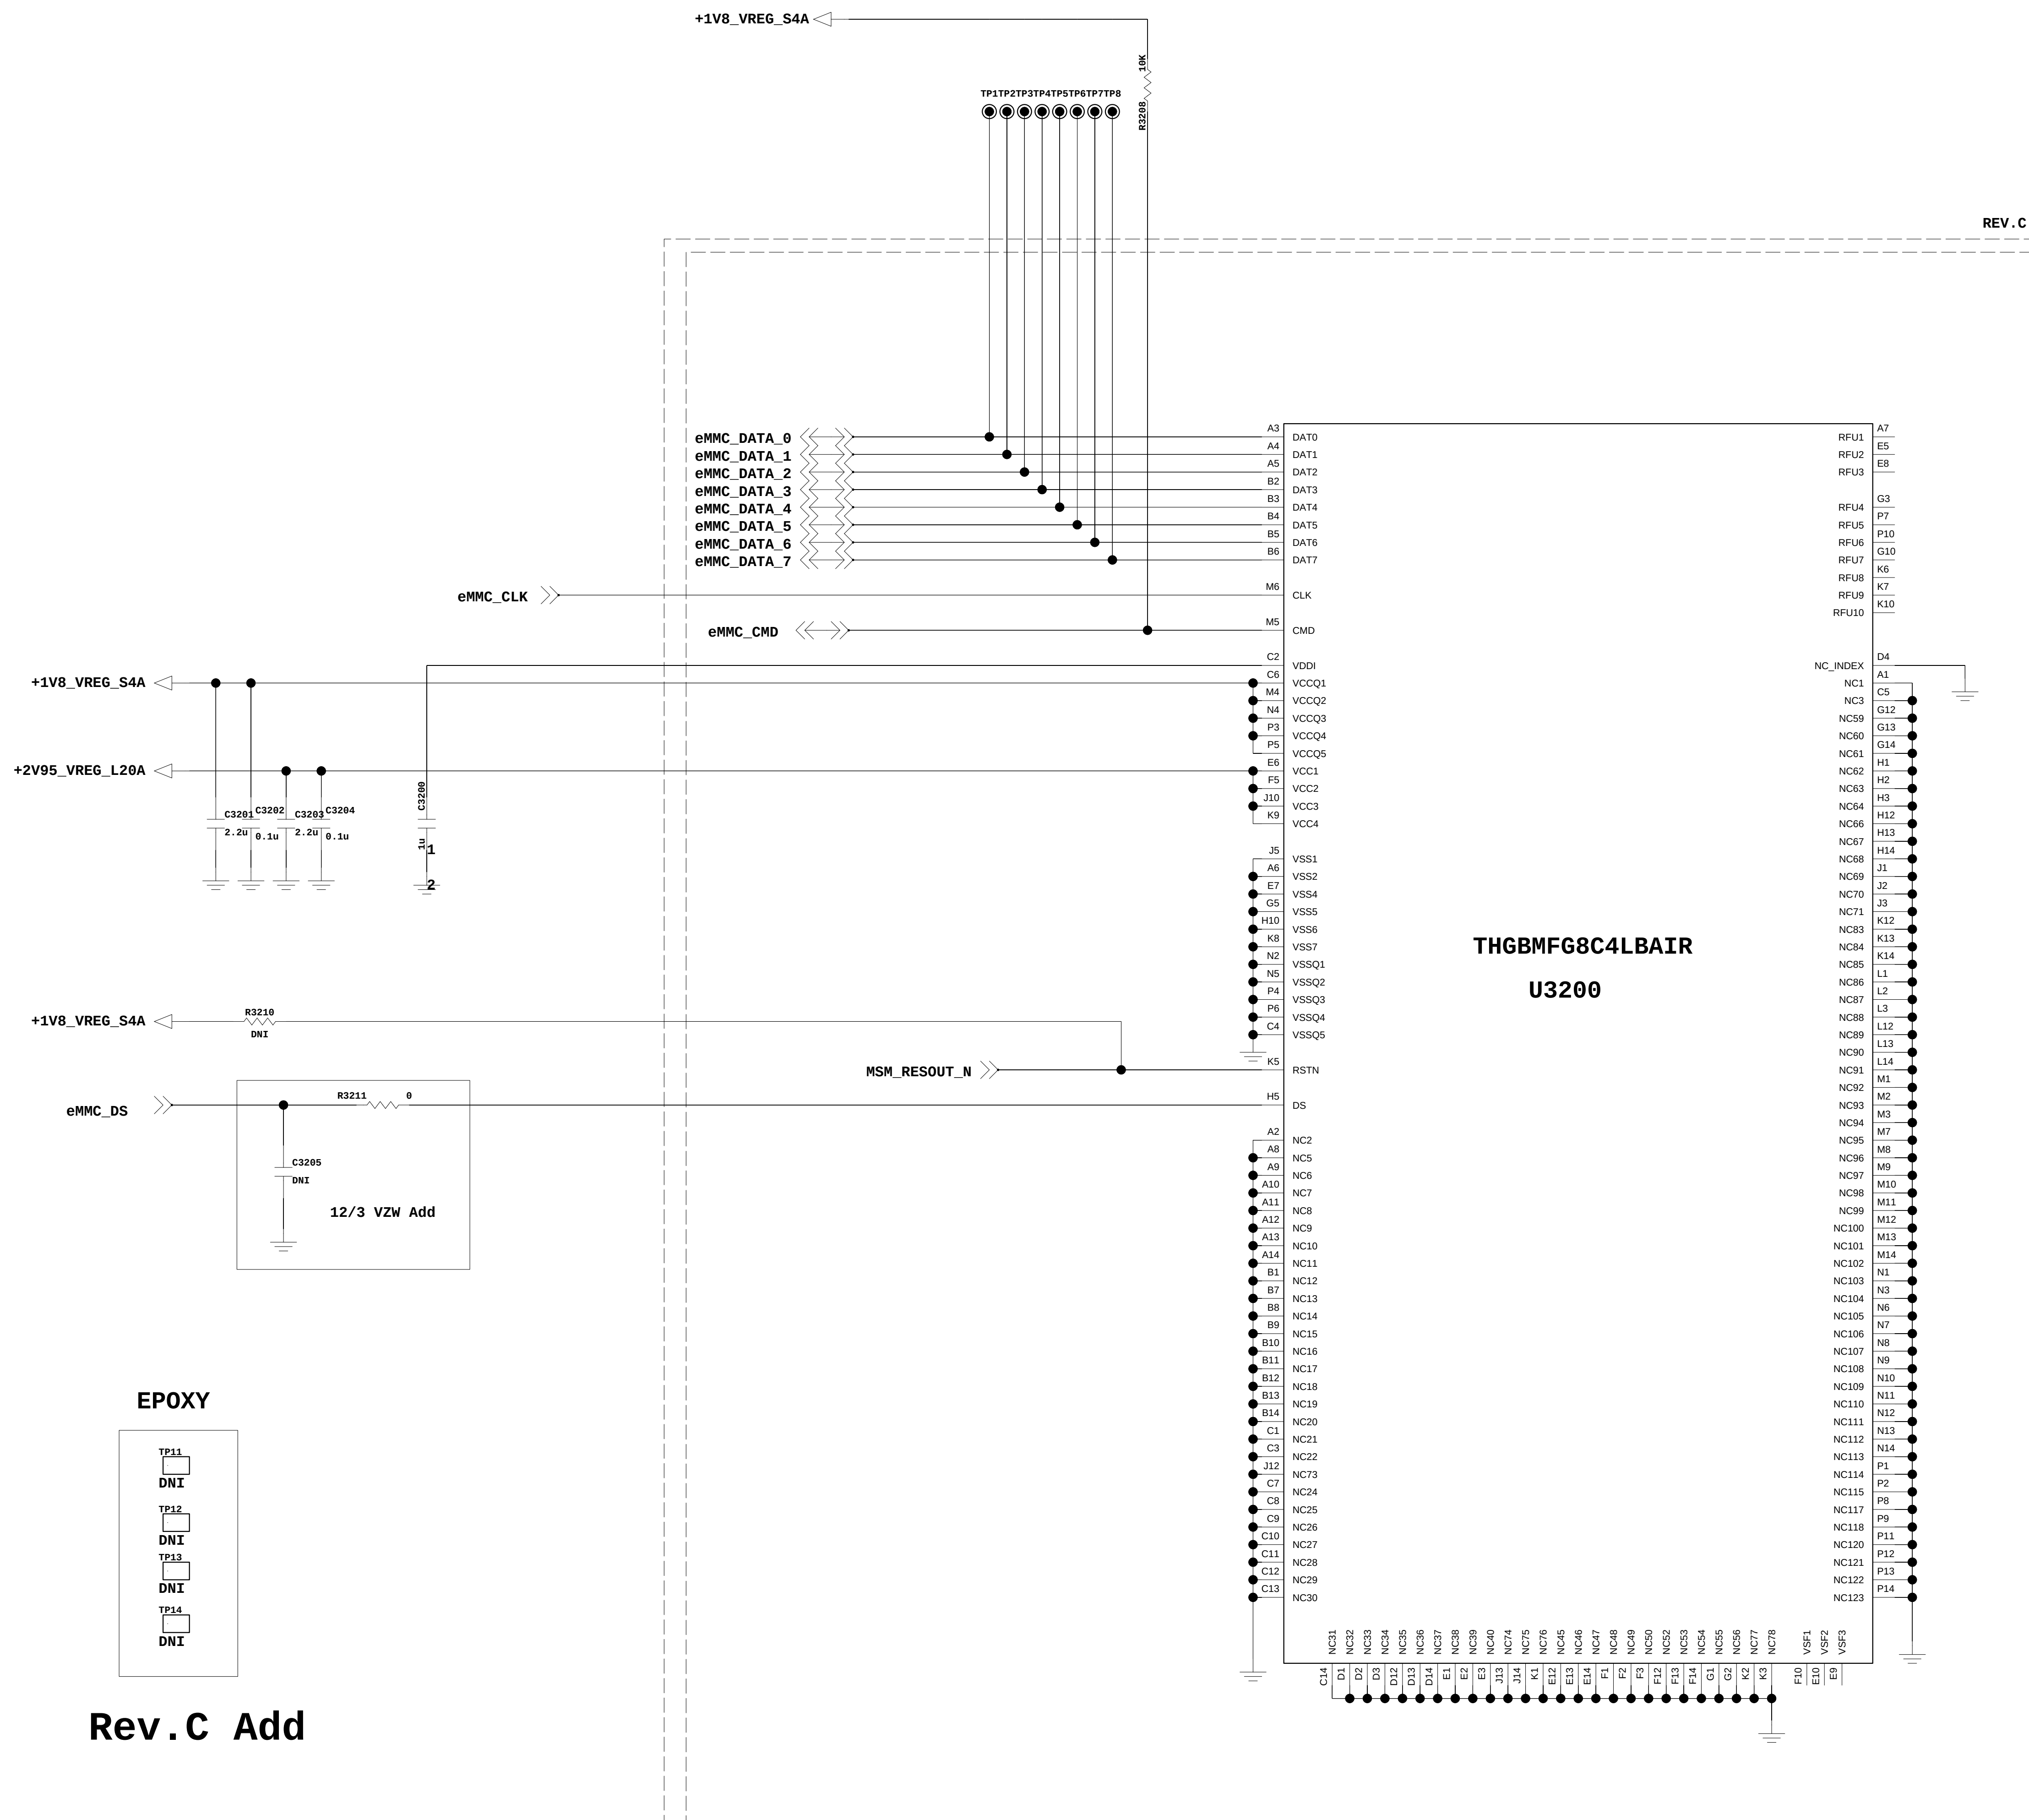


< 4-1-11-1_PMIC_PM8994_Data > Rev_0.3


PMIC_Option

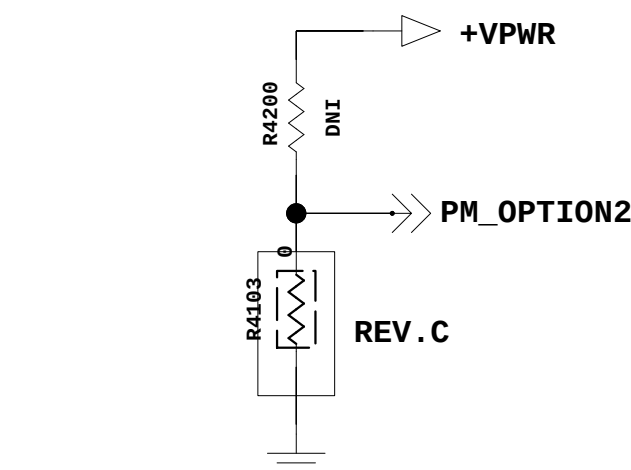


OPT_2	Power-on sequence
GND	TBD
Hi-Z	TBD
VDD	PMIC will power-down

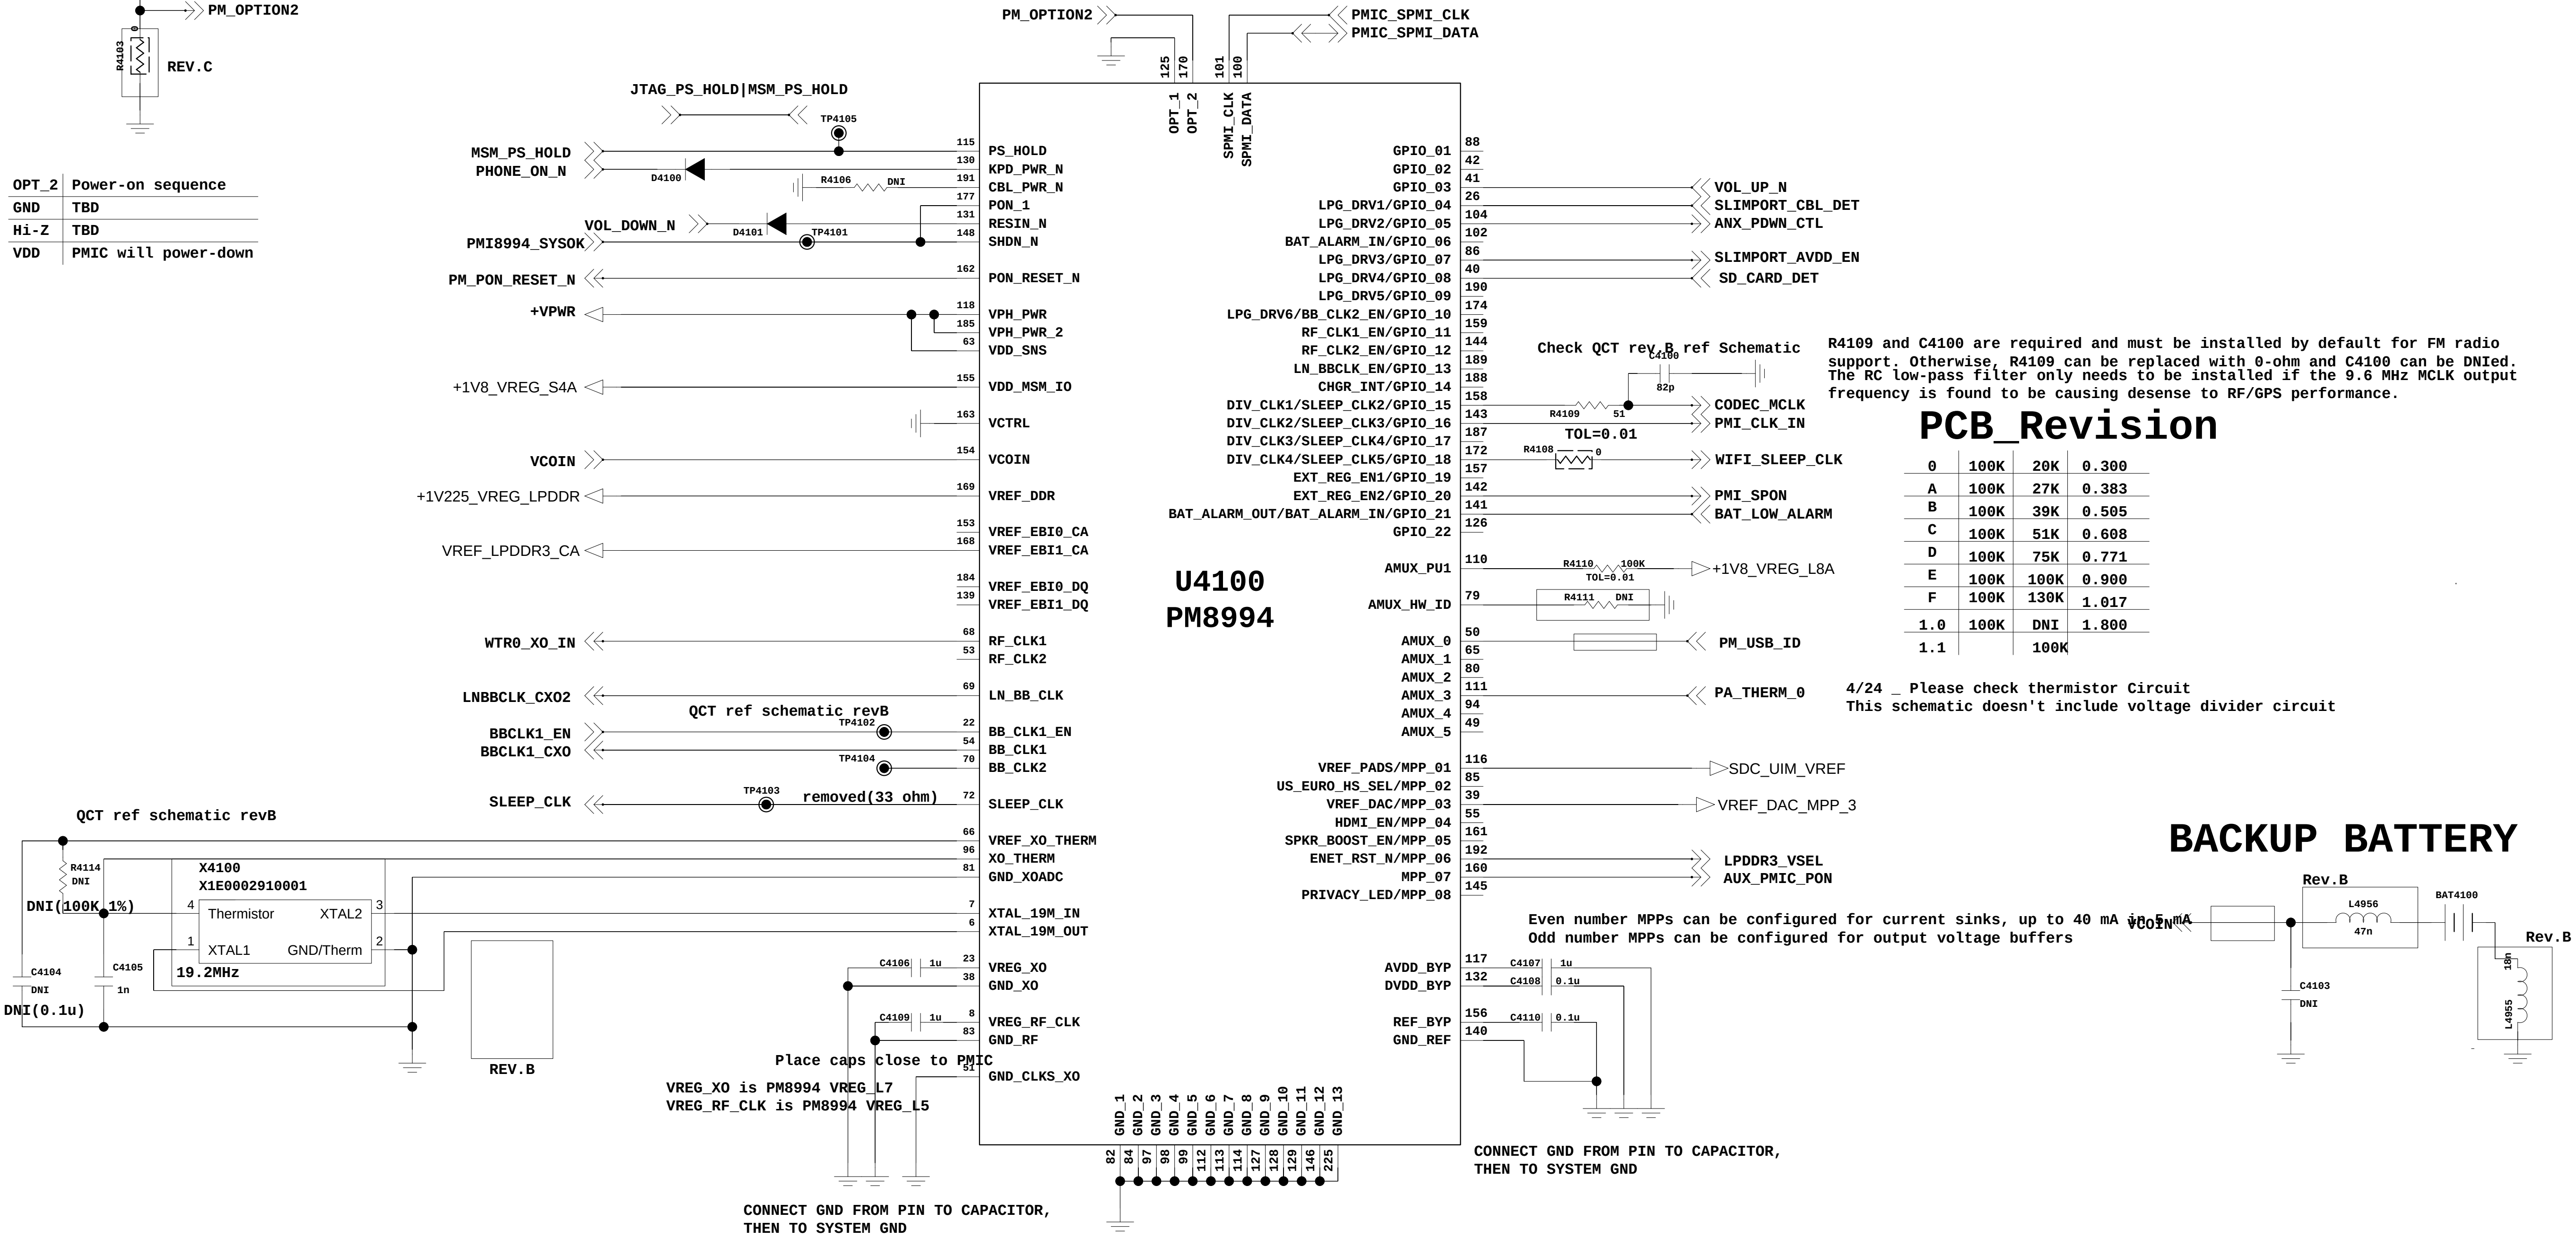

Buck for LPDDR3 Core and EBI pad

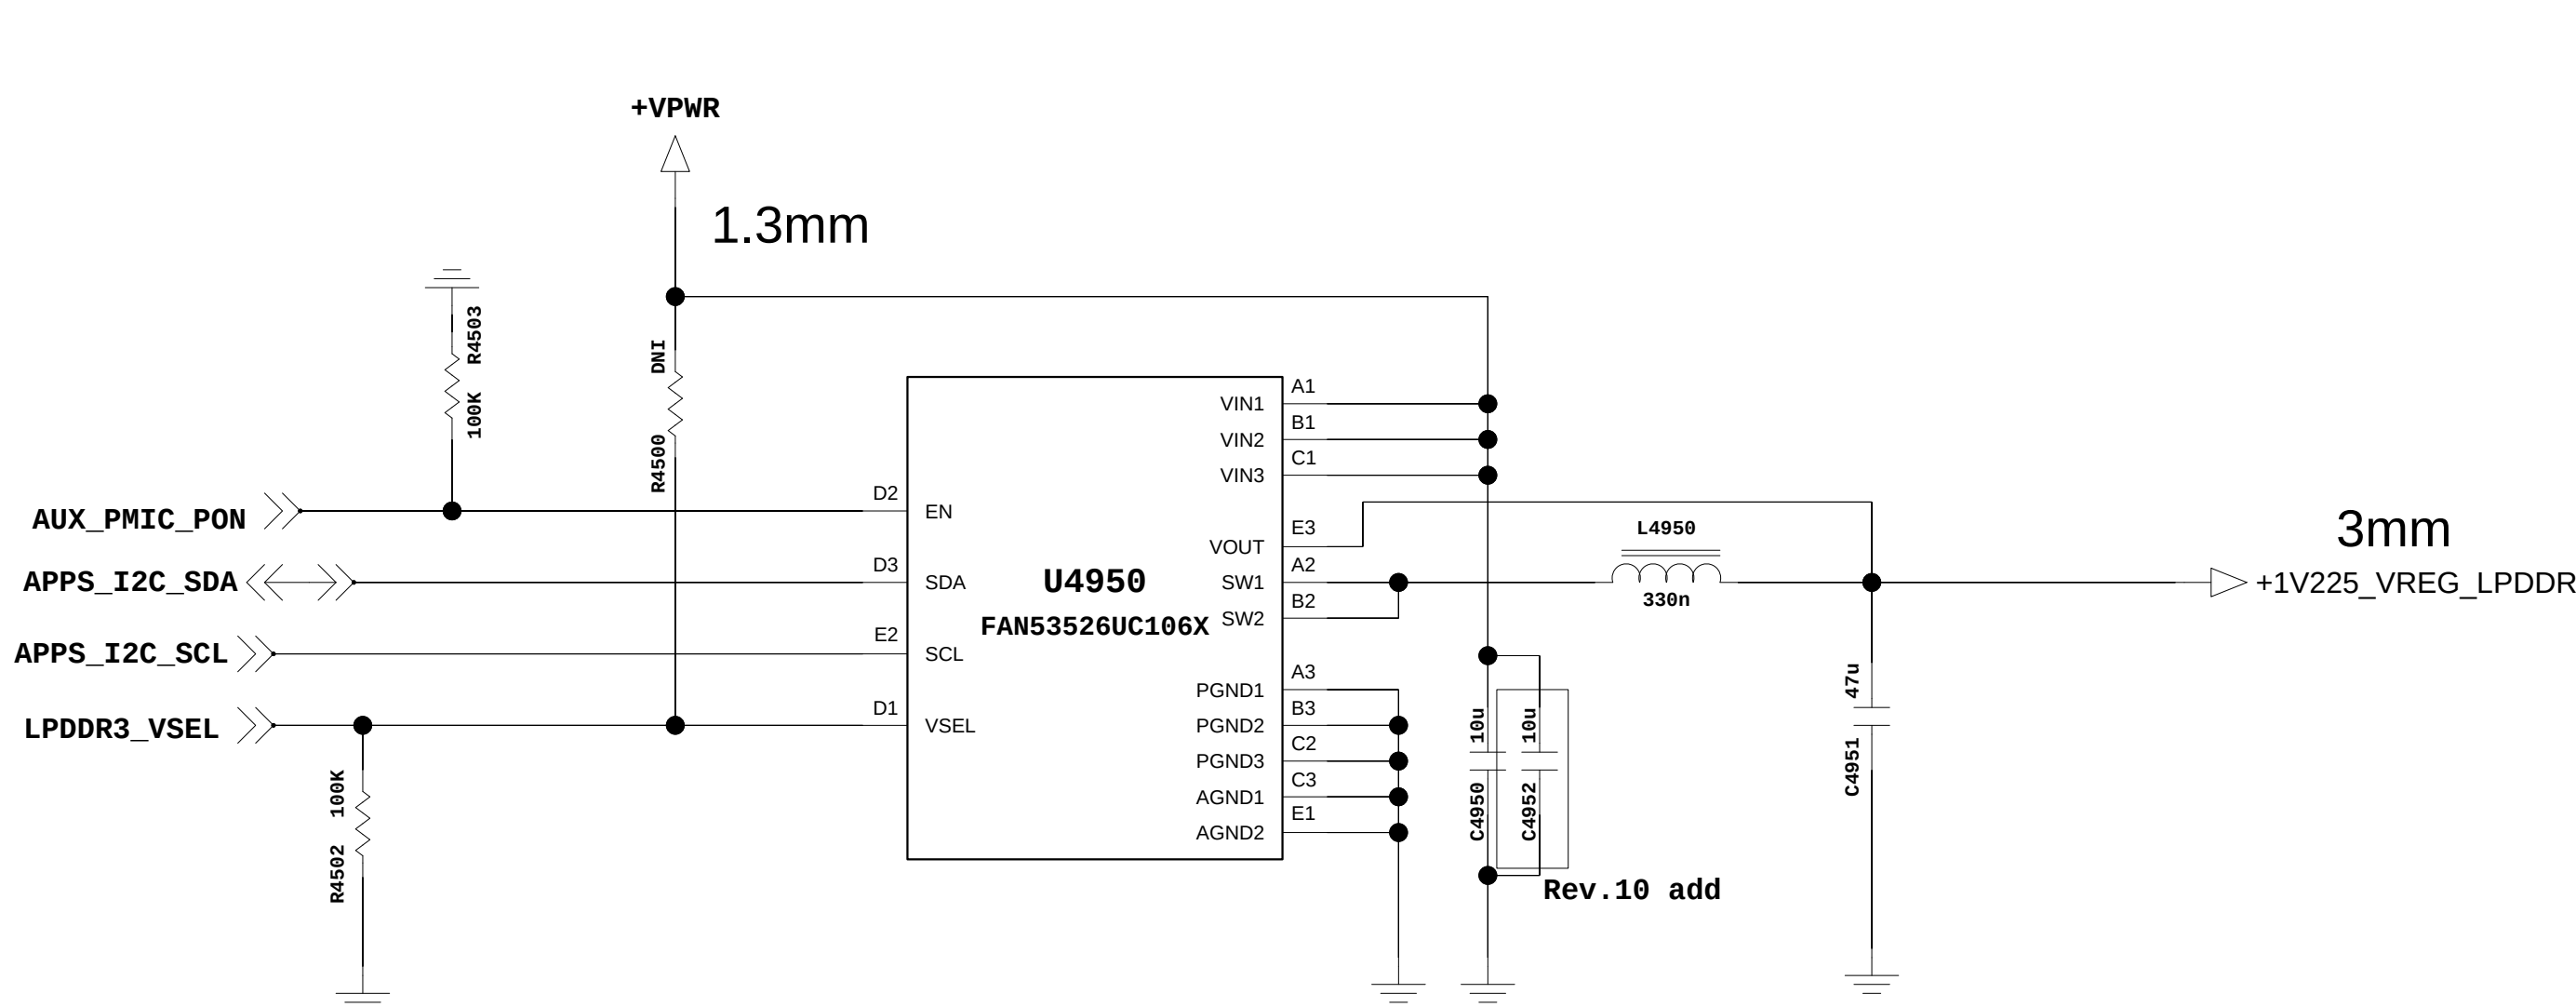

< 4-1-11-2_PMIC_PM8994_Power V0.3>

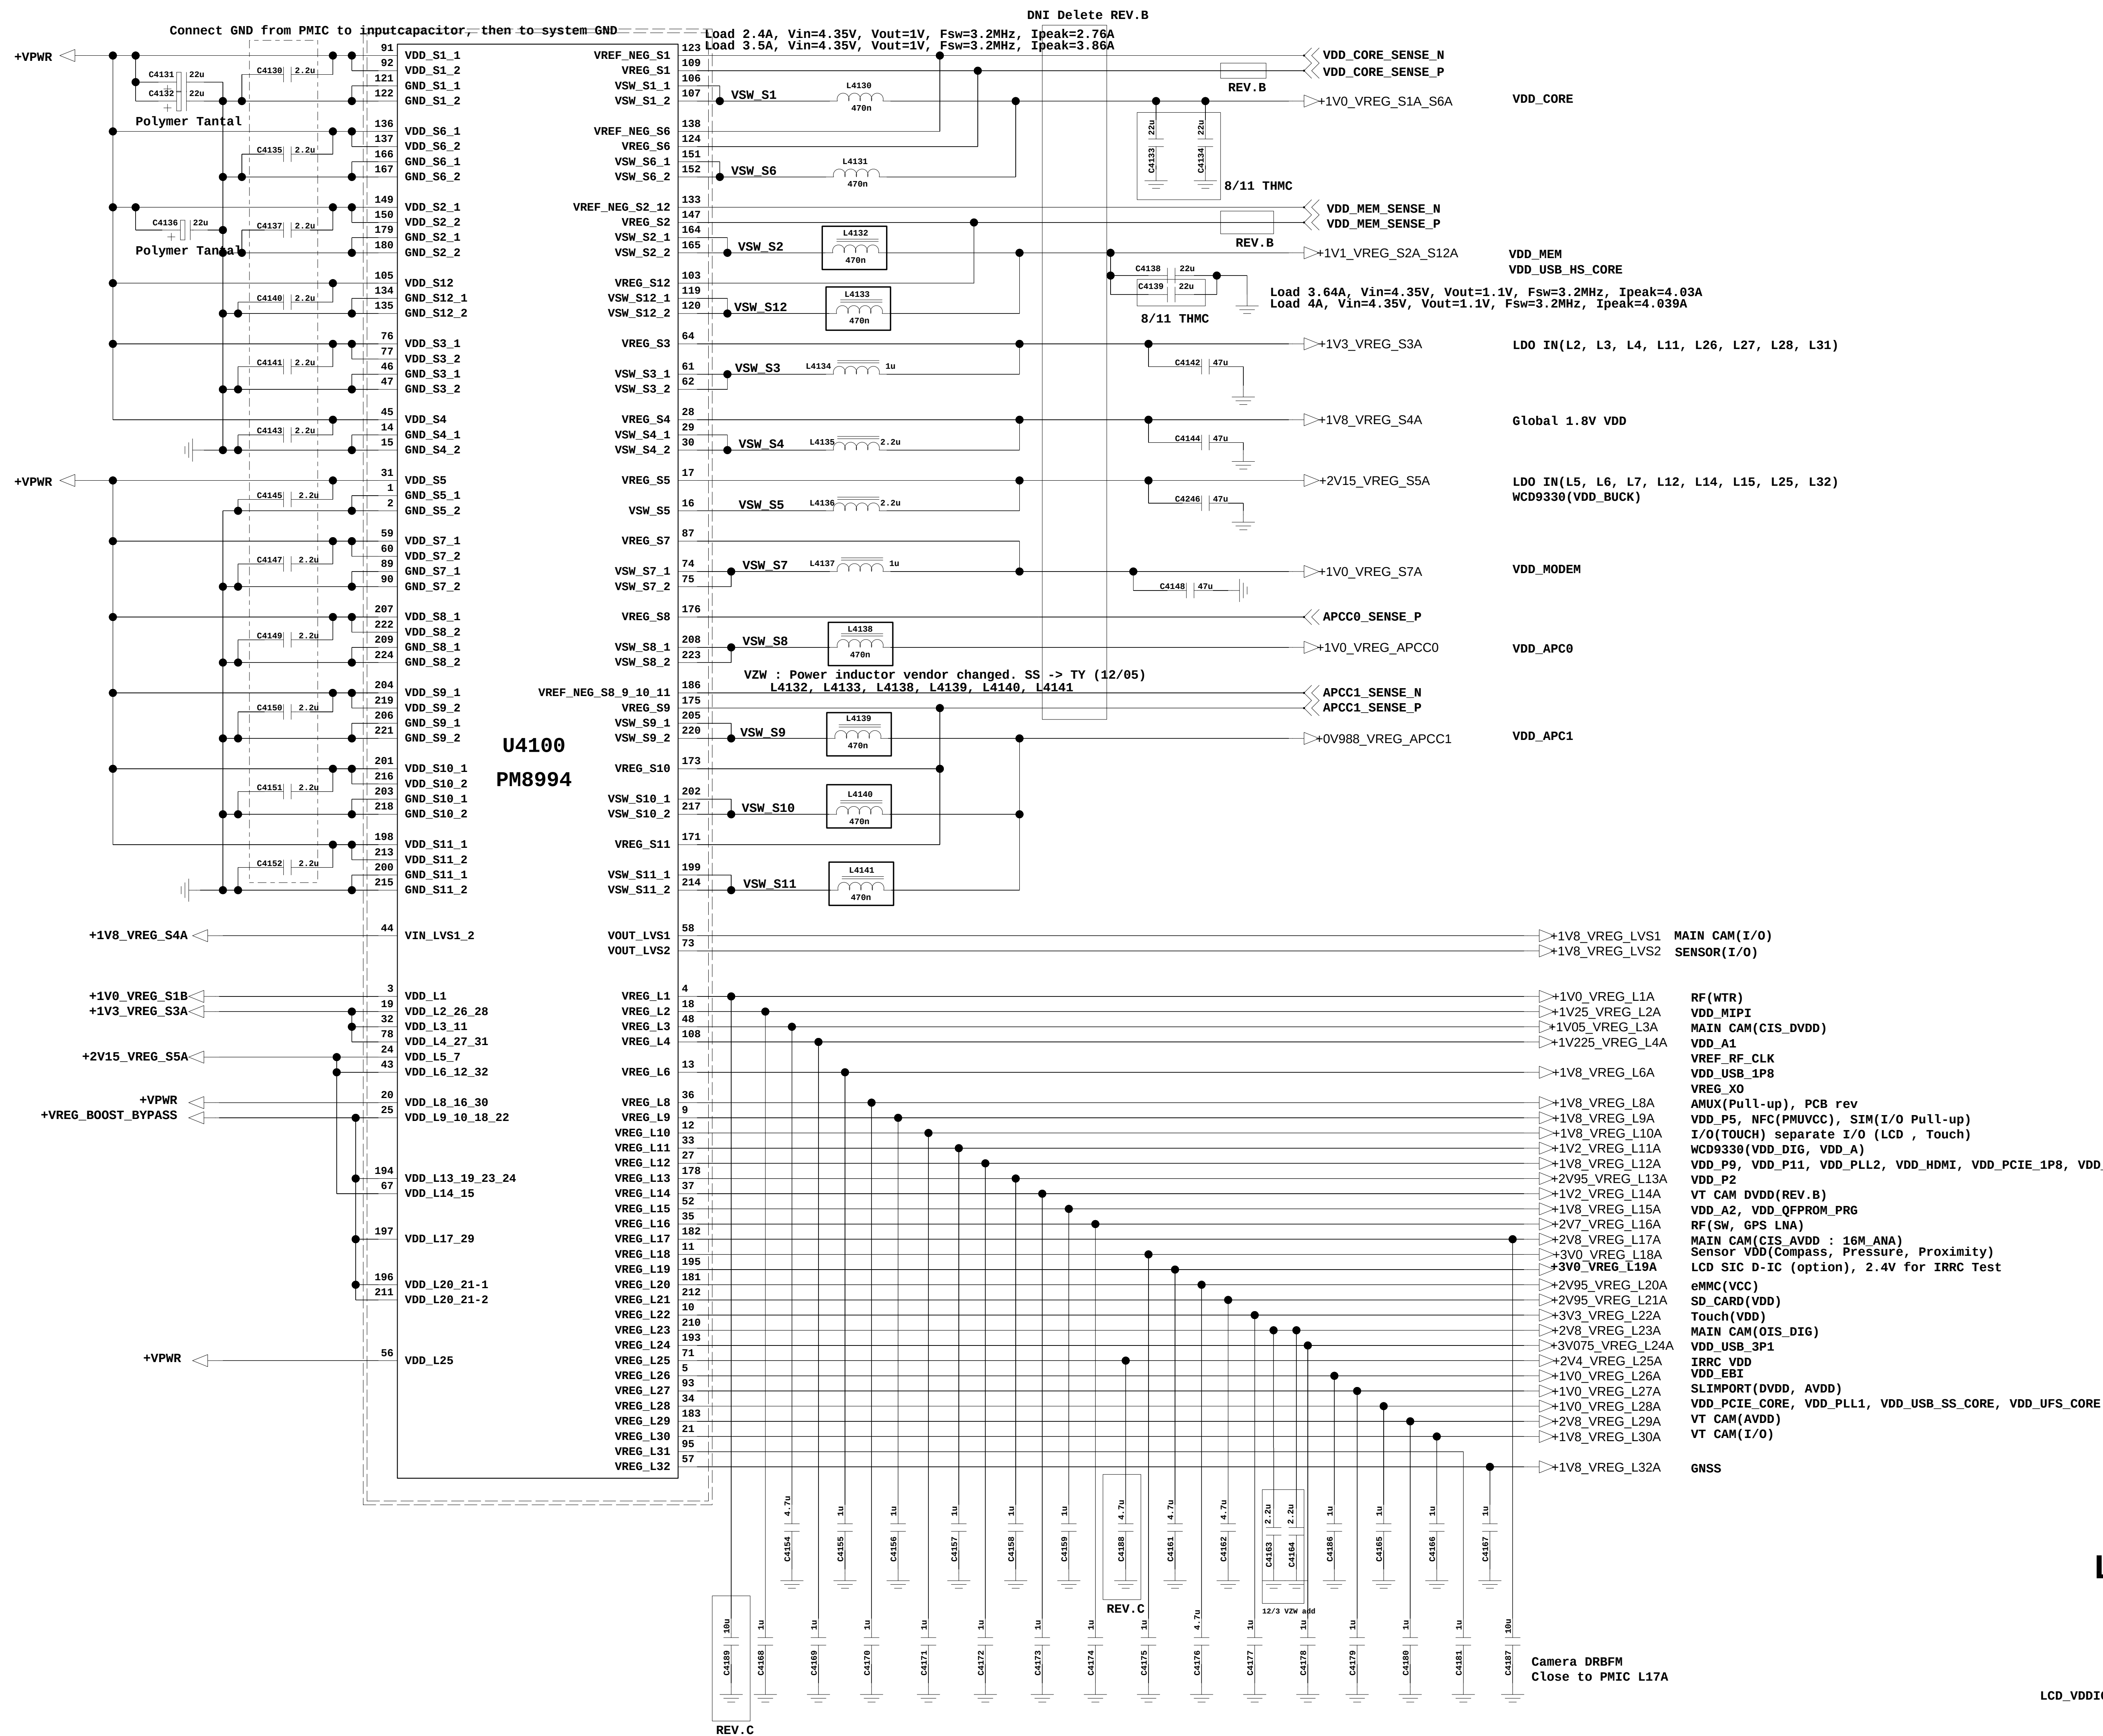


DC-DC

Function	Circuit Type	Default Voltage	Specified Range	Programmable Range	Rated Current	Default On
S1A	FT_SMPS	1.0V	0.375 - 1.1125 V	0.375 - 1.275 V	3500mA	Y
S6A	FT_SMPS	1.0V	0.375 - 1.1125 V	0.375 - 1.275 V	3500mA	Y
S2A	FT_SMPS	1.1V	0.875 - 1.1125 V	0.375 - 1.275 V	3500mA	Y
S12A	FT_SMPS	1.1V	0.875 - 1.1125 V	0.375 - 1.275 V	3500mA	Y
S3A	HF_SMPS	1.3V	0.375 - 1.400 V	0.375 - 3.050 V	3500mA	Y
S4A	HF_SMPS	1.8V	1.700 - 1.950 V	0.375 - 3.050 V	2000mA	Y
S5A	HF_SMPS	2.15V	1.700 - 2.300 V	0.375 - 3.050 V	2000mA	Y
S7A	HF_SMPS	1.0V	0.375 - 1.1125 V	0.375 - 3.050 V	3500mA	Y
S8A	FT_SMPS	1.0V	0.375 - 1.1125 V	0.375 - 1.275 V	3500mA	Y
S9A	FT_SMPS	1.0V	0.375 - 1.1125 V	0.375 - 1.275 V	3500mA	Y
S10A	FT_SMPS	1.0V	0.375 - 1.1125 V	0.375 - 1.275 V	3500mA	Y
S11A	FT_SMPS	1.0V	0.375 - 1.1125 V	0.375 - 1.275 V	3500mA	Y
S1B	HF_SMPS	1.05V			1000mA	
S2B	FT_SMPS	1.0V			4000mA	Y
S3B	FT_SMPS	1.0V			4000mA	Y
S8B	Bharger	4.35V			3000mA	
Bst/Byp	Boost-Bypass	3.3V			2000mA	Y
+5V	Boost	5.0V			1300mA	
WLED	Boost				400mA	
D1SP	Boost					
D1SW	Boost					
LPDDR Buck	Buck	1.1V			3000mA	Y
RF Bst/Byp	Boost-Bypass	3.5V			3000mA	?

LDO sheet update_QCT_C


Function	Circuit Type	Default Voltage	Specified Range	Programmable Range	Rated Current	Default On
L1	NMOS LDO	1.0V	0.550 - 1.300 V	0.375 - 1.525 V	1200mA	
L2	NMOS LDO	1.225V	0.950 - 1.430 V	0.750 - 1.525 V	300mA	
L3	NMOS LDO	1.2V	0.550 - 1.300 V	0.375 - 1.525 V	1200mA	
L4	NMOS LDO	1.225V	0.950 - 1.430 V	0.750 - 1.525 V	300mA	
L5	Low noise LDO	1.8V	1.700 - 1.950 V	1.380 - 2.220 V	On-Chip-Only	
L6	PMOS LDO	1.8V	1.150 - 3.600 V	0.750 - 4.900 V	150mA	
L7	Low noise LDO	1.8V	1.700 - 1.950 V	1.380 - 2.220 V	On-Chip-Only	
L8	PMOS LDO	1.8V	1.700 - 1.950 V	0.750 - 4.900 V	50mA	
L9	PMOS LDO	1.8/2.95V	1.150 - 3.600 V	0.750 - 4.900 V	150mA	
L10	PMOS LDO	1.8/2.95V	1.150 - 3.600 V	0.750 - 4.900 V	150mA	
L11	NMOS LDO	1.2V	0.950 - 1.430 V	0.750 - 1.525 V	300mA	
L12	PMOS LDO	1.8V	1.650 - 3.300 V	0.750 - 4.900 V	300mA	Y
L13	PMOS LDO	1.8/2.95V	1.150 - 3.600 V	0.750 - 4.900 V	150mA	Y
L14	PMOS LDO	1.8V	1.150 - 3.600 V	0.750 - 4.900 V	150mA	
L15	PMOS LDO	1.85V	1.650 - 3.300 V	0.750 - 4.900 V	300mA	
L16	PMOS LDO	2.7V	1.150 - 3.600 V	0.750 - 4.900 V	150mA	
L17	PMOS LDO	2.7V	1.650 - 3.300 V	0.750 - 4.900 V	300mA	
L18	PMOS LDO	2.85V	1.650 - 3.300 V	0.750 - 4.900 V	300mA	
L19	PMOS LDO	2.8V	0.950 - 3.600 V	0.750 - 4.900 V	600mA	
L20	PMOS LDO	2.95V	0.950 - 3.600 V	0.750 - 4.900 V	600mA	Y
L21	PMOS LDO	2.95V	0.950 - 3.600 V	0.750 - 4.900 V	800mA	Y
L22	PMOS LDO	3.0V	1.150 - 3.600 V	0.750 - 4.900 V	150mA	
L23	PMOS LDO	2.8V	0.950 - 3.600 V	0.750 - 4.900 V	600mA	
L24	PMOS LDO	3.075V	1.150 - 3.600 V	0.750 - 4.900 V	150mA	Y
L25	PMOS LDO	1.0V	0.950 - 3.600 V	0.750 - 4.900 V	600mA	
L26	NMOS LDO	0.988V	0.380 - 1.300 V	0.375 - 1.525 V	600mA	Y
L27	NMOS LDO	1.05V	0.950 - 1.430 V	0.750 - 1.525 V	300mA	
L28	NMOS LDO	1.0V	0.950 - 1.430 V	0.750 - 1.525 V	300mA	Y
L29	PMOS LDO	2.8V	1.650 - 3.300 V	0.750 - 4.900 V	300mA	
L30	PMOS LDO	1.8V	1.700 - 1.950 V	0.750 - 4.900 V	50mA	
L31	NMOS LDO	1.2V	0.380 - 1.300 V	0.375 - 1.525 V	600mA	Y
L32	NMOS LDO	1.8V	1.700 - 2.840 V	0.750 - 4.900 V	50mA	
LVS1	Switch	1.8V	1.700 - 1.950 V		300mA	
LVS2	Switch	1.8V	1.700 - 1.950 V		100mA	

L25_Bhelter --> Buck FOR LCD VDDIO

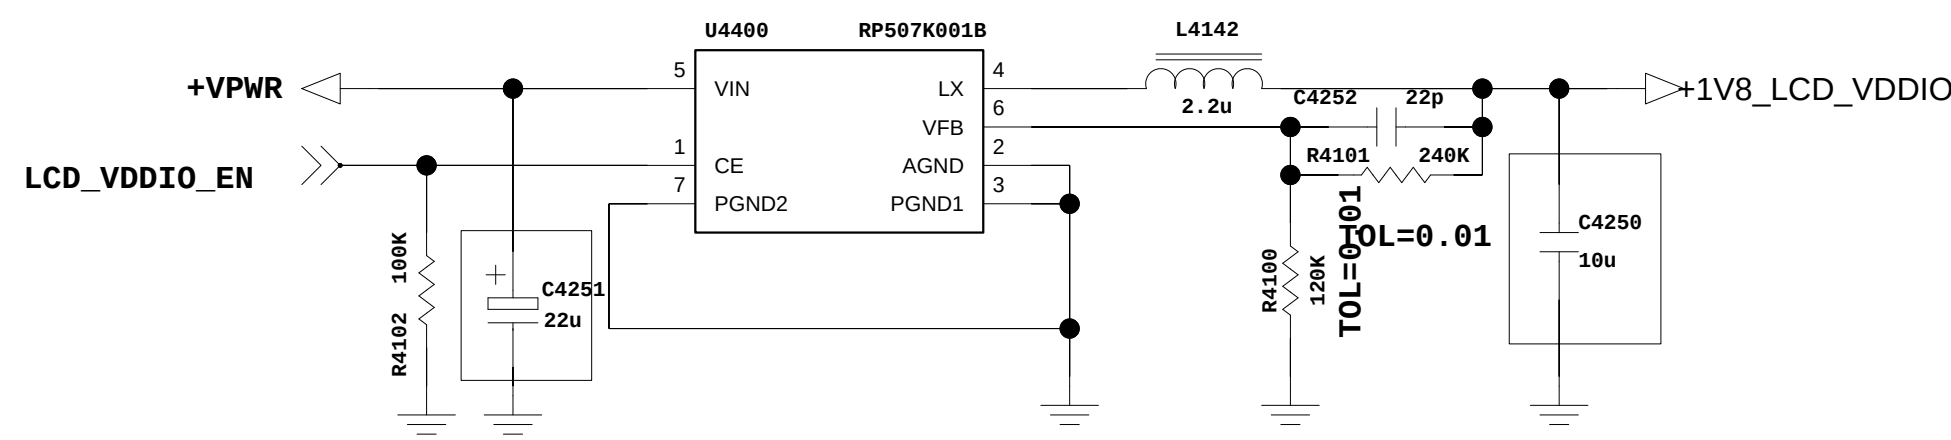


Note : The following LDOs are not considered pseudo-capless capable
- L1, L3, L5, L7, L26 and L31
The remaining LDOs are considered pseudo-capless capable.


< 4-7-3-4_Wireless_Charger_IDTP902EX_0.5

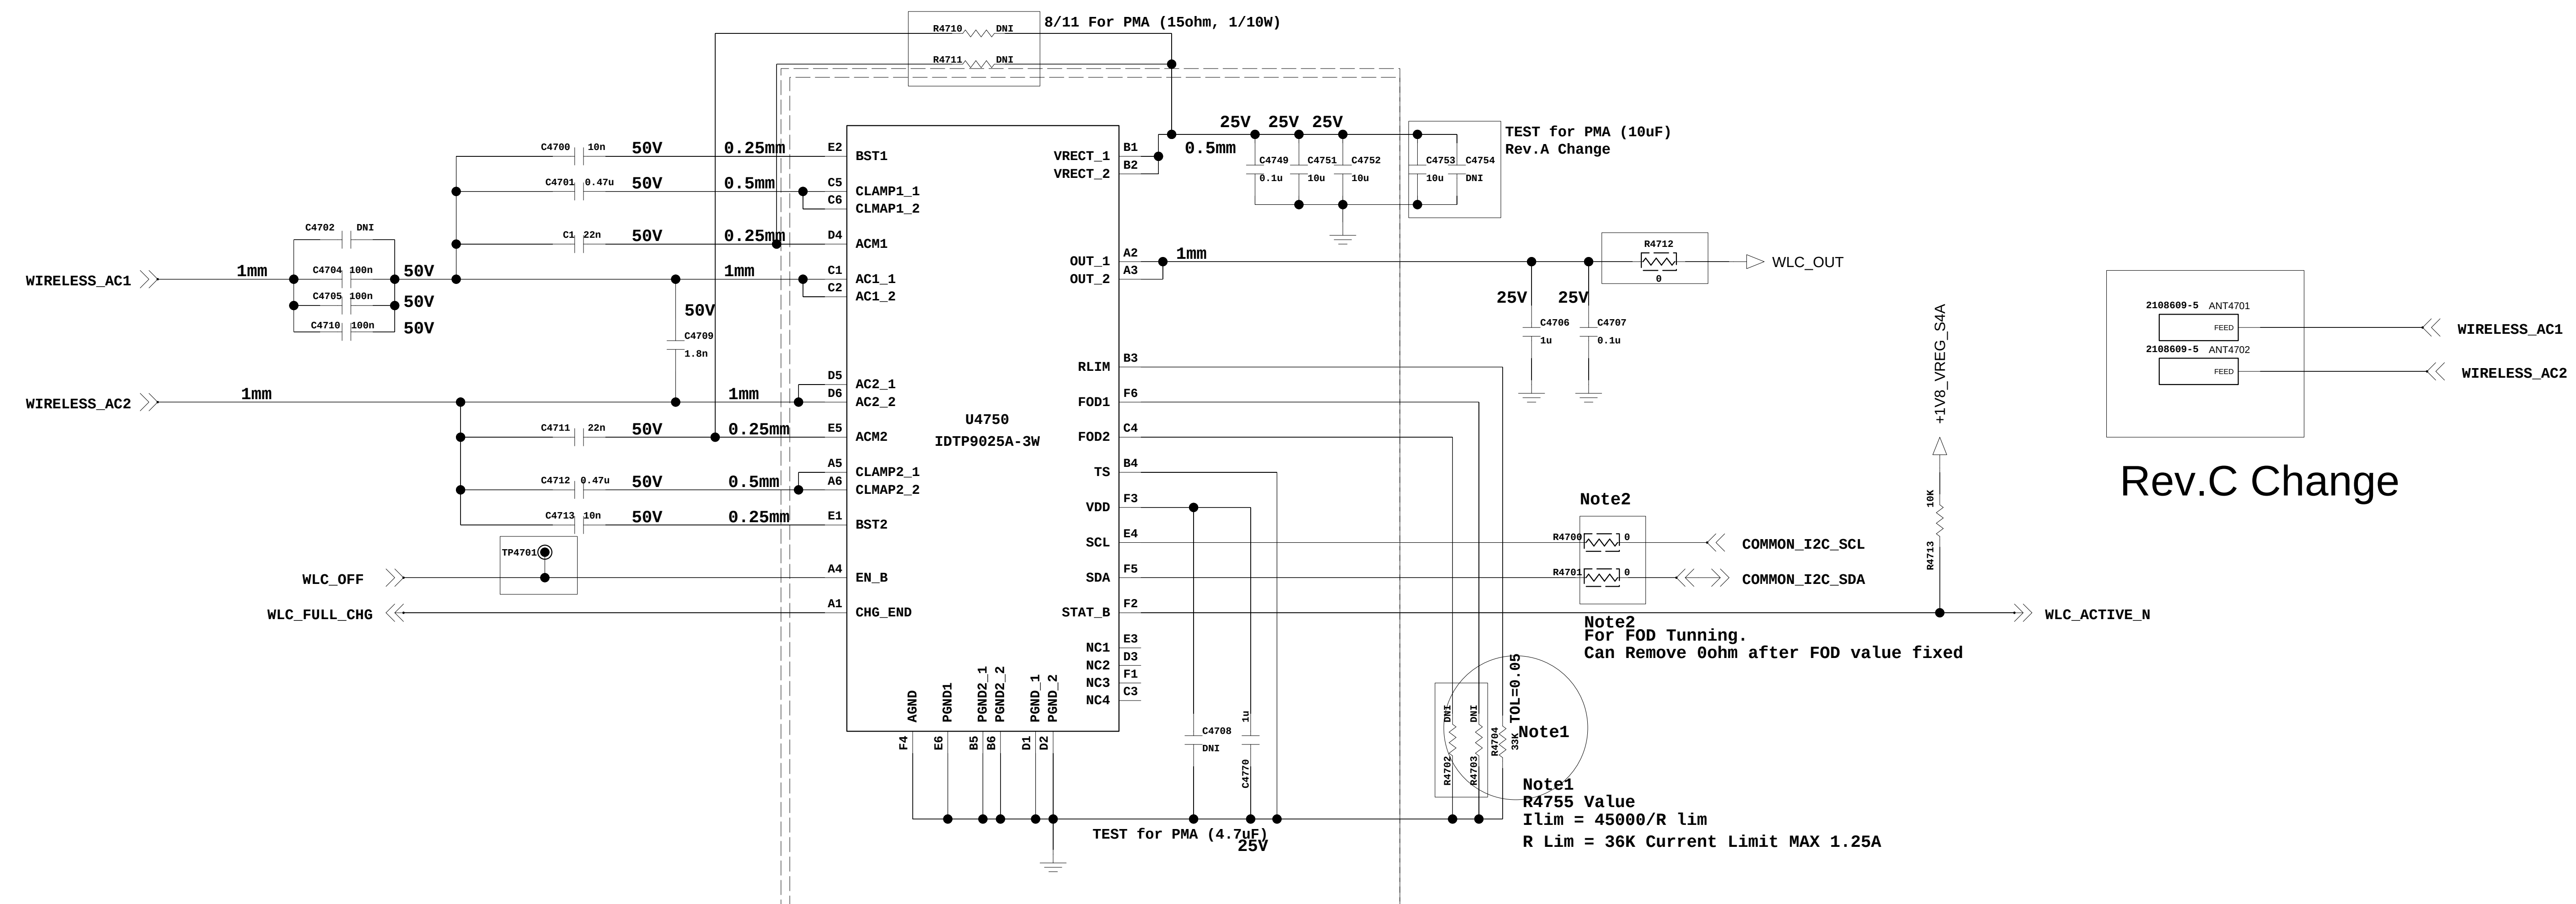

Bypass booster FAN48623

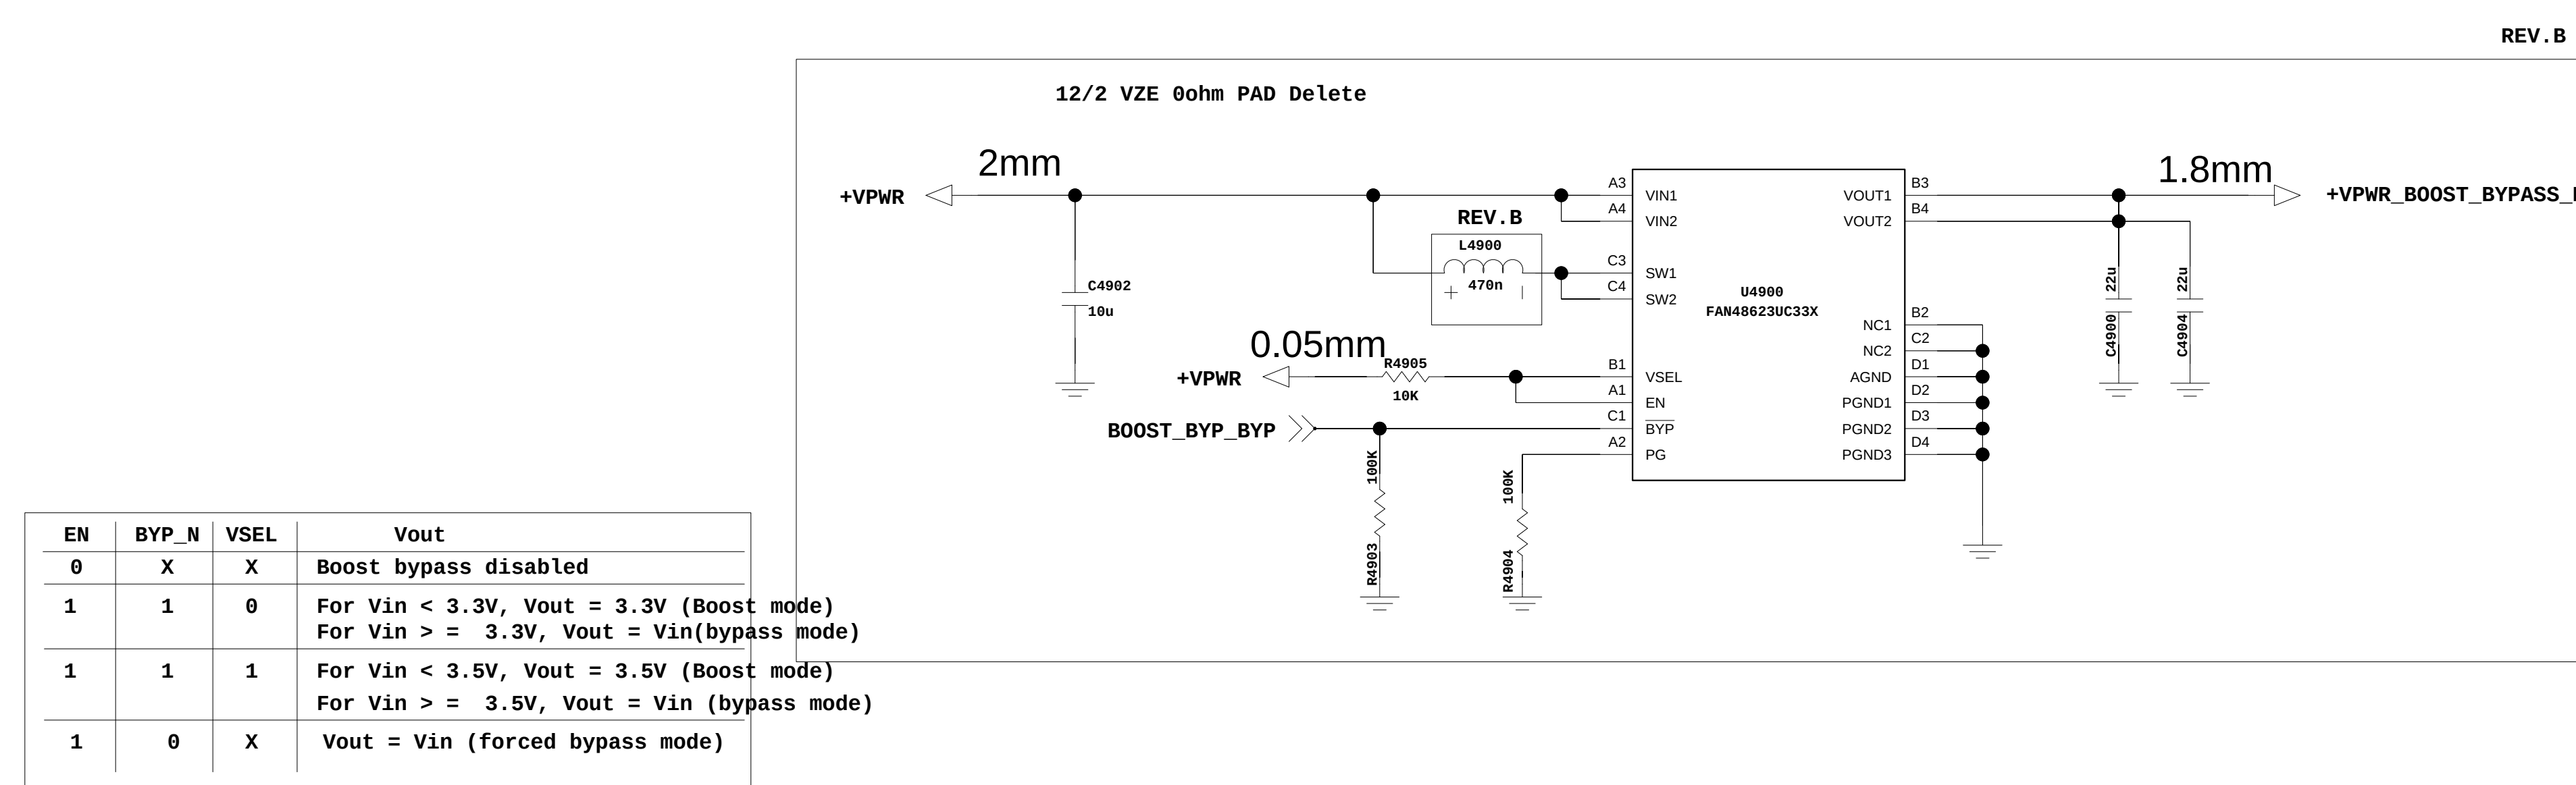

< 5-1-1-7_BT_WiFi_BCM4339_CoB> Rev_1.1

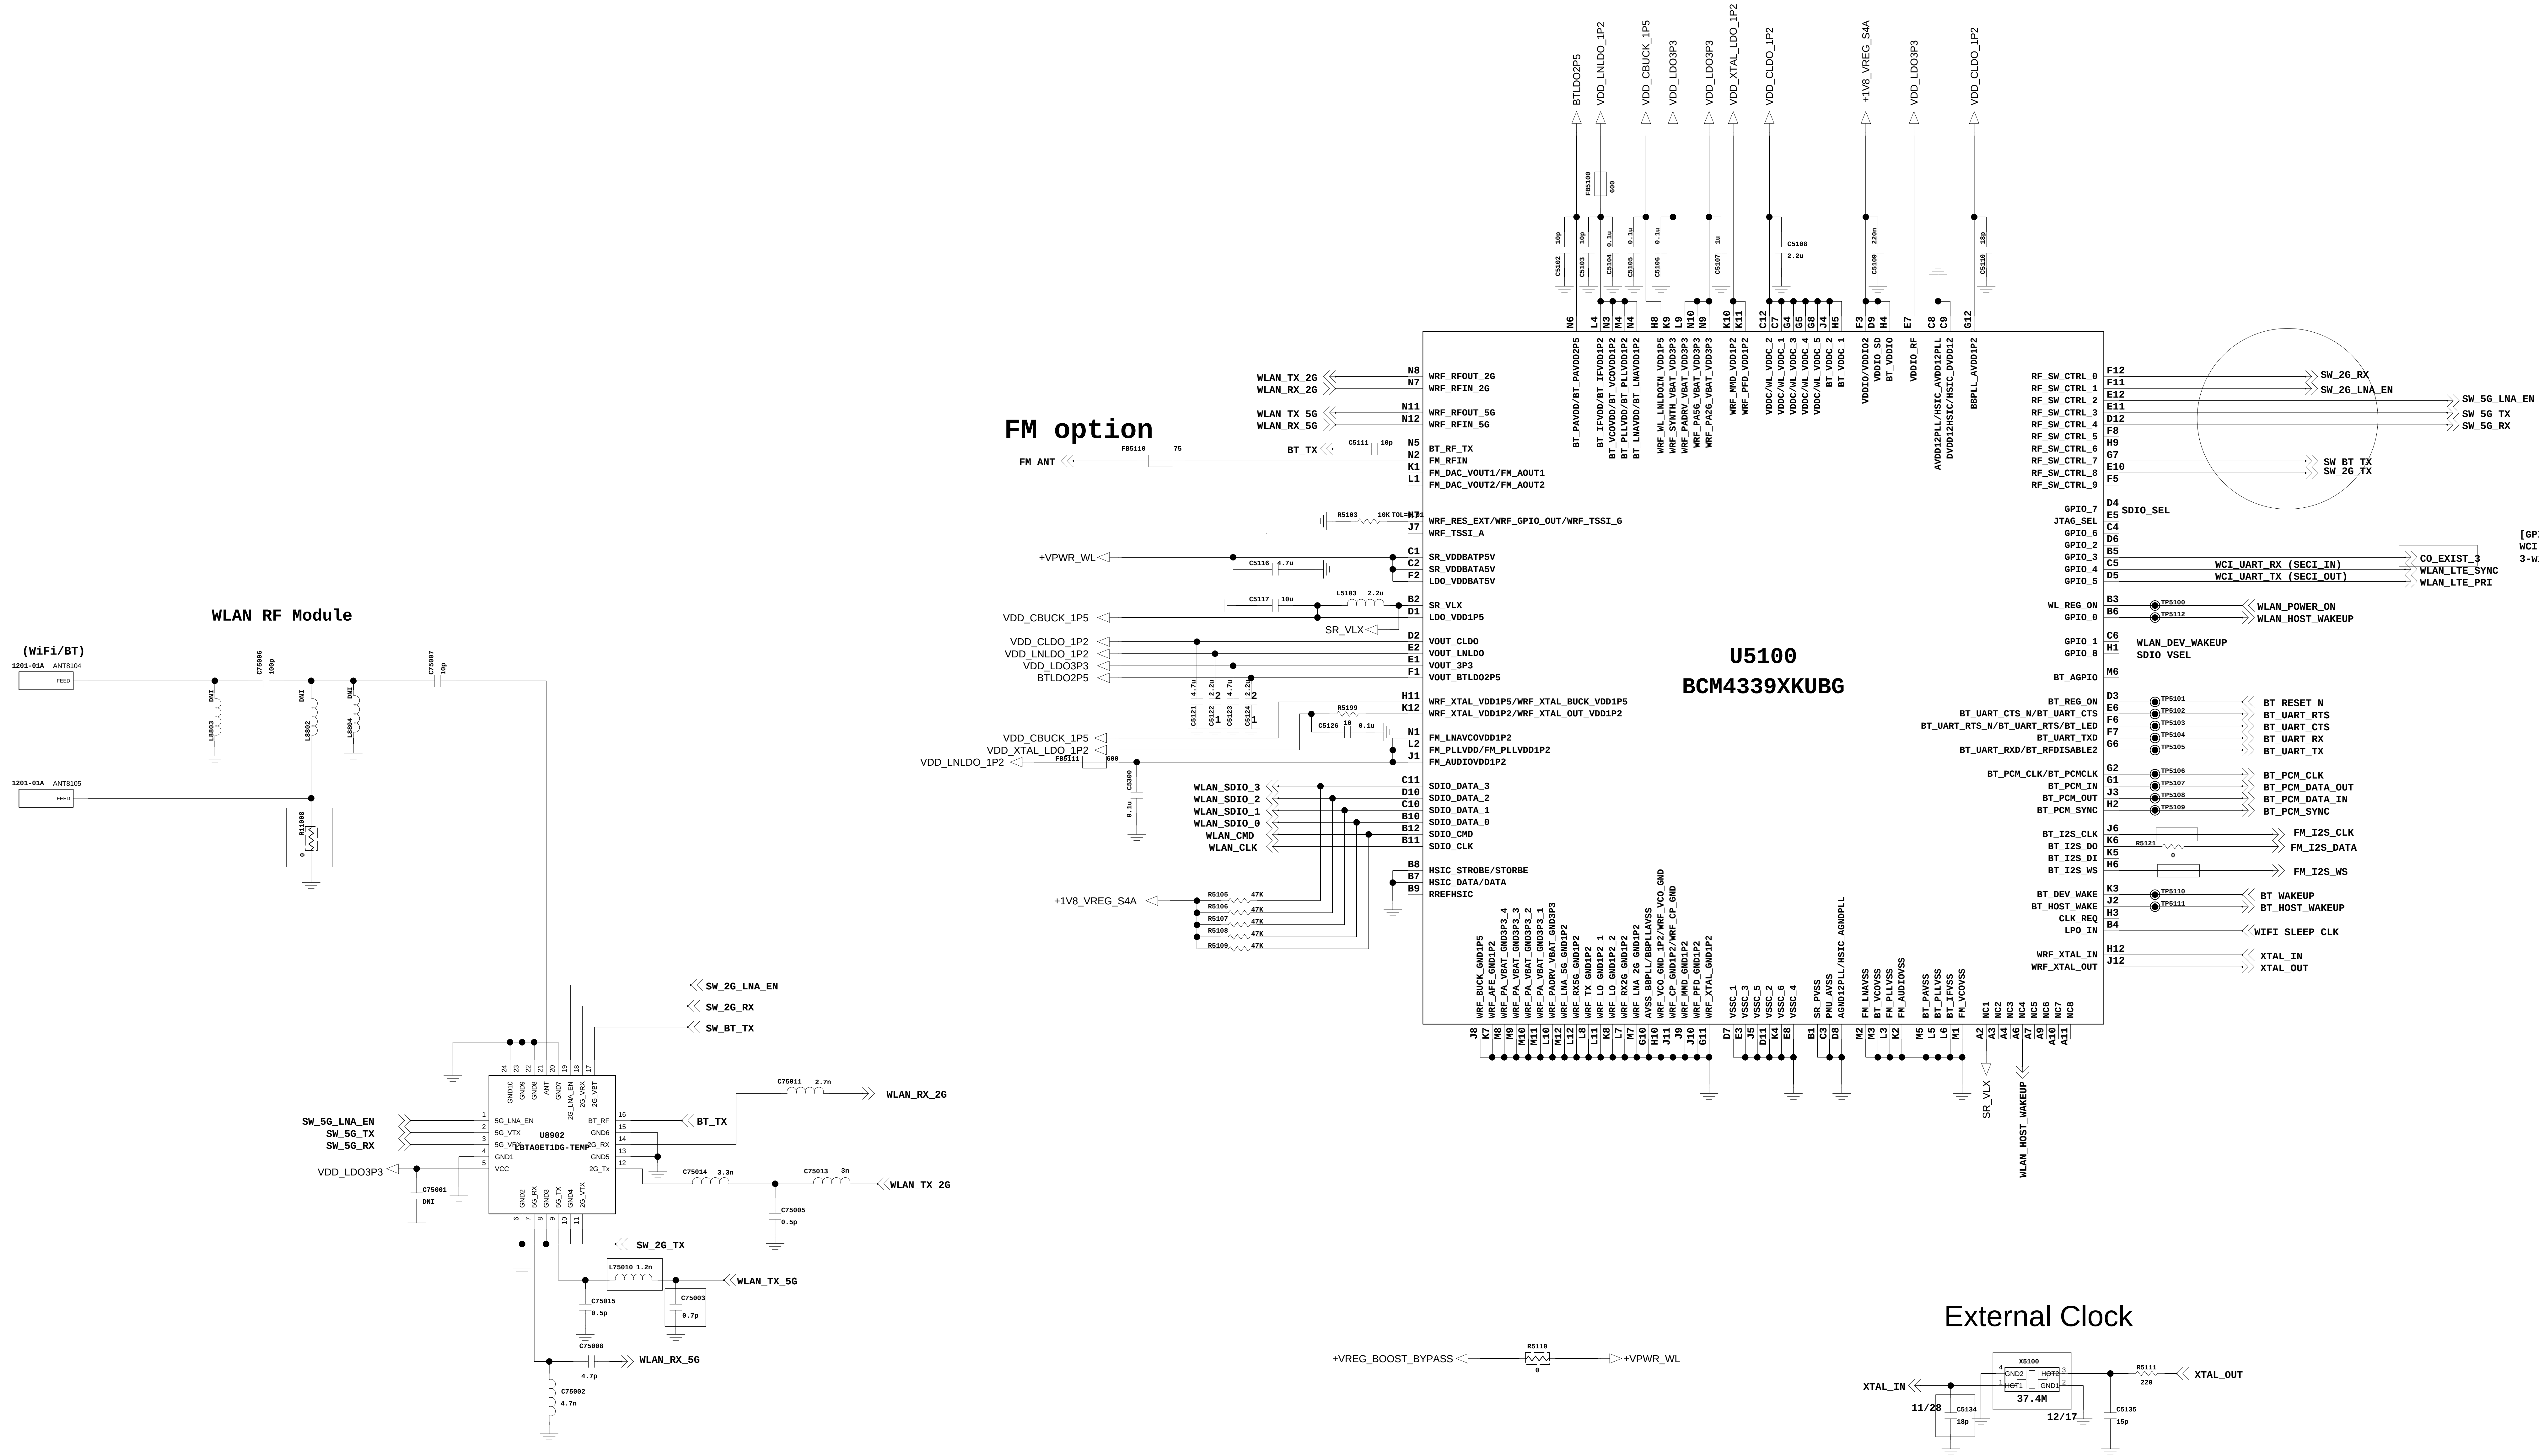

Rev_1.2




NFC Antenna




< 5-3-1-5_TDMB_FC8080 >

Rev_1.0

AMP_SNY01M2552

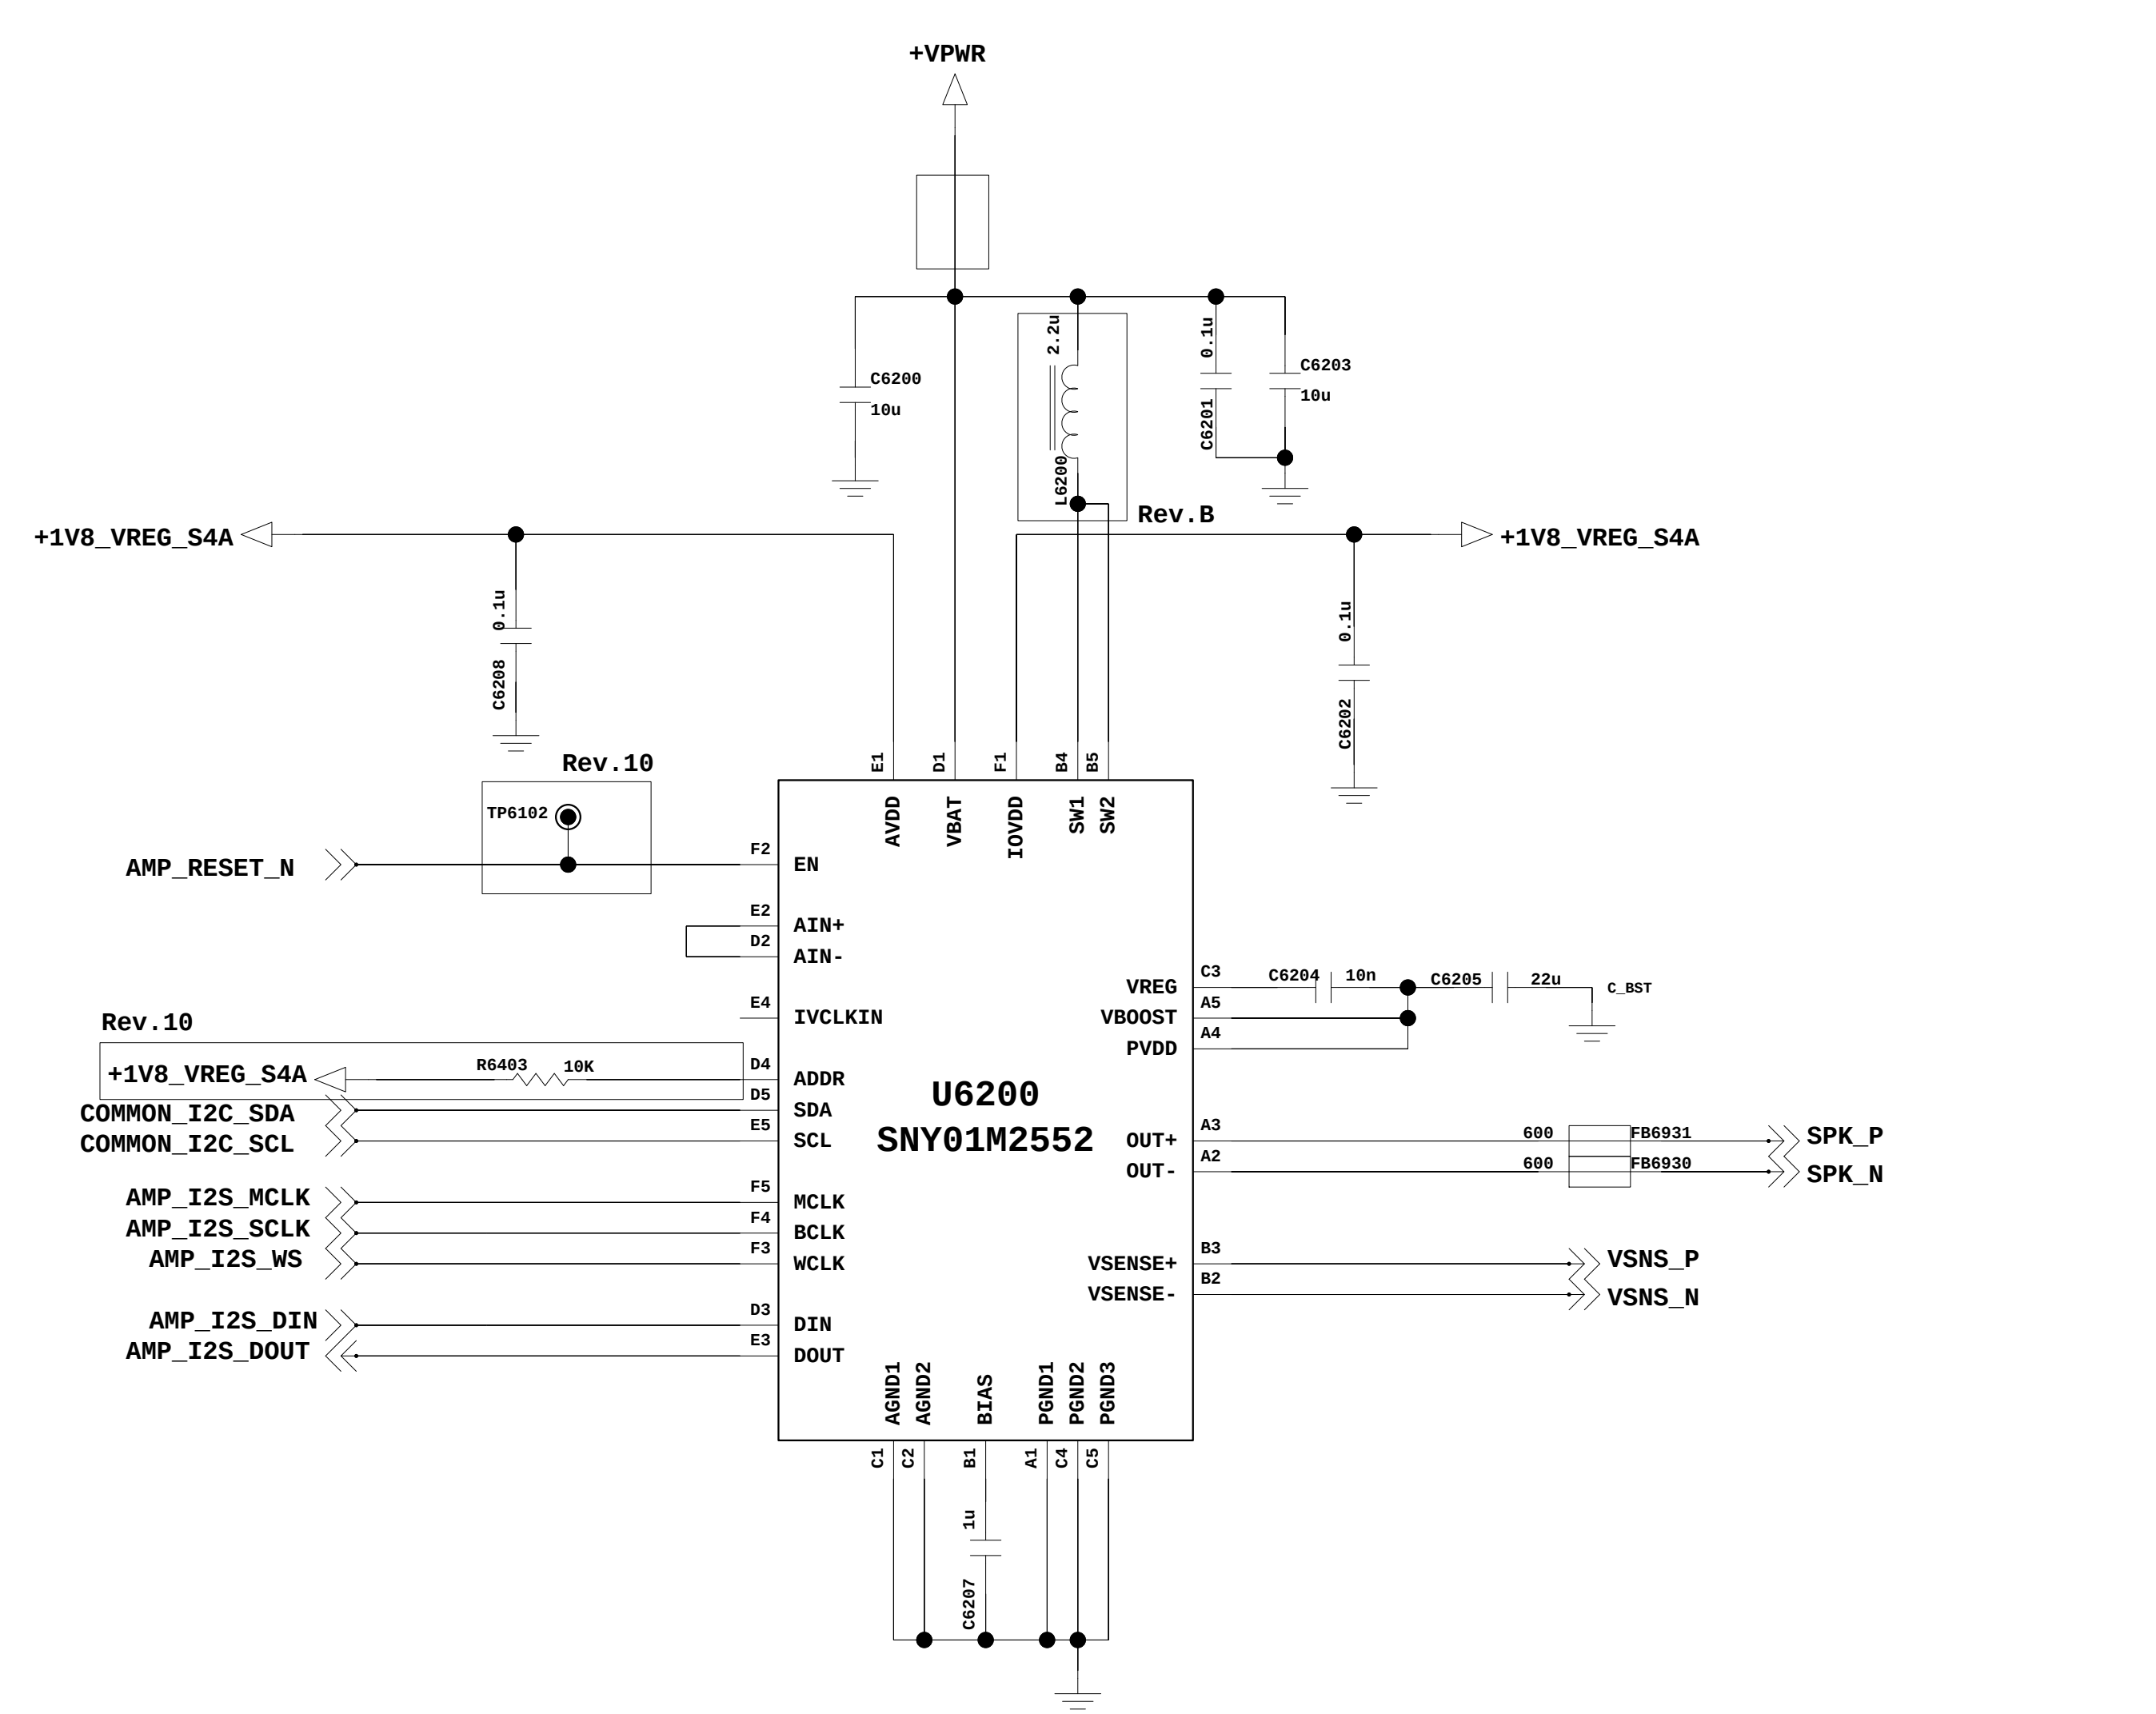


Sub_MIC1

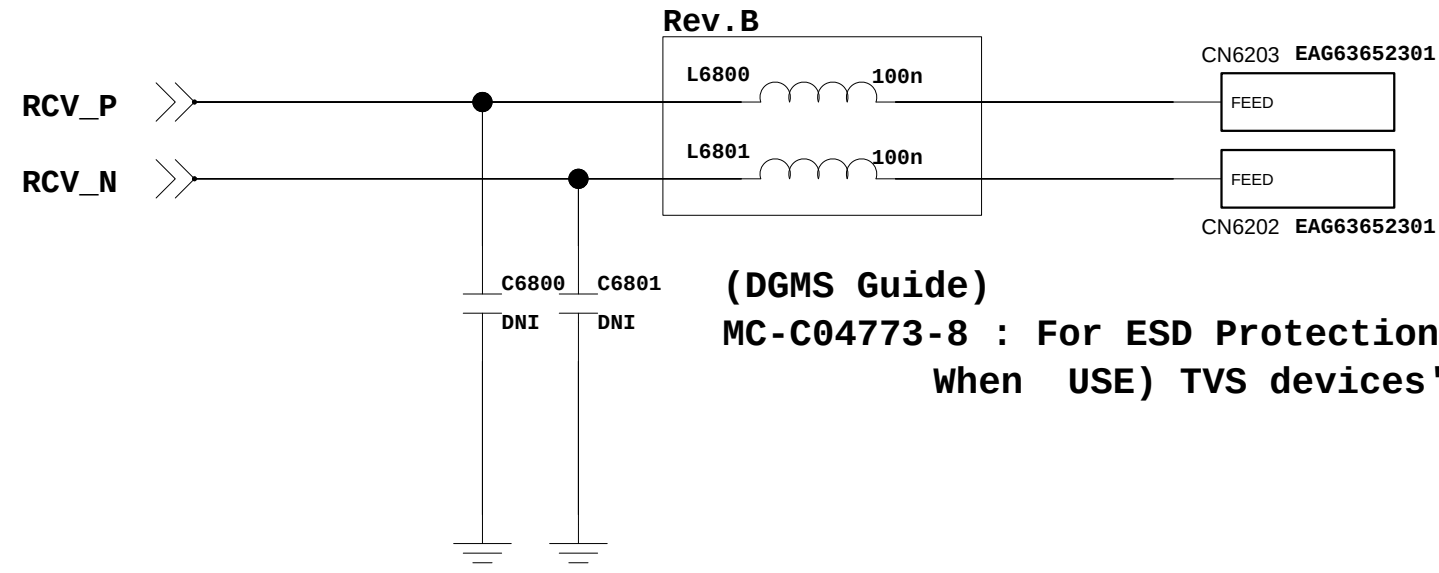


 LG Electronics	
H815	
TITLE	
SIZE A2	DWG NO PDM NUMBER
SHEET 1	OF 25
MIC RCV	SPK SPK
Drawing Date	

<7-1-8-4-2_Quad_INCELL_LCD_5.5">

Rev_0.1


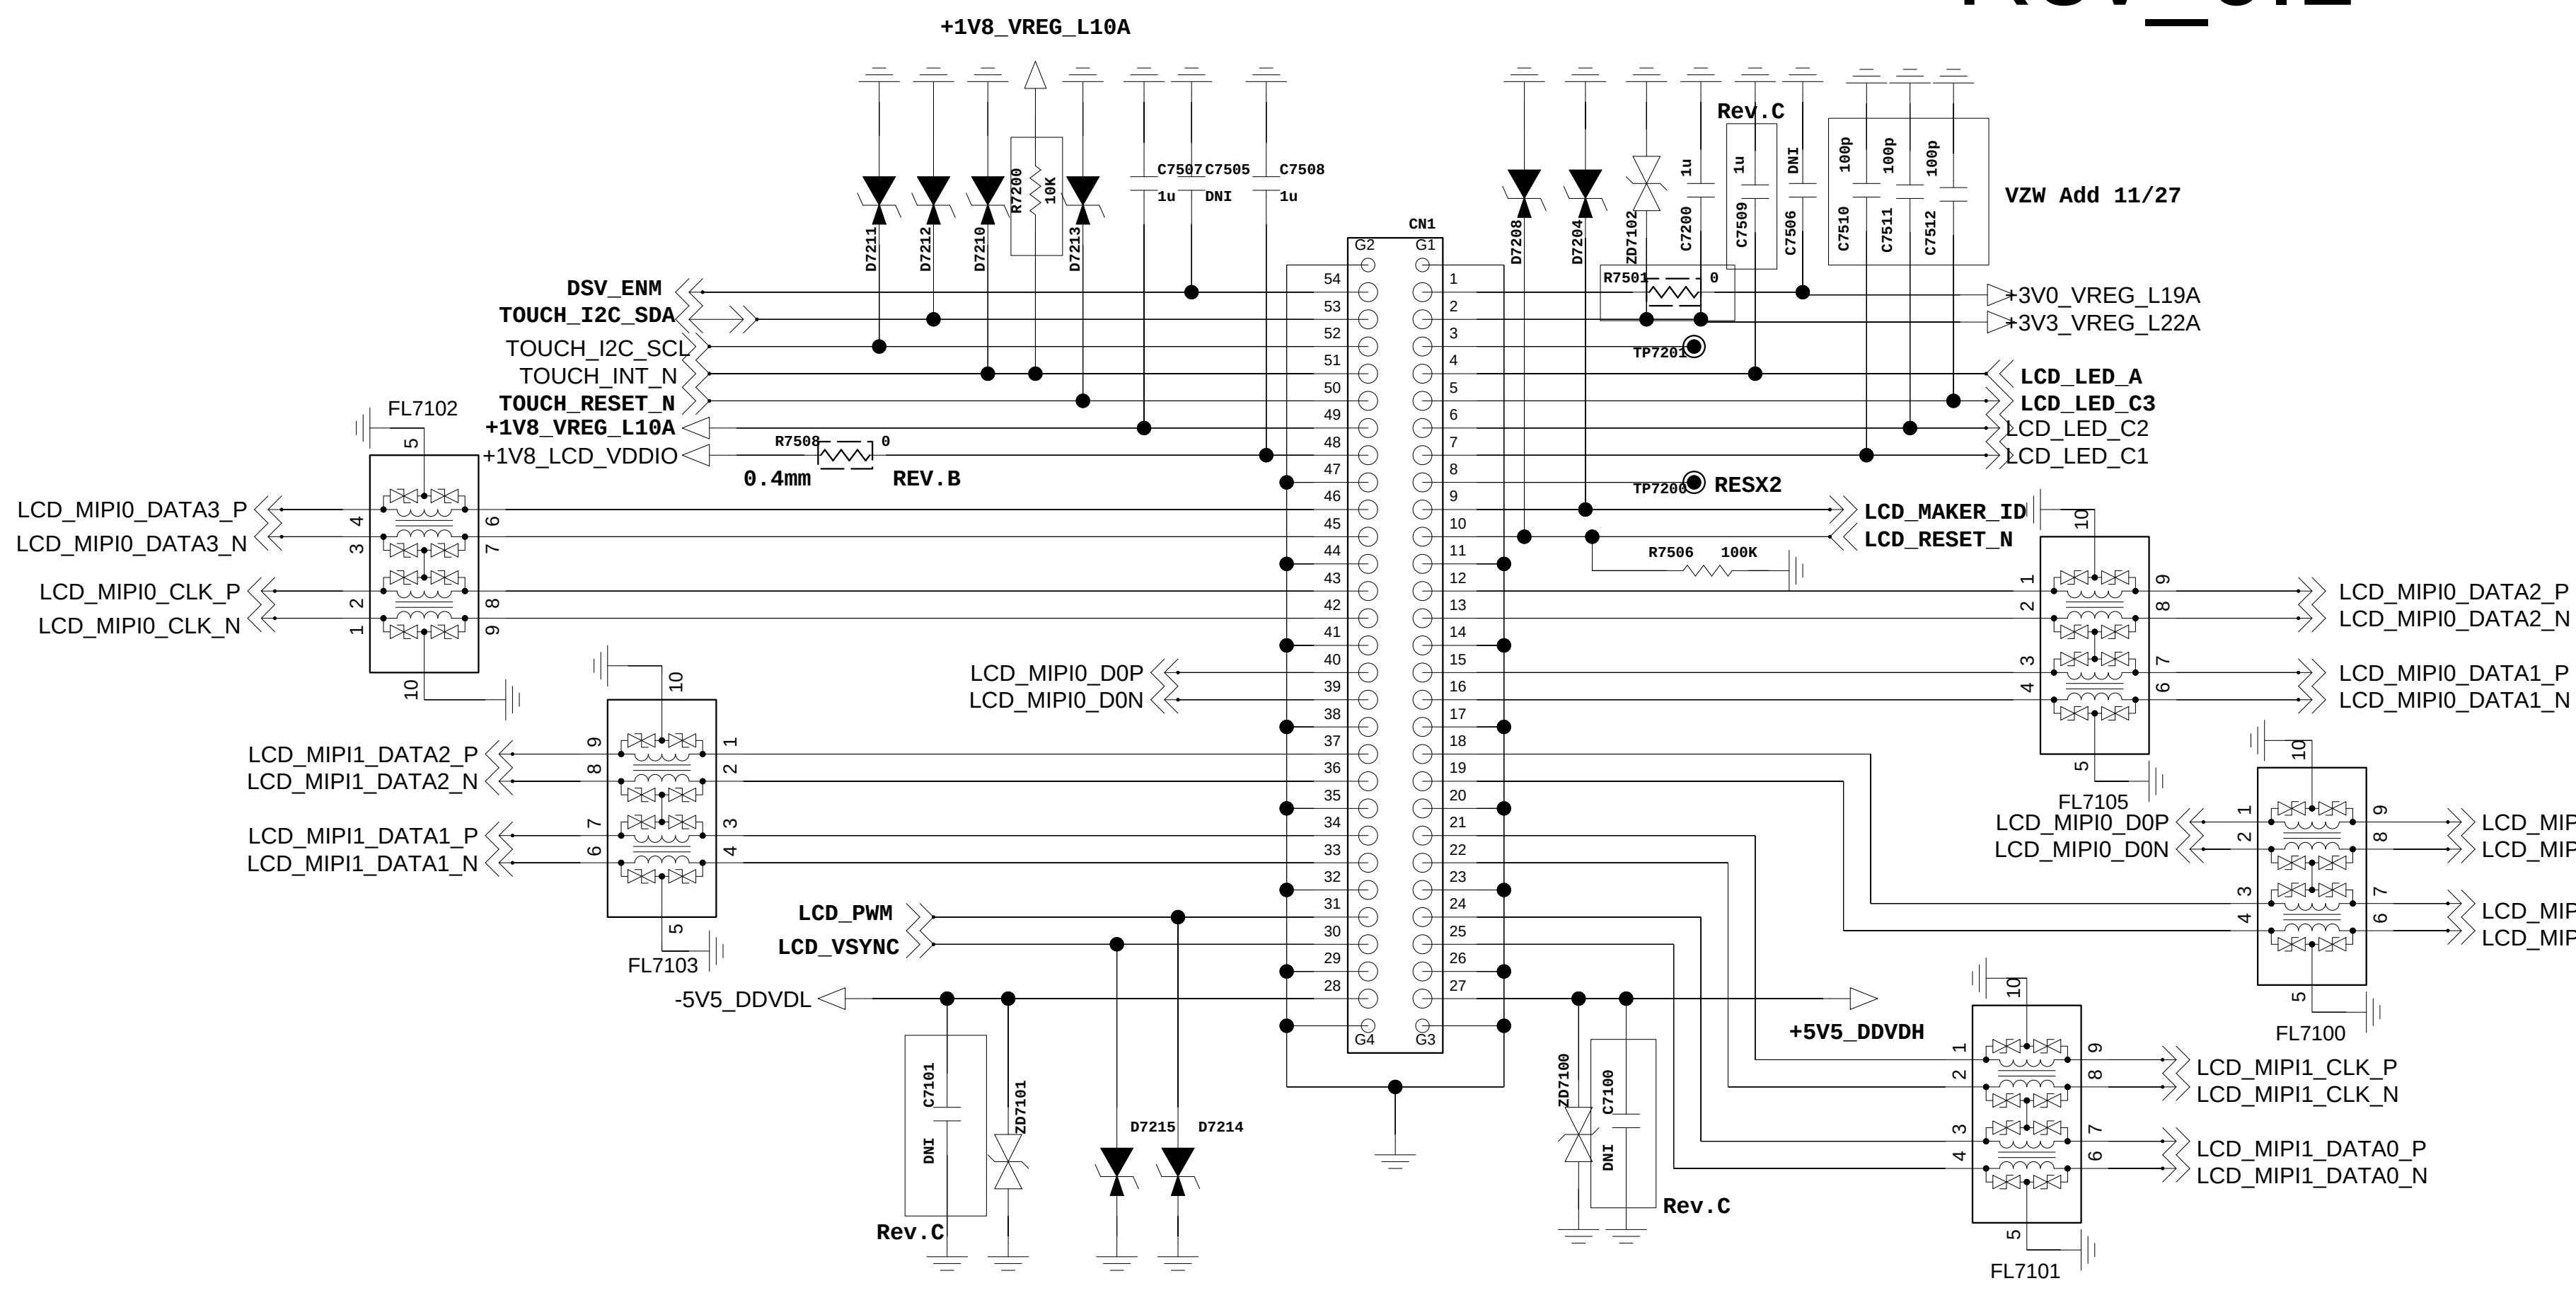


DSV DW8768

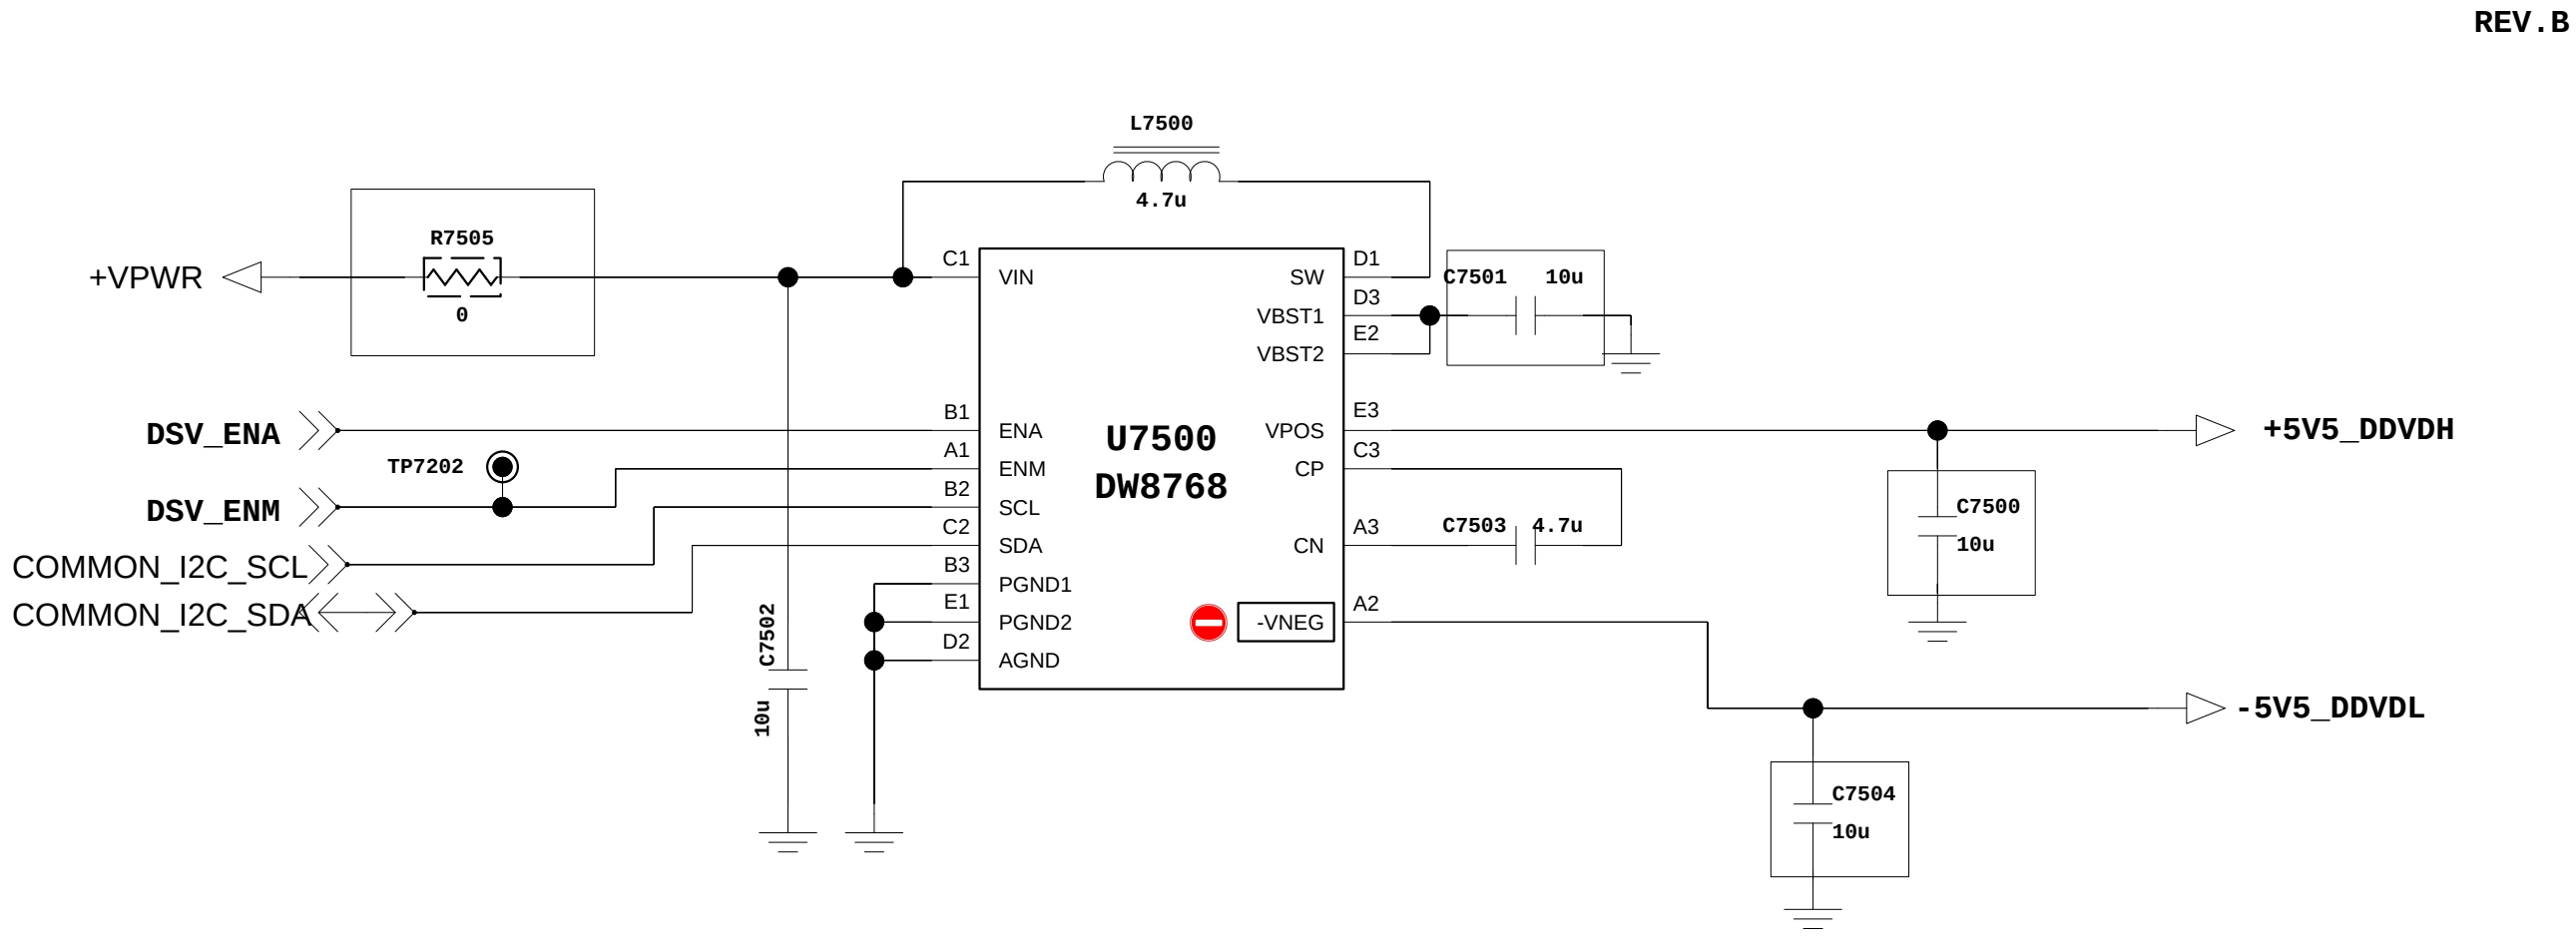


< MAIN_Camera_30pin_16M_OIS>

<Back_Key_LDADF_FPCB>

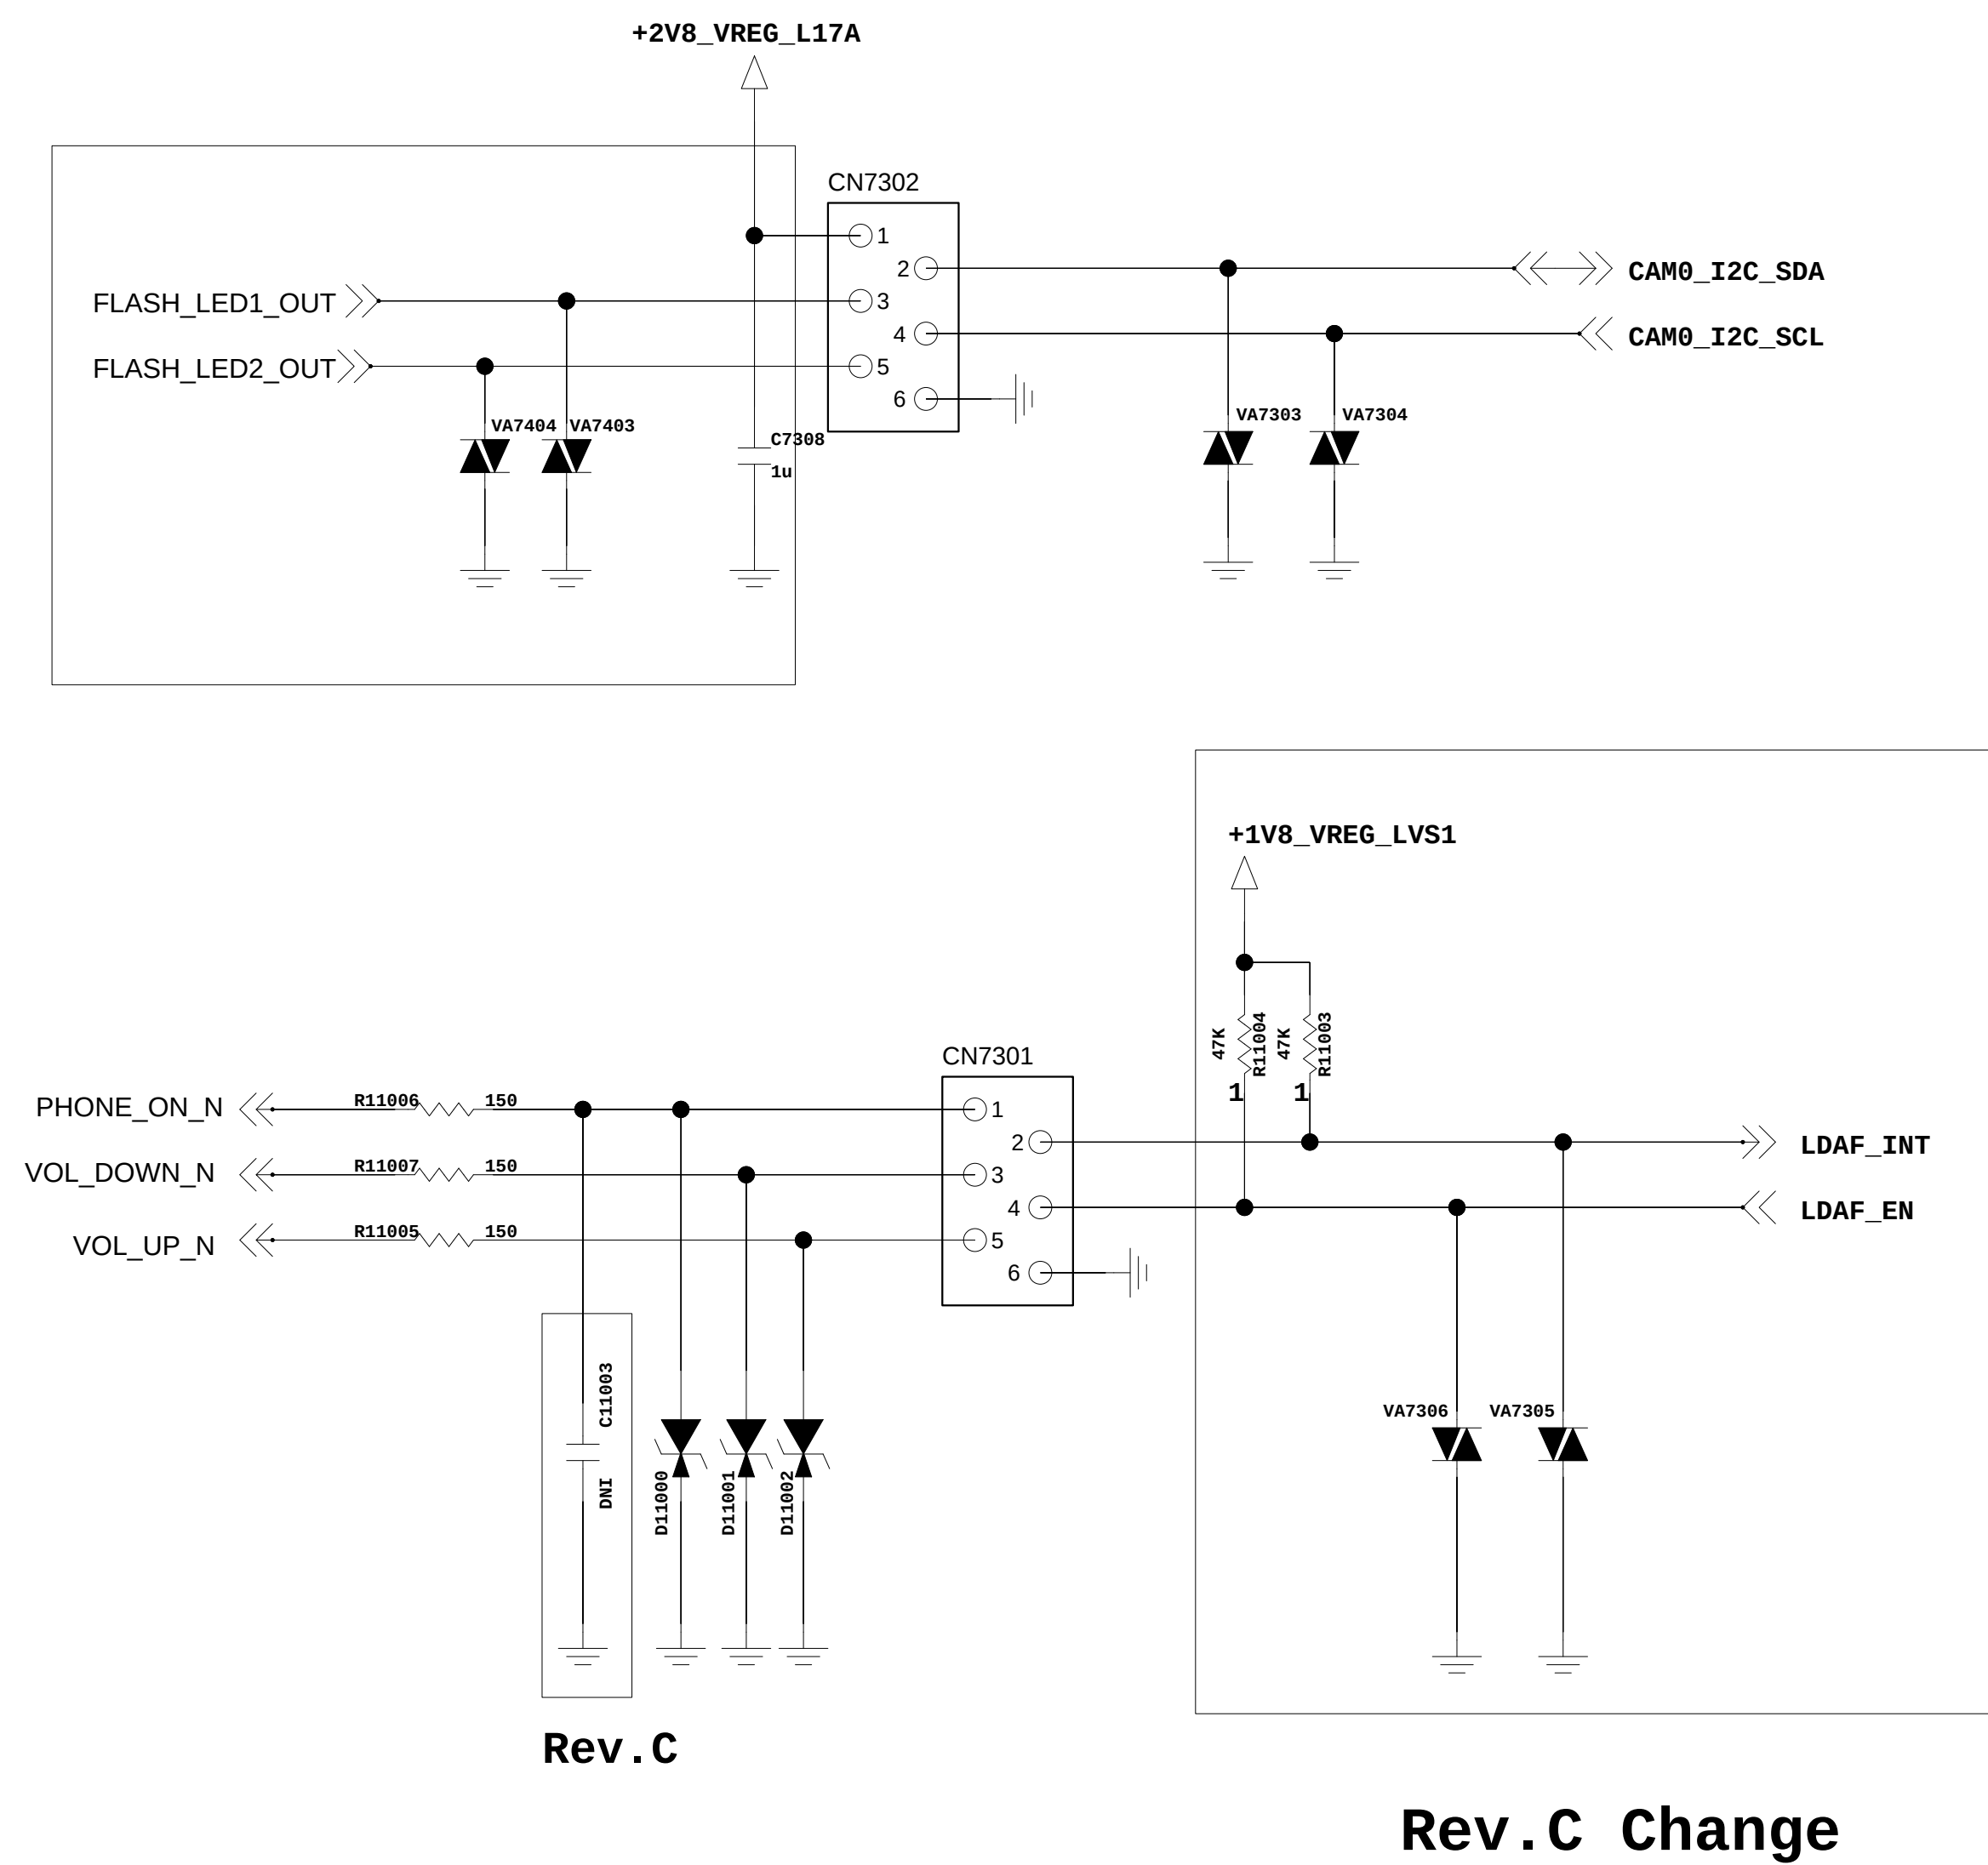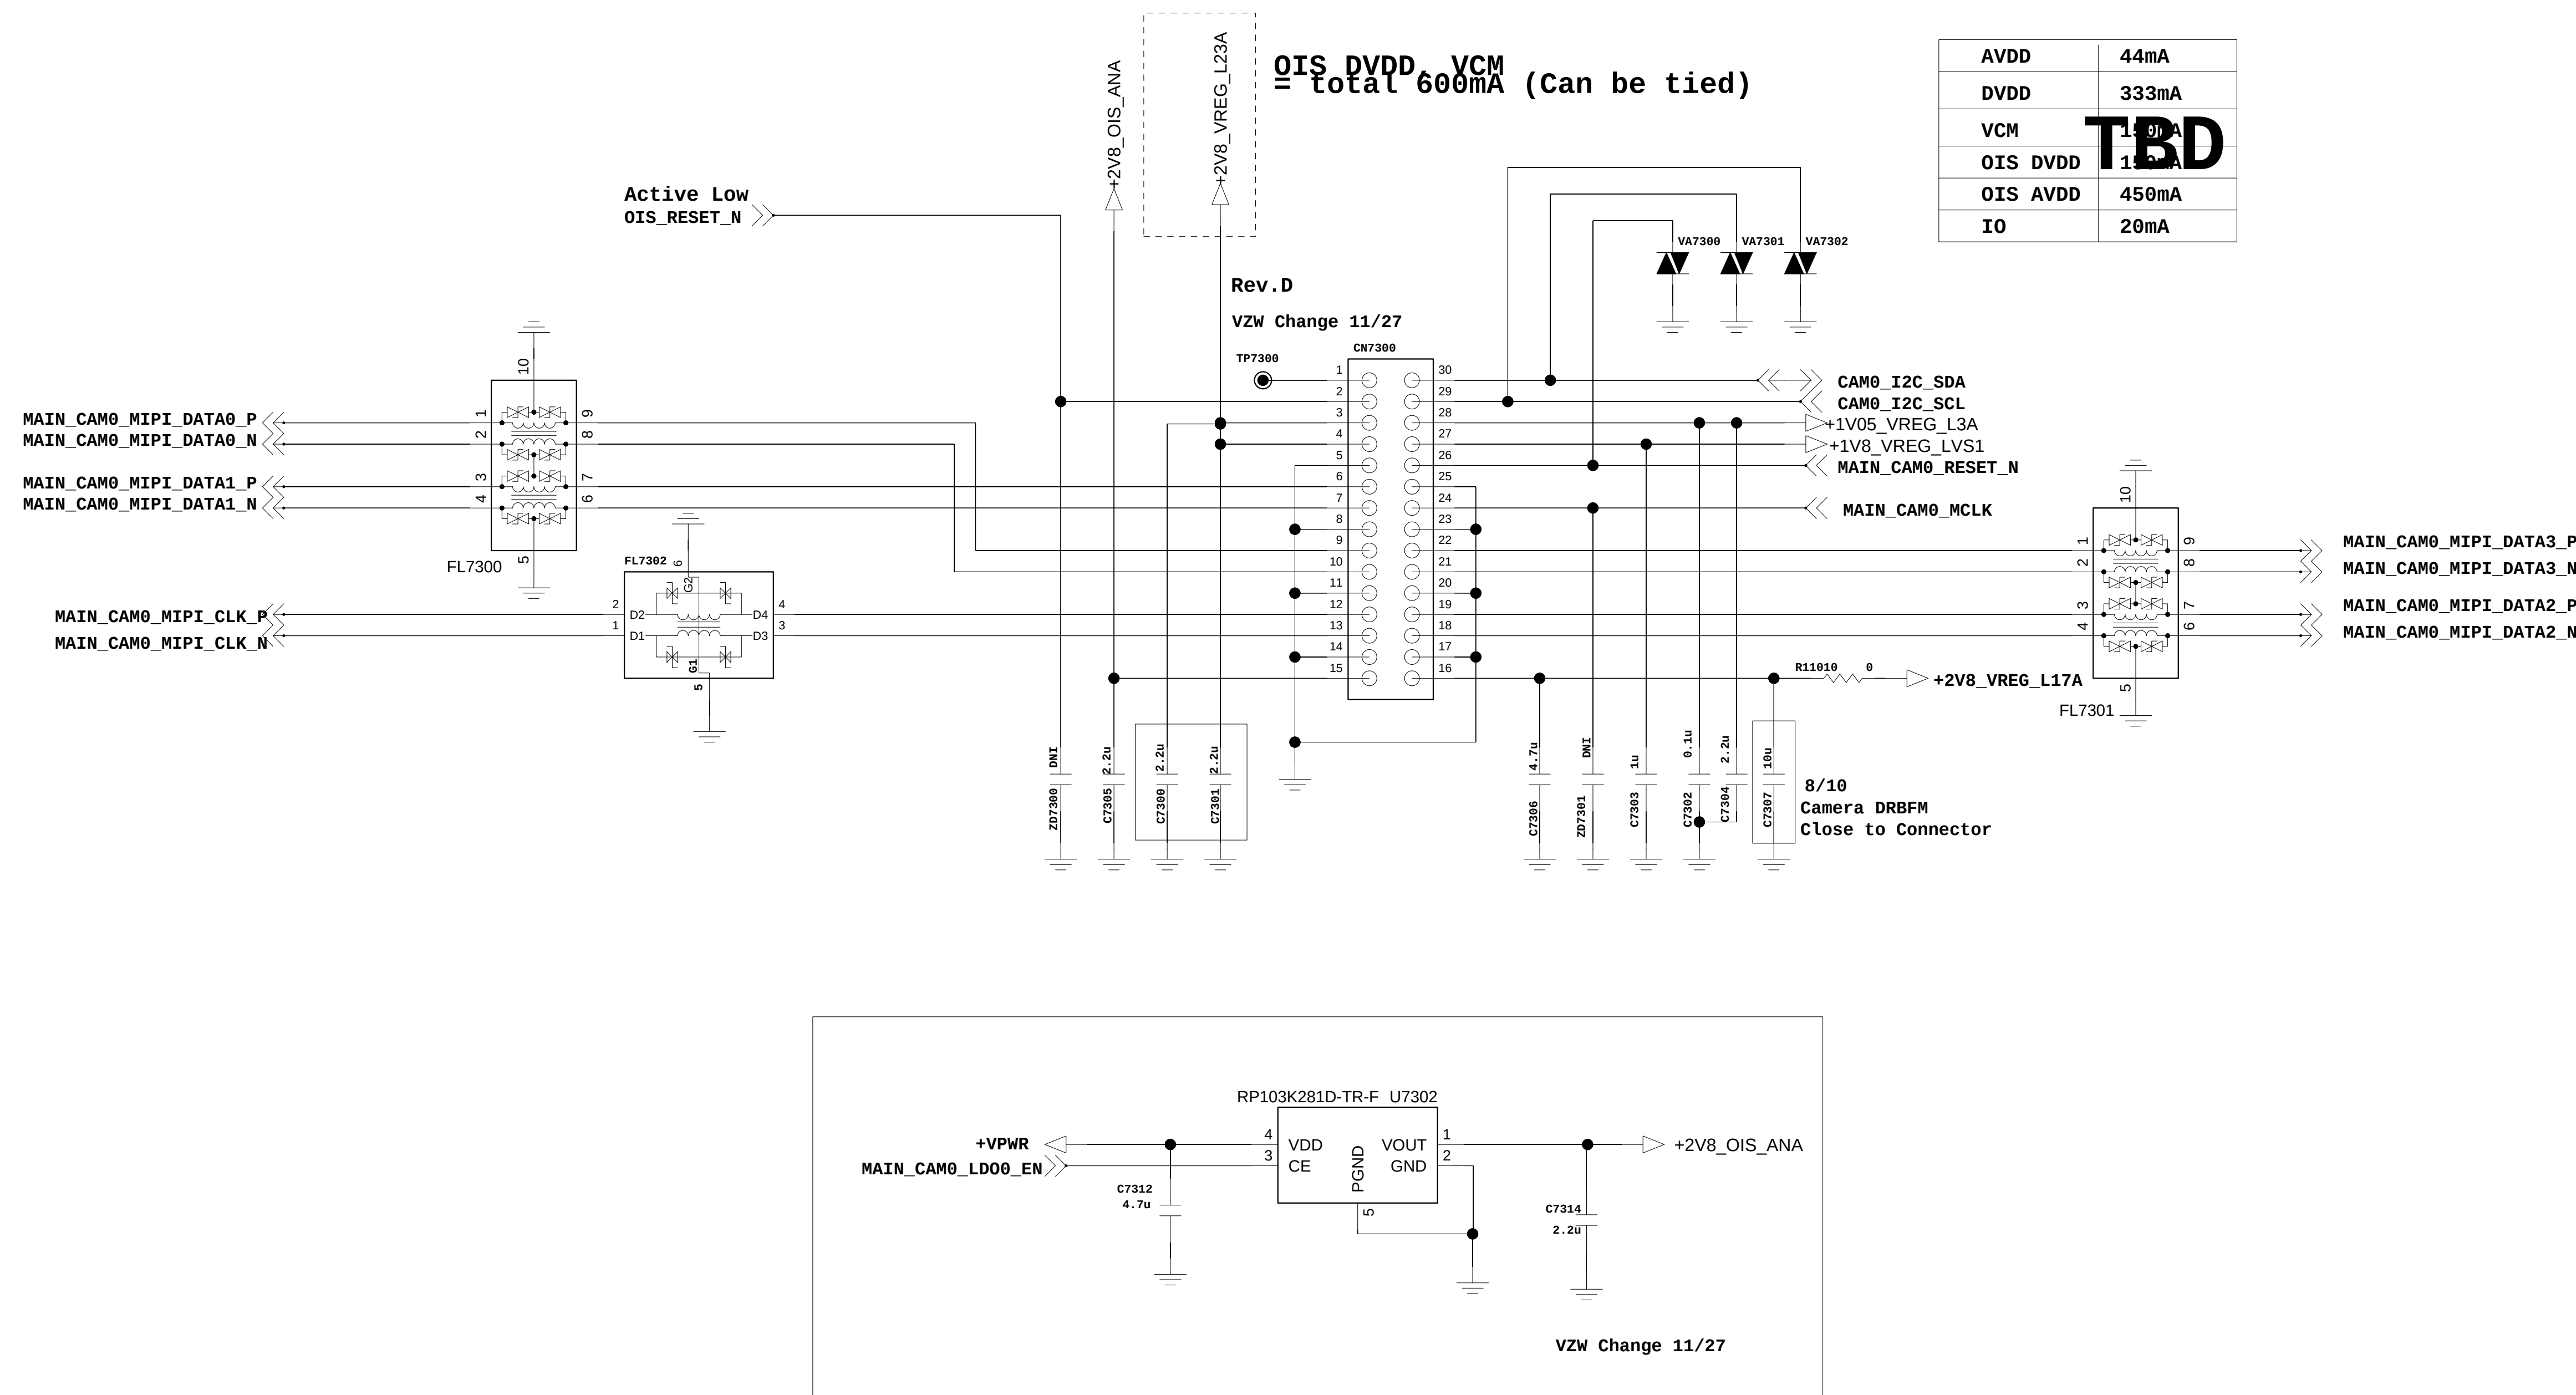


<7-3-5-1_30pin_8M_FF>

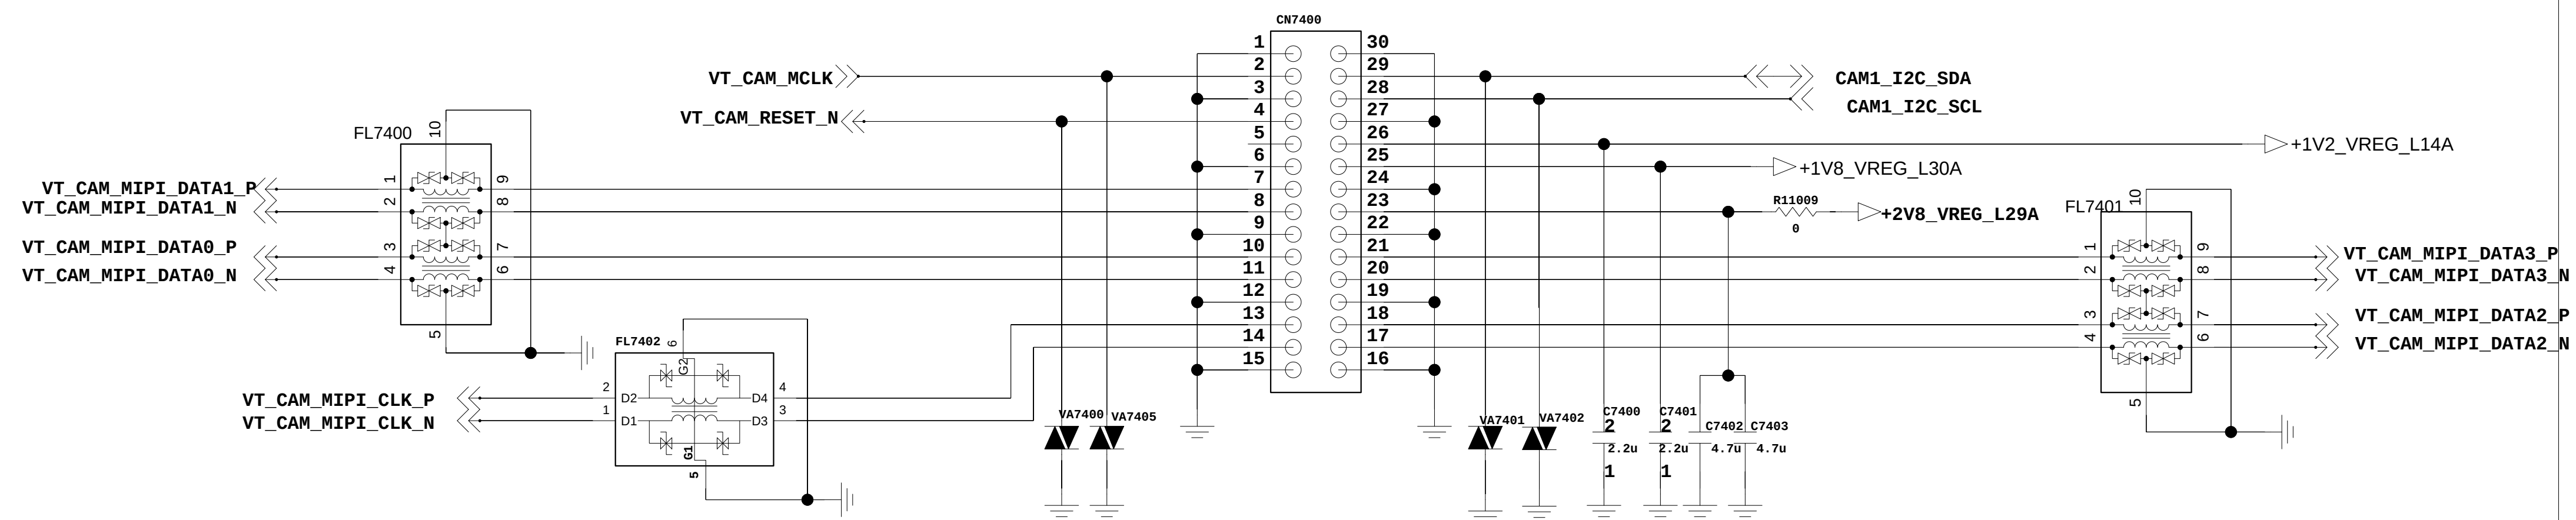


Slimport ANX7816


MC-C06026-2 : If the AP is from Qualcomm the TP on HDMI_CEC is required for SW Test in production

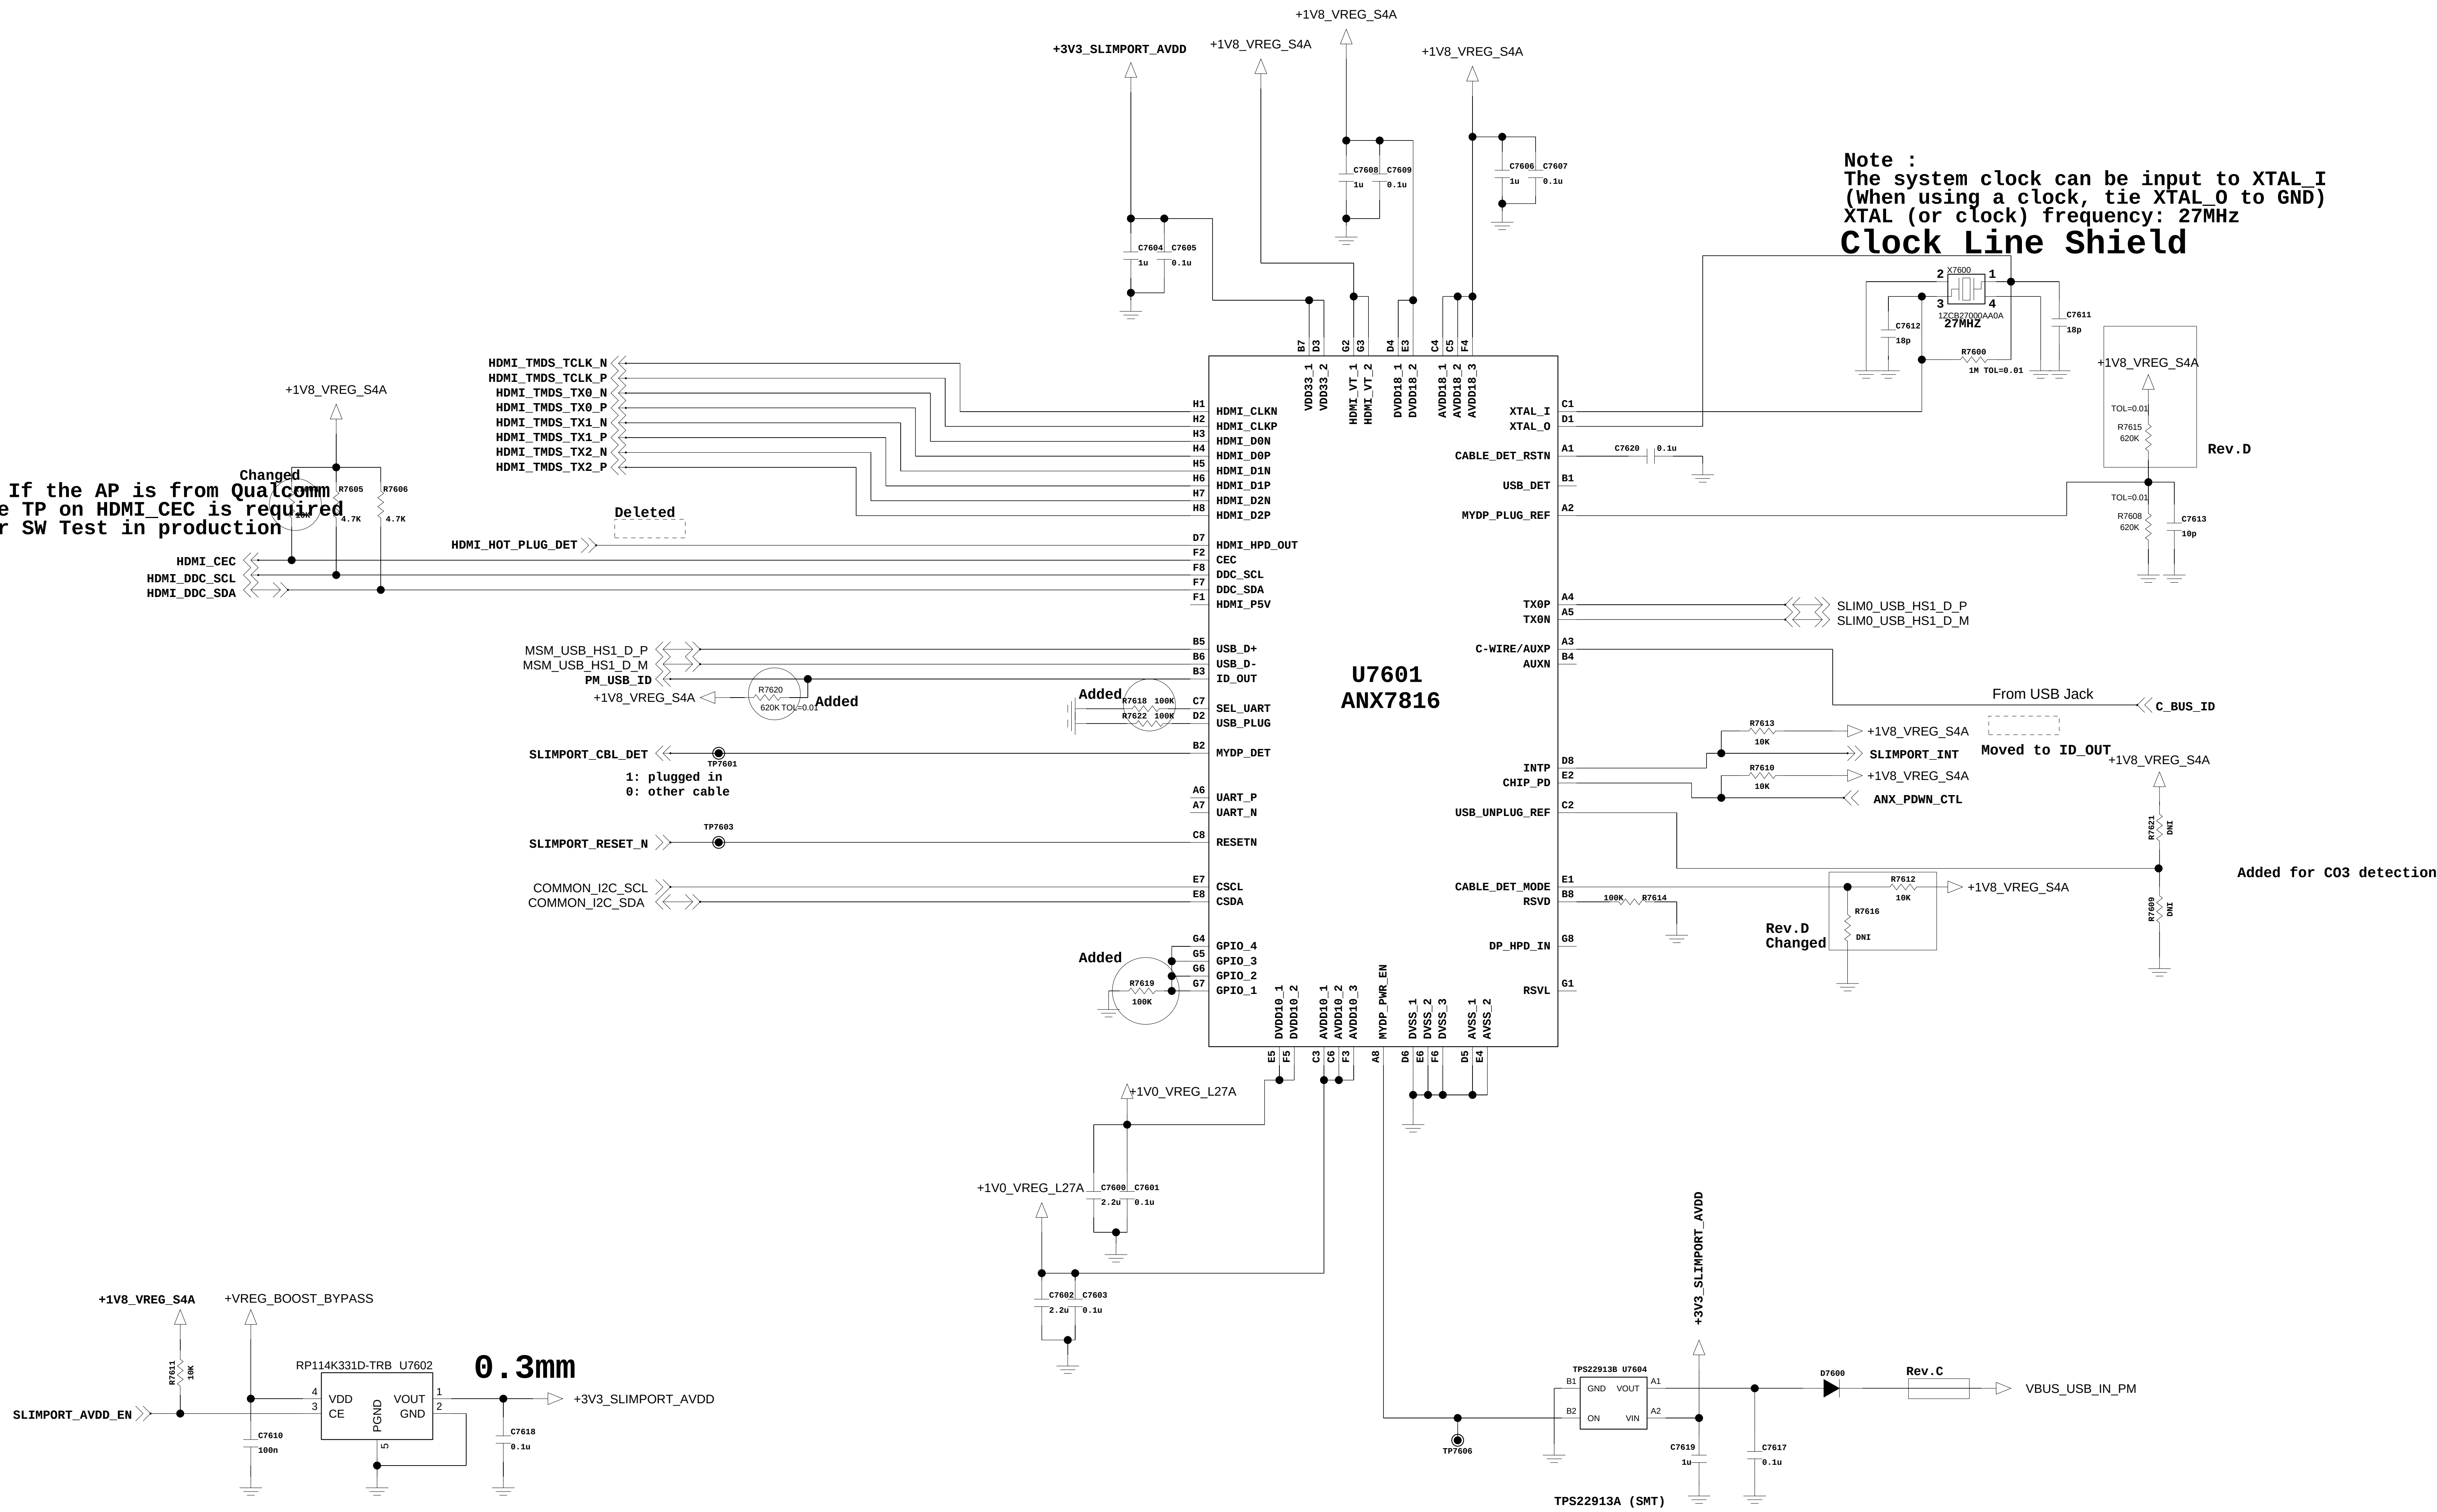



<9-1-2_Battery_CNT_4REV.0.5

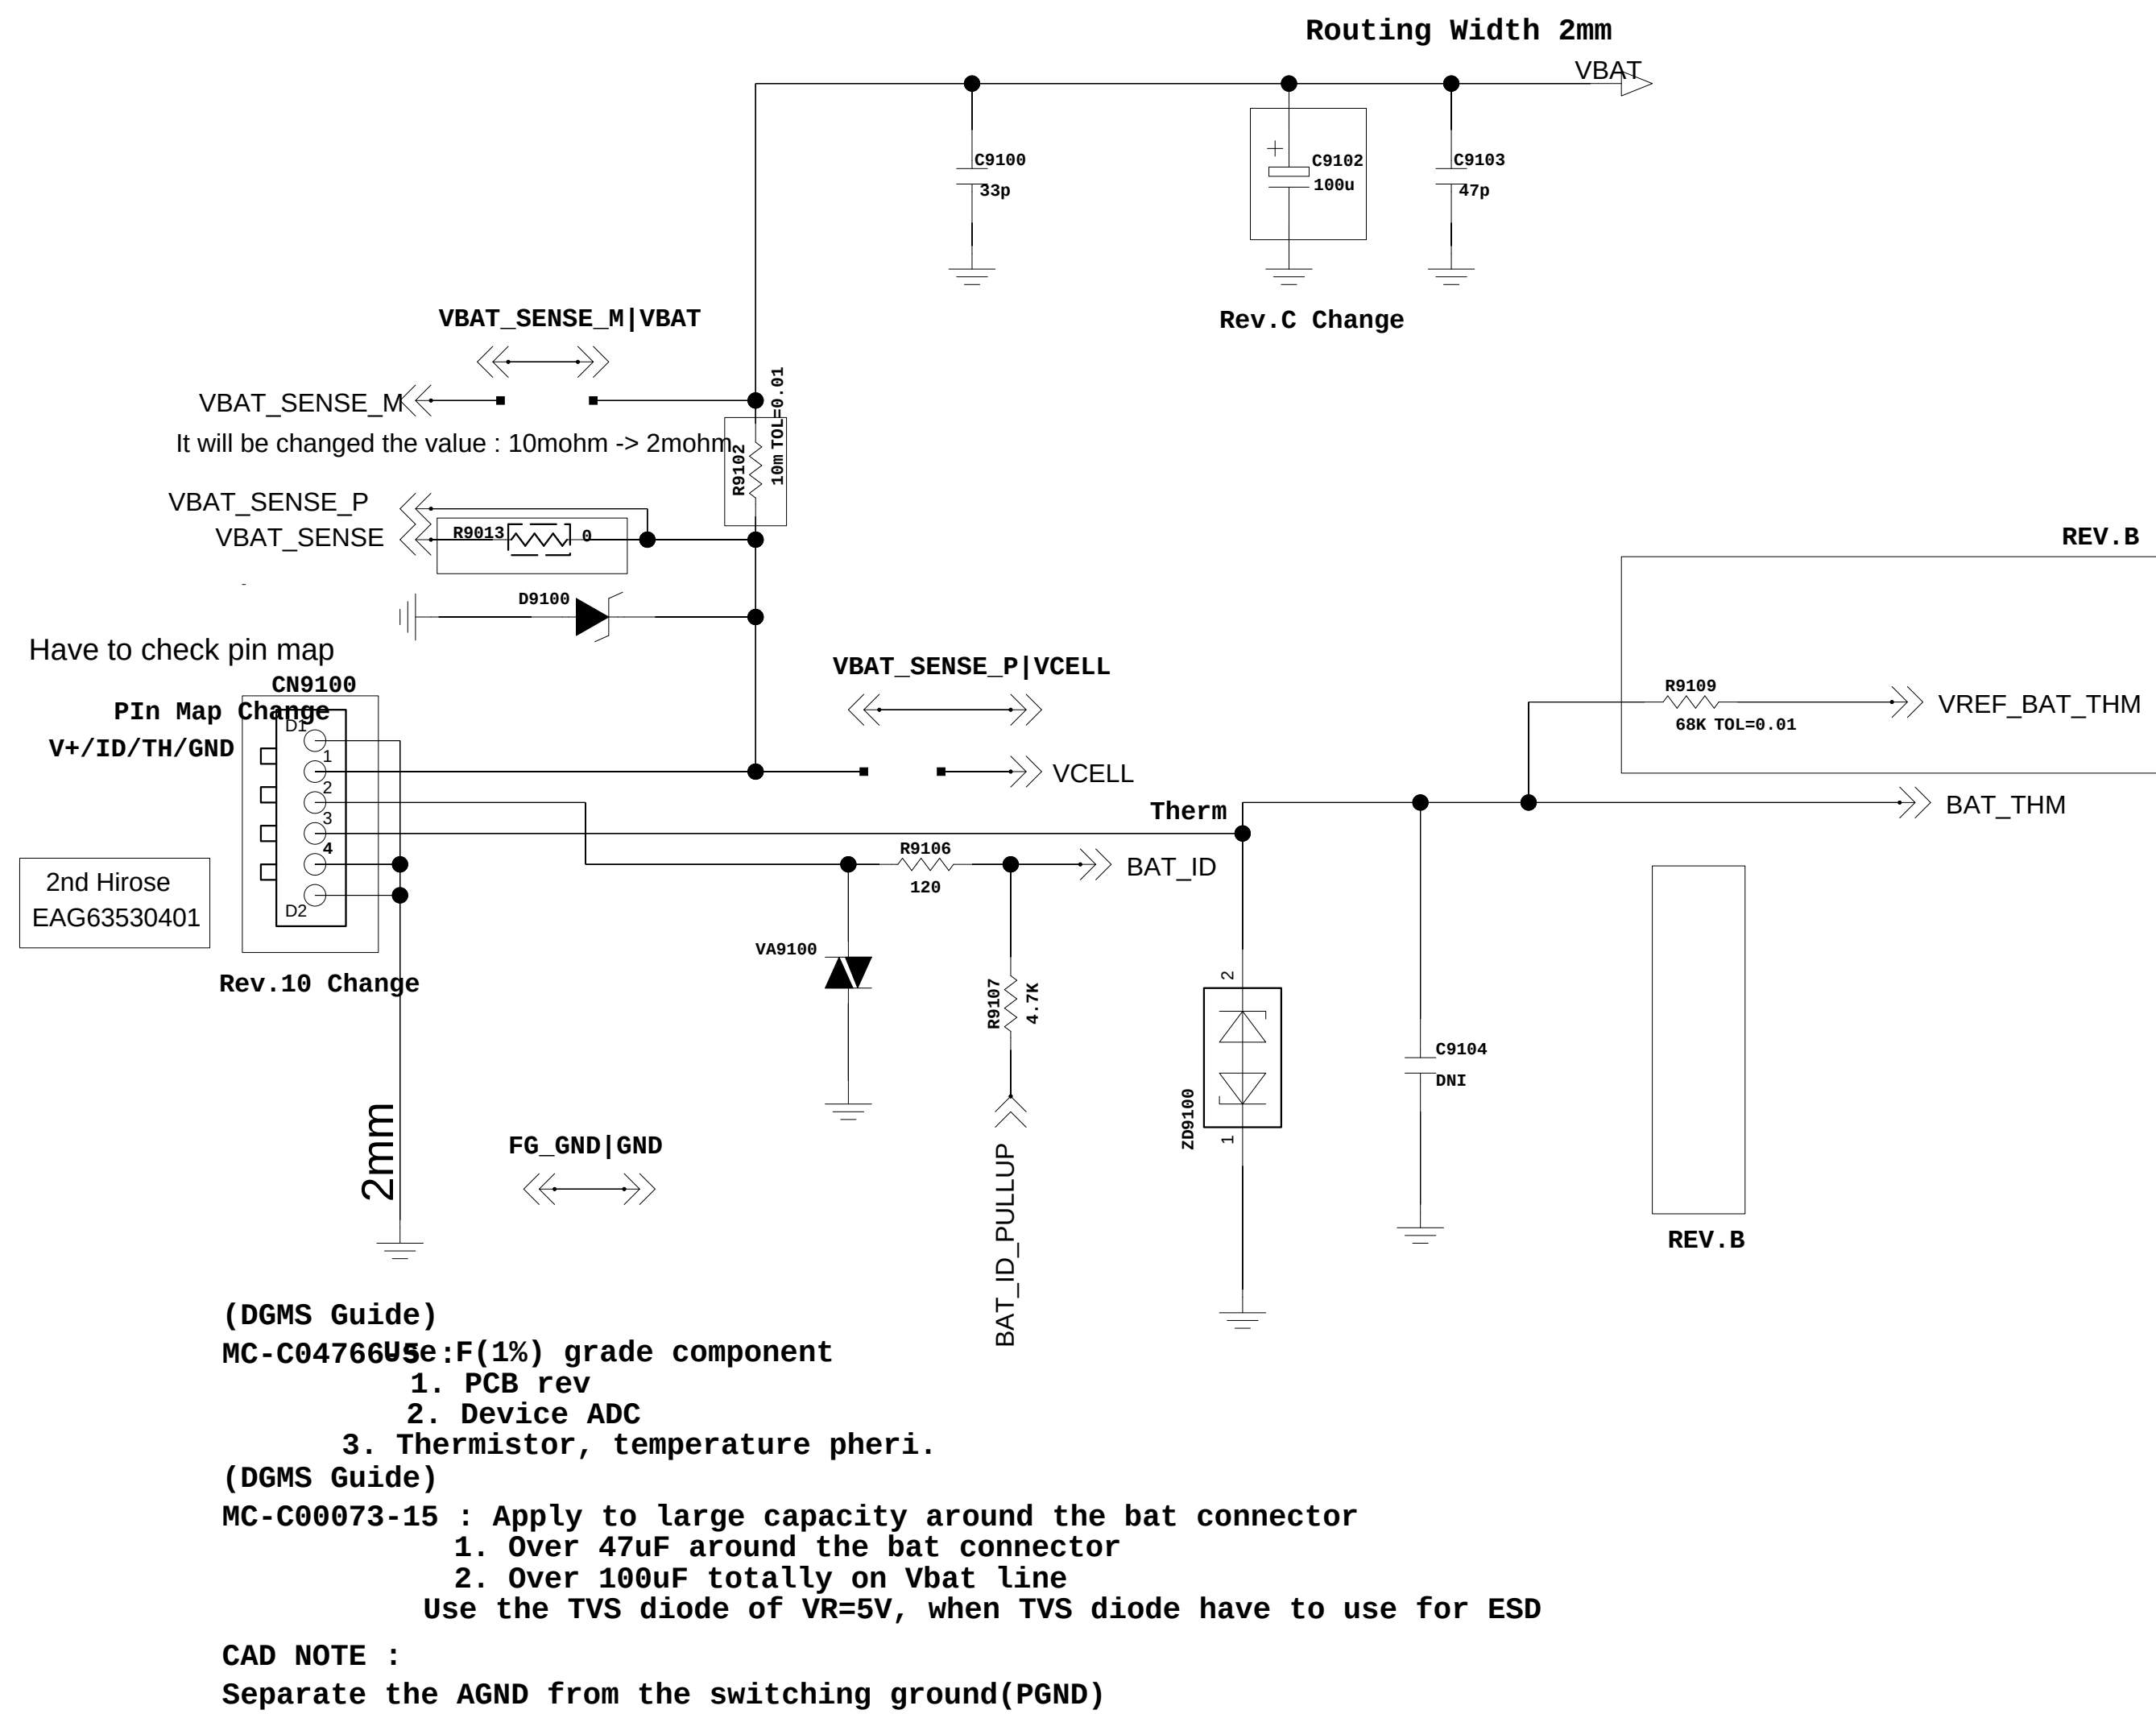

<4-8-1_Fuel_Gauge_MAX17048> Rev_1.0

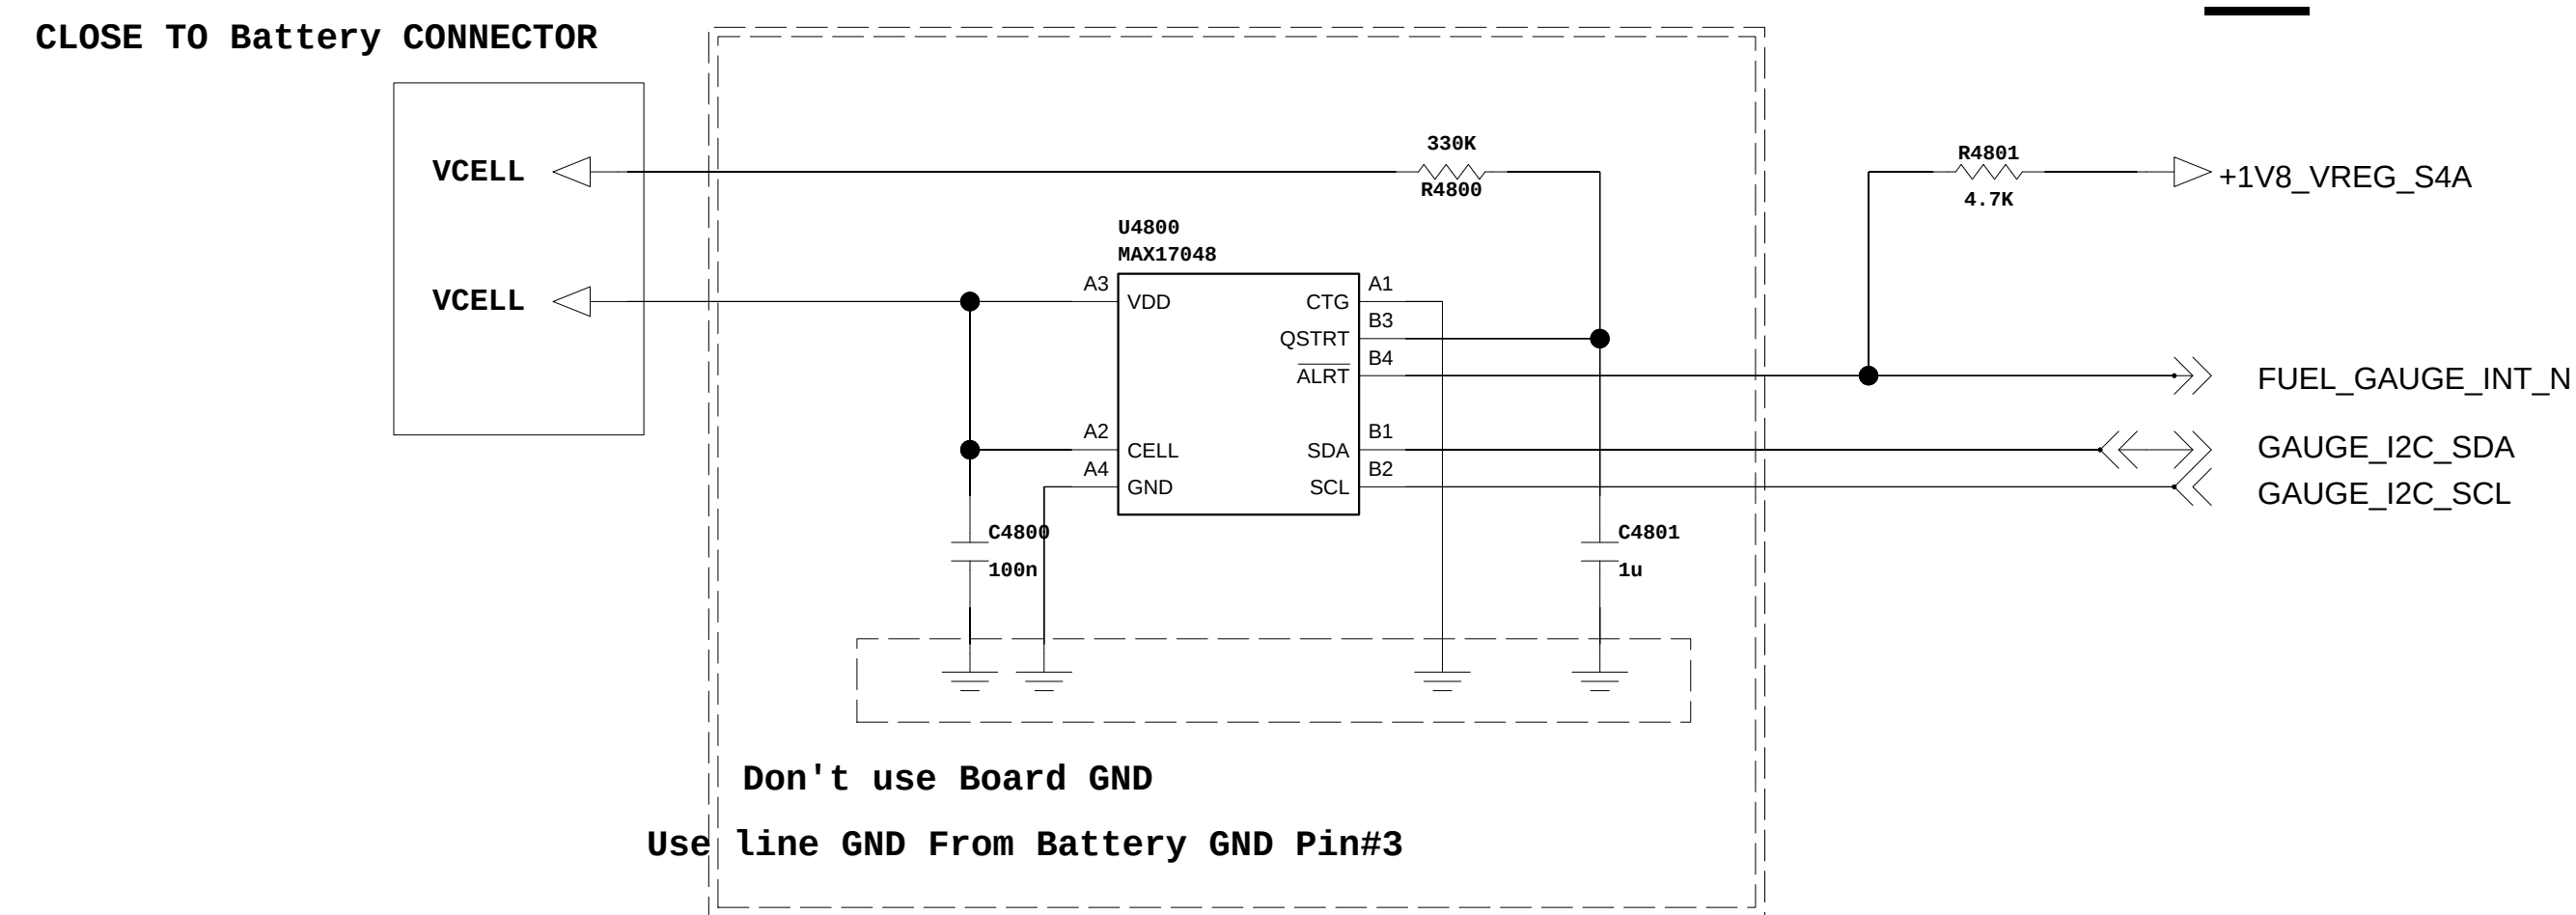

< APPSPORT Contact >

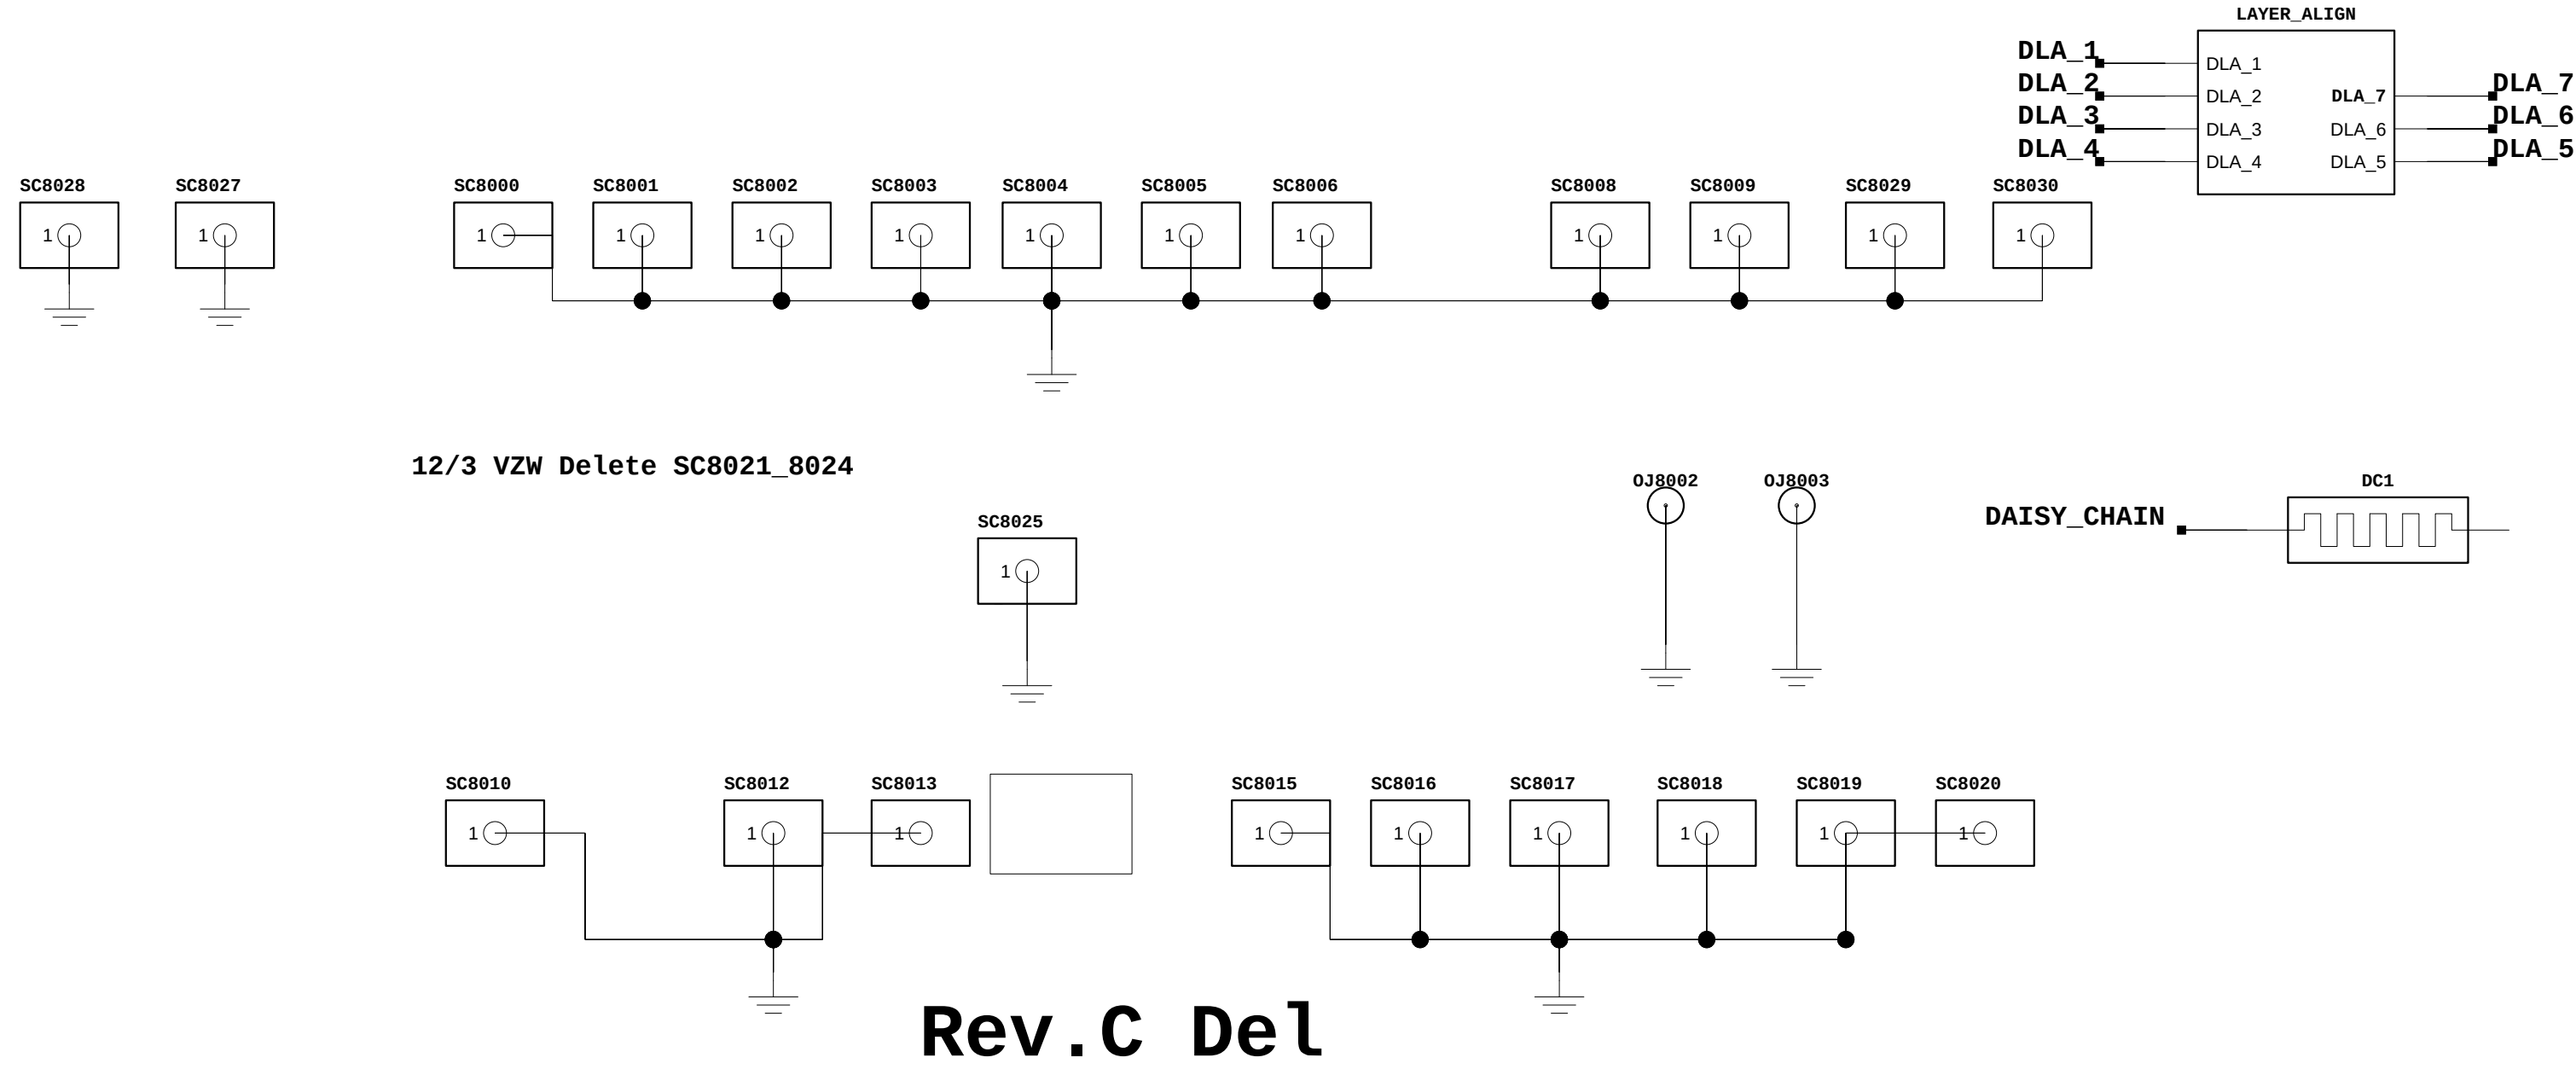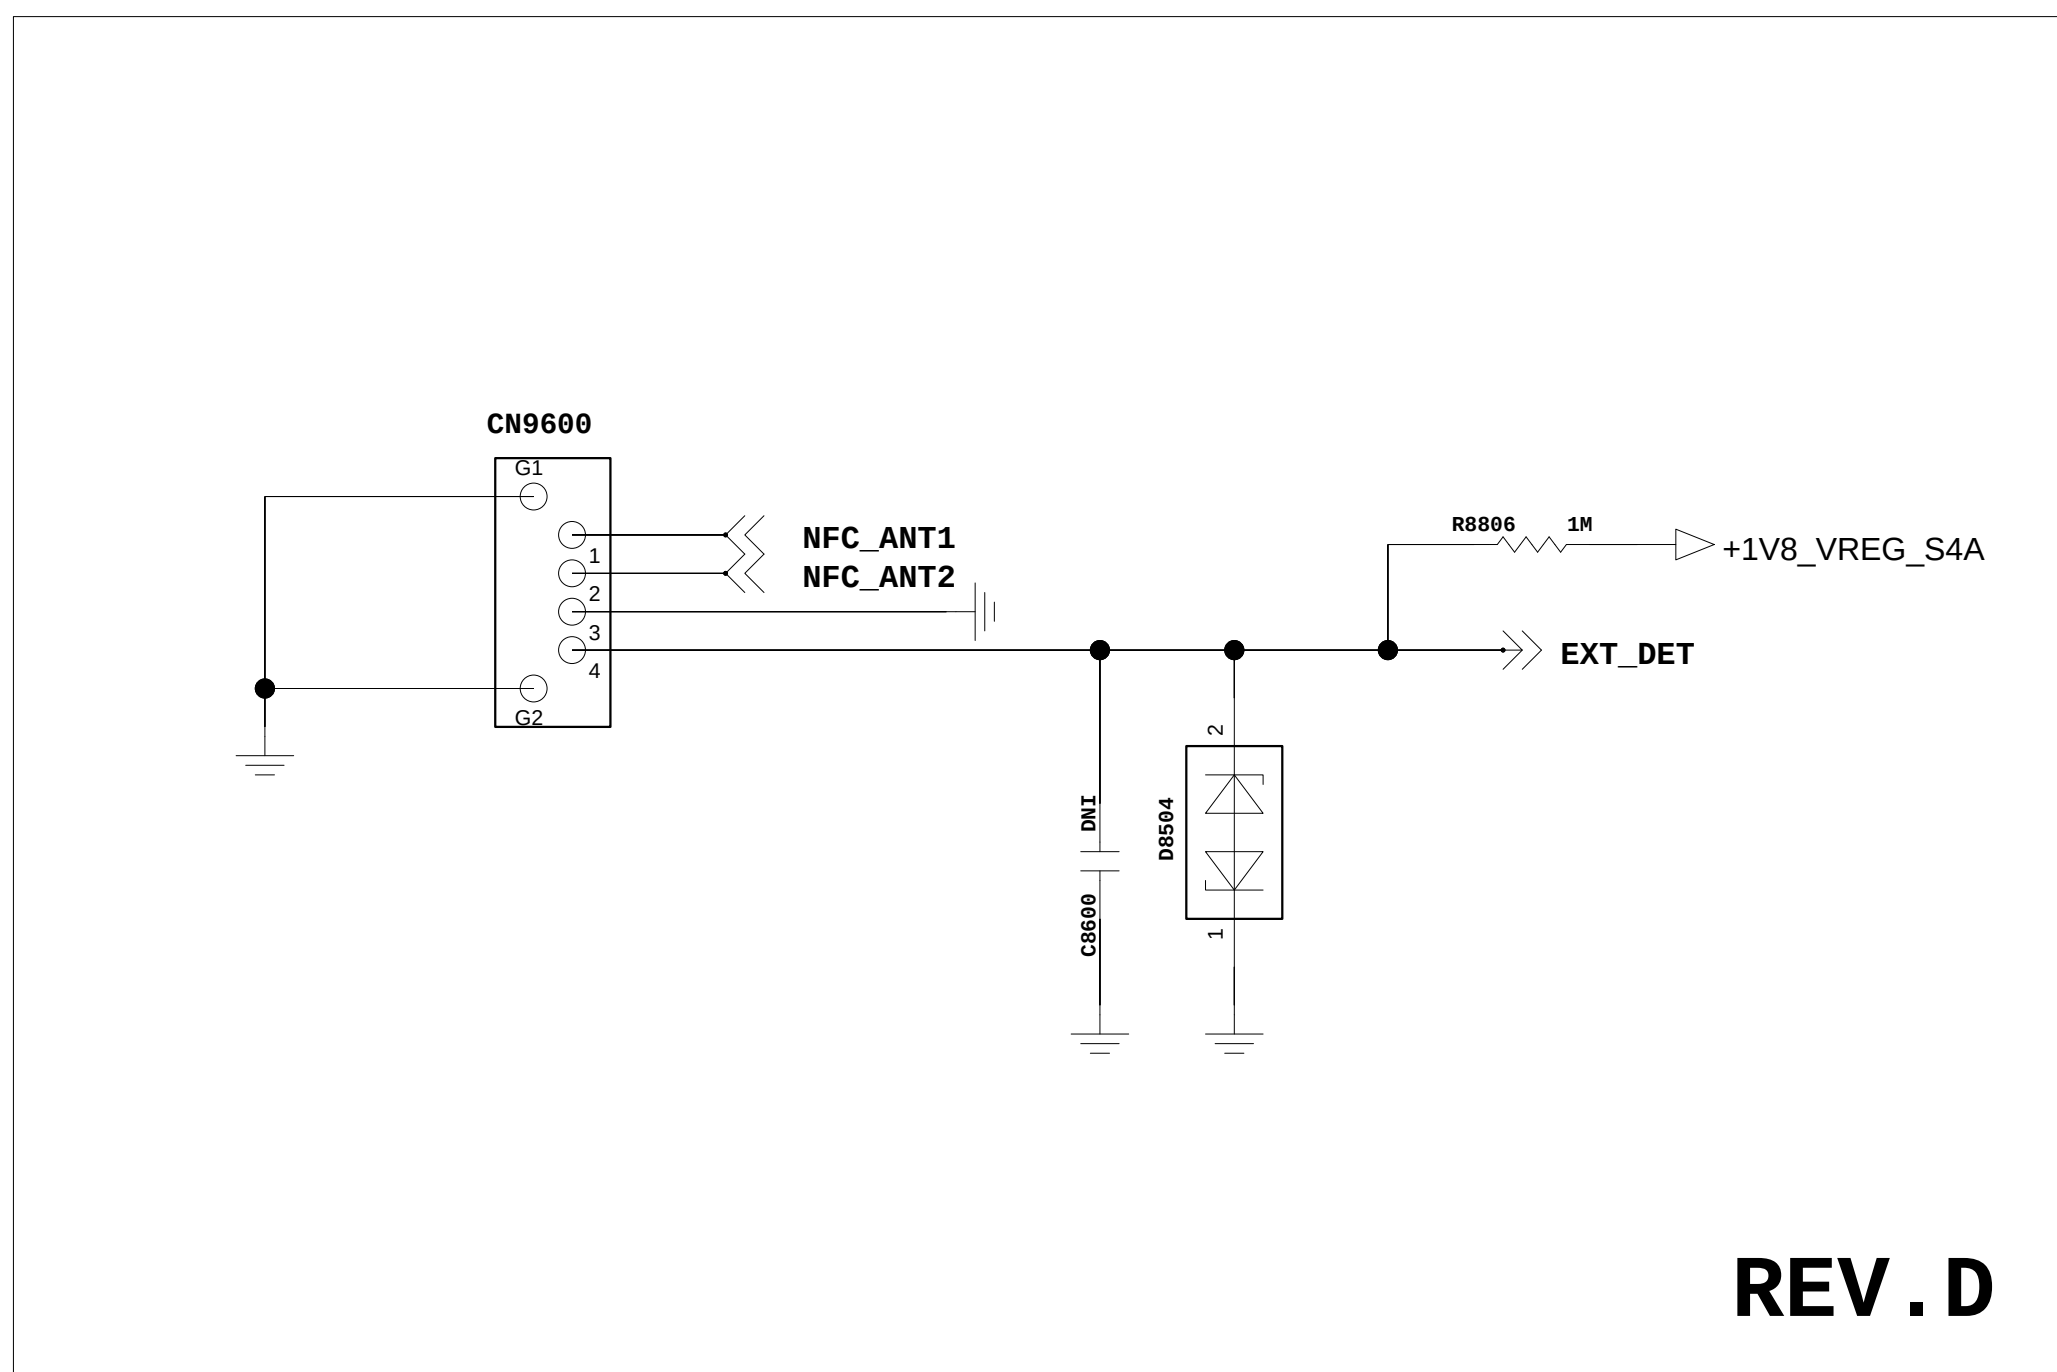


A 47 k Ω resistor and 1 μ F shunt RC filter is required on the USB_IN lines of the PMIC for noise rejection and for charger removal detection.




6. BGA PIN MAP

U2100 MSM8992

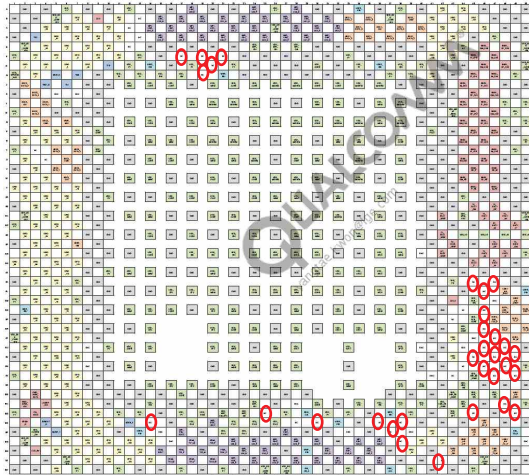


O Not used

U3200 eMMC

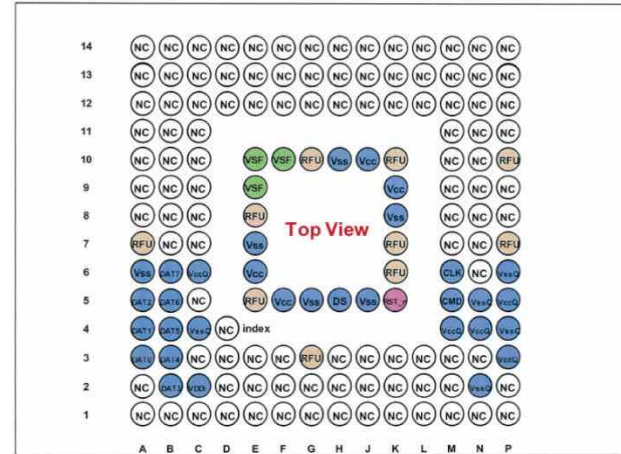


NC Not used

U4100 PM8994

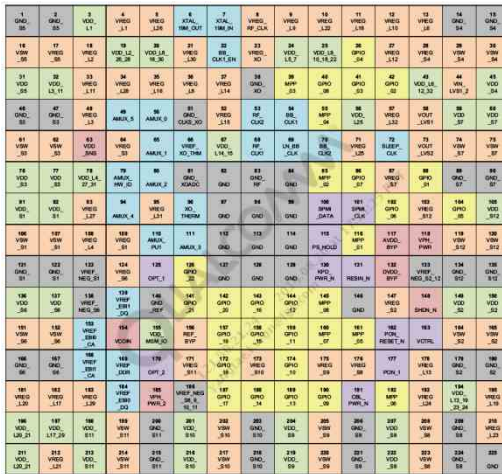

O Not used

U4200 PMI8994

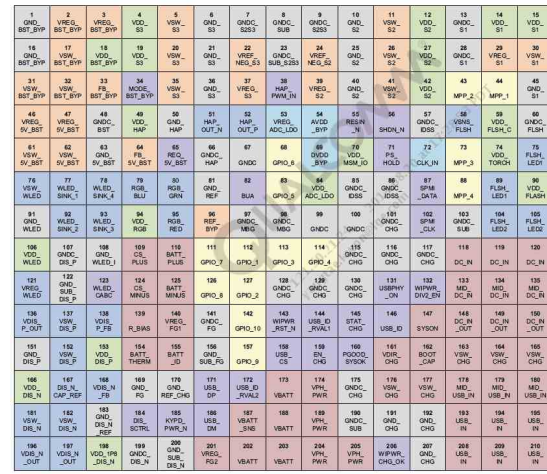

O Not used