




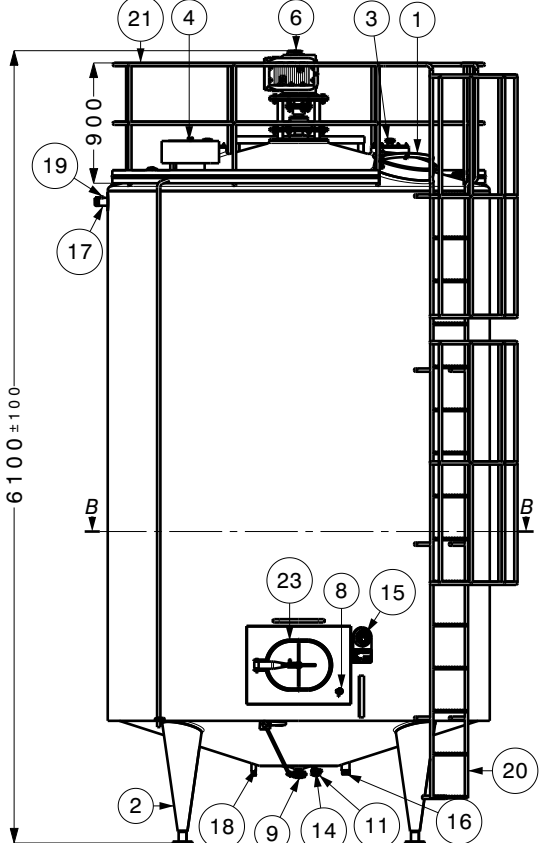


Front View

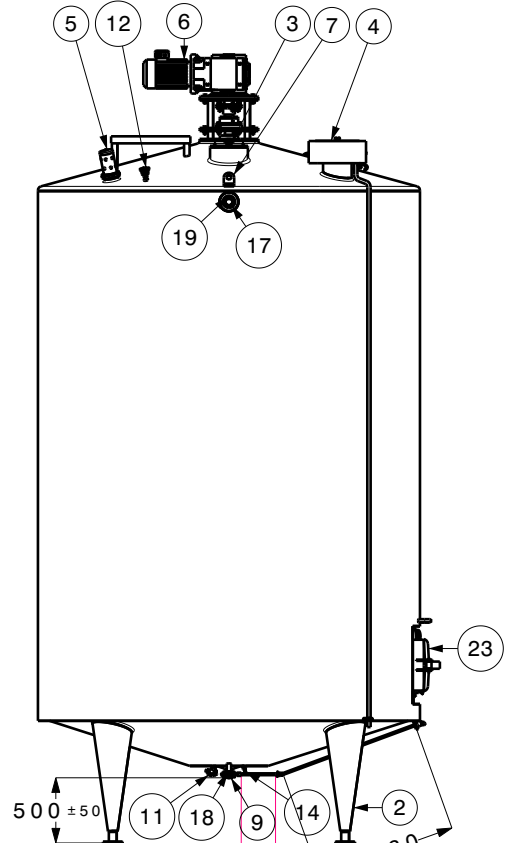


Left View

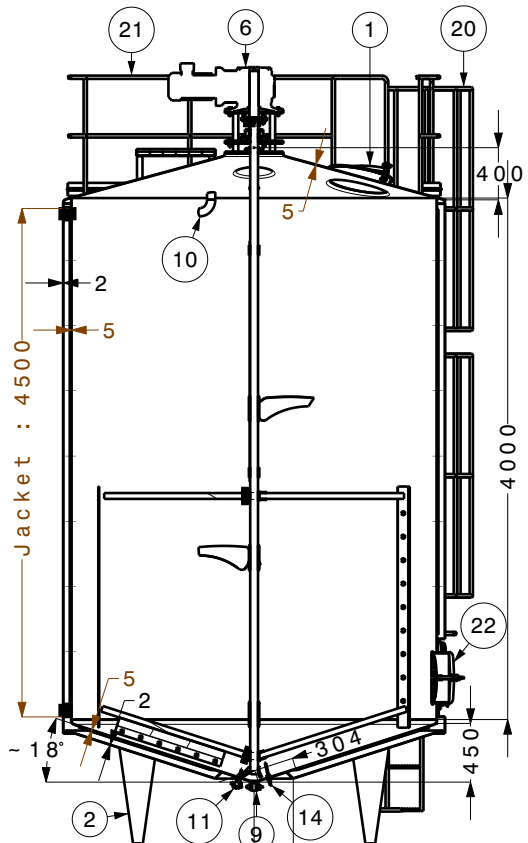


Section View A-A

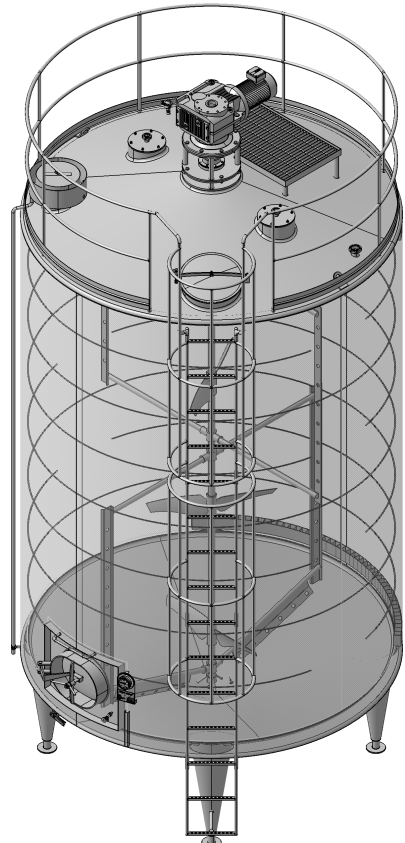


Isometric View

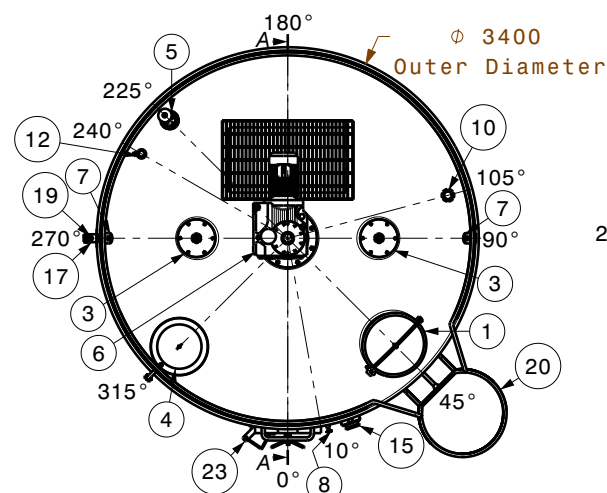

Top View

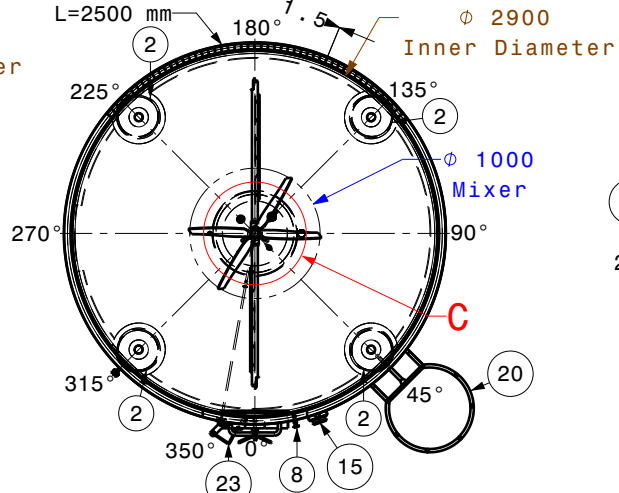

Section View B-B

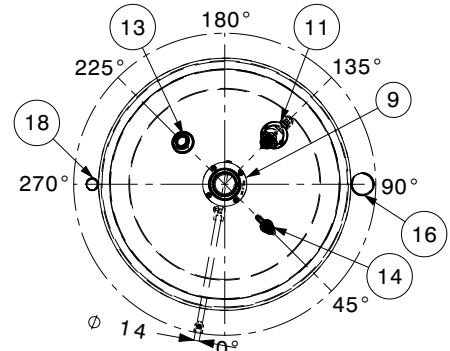









Detail C

|      |     |                                           |         |          |
|------|-----|-------------------------------------------|---------|----------|
| 22   | 1   | Side Manhole                              | 400×500 | AISI 316 |
| 21   | 1   | Guard                                     | -----   | AISI 304 |
| 20   | 1   | Ladder                                    | -----   | AISI 304 |
| 19   | 1   | 2nd Layer Safety Valve Installation Place | G3/4"   | AISI 304 |
| 18   | 1   | 2nd Layer Drain                           | G1"     | AISI 316 |
| 17   | 1   | 2nd Layer Outlet Pipe                     | G2"     | AISI 304 |
| 16   | 1   | 2nd Layer Inlet Pipe                      | G2"     | AISI 304 |
| 15   | 1   | Thermometer                               | 0-110°C | AISI 304 |
| 14   | 1   | Thermometer Sensor                        | -----   | AISI 304 |
| 13   | 1   | Pressure Transmitter Socket               | G1"     | AISI 304 |
| 12   | 1   | High level Control                        | -----   | AISI 304 |
| 11   | 1   | Low Level Control                         | -----   | AISI 304 |
| 10   | 1   | Antifoam Inlet + Union                    | Ø63.5   | AISI 304 |
| 9    | 1   | Product Outlet + Butterfly Valve          | Ø63.5   | AISI 304 |
| 8    | 1   | Sampling Valve                            | -----   | AISI 304 |
| 7    | 2   | Lifting Lug                               | T=10    | AISI 304 |
| 6    | 1   | Mixer (SEW / 1KW / 10-15 RPM )            | KAF45   | AISI 316 |
| 5    | 1   | Lighting                                  | -----   | AISI 304 |
| 4    | 1   | Air Vent                                  | 8"      | AISI 316 |
| 3    | 2   | C.I.P (Washing Turbine)                   | Ø38.1   | AISI 316 |
| 2    | 4   | Adjustable Leg                            | Conical | AISI 304 |
| 1    | 1   | Manhole                                   | Ø460    | AISI 316 |
| ITEM | QTY | DESCRIPTION                               | SIZE    | MATERIAL |

| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWED by: M.FazelZadeh |              | DATE: -----                |  | DRAWING NO.: VPO-043-02               |  |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|--------------|----------------------------|--|---------------------------------------|--|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi |              | DATE: -----                |  | ORDER/CONTRACT NO.:1403/16020/4549    |  |
| Roughness (µm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE: -----            |              | EMPTY WEIGHT: ----- ±5% Kg |  | PURCHASER:<br><br>SMS Deomajo Company |  |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY: 01 SET             |              | TOLERANCE: ISO 2768-VL     |  |                                       |  |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT: mm                | SHEET: ----- | SIZE: A4                   |  |                                       |  |

SMS Deomajo Company



TITLE:  
20M<sup>3</sup>-Process Tank

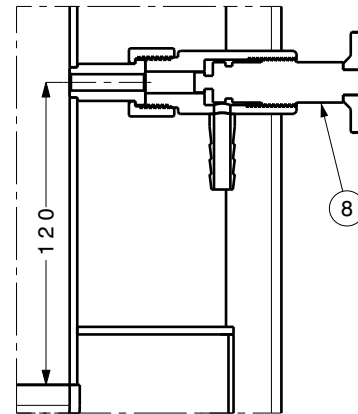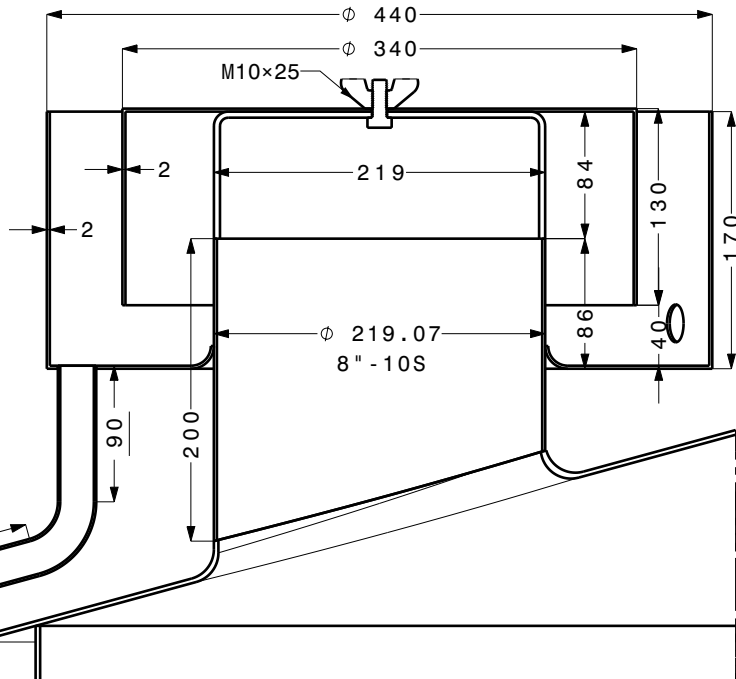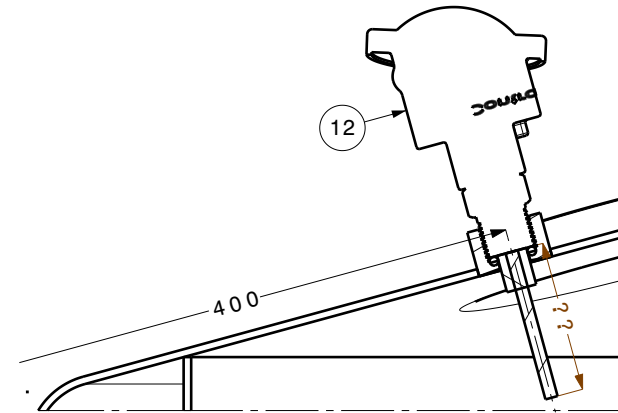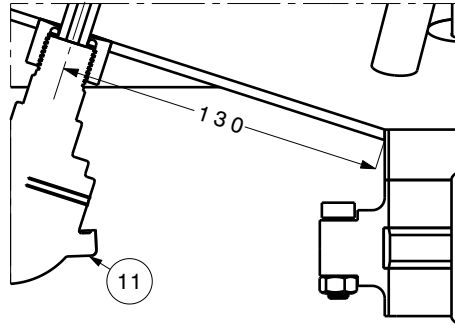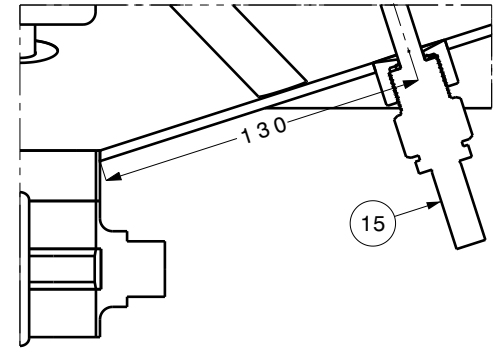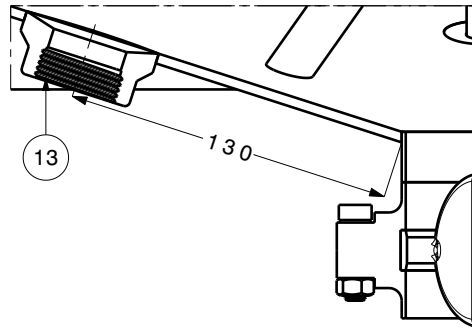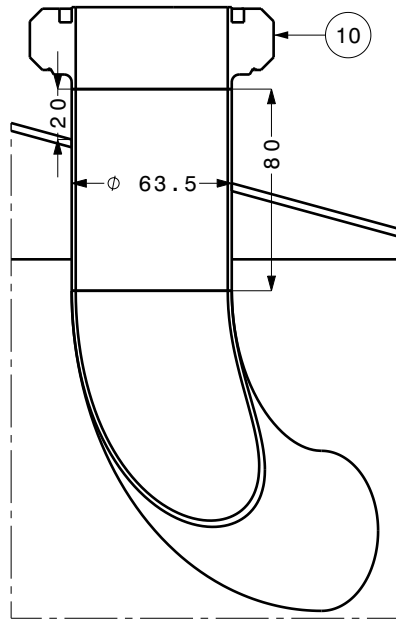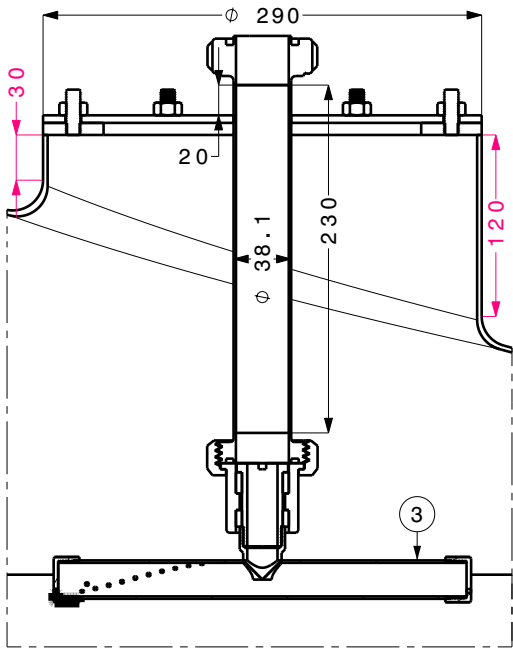


|      |     |                                           |         |          |
|------|-----|-------------------------------------------|---------|----------|
| 22   | 1   | Side Manhole                              | 400×500 | AISI 316 |
| 21   | 1   | Guard                                     | -----   | AISI 304 |
| 20   | 1   | Ladder                                    | -----   | AISI 304 |
| 19   | 1   | 2nd Layer Safety Valve Installation Place | G3/4"   | AISI 304 |
| 18   | 1   | 2nd Layer Drain                           | G1"     | AISI 316 |
| 17   | 1   | 2nd Layer Outlet Pipe                     | G2"     | AISI 304 |
| 16   | 1   | 2nd Layer Inlet Pipe                      | G2"     | AISI 304 |
| 15   | 1   | Thermometer                               | 0-110℃  | AISI 304 |
| 14   | 1   | Thermometer Sensor                        | -----   | AISI 304 |
| 13   | 1   | Pressure Transmitter Socket               | G1"     | AISI 304 |
| 12   | 1   | High level Control                        | -----   | AISI 304 |
| 11   | 1   | Low Level Control                         | -----   | AISI 304 |
| 10   | 1   | Antifoam Inlet + Union                    | Ø63.5   | AISI 304 |
| 9    | 1   | Product Outlet + Butterfly Valve          | Ø63.5   | AISI 304 |
| 8    | 1   | Sampling Valve                            | -----   | AISI 304 |
| 7    | 2   | Lifting Lug                               | T=10    | AISI 304 |
| 6    | 1   | Mixer (SEW / 1KW / 10-15 RPM )            | KAF45   | AISI 316 |
| 5    | 1   | Lighting                                  | -----   | AISI 304 |
| 4    | 1   | Air Vent                                  | 8"      | AISI 316 |
| 3    | 2   | C.I.P (Washing Turbine)                   | Ø38.1   | AISI 316 |
| 2    | 4   | Adjustable Leg                            | Conical | AISI 304 |
| 1    | 1   | Manhole                                   | Ø460    | AISI 316 |
| ITEM | QTY | DESCRIPTION                               | SIZE    | MATERIAL |

| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWN by:   | M.FazelZadeh | DATE:         | -----       | DRAWING NO.:        | VPO-043-02      |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------|--------------|---------------|-------------|---------------------|-----------------|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: | M.Mohammadi  | DATE:         | -----       | ORDER/CONTRACT NO.: | 1403/16020/4549 |
| Roughness (µm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE:      | -----        | EMPTY WEIGHT: | -----±5% Kg | PURCHASER:          |                 |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY:        | 01 SET       | TOLERANCE:    | ISO 2768-VL | SMS Deomajo Company |                 |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT:       | mm           | SHEET:        | -----       |                     |                 |
|                                  |          |                |           |                                  |          |             |              |               |             |                     |                 |




**TITLE:**  
20M<sup>3</sup>-Process Tank

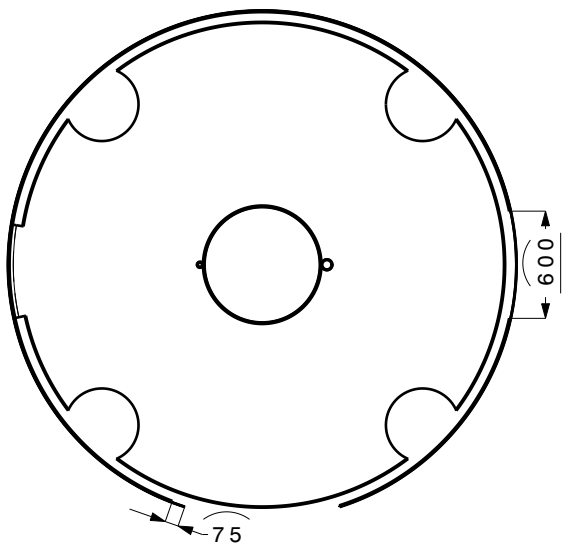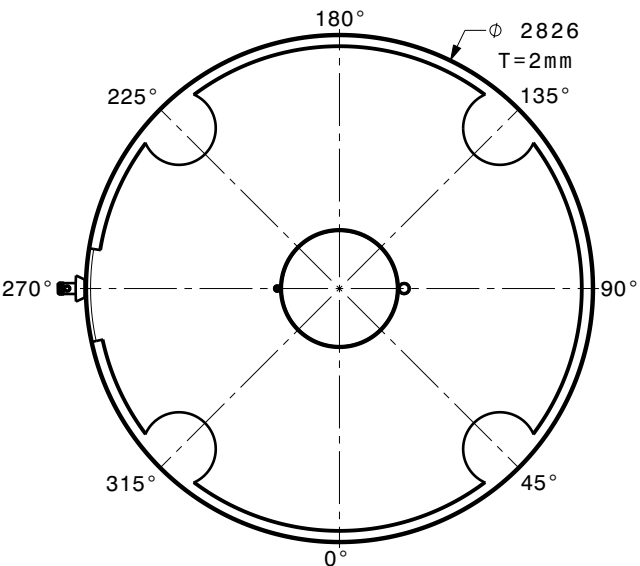

Section view L-L  
Scale: 1:42

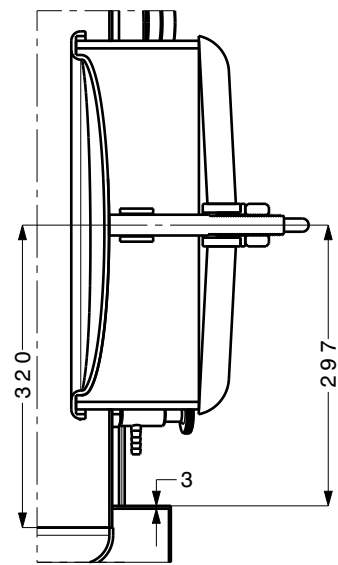


Section view M-M  
Scale: 1:8

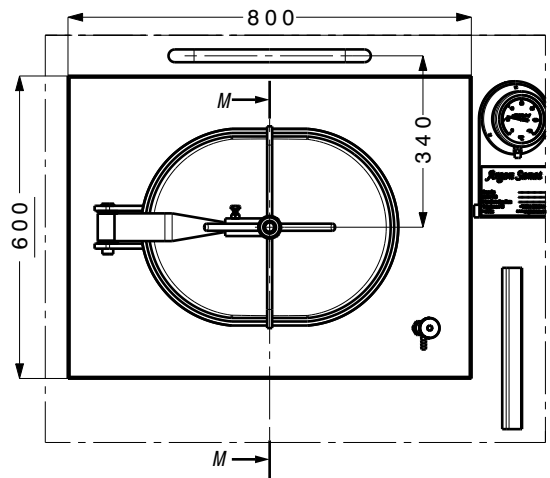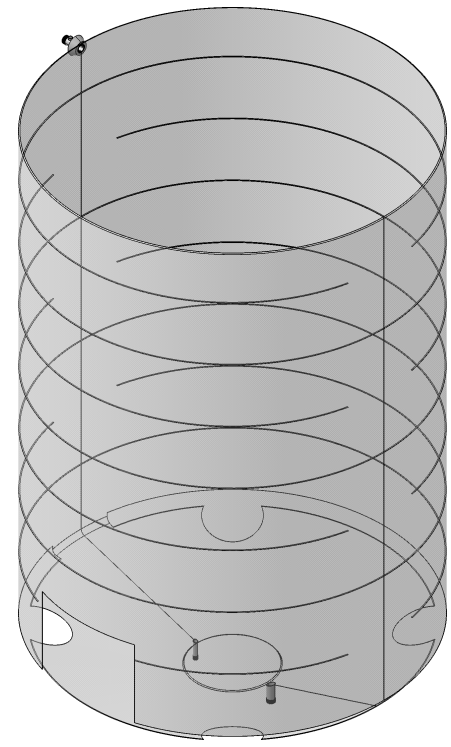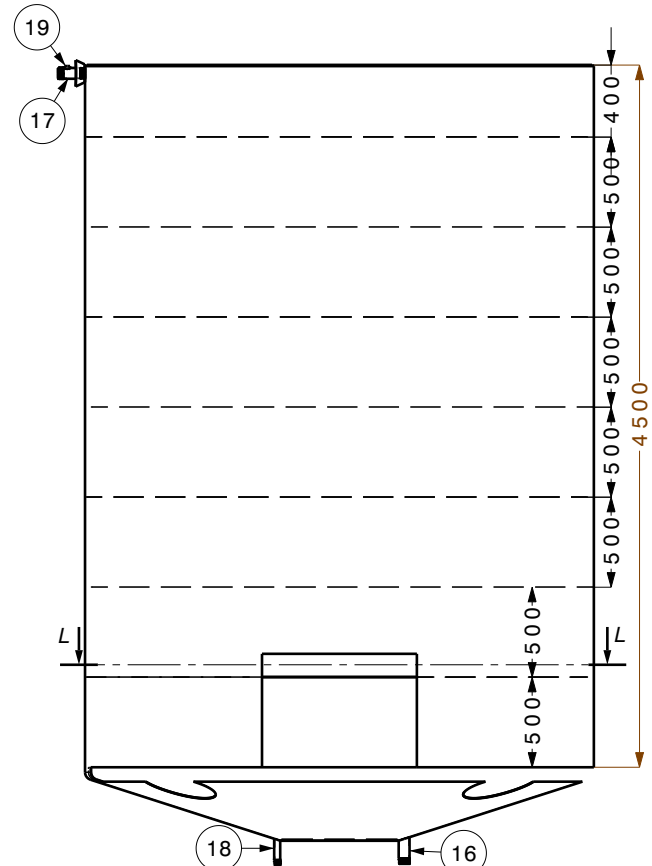



|    |   |                                           |         |          |
|----|---|-------------------------------------------|---------|----------|
| 22 | 1 | Side Manhole                              | 400×500 | AISI 316 |
| 21 | 1 | Guard                                     | -----   | AISI 304 |
| 20 | 1 | Ladder                                    | -----   | AISI 304 |
| 19 | 1 | 2nd Layer Safety Valve Installation Place | G3/4"   | AISI 304 |
| 18 | 1 | 2nd Layer Drain                           | G1"     | AISI 316 |
| 17 | 1 | 2nd Layer Outlet Pipe                     | G2"     | AISI 304 |
| 16 | 1 | 2nd Layer Inlet Pipe                      | G2"     | AISI 304 |
| 15 | 1 | Thermometer                               | 0-110°C | AISI 304 |
| 14 | 1 | Thermometer Sensor                        | -----   | AISI 304 |
| 13 | 1 | Pressure Transmitter Socket               | G1"     | AISI 304 |
| 12 | 1 | High level Control                        | -----   | AISI 304 |
| 11 | 1 | Low Level Control                         | -----   | AISI 304 |
| 10 | 1 | Antifoam Inlet + Union                    | Ø63.5   | AISI 304 |
| 9  | 1 | Product Outlet + Butterfly Valve          | Ø63.5   | AISI 304 |
| 8  | 1 | Sampling Valve                            | -----   | AISI 304 |
| 7  | 2 | Lifting Lug                               | T=10    | AISI 304 |
| 6  | 1 | Mixer (SEW / 1KW / 10-15 RPM )            | KAF45   | AISI 316 |
| 5  | 1 | Lighting                                  | -----   | AISI 304 |
| 4  | 1 | Air Vent                                  | 8"      | AISI 316 |
| 3  | 2 | C.I.P (Washing Turbine)                   | Ø38.1   | AISI 316 |
| 2  | 4 | Adjustable Leg                            | Conical | AISI 304 |
| 1  | 1 | Manhole                                   | Ø460    | AISI 316 |

| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWED by: M.FazelZadeh |              | DATE: -----                |  | DRAWING NO.: VPO-043-02               |  |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|--------------|----------------------------|--|---------------------------------------|--|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi |              | DATE: -----                |  | ORDER/CONTRACT NO.:1403/16020/4549    |  |
| Roughness (µm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE: -----            |              | EMPTY WEIGHT: ----- ±5% Kg |  | PURCHASER:<br><br>SMS Deomajo Company |  |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY: 01 SET             |              | TOLERANCE: ISO 2768-VL     |  |                                       |  |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT: mm                | SHEET: ----- | SIZE: A4                   |  |                                       |  |

TITLE:  
20M<sup>3</sup>-Process Tank



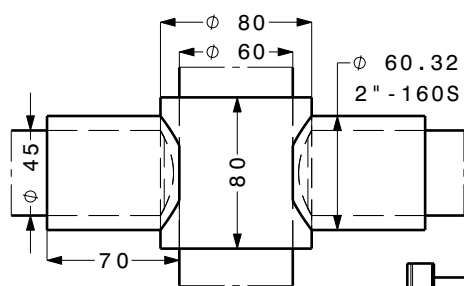


Detail N  
Scale: 1:4

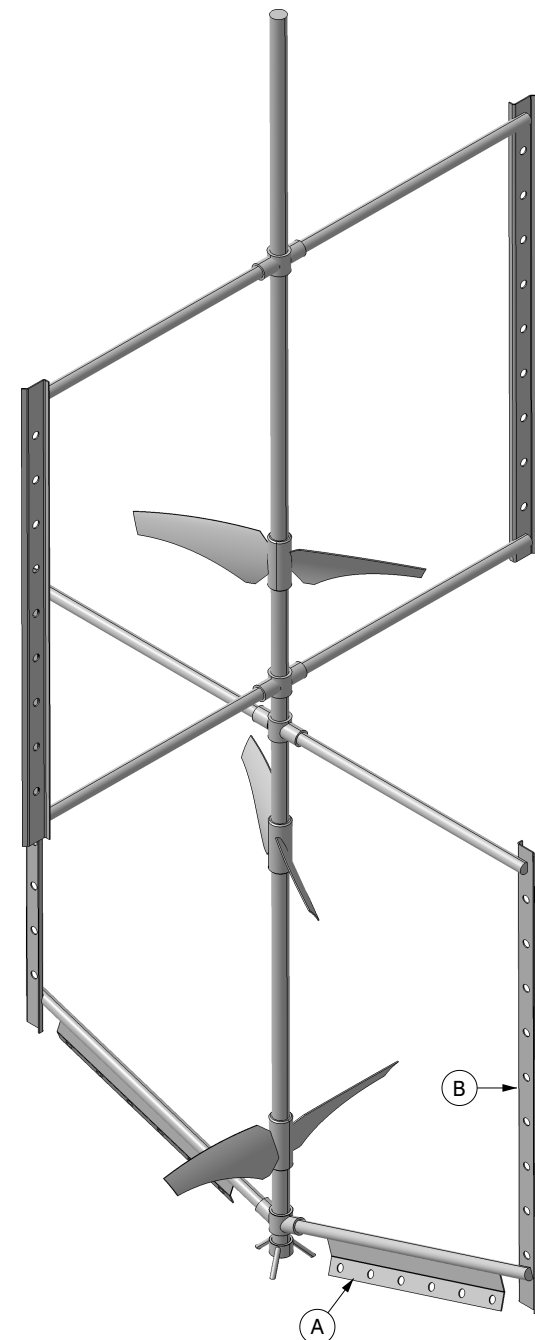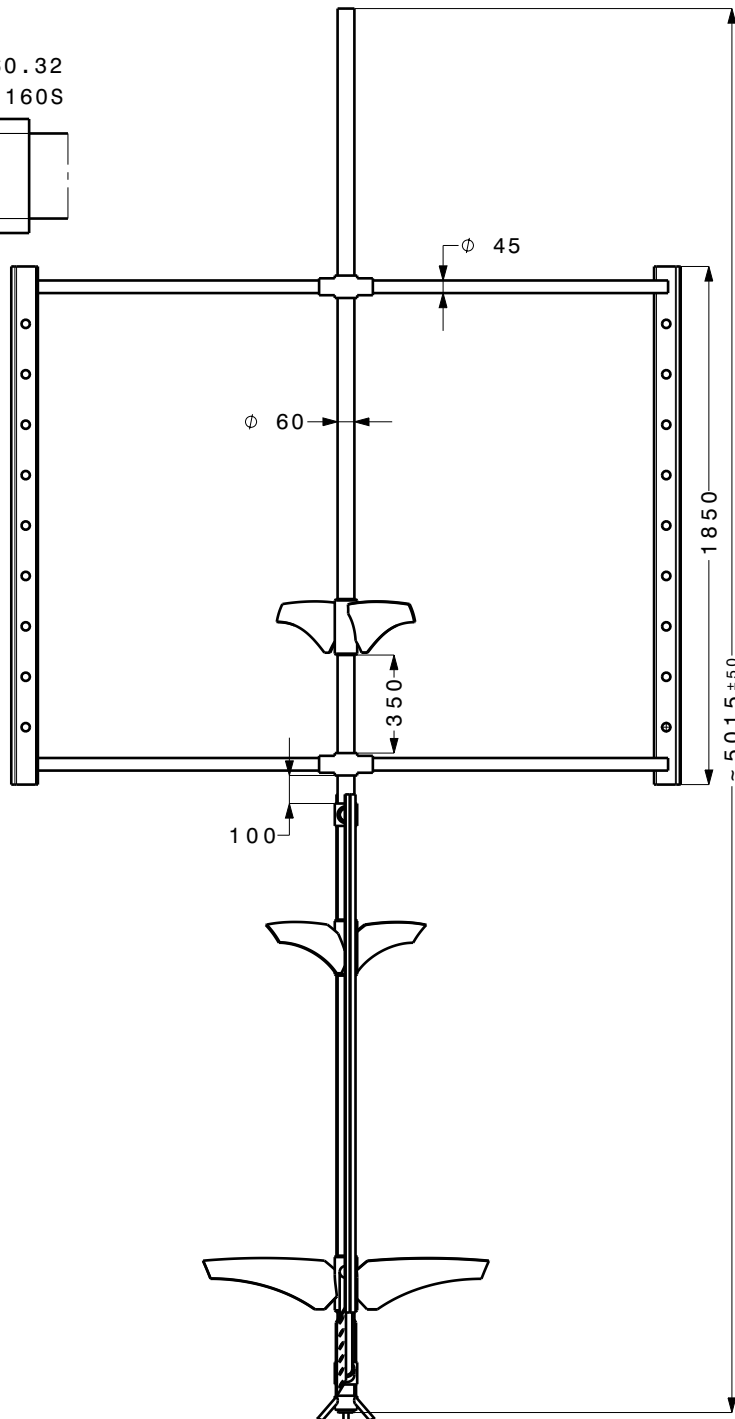


| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWN by: M.FazelZadeh  | DATE: -----               | DRAWING NO.: VPO-043-02            |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|---------------------------|------------------------------------|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi | DATE: -----               | ORDER/CONTRACT NO.:1403/16020/4549 |
| Roughness (μm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE: -----            | EMPTY WEIGHT: -----±5% Kg | PURCHASER:                         |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY: 01 SET             | TOLERANCE: ISO 2768-VL    | SMS Deomajo Company                |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT: mm                | SHEET: ----- SIZE: A4     |                                    |




**TITLE:**  
**20M<sup>3</sup>-Process Tank**

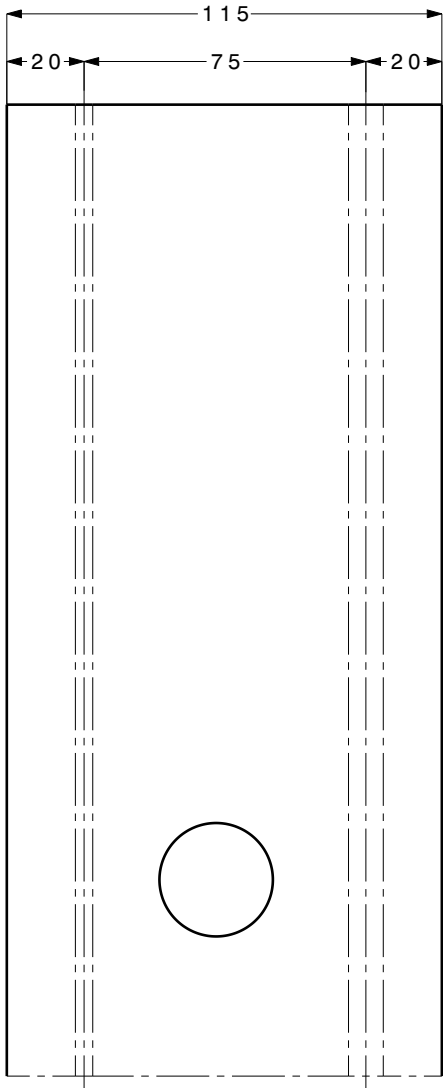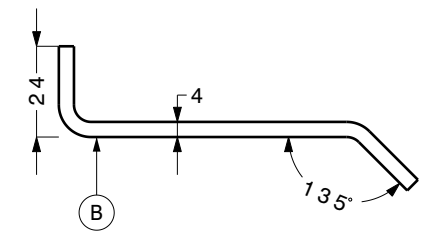


Qty=4

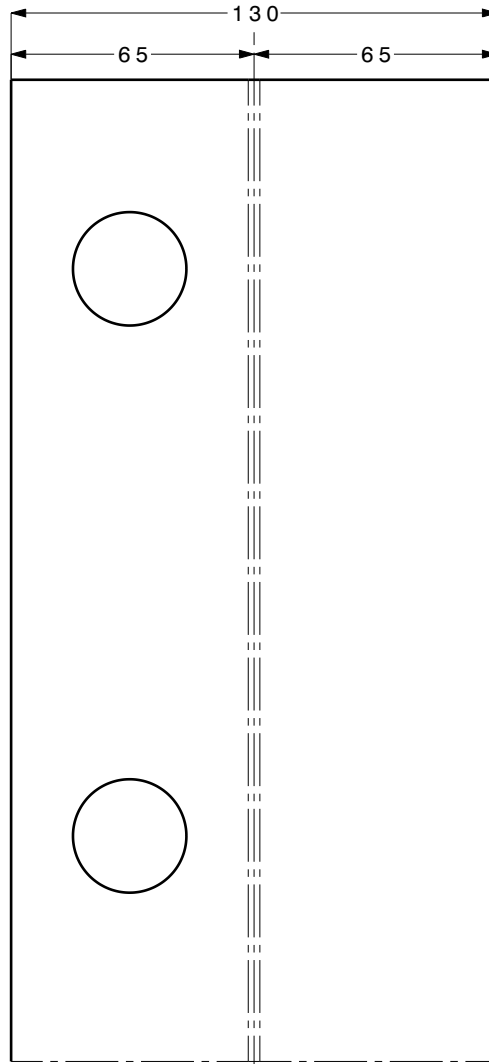





Qty=2

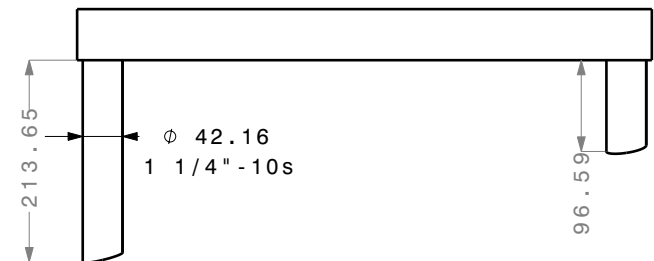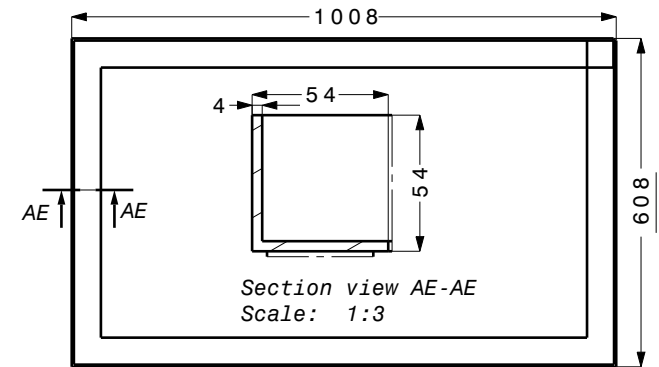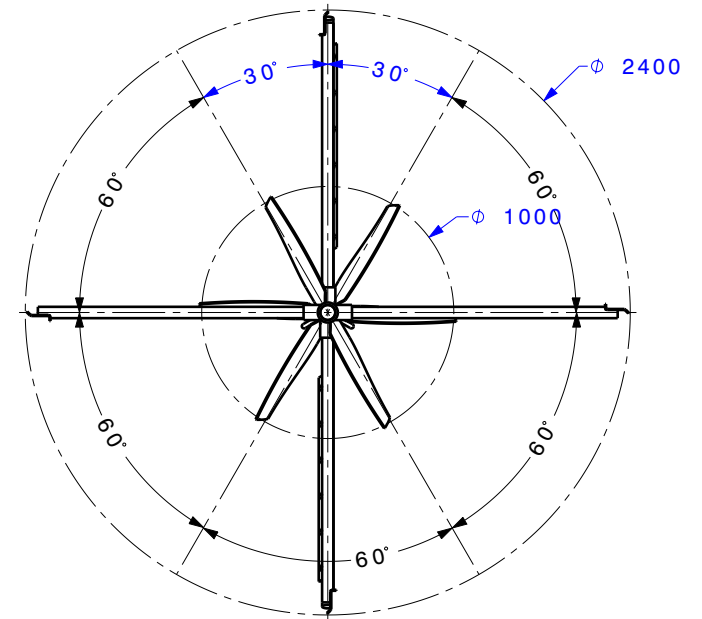


| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWN by: M.FazelZadeh  | DATE: -----               | DRAWING NO.: VPO-043-02            | TITLE:<br><br>20M <sup>3</sup> -Process Tank |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|---------------------------|------------------------------------|----------------------------------------------|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi | DATE: -----               | ORDER/CONTRACT NO.:1403/16020/4549 |                                              |
| Roughness (µm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE: -----            | EMPTY WEIGHT: -----±5% Kg | PURCHASER:                         |                                              |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY: 01 SET             | TOLERANCE: ISO 2768-VL    | SMS Deomajo Company                |                                              |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT: mm                | SHEET: -----              | SIZE: A4                           |                                              |

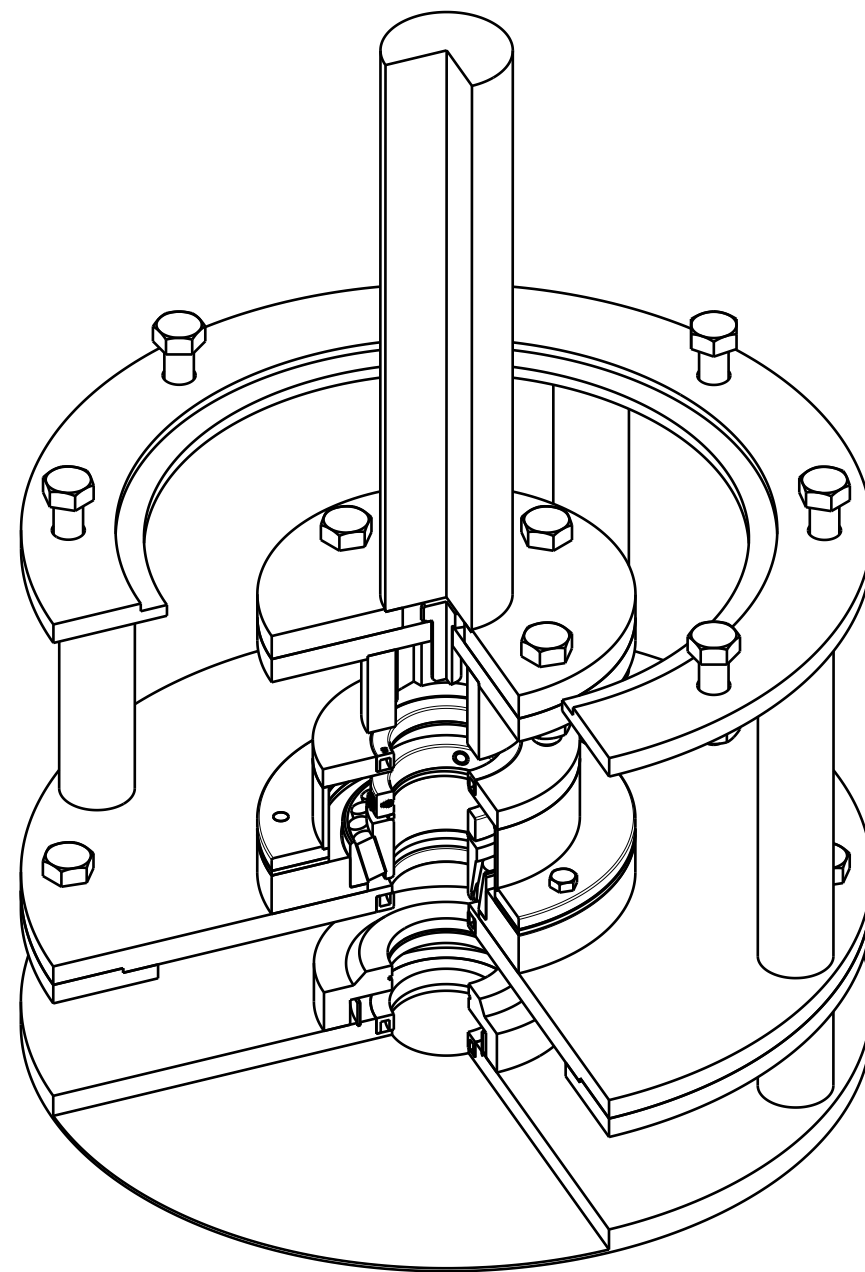

|                                  |          |                |           |                                  |          |                                     |                                        |                         |                                       |                                              |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------------------|----------------------------------------|-------------------------|---------------------------------------|----------------------------------------------|
| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWED by: M.FazelZadeh DATE: ----- |                                        | DRAWING NO.: VPO-043-02 |                                       | TITLE:<br><br>20M <sup>3</sup> -Process Tank |
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi DATE: ----- | ORDER/CONTRACT NO.:1403/16020/4549     |                         |                                       |                                              |
| Roughness (µm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     |          | -----                               | SCALE: ----- EMPTY WEIGHT: -----±5% Kg |                         | PURCHASER:<br><br>SMS Deomajo Company |                                              |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           |          | 4                                   | QTY: 01 SET TOLERANCE: ISO 2768-VL     |                         |                                       |                                              |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) |          | 4 / 110                             | UNIT: mm SHEET: ----- SIZE: A4         |                         |                                       |                                              |

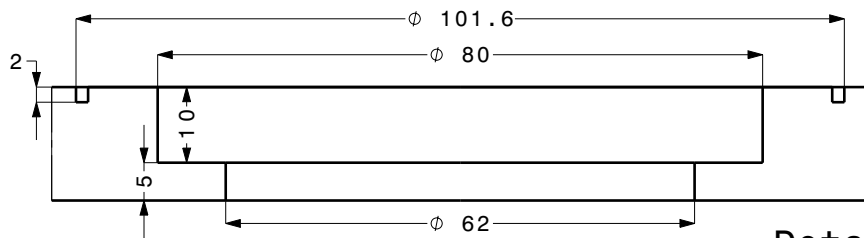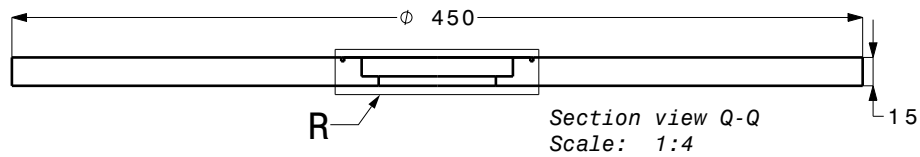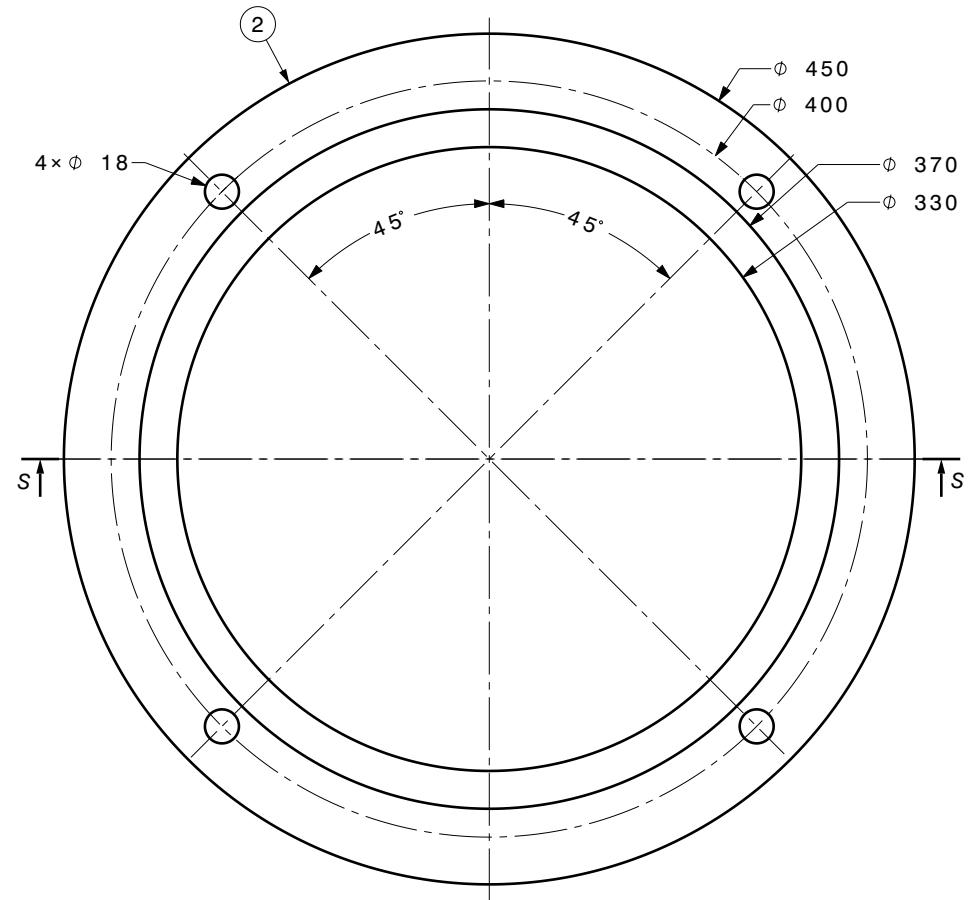
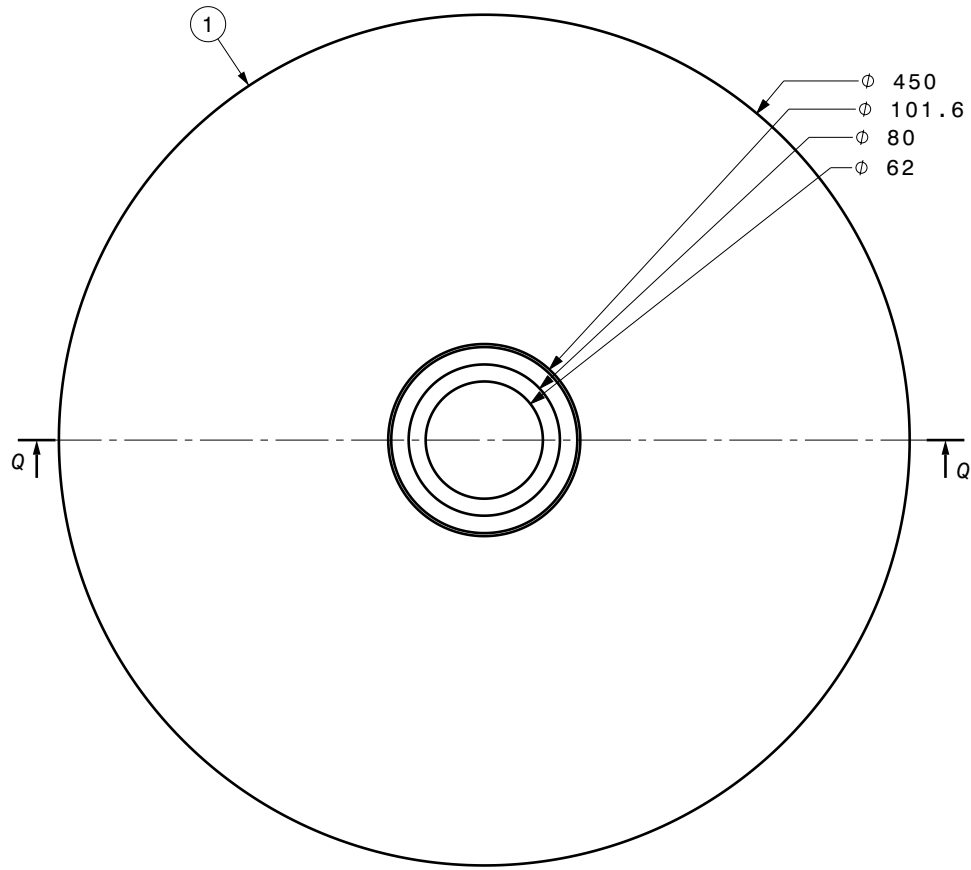


Detail R  
Scale: 1:1


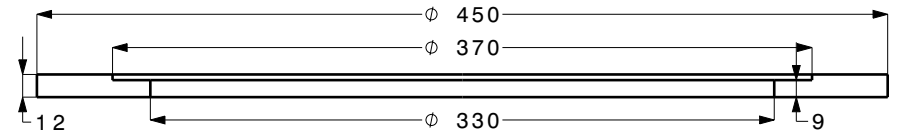


Section view S-S  
Scale: 1:4

| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWN by: M.FazelZadeh  | DATE: -----               | DRAWING NO.: VPO-043-02            | TITLE:<br><br>20M <sup>3</sup> -Process Tank |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|---------------------------|------------------------------------|----------------------------------------------|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi | DATE: -----               | ORDER/CONTRACT NO.:1403/16020/4549 |                                              |
| Roughness (μm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE: -----            | EMPTY WEIGHT: -----±5% Kg | PURCHASER:                         |                                              |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY: 01 SET             | TOLERANCE: ISO 2768-VL    | SMS Deomajo Company                |                                              |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT: mm                | SHEET: -----              | SIZE: A4                           |                                              |

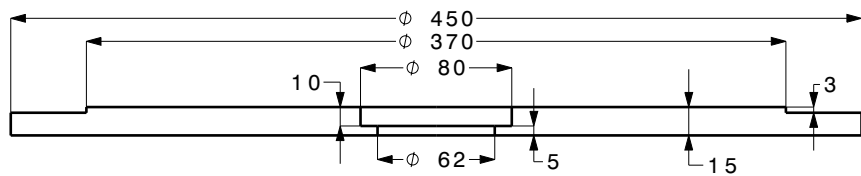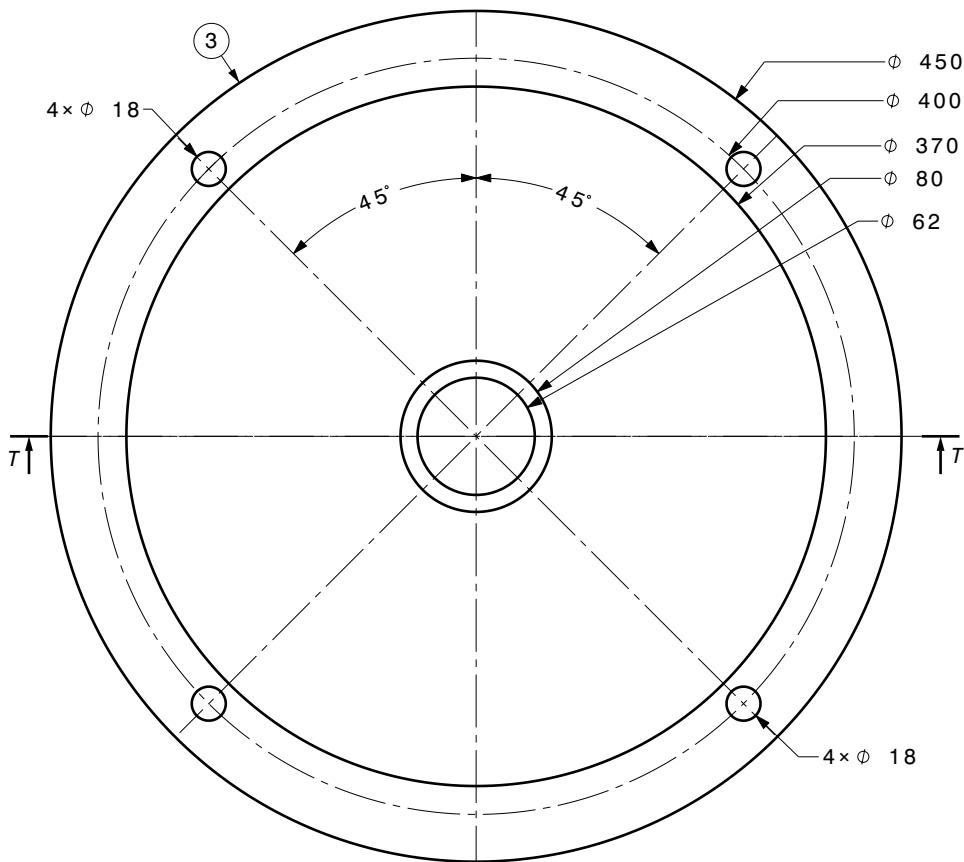





Section view T-T  
Scale: 1:4

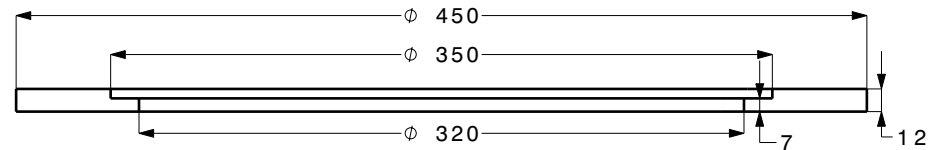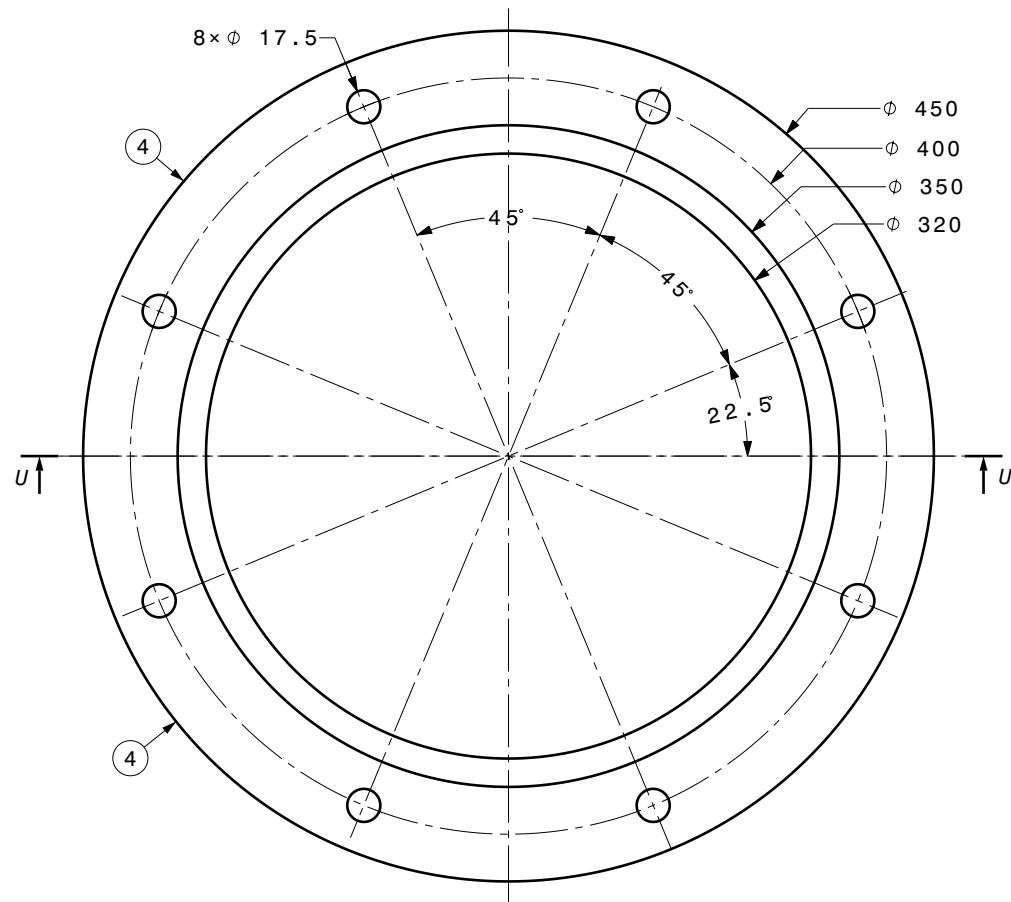


Section view U-U  
Scale: 1:4

| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWN by: M.FazelZadeh  | DATE: -----               | DRAWING NO.: VPO-043-02            | TITLE:<br><br>20M <sup>3</sup> -Process Tank |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|---------------------------|------------------------------------|----------------------------------------------|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi | DATE: -----               | ORDER/CONTRACT NO.:1403/16020/4549 |                                              |
| Roughness (μm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE: -----            | EMPTY WEIGHT: -----±5% Kg | PURCHASER:                         |                                              |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY: 01 SET             | TOLERANCE: ISO 2768-VL    | SMS Deomajo Company                |                                              |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT: mm                | SHEET: -----              | SIZE: A4                           |                                              |




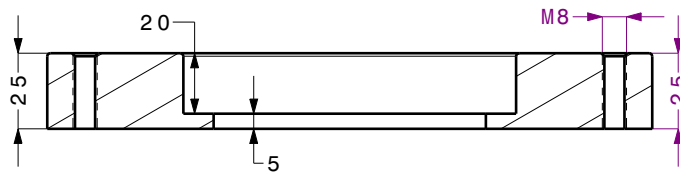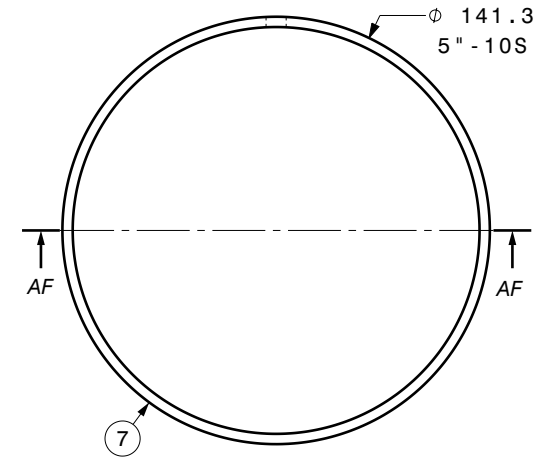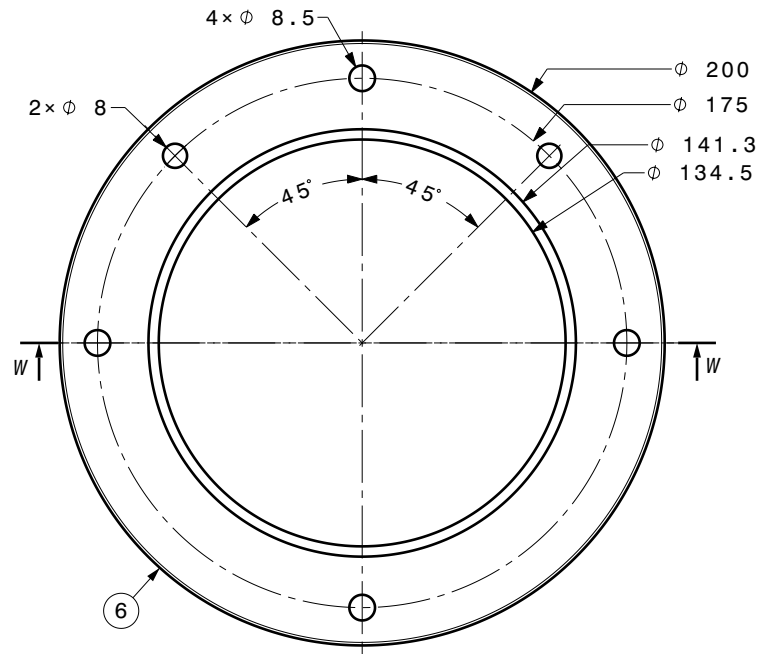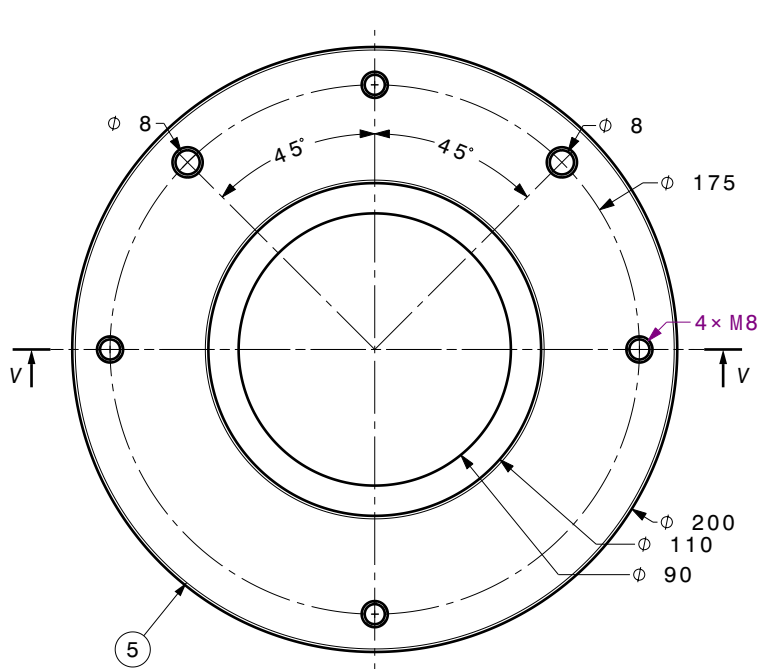

Section view V-V  
Scale: 2:5


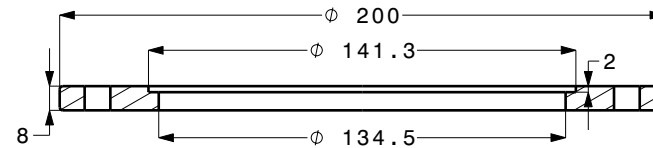


Section view W-W  
Scale: 2:5


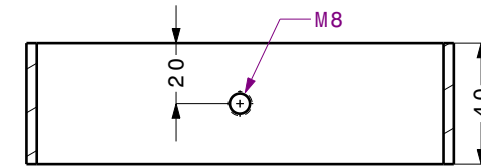


Section view AF-AF  
Scale: 2:5



| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWED by: M.FazelZadeh |              | DATE: -----               | DRAWING NO.: VPO-043-02 | TITLE:<br><br>20M <sup>3</sup> -Process Tank |                                    |                                       |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|--------------|---------------------------|-------------------------|----------------------------------------------|------------------------------------|---------------------------------------|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi |              | DATE: -----               |                         |                                              | ORDER/CONTRACT NO.:1403/16020/4549 |                                       |
| Roughness (μm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     |          | -----                   | SCALE: ----- | EMPTY WEIGHT: -----±5% Kg |                         |                                              |                                    | PURCHASER:<br><br>SMS Deomajo Company |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           |          | 4                       | QTY: 01 SET  | TOLERANCE: ISO 2768-VL    |                         |                                              |                                    |                                       |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) |          | 4 / 110                 | UNIT: mm     | SHEET: -----<br>SIZE: A4  |                         |                                              |                                    |                                       |

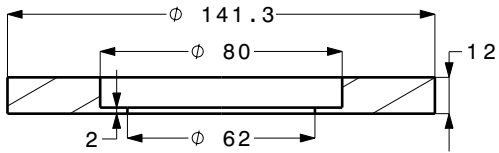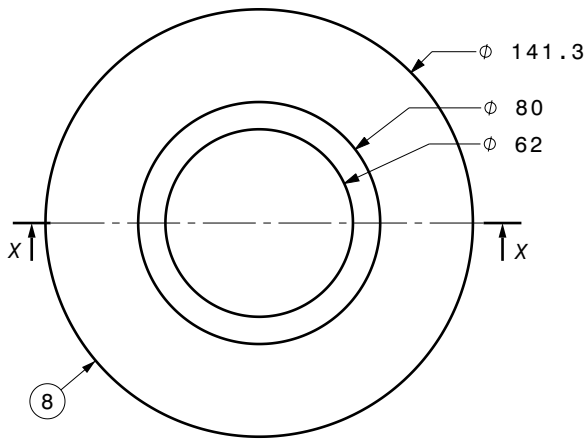



Section view X-X  
Scale: 2:5

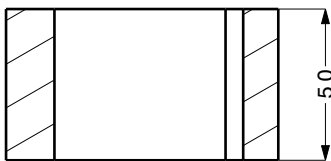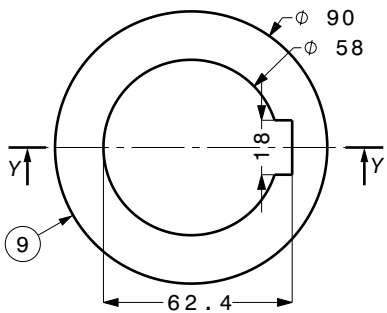



Section view Y-Y  
Scale: 2:5

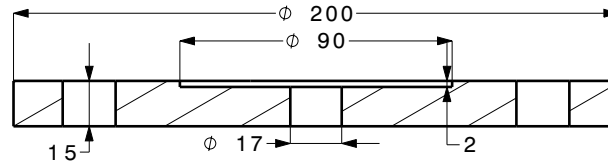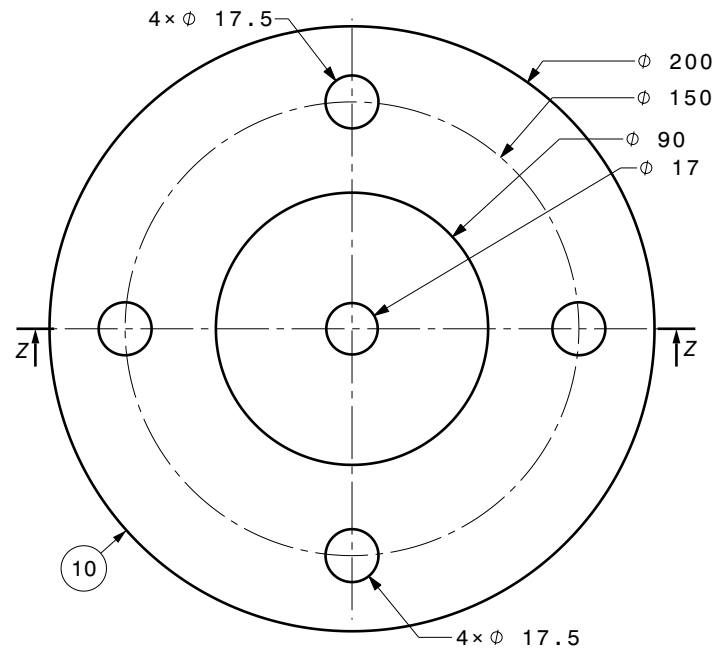

Section view Z-Z  
Scale: 2:5

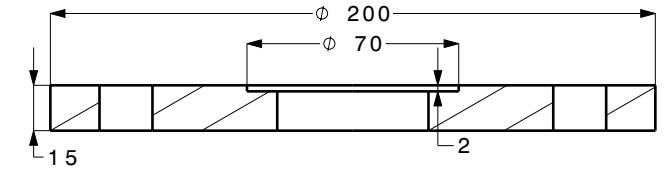
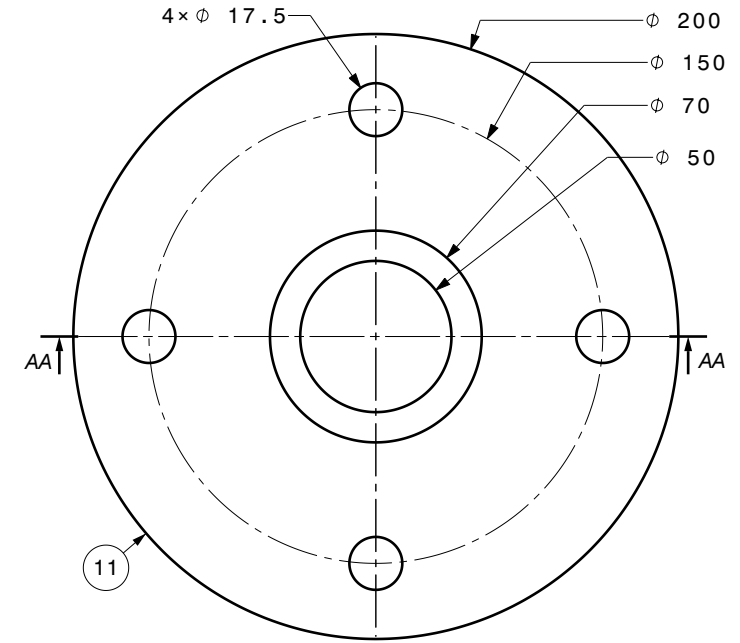


Section view AA-AA  
Scale: 2:5

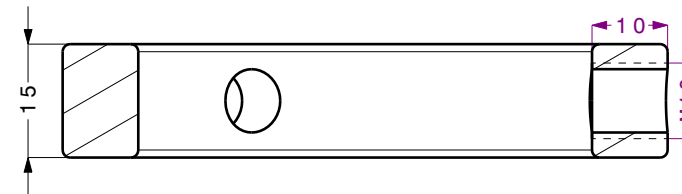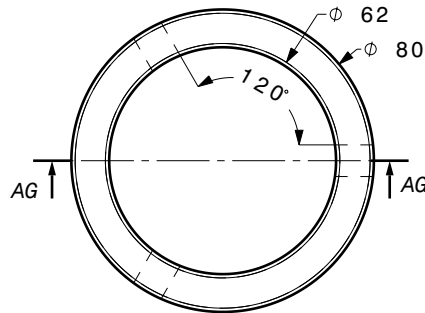



Section view AG-AG  
Scale: 1:1

| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWN by: M.FazelZadeh  |                           | DATE: ----- | DRAWING NO.: VPO-043-02            | TITLE:<br><br>20M <sup>3</sup> -Process Tank |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|---------------------------|-------------|------------------------------------|----------------------------------------------|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi |                           | DATE: ----- | ORDER/CONTRACT NO.:1403/16020/4549 |                                              |
| Roughness (μm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE: -----            | EMPTY WEIGHT: -----±5% Kg |             | PURCHASER:                         |                                              |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY: 01 SET             | TOLERANCE: ISO 2768-VL    |             | SMS Deomajo Company                |                                              |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT: mm                | SHEET: -----              | SIZE: A4    |                                    |                                              |

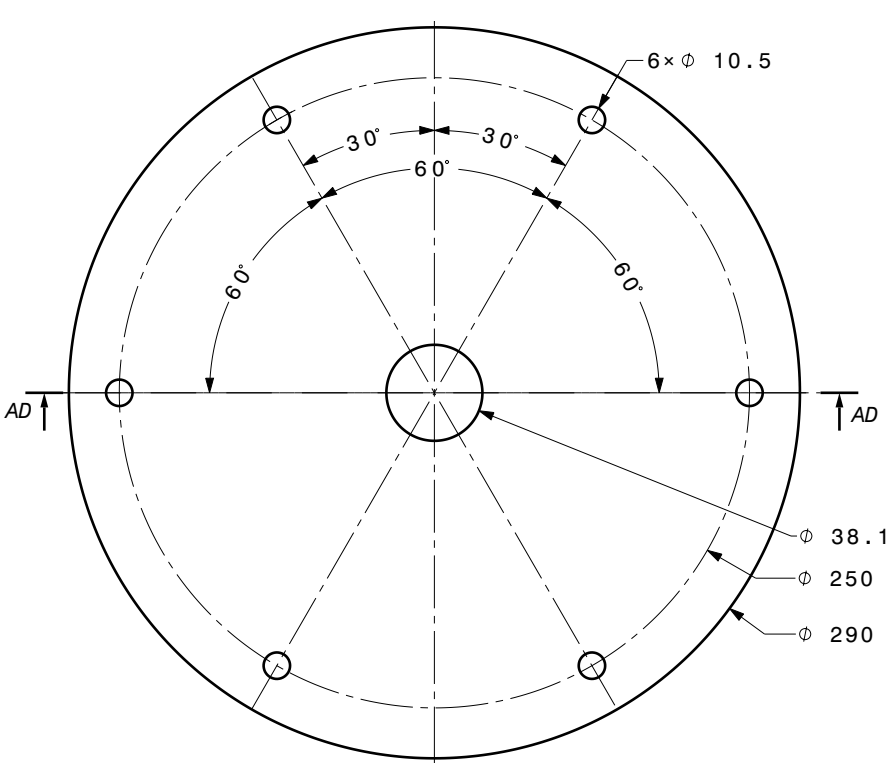






Section view AD-AD  
Scale: 1:3

# Flange CIP


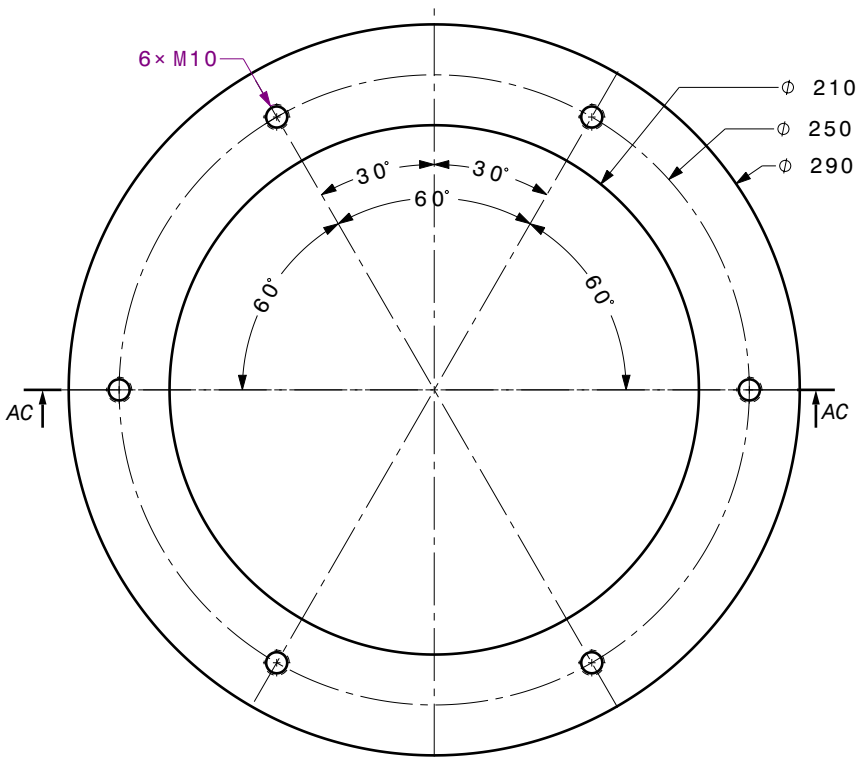


Section view AC-AC  
Scale: 1:3

| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWN by: M.FazelZadeh  | DATE: -----               | DRAWING NO.: VPO-043-02            | TITLE:<br><br>20M <sup>3</sup> -Process Tank |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|---------------------------|------------------------------------|----------------------------------------------|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi | DATE: -----               | ORDER/CONTRACT NO.:1403/16020/4549 |                                              |
| Roughness (μm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE: -----            | EMPTY WEIGHT: -----±5% Kg | PURCHASER:                         |                                              |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY: 01 SET             | TOLERANCE: ISO 2768-VL    | SMS Deomajo Company                |                                              |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT: mm                | SHEET: -----              | SIZE: A4                           |                                              |

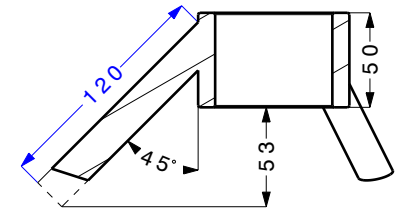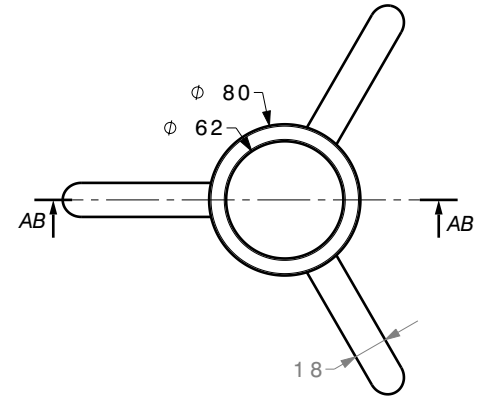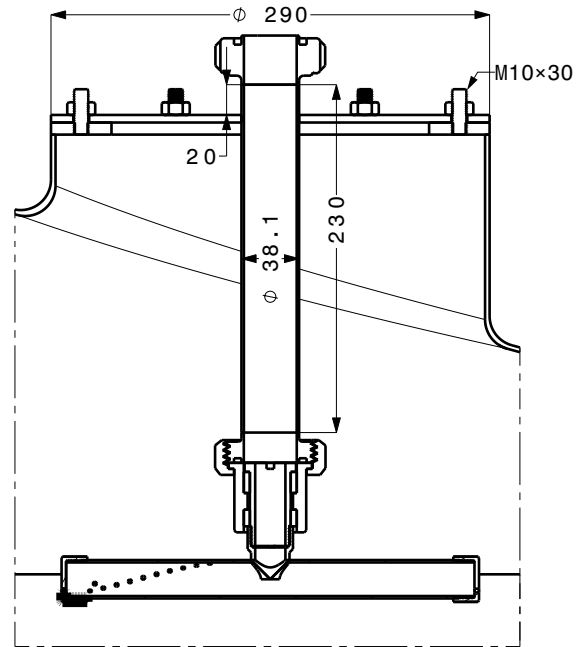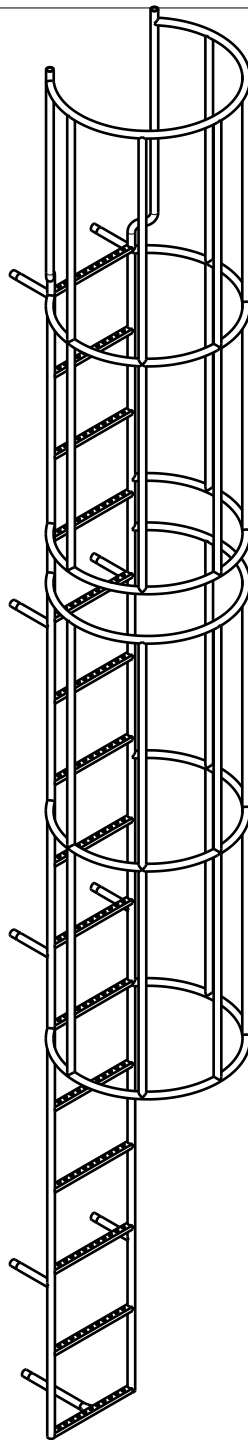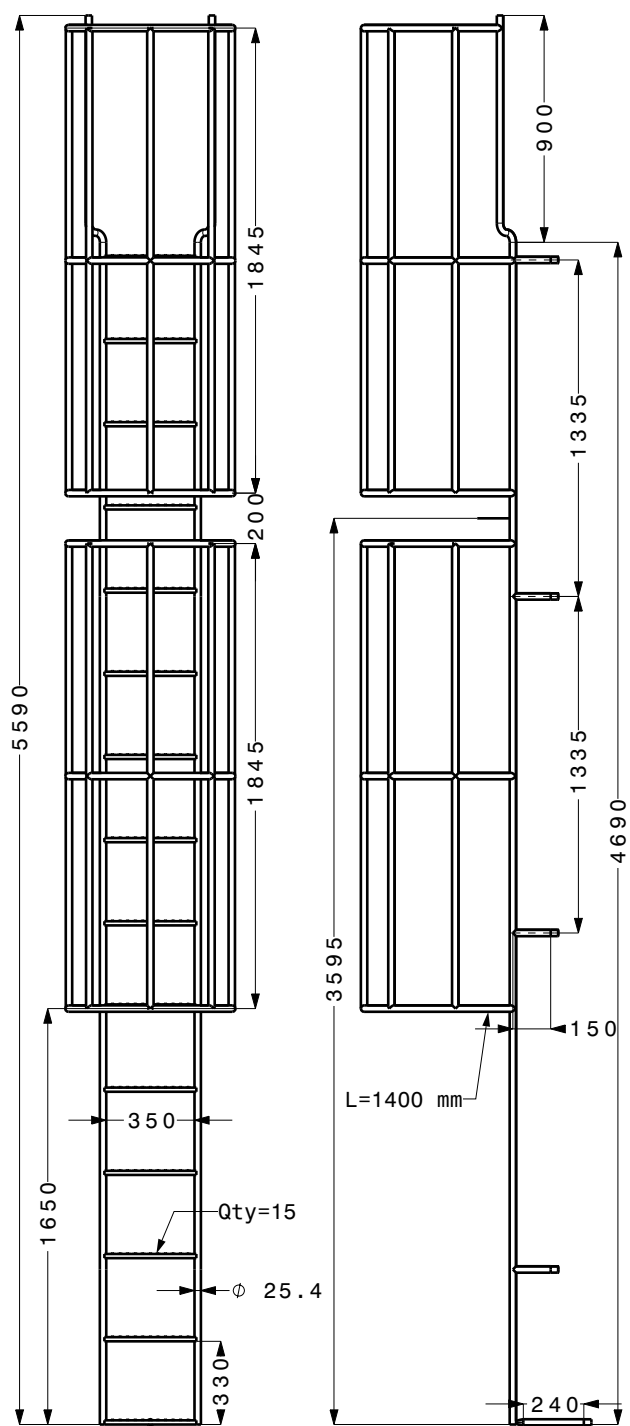

Section view AB-AB  
Scale: 1:4

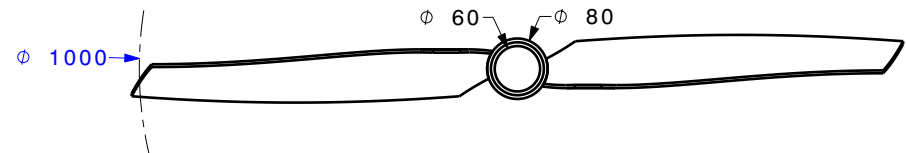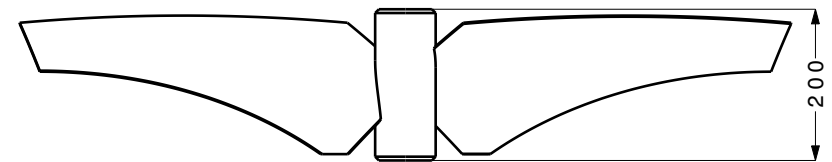

| INNER SHELL                      |          | OUTER SHELL    |           | JACKET                           |          | DRAWN by: M.FazelZadeh  | DATE: -----               | DRAWING NO.: VPO-043-02            | TITLE:<br><br>20M <sup>3</sup> -Process Tank |
|----------------------------------|----------|----------------|-----------|----------------------------------|----------|-------------------------|---------------------------|------------------------------------|----------------------------------------------|
| Material                         | AISI 304 | Material       | AISI 316  | Material                         | AISI 304 | CHECKED by: M.Mohammadi | DATE: -----               | ORDER/CONTRACT NO.:1403/16020/4549 |                                              |
| Roughness (μm)                   | ≤0.9     | INSULATION     |           | Capacity (L)                     | -----    | SCALE: -----            | EMPTY WEIGHT: -----±5% Kg | PURCHASER:                         |                                              |
| Working Pressure (bar)           | atm.     | Material       | Rock wool | Working Pressure (bar)           | 4        | QTY: 01 SET             | TOLERANCE: ISO 2768-VL    | SMS Deomajo Company                |                                              |
| Working Temperature min/max (°c) | 4 / 90   | Thickness (mm) | 100       | Working Temperature min/max (°c) | 4 / 110  | UNIT: mm                | SHEET: -----              | SIZE: A4                           |                                              |

