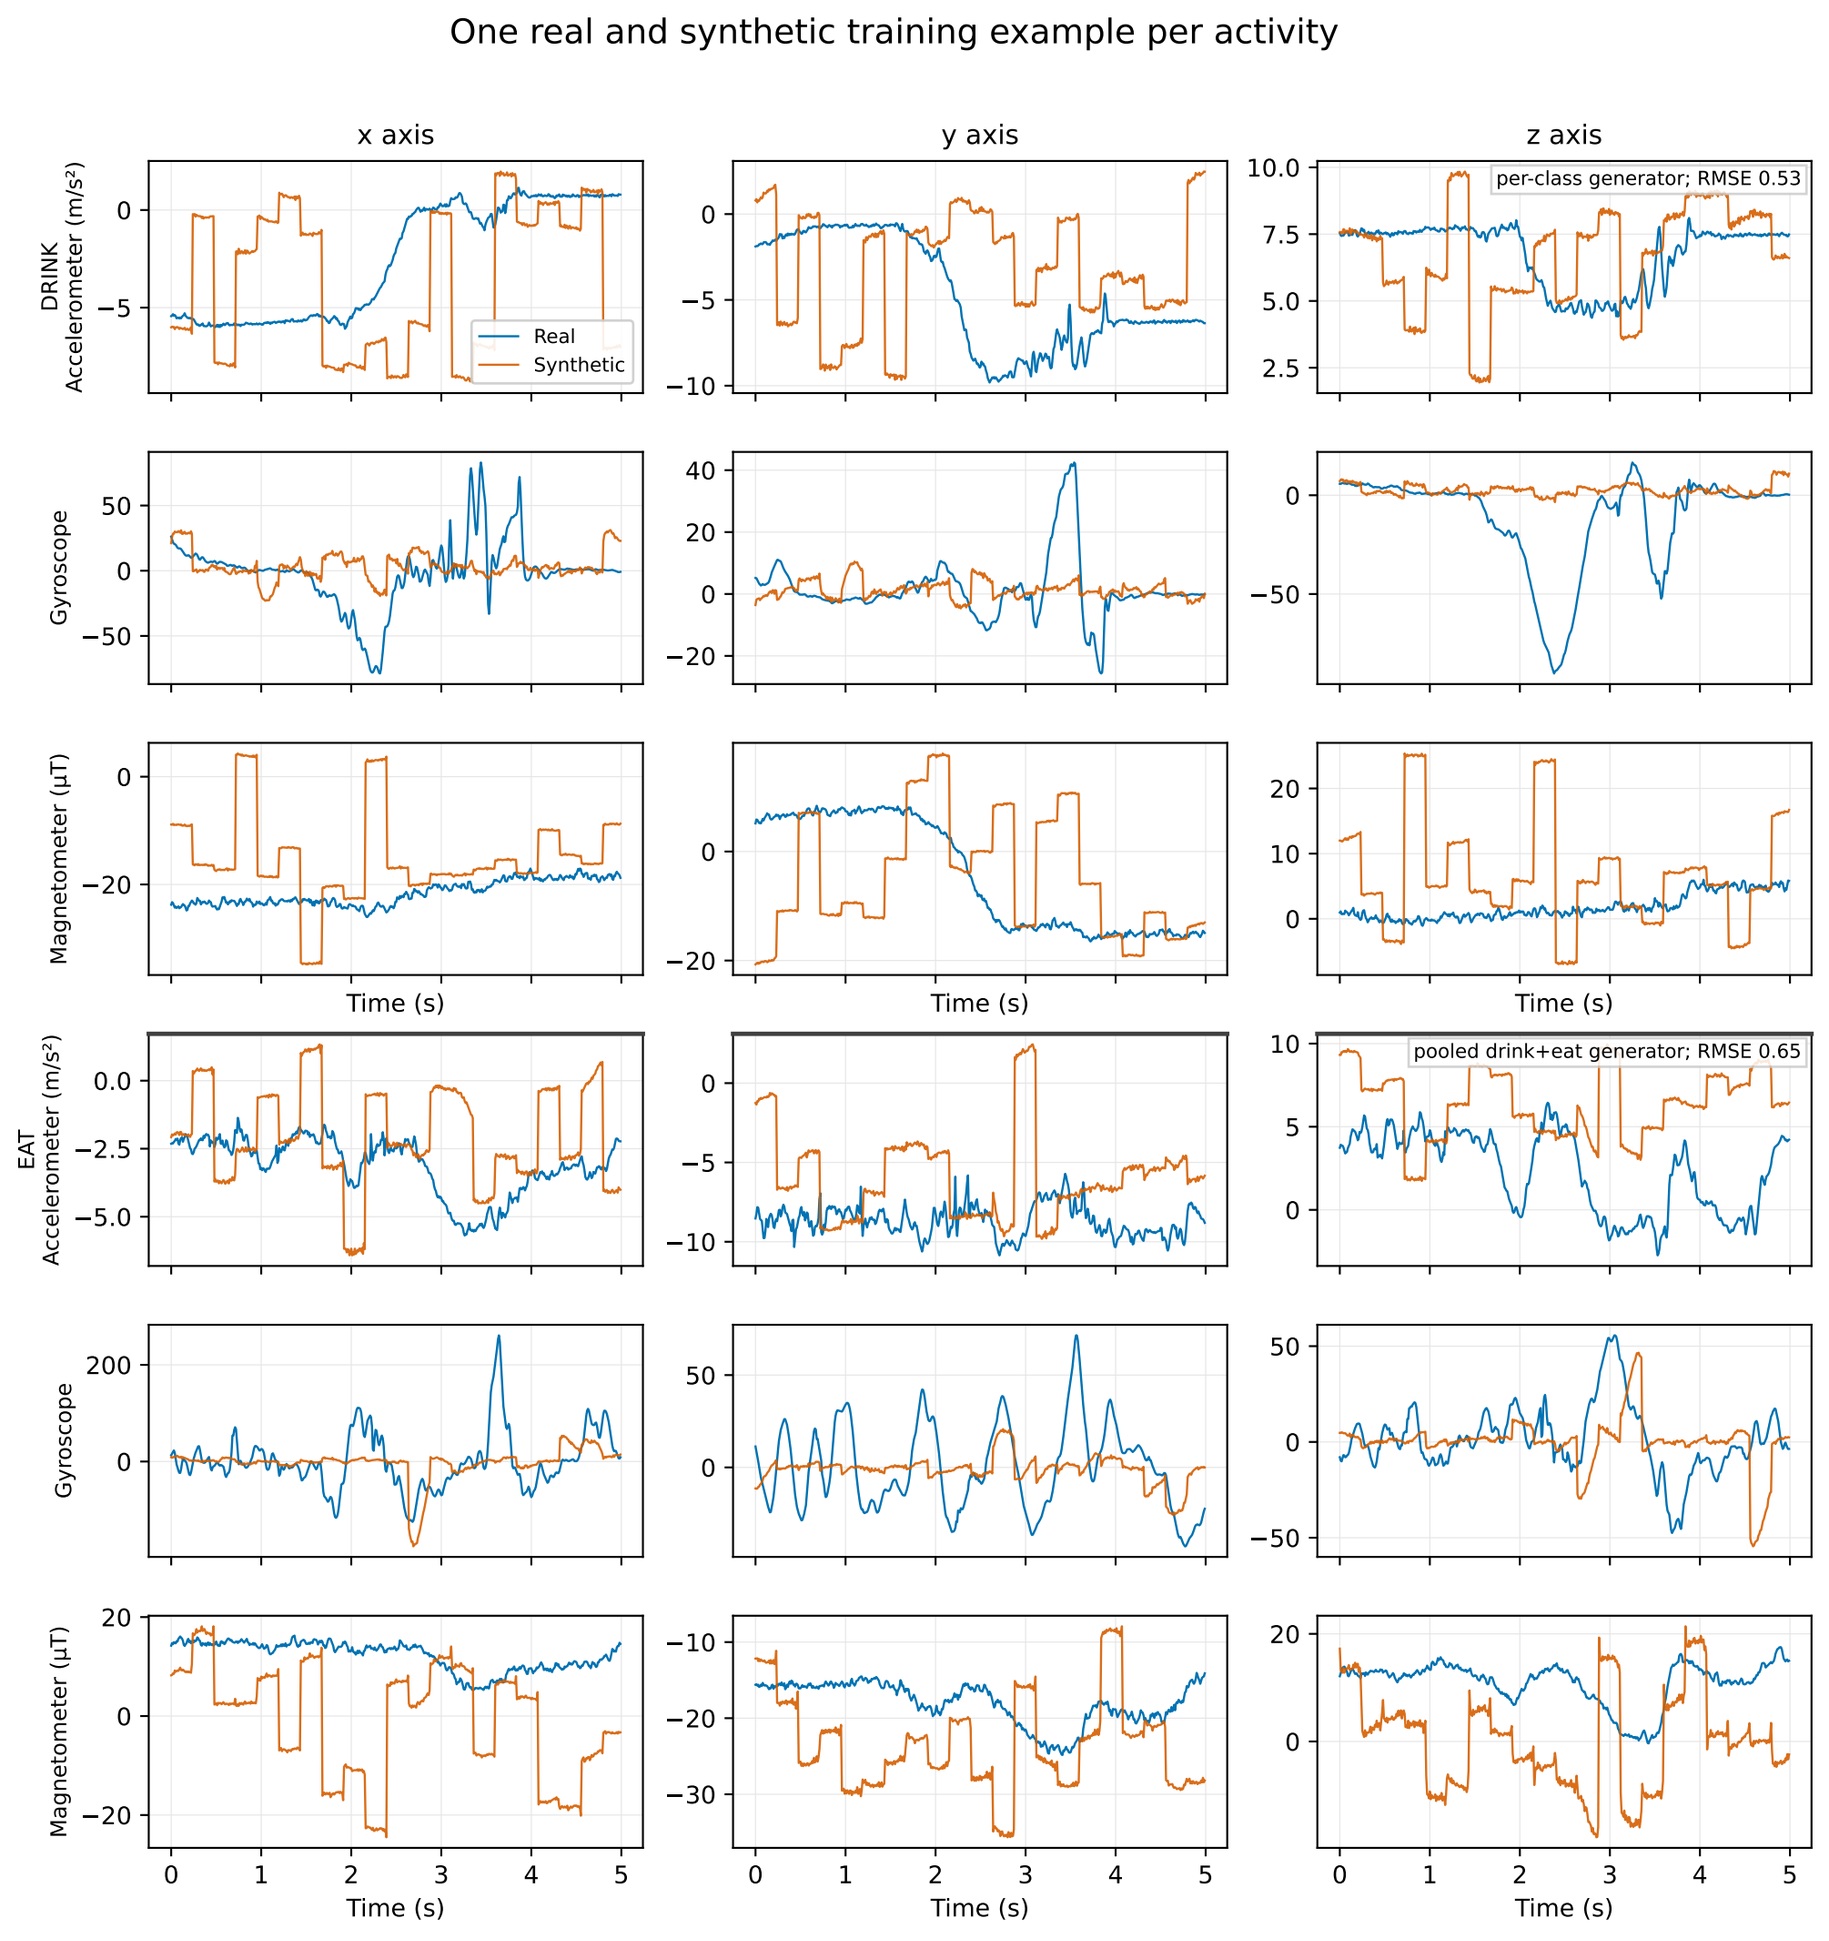


Each panel shows one sensor axis; real and synthetic traces use the same scale. Signals are not smoothed.